




# TEST REPORT

Report No. .... : **CHTEW20060001** Report Verification: 

Project No. .... : **SHT2005026001EW**

FCC ID ..... : **BBOSC100**

Applicant's name ..... : **COBRA ELECTRONICS CORPORATION**

Address ..... : **6500 WEST CORTLAND STREET, CHICAGO, IL 60707 USA**

Manufacturer ..... : **COBRA ELECTRONICS CORPORATION**

Address ..... : **6500 WEST CORTLAND STREET, CHICAGO, IL 60707 USA**

Test item description ..... : **Cobra SC 100**

Trade Mark ..... : **Cobra**

Model/Type reference ..... : **SC100**

Listed Model(s) ..... : **-**

Standard ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample ..... : **May 19, 2020**

Date of testing ..... : **May 19, 2020- May 29, 2020**

Date of issue ..... : **Jun.01, 2020**

Result ..... : **PASS**

Compiled by  
( Position+Printed name+Signature): File administrator Echo Wei

*Echo Wei*

Supervised by  
(Position+Printed name+Signature): Project Engineer Kiki Kong

*Kiki Kong*

Approved by  
(Position+Printed name+Signature): RF Manager Hans Hu

*Hans Hu*

Testing Laboratory Name ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address ..... : **1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,  
Tianliao, Gongming, Shenzhen, China**

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely correspond to the test sample.

## Contents

<b>1.</b>	<b>TEST STANDARDS AND REPORT VERSION</b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b>TEST DESCRIPTION</b>	<b>4</b>
<b>3.</b>	<b>SUMMARY</b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<b>4.</b>	<b>TEST CONFIGURATION</b>	<b>7</b>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<b>5.</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>11</b>
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
<b>6.</b>	<b>APPENDIX REPORT</b>	<b>34</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

### 1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-06-01	Original

## 2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247(b)(3)	PASS
5.4	Power Spectral Density	15.247(e)	PASS
5.5	6dB Bandwidth	15.247(a)(2)	PASS
5.6	99% Occupied Bandwidth	-	PASS <sup>*1</sup>
5.7	Duty cycle	-	PASS <sup>*1</sup>
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.9	Radiated Band Edge Emission	15.205/15.209	PASS
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- <sup>\*1</sup>: No requirement on standard, only report these test data.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	COBRA ELECTRONICS CORPORATION
Address:	6500 WEST CORTLAND STREET, CHICAGO, IL 60707 USA
Manufacturer:	COBRA ELECTRONICS CORPORATION
Address:	6500 WEST CORTLAND STREET, CHICAGO, IL 60707 USA

#### 3.2. Product Description

Name of EUT:	Cobra SC 100
Trade Mark:	Cobra
Model No.:	SC100
Listed Model(s):	-
Power supply:	DC 5V
Hardware version:	90100D1590001
Software version:	COBRA SC-100 V1.06

#### 3.3. Radio Specification Description

Support type <sup>*2</sup> :	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	FPC
Antenna gain:	2.85dBi

Note:

\*2: only show the RF function associated with this report.

### 3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

## 4. TEST CONFIGURATION

### 4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/802.11g/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>01</b>	<b>2412</b>	<b>03</b>	<b>2422</b>
02	2417	04	2427
· :	· :	· :	· :
<b>06</b>	<b>2437</b>	<b>06</b>	<b>2437</b>
· :	· :	· :	· :
10	2457	08	2447
<b>11</b>	<b>2462</b>	<b>09</b>	<b>2452</b>

### 4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

### 4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

#### 4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

#### 4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

#### 4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



## 4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2018/10/11	2021/10/10
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/23	2021/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
●	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULT

☒ **Passed**      ☐ **Not Applicable**

The antenna type is a FPC antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

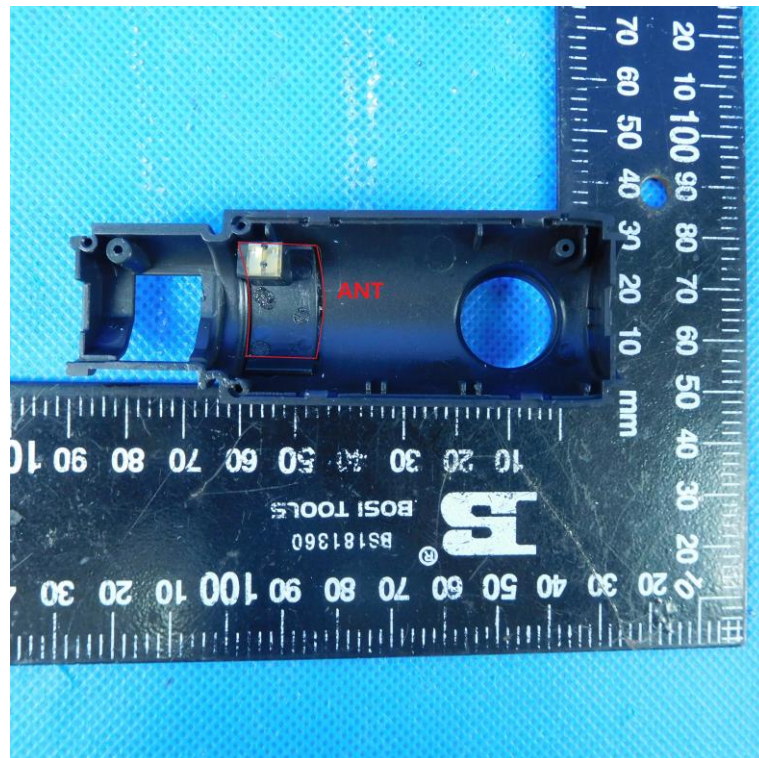

## 5.2. AC Conducted Emission


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

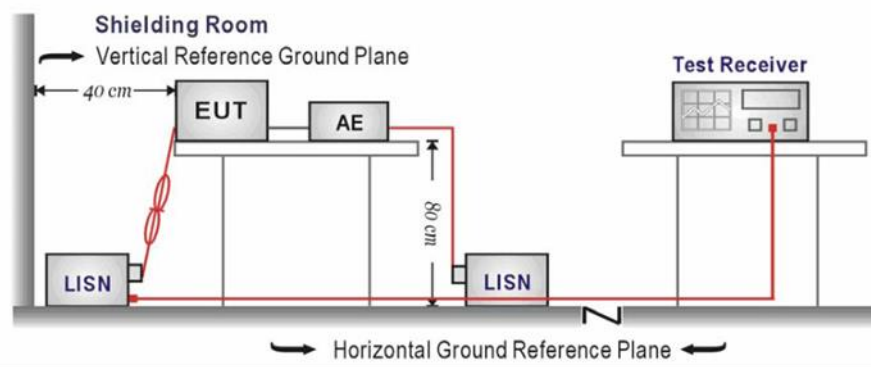

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST MODE:


Please refer to the clause 4.2

### TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

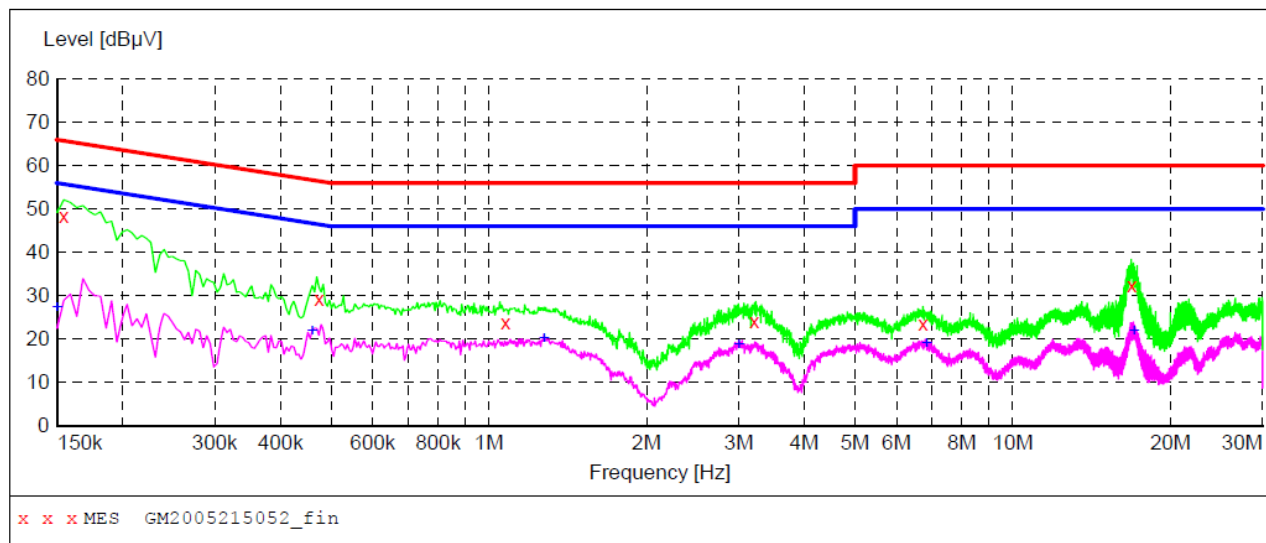**MEASUREMENT RESULT: "GM2005215052\_fin"**


5/21/2020 3:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	48.50	10.0	66	17.3	QP	L1	GND
0.474000	29.10	10.1	56	27.3	QP	L1	GND
1.077000	23.90	10.1	56	32.1	QP	L1	GND
3.210000	24.10	10.2	56	31.9	QP	L1	GND
6.742500	23.40	10.2	60	36.6	QP	L1	GND
16.876500	32.50	10.5	60	27.5	QP	L1	GND

**MEASUREMENT RESULT: "GM2005215052\_fin2"**

5/21/2020 3:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	27.10	10.0	56	28.9	AV	L1	GND
0.460500	21.80	10.1	47	24.9	AV	L1	GND
1.275000	20.00	10.1	46	26.0	AV	L1	GND
3.003000	18.80	10.2	46	27.2	AV	L1	GND
6.850500	18.90	10.2	50	31.1	AV	L1	GND
17.029500	21.90	10.5	50	28.1	AV	L1	GND

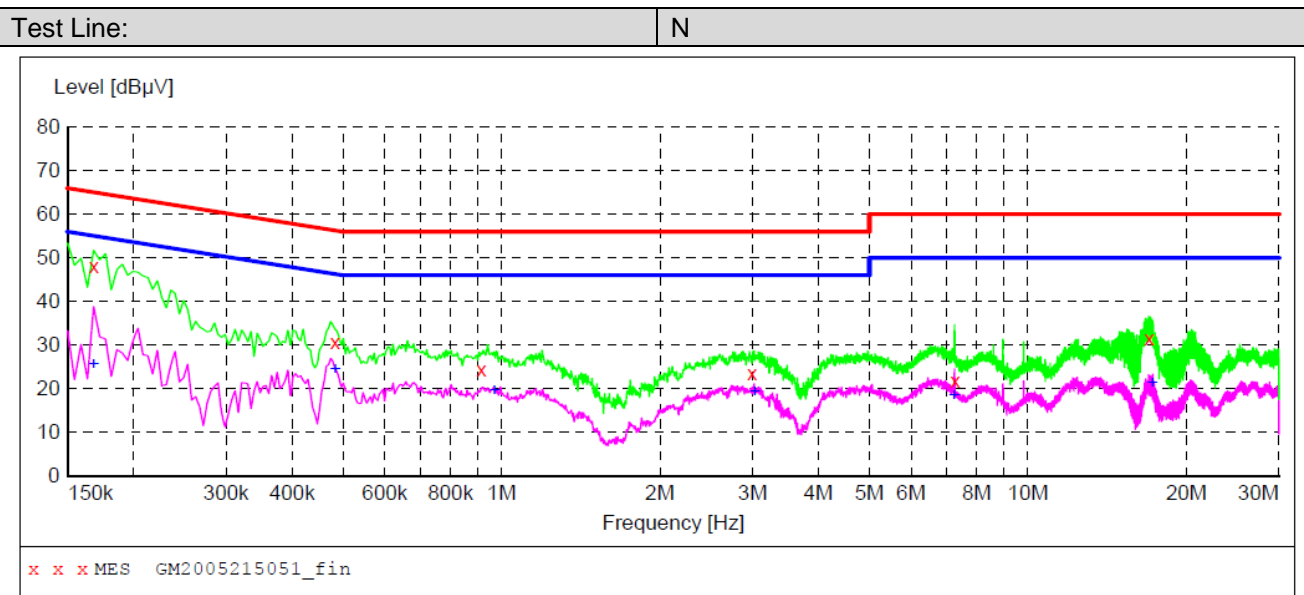

### MEASUREMENT RESULT: "GM2005215051\_fin"

5/21/2020 3:11PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	48.00	10.0	65	17.1	QP	N	GND
0.483000	30.80	10.1	56	25.5	QP	N	GND
0.915000	24.50	10.1	56	31.5	QP	N	GND
2.994000	23.50	10.2	56	32.5	QP	N	GND
7.278000	21.90	10.3	60	38.1	QP	N	GND
16.993500	31.40	10.5	60	28.6	QP	N	GND

### MEASUREMENT RESULT: "GM2005215051\_fin2"

5/21/2020 3:11PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	25.60	10.0	55	29.5	AV	N	GND
0.483000	24.40	10.1	46	21.9	AV	N	GND
0.969000	19.50	10.1	46	26.5	AV	N	GND
3.025500	19.20	10.2	46	26.8	AV	N	GND
7.237500	18.50	10.3	50	31.5	AV	N	GND
17.241000	21.20	10.5	50	28.8	AV	N	GND

### 5.3. Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

#### TEST CONFIGURATION

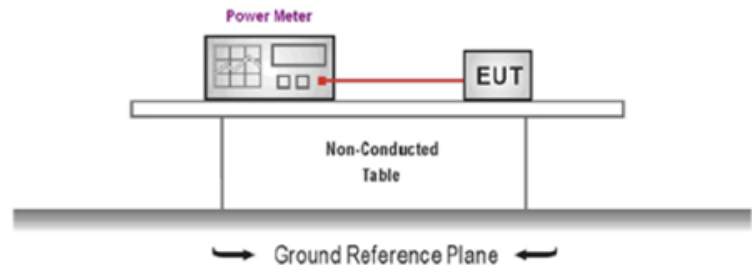

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

#### TEST MODE:

Please refer to the clause 4.2

#### TEST RESULT

☒ Passed      ☐ Not Applicable

#### TEST Data

Please refer to appendix A on the appendix report


## 5.4. Power Spectral Density

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST CONFIGURATION

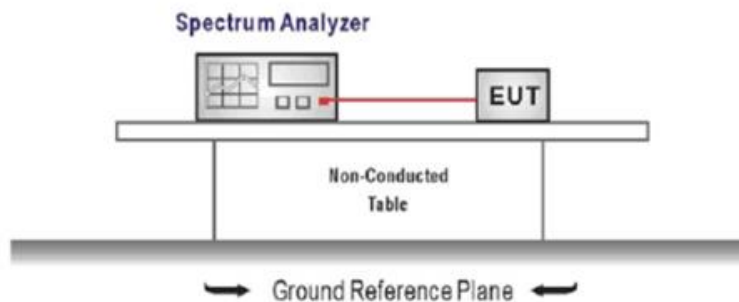

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span =1.5 times the DTS bandwidth  
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ ,  $VBW \geq 3 \times RBW$   
Sweep time = auto couple  
Detector = peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

☒ **Passed**      ☐ **Not Applicable**

### TEST Data

Please refer to appendix B on the appendix report




## 5.5. 6dB bandwidth

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST CONFIGURATION

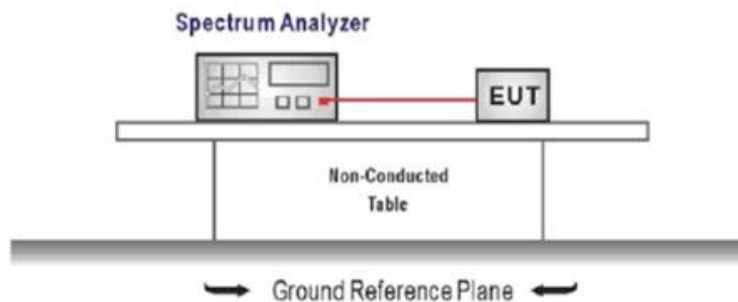

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = DTS channel center frequency  
Span = 2 x DTS bandwidth  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Sweep time = auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

☒ Passed      ☐ Not Applicable

### TEST Data


Please refer to appendix C on the appendix report

## 5.6. 99% Occupied Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

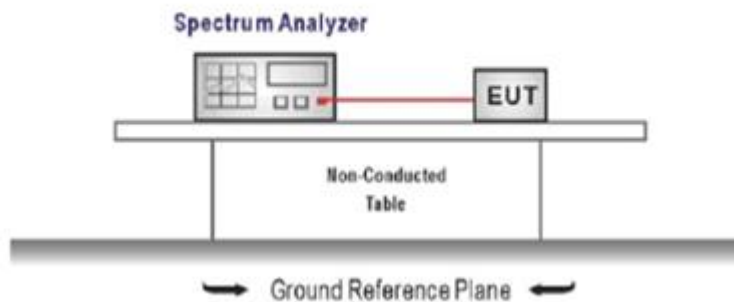

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = channel center frequency  
Span  $\geq 1.5 \times \text{OBW}$   
RBW = 1%~5%OBW  
VBW  $\geq 3 \times \text{RBW}$   
Sweep time = auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

☒ Passed ☐ Not Applicable

### TEST Data

Please refer to appendix D on the appendix report

## 5.7. Duty Cycle

### LIMIT

N/A

### TEST CONFIGURATION



### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW  $\geq$  RBW  
Sweep=as necessary to capture the entire dwell time,  
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

### TEST MODE:

Please refer to the clause 4.2

### TEST Data


Please refer to appendix E on the appendix report

## 5.8. Conducted Band edge and Spurious Emission

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

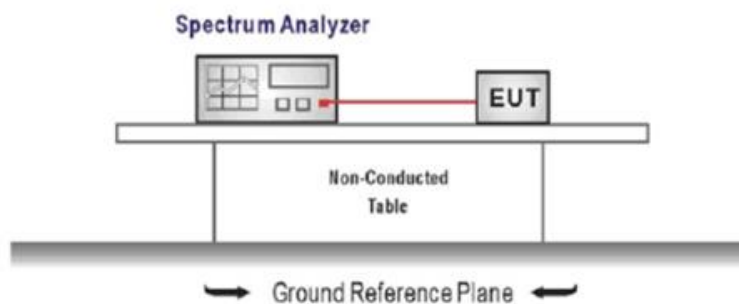

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level  
  
Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq 3 \times$  RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

### TEST MODE:

Please refer to the clause 4.2

**TEST RESULT**

☒ **Passed**      ☐ **Not Applicable**

**TEST Data**

Please refer to appendix F on the appendix report


## 5.9. Radiated Band edge Emission

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

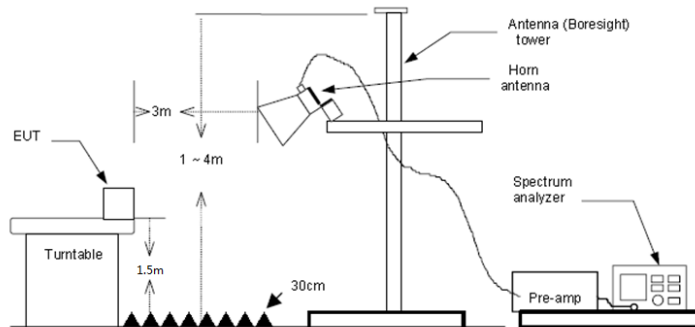

### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
  - a) Span shall wide enough to fully capture the emission being measured
  - b) Set RBW=100kHz for <1GHz, VBW=3\*RBW, Sweep time=auto, Detector=peak, Trace=max hold
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

  - VBW=10Hz, When duty cycle is no less than 98 percent
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor+ Aux Factor
- 2) Over Limit = Level - Limit

802.11b						CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	33.66	27.96	7.73	38.17	20.0	51.18	74.00	-22.82	Vertical	Peak
2390.01	33.71	27.72	7.84	37.97	20.0	51.30	74.00	-22.70	Vertical	Peak
2310.00	33.96	27.96	7.73	38.17	20.0	51.48	74.00	-22.52	Horizontal	Peak
2390.01	33.33	27.72	7.84	37.97	20.0	50.92	74.00	-23.08	Horizontal	Peak
2310.00	28.33	27.96	7.73	38.17	20.0	45.85	54.00	-8.15	Vertical	Average
2390.01	28.71	27.72	7.84	37.97	20.0	46.30	54.00	-7.70	Vertical	Average
2310.00	27.29	27.96	7.73	38.17	20.0	44.81	54.00	-9.19	Horizontal	Average
2390.01	27.19	27.72	7.84	37.97	20.0	44.78	54.00	-9.22	Horizontal	Average

802.11b						CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	34.14	27.43	8.04	37.59	20.0	52.02	74.00	-21.98	Vertical	Peak
2500.00	33.44	27.40	8.08	37.38	20.0	51.54	74.00	-22.46	Vertical	Peak
2483.49	34.06	27.43	8.04	37.59	20.0	51.94	74.00	-22.06	Horizontal	Peak
2500.00	34.28	27.40	8.08	37.38	20.0	52.38	74.00	-21.62	Horizontal	Peak
2483.49	27.98	27.43	8.04	37.59	20.0	45.86	54.00	-8.14	Vertical	Average
2500.00	26.76	27.40	8.08	37.38	20.0	44.86	54.00	-9.14	Vertical	Average
2483.49	27.40	27.43	8.04	37.59	20.0	45.28	54.00	-8.72	Horizontal	Average
2500.00	26.50	27.40	8.08	37.38	20.0	44.60	54.00	-9.40	Horizontal	Average

802.11g						CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	33.67	27.96	7.73	38.17	20.0	51.19	74.00	-22.81	Vertical	Peak
2390.01	40.16	27.72	7.84	37.97	20.0	57.75	74.00	-16.25	Vertical	Peak
2310.00	34.17	27.96	7.73	38.17	20.0	51.69	74.00	-22.31	Horizontal	Peak
2390.01	38.23	27.72	7.84	37.97	20.0	55.82	74.00	-18.18	Horizontal	Peak
2310.00	27.81	27.96	7.73	38.17	20.0	45.33	54.00	-8.67	Vertical	Average
2390.01	30.93	27.72	7.84	37.97	20.0	48.52	54.00	-5.48	Vertical	Average
2310.00	29.52	27.96	7.73	38.17	20.0	47.04	54.00	-6.96	Horizontal	Average
2390.01	30.82	27.72	7.84	37.97	20.0	48.41	54.00	-5.59	Horizontal	Average

802.11b						CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	38.88	27.43	8.04	37.59	20.0	56.76	74.00	-17.24	Vertical	Peak
2500.00	34.26	27.40	8.08	37.38	20.0	52.36	74.00	-21.64	Vertical	Peak
2480.99	42.64	27.44	8.04	37.63	20.0	60.49	74.00	-13.51	Horizontal	Peak
2500.00	33.91	27.40	8.08	37.38	20.0	52.01	74.00	-21.99	Horizontal	Peak
2483.49	29.73	27.43	8.04	37.59	20.0	47.61	54.00	-6.39	Vertical	Average
2500.00	26.65	27.40	8.08	37.38	20.0	44.75	54.00	-9.25	Vertical	Average
2483.49	32.56	27.43	8.04	37.59	20.0	50.44	54.00	-3.56	Horizontal	Average
2500.00	26.75	27.40	8.08	37.38	20.0	44.85	54.00	-9.15	Horizontal	Average



802.11n(HT20)						CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	35.35	27.96	7.73	38.17	20.0	52.87	74.00	-21.13	Vertical	Peak
2390.01	38.45	27.72	7.84	37.97	20.0	56.04	74.00	-17.96	Vertical	Peak
2310.00	35.02	27.96	7.73	38.17	20.0	52.54	74.00	-21.46	Horizontal	Peak
2390.01	38.91	27.72	7.84	37.97	20.0	56.50	74.00	-17.50	Horizontal	Peak
2310.00	27.77	27.96	7.73	38.17	20.0	45.29	54.00	-8.71	Vertical	Average
2390.01	28.66	27.72	7.84	37.97	20.0	46.25	54.00	-7.75	Vertical	Average
2310.00	27.40	27.96	7.73	38.17	20.0	44.92	54.00	-9.08	Horizontal	Average
2390.01	29.55	27.72	7.84	37.97	20.0	47.14	54.00	-6.86	Horizontal	Average

802.11n(HT20)						CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	36.81	27.43	8.04	37.59	20.0	54.69	74.00	-19.31	Vertical	Peak
2500.00	35.33	27.40	8.08	37.38	20.0	53.43	74.00	-20.57	Vertical	Peak
2483.49	37.30	27.43	8.04	37.59	20.0	55.18	74.00	-18.82	Horizontal	Peak
2500.00	34.06	27.40	8.08	37.38	20.0	52.16	74.00	-21.84	Horizontal	Peak
2483.49	28.82	27.43	8.04	37.59	20.0	46.70	54.00	-7.30	Vertical	Average
2500.00	27.84	27.40	8.08	37.38	20.0	45.94	54.00	-8.06	Vertical	Average
2483.49	29.81	27.43	8.04	37.59	20.0	47.69	54.00	-6.31	Horizontal	Average
2500.00	27.48	27.40	8.08	37.38	20.0	45.58	54.00	-8.42	Horizontal	Average

802.11n(HT40)						CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	34.12	27.96	7.73	38.17	20.0	51.64	74.00	-22.36	Vertical	Peak
2389.99	34.61	27.72	7.84	37.97	20.0	52.20	74.00	-21.80	Vertical	Peak
2310.00	33.48	27.96	7.73	38.17	20.0	51.00	74.00	-23.00	Horizontal	Peak
2389.99	34.47	27.72	7.84	37.97	20.0	52.06	74.00	-21.94	Horizontal	Peak
2310.00	28.41	27.96	7.73	38.17	20.0	45.93	54.00	-8.07	Vertical	Average
2389.99	28.51	27.72	7.84	37.97	20.0	46.10	54.00	-7.90	Vertical	Average
2310.00	29.23	27.96	7.73	38.17	20.0	46.75	54.00	-7.25	Horizontal	Average
2389.99	28.25	27.72	7.84	37.97	20.0	45.84	54.00	-8.16	Horizontal	Average

802.11n(HT40)						CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Aux Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	34.24	27.43	8.04	37.59	20.0	52.12	74.00	-21.88	Vertical	Peak
2500.00	35.05	27.40	8.08	37.38	20.0	53.15	74.00	-20.85	Vertical	Peak
2483.50	36.07	27.43	8.04	37.59	20.0	53.95	74.00	-20.05	Horizontal	Peak
2500.00	33.91	27.40	8.08	37.38	20.0	52.01	74.00	-21.99	Horizontal	Peak
2483.50	27.33	27.43	8.04	37.59	20.0	45.21	54.00	-8.79	Vertical	Average
2500.00	28.37	27.40	8.08	37.38	20.0	46.47	54.00	-7.53	Vertical	Average
2483.50	28.53	27.43	8.04	37.59	20.0	46.41	54.00	-7.59	Horizontal	Average
2500.00	28.02	27.40	8.08	37.38	20.0	46.12	54.00	-7.88	Horizontal	Average

## 5.10. Radiated Spurious Emission

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m +  $40 \cdot \log(300/3)$  = Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +  $40 \cdot \log(30/3)$  = Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

### TEST CONFIGURATION


#### ➤ 9 kHz ~ 30 MHz

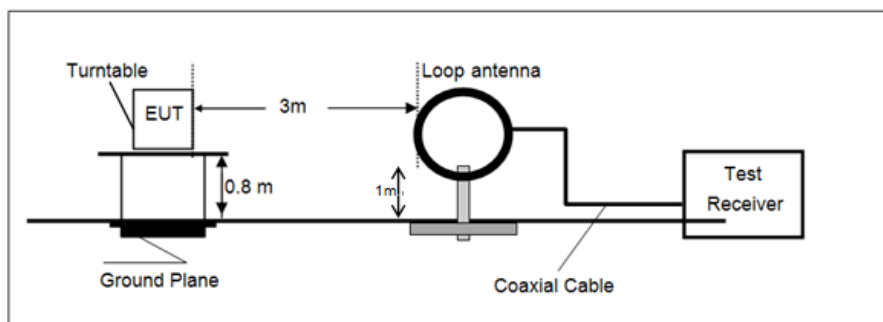

#### ➤ 30 MHz ~ 1 GHz

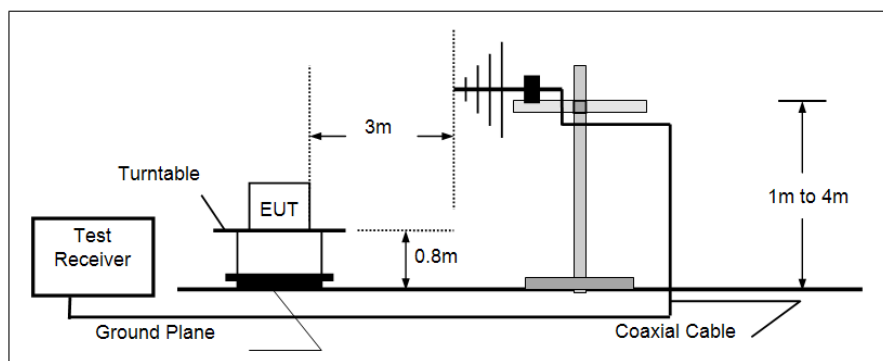

#### ➤ Above 1 GHz

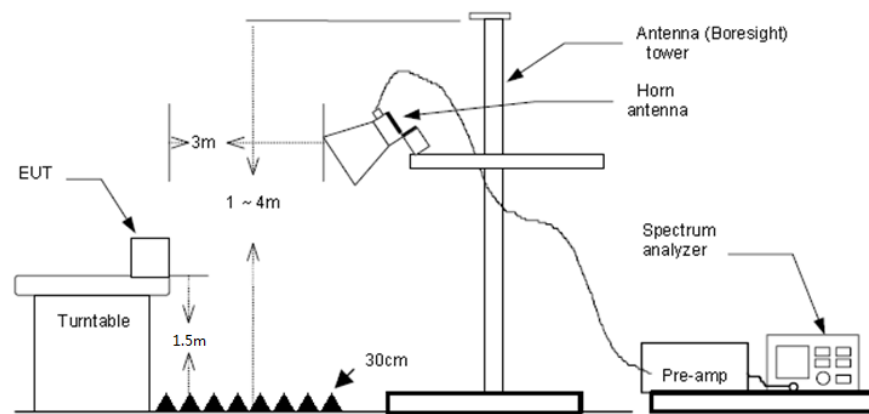

## TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - a) Span shall wide enough to fully capture the emission being measured;
  - b) Below 1 GHz:
 

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

  - VBW=10Hz, When duty cycle is no less than 98 percent
  - VBW $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

## TEST MODE:

Please refer to the clause 4.2

## TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Above 1GHz Final Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) Over Limit = Level - Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz

**TEST DATA FOR 9 kHz ~ 30 MHz**


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

**TEST DATA FOR 30 MHz ~ 1000 MHz**

Have pre-scan all test channel, found CH06 of 802.11B which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

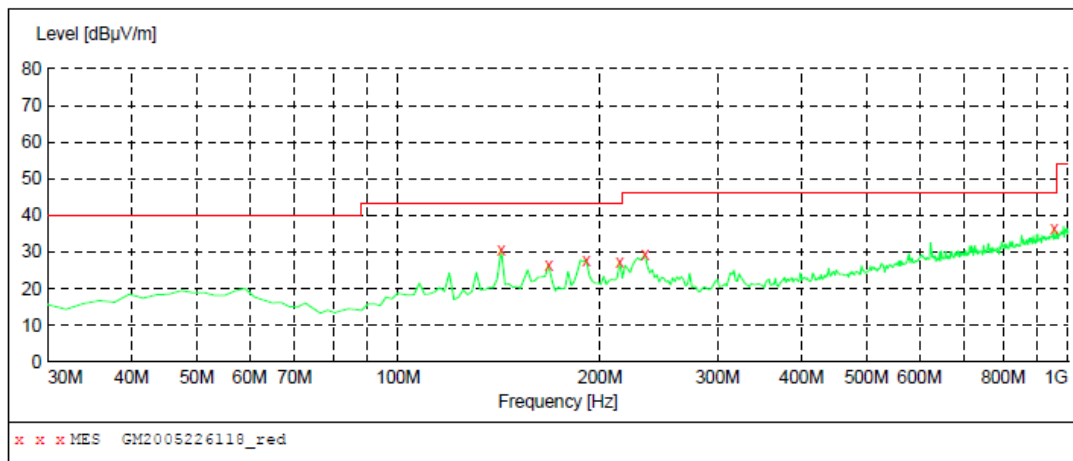
**MEASUREMENT RESULT: "GM2005226118\_red"**

5/22/2020 11:36PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
142.520000	30.70	-13.9	43.5	12.8	QP	100.0	270.00	HORIZONTAL
167.740000	26.50	-12.6	43.5	17.0	QP	100.0	270.00	HORIZONTAL
191.020000	27.90	-10.2	43.5	15.6	QP	100.0	254.00	HORIZONTAL
214.300000	27.30	-9.8	43.5	16.2	QP	100.0	254.00	HORIZONTAL
233.700000	29.20	-8.8	46.0	16.8	QP	100.0	0.00	HORIZONTAL
953.440000	36.50	8.0	46.0	9.5	QP	100.0	114.00	HORIZONTAL

Polarization:

Vertical

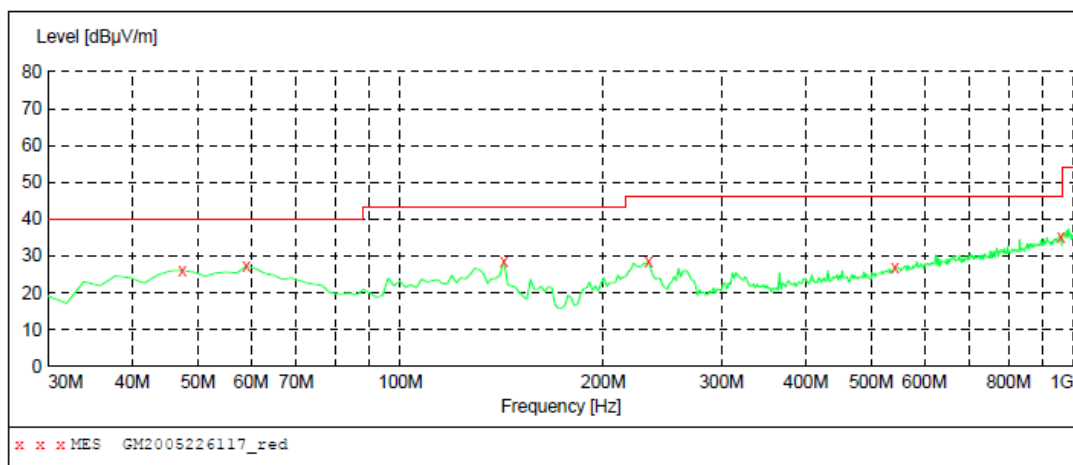**MEASUREMENT RESULT: "GM2005226117\_red"**

5/22/2020 11:34PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.10	-8.4	40.0	13.9	QP	100.0	10.00	VERTICAL
59.100000	27.20	-9.0	40.0	12.8	QP	100.0	164.00	VERTICAL
142.520000	28.60	-13.9	43.5	14.9	QP	100.0	319.00	VERTICAL
233.700000	28.40	-8.8	46.0	17.6	QP	100.0	360.00	VERTICAL
542.160000	26.90	-0.3	46.0	19.1	QP	100.0	242.00	VERTICAL
955.380000	35.00	8.1	46.0	11.0	QP	100.0	152.00	VERTICAL

**TEST DATA FOR 1 GHz ~ 25 GHz**

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1333.28	36.07	26.20	5.87	37.30	30.84	74.00	-43.16	Vertical	Peak
4444.56	32.73	30.78	11.16	36.65	38.02	74.00	-35.98	Vertical	Peak
5177.97	32.34	31.83	12.05	34.71	41.51	74.00	-32.49	Vertical	Peak
8022.46	31.82	37.14	15.60	34.40	50.16	74.00	-23.84	Vertical	Peak
1232.12	36.37	25.79	5.61	37.65	30.12	74.00	-43.88	Horizontal	Peak
3072.77	36.05	28.89	9.10	37.72	36.32	74.00	-37.68	Horizontal	Peak
5034.99	32.79	32.11	11.99	35.41	41.48	74.00	-32.52	Horizontal	Peak
8659.10	30.65	37.54	15.94	34.56	49.57	74.00	-24.43	Horizontal	Peak

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1346.93	34.76	26.28	5.90	37.31	29.63	74.00	-44.37	Vertical	Peak
3072.77	37.13	28.89	9.10	37.72	37.40	74.00	-36.60	Vertical	Peak
5164.81	31.94	31.91	12.05	34.79	41.11	74.00	-32.89	Vertical	Peak
8022.46	30.93	37.14	15.60	34.40	49.27	74.00	-24.73	Vertical	Peak
1346.93	34.72	26.28	5.90	37.31	29.59	74.00	-44.41	Horizontal	Peak
2810.85	33.73	28.44	8.92	35.23	35.86	74.00	-38.14	Horizontal	Peak
5073.59	31.39	32.20	12.03	35.24	40.38	74.00	-33.62	Horizontal	Peak
9157.86	30.71	38.63	15.97	35.71	49.60	74.00	-24.40	Horizontal	Peak

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1340.09	35.65	26.24	5.89	37.28	30.50	74.00	-43.50	Vertical	Peak
3143.98	36.61	29.00	9.28	37.77	37.12	74.00	-36.88	Vertical	Peak
5406.96	32.80	31.70	12.49	35.38	41.61	74.00	-32.39	Vertical	Peak
8506.17	31.42	37.01	15.90	34.28	50.05	74.00	-23.95	Vertical	Peak
1561.22	35.99	25.48	6.33	37.63	30.17	74.00	-43.83	Horizontal	Peak
2995.54	37.68	28.70	8.94	37.64	37.68	74.00	-36.32	Horizontal	Peak
5164.81	32.05	31.91	12.05	34.79	41.22	74.00	-32.78	Horizontal	Peak
9042.04	31.23	38.08	16.01	35.32	50.00	74.00	-24.00	Horizontal	Peak

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1676.56	36.56	25.10	6.52	37.85	30.33	74.00	-43.67	Vertical	Peak
3112.13	36.38	29.00	9.19	37.70	36.87	74.00	-37.13	Vertical	Peak
5125.52	32.46	32.10	12.04	35.02	41.58	74.00	-32.42	Vertical	Peak
8042.90	30.96	37.19	15.67	34.37	49.45	74.00	-24.55	Vertical	Peak
1506.56	36.04	25.85	6.23	37.66	30.46	74.00	-43.54	Horizontal	Peak
3057.17	36.83	28.83	9.07	37.77	36.96	74.00	-37.04	Horizontal	Peak
5164.81	31.66	31.91	12.05	34.79	40.83	74.00	-33.17	Horizontal	Peak
8725.48	31.38	37.70	15.96	34.68	50.36	74.00	-23.64	Horizontal	Peak

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1706.70	36.22	25.11	6.57	37.87	30.03	74.00	-43.97	Vertical	Peak
3184.25	35.24	28.93	9.39	37.50	36.06	74.00	-37.94	Vertical	Peak
6628.18	30.29	34.30	14.10	35.06	43.63	74.00	-30.37	Vertical	Peak
8882.35	30.60	37.70	16.00	34.96	49.34	74.00	-24.66	Vertical	Peak
1728.56	35.71	25.16	6.61	37.90	29.58	74.00	-44.42	Horizontal	Peak
3088.45	35.25	28.95	9.14	37.68	35.66	74.00	-38.34	Horizontal	Peak
5125.52	31.32	32.10	12.04	35.02	40.44	74.00	-33.56	Horizontal	Peak
7394.88	31.88	36.59	14.73	34.68	48.52	74.00	-25.48	Horizontal	Peak

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1182.94	37.22	25.53	5.48	37.65	30.58	74.00	-43.42	Vertical	Peak
3151.99	36.64	29.00	9.30	37.71	37.23	74.00	-36.77	Vertical	Peak
4267.18	38.53	30.23	10.85	37.12	42.49	74.00	-31.51	Vertical	Peak
9042.04	31.21	38.08	16.01	35.32	49.98	74.00	-24.02	Vertical	Peak
1593.34	36.57	25.41	6.38	37.58	30.78	74.00	-43.22	Horizontal	Peak
3200.50	36.03	28.90	9.44	37.40	36.97	74.00	-37.03	Horizontal	Peak
4664.81	34.37	31.26	11.54	36.47	40.70	74.00	-33.30	Horizontal	Peak
8571.38	30.89	37.23	15.92	34.40	49.64	74.00	-24.36	Horizontal	Peak



802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1732.97	36.87	25.17	6.61	37.91	30.74	74.00	-43.26	Vertical	Peak
3192.37	35.83	28.92	9.41	37.45	36.71	74.00	-37.29	Vertical	Peak
5112.49	32.08	32.15	12.04	35.07	41.20	74.00	-32.80	Vertical	Peak
8615.13	31.53	37.43	15.93	34.48	50.41	74.00	-23.59	Vertical	Peak
1630.26	36.97	25.22	6.44	37.68	30.95	74.00	-43.05	Horizontal	Peak
3064.96	36.58	28.86	9.09	37.75	36.78	74.00	-37.22	Horizontal	Peak
5151.68	32.34	31.99	12.05	34.86	41.52	74.00	-32.48	Horizontal	Peak
8063.40	30.85	37.20	15.69	34.35	49.39	74.00	-24.61	Horizontal	Peak

802.11n(HT20)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1135.73	37.43	25.40	5.34	37.62	30.55	74.00	-43.45	Vertical	Peak
3216.84	35.95	28.83	9.48	37.38	36.88	74.00	-37.12	Vertical	Peak
5073.59	32.32	32.20	12.03	35.24	41.31	74.00	-32.69	Vertical	Peak
9636.16	30.73	39.34	16.02	36.97	49.12	74.00	-24.88	Vertical	Peak
1371.15	34.83	26.21	5.96	37.40	29.60	74.00	-44.40	Horizontal	Peak
2789.46	34.51	28.36	8.90	34.87	36.90	74.00	-37.10	Horizontal	Peak
5177.97	31.40	31.83	12.05	34.71	40.57	74.00	-33.43	Horizontal	Peak
9322.50	30.17	39.25	15.91	36.27	49.06	74.00	-24.94	Horizontal	Peak

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1188.98	37.85	25.56	5.49	37.65	31.25	74.00	-42.75	Vertical	Peak
3151.99	36.55	29.00	9.30	37.71	37.14	74.00	-36.86	Vertical	Peak
5177.97	32.36	31.83	12.05	34.71	41.53	74.00	-32.47	Vertical	Peak
9587.23	31.71	39.15	15.95	36.93	49.88	74.00	-24.12	Vertical	Peak
1254.27	37.00	25.91	5.67	37.65	30.93	74.00	-43.07	Horizontal	Peak
3151.99	36.55	29.00	9.30	37.71	37.14	74.00	-36.86	Horizontal	Peak
5177.97	32.36	31.83	12.05	34.71	41.53	74.00	-32.47	Horizontal	Peak
9859.47	31.20	39.50	16.30	37.15	49.85	74.00	-24.15	Horizontal	Peak

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1630.26	36.51	25.22	6.44	37.68	30.49	74.00	-43.51	Vertical	Peak
3010.83	37.10	28.72	8.97	37.76	37.03	74.00	-36.97	Vertical	Peak
5191.17	32.22	31.75	12.06	34.63	41.40	74.00	-32.60	Vertical	Peak
8063.40	31.73	37.20	15.69	34.35	50.27	74.00	-23.73	Vertical	Peak
1270.33	36.54	25.94	5.71	37.63	30.56	74.00	-43.44	Horizontal	Peak
2810.85	34.80	28.44	8.92	35.23	36.93	74.00	-37.07	Horizontal	Peak
5164.81	31.55	31.91	12.05	34.79	40.72	74.00	-33.28	Horizontal	Peak
8063.40	31.13	37.20	15.69	34.35	49.67	74.00	-24.33	Horizontal	Peak

802.11n(HT40)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1350.36	35.98	26.30	5.91	37.32	30.87	74.00	-43.13	Vertical	Peak
3151.99	36.75	29.00	9.30	37.71	37.34	74.00	-36.66	Vertical	Peak
5191.17	33.24	31.75	12.06	34.63	42.42	74.00	-31.58	Vertical	Peak
7961.43	32.20	36.95	15.36	34.46	50.05	74.00	-23.95	Vertical	Peak
1371.15	36.25	26.21	5.96	37.40	31.02	74.00	-42.98	Horizontal	Peak
3160.03	36.39	28.98	9.33	37.66	37.04	74.00	-36.96	Horizontal	Peak
5112.49	32.88	32.15	12.04	35.07	42.00	74.00	-32.00	Horizontal	Peak
7961.43	31.50	36.95	15.36	34.46	49.35	74.00	-24.65	Horizontal	Peak

802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1350.36	35.64	26.30	5.91	37.32	30.53	74.00	-43.47	Vertical	Peak
3057.17	36.73	28.83	9.07	37.77	36.86	74.00	-37.14	Vertical	Peak
5138.58	32.31	32.05	12.04	34.94	41.46	74.00	-32.54	Vertical	Peak
9204.60	31.60	38.82	15.95	35.87	50.50	74.00	-23.50	Vertical	Peak
1257.47	37.29	25.92	5.68	37.65	31.24	74.00	-42.76	Horizontal	Peak
2818.01	34.55	28.47	8.92	35.42	36.52	74.00	-37.48	Horizontal	Peak
6511.12	32.54	34.04	13.88	35.30	45.16	74.00	-28.84	Horizontal	Peak
8637.08	31.31	37.47	15.94	34.52	50.20	74.00	-23.80	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

## 6. APPENDIX REPORT