



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-U6IW
Equipment Under Test	U6-IW
Test Report Serial Number	TR4209_01
Date of Test	28 April and 6 May 2020
Report Issue Date	8 May 2020

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10019 U.S.A.



Certification of Engineering Report


This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UniFi
Model Number	U6-IW
FCC ID	SWX-U6IW
ISED ID	6545A-U6IW

On this 8th day of May 2020, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government.

Unified Compliance Laboratory



Written By: Alex Macon



Reviewed By: Joseph W. Jackson

Revision History		
Revision	Description	Date
01	Original Report Release	8 May 2020

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	6
2.4	Interface Ports on EUT.....	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	7
2.7	EUT Exercise Software.....	7
2.8	Block Diagram of Test Configuration.....	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	8
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	9
3.5	Test Location.....	9
4	Test Equipment.....	10
4.1	Conducted Emissions at Mains Ports.....	10
4.2	Direct Connect at the Antenna Port Tests.....	10
4.3	Radiated Emissions.....	11
4.4	Equipment Calibration.....	12
4.5	Measurement Uncertainty.....	12
5	Test Results.....	13
5.1	§15.203 Antenna Requirements.....	13
5.2	Conducted Emissions at Mains Ports Data.....	13
5.3	§15.403(i) 26 dB Emissions Bandwidth.....	14
5.4	§15.403(a)(1) Maximum Average Output Power.....	15
5.5	§Radiated Spurious Emissions in the Restricted Bands of § 15.205.....	16
5.6	§15.407(a) Maximum Power Spectral Density.....	20

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Mark Feil
Title	Compliance Manager

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Mark Feil
Title	Compliance Manager

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UniFi
Model Number	U6-IW
Serial Number	NA
Dimensions (cm)	13.3 x 7.6 x 3.2

2.2 Description of EUT

The U6-IW is an in-wall Wi-Fi 6 access point that can be mounted into a standard wall outlet. It includes 4 Gigabit Ethernet ports for wired connectivity, one of which offers PoE passthrough for an 802.3af device. U6-IW delivers an aggregate radio rate of up to 2.7 Gbps with 5 GHz (4x4 MU-MIMO and OFDMA) and 2.4 GHz (2x2 MIMO) radios. U6-IW seamlessly blends into any room with its refined industrial design.

Band	Modulation Bandwidth	Frequency (MHz)
UNII-1	20 MHz	5180, 5200, 5220, 5240
	40 MHz	5190, 5230
	80 MHz	5210
UNII-3	20 MHz	5745, 5765, 5785, 5805, 5825
	40 MHz	5755, 5795,
	80 MHz	5775

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under Unified Compliance Laboratory report.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UniFi MN: U6-IW SN: NA	In-Wall Access point	See Section 2.4

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
POE	1	Ethernet/<3m

2.5 Operating Environment

Power Supply	120 VAC
AC Mains Frequency	60 Hz
Temperature	21.5 – 22.3 °C
Humidity	22.6 – 26.5 %
Barometric Pressure	1014psi

2.6 Operating Modes

The U6-IW was tested using test software in order to enable to constant transmission of over 98% All emission modes of 802.11 a/n/ac/ax were investigated.

2.7 EUT Exercise Software

Ubiquiti test software and firmware were used to control the transceivers of the EUT. (ART)

2.8 Block Diagram of Test Configuration

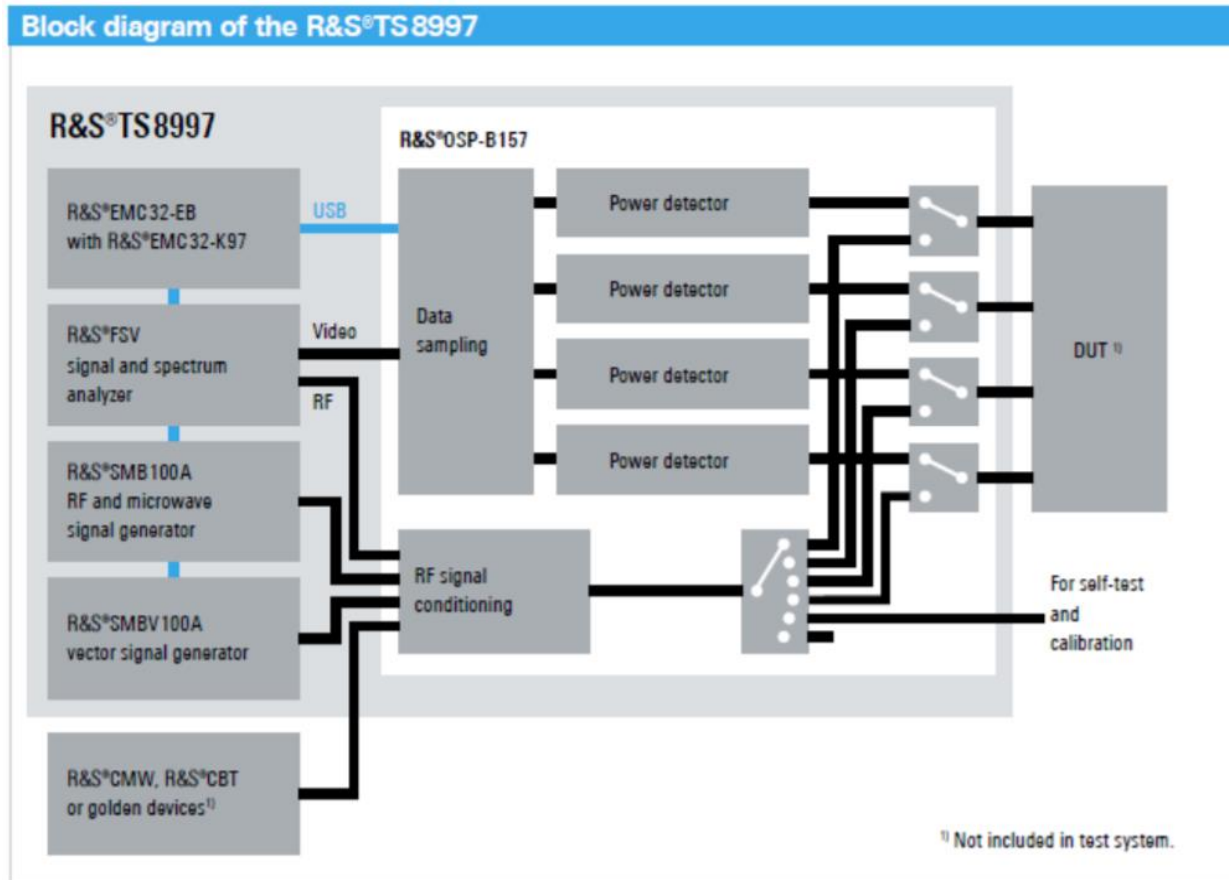


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

3.3 FCC Part 15, Subpart E

3.3.1 Summary of Tests

FCC Section	IC Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.407(a)	N/A	Antenna requirements	NA	Compliant
15.407(b)	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Bandwidth Requirement	5150 to 5250	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Peak Output Power	5150 to 5250	Compliant
15.407(b)	RSS-247 §6.2.2, §6.2.3	Antenna Conducted Spurious Emissions	0.009 to 40000	NA
15.407(b)	RSS-247 §6.2.2, §6.2.3	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Peak Power Spectral Density	5150 to 5250	Compliant
The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033 and 47 CFR Part 15.				

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 10-Meter chamber located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2020. ISED No. 25346

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	12/14/2018	4/17/2020
Transient Limiter	Com-Power	LIT-930A	UCL-2496	2/11/2019	2/11/2020
LISN	AFJ	LS16C/10	UCL-2512	12/14/2018	4/17/2020
Cat6 ISN	Teseq	ISN T8-Cat6	UCL-2971	2/11/2019	5/21/2020
ISN	Teseq	ISN T800	UCL-2974	2/19/2019	5/21/2020
LISN	Com-Power	LIN-120C	UCL-2612	2/11/2019	2/11/2020
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Monitoring Probe	Teseq	MD 4070A	UCL-2980	3/16/2019	5/21/2020
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1:List of equipment used for Conducted Emissions Testing at Mains Port

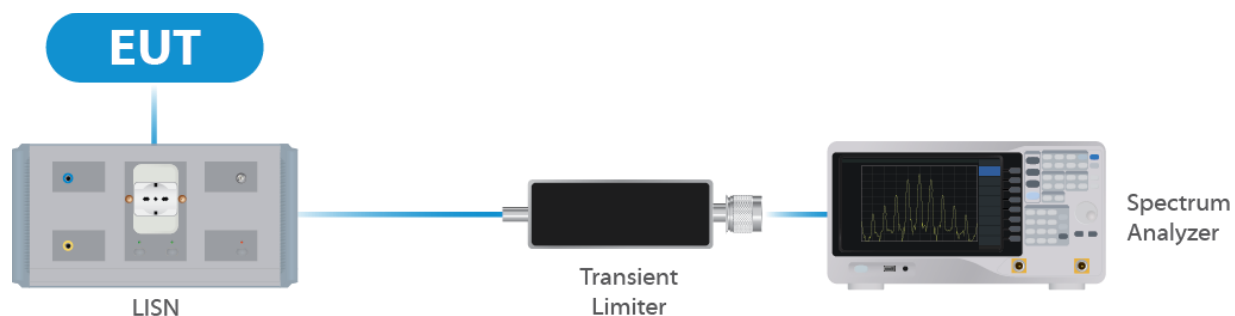


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	06/12/2019	06/12/2020
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	06/13/2019	06/13/2020
Switch Extension	R&S	OSP-150W	UCL-2870	06/14/2019	06/14/2020

Table 2:List of equipment used for Direct Connect at the Antenna Port

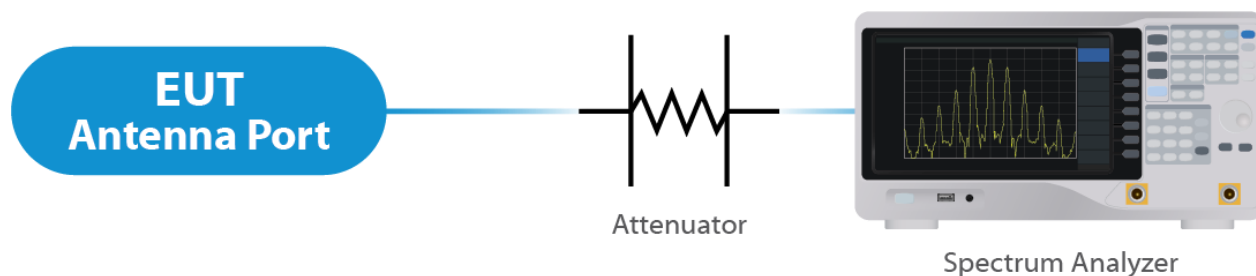


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	11/26/2018	5/3/2020
Pre-Amplifier	Sonoma Instruments	310N	UCL-2889	9/13/2018	5/16/2020
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	4/11/2019	6/3/2020
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	4/11/2019	6/3/2020
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	2/15/2017	4/16/2020
18 – 40 GHz Amplifier	Scwarzbeck	BBV 9721	UCL-2490	4/1/2019	4/1/2020
0.5 – 18 GHz Amplifier	Scwarzbeck	BBV 9718C	UCL-2493	4/1/2019	4/1/2020
Loop Antenna	Com-Power	AL-130R	UCL-2596	10/26/2018	4/23/2020
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3:List of equipment used for Radiated Emissions

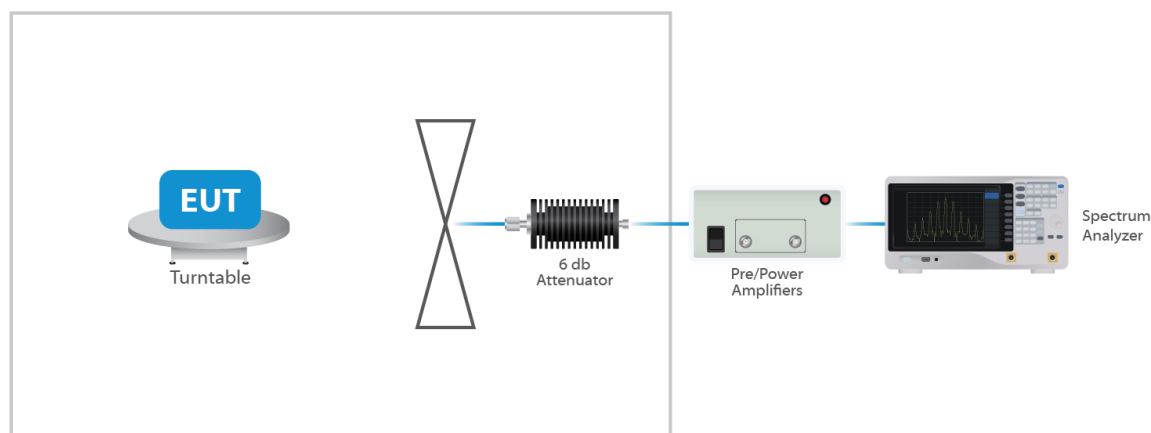


Figure 3: Radiated Emissions Test

4.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.5 Measurement Uncertainty

Test	Uncertainty ($\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	3.95	95
Radiated Emissions (1 GHz to 18 GHz)	5.56	95
Radiated Emissions (18 GHz to 40 GHz)	5.16	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements


The EUT uses an integral antenna. The Maximum gain of the antenna within the band is 6.0 dBi. The antenna is not user replaceable.

Results


The EUT complied with the specification

5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

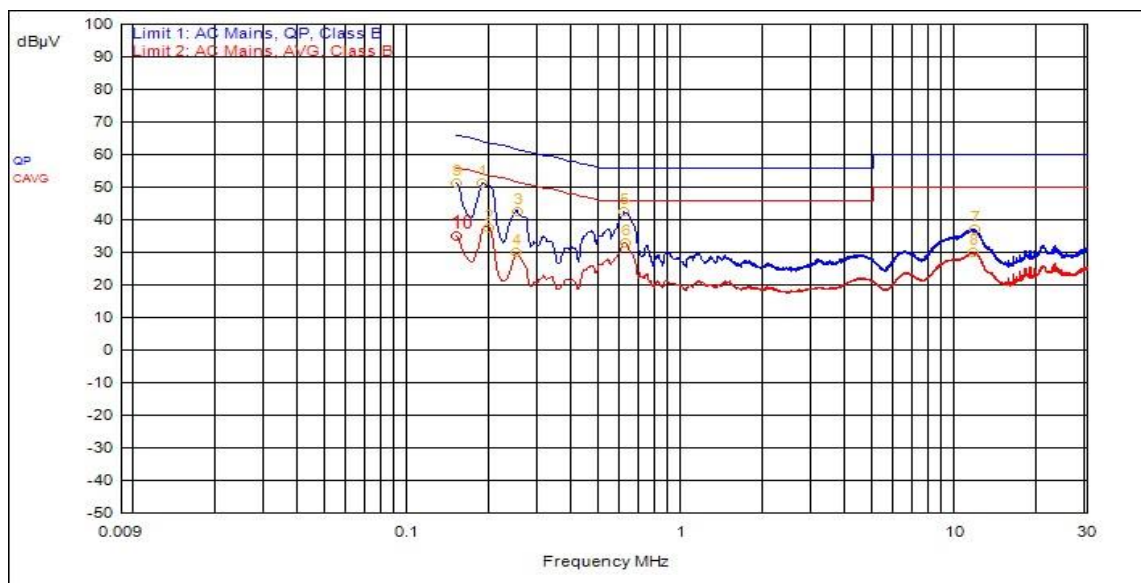

5.2.2 Neutral

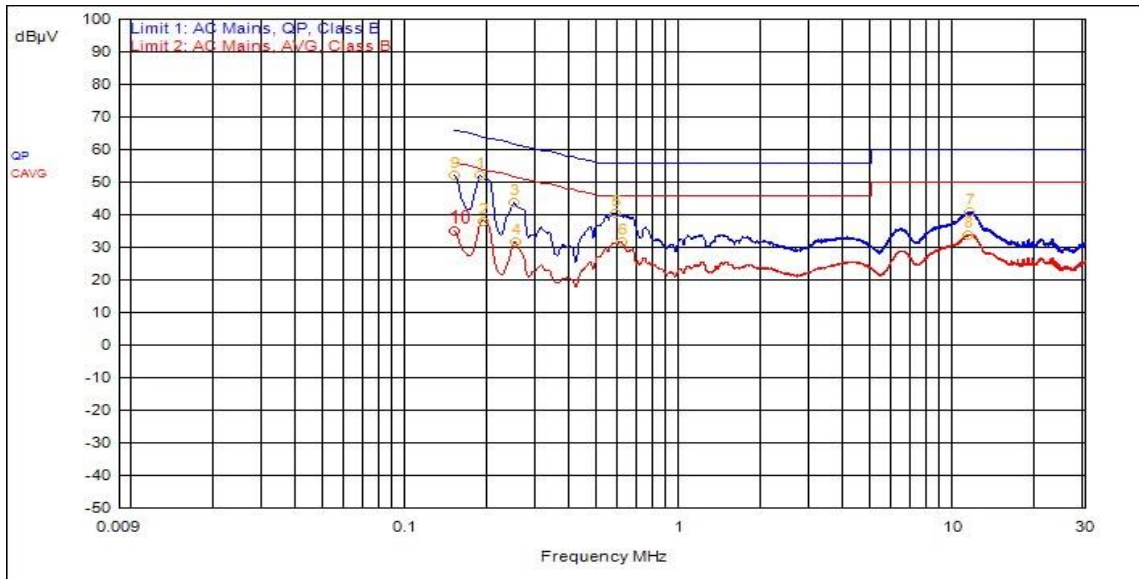

Result

The EUT complied with the specification limit.

5.3 §15.403(i) 26 dB Emissions Bandwidth

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)
20	5180	19.0	19.8
20	5210	19.3	26.3
20	5240	19.4	28.1
40	5190	37.5	39.2
40	5210	37.5	39.2
40	5230	37.8	39.2
80	5210	76.5	80.5

Result

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

5.4 §15.403(a)(1) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 27.7 dBm or 589 mW. The limit is 30 dBm, or 1 Watt when using antennas with 23 dBi or less gain. The antenna has a gain of 6 dBi.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured EIRP	Measured PSD
OFDM 20	5180	Mcs0	18.5	25.2	31.2	12.1
OFDM 20	5210	Mcs0	20.5	27.4	33.4	14.6
OFDM 20	5240	Mcs0	21	27.6	33.6	14.8
HT 20	5180	Mcs0	18.5	24.8	30.8	12
HT 20	5210	Mcs0	20.5	27	33	14.1
HT 20	5240	Mcs0	21	27.5	33.5	14.5
VHT 20	5180	Mcs0	17.5	24.6	30.6	10.8
VHT 20	5210	Mcs0	20.5	27.1	33.1	14
VHT 20	5240	Mcs0	21	27.5	33.5	8
HE 20	5180	Mcs0	18.5	24.6	30.6	10.6
HE 20	5210	Mcs0	21.5	27.5	33.5	13.7
HE 20	5240	Mcs0	21.5	27.7	33.7	14.1
HT 40	5190	Mcs0	16.5	23.3	29.3	8.6
HT 40	5210	Mcs0	18.5	25.4	31.4	10.9
HT 40	5230	Mcs0	19.5	26.2	32.2	11.8
VHT 40	5190	Mcs0	16	22.7	28.7	8
VHT 40	5210	Mcs0	18.5	25.2	31.2	10.9
VHT 40	5230	Mcs0	19.5	26.2	32.2	11.9
HE 40	5190	Mcs0	16.5	22.4	28.4	7.4
HE 40	5210	Mcs0	19	25.5	31.5	8.9
HE 40	5230	Mcs0	19.5	25.3	31.3	10.4
VHT 80	5210	Mcs0	13	20.3	26.3	1.9
HE 80	5210	Mcs0	14	20.5	26.5	2.1

Result

In the configuration tested, the maximum average RF outpower was less than 1 watt; therefore, the EUT complied with the requirements of the specification. A sample measurement is included in the Annex.

5.5 §Radiated Spurious Emissions in the Restricted Bands of § 15.205

The EUT uses various power settings based on the channel in use. In order to reduce test time, the radiated spurious emissions at the lowest, middle, and highest channel were measured at the maximum power of TP 21.5, as this setting was found to be worst case for spurious emissions. Power was subsequently reduced during in-band and band edge testing. The band edge at the restricted band ending at 5150 MHz was measured using radiated measurement. All emissions modes were tested and the worse-case measurements are shown below.

Result

All emissions in and outside of the restricted bands of § 15.205 met the limits specified in § 15.209; therefore, the EUT complies with the specification. See below for band edge plots

Frequency (MHZ)	Antenna Polarity	Detector	Correction Factor (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5189.42	V	A	-2.86	43.03	54.0	-10.97
10380.15	V	A	5.81	32.43	54.0	-21.57
14427.37	V	A	8.56	33.05	54.0	-20.95
15817.07	V	A	4.96	31.94	54.0	-22.06
5187.48	H	A	-2.87	46.19	54.0	-7.81
10362.37	H	A	5.69	39.20	54.0	-14.80
14346.96	H	A	8.55	33.32	54.0	-20.68
5189.42	V	P	-2.86	57.73	74.00	-16.27
10380.15	V	P	5.81	46.97	74.00	-27.03
14427.37	V	P	8.56	46.43	74.00	-27.57
15817.07	V	P	4.96	45.97	74.00	-28.03
5187.48	H	P	-2.87	62.29	74.00	-11.71
10362.37	H	P	5.69	53.42	74.00	-20.58
14346.96	H	P	8.55	46.06	74.00	-27.94

Table 4: Transmitting on the Lowest Frequency 5180 MHz

Frequency (MHZ)	Antenna Polarity	Detector	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5212.178	V	A	-2.82	51.39	54.0	-2.61
10422.46	V	A	5.95	39.90	54.0	-14.10
14234.85	V	A	8.58	33.12	54.0	-20.88
15622.52	V	A	4.66	34.29	54.0	-19.71
5208.14	H	A	-2.84	53.45	54.0	-0.55
10425.42	H	A	5.95	41.51	54.0	-12.49
15626.32	H	A	4.66	37.67	54.0	-16.33
5212.178	V	P	-2.82	64.75	74.0	-9.25
10422.46	V	P	5.95	53.19	74.0	-20.81
14234.85	V	P	8.58	46.53	74.0	-27.47
15622.52	V	P	4.66	47.72	74.0	-26.28
5208.14	H	P	-2.84	65.62	74.0	-8.38
10425.42	H	P	5.95	54.53	74.0	-19.47
15626.32	H	P	4.66	49.07	74.0	-24.93

Table 5: Transmitting on the Middle Frequency 5210 MHz

Frequency (MHZ)	Antenna Polarity	Detector	Correction Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5238.08	V	A	-2.80	48.53	54.0	-5.47
10478.65	V	A	5.98	40.30	54.0	-13.70
14350.26	V	A	8.56	33.57	54.0	-20.43
15722.04	V	A	4.60	36.07	54.0	-17.93
5240.98	H	A	-2.80	57.85	54.0	3.85
10479.33	H	A	5.98	44.62	54.0	-9.38
14121.58	H	A	8.82	33.01	54.0	-20.99
5238.08	V	P	-2.80	65.29	74.0	-8.71
10478.65	V	P	5.98	55.97	74.0	-18.03
14350.26	V	P	8.56	46.87	74.0	-27.13
15722.04	V	P	4.60	50.14	74.0	-23.86
5240.98	H	P	-2.80	72.14	74.0	-1.86
10479.33	H	P	5.98	59.42	74.0	-14.58
14121.58	H	P	8.82	47.26	74.0	-26.74


Table 6: Transmitting on the Highest Frequency 5240 MHz



20MHz 5180 MHz Band Edge



40MHz 5190 MHz Band Edge

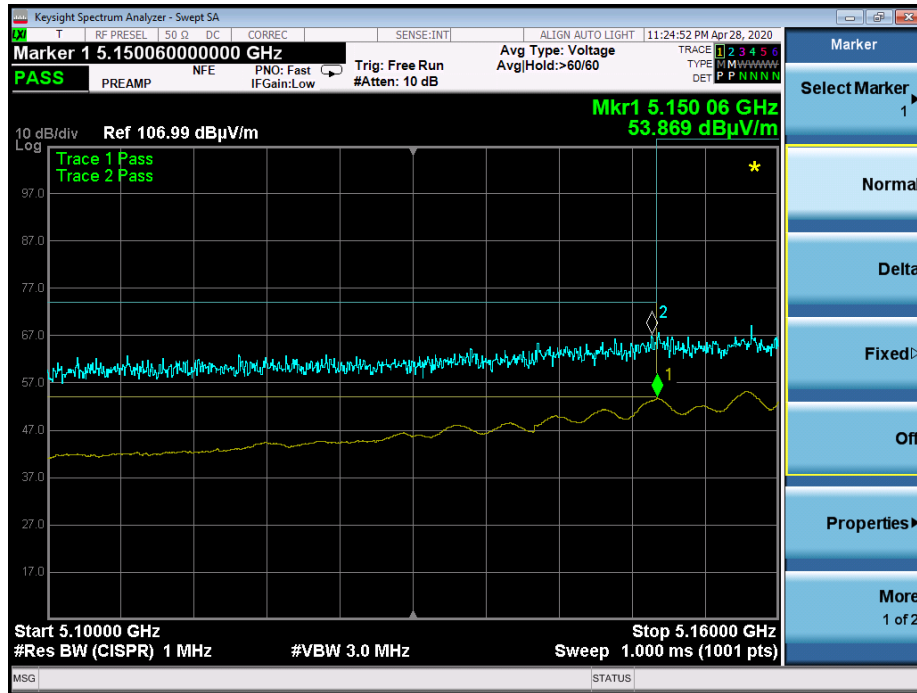

80MHz 5210 MHz Band Edge

5.6 §15.407(a) Maximum Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 17 dBm in any 1 MHz band during any time interval of continuous transmission.

Results of this testing are summarized.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured EIRP	Measured PSD
OFDM 20	5180	Mcs0	18.5	25.2	31.2	12.1
OFDM 20	5210	Mcs0	20.5	27.4	33.4	14.6
OFDM 20	5240	Mcs0	21	27.6	33.6	14.8
HT 20	5180	Mcs0	18.5	24.8	30.8	12
HT 20	5210	Mcs0	20.5	27	33	14.1
HT 20	5240	Mcs0	21	27.5	33.5	14.5
VHT 20	5180	Mcs0	17.5	24.6	30.6	10.8
VHT 20	5210	Mcs0	20.5	27.1	33.1	14
VHT 20	5240	Mcs0	21	27.5	33.5	8
HE 20	5180	Mcs0	18.5	24.6	30.6	10.6
HE 20	5210	Mcs0	21.5	27.5	33.5	13.7
HE 20	5240	Mcs0	21.5	27.7	33.7	14.1
HT 40	5190	Mcs0	16.5	23.3	29.3	8.6
HT 40	5210	Mcs0	18.5	25.4	31.4	10.9
HT 40	5230	Mcs0	19.5	26.2	32.2	11.8
VHT 40	5190	Mcs0	16	22.7	28.7	8
VHT 40	5210	Mcs0	18.5	25.2	31.2	10.9
VHT 40	5230	Mcs0	19.5	26.2	32.2	11.9
HE 40	5190	Mcs0	16.5	22.4	28.4	7.4
HE 40	5210	Mcs0	19	25.5	31.5	8.9
HE 40	5230	Mcs0	19.5	25.3	31.3	10.4
VHT 80	5210	Mcs0	13	20.3	26.3	1.9
HE 80	5210	Mcs0	14	20.5	26.5	2.1

Result

The maximum average power spectral density was less than the limit of 17dBm; therefore, the EUT complies with the specification. A sample measurement is located in the Annex.

-- End of Test Report --