



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands

Part 15, Subpart C, Section 15.247

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Zebra RFID Multiprotocol Encoder ZM4e
Kind of Equipment: Multiprotocol RFID Encoder
Test Configuration: Class II PC - RA400 with dual coupler (Tested at 120 vac, 60 Hz)
Model Number(s): ZM4e
Model(s) Tested: ZM4e
Serial Number(s): NA
Date of Tests: November 14, 2006
Test Conducted For: Zebra Technologies Corporation
333 Corporate Woods Parkway
Vernon Hills,, Illinois 60061

NOTICE: "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report.

© Copyright 1983- 2006 D.L.S. Electronic Systems, Inc

COPYRIGHT NOTICE

This report or any portion thereof, may not be reproduced or modified in any form without the expressed written consent of D.L.S. Electronic Systems, Inc.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

SIGNATURE PAGE

Report By:

Arnom C. Rowe
Test Engineer
EMC-001375-NE

Reviewed By:

William Stumpf
OATS Manager

Approved By:

Brian Mattson
General Manager

Company Official:

Zebra Technologies Corporation



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

TABLE OF CONTENTS

| | | |
|------|---|----|
| i. | Cover Page | 1 |
| ii. | Signature Page | 2 |
| iii. | Table of Contents..... | 3 |
| iv. | NVLAP Certificate of Accreditation | 4 |
| 1.0 | Summary of Test Report..... | 5 |
| 2.0 | Introduction..... | 5 |
| 3.0 | Object..... | 5 |
| 4.0 | Test Set-Up | 6 |
| 5.0 | Test Equipment | 7 |
| 6.0 | Ambient Measurements | 8 |
| 7.0 | Description of Test Sample..... | 9 |
| 8.0 | Additional Description of Test Sample..... | 10 |
| 9.0 | Photo Information and Test Set-Up | 11 |
| 10.0 | Radiated Photos Taken During Testing | 12 |
| 11.0 | Results of Tests | 14 |
| 12.0 | Conclusion | 14 |
| | TABLE 1 – EQUIPMENT LIST | 15 |
| | Appendix A – Electric Field Radiated Emissions Test..... | 17 |
| 1.0 | Restricted Bands | 18 |
| 2.0 | Band Edge and Restrict Band Compliance..... | 18 |
| 2.0 | RF Port 1 Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance..... | 19 |
| 2.0 | RF Port 2 Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance..... | 38 |
| 3.0 | Field Strength of Spurious Emission Measurements | 57 |
| 3.0 | Radiated Data and Graph(s) taken for Fundamental and Spurious Emission Measurements | 59 |
| 4.0 | RF Port 1 Conducted Peak Output Power Graphs Taken During testing | 71 |
| 4.0 | RF Port 2 Conducted Peak Output Power Graphs Taken During testing | 75 |



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC Guide 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2005-10-01 through 2006-09-30

Effective dates



For the National Institute of Standards and Technology

NVLAP-01C (REV. 2005-05-19)



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1.0 SUMMARY OF TEST REPORT

It was found that the Zebra RFID Multiprotocol Encoder ZM4e, Model Number(s) ZM4e, "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands.

This test report relates only to the items tested and contains the following number of pages.

Text: 78

2.0 INTRODUCTION

On November 14, 2006, a series of radio frequency interference measurements was performed on Zebra RFID Multiprotocol Encoder ZM4e, Model Number(s) ZM4e, Serial Number: NA. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.205, 15.209 & 15.247 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

| Frequency Range | Bandwidth (-6 dB) |
|-------------------|-------------------|
| 10 to 150 kHz | 200 Hz |
| 150 kHz to 30 MHz | 9 kHz |
| 30 MHz to 1 GHz | 120 kHz |
| Above 1 GHz | 1 MHz |

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

7.1 Description:

Zebra ZM4e is a RFID multiprotocol encoder used for encoding RFID tags. The encoder is installed in various Zebra tabletop printers. This report covers testing in the RA400 which utilizes both RF ports of the ZM4e module.

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 4.63" x Width: 3.00" x Height: 1.1"

7.3 LINE FILTER USED:

DC powered device

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

50KHz & 100KHz

Clock Frequencies:

RFID encoder: 20.0000MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

- | | |
|--|----------------------|
| 1. Reader RFID UHF MP 1W - RoHS | PN: 27086 rev A |
| 2. PCB Adapter 1W MP RFID Rdr | PN: 21160-100 Rev 0B |
| 3. Assy PCB UHF Cplr Array for RF port 1 | PN: 21175-099 |
| 4. Assy PCB UHF Cplr Array for RF port 2 | PN: 19630-099 |
| 5. Host - RA400 | |



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: _____
Signature Title

For: _____
Company Date



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 Zebra RFID Multiprotocol Encoder ZM4e
Model Number: ZM4e Serial Number: NA

Item 1 Dell Latitude

Model Number: D610; Service Tag Number: HRCKS71

Item 2 Non-shielded AC Power Line Cord. 1.5m

Item 3 Non-shielded 10/100 Ethernet Cable with Plastic Shells. 1.5m


Item 4 Shielded Serial Cable with Metal Shells. 2.5m



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING

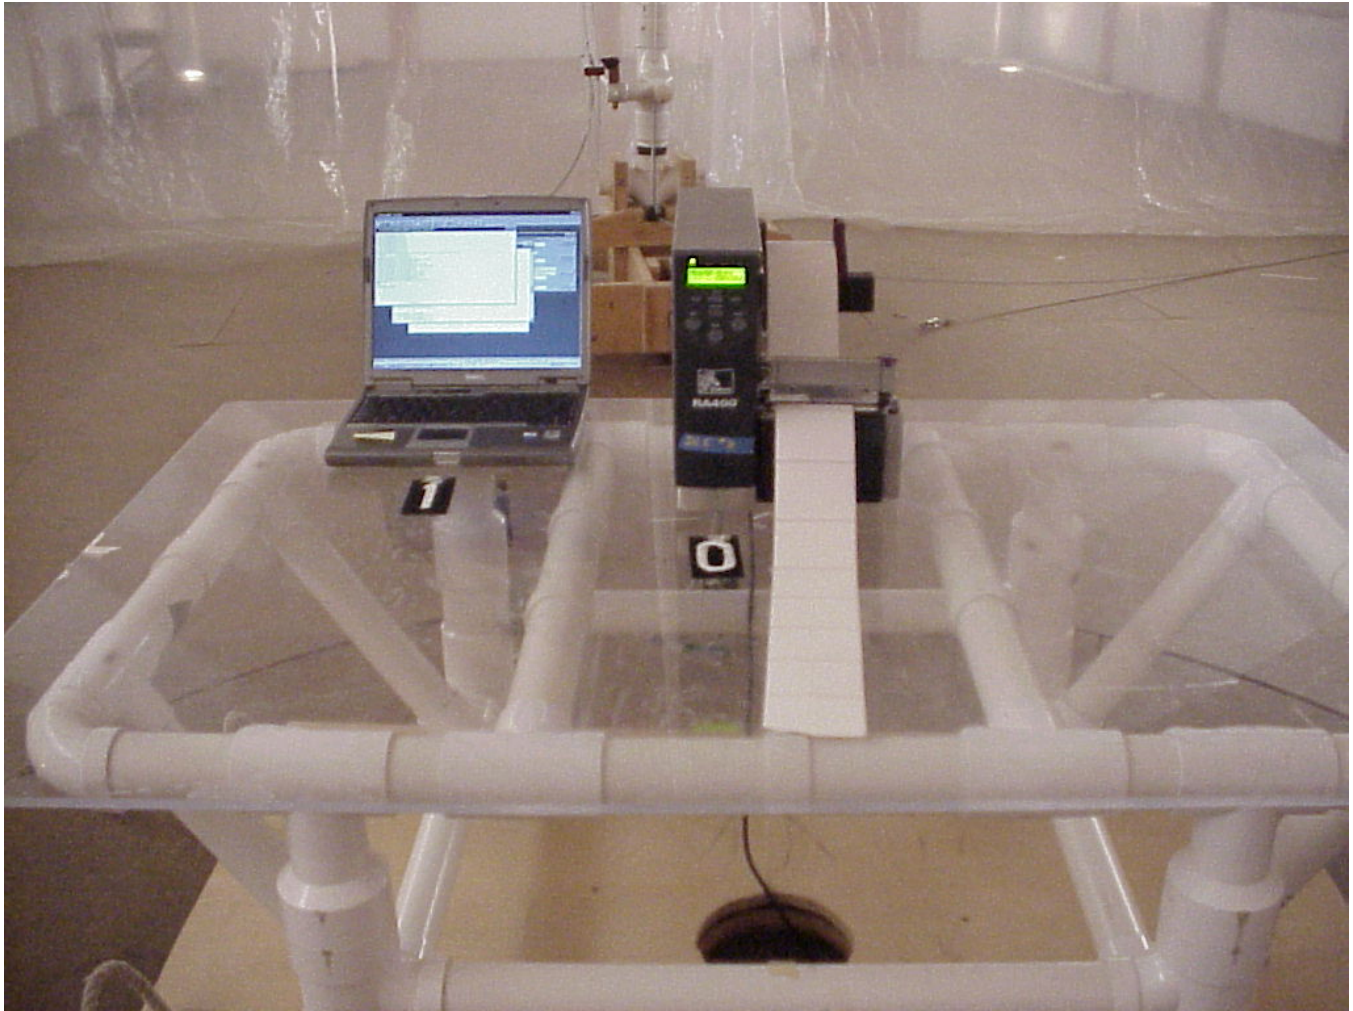



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T)





1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

12.0 CONCLUSION

It was found that the Zebra RFID Multiprotocol Encoder ZM4e, Model Number(s) ZM4e "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.247 for operational in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Bands.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

TABLE 1 – EQUIPMENT LIST

| Test Equipment | Manufacturer | Model Number | Serial Number | Frequency Range | Cal Due Dates |
|-----------------------|---------------------|---------------------|----------------------|------------------------|----------------------|
| Receiver | Rohde & Schwarz | ESI 26 | 837491/010 | 20 Hz – 26 GHz | 11/06 |
| Receiver | Rohde & Schwarz | ESI 40 | 837808/006 | 20 Hz – 40 GHz | 12/06 |
| Receiver | Rohde & Schwarz | ESI 40 | 837808/005 | 20 Hz – 40 GHz | 12/06 |
| Antenna | EMCO | 3104C | 00054891 | 20 MHz – 200 MHz | 2/07 |
| Antenna | Electrometrics | LPA-25 | 1114 | 200 MHz – 1 GHz | 3/07 |
| Antenna | EMCO | 3104C | 00054892 | 20 MHz – 200 MHz | 3/07 |
| Antenna | Electrometrics | 3146 | 1205 | 200 MHz – 1 GHz | 3/07 |
| Antenna | EMCO | 3104C | 97014785 | 20 MHz – 200 MHz | 2/07 |
| Antenna | EMCO | 3146 | 97024895 | 200 MHz – 1 GHz | 3/07 |
| Antenna | EMCO | 3115 | 2479 | 1 GHz – 18 GHz | 8/07 |
| Antenna | EMCO | 3115 | 99035731 | 1 GHz – 18 GHz | 4/07 |
| Antenna | Rohde & Schwarz | HUF-Z1 | 829381001 | 20 MHz – 1 GHz | 2/07 |
| Antenna | Rohde & Schwarz | HUF-Z1 | 829381005 | 20 MHz – 1 GHz | 8/07 |
| | | | | | |

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

TABLE 1 – EQUIPMENT LIST

| Test Equipment | Manufacturer | Model Number | Serial Number | Frequency Range | Cal Due Dates |
|-----------------------|---------------------|---------------------|----------------------|------------------------|----------------------|
| LISN | Solar | 8012-50-R-24-BNC | 8305116 | 10 MHz – 30 MHz | 8/07 |
| LISN | Solar | 8012-50-R-24-BNC | 814548 | 10 MHz – 30 MHz | 8/07 |
| LISN | Solar | 9252-50-R-24-BNC | 961019 | 10 MHz – 30 MHz | 12/06 |
| LISN | Solar | 9252-50-R-24-BNC | 971612 | 10 MHz – 30 MHz | 10/07 |
| LISN | Solar | 9252-50-R-24-BNC | 92710620 | 10 MHz – 30 MHz | 7/07 |

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

TEST PROCEDURE

Part 15, Subpart C, Section 15.247 (a-h)

OPERATION WITHIN THE BAND 902-928 MHz,

2400-2483.5 MHz AND 5725-5857 MHz



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

1.0 RESTRICTED BANDS

As stated in Section 15.205a, the fundamental emission from the Zebra RFID Multiprotocol Encoder ZM4e shall not fall within any of the bands listed below:

| Frequency in MHz | Frequency in MHz | Frequency in MHz | Frequency in GHz |
|---------------------|---------------------|---------------------|---------------------|
| .0900 to .1100 | 162.0125 to 167.17 | 2310.0 to 2390 | 9.30 to 9.50 |
| .4900 to .5100 | 167.7200 to 173.20 | 2483.5 to 2500 | 10.60 to 12.70 |
| 2.1735 to 2.1905 | 240.000 to 285.00 | 2655.0 to 2900 | 13.25 to 13.40 |
| 8.362 to 8.3660 | 322.200 to 335.40 | 3260.0 to 3267 | 14.47 to 14.50 |
| 13.36 to 13.410 | 399.900 to 410.00 | 3332.0 to 3339 | 15.35 to 16.20 |
| 25.50 to 25.670 | 608.000 to 614.00 | 3345.8 to 3358 | 17.70 to 21.40 |
| 37.50 to 38.250 | 960.000 to 1240.00 | 3600.0 to 4400 | 22.01 to 23.13 |
| 73.00 to 75.500 | 1300.000 to 1427.00 | 4500.0 to 5250 | 23.60 to 24.00 |
| 108.00 to 121.94 | 1435.000 to 1626.50 | 5350.0 to 5450 | 31.20 to 31.80 |
| 123.00 to 138.00 | 1660.000 to 1710.00 | 7250.0 to 7750 | 36.43 to 36.50 |
| 149.90 to 150.00 | 1718.800 to 1722.20 | 8025.0 to 8500 | ABOVE 38.60 |
| 156.70 to 156.90 | 2200.000 to 2300.00 | 9000.0 to 9200 | |

NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

2.0 BAND EDGE AND RESTRICT BAND COMPLIANCE

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the attenuation below the general limits specified in 15.209 is not required.

The field strength of any **radiated emissions** which fall within the restricted bands shall not exceed the general radiated emissions limits as stated Section 15.209.

NOTE: See the following page(s) for the graph(s) made showing compliance for Band Edge and Restrict Band:



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

DATA AND GRAPH(S) TAKEN SHOWING

THE BAND EDGE AND

RESTRICT BAND COMPLIANCE

PART 15.247(c)

RF PORT 1

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; Low channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

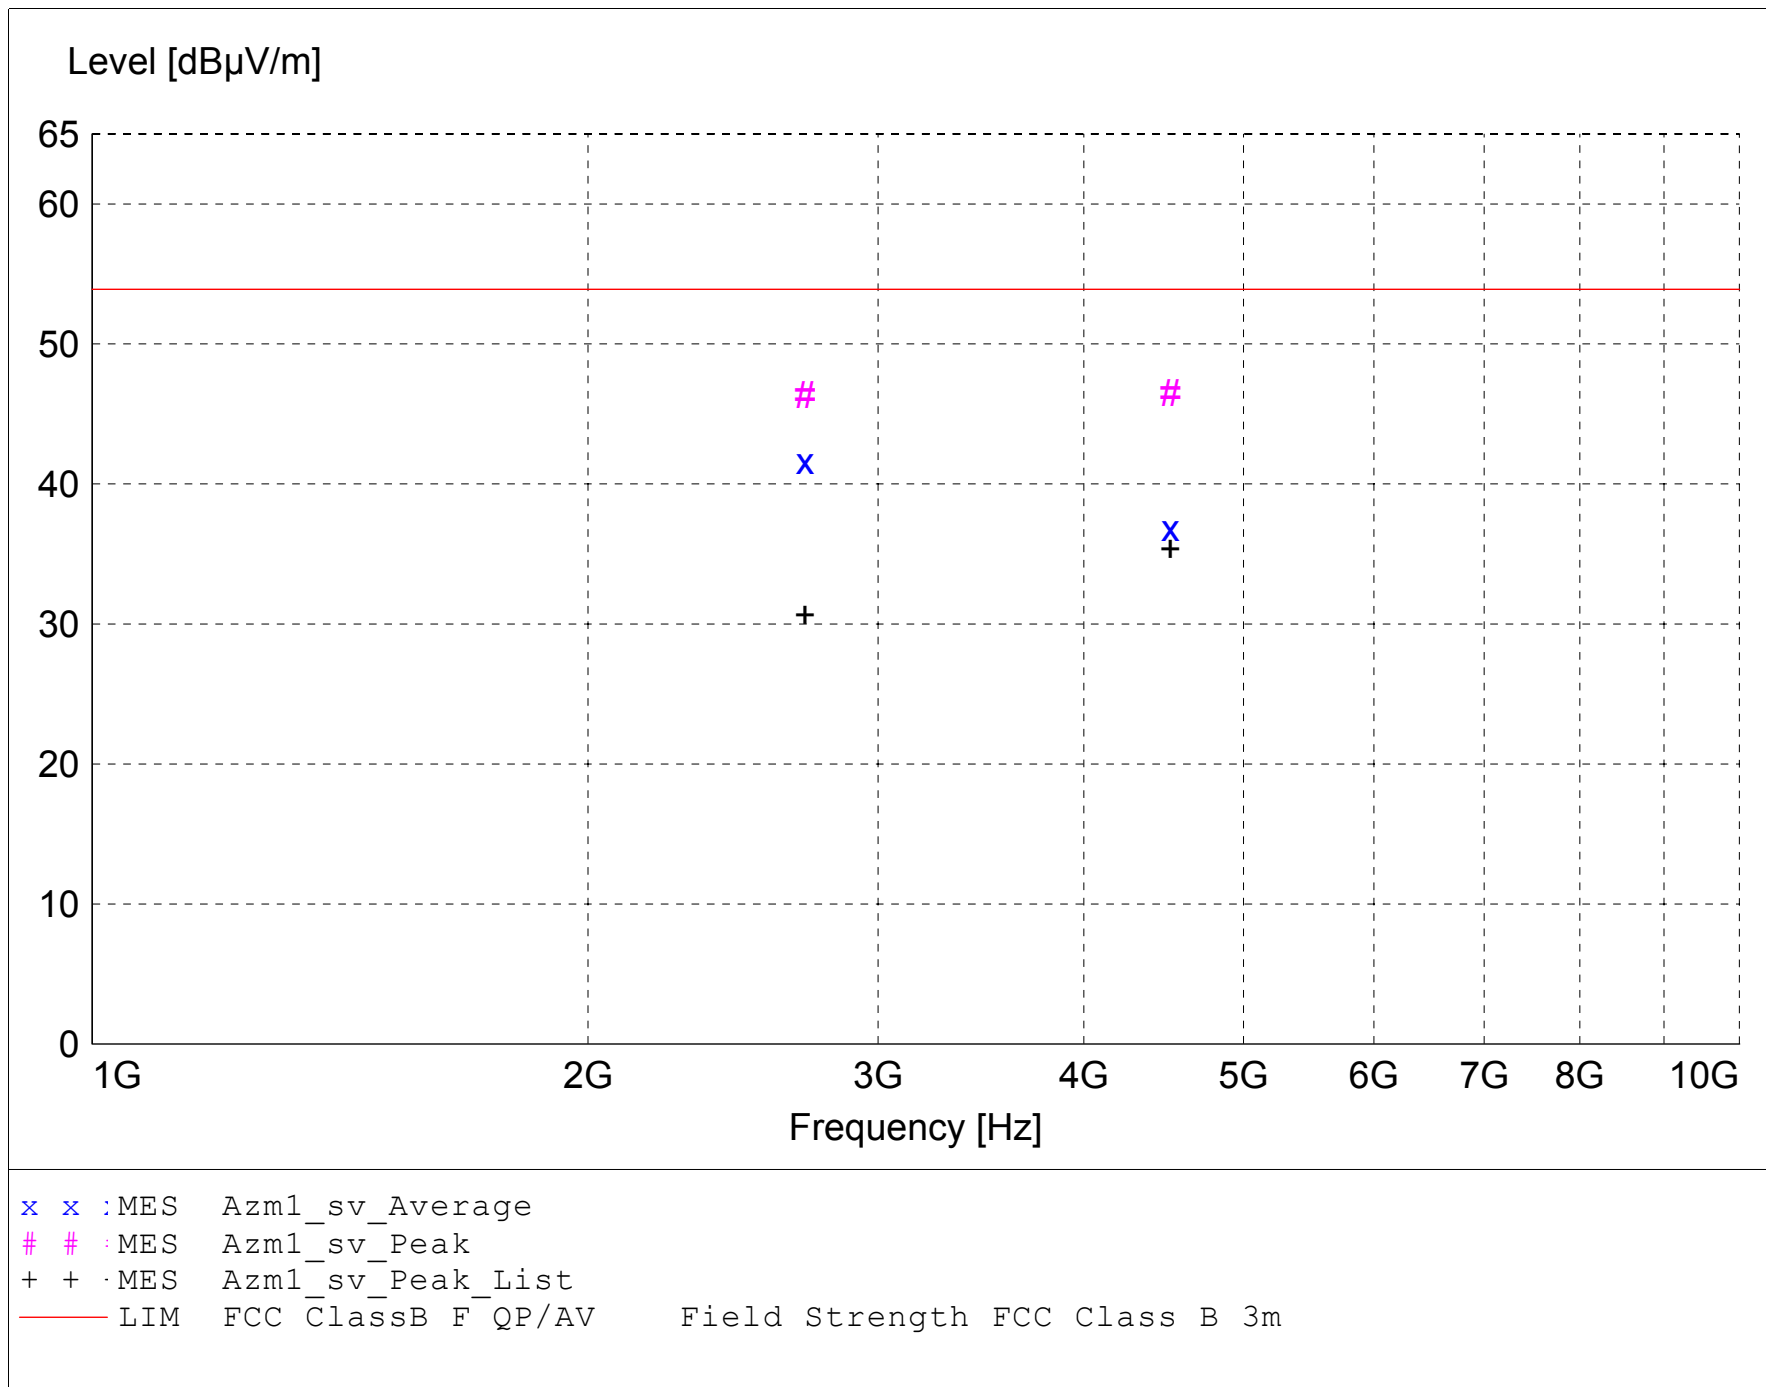

MEASUREMENT RESULT: "Azml_sv_Final"

11/14/2006 9:52AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 4514.900000 | 50.24 | 32.13 | -35.9 | 46.5 | 53.9 | 7.4 | 1.10 | 160 | MAX PEAK | None |
| 2709.000000 | 54.10 | 29.11 | -36.9 | 46.3 | 53.9 | 7.6 | 1.20 | 160 | MAX PEAK | None |
| 2709.000000 | 49.37 | 29.11 | -36.9 | 41.6 | 53.9 | 12.3 | 1.20 | 160 | AVERAGE | None |
| 4514.900000 | 40.64 | 32.13 | -35.9 | 36.9 | 53.9 | 17.0 | 1.10 | 160 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; Low channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

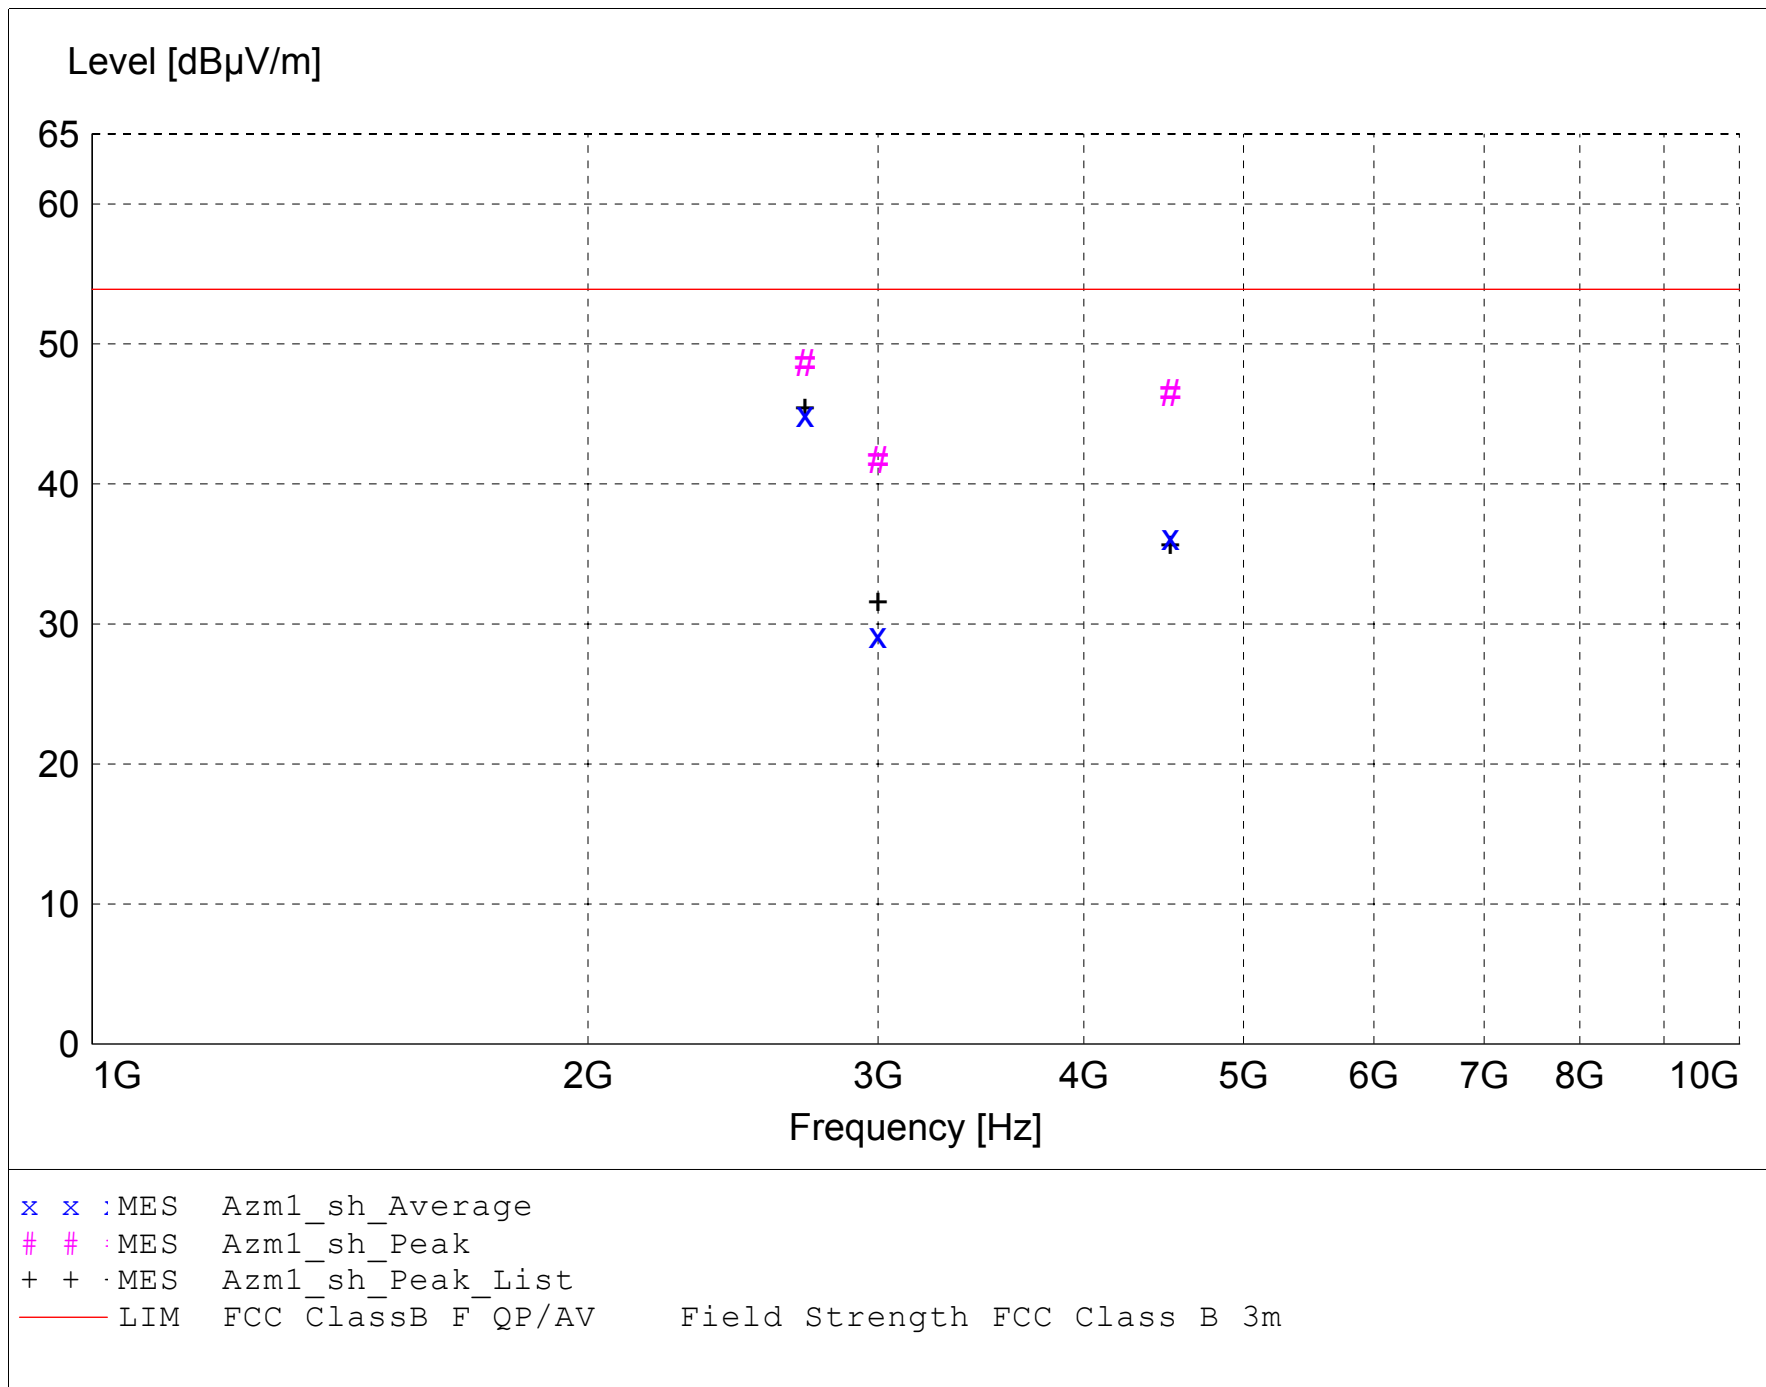

MEASUREMENT RESULT: "Azml_sh_Final"

11/14/2006 10:05AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 2709.000000 | 56.37 | 29.11 | -36.9 | 48.6 | 53.9 | 5.3 | 1.10 | 150 | MAX PEAK | None |
| 4514.950000 | 50.24 | 32.13 | -35.9 | 46.5 | 53.9 | 7.4 | 1.10 | 170 | MAX PEAK | None |
| 2709.000000 | 52.73 | 29.11 | -36.9 | 45.0 | 53.9 | 8.9 | 1.10 | 150 | AVERAGE | None |
| 2999.950000 | 48.34 | 30.10 | -36.8 | 41.7 | 53.9 | 12.2 | 1.10 | 150 | MAX PEAK | None |
| 4514.950000 | 39.98 | 32.13 | -35.9 | 36.2 | 53.9 | 17.7 | 1.10 | 170 | AVERAGE | None |
| 2999.950000 | 35.84 | 30.10 | -36.8 | 29.2 | 53.9 | 24.7 | 1.10 | 150 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; Mid channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

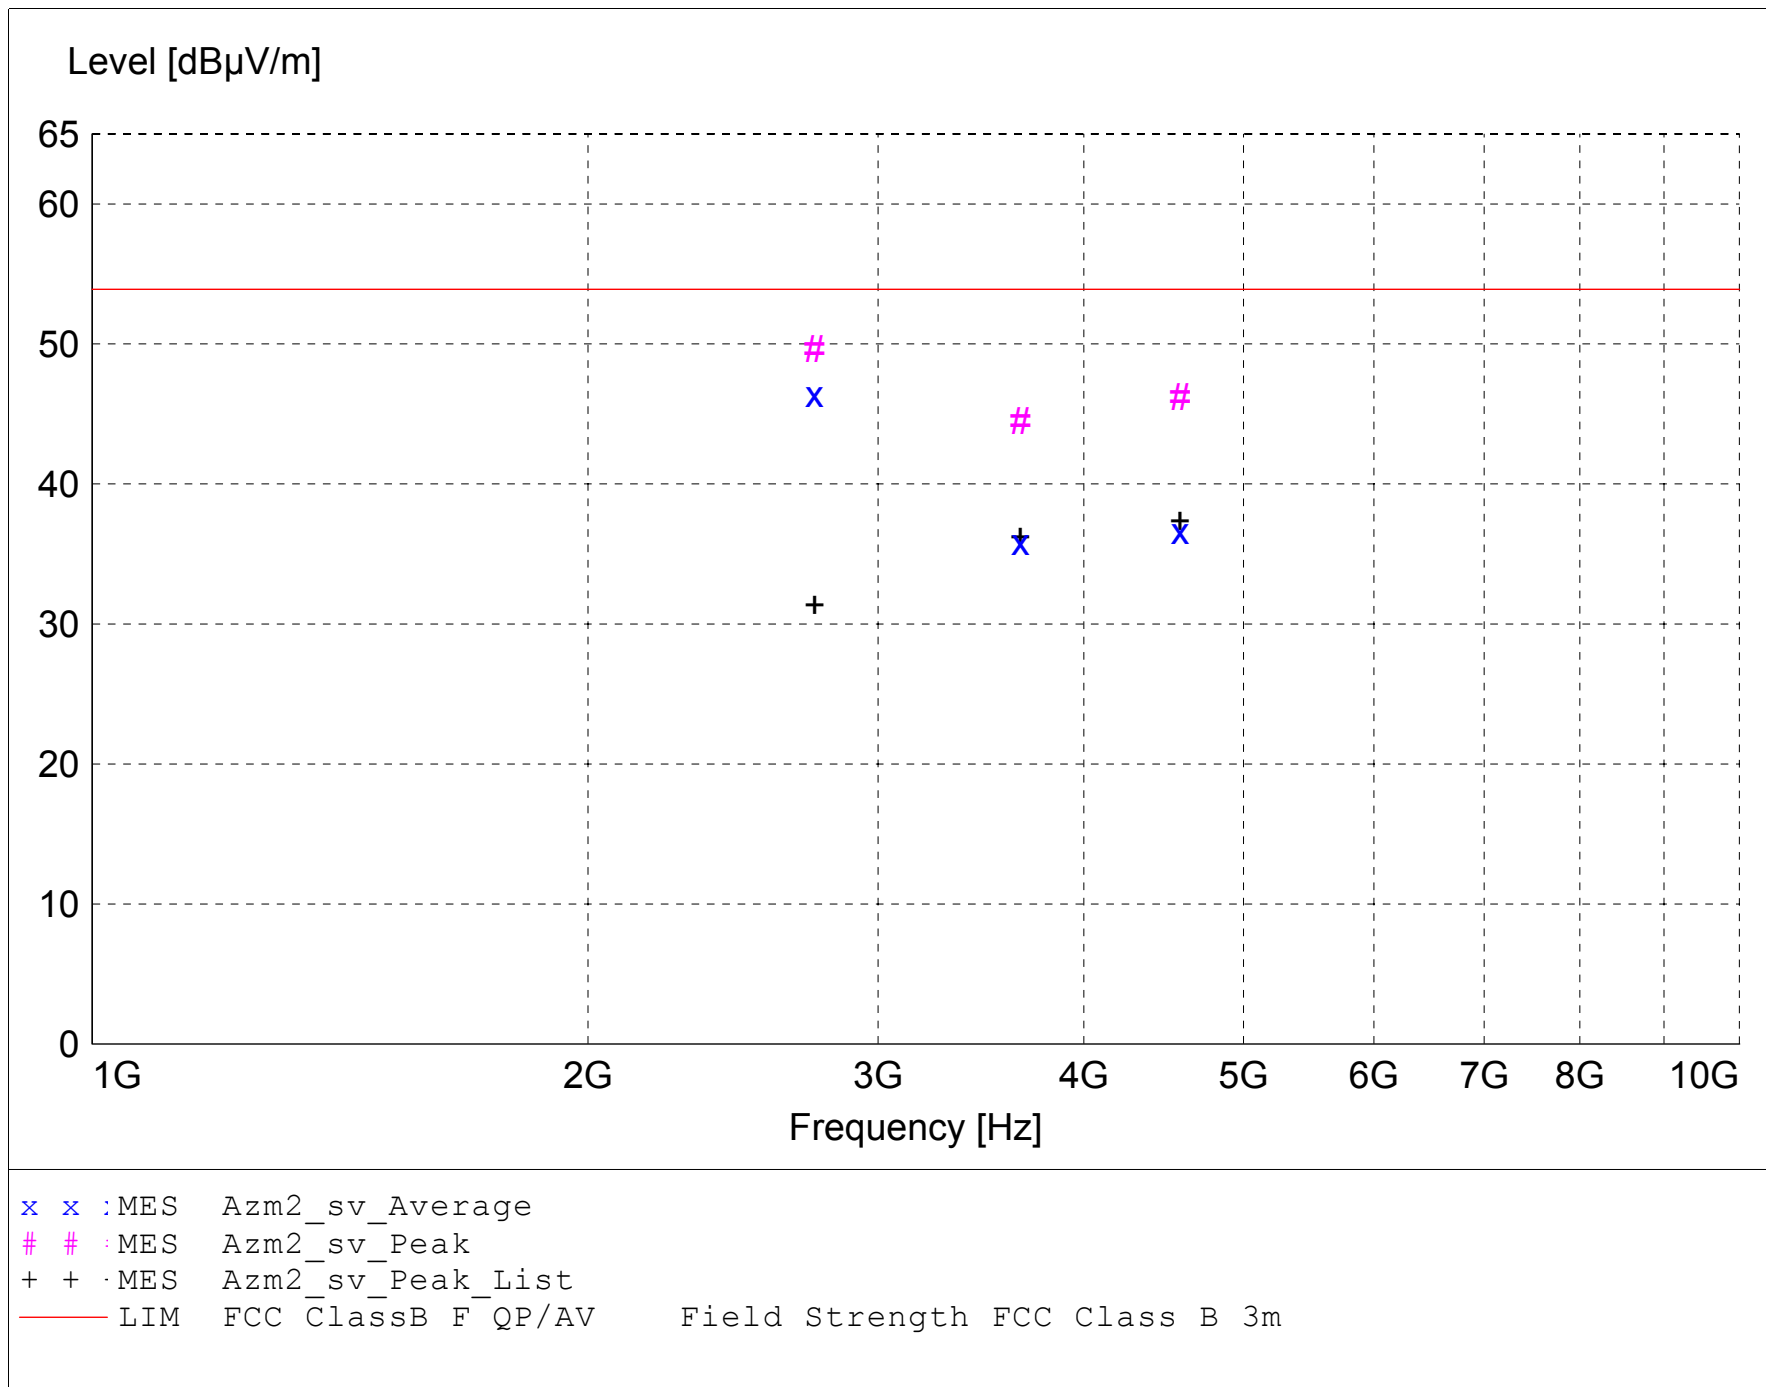

MEASUREMENT RESULT: "Azm2_sv_Final"

11/14/2006 10:28AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 2745.350000 | 57.16 | 29.23 | -36.7 | 49.6 | 53.9 | 4.3 | 1.20 | 160 | MAX PEAK | None |
| 2745.350000 | 53.90 | 29.23 | -36.7 | 46.4 | 53.9 | 7.5 | 1.20 | 160 | AVERAGE | None |
| 4575.600000 | 49.71 | 32.27 | -35.8 | 46.2 | 53.9 | 7.7 | 1.30 | 350 | MAX PEAK | None |
| 3660.600000 | 49.43 | 31.55 | -36.5 | 44.5 | 53.9 | 9.4 | 1.30 | 150 | MAX PEAK | None |
| 4575.600000 | 40.15 | 32.27 | -35.8 | 36.6 | 53.9 | 17.3 | 1.30 | 350 | AVERAGE | None |
| 3660.600000 | 40.80 | 31.55 | -36.5 | 35.9 | 53.9 | 18.0 | 1.30 | 150 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; Mid channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

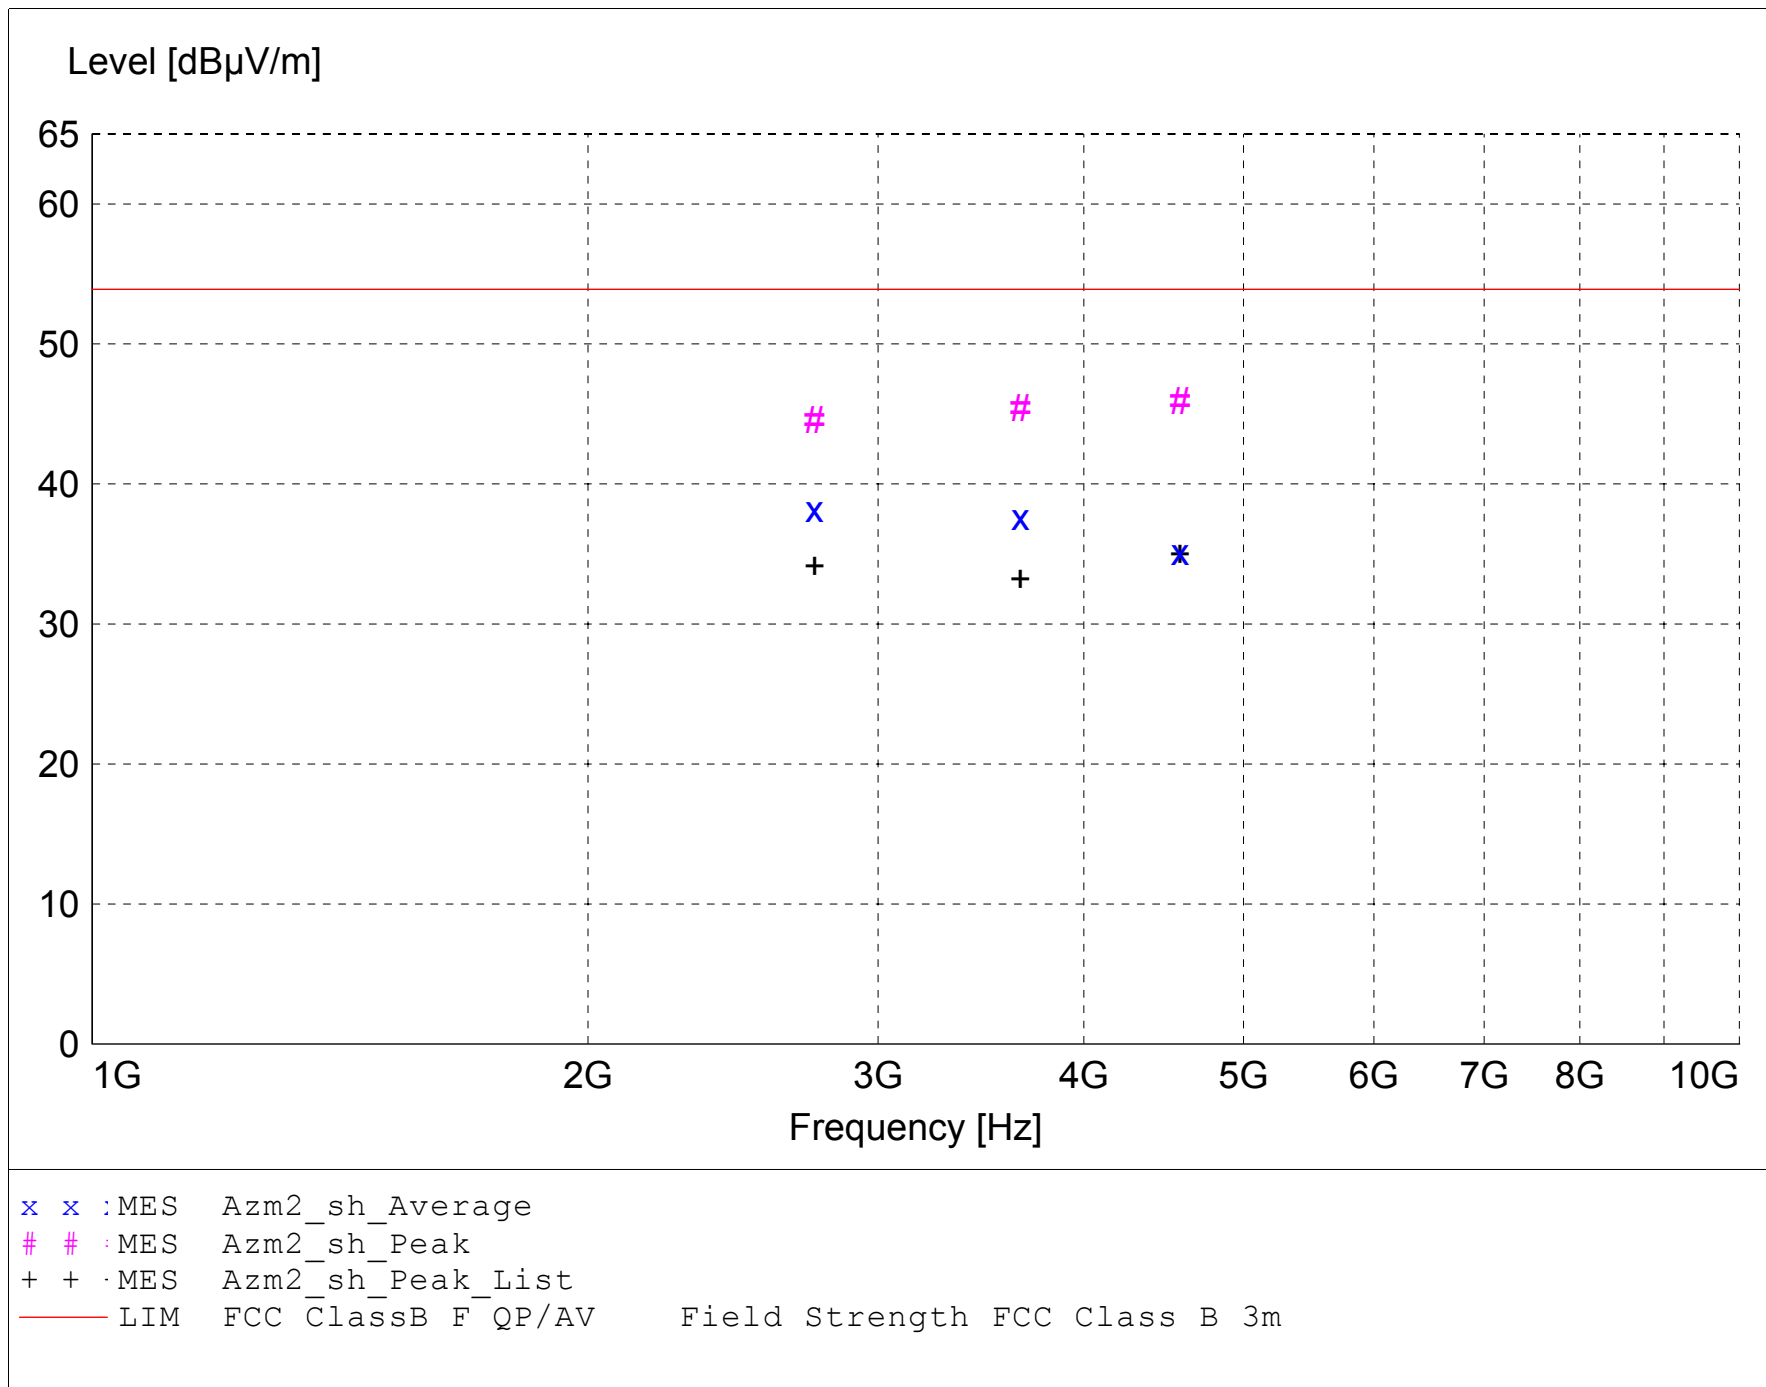

MEASUREMENT RESULT: "Azm2_sh_Final"

11/14/2006 10:36AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 4575.650000 | 49.43 | 32.27 | -35.8 | 45.9 | 53.9 | 8.0 | 1.00 | 100 | MAX PEAK | None |
| 3660.500000 | 50.37 | 31.55 | -36.5 | 45.4 | 53.9 | 8.5 | 1.20 | 20 | MAX PEAK | None |
| 2745.400000 | 52.07 | 29.23 | -36.7 | 44.6 | 53.9 | 9.3 | 1.00 | 100 | MAX PEAK | None |
| 2745.400000 | 45.71 | 29.23 | -36.7 | 38.2 | 53.9 | 15.7 | 1.00 | 100 | AVERAGE | None |
| 3660.500000 | 42.55 | 31.55 | -36.5 | 37.6 | 53.9 | 16.3 | 1.20 | 20 | AVERAGE | None |
| 4575.650000 | 38.67 | 32.27 | -35.8 | 35.1 | 53.9 | 18.8 | 1.00 | 100 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; High channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

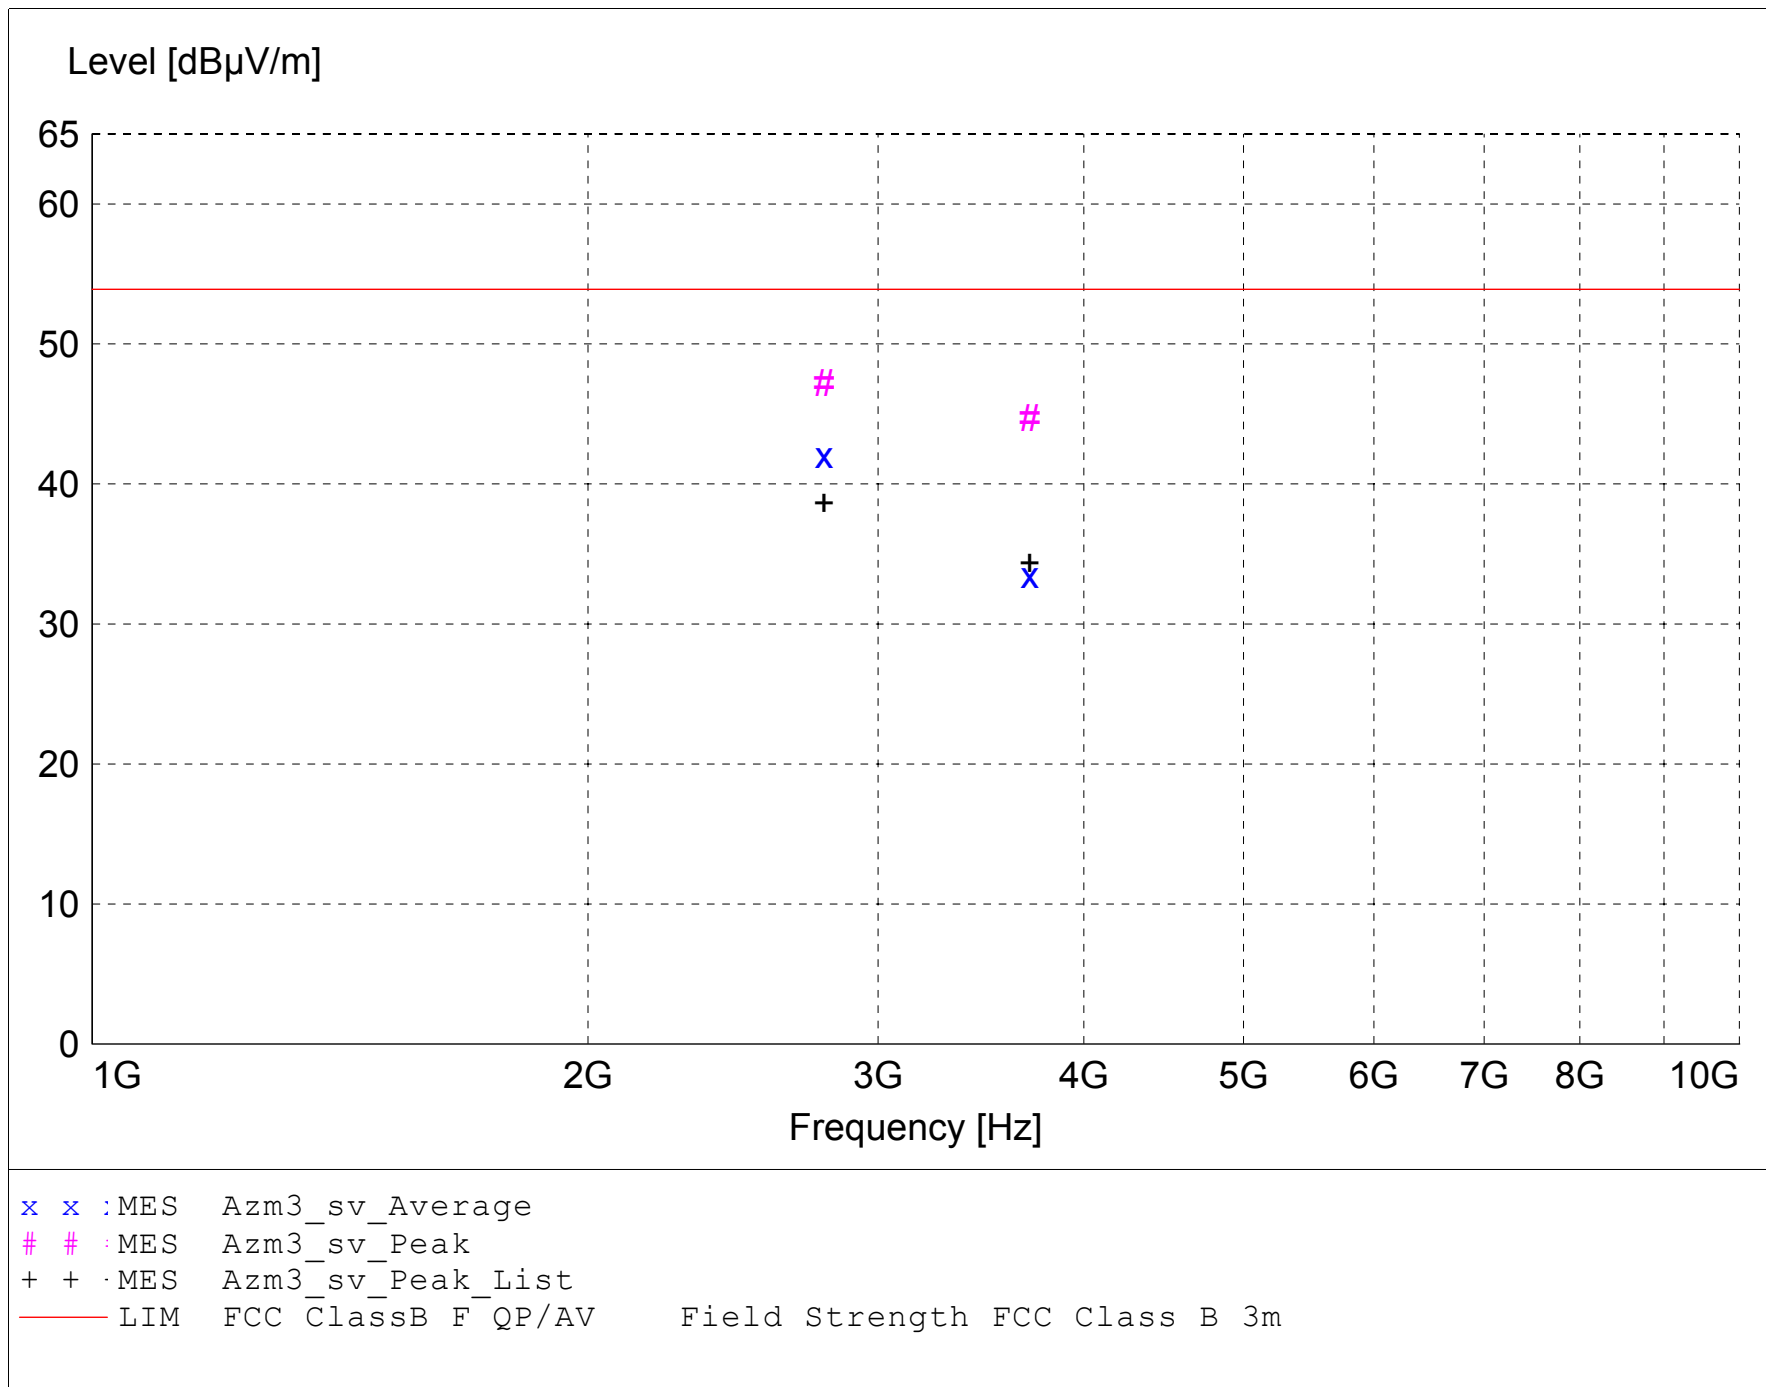

MEASUREMENT RESULT: "Azm3_sv_Final"

11/14/2006 10:48AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 2781.550000 | 54.65 | 29.36 | -36.8 | 47.2 | 53.9 | 6.7 | 1.30 | 135 | MAX PEAK | None |
| 3708.750000 | 49.57 | 31.68 | -36.5 | 44.7 | 53.9 | 9.2 | 1.00 | 135 | MAX PEAK | None |
| 2781.550000 | 49.47 | 29.36 | -36.8 | 42.0 | 53.9 | 11.9 | 1.30 | 135 | AVERAGE | None |
| 3708.750000 | 38.35 | 31.68 | -36.5 | 33.5 | 53.9 | 20.4 | 1.00 | 135 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 1 using antenna PN: 21175-099; High channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

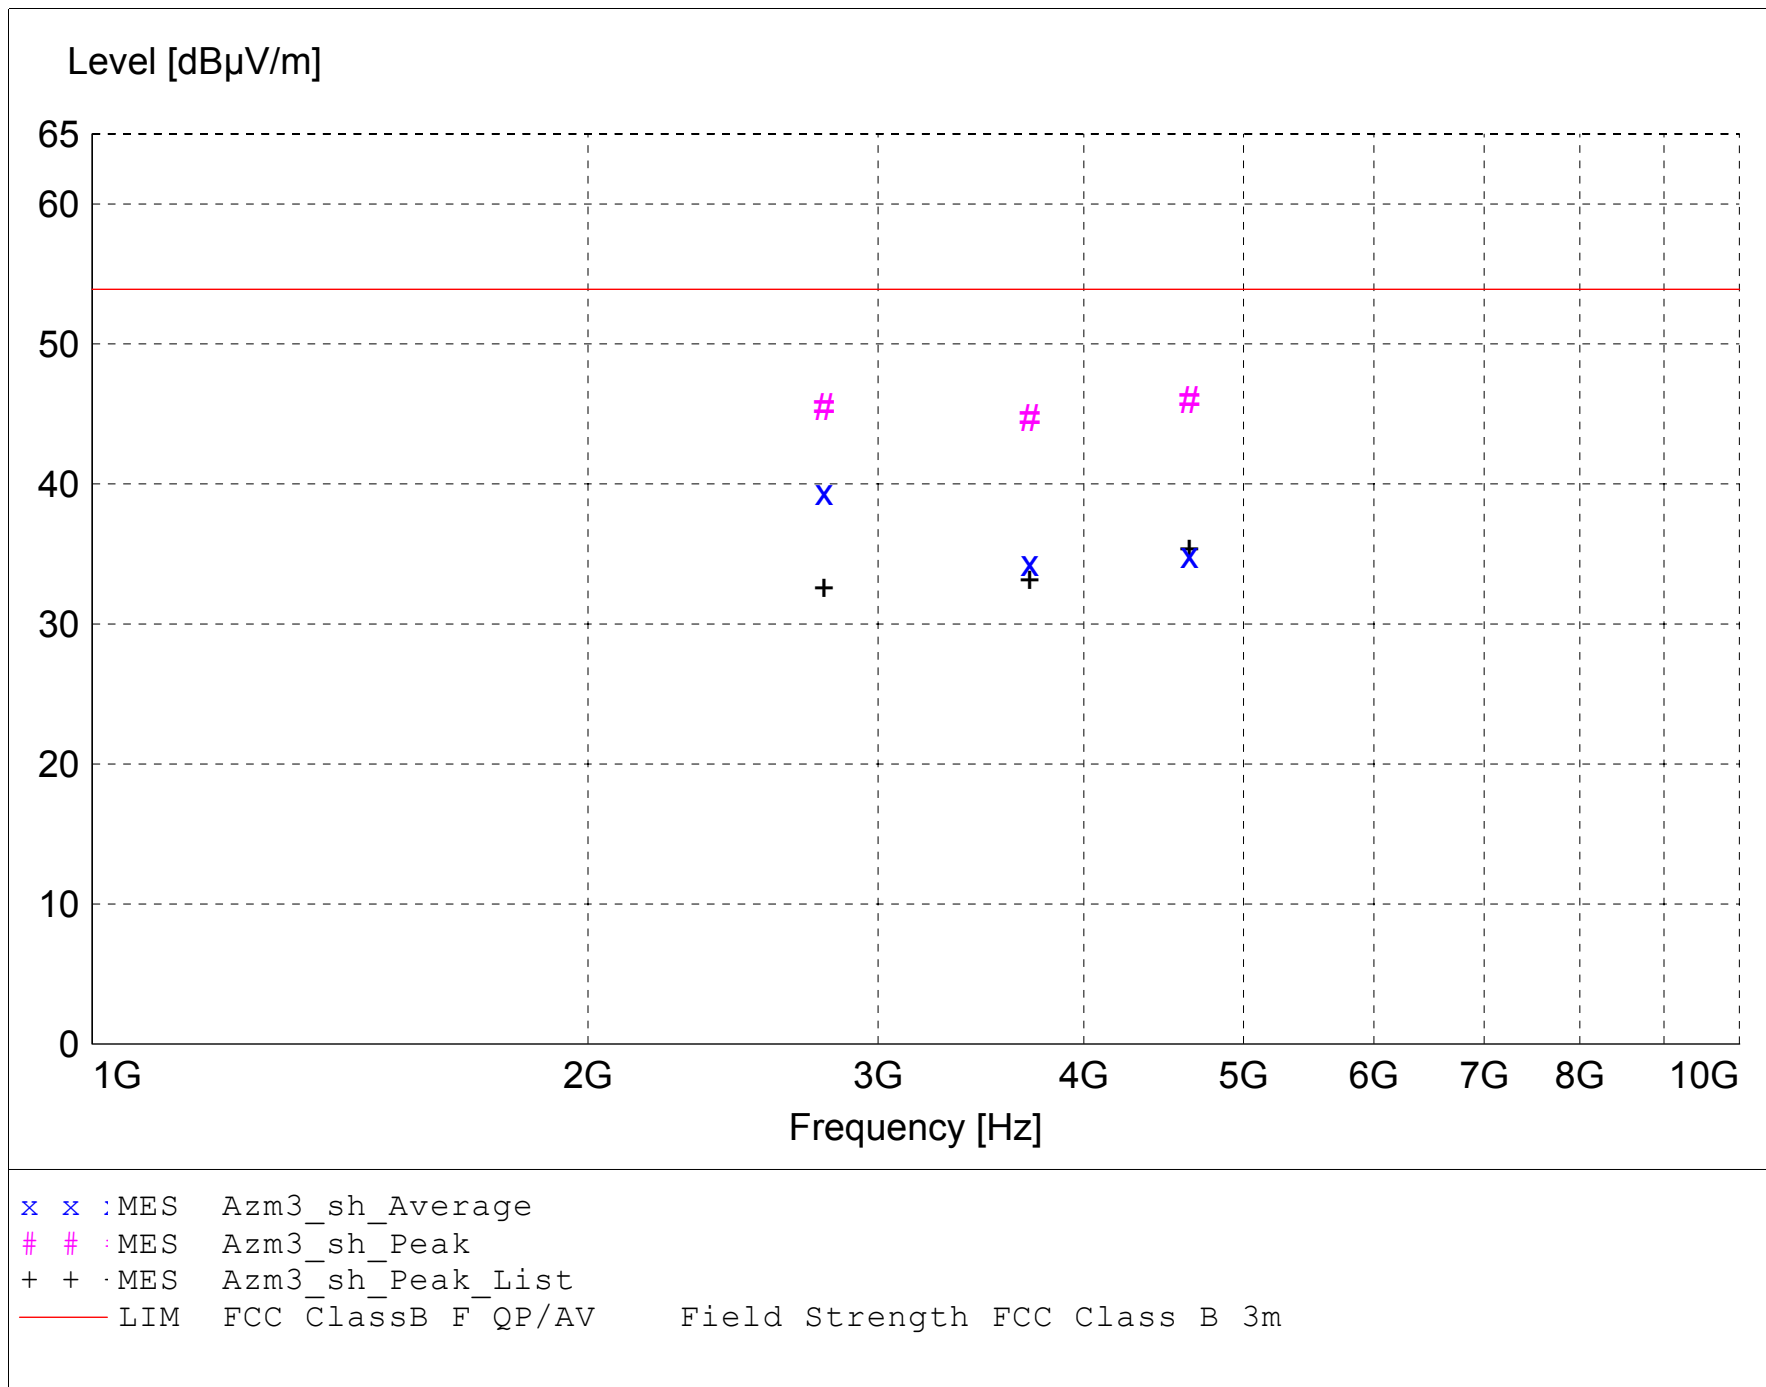

MEASUREMENT RESULT: "Azm3_sh_Final"

11/14/2006 10:59AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 4636.000000 | 49.29 | 32.40 | -35.7 | 46.0 | 53.9 | 7.9 | 1.30 | 100 | MAX PEAK | None |
| 2781.550000 | 52.91 | 29.36 | -36.8 | 45.5 | 53.9 | 8.4 | 2.10 | 90 | MAX PEAK | None |
| 3708.750000 | 49.57 | 31.68 | -36.5 | 44.7 | 53.9 | 9.2 | 1.30 | 30 | MAX PEAK | None |
| 2781.550000 | 46.84 | 29.36 | -36.8 | 39.4 | 53.9 | 14.5 | 2.10 | 90 | AVERAGE | None |
| 4636.000000 | 38.19 | 32.40 | -35.7 | 34.9 | 53.9 | 19.0 | 1.30 | 100 | AVERAGE | None |
| 3708.750000 | 39.19 | 31.68 | -36.5 | 34.4 | 53.9 | 19.5 | 1.30 | 30 | AVERAGE | None |



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

DATA AND GRAPH(S) TAKEN SHOWING

THE BAND EDGE AND

RESTRICT BAND COMPLIANCE

PART 15.247(c)

RF PORT 2

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; Low channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

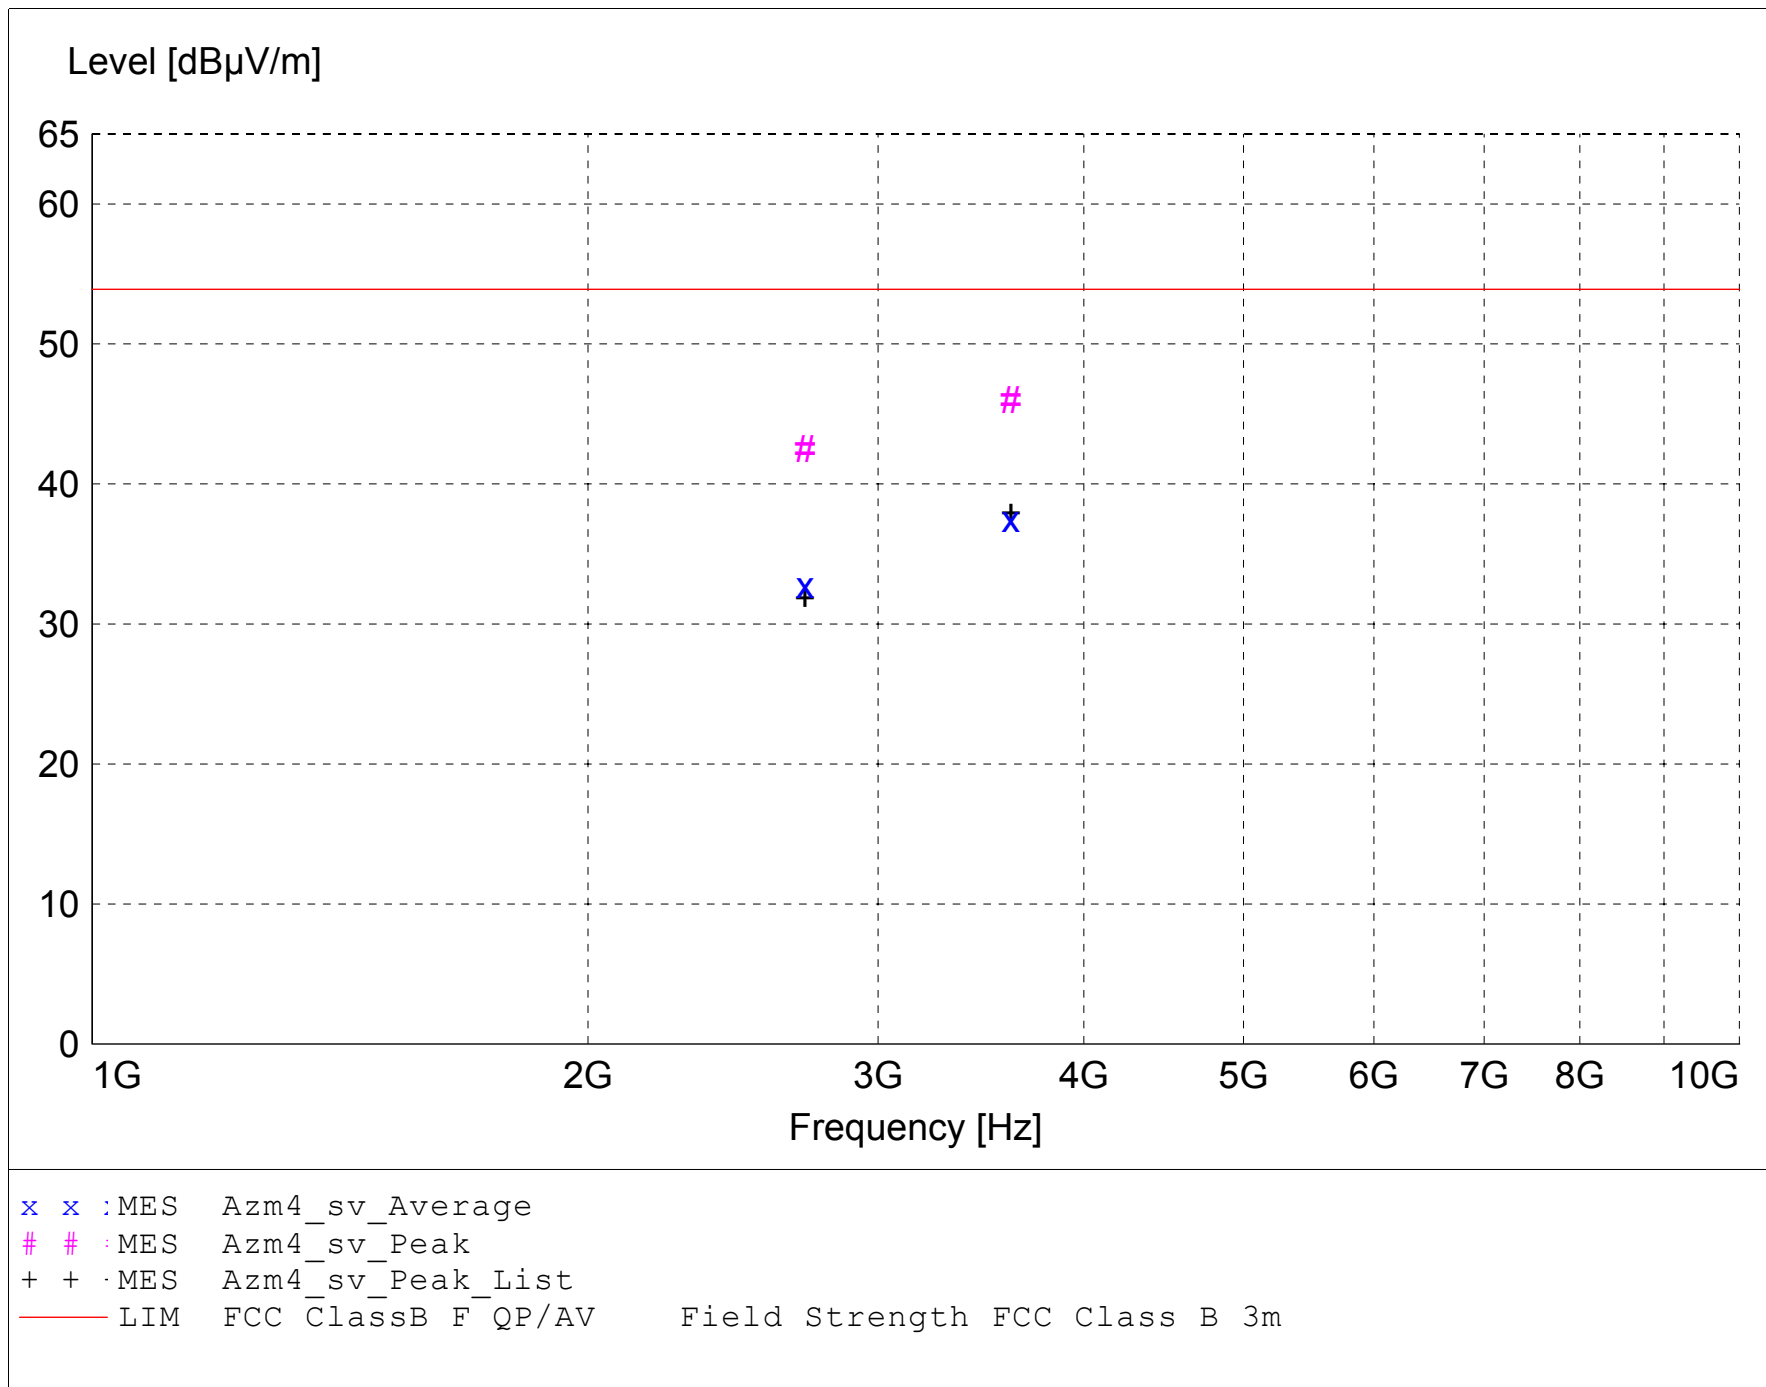

MEASUREMENT RESULT: "Azm4_sv_Final"

11/14/2006 11:11AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 3611.950000 | 51.00 | 31.41 | -36.4 | 46.0 | 53.9 | 7.9 | 1.30 | 90 | MAX PEAK | None |
| 2709.000000 | 50.24 | 29.11 | -36.9 | 42.5 | 53.9 | 11.4 | 1.20 | 110 | MAX PEAK | None |
| 3611.950000 | 42.51 | 31.41 | -36.4 | 37.5 | 53.9 | 16.4 | 1.30 | 90 | AVERAGE | None |
| 2709.000000 | 40.53 | 29.11 | -36.9 | 32.8 | 53.9 | 21.1 | 1.20 | 110 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; Low channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

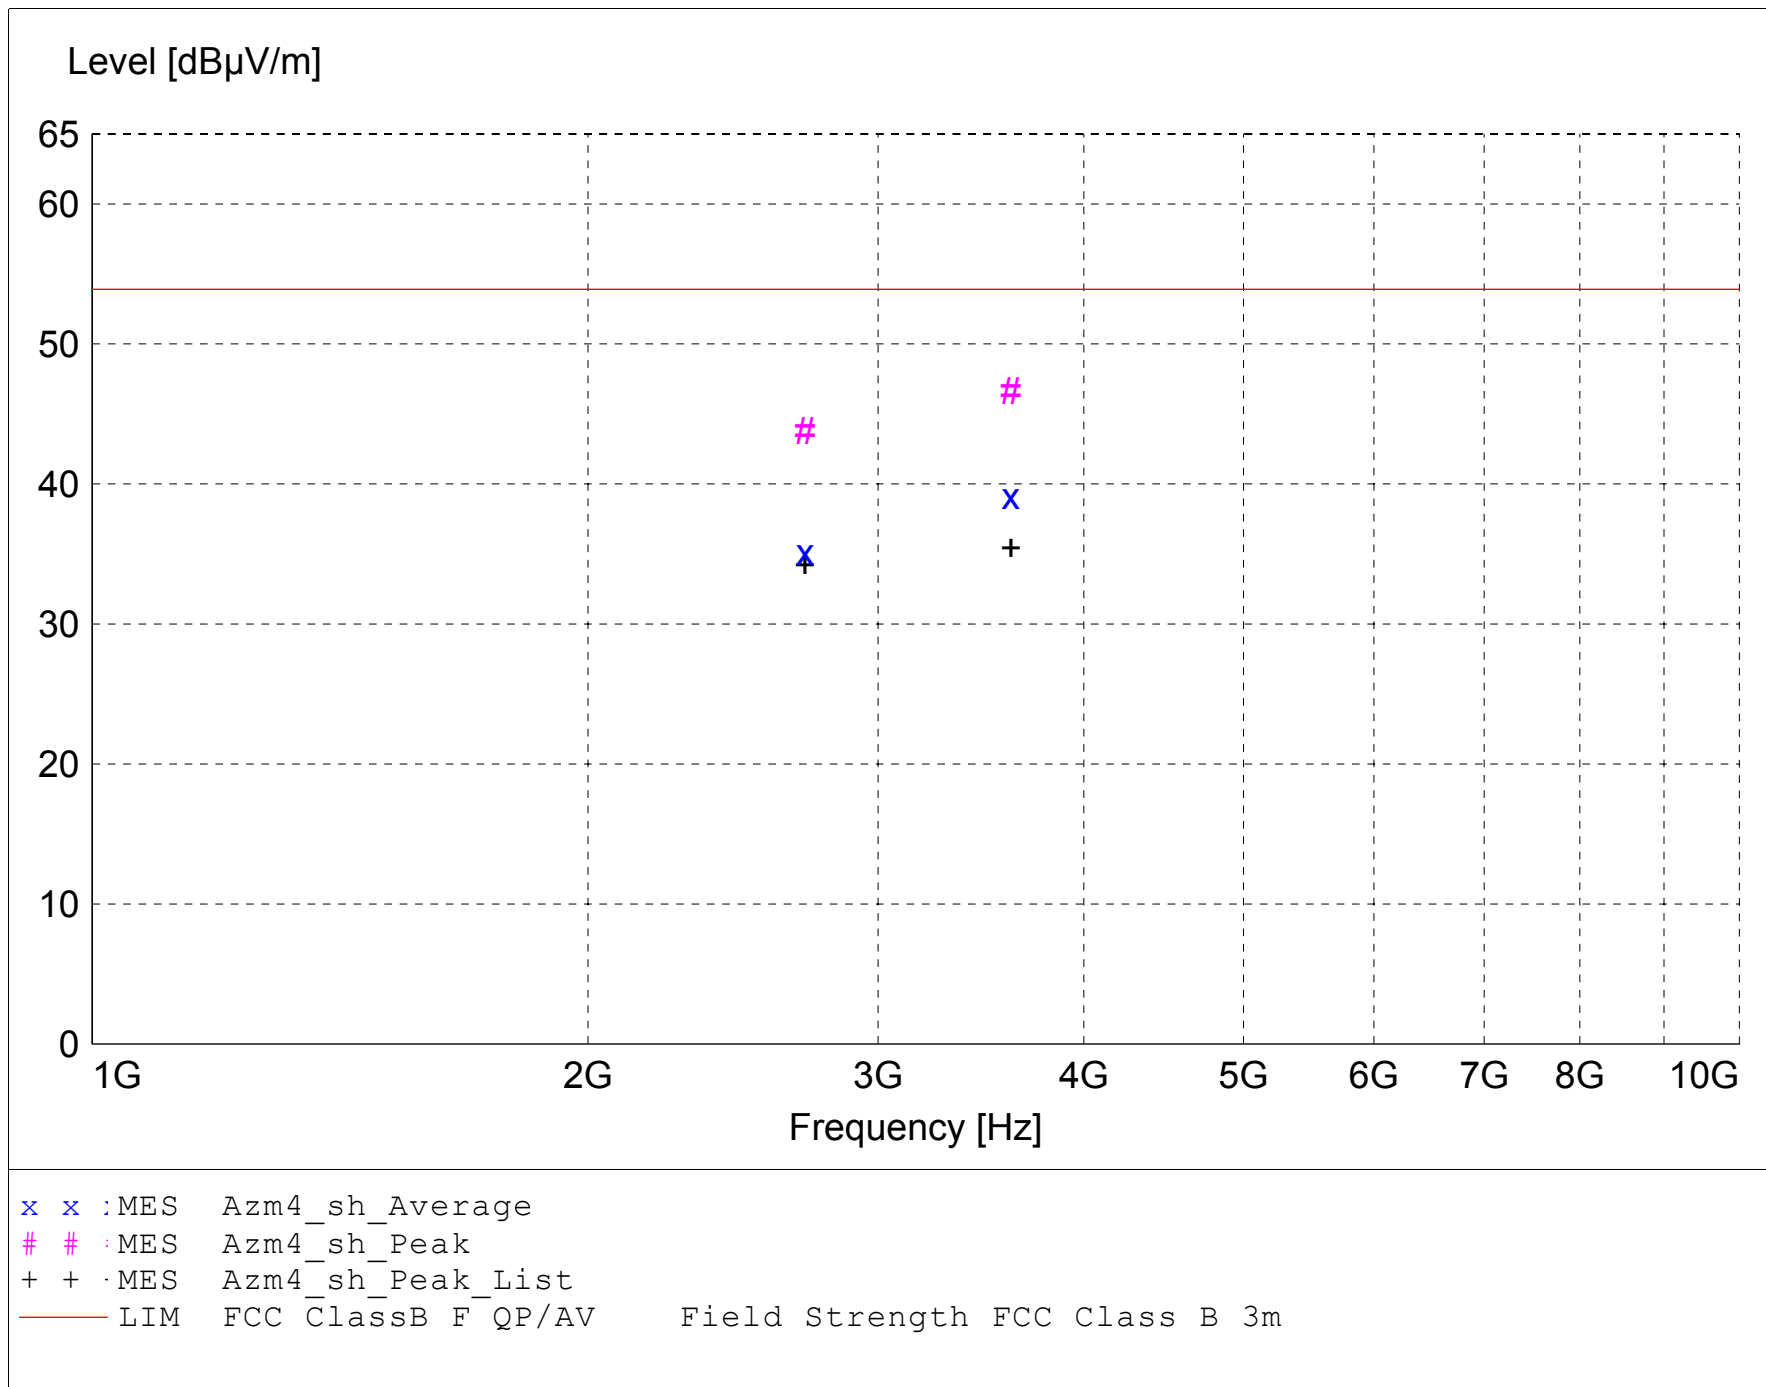

MEASUREMENT RESULT: "Azm4_sh_Final"

11/14/2006 11:20AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 3611.950000 | 51.67 | 31.41 | -36.4 | 46.6 | 53.9 | 7.3 | 1.60 | 315 | MAX PEAK | None |
| 2709.000000 | 51.53 | 29.11 | -36.9 | 43.8 | 53.9 | 10.1 | 1.80 | 90 | MAX PEAK | None |
| 3611.950000 | 44.18 | 31.41 | -36.4 | 39.2 | 53.9 | 14.7 | 1.60 | 315 | AVERAGE | None |
| 2709.000000 | 42.88 | 29.11 | -36.9 | 35.1 | 53.9 | 18.8 | 1.80 | 90 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; Mid channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

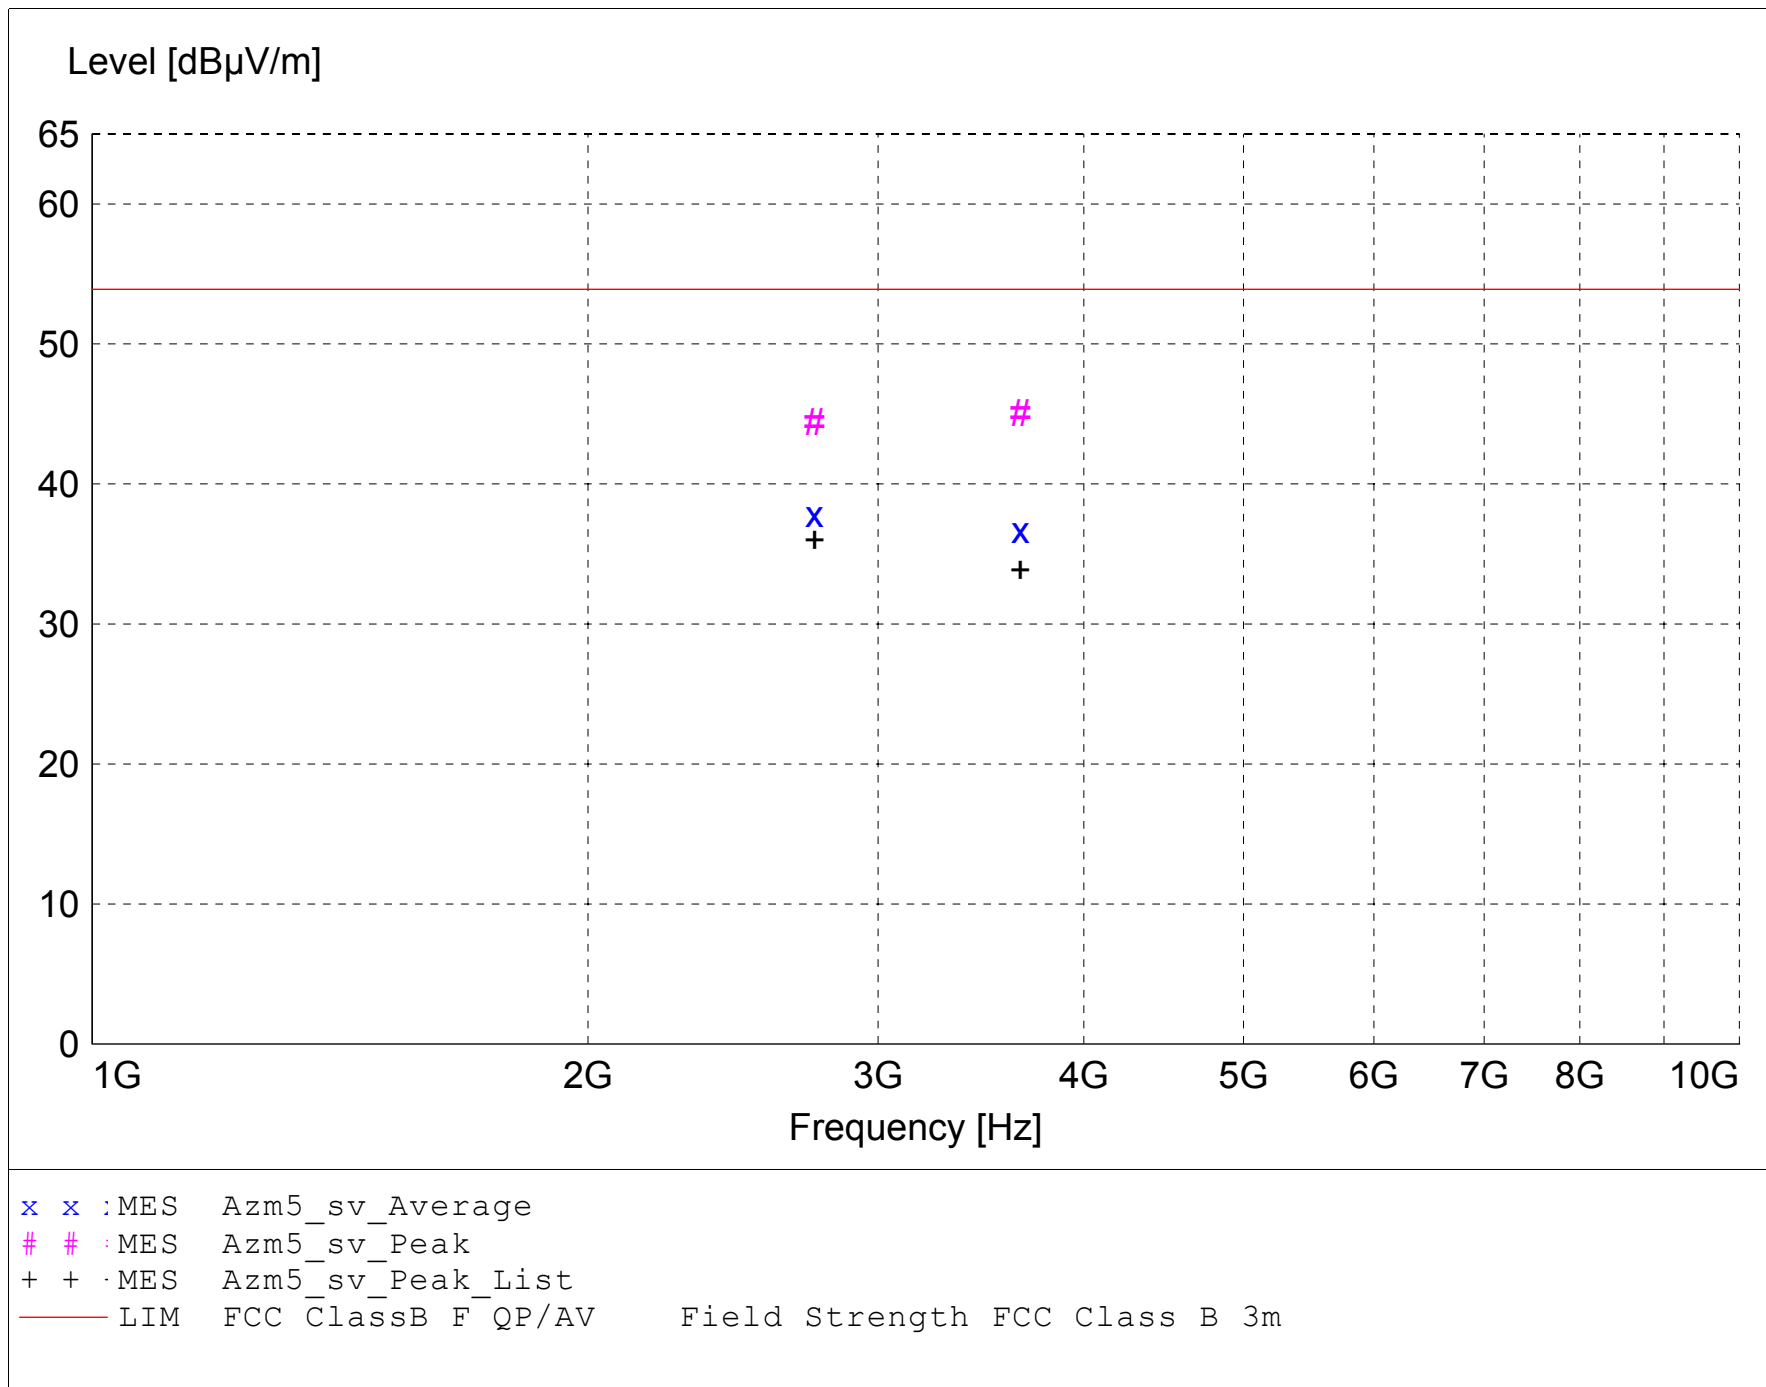

MEASUREMENT RESULT: "Azm5_sv_Final"

11/14/2006 11:32AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 3660.450000 | 49.99 | 31.55 | -36.5 | 45.0 | 53.9 | 8.9 | 1.20 | 160 | MAX PEAK | None |
| 2745.400000 | 51.93 | 29.23 | -36.7 | 44.4 | 53.9 | 9.5 | 1.10 | 135 | MAX PEAK | None |
| 2745.400000 | 45.32 | 29.23 | -36.7 | 37.8 | 53.9 | 16.1 | 1.10 | 135 | AVERAGE | None |
| 3660.450000 | 41.65 | 31.55 | -36.5 | 36.7 | 53.9 | 17.2 | 1.20 | 160 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; Mid channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

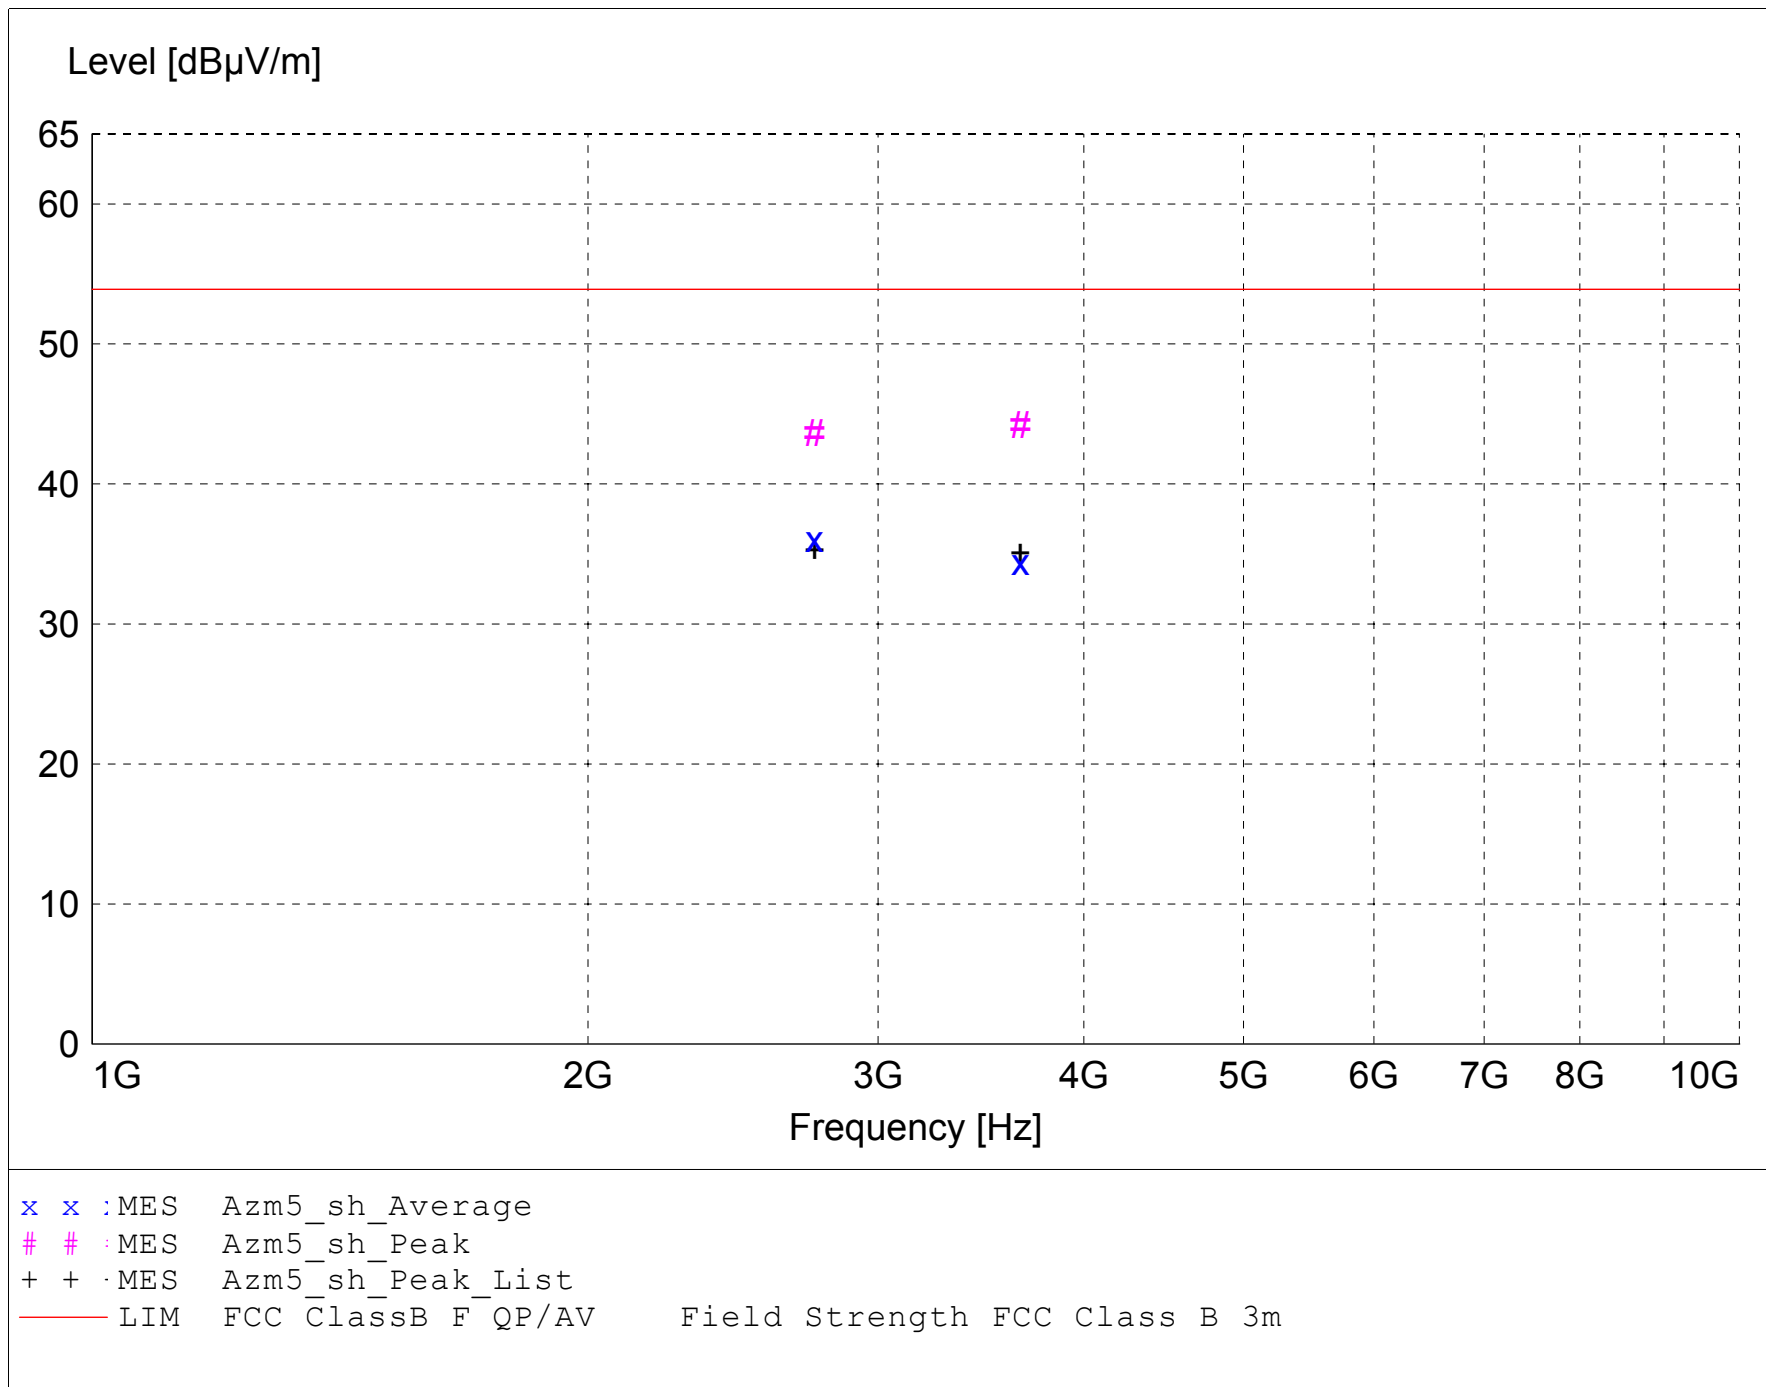

MEASUREMENT RESULT: "Azm5_sh_Final"

11/14/2006 11:40AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 3660.500000 | 49.15 | 31.55 | -36.5 | 44.2 | 53.9 | 9.7 | 1.30 | 20 | MAX PEAK | None |
| 2745.400000 | 51.14 | 29.23 | -36.7 | 43.6 | 53.9 | 10.3 | 1.20 | 350 | MAX PEAK | None |
| 2745.400000 | 43.58 | 29.23 | -36.7 | 36.1 | 53.9 | 17.8 | 1.20 | 350 | AVERAGE | None |
| 3660.500000 | 39.37 | 31.55 | -36.5 | 34.4 | 53.9 | 19.5 | 1.30 | 20 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; High channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

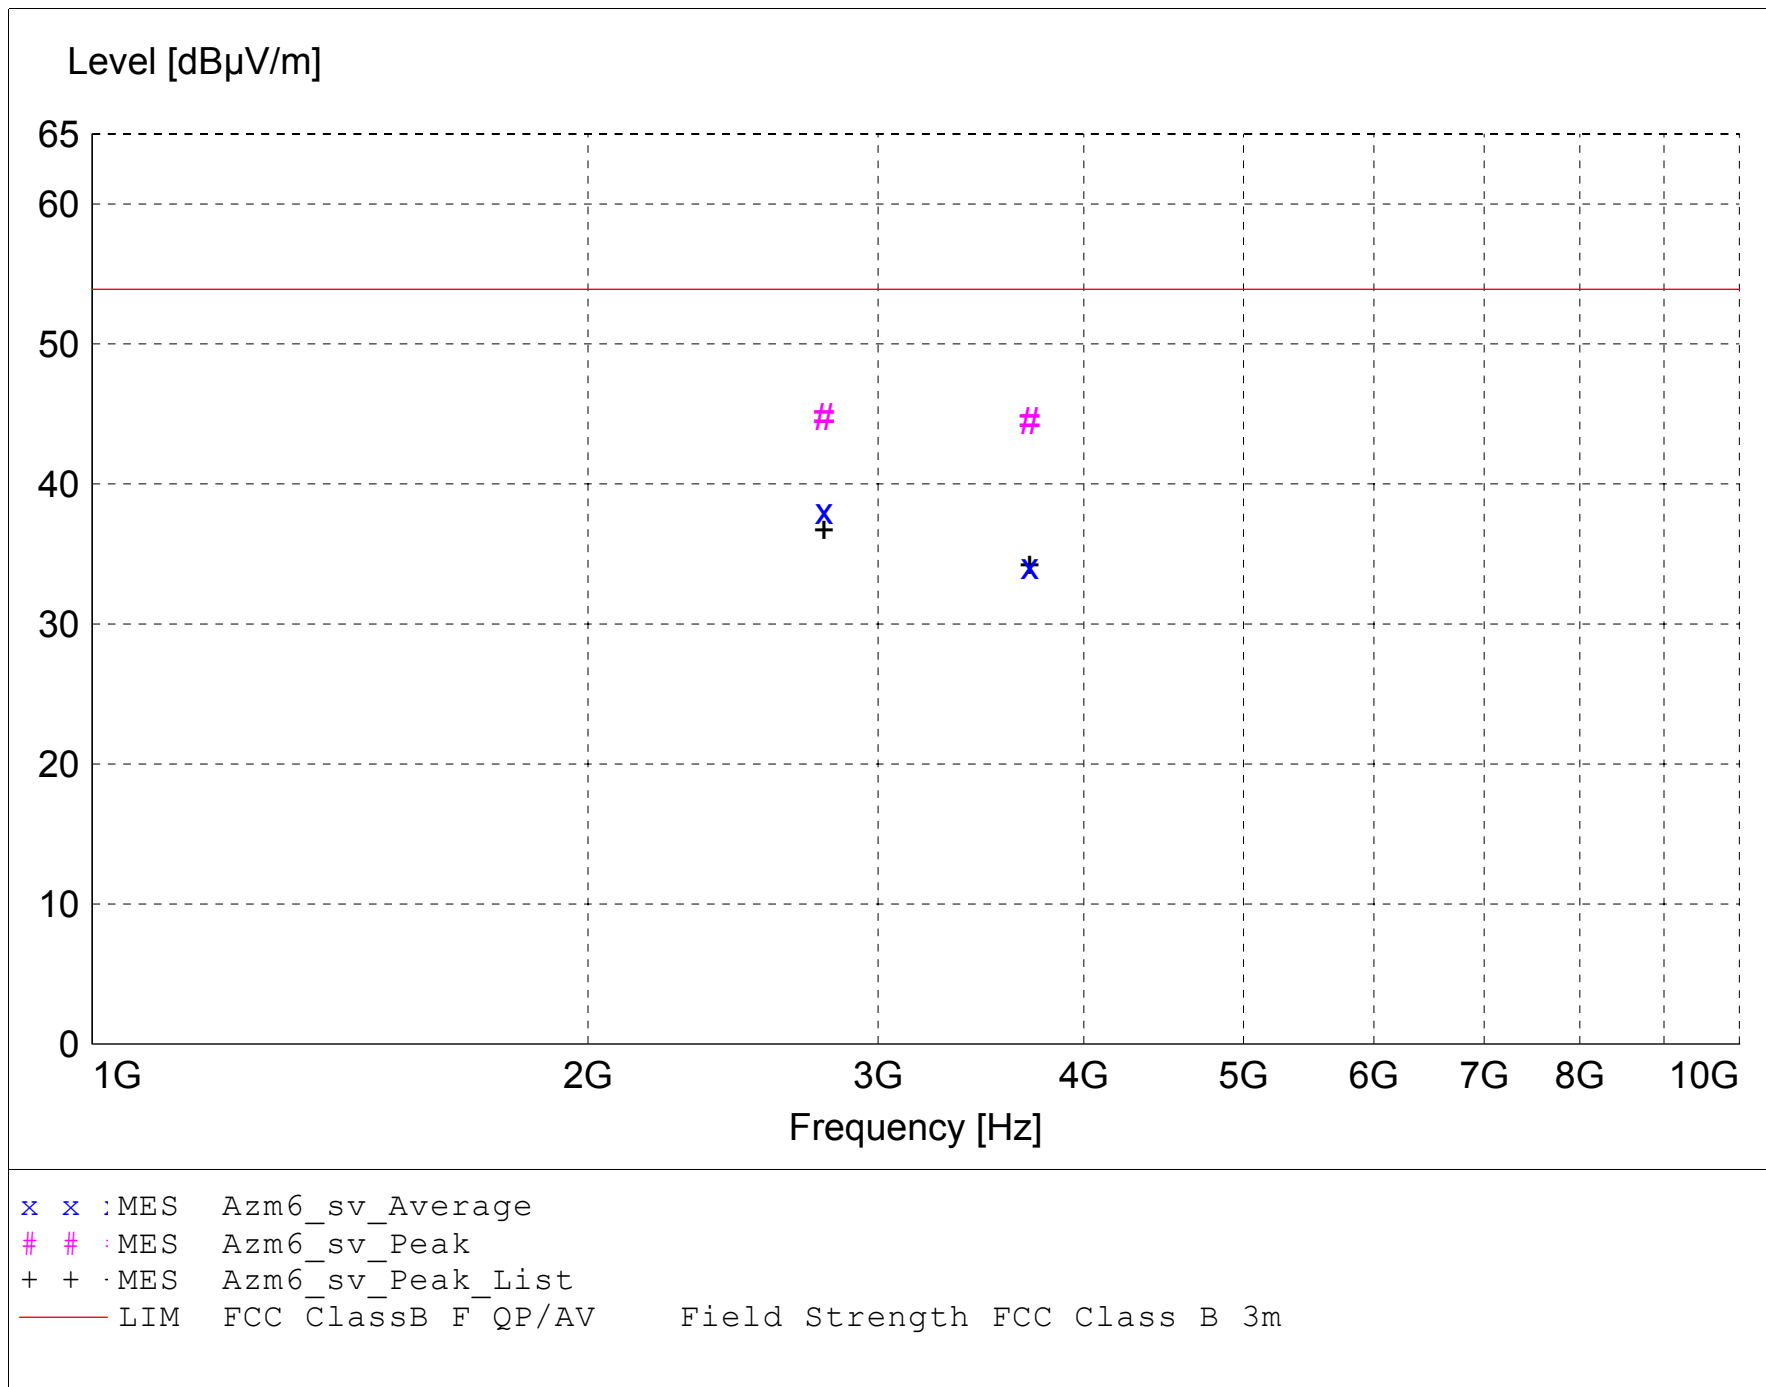

MEASUREMENT RESULT: "Azm6_sv_Final"

11/14/2006 11:50AM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 2781.550000 | 52.21 | 29.36 | -36.8 | 44.8 | 53.9 | 9.1 | 1.20 | 135 | MAX PEAK | None |
| 3708.750000 | 49.29 | 31.68 | -36.5 | 44.4 | 53.9 | 9.5 | 1.30 | 150 | MAX PEAK | None |
| 2781.550000 | 45.47 | 29.36 | -36.8 | 38.0 | 53.9 | 15.9 | 1.20 | 135 | AVERAGE | None |
| 3708.750000 | 38.98 | 31.68 | -36.5 | 34.1 | 53.9 | 19.8 | 1.30 | 150 | AVERAGE | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification: Radiated in Restricted Bands
Comment: RF Port 2 using antenna PN: 19630-099; High channel
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

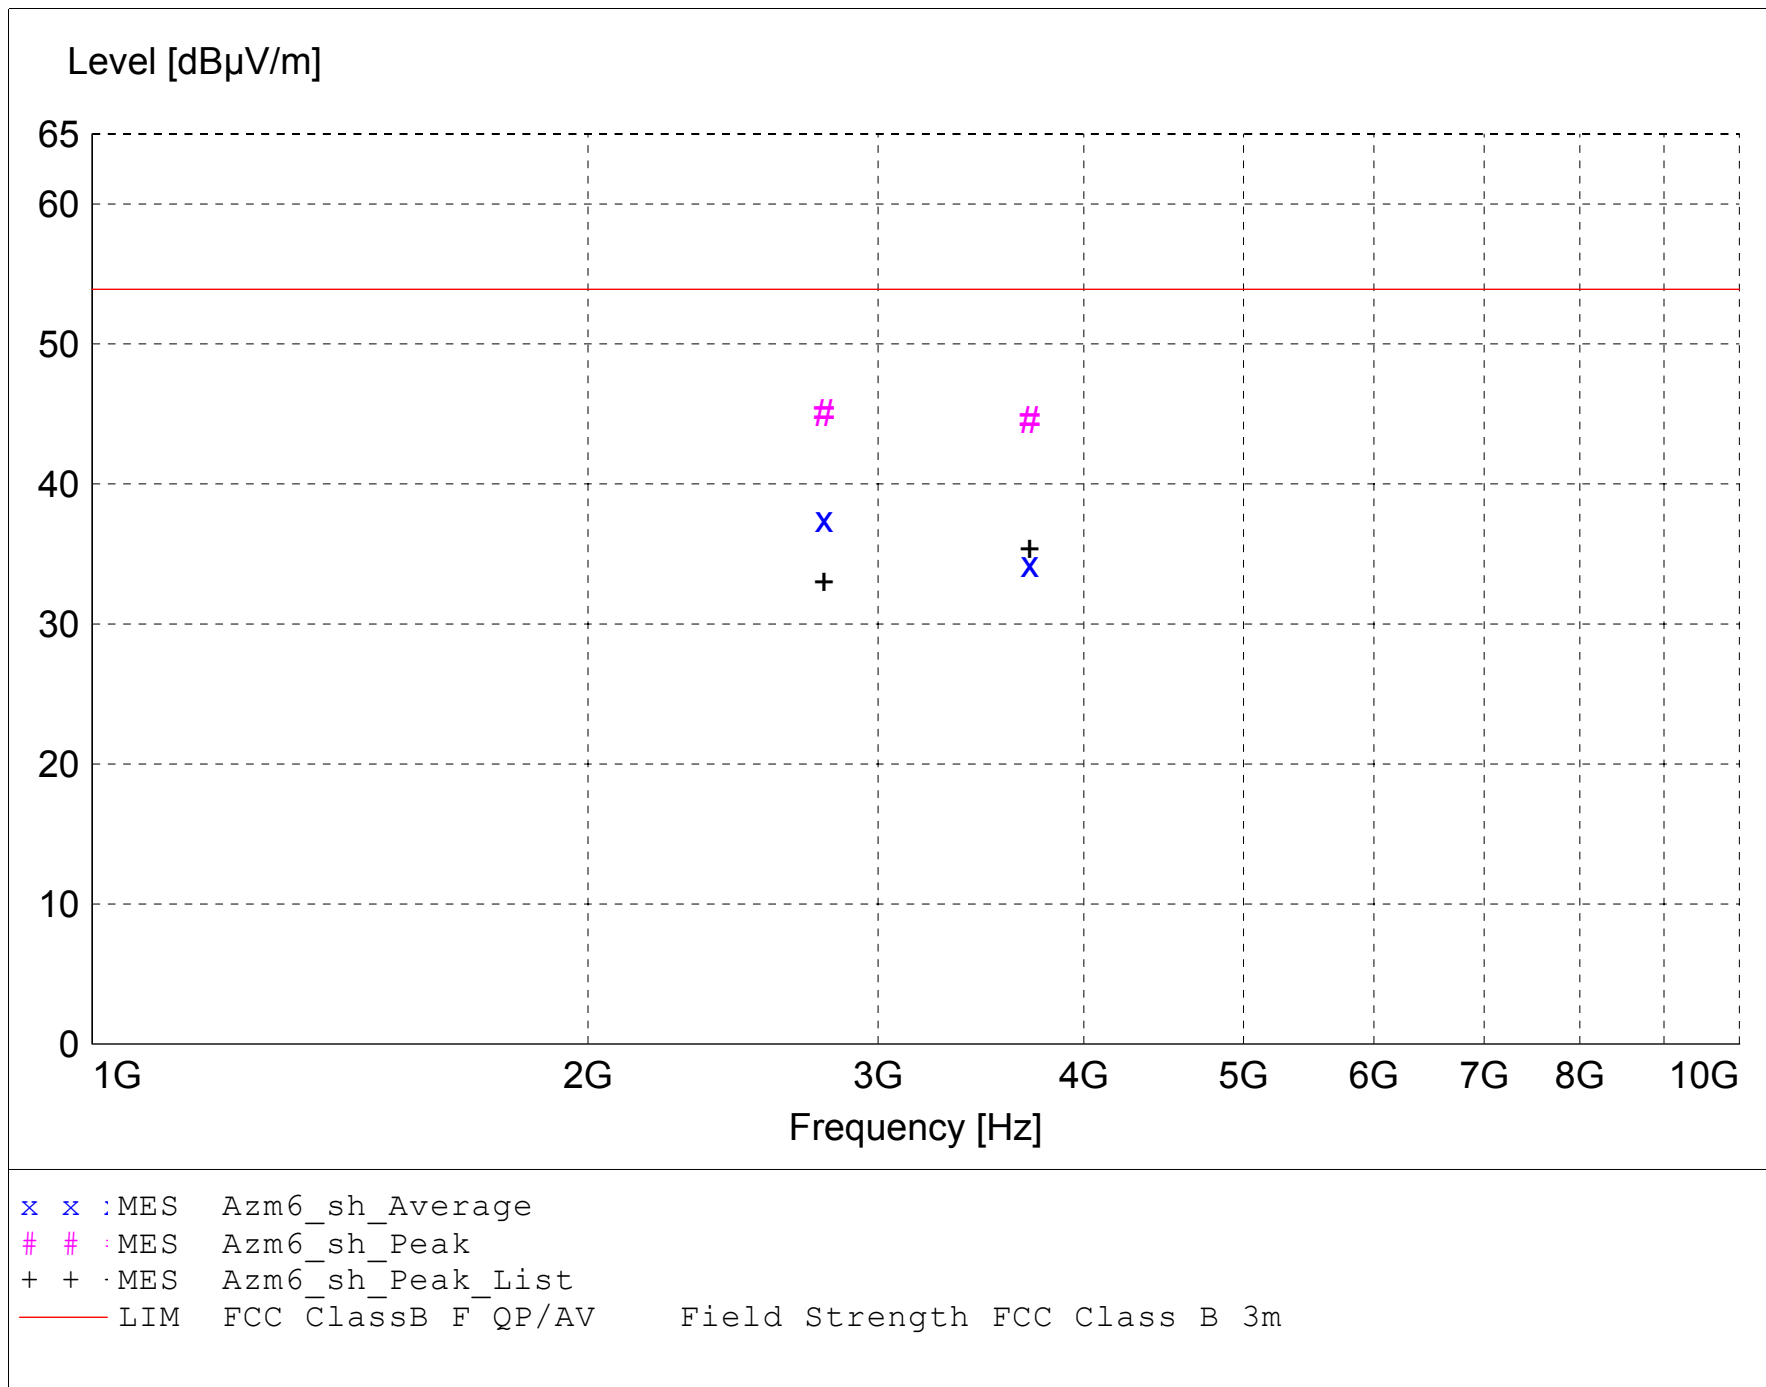

MEASUREMENT RESULT: "Azm6_sh_Final"

11/14/2006 12:40PM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|-------------|-------|---------|--------|--------|--------|--------|--------|-------|----------|---------|
| MHz | dBµV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 2781.550000 | 52.49 | 29.36 | -36.8 | 45.1 | 53.9 | 8.8 | 1.60 | 290 | MAX PEAK | None |
| 3708.800000 | 49.43 | 31.68 | -36.5 | 44.6 | 53.9 | 9.3 | 1.40 | 270 | MAX PEAK | None |
| 2781.550000 | 44.90 | 29.36 | -36.8 | 37.5 | 53.9 | 16.4 | 1.60 | 290 | AVERAGE | None |
| 3708.800000 | 39.07 | 31.68 | -36.5 | 34.2 | 53.9 | 19.7 | 1.40 | 270 | AVERAGE | None |



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the Zebra RFID Multiprotocol Encoder ZM4e, Model Number: ZM4e, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the Zebra RFID Multiprotocol Encoder ZM4e were made up to 10000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 480 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.247 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 25 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

As stated in Section 15.247(b) the allowed maximum peak output power of the transmitter shall not exceed 1 Watt. In any 100 kHz bandwidth outside these frequency bands (the power that is produced by the modulation products of the spreading sequence), the information sequence and the carrier frequency shall be either at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in 15.209 is not required.

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

NOTE:

All radiated emissions measurements were made at a test room temperature of **70°F** at **33%** relative humidity.



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

RADIATED DATA AND GRAPH(S) TAKEN FOR

FIELD STRENGTH FUNDAMENTAL AND

SPURIOUS EMISSION MEASUREMENTS

PART 15.247

30 MHz – 5000 MHz

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification:
Comment: Transmit, Receive, and printing modes
Date: 11-14-2006


TEXT: "Site 3 MidV 3M"

Short Description: Test Set-up Vert30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Antennas ---
Biconical -- EMCO 3104C SN: 9701-4785
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

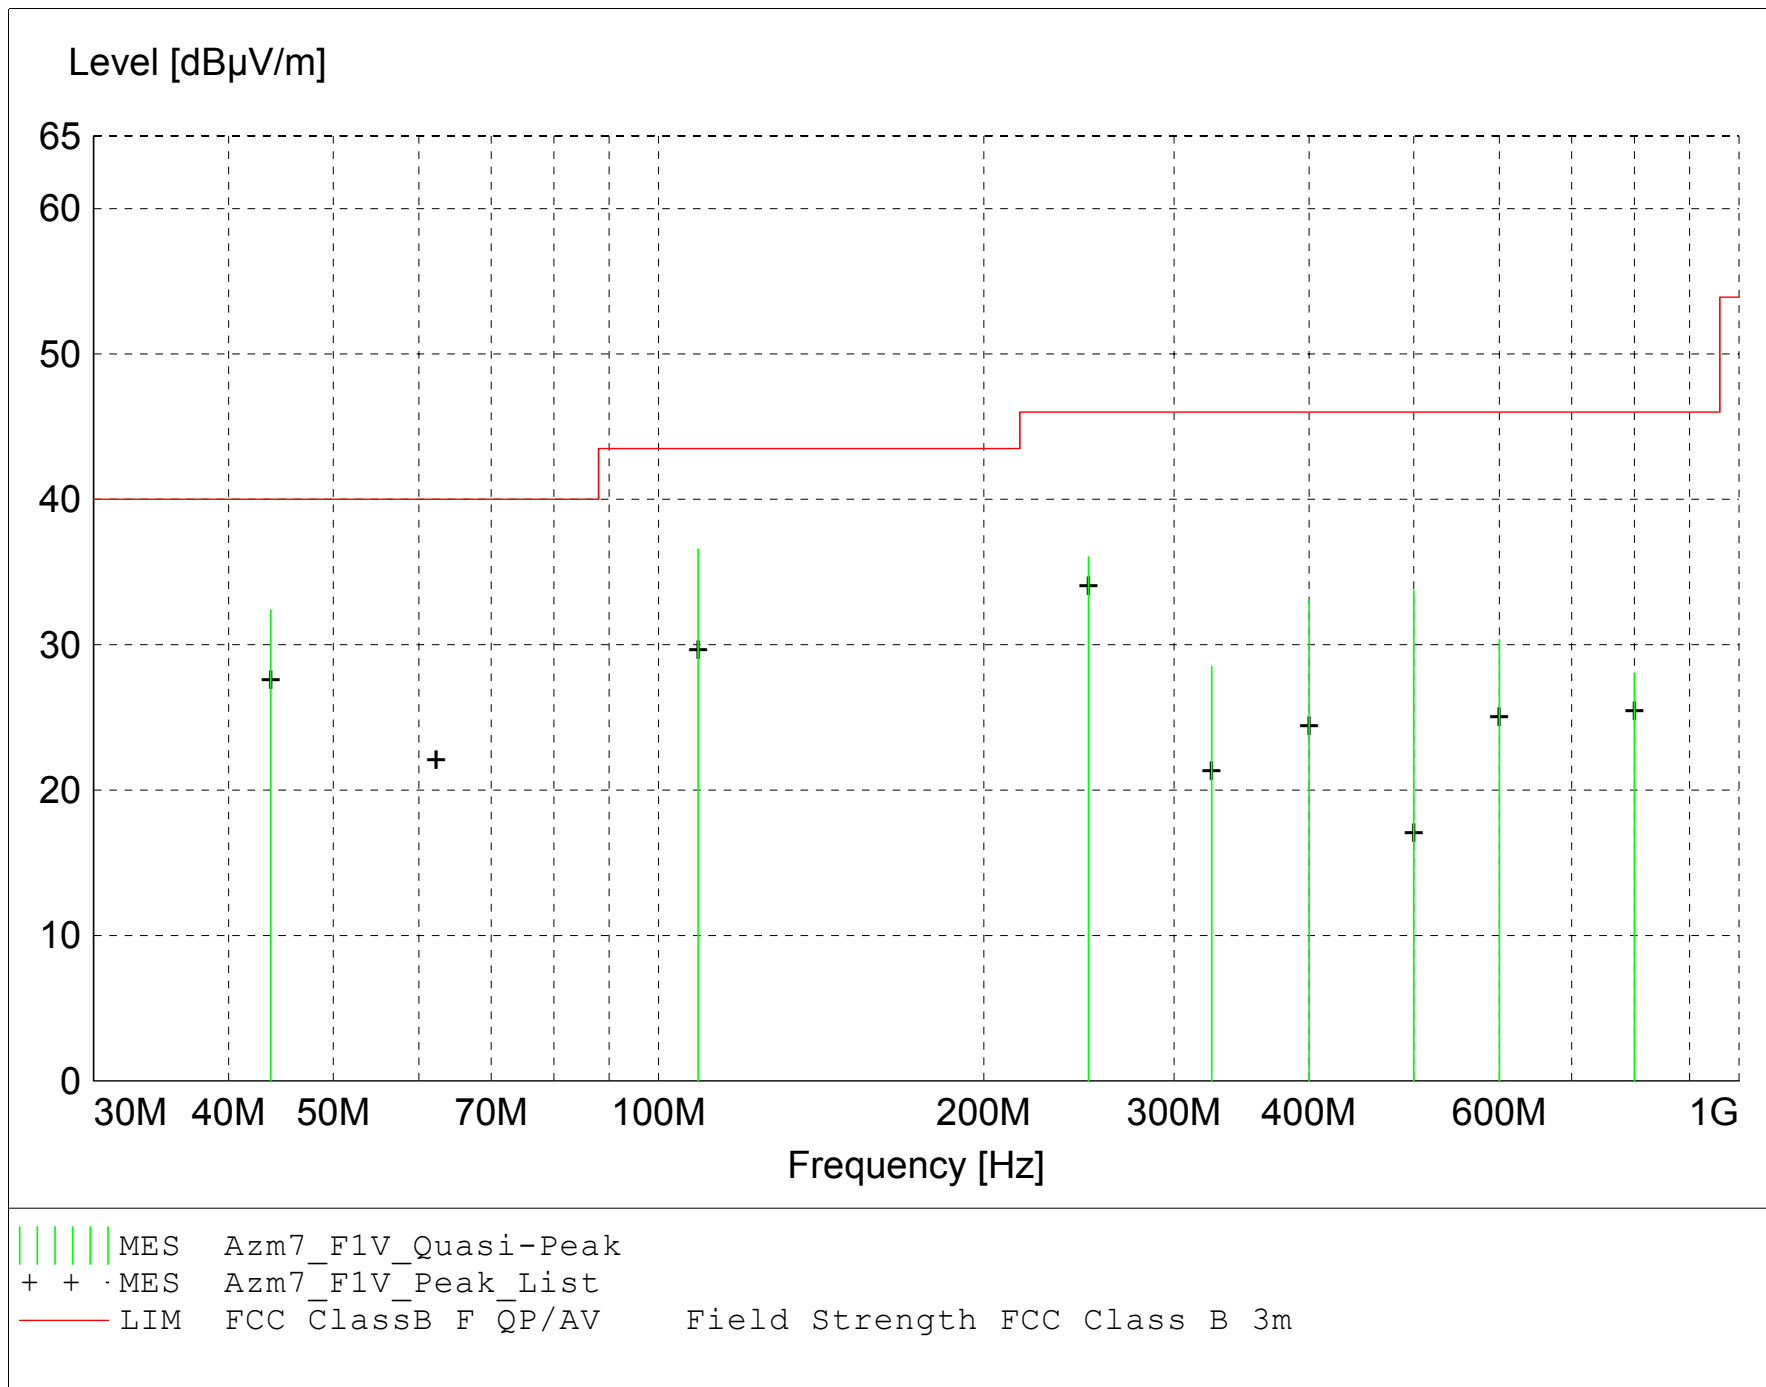

MEASUREMENT RESULT: "Azm7_F1V_Final"

11/14/2006 1:41PM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|------------|-------|---------|--------|--------|--------|--------|--------|-------|------------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 108.775000 | 48.08 | 11.79 | -23.3 | 36.6 | 43.5 | 6.9 | 1.00 | 315 | QUASI-PEAK | None |
| 43.755000 | 45.31 | 11.28 | -24.2 | 32.4 | 40.0 | 7.6 | 1.00 | 135 | QUASI-PEAK | None |
| 250.000000 | 46.55 | 11.79 | -22.3 | 36.0 | 46.0 | 10.0 | 1.00 | 315 | QUASI-PEAK | None |
| 500.000000 | 36.96 | 17.49 | -20.7 | 33.8 | 46.0 | 12.2 | 1.00 | 160 | QUASI-PEAK | None |
| 400.000000 | 38.95 | 15.40 | -21.2 | 33.1 | 46.0 | 12.9 | 1.40 | 200 | QUASI-PEAK | None |
| 600.010000 | 32.00 | 18.87 | -20.5 | 30.4 | 46.0 | 15.6 | 1.00 | 225 | QUASI-PEAK | None |
| 325.000000 | 36.16 | 14.09 | -21.7 | 28.5 | 46.0 | 17.5 | 1.00 | 45 | QUASI-PEAK | None |
| 800.000000 | 26.66 | 20.57 | -19.2 | 28.1 | 46.0 | 17.9 | 1.00 | 0 | QUASI-PEAK | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification:
Comment: Transmit, Receive, and printing modes
Date: 11-14-2006


TEXT: "Site 3 MidH 3M"

Short Description: Test Set-up Horz30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/005

Antennas ---
Biconical -- EMCO 3104C SN: 9701-4785
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

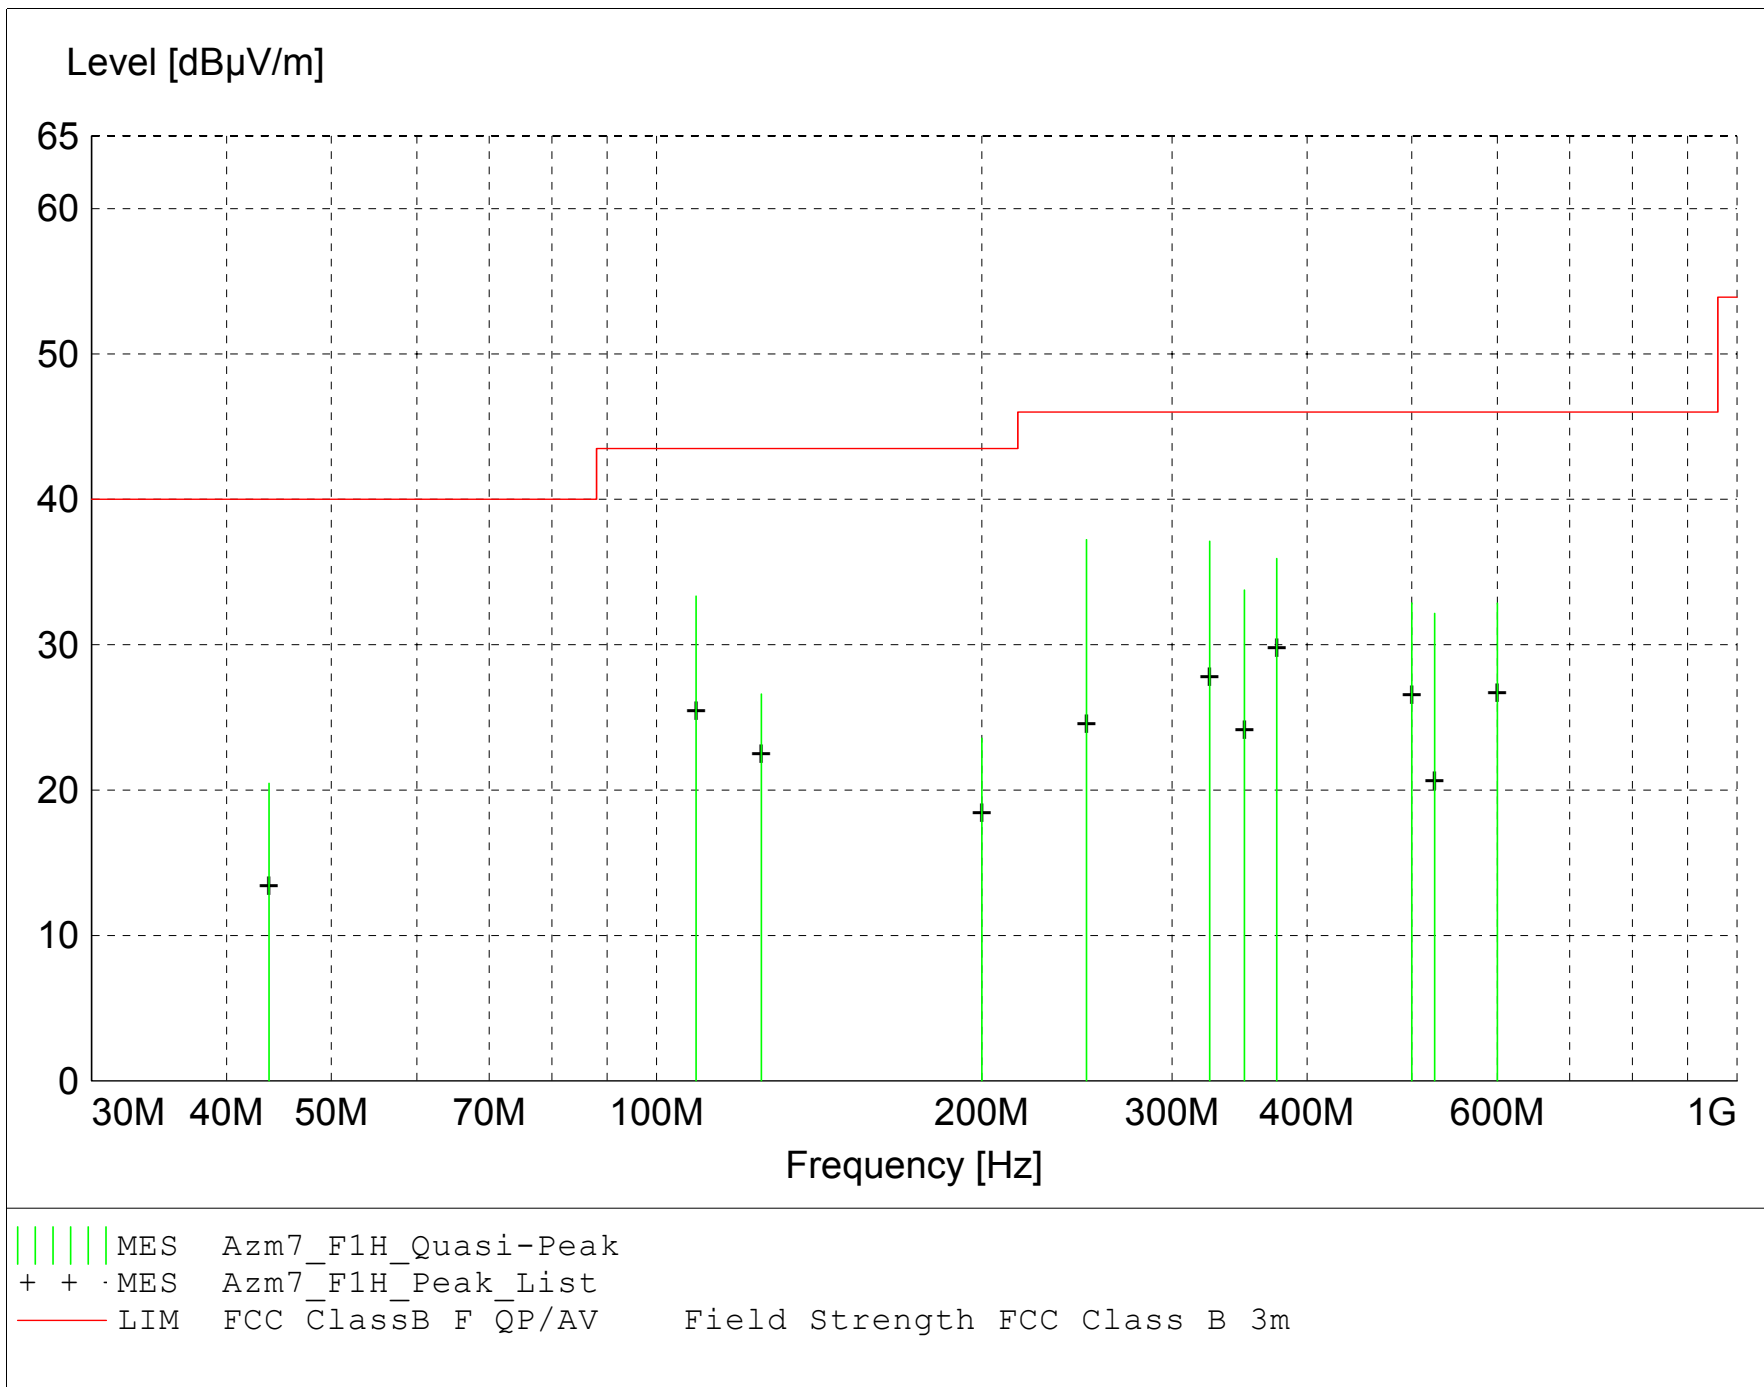

MEASUREMENT RESULT: "Azm7_F1H_Final"

11/14/2006 1:32PM

| Frequency | Level | Antenna | System | Total | Limit | Margin | Height | EuT | Final | Comment |
|------------|-------|---------|--------|--------|--------|--------|--------|-------|------------|---------|
| MHz | dBμV | Factor | Loss | Level | | | Ant. | Angle | Detector | |
| | | dBμV/m | dB | dBμV/m | dBμV/m | dB | m | deg | | |
| 250.000000 | 47.74 | 11.79 | -22.3 | 37.2 | 46.0 | 8.8 | 1.00 | 290 | QUASI-PEAK | None |
| 325.000000 | 44.77 | 14.09 | -21.7 | 37.1 | 46.0 | 8.9 | 1.00 | 170 | QUASI-PEAK | None |
| 375.000000 | 42.72 | 14.79 | -21.6 | 35.9 | 46.0 | 10.1 | 1.00 | 170 | QUASI-PEAK | None |
| 108.770000 | 44.83 | 11.79 | -23.3 | 33.3 | 43.5 | 10.2 | 3.00 | 270 | QUASI-PEAK | None |
| 350.000000 | 40.99 | 14.26 | -21.5 | 33.8 | 46.0 | 12.2 | 1.00 | 180 | QUASI-PEAK | None |
| 500.000000 | 36.08 | 17.49 | -20.7 | 32.9 | 46.0 | 13.1 | 2.30 | 150 | QUASI-PEAK | None |
| 600.000000 | 34.49 | 18.87 | -20.5 | 32.9 | 46.0 | 13.1 | 1.30 | 225 | QUASI-PEAK | None |
| 525.000000 | 34.95 | 17.89 | -20.7 | 32.2 | 46.0 | 13.8 | 2.20 | 160 | QUASI-PEAK | None |
| 125.005000 | 37.25 | 12.52 | -23.2 | 26.6 | 43.5 | 16.9 | 3.00 | 270 | QUASI-PEAK | None |
| 43.785000 | 33.37 | 11.29 | -24.2 | 20.5 | 40.0 | 19.5 | 3.00 | 315 | QUASI-PEAK | None |
| 200.000000 | 30.21 | 15.87 | -22.5 | 23.6 | 43.5 | 19.9 | 1.80 | 350 | QUASI-PEAK | None |

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification:
Comment: Transmit, Receive, and printing modes
Date: 11-14-2006


TEXT: "Site 3 6204&106 V3M"

Short Description: Test Set-up Vert1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

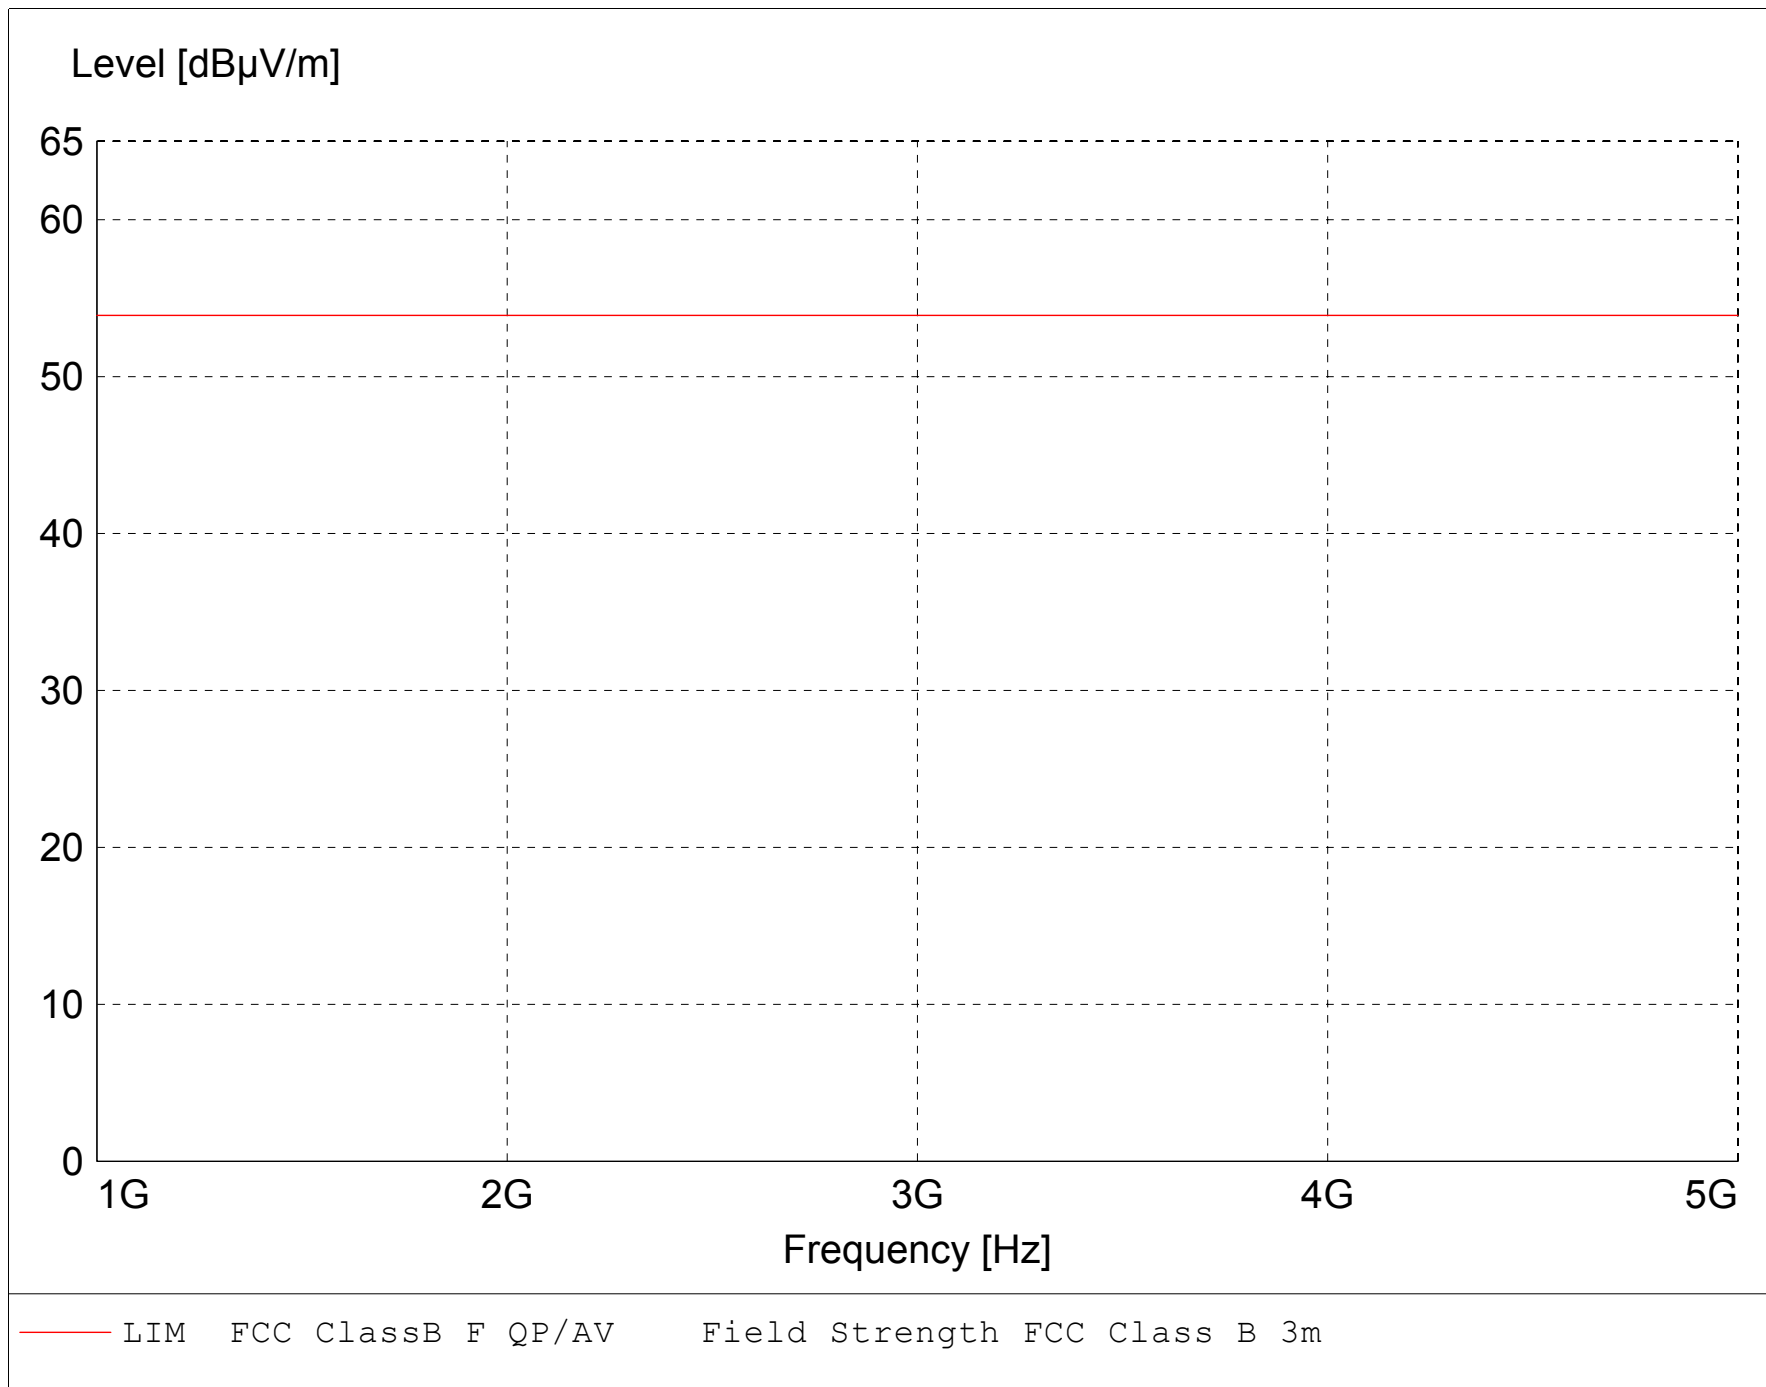

FCC Part 15 Class B

Electric Field Strength

EUT: ZM4e reader in RA400 host
Manufacturer: Zebra
Operating Condition: 70 deg. F; 33% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig Brandt
Test Specification:
Comment: Transmit, Receive, and printing modes
Date: 11-14-2006


TEXT: "Site 3 6204&106 H3M"

Short Description: Test Set-up Horz1GHz-
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Horn Antenna --- ETS 3115 SN: 6204

Pre-Amps ---
1 - 10 GHz -- Miteq AMF-6D-010100-50 SN: 213976
10 - 18 GHz -- Miteq AMF-6B-100200-50 SN: 313936

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

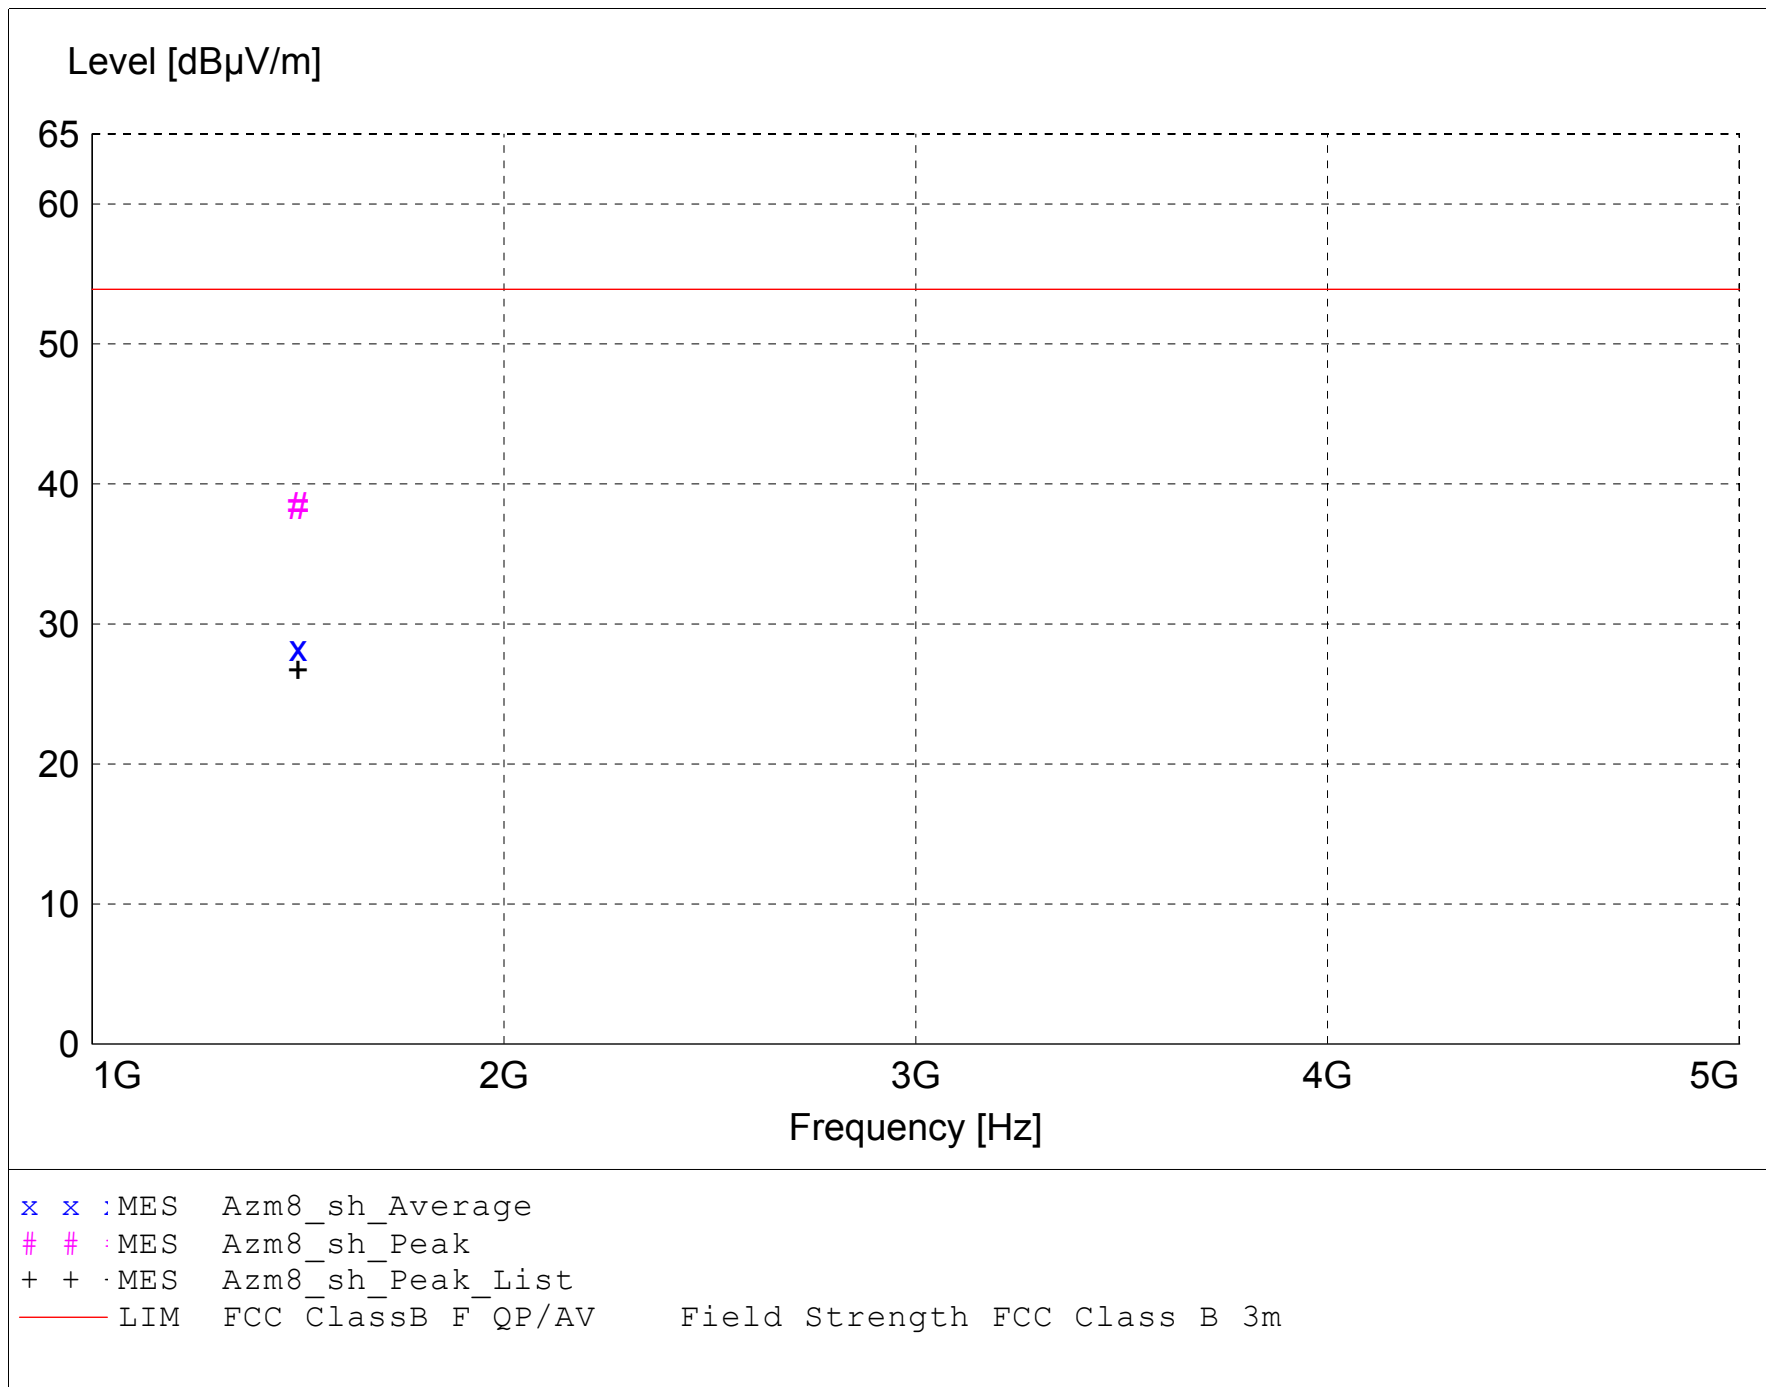

MEASUREMENT RESULT: "Azm8_sh_Final"

11/14/2006 1:52PM

| Frequency | Level | Antenna Factor | System Loss | Total Level | Limit | Margin | Height Ant. | EuT Angle | Final Detector | Comment |
|-------------|-------|-------------------|----------------|----------------|--------|--------|----------------|--------------|-------------------|---------|
| MHz | dBµV | dBµV/m | dB | dBµV/m | dBµV/m | dB | m | deg | | |
| 1500.000000 | 52.35 | 25.00 | -38.9 | 38.4 | 53.9 | 15.5 | 1.00 | 135 | MAX PEAK | None |
| 1500.000000 | 42.24 | 25.00 | -38.9 | 28.3 | 53.9 | 25.6 | 1.00 | 135 | AVERAGE | None |



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247

RF PORT 1




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 1 using antenna PN: 21175-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: Low Channel

Power Output = 29.27 dBm

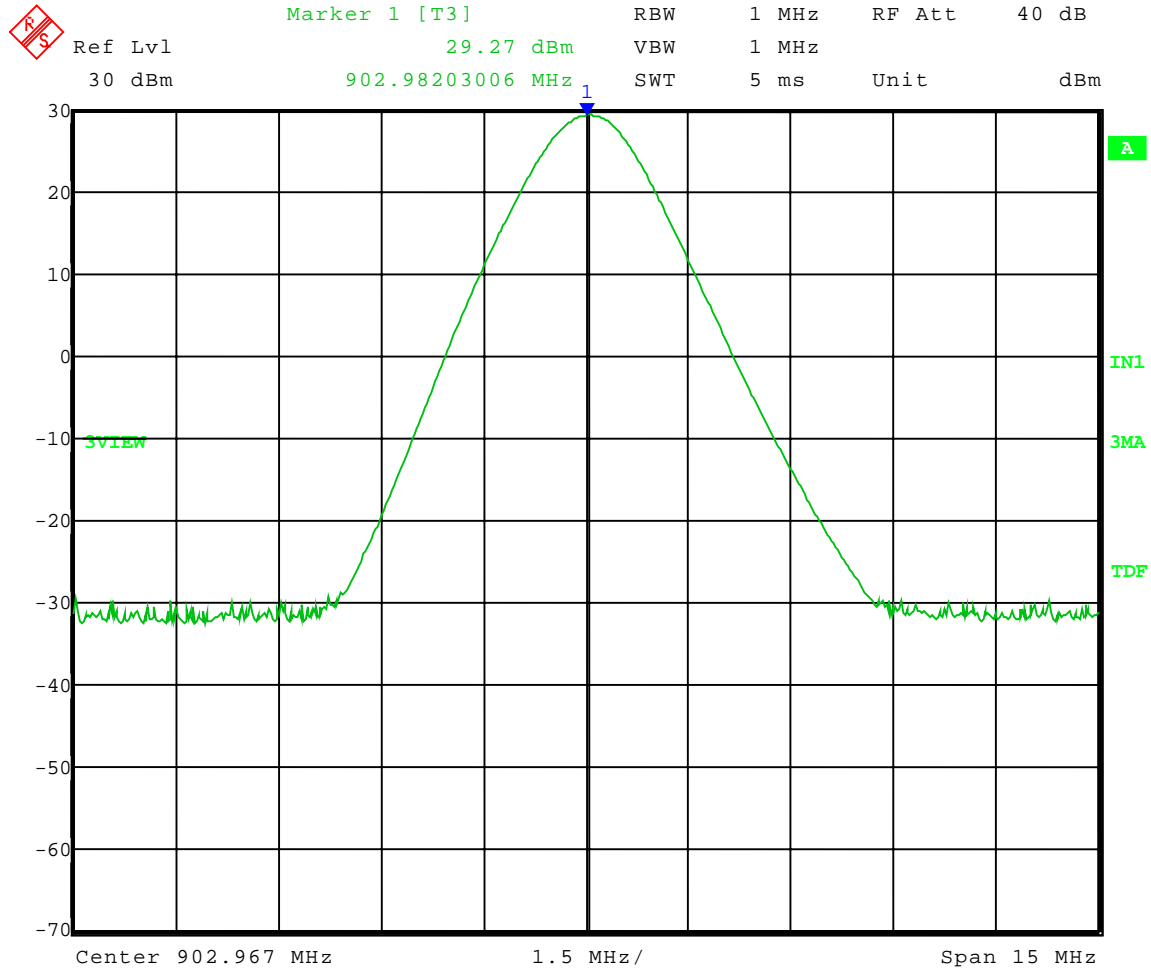

Date: 14.NOV.2006 15:31:00




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 1 using antenna PN: 21175-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: Middle Channel

Power Output = 29.26 dBm

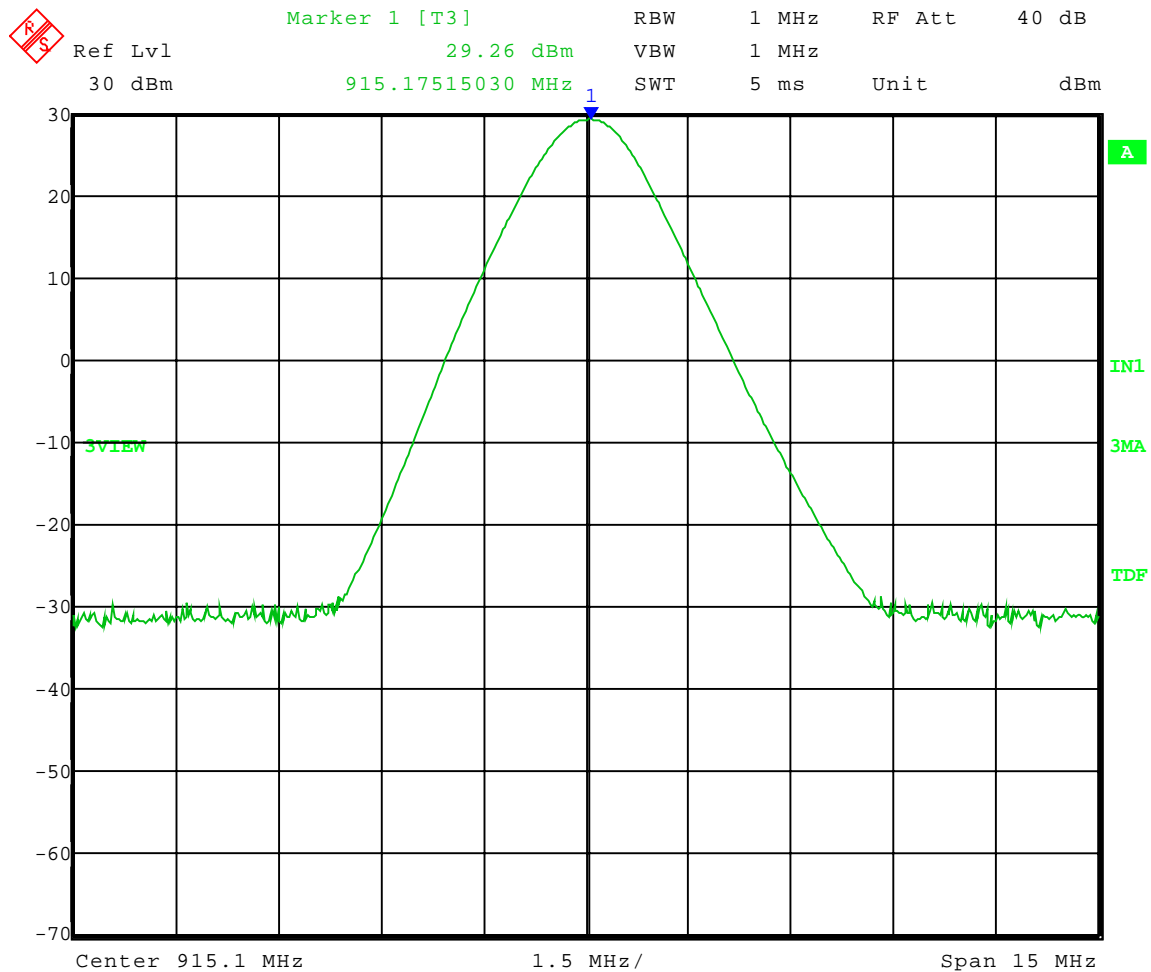

Date: 14.NOV.2006 15:29:55




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 1 using antenna PN: 21175-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: High Channel

Power Output = 28.97 dBm

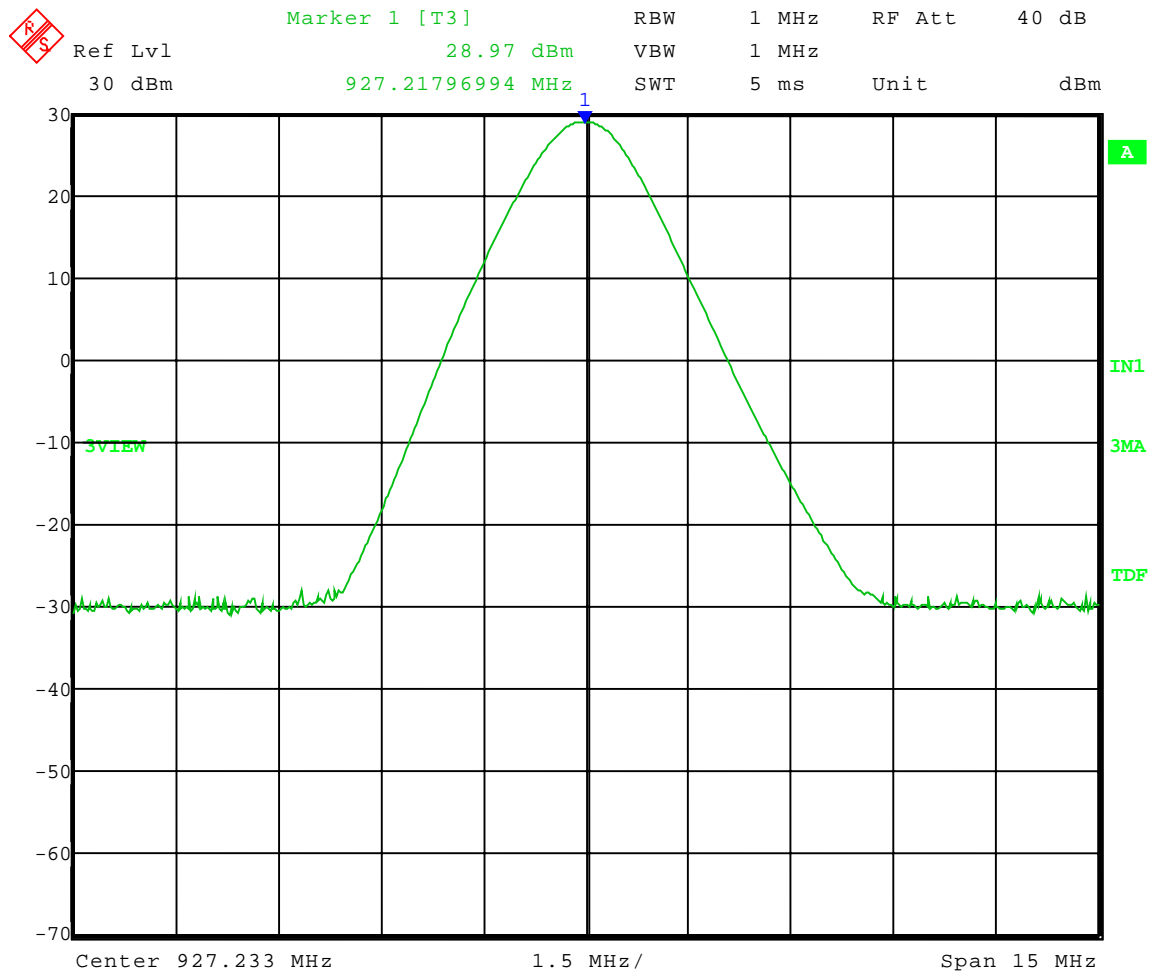

Date: 14.NOV.2006 15:27:50



1250 Peterson Dr., Wheeling, IL 60090

Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

APPENDIX A

CONDUCTED PEAK OUTPUT POWER GRAPHS

PART 15.247

RF PORT 2




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 2 using antenna PN: 19630-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: Low Channel

Power Output = 28.99 dBm

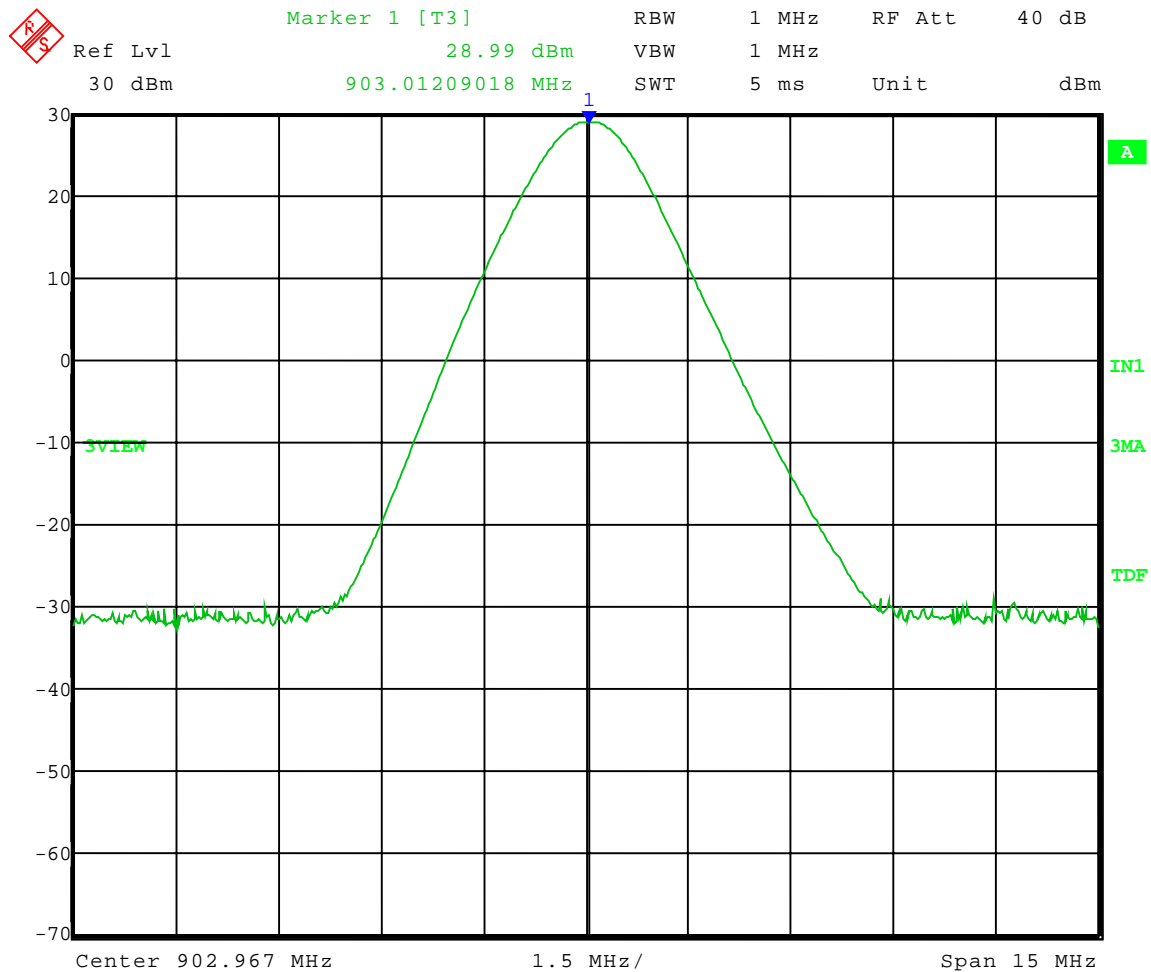

Date: 14.NOV.2006 15:34:05




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 2 using antenna PN: 19630-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: Middle Channel

Power Output = 29.05 dBm

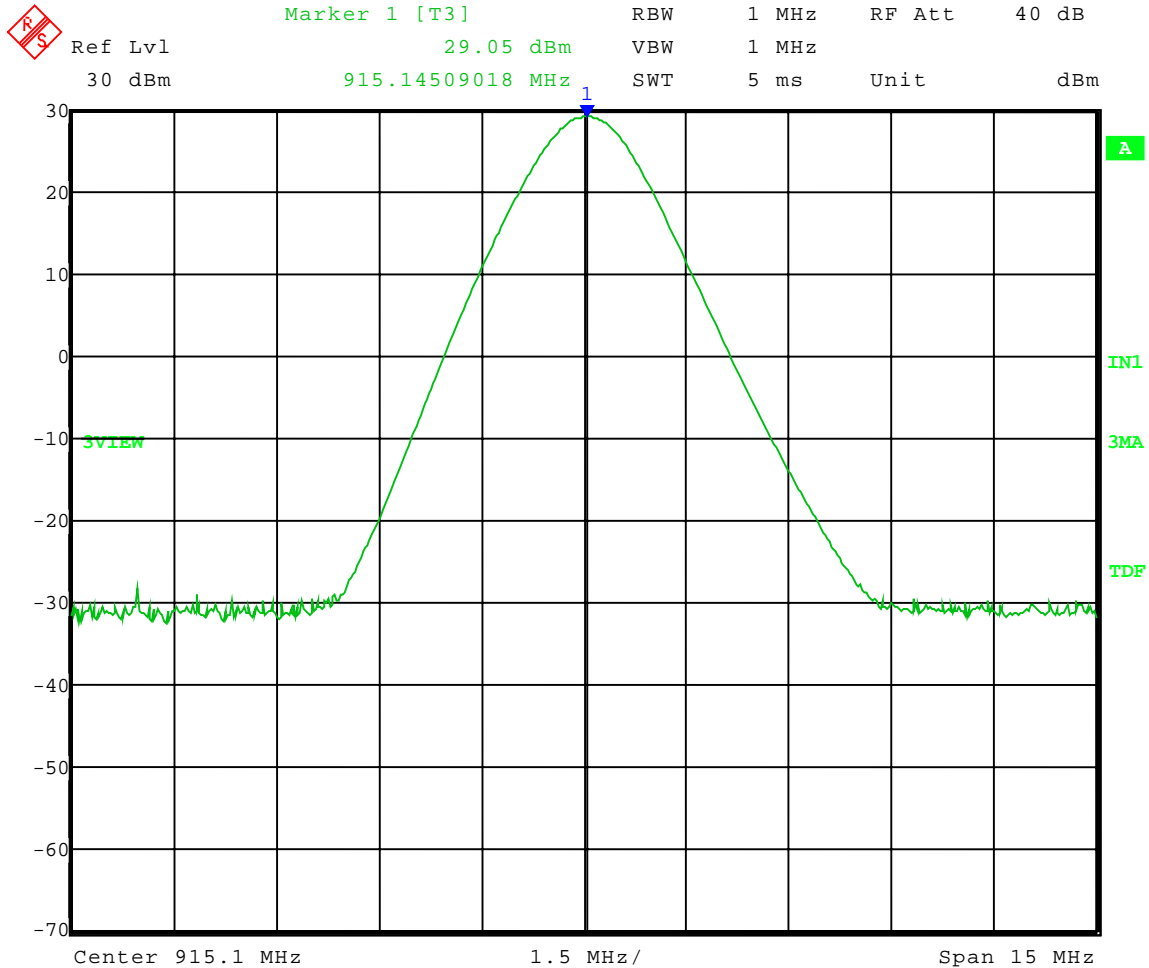

Date: 14.NOV.2006 15:36:00




Company: Zebra Technologies Corporation
Model Tested: ZM4e
Report Number: 12742

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 11-14-2006
Company: Zebra Technologies
EUT: ZM4e reader in RA400 host
RF Port 2 using antenna PN: 19630-099
Test: Power Output - Conducted
Operator: Craig Brandt
Comment: High Channel

Power Output = 28.97 dBm

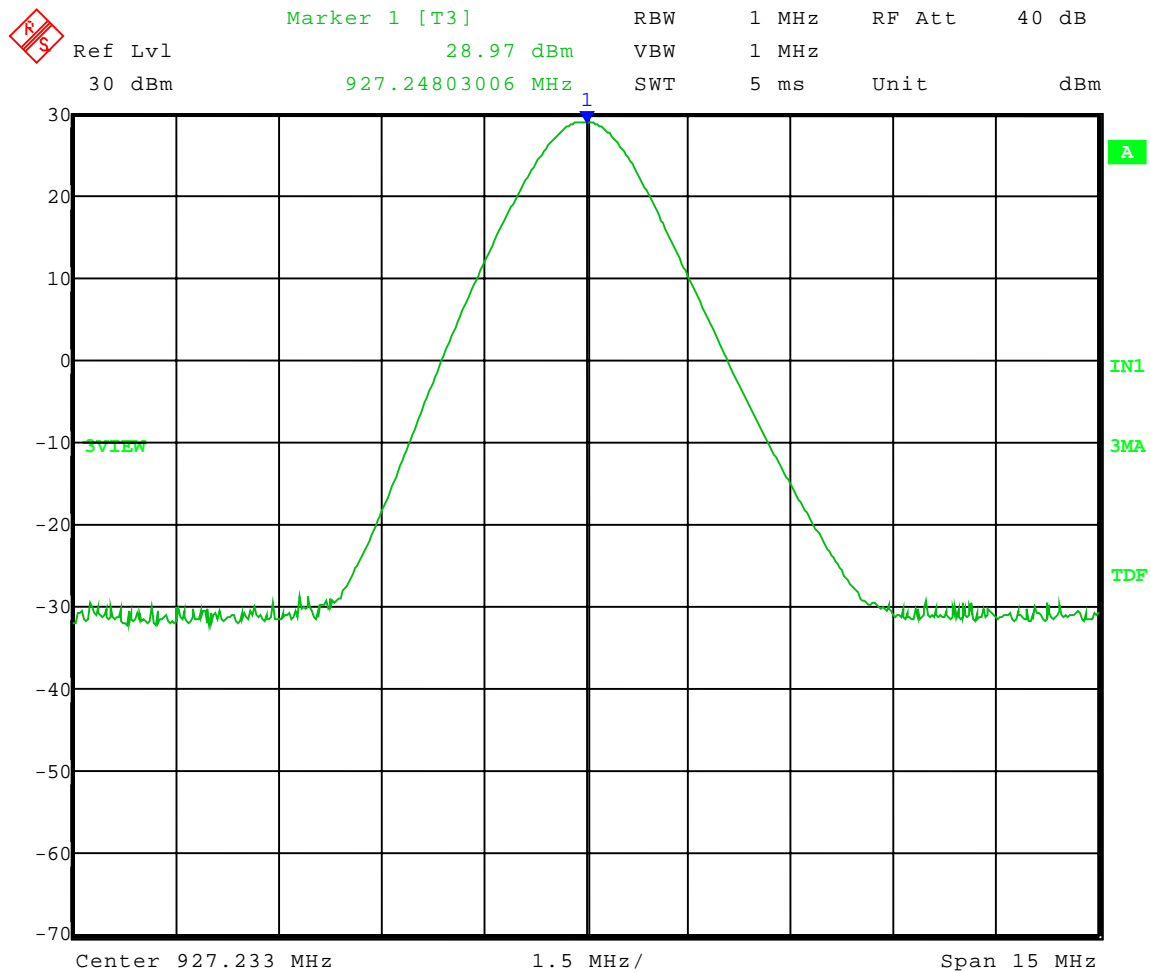

Date: 14.NOV.2006 15:37:13