

**WiFi 2.4G/ Bluetooth****Test SKU: SKU #1 (with INPAQ Antenna)**

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.899 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.684 V/m; Power Drift = -1.05 dB


Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 1.28 W/kg

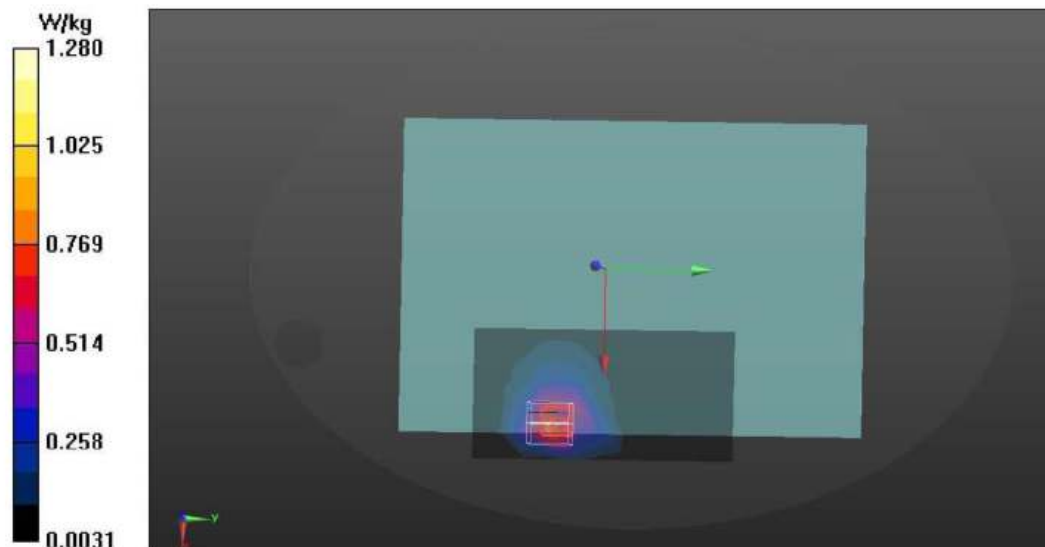

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P3 802.11b CH7 2442MHz bottom Aux**

DUT: 16Z90R

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 38.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.273 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.851 V/m; Power Drift = 0.59 dB


Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.0703 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 0.291 W/kg

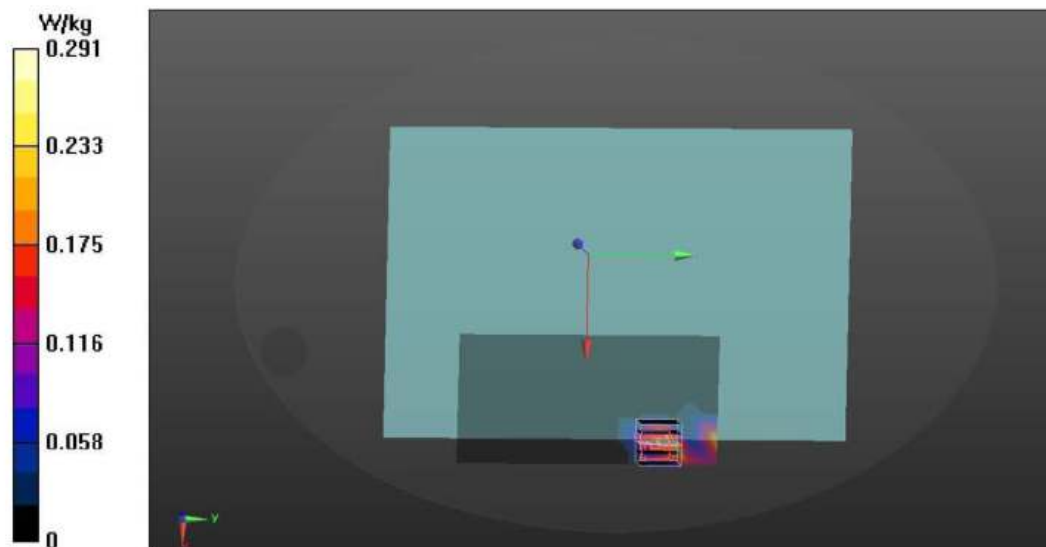

Date: 11/23/2022

Test Laboratory: Audix\_SAR Lab

**P17 802.11b CH1 2412MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  S/m;  $\epsilon_r = 38.696$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.882 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.676 V/m; Power Drift = -0.85 dB


Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.425 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 1.19 W/kg

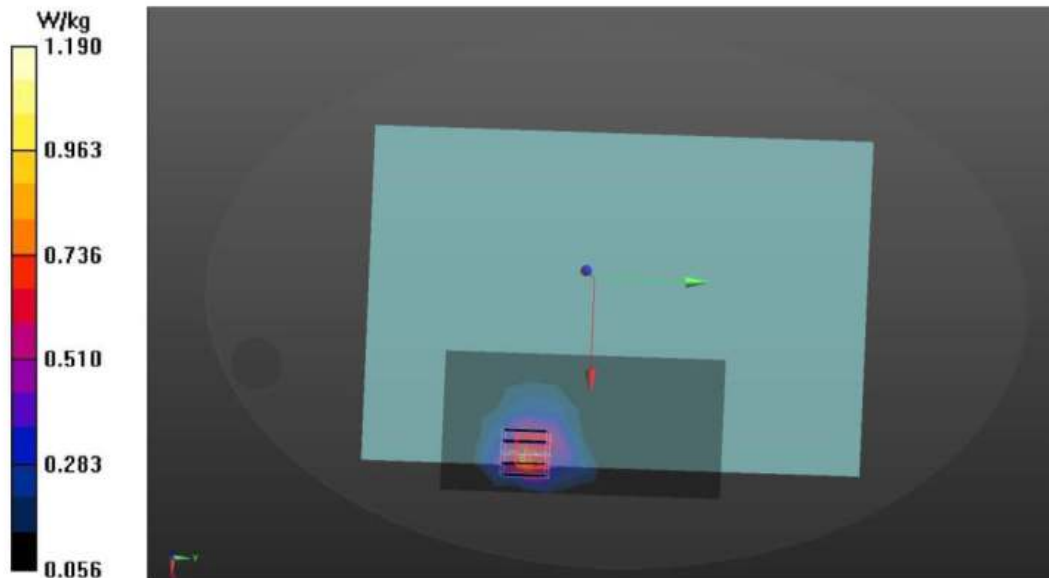

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P2 802.11b CH7 2442MHz Screen Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 38.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.850 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.413 V/m; Power Drift = -0.31 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 1.03 W/kg

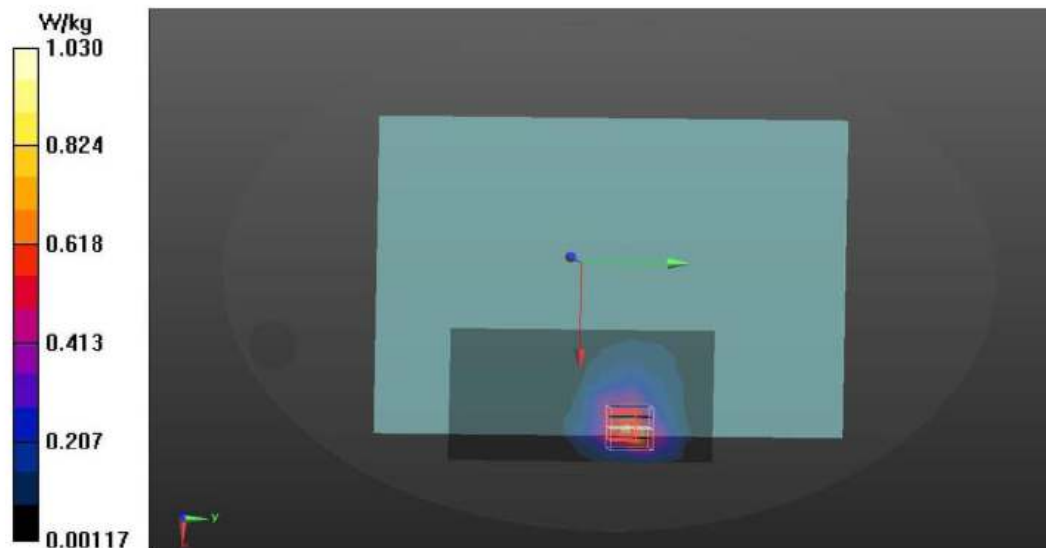



Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P4 802.11b CH7 2442MHz bottom Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 38.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (7x11x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.183 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.884 V/m; Power Drift = 0.52 dB


Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.0901 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 0.304 W/kg

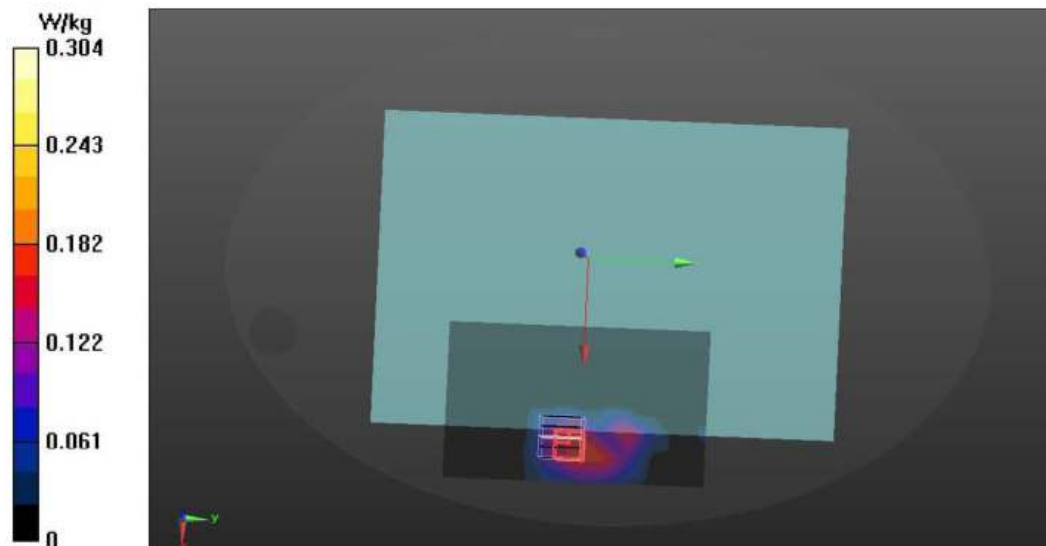

Date: 11/23/2022

Test Laboratory: Audix\_SAR Lab

**P18 802.11b CH1 2412MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  S/m;  $\epsilon_r = 38.696$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.834 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.401 V/m; Power Drift = -0.21 dB


Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.373 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.979 W/kg

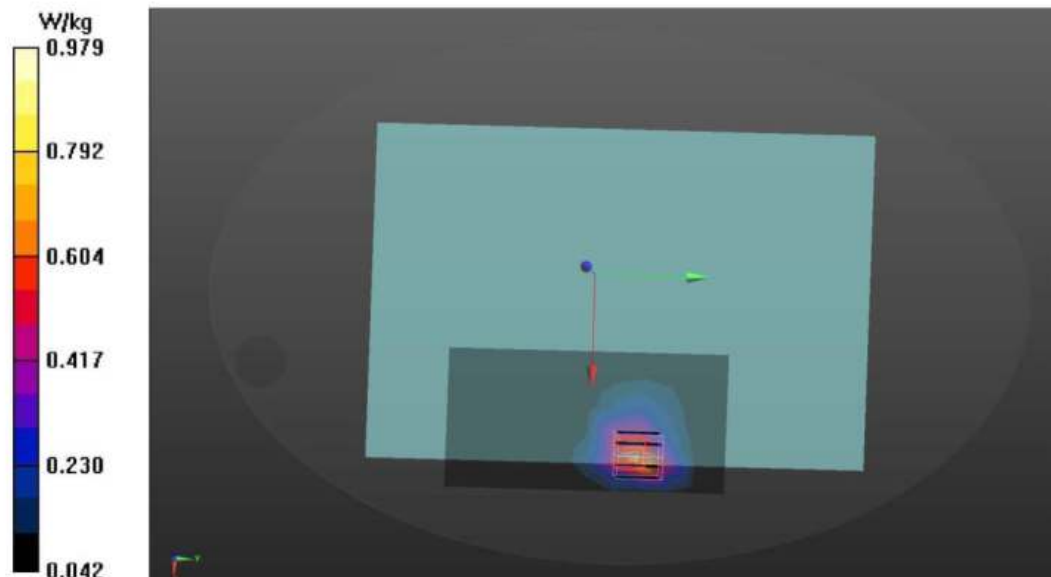

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P15 BT CH39 2441MHz Screen**

DUT: 16Z90R

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.751$  S/m;  $\epsilon_r = 38.952$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.0498 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.847 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.0569 W/kg; SAR(10 g) = 0.0289 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.0807 W/kg

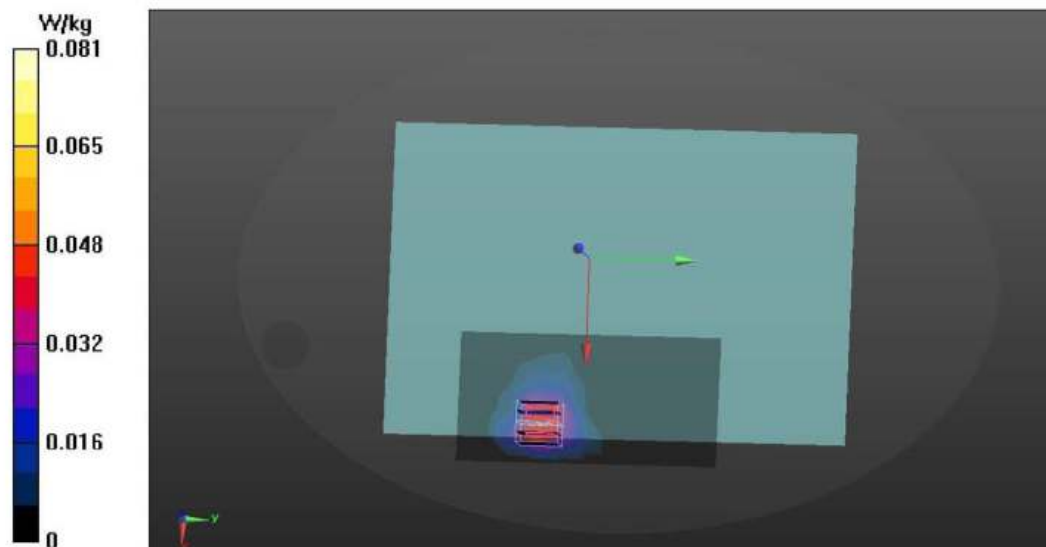

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P16 BT CH39 2441MHz Bottom**

DUT: 16Z90R

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.751 \text{ S/m}$ ;  $\epsilon_r = 38.952$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x6x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.0103 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 0.2259 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.0009 W/kg; SAR(10 g) = 0.0000928 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 0.0153 W/kg

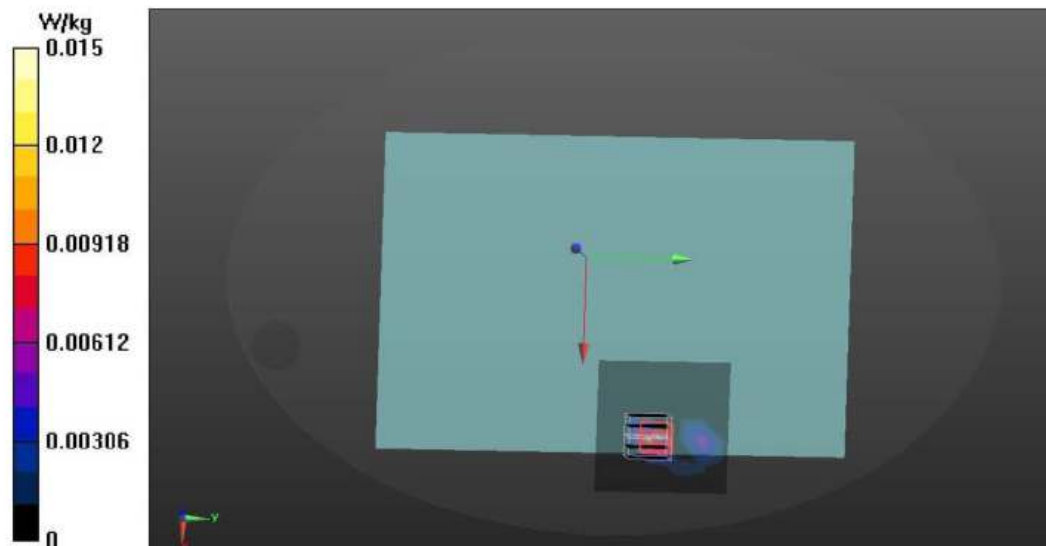



**WiFi 2.4G/ Bluetooth****Test SKU: SKU #1 (with LUXSHARE-ICT Antenna)**

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY Configuration:**

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 1.10 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.394 V/m; Power Drift = 1.17 dB


Peak SAR (extrapolated) = 2.24 W/kg

**SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.411 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.15 W/kg

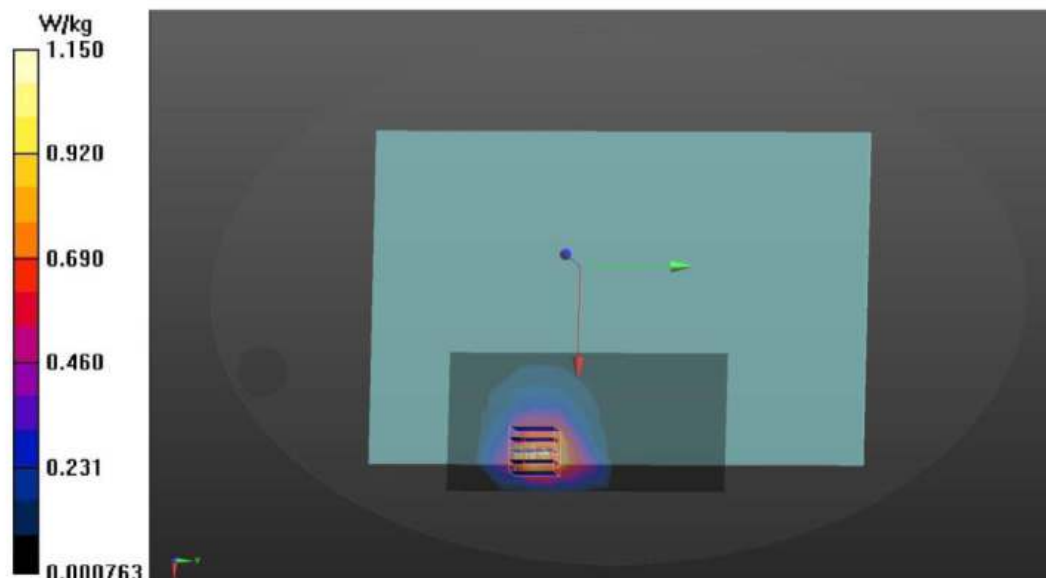

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P3 802.11b CH7 2442MHz Bottom Aux****DUT: 16Z90R**


Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 0.236 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 2.435 V/m; Power Drift = 0.45 dB  
Peak SAR (extrapolated) = 0.442 W/kg  
**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.0639 W/kg**  
Smallest distance from peaks to all points 3 dB below = 4.8 mm  
Ratio of SAR at M2 to SAR at M1 = 44.9%  
Maximum value of SAR (measured) = 0.228 W/kg

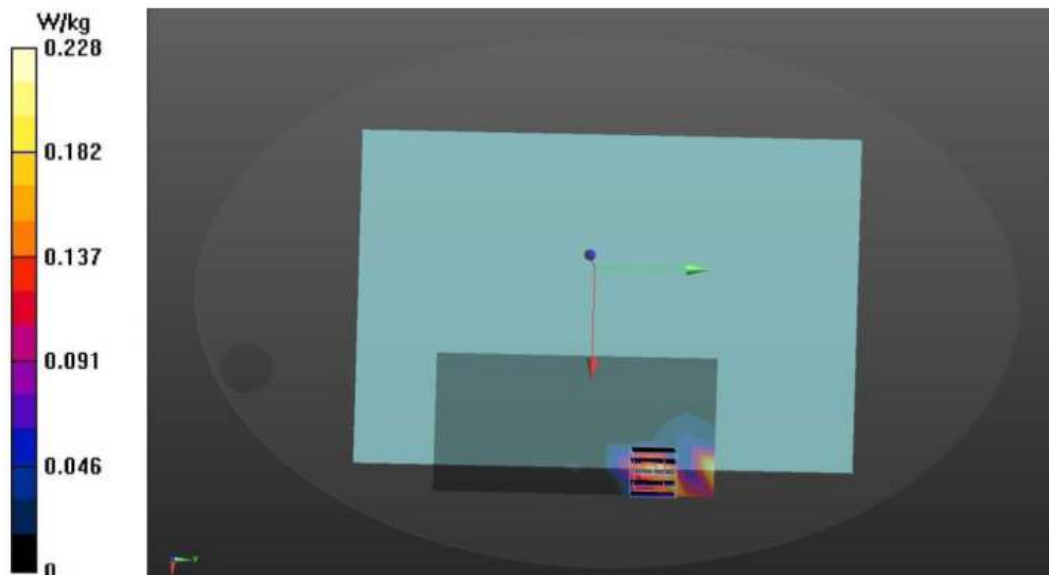

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P17 802.11b CH1 2412MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.735$  S/m;  $\epsilon_r = 39.029$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 1.06 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.833 V/m; Power Drift = 0.97 dB


Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.409 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.12 W/kg

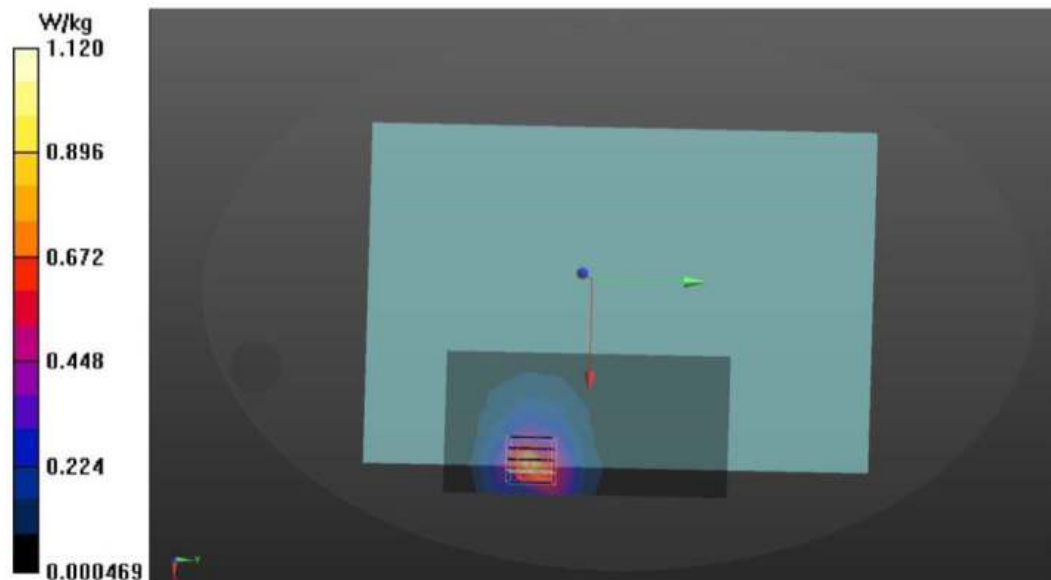

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P2 802.11b CH7 2442MHz Screen Main****DUT: 16Z90R**


Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 1.75 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 1.992 V/m; Power Drift = 0.64 dB  
Peak SAR (extrapolated) = 2.48 W/kg  
**SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.427 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8 mm  
Ratio of SAR at M2 to SAR at M1 = 56%  
Maximum value of SAR (measured) = 1.08 W/kg

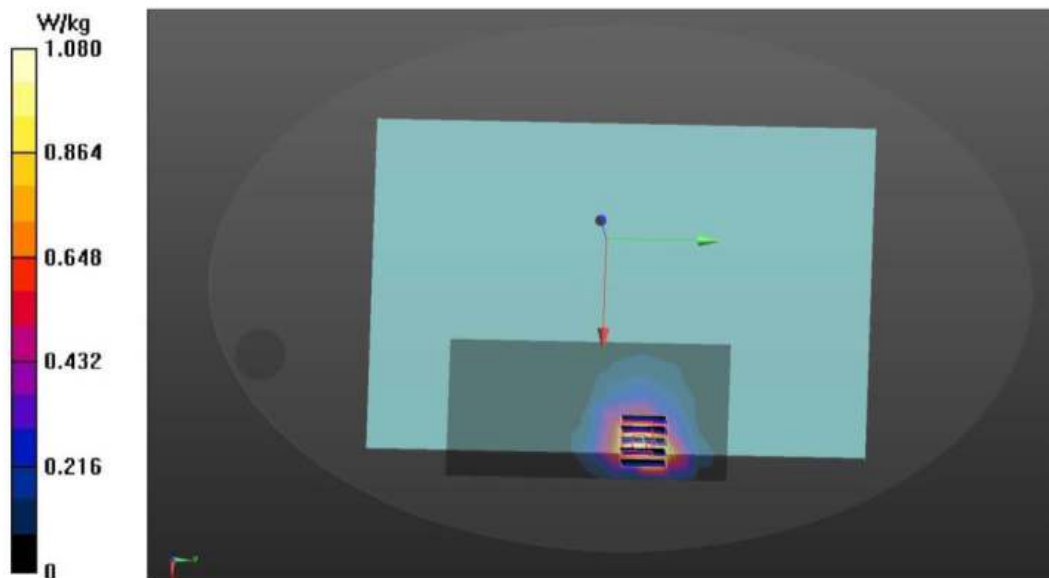



Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P4 802.11b CH7 2442MHz Bottom Main****DUT: 16Z90R**


Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 0.248 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 2.475 V/m; Power Drift = 0.57 dB  
Peak SAR (extrapolated) = 0.597 W/kg  
**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.0847 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8.6 mm  
Ratio of SAR at M2 to SAR at M1 = 49.4%  
Maximum value of SAR (measured) = 0.288 W/kg

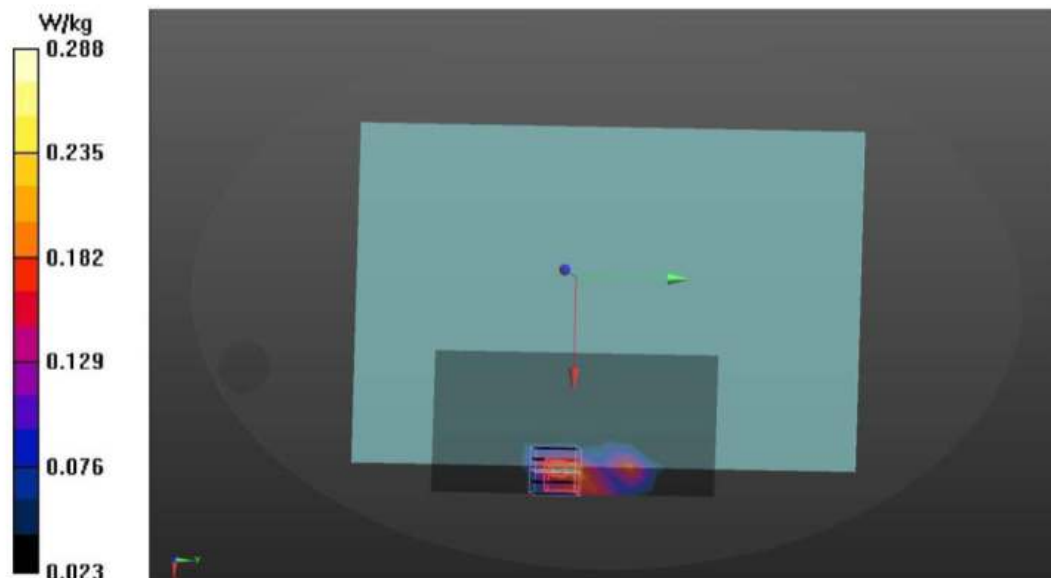

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P18 802.11b CH1 2412MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.735$  S/m;  $\epsilon_r = 39.029$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.981 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.859 V/m; Power Drift = 0.65 dB


Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.381 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.04 W/kg

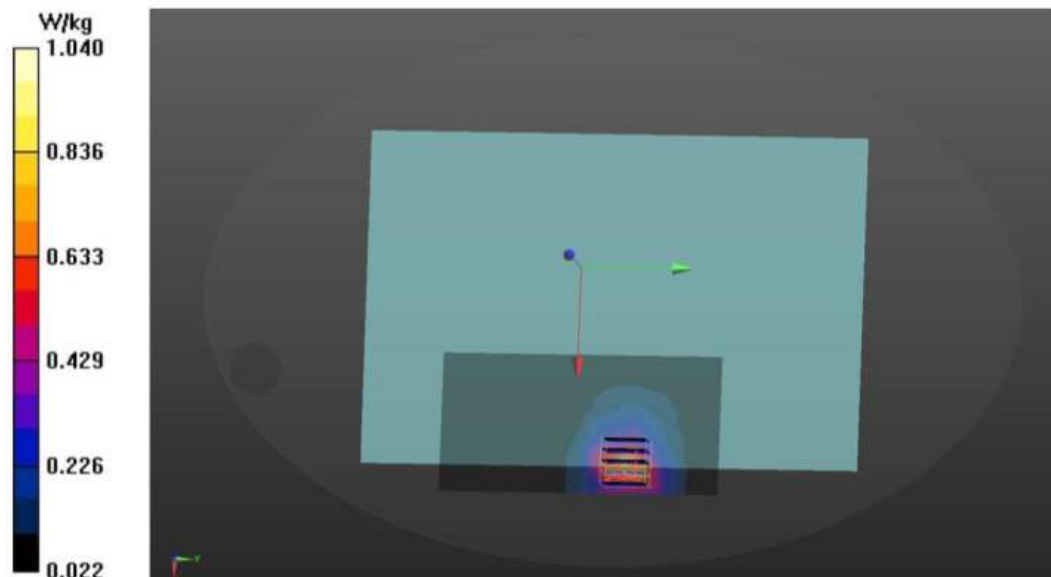

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P15 BT CH39 2441MHz Screen****DUT: 16Z90R**

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.803$  S/m;  $\epsilon_r = 38.907$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2480 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.0226 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 0.4269 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0501 W/kg

**SAR(1 g) = 0.0288 W/kg; SAR(10 g) = 0.0142 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.036 W/kg

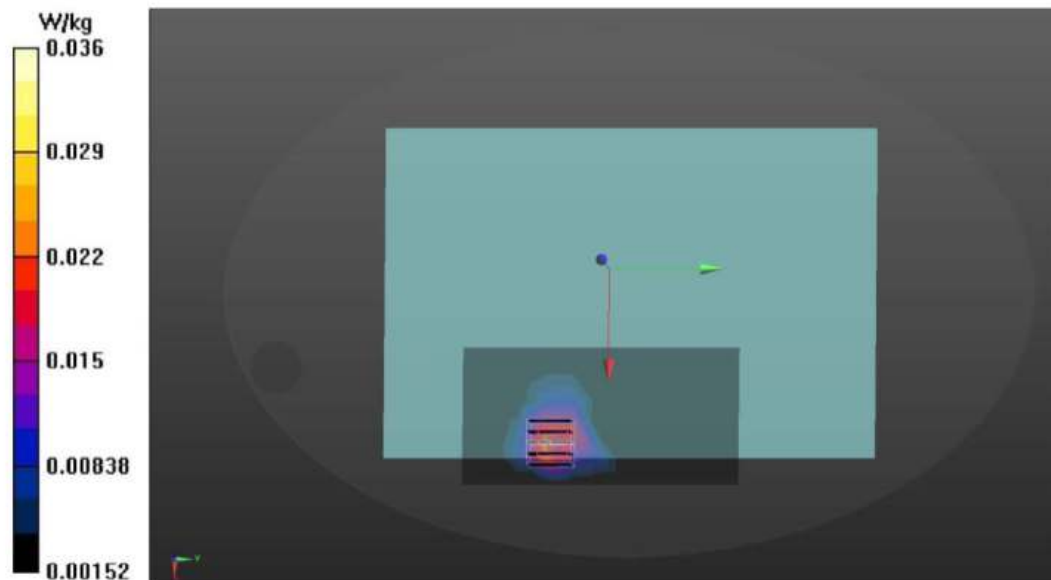

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P16 BT CH39 2441MHz Bottom****DUT: 16Z90R**


Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3  
Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.803$  S/m;  $\epsilon_r = 38.907$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2480 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x7x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 0.00987 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 0.1835 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.00113 W/kg  
**SAR(1 g) = 0.0000467 W/kg; SAR(10 g) = 0.00000423 W/kg**  
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 46.6%  
Maximum value of SAR (measured) = 0.00923 W/kg

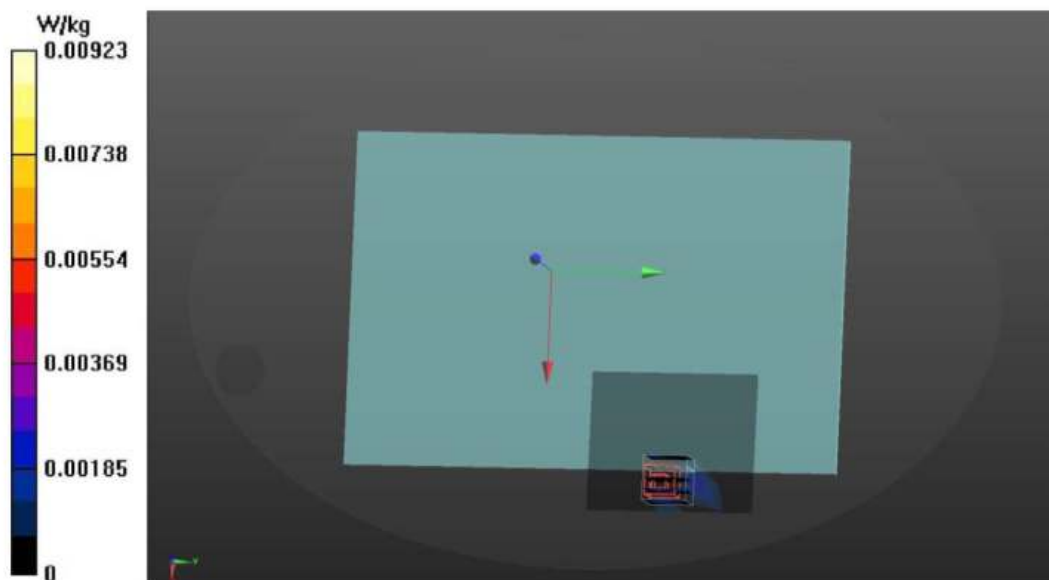



**WiFi 5G****Test SKU: SKU #1 (with INPAQ Antenna)**

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH36 5180MHz Screen Aux**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.699 \text{ S/m}$ ;  $\epsilon_r = 35.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.840 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 4.301 V/m; Power Drift = 1.02 dB


Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 1.31 W/kg

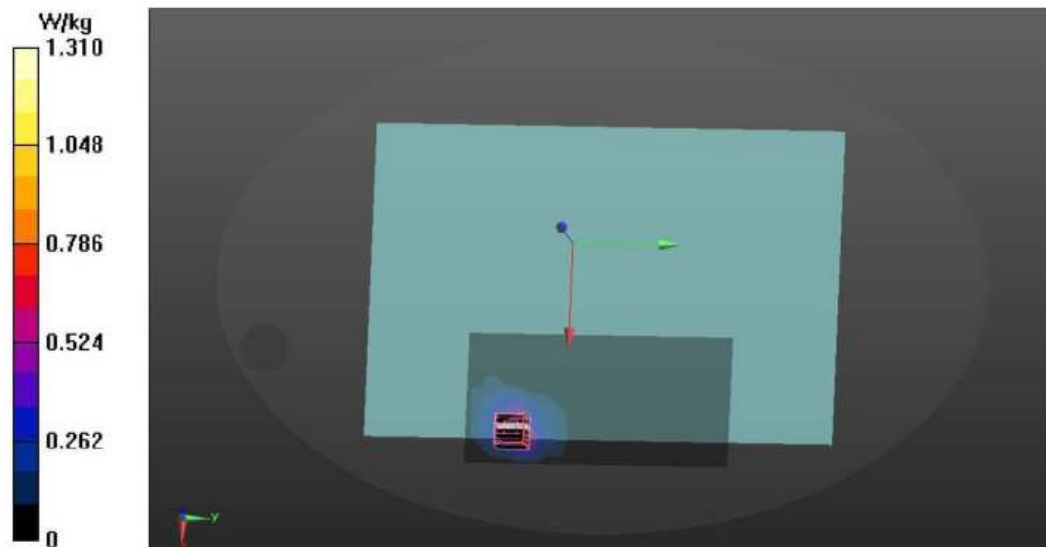

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P11 802.11a CH36 5180MHz Bottom Aux**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.699$  S/m;  $\epsilon_r = 35.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (13x23x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.182 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.924 V/m; Power Drift = 0.95 dB


Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.0498 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.300 W/kg

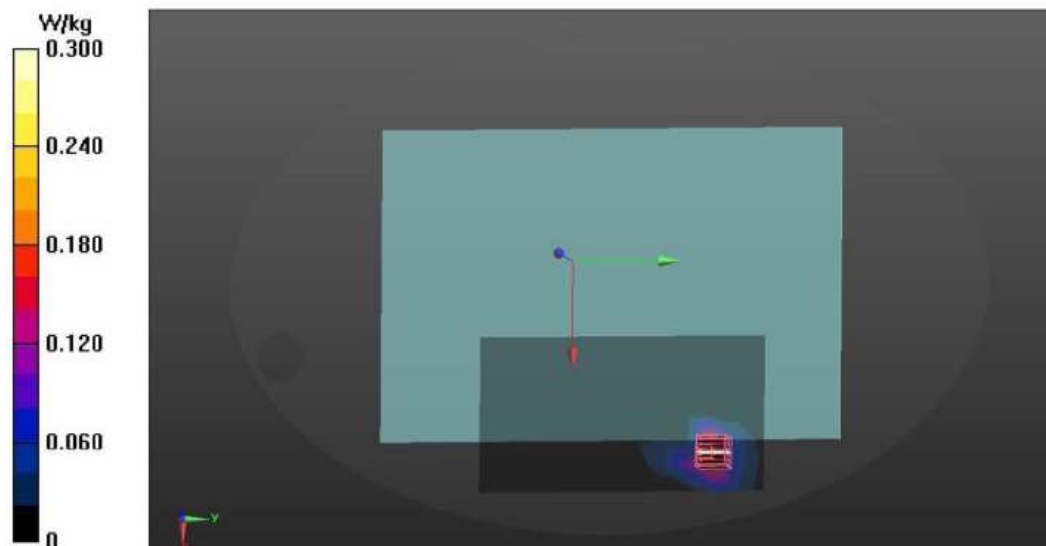

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH36 5180MHz Screen Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.699$  S/m;  $\epsilon_r = 35.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.450 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.557 V/m; Power Drift = 0.82 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.623 W/kg

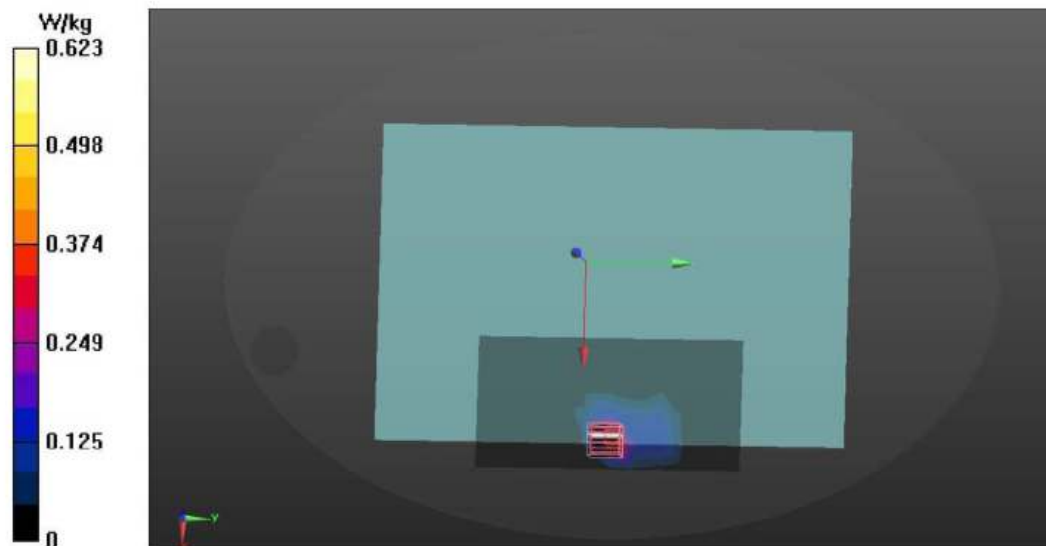

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P12 802.11a CH36 5180MHz Bottom Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.699$  S/m;  $\epsilon_r = 35.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (13x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.0490 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 1.504 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.0461 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.112 W/kg

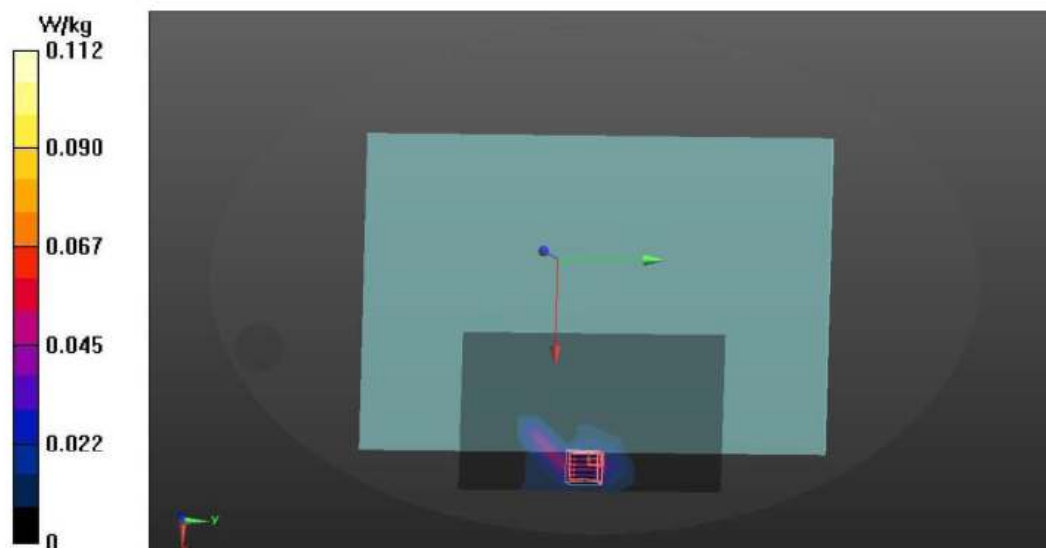



Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P7 802.11a CH100 5500MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.106$  S/m;  $\epsilon_r = 35.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.613 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.077 V/m; Power Drift = 0.64 dB


Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.127 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.767 W/kg

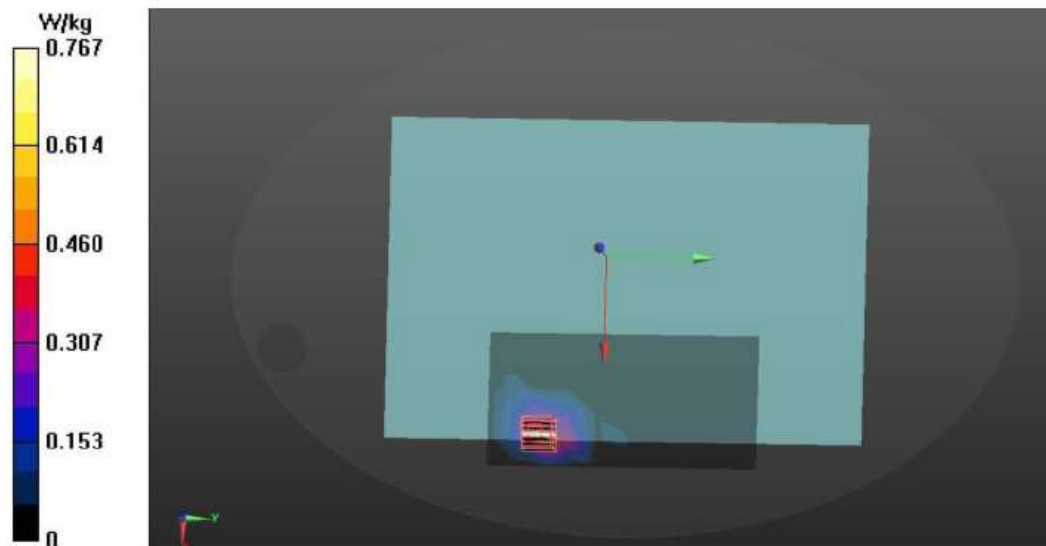

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P8 802.11a CH100 5500MHz Screen Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.106$  S/m;  $\epsilon_r = 35.267$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.734 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.012 V/m; Power Drift = 0.47 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.827 W/kg

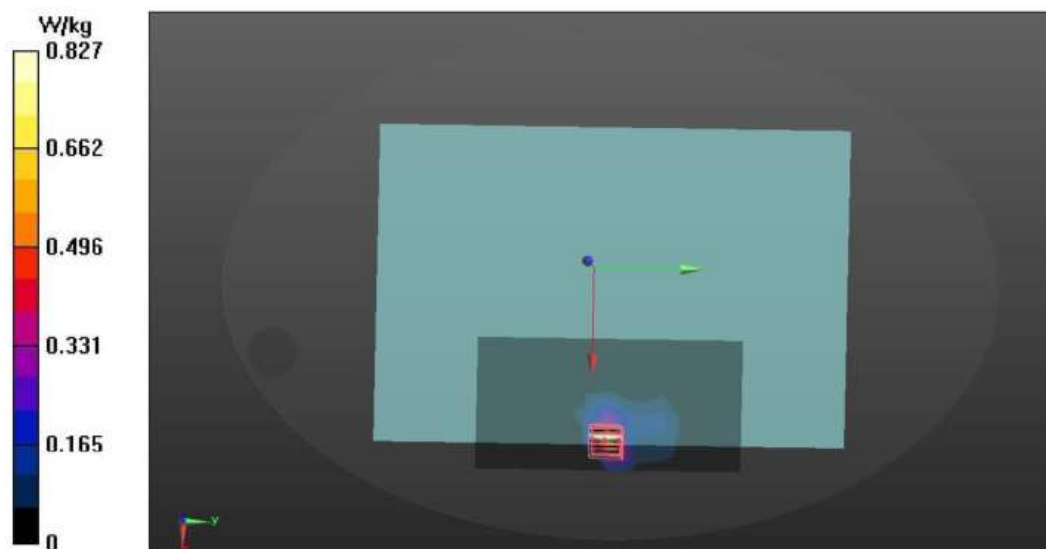

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P9 802.11a CH157 5785MHz Screen Aux****DUT: 16Z90R**


Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.472$  S/m;  $\epsilon_r = 34.644$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm  
Maximum value of SAR (measured) = 0.502 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm  
Reference Value = 2.907 V/m; Power Drift = 0.48 dB  
Peak SAR (extrapolated) = 1.66 W/kg  
SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.0908 W/kg  
Smallest distance from peaks to all points 3 dB below = 8 mm  
Ratio of SAR at M2 to SAR at M1 = 49%  
Maximum value of SAR (measured) = 0.746 W/kg

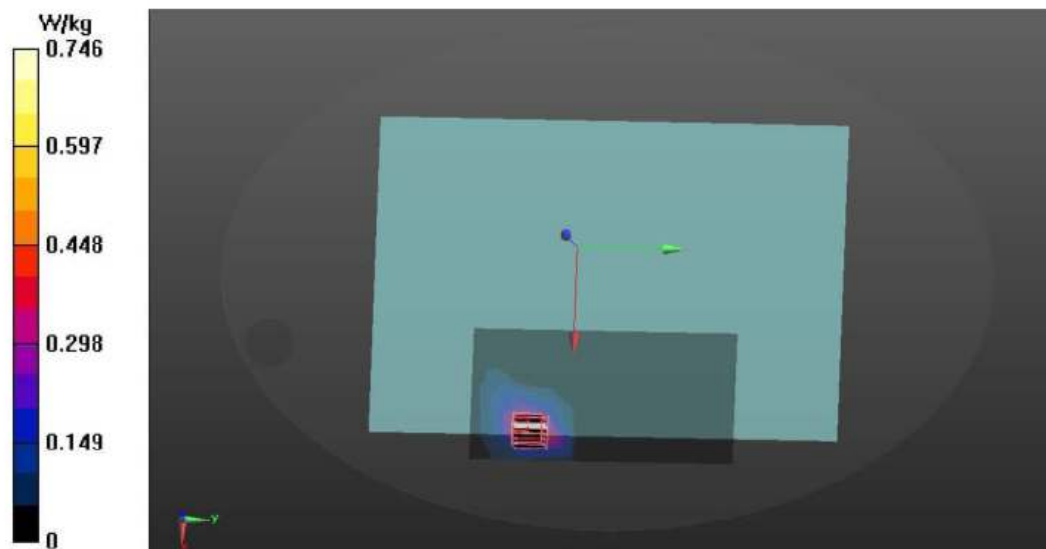

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P10 802.11a CH157 5785MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.472 \text{ S/m}$ ;  $\epsilon_r = 34.644$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.824 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.525 V/m; Power Drift = 0.71 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.915 W/kg

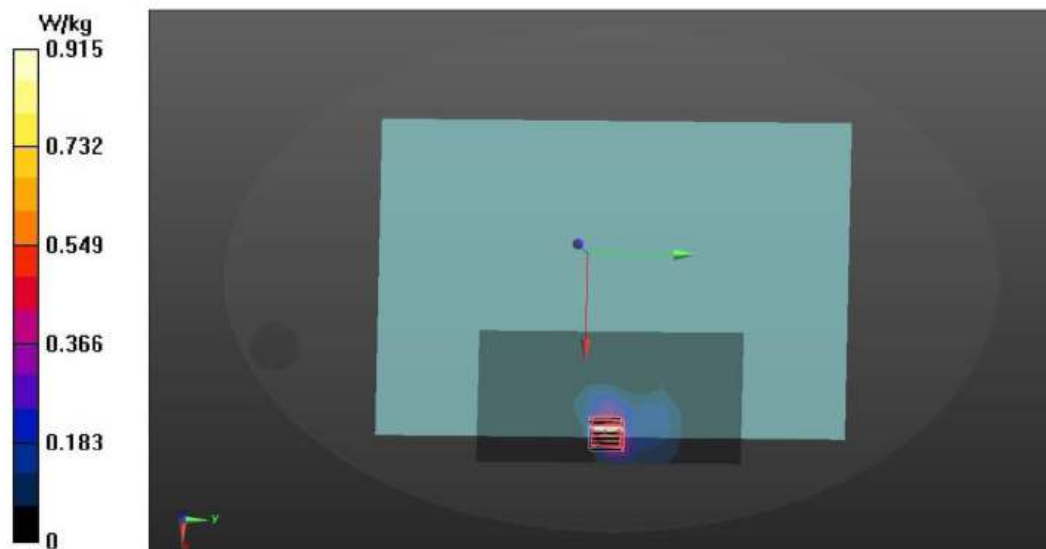

**WiFi 5G****Test SKU: SKU #1 (with LUXSHARE-ICT Antenna)**

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH36 5180MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 35.654$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.969 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.709 V/m; Power Drift = 0.41 dB


Peak SAR (extrapolated) = 2.74 W/kg

**SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.211 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.33 W/kg

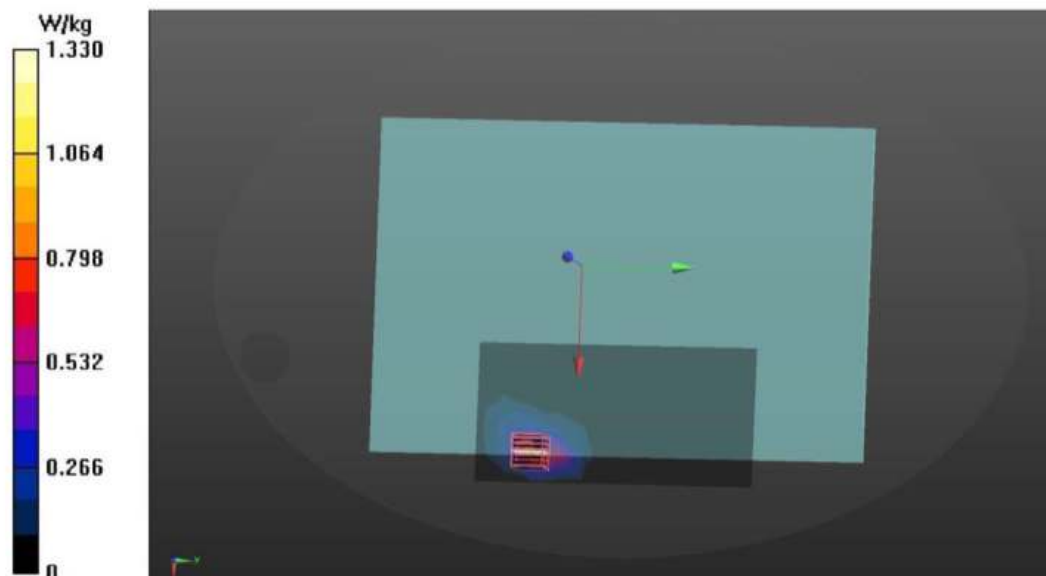



Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH36 5180MHz Screen Main****DUT: 16Z90R**


Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 35.654$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm  
Maximum value of SAR (measured) = 1.14 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm  
Reference Value = 4.238 V/m; Power Drift = 0.94 dB  
Peak SAR (extrapolated) = 2.74 W/kg  
**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.183 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.8 mm  
Ratio of SAR at M2 to SAR at M1 = 56.7%  
Maximum value of SAR (measured) = 1.39 W/kg

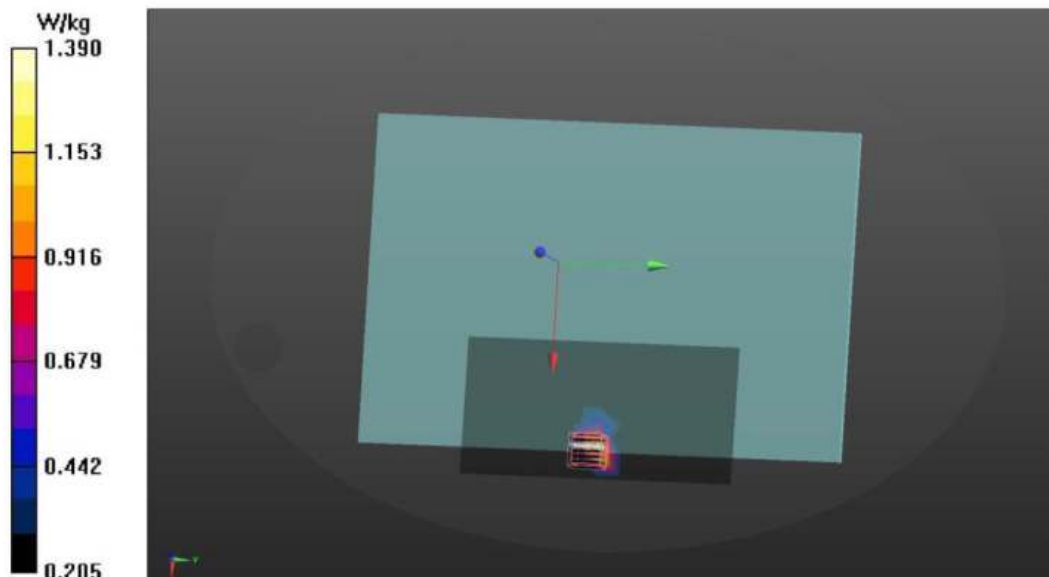

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P7 802.11a CH100 5500MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.075$  S/m;  $\epsilon_r = 34.983$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.12 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.835 V/m; Power Drift = 0.41 dB


Peak SAR (extrapolated) = 2.88 W/kg

**SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.206 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.37 W/kg

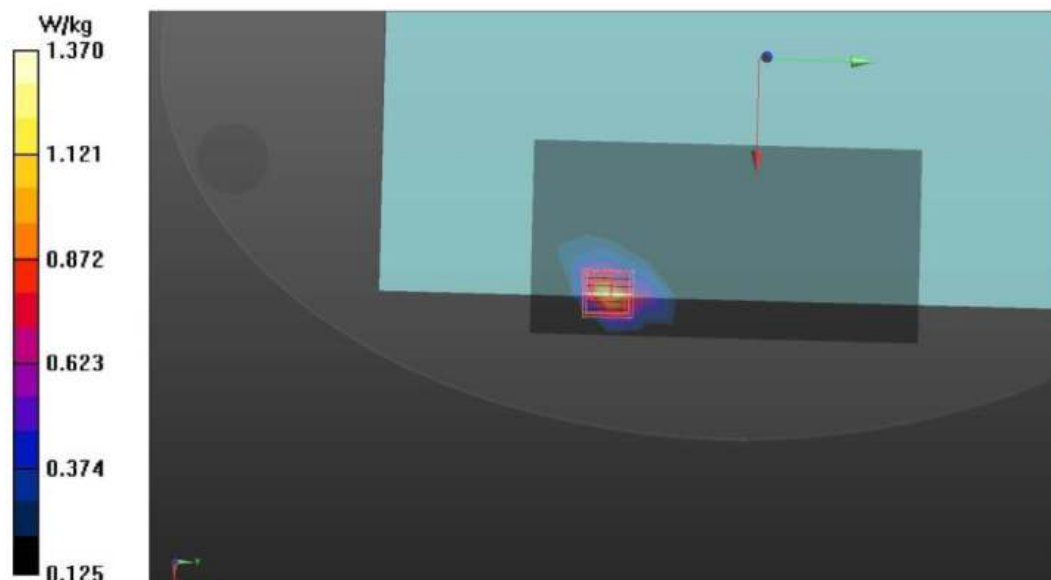

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P11 802.11a CH100 5500MHz Bottom Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.075$  S/m;  $\epsilon_r = 34.983$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (13x23x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.218 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 1.483 V/m; Power Drift = 0.23 dB


Peak SAR (extrapolated) = 0.641 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.0655 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.323 W/kg

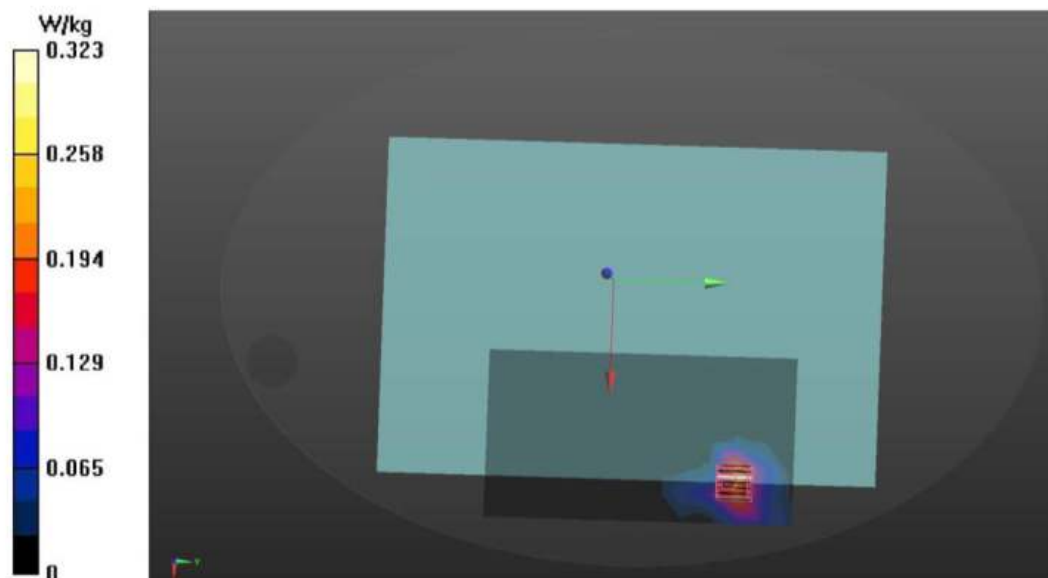

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P8 802.11a CH100 5500MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.075$  S/m;  $\epsilon_r = 34.983$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.724 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.122 V/m; Power Drift = 0.83 dB


Peak SAR (extrapolated) = 4.06 W/kg

**SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.138 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.928 W/kg

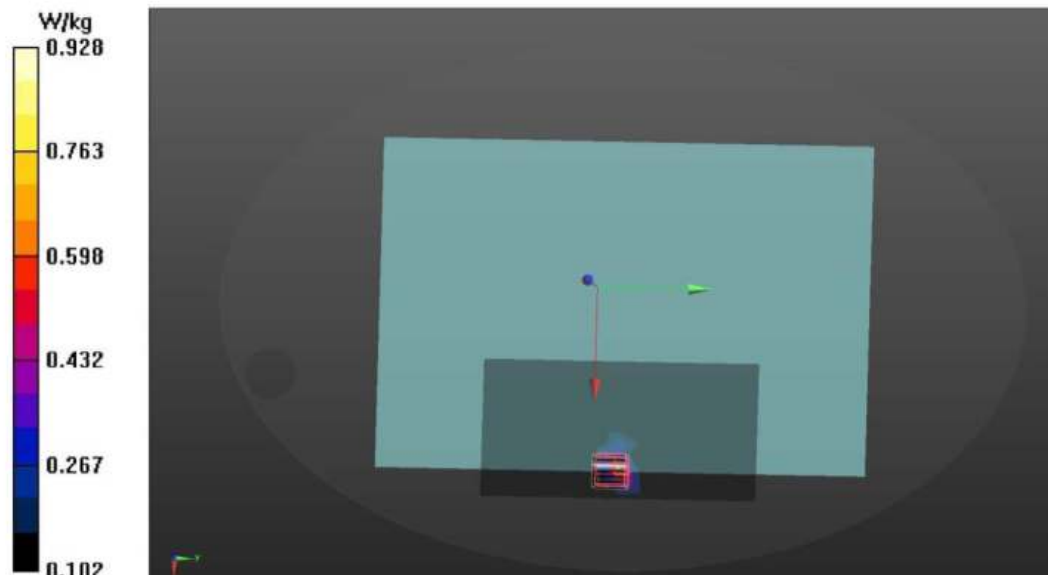

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P12 802.11a CH100 5500MHz Bottom Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.075$  S/m;  $\epsilon_r = 34.983$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (13x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.185 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 2.079 V/m; Power Drift = 0.42 dB


Peak SAR (extrapolated) = 0.384 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.0341 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.227 W/kg

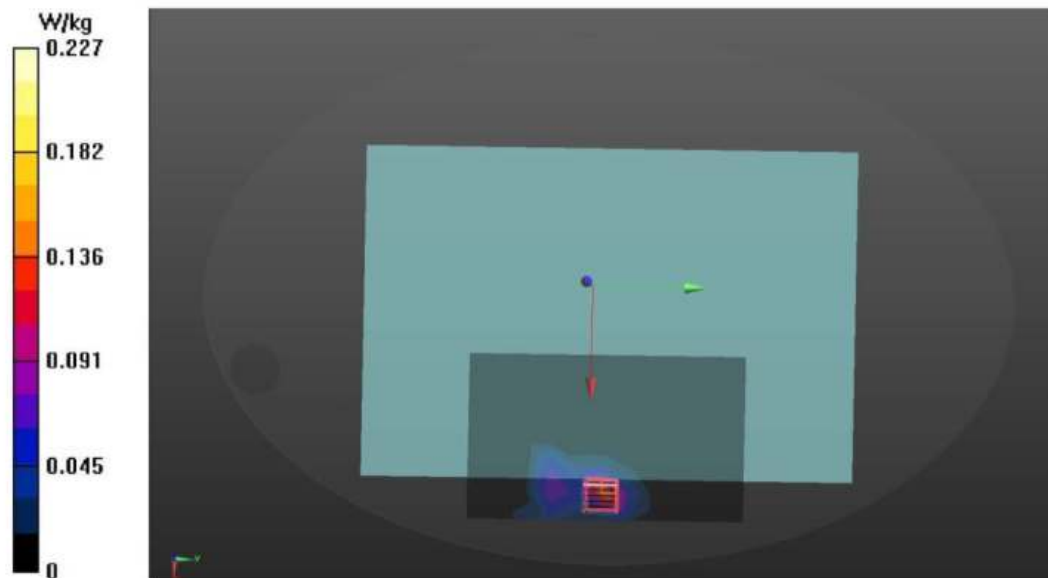



Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P9 802.11a CH157 5785MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.439 \text{ S/m}$ ;  $\epsilon_r = 34.366$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.964 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.624 V/m; Power Drift = 0.85 dB


Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.248 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.07 W/kg

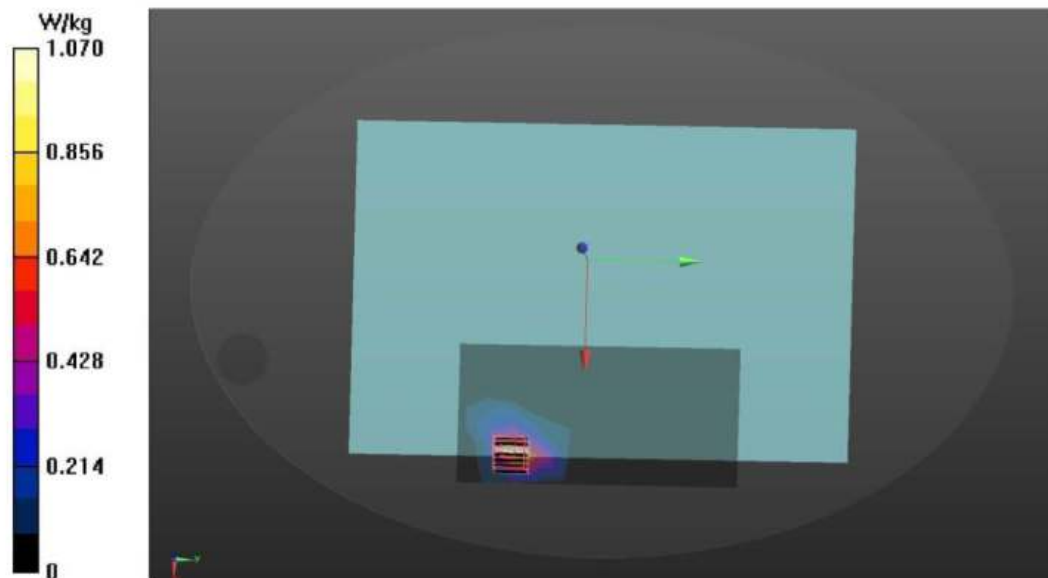

Date: 12/6/2022

Test Laboratory: Audix\_SAR Lab

**P10 802.11a CH157 5785MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.439 \text{ S/m}$ ;  $\epsilon_r = 34.366$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.8, 4.8, 4.8) @ 5785 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.489 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 3.855 V/m; Power Drift = 0.37 dB


Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.0942 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.726 W/kg

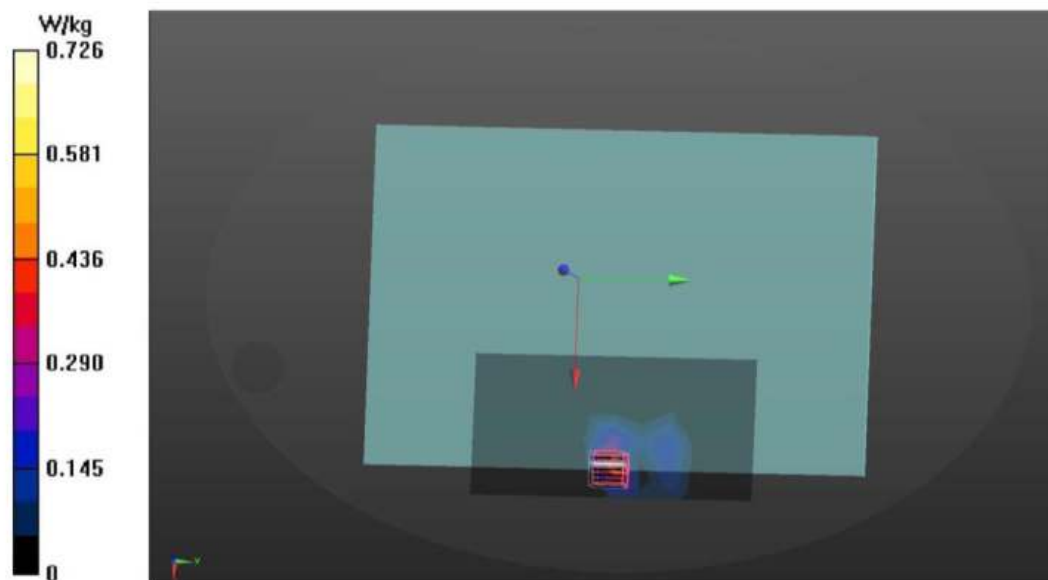

**Worst Case For SAR measurement**  
**Test SKU: SKU #2 (with INPAQ Antenna)**

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.732 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.041 V/m; Power Drift = 0.92 dB


Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.417 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.34 W/kg

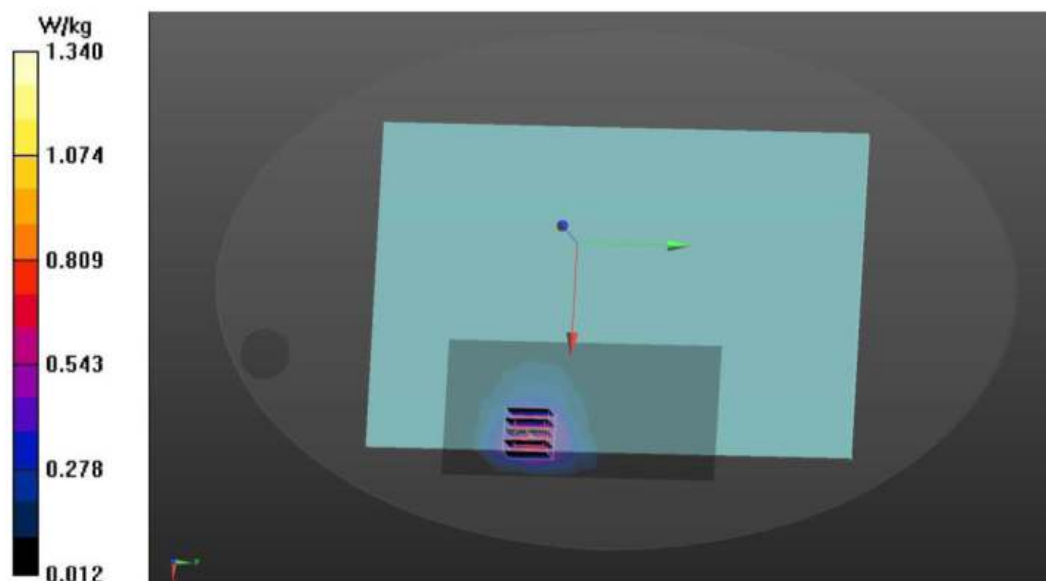

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P2 802.11b CH7 2442MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.767 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.844 V/m; Power Drift = -1.01 dB


Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.362 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.24 W/kg

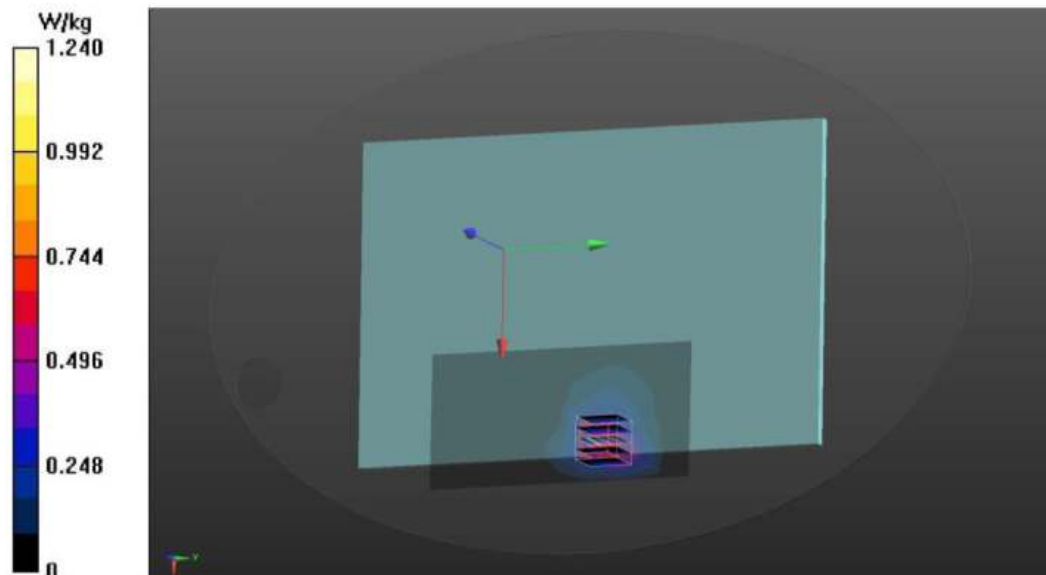

Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P5 802.11a CH36 5180MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.699 \text{ S/m}$ ;  $\epsilon_r = 35.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 0.836 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 1.520 V/m; Power Drift = 0.27 dB


Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.188 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.27 W/kg

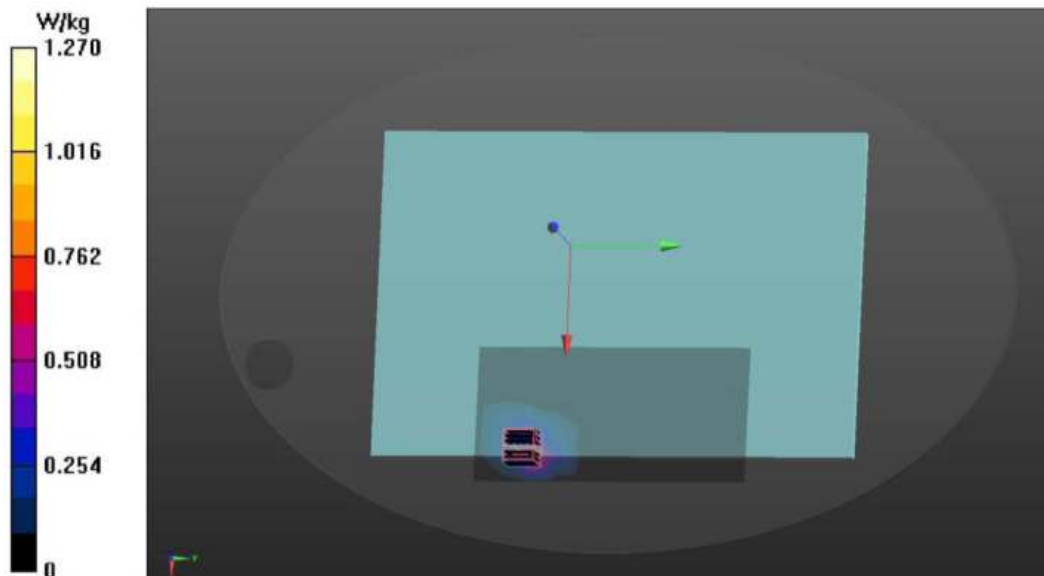



Date: 10/14/2022

Test Laboratory: Audix\_SAR Lab

**P6 802.11a CH36 5180MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.699$  S/m;  $\epsilon_r = 35.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.352 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 0.5603 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.078 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.629 W/kg

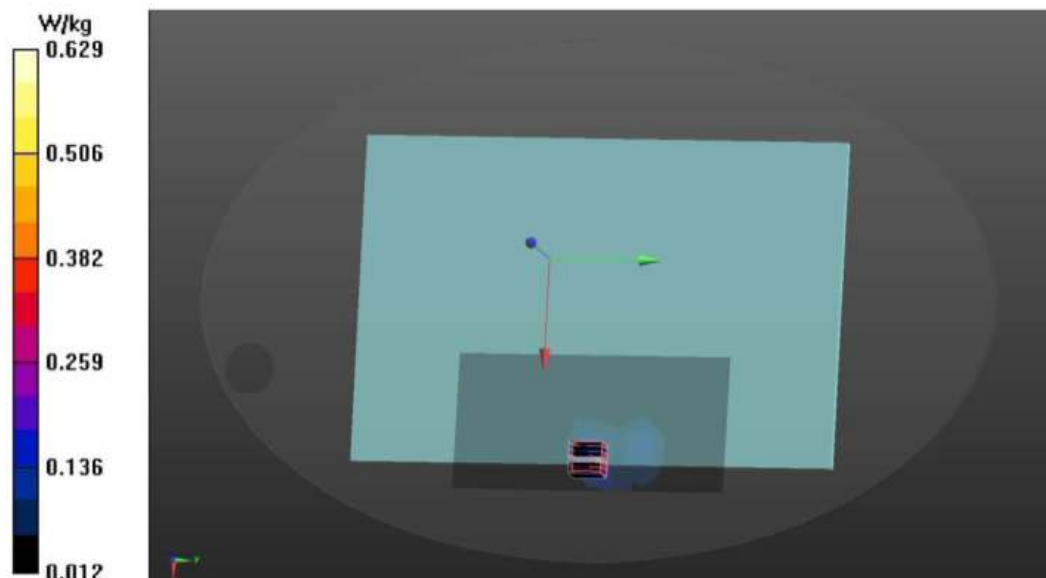

**Test SKU: SKU #2 (with LUXSHARE-ICT Antenna)**

Date: 10/19/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.756$  S/m;  $\epsilon_r = 37.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 1.03 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.350 V/m; Power Drift = -1.19 dB


Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.406 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.11 W/kg

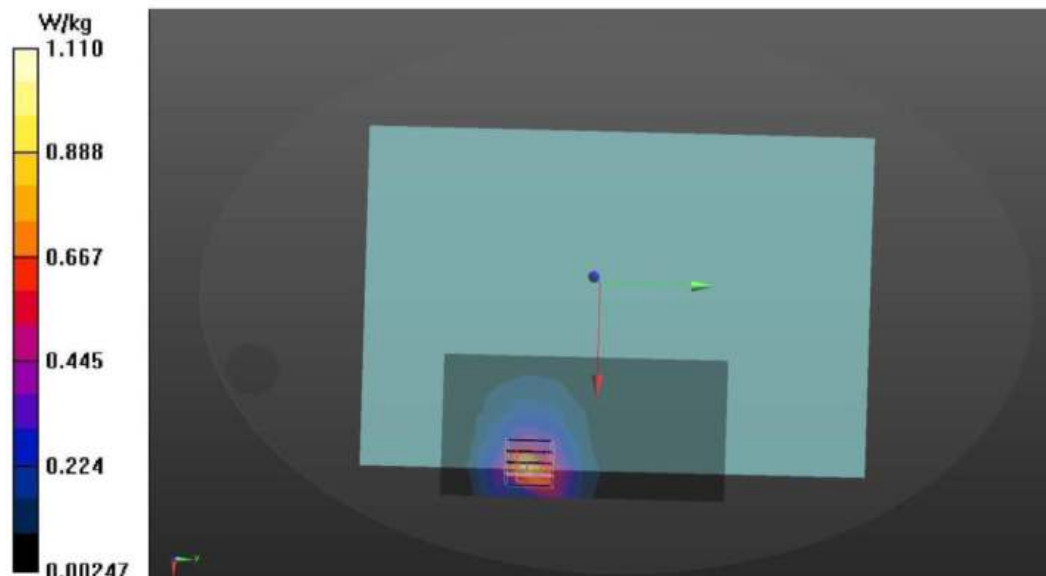

Date: 10/19/2022

Test Laboratory: Audix\_SAR Lab

**P2 802.11b CH7 2442MHz Screen Main****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.756$  S/m;  $\epsilon_r = 37.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.915 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.418 V/m; Power Drift = 0.50 dB


Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.386 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.11 W/kg

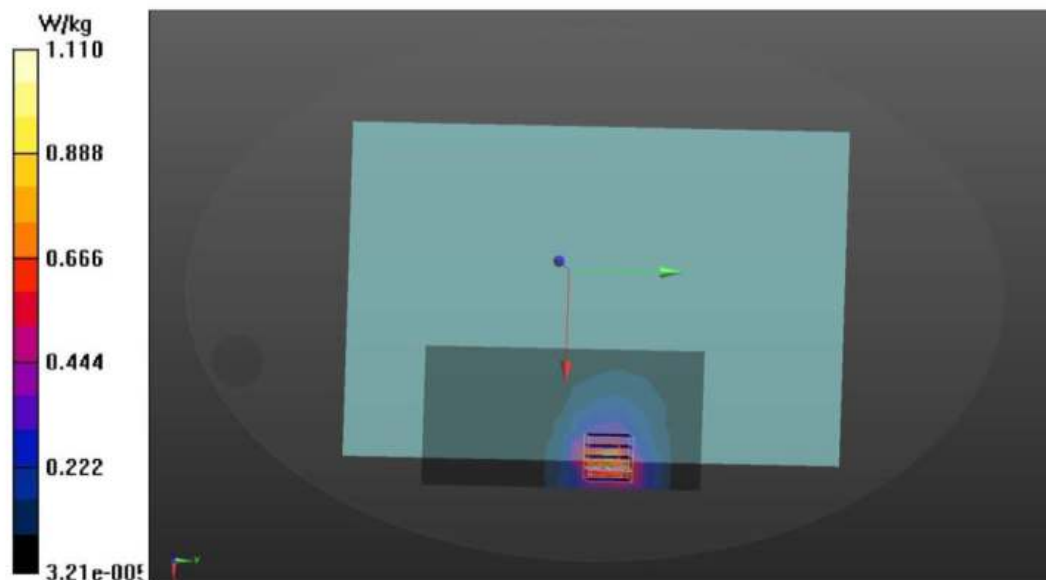

Date: 10/18/2022

Test Laboratory: Audix\_SAR Lab

**P7 802.11a CH100 5500MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.128$  S/m;  $\epsilon_r = 36.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 1.19 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 3.183 V/m; Power Drift = 0.46 dB


Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.45 W/kg

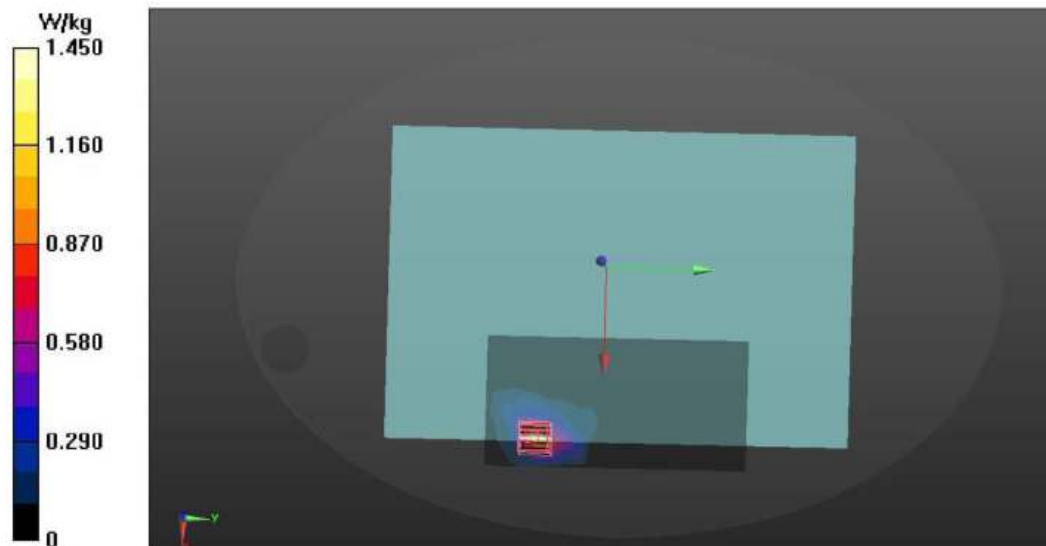

Date: 10/18/2022

Test Laboratory: Audix\_SAR Lab

**P8 802.11a CH100 5500MHz Screen Main**

DUT: 16Z90R

Communication System: UID 0, WIFI 5G 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.128$  S/m;  $\epsilon_r = 36.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.87, 4.87, 4.87) @ 5500 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (11x21x1):** Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 0.701 W/kg

**Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 4.205 V/m; Power Drift = 0.83 dB


Peak SAR (extrapolated) = 4.03 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.858 W/kg

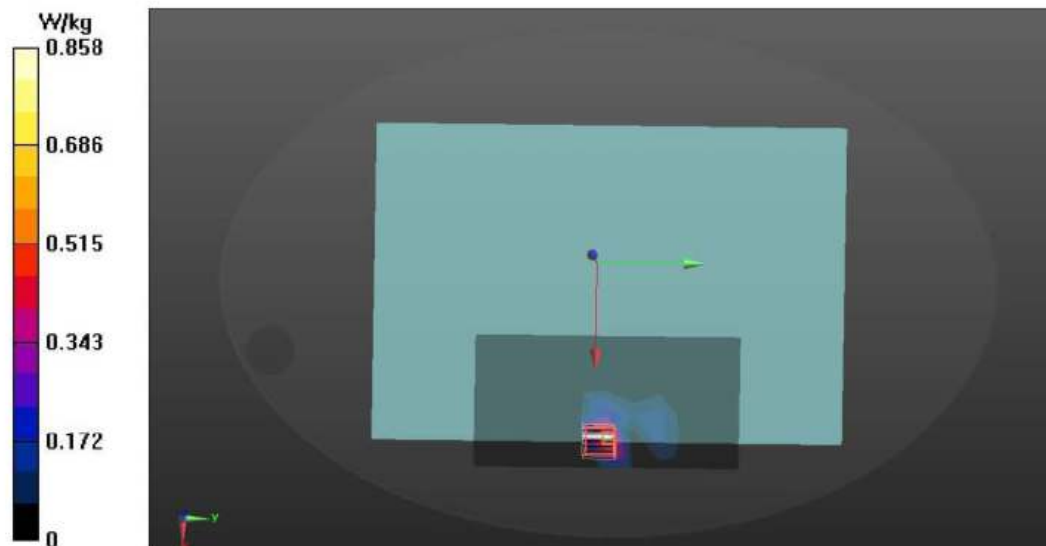



**Repeated SAR measurement**

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 38.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.754 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 1.048 V/m; Power Drift = 0.99 dB


Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.434 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 1.21 W/kg

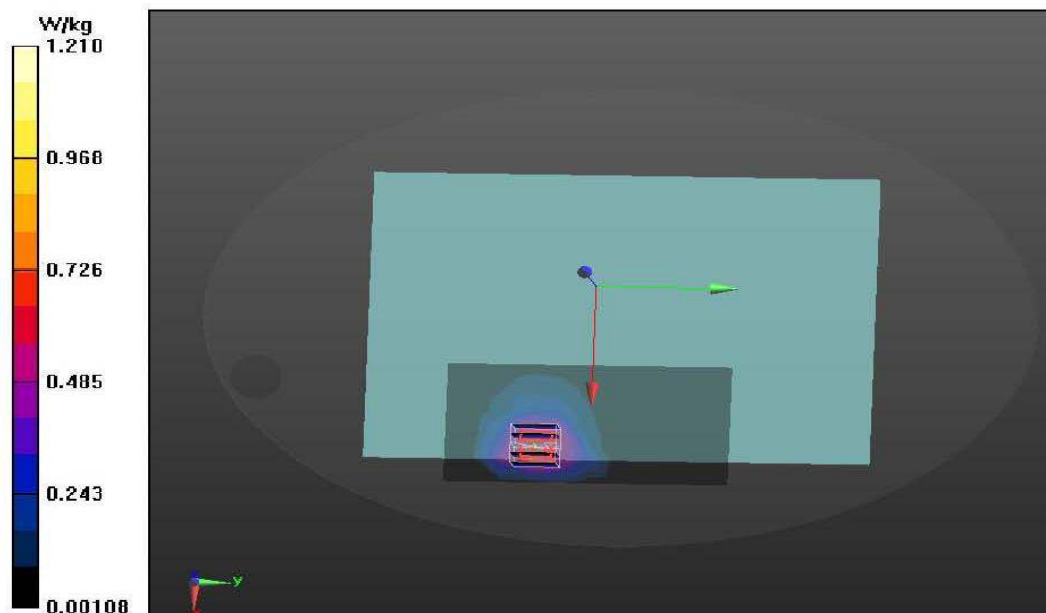

Date: 11/23/2022

Test Laboratory: Audix\_SAR Lab

**P17 802.11b CH1 2412MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  S/m;  $\epsilon_r = 38.696$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.883 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.676 V/m; Power Drift = -1.05 dB


Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.418 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 1.26 W/kg

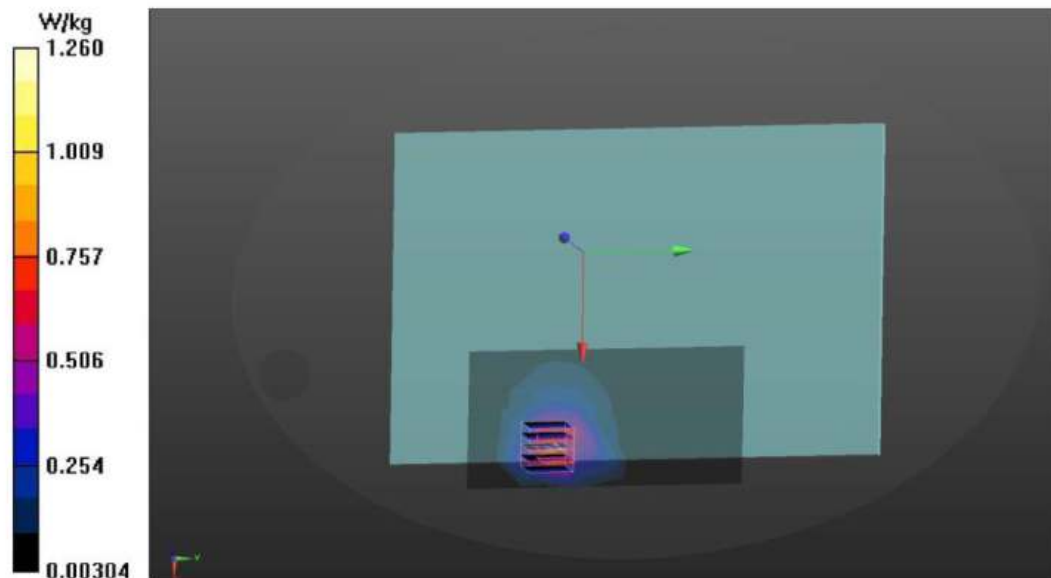

Date: 12/5/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 38.949$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$ 

Maximum value of SAR (measured) = 0.895 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 2.394 V/m; Power Drift = 1.17 dB


Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.403 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.07 W/kg

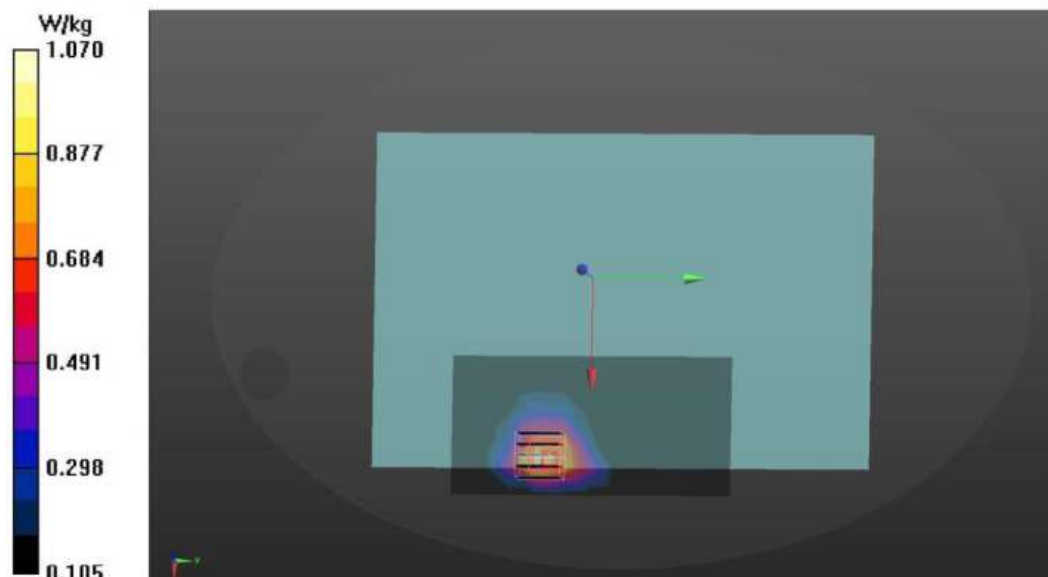

Date: 10/16/2022

Test Laboratory: Audix\_SAR Lab

**P101 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.752$  S/m;  $\epsilon_r = 38.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

## DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 0.774 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.144 V/m; Power Drift = -1.28 dB


Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.434 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.36 W/kg

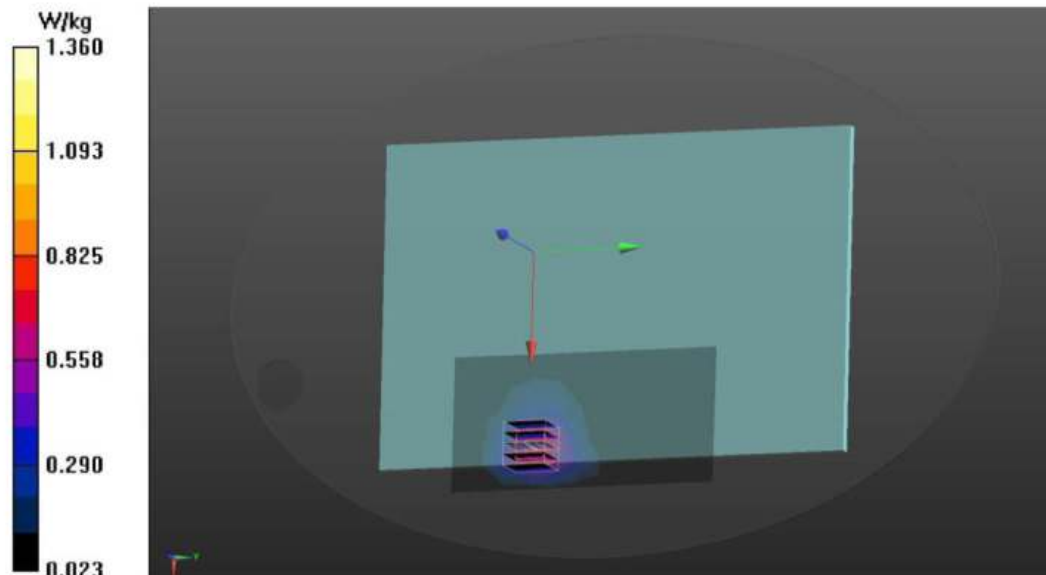

Date: 10/19/2022

Test Laboratory: Audix\_SAR Lab

**P1 802.11b CH7 2442MHz Screen Aux****DUT: 16Z90R**

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.756$  S/m;  $\epsilon_r = 37.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.69, 7.69, 7.69) @ 2442 MHz; Calibrated: 9/27/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 3/29/2022
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1170
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Area Scan (6x11x1):** Measurement grid:  $dx=20$ mm,  $dy=20$ mm

Maximum value of SAR (measured) = 1.17 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.657 V/m; Power Drift = 0.56 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.477 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 1.29 W/kg

