



TEST REPORT

Product Name : Double 108 Mbps Wireless USB 2.0 Adapter WG111U
Model Number : WG111U
Brand Name : NETGEAR
FCC ID : PY3WG111U

Applicant : Netgear Incorporated
Address : 4500 Great America Parkway Santa Clara,
CA95054 U.S.A

Received Date : November 15, 2004
Tested Date : November 15 ~ December 14, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as seperately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 2 of 84

Test Report Certification

Product Name : Double 108 Mbps Wireless USB 2.0 Adapter WG111U
Model Number : WG111U
Brand Name : NETGEAR
FCC ID : PY3WG111U
Applicant : Netgear Incorporated

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart E (2004)
ANSI C63.4 (2003)

Tested By : Alan Fan, **Date** : December 16, 2004

Approved By : Chieh-De Tsai, **Date** : December 16, 2004
(Chieh-De Tsai, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement.....	5
1.2 General Description of EUT & Power.....	5
1.3 Tested Channel	6
1.4 Description of Peripherals.....	6
1.5 EUT & Peripherals Setup Diagram.....	7
1.6 EUT Operating Procedure.....	8
1.7 Description of Laboratory	8
1.8 SUMMARY of RESULTS	9
2. CONDUCTED POWERLINE TEST	10
2.1 Test Equipments	10
2.2 Test Setup	10
2.3 Conducted Power Line Emission Limit	11
2.4 Test Procedure	11
2.5 Uncertainty of Conducted Emission	11
2.6 Conducted RF Voltage Measurement	12-13
2.7 Photos of Conduction Test.....	14
3. RADIATED EMISSION TEST	15
3.1 Test Equipments	15
3.2 Test Setup	16
3.3 Radiation Limit	17
3.4 Test Procedures.....	18
3.5 Uncertainty of Radiated Emission	18
3.6 Radiated RF Noise Measurement	19
3.6.1 Spurious Emission Below 1GHz.....	19
3.6.2 Spurious Emission Outside of the 5.15 ~ 5.35GHz Band (TX).....	20-33
3.6.3 Radiated Bandedge Emission of 5.15 ~ 5.35GHz Band	34
3.6.4 Photo of Bandedge Measurement	35-38
3.6.5 Spurious Emission Outside of the 5.15 ~ 5.35GHz Band (RX)	39-52
3.7 Photos of Open Site	53-55
4. EMISSION BANDWIDTH MEASUREMENT	56
4.1 Test Equipments	56
4.2 Test Setup	56
4.3 Test Procedure	56
4.4 Uncertainty of Conducted Emission	56
4.5 Test Results.....	57
4.6 Photo of 26db Bandwidth Measurement.....	58-61



TABLE OF CONTENTS

TITLE	PAGE NO.
5. PEAK CONDUCTED TRANSMIT POWER	62
5.1 Test Equipments	62
5.2 Test Setup	62
5.3 Limits of Maximum Peak Output Power	63
5.4 Test Procedure	63
5.5 Uncertainty of Conducted Emission	63
5.6 Test Results	64
5.7 Photo of Peak Conducted Transmit Power Measurement	65-68
6. PEAK POWER DENSITY MEASUREMENT	69
6.1 Test Equipments	69
6.2 Test Setup	69
6.3 Limits of Power Spectral Density Measurement	69
6.4 Test Procedure	70
6.5 Uncertainty of Conducted Emission	70
6.6 Test Results	70
6.7 Photo of Peak Power Density Measurement	71-74
7. PEAK POWER EXCURSION MEASUREMENT	75
7.1 Test Equipments	75
7.2 Test Setup	75
7.3 Limits of Band Edge Emissions Measurement	75
7.4 Test Procedure	75
7.5 Uncertainty of Conducted Emission	76
7.6 Test Results	76
7.7 Photo of Peak Power Excursion Measurement	77-80
8. REQUIREMENT STABILITY	81
8.1 Standard Applicable	81
8.2 Test Setup	81
8.3 Limits of Out of Band Emissions Measurement	81
8.4 Test Procedure	82
8.5 Uncertainty of Conducted Emission	82
8.6 Test Results	83
9. ANTENNA REQUIREMENT	84
9.1 Standard Applicable	84
9.2 Antenna Connected Construction	84



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U
Model Number	WG111U
Operating Frequency	◆IEEE 802.11a USA(FCC) : 5.15GHz ~ 5.25GHz ; 5.25GHz ~ 5.35GHz; 5.725GHz ~ 5.825GHz ; 5.825GHz ~ 5.850GHz ◆IEEE 802.11b/g ISM Band USA(FCC) : 2.412GHz ~ 2.462GHz (CH1 ~ CH11)
Channel Number	11 channel for 802.11b/g 8 channel for 802.11a
Channel Spacing	20MHz
Modulation	◆IEEE 802.11a (OFDM) : 48/54 Mbps (QAM-64), 24/36 Mbps (QAM-64), 12/18 Mbps (QPSK), 6/9 Mbps (BPSK) ◆IEEE 802.11g (OFDM / DSSS) : 48/54 Mbps (QAM-64), 24/36 Mbps (QAM-16), 12/18 Mbps (QPSK) , 6/9 Mbps (BPSK) , 5.5/11 Mbps (CCK) , 2 Mbps (DQPSK) , 1 Mbps (DBPSK) ◆IEEE 802.11b (DSSS) : 5.5/11 Mbps (CCK) , 2 Mbps (DQPSK), 1 Mbps (DBPSK)
Advanced Mode	Super A/G mode
Frequency Selection	BY SOFTWARE
Antenna Type	Patch Antenna Antenna Gain : 3.73dBi at 5GHz, -0.09dBi at 2.4GHz
Power Source	5VDC (From USB interface of Notebook)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 6 of 84

1.3 Tested Channel

The following channel were evaluated in this test report.

5.15~5.35GHz

For normal 802.11a mode

Channel	Carrier center frequency fc (MHz)
1	5180
2	5200
3	5220
4	5240
5	5260
6	5280
7	5300
8	5320

For Super A mode

Channel	Carrier center frequency fc (MHz)
Low	5210
-----	5230
Middle	5250
-----	5270
High	5290

1.4 Description of Peripherals

(1) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KSQZM0W4 1YR
FCC : DOC
INPUT POWER : 18.5VDC,65W,3.5A
POWER CORD : Unshielded, Detachable, 1.8m

Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009L
SERIAL NUMBER : 4809673805
INPUT POWER : 100-240VAC 50/60Hz,1.6A
OUTPUT POWER : 18.5VDC, 65W, 3.5A



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 7 of 84

(2) Printer

MANUFACTURER : HP CORP.
MODEL NUMBER : C6431D
SERIAL NUMBER : CN19T6S011
FCC ID : DOC
POWER SOURCE : 100-240VAC,50/60Hz,0.7A
SIGNAL CABLE : Shielded , Undetachable , 1.8m


(3) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y31KSQZD1TJ 1YR
FCC : DOC
INPUT POWER : 18.5VDC,65W,3.5A
POWER CORD : Unshielded, Detachable, 1.8m

Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009L
SERIAL NUMBER : 4809672405
INPUT POWER : 100-240VAC 50/60Hz,1.6A
OUTPUT POWER : 18.5VDC, 65W, 3.5A

1.5 EUT & Peripherals Setup Diagram

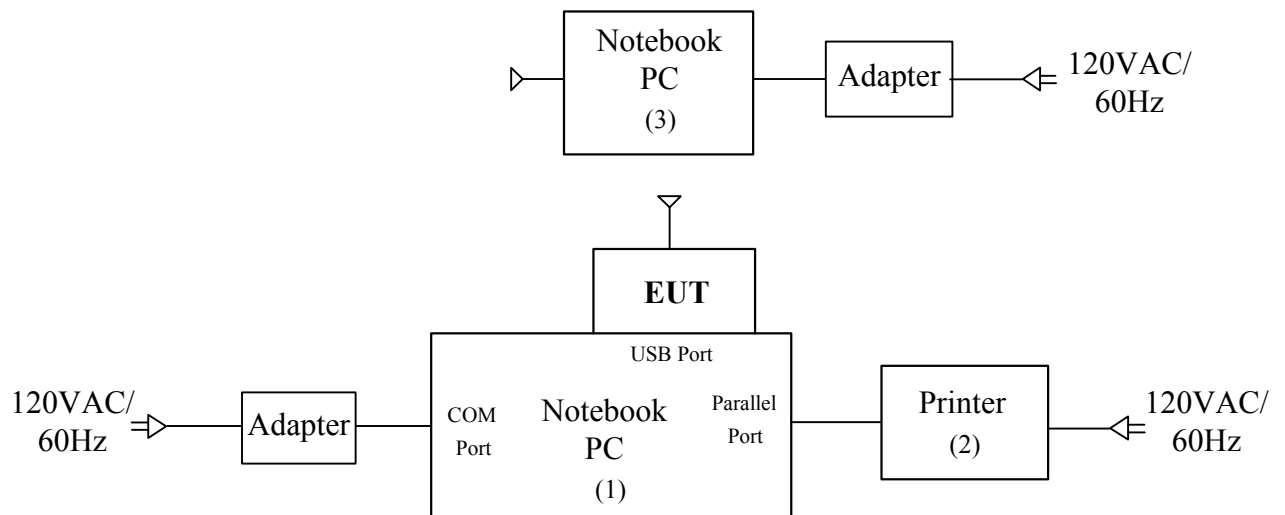

The indicated numbers (1)(2).....please refer to item 1.3



1.6 EUT Operating Procedure

1. Set up all computers like the setup diagram.
2. The “**Atheros Radio Test <ART> Revision 4.8 BUILD #16**” software was used for testing.

(1) TX Mode :

- ⇒ **Tx Data Rate:54Mbps** (802.11a Mode)
- ⇒ **Toggle output mode = TX100**
- ⇒ **Target Power:** 802.11a Mode Channel 1 (5180MHz) = **11.5**
802.11a Mode Channel 4 (5240MHz) = **12.5**
802.11a Mode Channel 5 (5260MHz) = **12.5**
802.11a Mode Channel 8 (5320MHz) = **13.0**
- ⇒ **“ b “ => Toggle turbo mode**
- ⇒ **Target Power:** SuperA Turbo Mode Channel Low (5210MHz) = **11.0**
SuperA Turbo Mode Channel Middle (5250MHz) = **10.5**
SuperA Turbo Mode Channel High (5290MHz) = **11.5**

(2) RX Mode :

- ⇒ **Continuous RF <R>eceive mode**

3. Notebook PC (1) ping 192.168.1.10 -t -l 5000 to EUT
4. Notebook PC (4) ping 192.168.1.20 -t -l 5000 to Notebook PC(1)
5. All of the function are under run.
6. Start test.

1.7 Description of Laboratory

SITE DESCRIPTION

	FCC Certificate NO.	: 90585
	BSMI Certificate NO.	: SL2-IN-E-0002
	NVLAP Lab Code	: 200118-0
	CNLA Certificate NO.	: CNLA-ZL97018E
	VCCI Certificate NO.	: R-1189, C-1250
	TÜV Rheinland Certificate NO.	: 10008375
NAME OF SITE	: Ecom Sertech Corp. Hsin-Chu Lab. (Spin-off from ITRI / ERSO on Apr. 01, 2003)	
SITE LOCATION	: Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.	

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 9 of 84

1.8 SUMMARY of RESULTS

The items of compliance are listed below. The complete data can be found in the Tests data Sheets submitted with this report.

General requirements for all bands			
Standard Section	Test Item	Result	Comments
15.407(a)(6)	Peak Excursion Ratio	Complied	< 13dB
15.407(c)	Automatic Discontinuation of Operation in the absence of information to transmit	Complied	Operation is discontinued in the absence of information to transmit, refer to the "Theory of Operations" for a detailed explanation
15.407(g)	Frequency Stability	Complied	Frequency stability is +/- 20ppm
15.207 15.407(b)(6)	Conducted AC power Line	Complied	See test results

Operation in the 5.15-5.25GHz Band			
Standard Section	Test Item	Result	Comments
15.407 (e)	Indoor operation only	Complied	Refer to user's manual
15.407 (a) (1)	26dB Bandwidth	N/A	See test results
15.407 (a) (1)	Output Power	Complied	See test results
15.407 (a) (1)	Power Spectral Density	Complied	See test results
15.407 (b) (6) 15.209	Spurious Emissions below 1GHz	Complied	See test results
15.407 (b) (1)	Spurious Emissions above 1GHz	Complied	See test results

Operation in the 5.25-5.35GHz Band			
Standard Section	Test Item	Result	Comments
15.407 (d)	Maximum Antenna Gain/ Antenna Type	Complied	Antenna Gain = <u>3.73dBi at 5GHz</u> The antenna is <u>Patch type</u>
15.407(a) (2)	Bandwidth	N/A	See test results
15.407(a) (2)	Output Power	Complied	See test results
15.407(a) (2)	Power Spectral Density	Complied	See test results
15.407(b) (6) 15.209	Spurious Emissions below 1GHz	Complied	See test results
15.407(b) (2)	Spurious Emissions above 1GHz	Complied	See test results



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 10 of 84


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8594E	3801A05627	April 26, 2004	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance May 18, 2004 For Insertion loss	1 Year	FINAL
R & S TEST RECEIVER	ESHS 30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

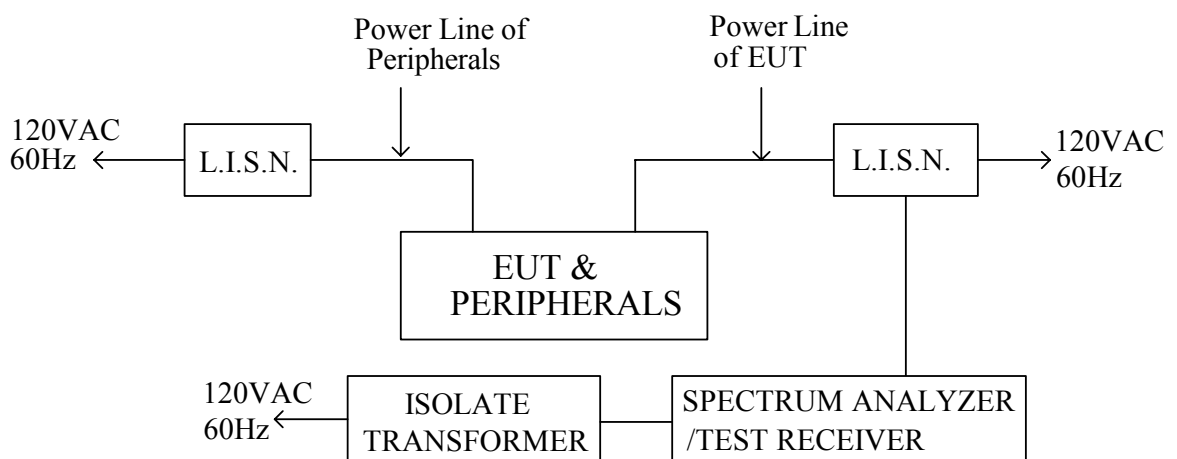



2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 12 of 84

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Netgear Incorporated	Test Date	2004/11/22
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	20.3°C, 79%

LINE

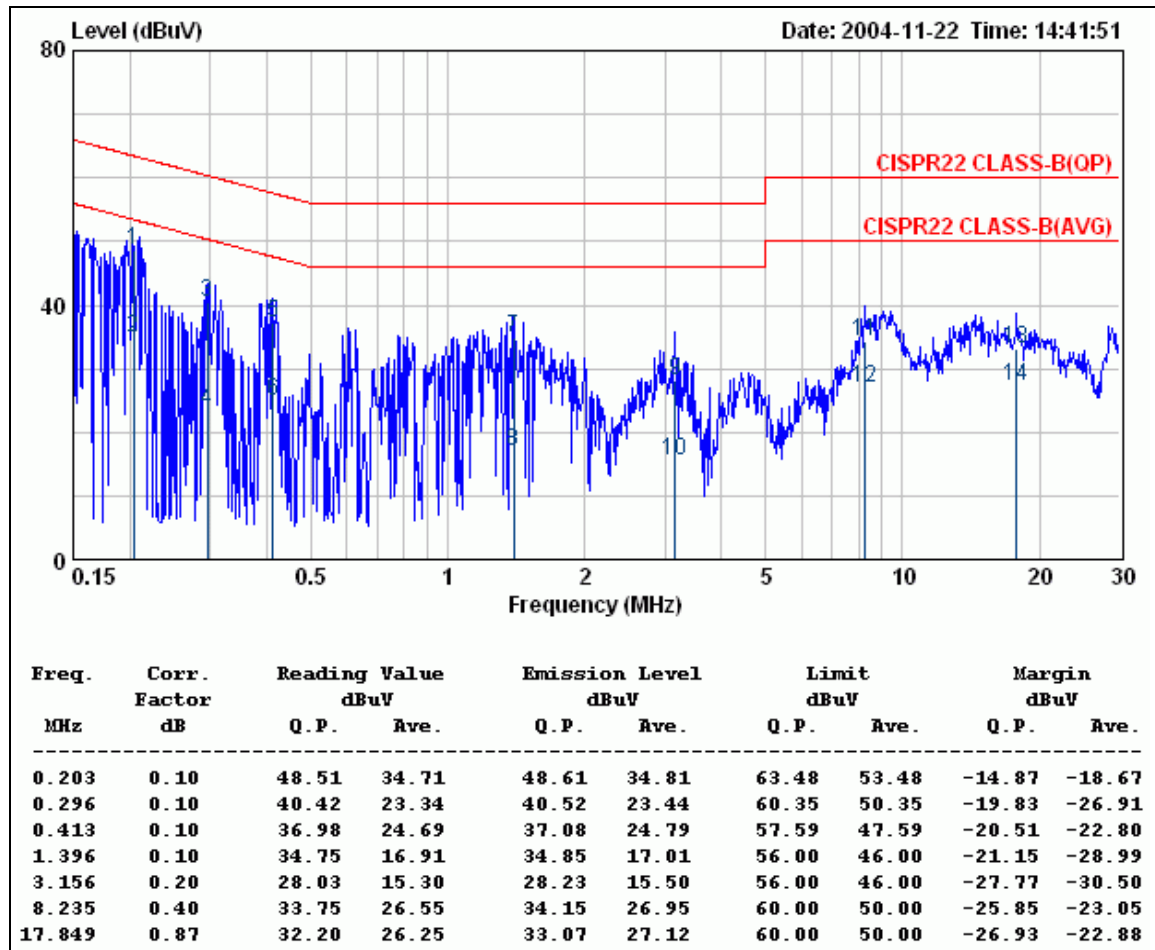

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. The EUT can be operated in transmitting, receiveing and standby modes.
According to technical experiences, the power line emissions of the EUT in transmitting mode generate highest emission. The EUT was set to transmitting mode at channel 1 (5180MHz) to get the worst-case data while performing finial test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U


Report No. : ER04-11-043FRFa

Page 13 of 84

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Netgear Incorporated	Test Date	2004/11/22
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	20.3°C, 79%


NEUTRAL

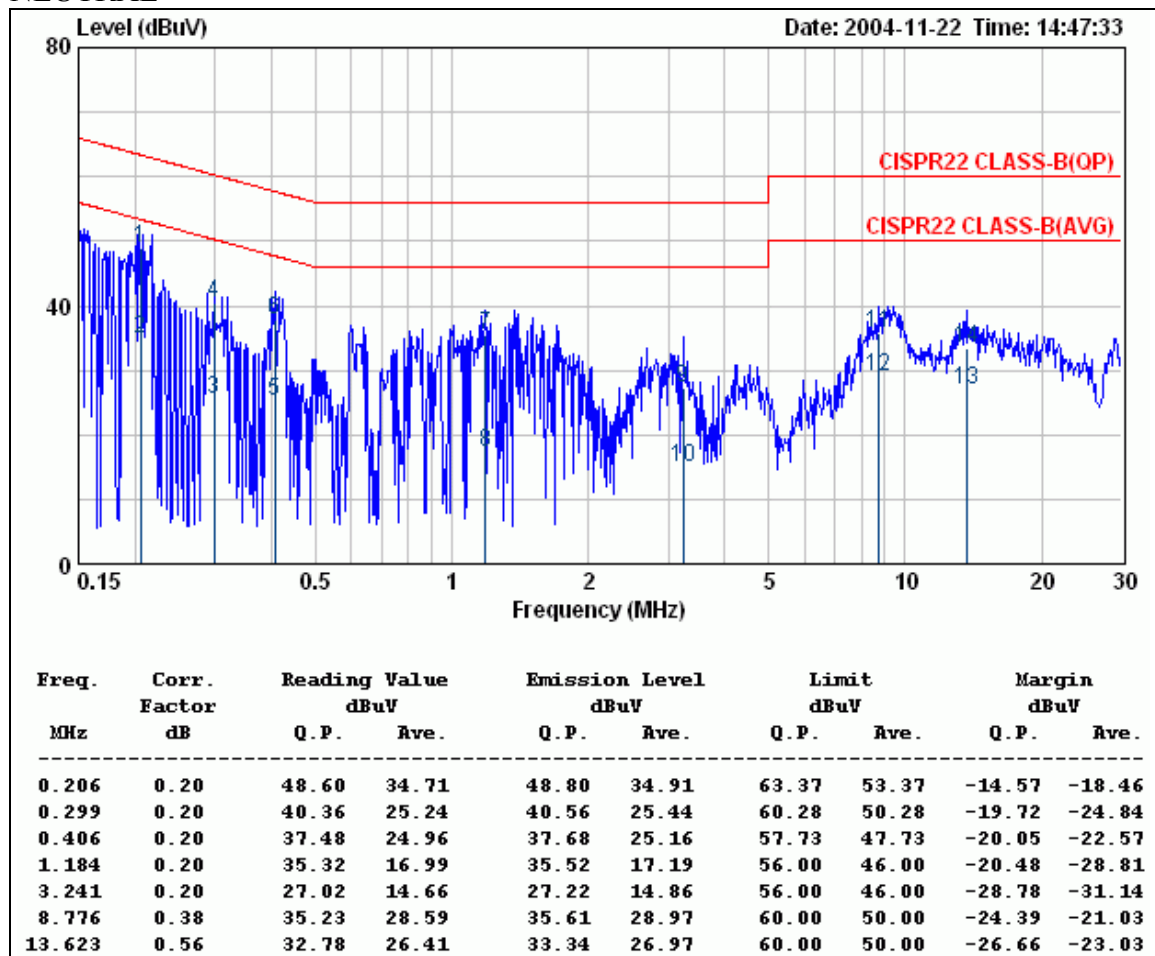

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. The EUT can be operated in transmitting, receiveing and standby modes.
According to technical experiences, the power line emissions of the EUT in transmitting mode generate highest emission. The EUT was set to transmitting mode at channel 1 (5180MHz) to get the worst-case data while performing finial test.

2.7 Photos of Conduction Test

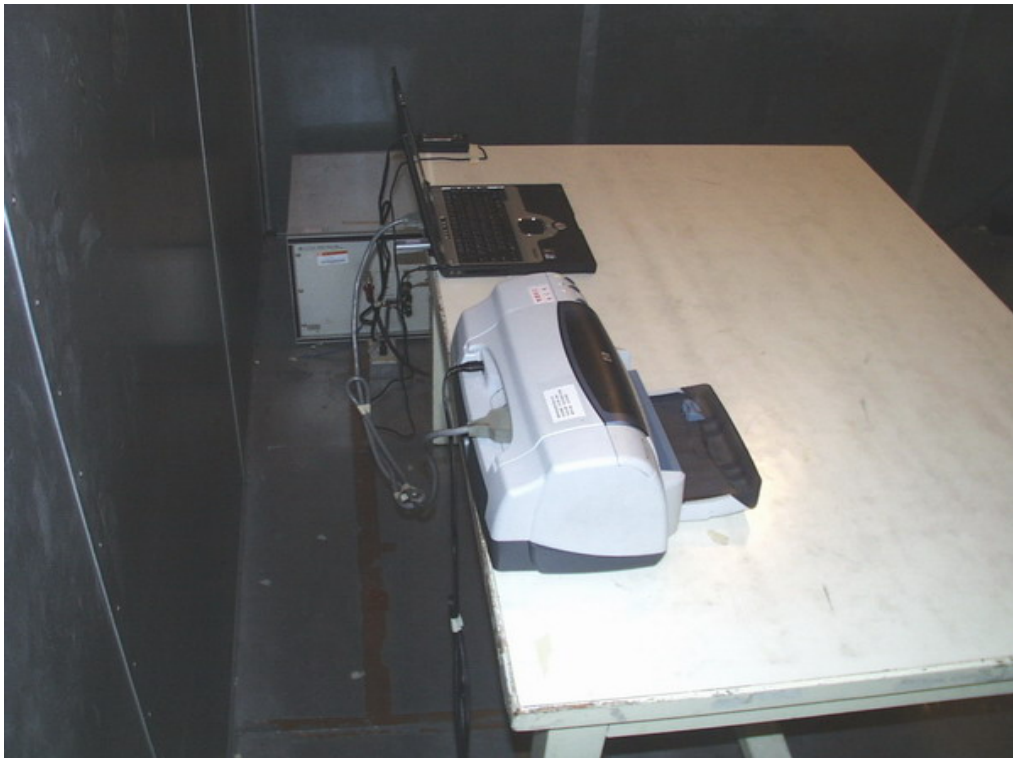

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 15 of 84

3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.

Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	June 15, 2004	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year	FINAL
R/S EMI TEST RECEIVER	ESCS30	83548/008	September 05, 204	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	June 03, 2004	1 Year	FINAL
Com-power Horn Antenna	AH-118	10089	April 09, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	November 24, 2004	1 Year	FINAL
NardaMicrowave Pre-amplifier	DBS-1840N8 13	016	July 27, 2004	1 Year	FINAL
HP High pass filter	84300/80038	002	CAL. ON USE	1 Year	FINAL
HP High pass filter	84300/80039	003	CAL. ON USE	1 Year	FINAL
Com-Power Horn Antenna	AH-840	3077	February 25, 2004	1 Year	FINAL


3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

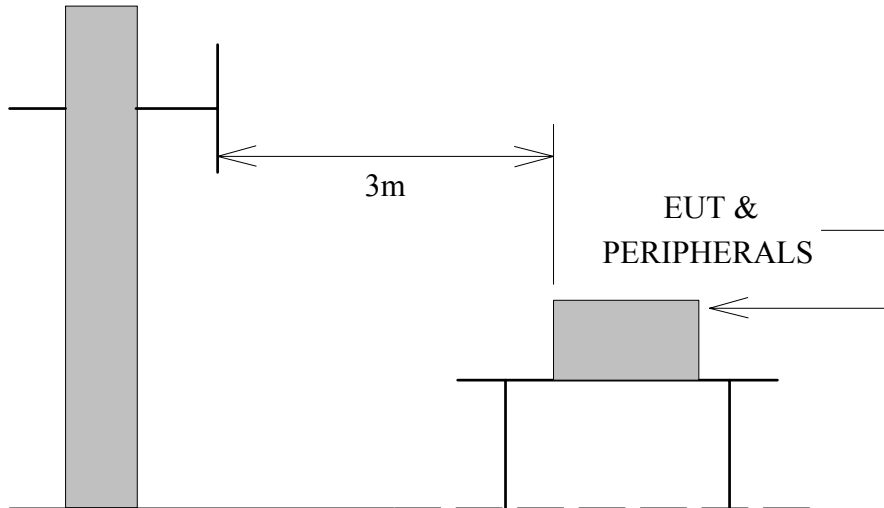

Antenna Elevation Variable

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

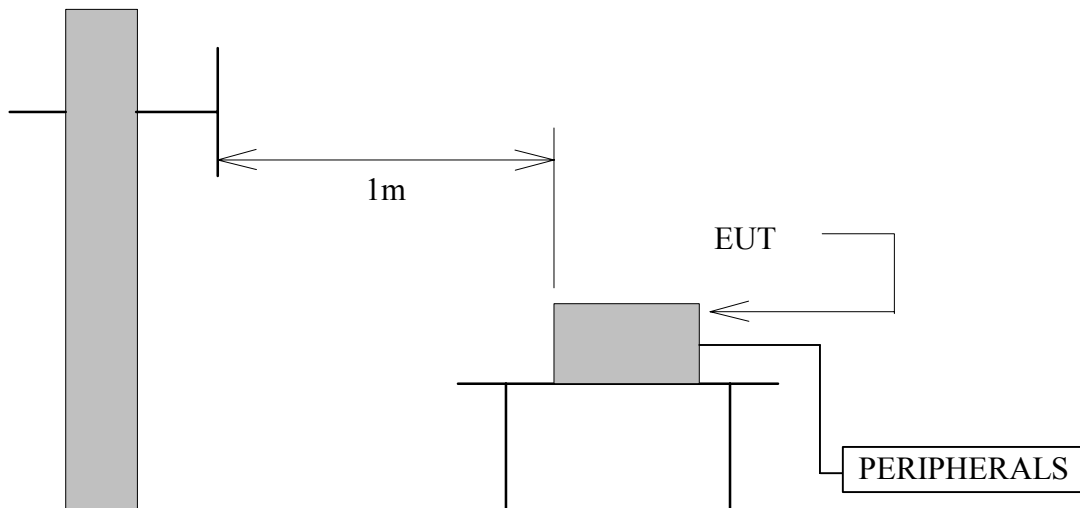

Antenna Elevation Variable



3.3 Radiation Limit

According to FCC Section 15.407(b) (6) (7), the unwanted emission below 1 GHz and in restricted bands should comply with the general field strength limits set forth in Section 15.209.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/M)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

According to FCC Section 15.407(b)(1) (2) (3) (4), the unwanted emission above 1 GHz, outside of the operating frequency band below, should exceed an EIRP of the values listed in table below.

Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/M)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5825	-27*	68.3
	-17**	78.3

The remark “*” means: outside the frequency range 5715~5835MHz.

The remark “**” means: within the frequency range from the band edge to 10MHz below or above the band edge, 5715~5725MHz and 5825~5835MHz.

3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 19 of 84

3.6 Radiated RF Noise Measurement

3.6.1 Spurious Emission Below 1GHz

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Netgear Incorporated	Test Date	2004/11/22
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	20.0°C, 70%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	17.01	0.97	*	*	40.00	*	*
200.00	9.80	3.14	10.70	8.90	43.50	23.64	21.84
250.00	12.72	4.01	4.30	2.90	46.00	21.03	19.63
279.99	13.19	4.18	5.20	2.60	46.00	22.58	19.98
299.99	13.51	4.30	4.90	5.70	46.00	22.71	23.51
400.00	18.41	4.85	4.90	4.80	46.00	28.16	28.06
479.98	17.95	5.12	6.70	5.00	46.00	29.77	28.07
701.99	19.52	6.28	12.80	17.20	46.00	38.60	43.00
1000.00	27.43	7.66	*	*	54.00	*	*

REMARKS :

1. * Undetectable
2. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
3. The EUT can be operated in transmitting, receiveing and standby modes.
According to technical experiences, the emissions of the EUT in transmitting mode generate highest spurious emission below 1GHz. The EUT was set to transmitting mode at channel 1 (5180MHz) to get the worst-case data while performing finial test below 1GHz.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
 TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 20 of 84

3.6.2 Spurious Emission Outside of the 5.15 ~ 5.35GHz Band (TX)

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH1 (5180MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3453.26	48.77	31.43	4.28	35.45	9.50	0.00	39.54	88.30	-48.76	P	1.24
3453.26	42.70	31.43	4.28	35.45	9.50	0.00	33.47	68.30	-34.83	A	1.24
* 5149.72	29.60	35.81	5.33	0.00	9.50	0.00	61.24	74.00	-12.76	P	1.05
* 5149.72	15.41	35.81	5.33	0.00	9.50	0.00	47.05	54.00	-6.95	A	1.05
5184.70	74.26	35.86	5.37	0.00	9.50	0.00	105.99	Fundamental Frequency		P	1.00
5184.70	64.79	35.86	5.37	0.00	9.50	0.00	96.52			A	1.00
6906.58	46.99	39.56	6.56	35.44	9.50	2.04	50.22	88.30	-38.08	P	1.11
6906.58	39.73	39.56	6.56	35.44	9.50	2.04	42.96	68.30	-25.34	A	1.11
10359.49	67.01	38.93	8.53	36.21	9.50	0.54	69.30	88.30	-19.00	P	1.00
10359.49	56.46	38.93	8.53	36.21	9.50	0.54	58.75	68.30	-9.55	A	1.00
* 15558.63	45.76	45.09	8.74	35.79	9.50	0.30	54.60	74.00	-19.40	P	1.03
* 15558.63	34.28	45.09	8.74	35.79	9.50	0.30	43.12	54.00	-10.88	A	1.03
* 20738.80	-----	-----	-----	-----	9.50	5.10	-----	-----	-----	-----	1.00
25923.50	-----	-----	-----	-----	9.50	1.58	-----	-----	-----	-----	1.00
31108.20	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36292.90	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41477.60	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 46662.30	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 51847.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
- The test limit distance is 3M limit.
- For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 21 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH1 (5180MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3453.18	52.64	31.43	4.28	35.45	9.50	0.00	43.41	88.30	-44.89	P	1.00
3453.18	48.51	31.43	4.28	35.45	9.50	0.00	39.28	68.30	-29.02	A	1.00
* 5149.72	28.13	35.81	5.33	0.00	9.50	0.00	59.77	74.00	-14.23	P	1.00
* 5149.72	15.41	35.81	5.33	0.00	9.50	0.00	47.05	54.00	-6.95	A	1.00
5184.10	66.80	35.86	5.37	0.00	9.50	0.00	98.53	Fundamental Frequency		P	1.00
5184.10	57.01	35.86	5.37	0.00	9.50	0.00	88.74			A	1.00
6906.76	48.63	39.56	6.56	35.44	9.50	0.00	49.82	88.30	-38.48	P	1.00
6906.76	41.43	39.56	6.56	35.44	9.50	0.00	42.62	68.30	-25.68	A	1.00
10359.55	66.70	38.93	8.53	36.21	9.50	0.54	68.99	88.30	-19.31	P	1.11
10359.55	55.94	38.93	8.53	36.21	9.50	0.54	58.23	68.30	-10.07	A	1.11
* 15536.09	46.01	45.17	8.72	35.75	9.50	0.30	54.95	74.00	-19.05	P	1.00
* 15536.09	33.94	45.17	8.72	35.75	9.50	0.30	42.88	54.00	-11.12	A	1.00
* 20736.40	-----	-----	-----	-----	9.50	5.09	-----	-----	-----	-----	1.00
25920.50	-----	-----	-----	-----	9.50	1.58	-----	-----	-----	-----	1.00
31104.60	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36288.70	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41472.80	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 46656.90	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 51841.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 22 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH4 (5240MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3493.33	49.43	31.40	4.32	35.41	9.50	0.00	40.25	88.30	-48.05	P	1.20
3493.33	43.85	31.40	4.32	35.41	9.50	0.00	34.67	68.30	-33.63	A	1.20
6986.55	48.93	39.85	6.58	35.66	9.50	0.00	50.20	88.30	-38.10	P	1.08
6986.55	43.35	39.85	6.58	35.66	9.50	0.00	44.62	68.30	-23.68	A	1.08
10479.45	63.44	39.08	8.56	35.95	9.50	0.59	66.23	88.30	-22.07	P	1.00
10479.45	52.23	39.08	8.56	35.95	9.50	0.59	55.02	68.30	-13.28	A	1.00
* 15720.00	45.81	44.51	8.84	36.03	9.50	0.30	53.92	74.00	-20.08	P	1.00
* 15720.00	34.48	44.51	8.84	36.03	9.50	0.30	42.59	54.00	-11.41	A	1.00
* 20958.90	-----	-----	-----	-----	9.50	5.82	-----	-----	-----	-----	1.00
26198.63	-----	-----	-----	-----	9.50	1.80	-----	-----	-----	-----	1.00
* 31438.35	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36678.08	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41917.80	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47157.53	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52397.25	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 23 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH4 (5240MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3493.25	52.09	31.40	4.32	35.41	9.50	0.00	42.91	88.30	-45.39	P	1.13
3493.25	48.16	31.40	4.32	35.41	9.50	0.00	38.98	68.30	-29.32	A	1.13
6986.69	47.63	39.85	6.58	35.66	9.50	0.00	48.90	88.30	-39.40	P	1.14
6986.69	41.52	39.85	6.58	35.66	9.50	0.00	42.79	68.30	-25.51	A	1.14
10480.00	59.36	39.08	8.56	35.94	9.50	0.59	62.15	88.30	-26.15	P	1.00
10480.00	48.40	39.08	8.56	35.94	9.50	0.59	51.19	68.30	-17.11	A	1.00
* 15720.00	46.48	44.51	8.84	36.03	9.50	0.30	54.59	74.00	-19.41	P	1.00
* 15720.00	35.34	44.51	8.84	36.03	9.50	0.30	43.45	54.00	-10.55	A	1.00
* 20960.00	-----	-----	-----	-----	9.50	5.82	-----	-----	-----	-----	1.00
26200.00	-----	-----	-----	-----	9.50	1.80	-----	-----	-----	-----	1.00
* 31440.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36680.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41920.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47160.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52400.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 24 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH5 (5260MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3506.60	50.16	31.42	4.34	35.39	9.50	0.00	41.02	88.30	-47.28	P	1.22
3506.60	44.83	31.42	4.34	35.39	9.50	0.00	35.69	68.30	-32.61	A	1.22
7012.97	49.65	39.89	6.59	35.70	9.50	0.00	50.94	88.30	-37.36	P	1.10
7012.97	44.42	39.89	6.59	35.70	9.50	0.00	45.71	68.30	-22.59	A	1.10
10518.41	61.49	39.12	8.58	35.90	9.50	0.63	64.41	88.30	-23.89	P	1.08
10518.41	50.92	39.12	8.58	35.90	9.50	0.63	53.84	68.30	-14.46	A	1.08
* 15781.17	45.25	44.29	8.87	36.12	9.50	0.30	53.09	74.00	-20.91	P	1.17
* 15781.17	34.58	44.29	8.87	36.12	9.50	0.30	42.42	54.00	-11.58	A	1.17
* 21036.82	-----	-----	-----	-----	9.50	5.58	-----	-----	-----	-----	1.00
26296.03	-----	-----	-----	-----	9.50	1.90	-----	-----	-----	-----	1.00
* 31555.23	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36814.44	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42073.64	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47332.85	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52592.05	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 25 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH5 (5260MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3506.70	51.96	31.42	4.34	35.39	9.50	0.00	42.82	88.30	-45.48	P	1.00
3506.70	47.95	31.42	4.34	35.39	9.50	0.00	38.81	68.30	-29.49	A	1.00
7013.18	48.58	39.89	6.59	35.70	9.50	0.00	49.87	88.30	-38.43	P	1.12
7013.18	42.50	39.89	6.59	35.70	9.50	0.00	43.79	68.30	-24.51	A	1.12
10519.67	60.81	39.12	8.58	35.90	9.50	0.63	63.74	88.30	-24.56	P	1.11
10519.67	50.04	39.12	8.58	35.90	9.50	0.63	52.97	68.30	-15.33	A	1.11
* 15778.02	45.46	44.30	8.87	36.12	9.50	0.30	53.31	74.00	-20.69	P	1.16
* 15778.02	34.44	44.30	8.87	36.12	9.50	0.30	42.29	54.00	-11.71	A	1.16
* 21039.34	-----	-----	-----	-----	9.50	5.55	-----	-----	-----	-----	1.00
26299.18	-----	-----	-----	-----	9.50	1.90	-----	-----	-----	-----	1.00
* 31559.01	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36818.85	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42078.68	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47338.52	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52598.35	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 26 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH8 (5320MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3546.61	50.95	31.51	4.38	35.35	9.50	0.00	41.98	88.30	-46.32	P	1.21
3546.61	45.87	31.51	4.38	35.35	9.50	0.00	36.90	68.30	-31.40	A	1.21
5320.00	66.18	36.05	5.54	0.00	9.50	0.00	98.27	Fundamental Frequency		P	1.11
5320.00	56.78	36.05	5.54	0.00	9.50	0.00	88.87			A	1.11
* 5351.87	27.61	36.09	5.58	0.00	9.50	0.00	59.79	74.00	-14.21	P	1.11
* 5351.87	15.41	36.09	5.58	0.00	9.50	0.00	47.59	54.00	-6.41	A	1.11
7093.04	50.42	39.86	6.64	35.68	9.50	0.00	51.74	88.30	-36.56	P	1.08
7093.04	45.93	39.86	6.64	35.68	9.50	0.00	47.25	68.30	-21.05	A	1.08
* 10635.45	48.53	39.26	8.61	35.90	9.50	0.79	51.79	74.00	-22.21	P	1.02
* 10635.45	37.96	39.26	8.61	35.90	9.50	0.79	41.22	54.00	-12.78	A	1.02
* 15954.36	50.16	43.66	8.98	36.38	9.50	0.30	57.22	74.00	-16.78	P	1.00
* 15954.36	39.39	43.66	8.98	36.38	9.50	0.30	46.45	54.00	-7.55	A	1.00
* 21280.00	-----	-----	-----	-----	9.50	3.12	-----	-----	-----	-----	1.00
26600.00	-----	-----	-----	-----	9.50	2.14	-----	-----	-----	-----	1.00
31920.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
37240.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42560.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47880.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 53200.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 27 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/24
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	30.4°C, 54%

CH8 (5320MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3546.47	50.15	31.51	4.38	35.35	9.50	0.00	41.18	88.30	-47.12	P	1.09
3546.47	45.46	31.51	4.38	35.35	9.50	0.00	36.49	68.30	-31.81	A	1.09
5315.89	66.76	36.04	5.54	0.00	9.50	0.00	98.84	Fundamental Frequency		P	1.10
5315.89	57.60	36.04	5.54	0.00	9.50	0.00	89.68			A	1.10
* 5351.87	28.22	36.09	5.58	0.00	9.50	0.00	60.40	74.00	-13.60	P	1.10
* 5351.87	15.41	36.09	5.58	0.00	9.50	0.00	47.59	54.00	-6.41	A	1.10
7093.19	49.00	39.86	6.64	35.68	9.50	0.00	50.32	88.30	-37.98	P	1.12
7093.19	43.23	39.86	6.64	35.68	9.50	0.00	44.55	68.30	-23.75	A	1.12
* 10640.55	48.98	39.27	8.61	35.90	9.50	0.80	52.26	74.00	-21.74	P	1.00
* 10640.55	37.42	39.27	8.61	35.90	9.50	0.80	40.70	54.00	-13.30	A	1.00
* 15960.02	50.65	43.64	8.99	36.39	9.50	0.30	57.69	74.00	-16.31	P	1.00
* 15960.02	39.90	43.64	8.99	36.39	9.50	0.30	46.94	54.00	-7.06	A	1.00
* 21263.56	-----	-----	-----	-----	9.50	3.29	-----	-----	-----	-----	1.00
26579.45	-----	-----	-----	-----	9.50	2.13	-----	-----	-----	-----	1.00
31895.34	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
37211.23	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42527.12	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47843.01	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 53158.90	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
 TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 28 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

Low (5210MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3473.28	47.15	31.42	4.30	35.43	9.50	0.00	37.94	88.30	-50.36	P	1.28
3473.28	41.31	31.42	4.30	35.43	9.50	0.00	32.10	68.30	-36.20	A	1.28
* 5149.72	26.61	35.81	5.33	0.00	9.50	0.00	58.25	74.00	-15.75	P	1.05
* 5149.72	15.41	35.81	5.33	0.00	9.50	0.00	47.05	54.00	-6.95	A	1.05
5207.85	67.83	35.89	5.40	0.00	9.50	0.00	99.62	Fundamental Frequency		P	1.00
5207.85	58.95	35.89	5.40	0.00	9.50	0.00	90.74			A	1.00
6946.69	45.72	39.71	6.57	35.55	9.50	2.02	48.97	88.30	-39.33	P	1.13
6946.69	38.71	39.71	6.57	35.55	9.50	2.02	41.96	68.30	-26.34	A	1.13
10416.69	64.31	39.00	8.55	36.08	9.50	0.57	66.84	88.30	-21.46	P	1.02
10416.69	52.61	39.00	8.55	36.08	9.50	0.57	55.14	68.30	-13.16	A	1.02
* 15629.97	45.21	44.83	8.78	35.89	9.50	0.30	53.73	74.00	-20.27	P	1.00
* 15629.97	34.02	44.83	8.78	35.89	9.50	0.30	42.54	54.00	-11.46	A	1.00
* 20831.40	-----	-----	-----	-----	9.50	5.40	-----	-----	-----	-----	1.00
26039.25	-----	-----	-----	-----	9.50	1.64	-----	-----	-----	-----	1.00
* 31247.10	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 36454.95	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41662.80	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 46870.65	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52078.50	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
- The test limit distance is 3M limit.
- For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
 TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 29 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

Low (5210MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3473.25	50.37	31.42	4.30	35.43	9.50	0.00	41.16	88.30	-47.14	P	1.00
3473.25	46.71	31.42	4.30	35.43	9.50	0.00	37.50	68.30	-30.80	A	1.00
* 5149.72	27.82	35.81	5.33	0.00	9.50	0.00	59.46	74.00	-14.54	P	1.13
* 5149.72	15.41	35.81	5.33	0.00	9.50	0.00	47.05	54.00	-6.95	A	1.13
5210.80	61.89	35.90	5.41	0.00	9.50	0.00	93.69	Fundamental Frequency		P	1.00
5210.80	53.32	35.90	5.41	0.00	9.50	0.00	85.12			A	1.00
6946.59	46.72	39.71	6.57	35.55	9.50	0.00	47.95	88.30	-40.35	P	1.00
6946.59	40.34	39.71	6.57	35.55	9.50	0.00	41.57	68.30	-26.73	A	1.00
10416.59	61.04	39.00	8.54	36.08	9.50	0.57	63.57	88.30	-24.73	P	1.09
10416.59	49.74	39.00	8.54	36.08	9.50	0.57	52.27	68.30	-16.03	A	1.09
* 15629.98	45.03	44.83	8.78	35.89	9.50	0.30	53.55	74.00	-20.45	P	1.00
* 15629.98	32.88	44.83	8.78	35.89	9.50	0.30	41.40	54.00	-12.60	A	1.00
* 20843.20	-----	-----	-----	-----	9.50	5.44	-----	-----	-----	-----	1.00
26054.00	-----	-----	-----	-----	9.50	1.65	-----	-----	-----	-----	1.00
* 31264.80	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 36475.60	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41686.40	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 46897.20	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52108.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
- The test limit distance is 3M limit.
- For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 30 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

Middle (5250MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3499.95	48.98	31.40	4.33	35.40	9.50	0.00	39.81	88.30	-48.49	P	1.25
3499.95	42.85	31.40	4.33	35.40	9.50	0.00	33.68	68.30	-34.62	A	1.25
6999.81	47.26	39.90	6.58	35.70	9.50	0.00	48.54	88.30	-39.76	P	1.08
6999.81	40.92	39.90	6.58	35.70	9.50	0.00	42.20	68.30	-26.10	A	1.08
10497.50	61.06	39.10	8.57	35.91	9.50	0.60	63.92	88.30	-24.38	P	1.03
10497.50	50.63	39.10	8.57	35.91	9.50	0.60	53.49	68.30	-14.81	A	1.03
* 15749.49	44.39	44.40	8.85	36.07	9.50	0.30	52.37	74.00	-21.63	P	1.00
* 15749.49	33.84	44.40	8.85	36.07	9.50	0.30	41.82	54.00	-12.18	A	1.00
* 20995.00	-----	-----	-----	-----	9.50	5.93	-----	-----	-----	-----	1.00
26243.75	-----	-----	-----	-----	9.50	1.84	-----	-----	-----	-----	1.00
* 31492.50	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
36741.25	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 41990.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47238.75	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52487.50	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 31 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

Middle (5250MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3499.97	50.84	31.40	4.33	35.40	9.50	0.00	41.67	88.30	-46.63	P	1.10
3499.97	46.12	31.40	4.33	35.40	9.50	0.00	36.95	68.30	-31.35	A	1.10
6999.95	47.12	39.90	6.58	35.70	9.50	0.00	48.40	88.30	-39.90	P	1.12
6999.95	40.88	39.90	6.58	35.70	9.50	0.00	42.16	68.30	-26.14	A	1.12
10495.89	56.87	39.10	8.57	35.91	9.50	0.60	59.72	88.30	-28.58	P	1.00
10495.89	46.26	39.10	8.57	35.91	9.50	0.60	49.11	68.30	-19.19	A	1.00
* 15750.01	45.25	44.40	8.86	36.08	9.50	0.30	53.23	74.00	-20.77	P	1.00
* 15750.01	32.58	44.40	8.86	36.08	9.50	0.30	40.56	54.00	-13.44	A	1.00
* 20991.78	-----	-----	-----	-----	0.00	5.92	-----	-----	-----	-----	1.00
26239.73	-----	-----	-----	-----	0.00	1.84	-----	-----	-----	-----	1.00
* 31487.67	-----	-----	-----	-----	0.00	0.00	-----	-----	-----	-----	1.00
36735.62	-----	-----	-----	-----	0.00	0.00	-----	-----	-----	-----	1.00
* 41983.56	-----	-----	-----	-----	0.00	0.00	-----	-----	-----	-----	1.00
* 47231.51	-----	-----	-----	-----	0.00	0.00	-----	-----	-----	-----	1.00
* 52479.45	-----	-----	-----	-----	0.00	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For Super A mode.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 32 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

High (5290MHz) TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3526.57	48.63	31.46	4.36	35.37	9.50	0.00	39.58	88.30	-48.72	P	1.22
3526.57	43.00	31.46	4.36	35.37	9.50	0.00	33.95	68.30	-34.35	A	1.22
5291.60	72.81	36.01	5.51	0.00	9.50	0.00	104.83	Fundamental Frequency		P	1.11
5291.60	63.39	36.01	5.51	0.00	9.50	0.00	95.41			A	1.11
* 5351.87	27.90	36.09	5.58	0.00	9.50	0.00	60.08	74.00	-13.92	P	1.11
* 5351.87	15.41	36.09	5.58	0.00	9.50	0.00	47.59	54.00	-6.41	A	1.11
7053.17	47.63	39.88	6.62	35.69	9.50	0.00	48.94	88.30	-39.36	P	1.04
7053.17	41.00	39.88	6.62	35.69	9.50	0.00	42.31	68.30	-25.99	A	1.04
10582.10	60.27	39.20	8.59	35.90	9.50	0.71	63.38	88.30	-24.92	P	1.02
10582.10	48.05	39.20	8.59	35.90	9.50	0.71	51.16	68.30	-17.14	A	1.02
* 15869.97	44.96	43.97	8.93	36.25	9.50	0.30	52.40	74.00	-21.60	P	1.00
* 15869.97	33.27	43.97	8.93	36.25	9.50	0.30	40.71	54.00	-13.29	A	1.00
* 21166.40	-----	-----	-----	-----	9.50	4.27	-----	-----	-----	-----	1.00
26458.00	-----	-----	-----	-----	9.50	2.06	-----	-----	-----	-----	1.00
* 31749.60	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
37041.20	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42332.80	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47624.40	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52916.00	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For Super A mode.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 33 of 84

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 83%

High (5290MHz) TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
3526.59	50.86	31.46	4.36	35.37	9.50	0.00	41.81	88.30	-46.49	P	1.09
3526.59	46.68	31.46	4.36	35.37	9.50	0.00	37.63	68.30	-30.67	A	1.09
5287.19	63.00	36.00	5.50	0.00	9.50	0.00	95.00	Fundamental Frequency		P	1.10
5287.19	53.52	36.00	5.50	0.00	9.50	0.00	85.52			A	1.10
* 5351.87	27.57	36.09	5.58	0.00	9.50	0.00	59.75	74.00	-14.25	P	1.13
* 5351.87	15.41	36.09	5.58	0.00	9.50	0.00	47.59	54.00	-6.41	A	1.13
7053.13	47.62	39.88	6.62	35.69	9.50	0.00	48.93	88.30	-39.37	P	1.09
7053.13	40.48	39.88	6.62	35.69	9.50	0.00	41.79	68.30	-26.51	A	1.09
10581.79	54.35	39.20	8.59	35.90	9.50	0.71	57.46	88.30	-30.84	P	1.04
10581.79	42.59	39.20	8.59	35.90	9.50	0.71	45.70	68.30	-22.60	A	1.04
* 15869.98	45.20	43.97	8.93	36.25	9.50	0.30	52.64	74.00	-21.36	P	1.00
* 15869.98	33.29	43.97	8.93	36.25	9.50	0.30	40.73	54.00	-13.27	A	1.00
* 21148.76	-----	-----	-----	-----	9.50	4.45	-----	-----	-----	-----	1.00
26435.95	-----	-----	-----	-----	9.50	2.04	-----	-----	-----	-----	1.00
* 31723.14	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
37010.33	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 42297.52	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 47584.71	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00
* 52871.90	-----	-----	-----	-----	9.50	0.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (8.2GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The test limit distance is 3M limit.
8. For Super A mode.



3.6.3 Radiated Bandedge Emission of 5.15 ~ 5.35GHz Band

The measured radiated band edge emissions are listed below :

Company	Netgear Incorporated	Test Date	2004/12/13
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 63%

For normal 802.11a mode

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
5150.00	PK	64.72	57.26	74.00	74.00	PASS
	AV	42.97	35.19	54.00	54.00	
5350.00	PK	47.75	48.32	74.00	74.00	PASS
	AV	32.92	33.73	54.00	54.00	

For Super A mode

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
5150.00	PK	55.63	49.70	74.00	74.00	PASS
	AV	38.75	33.13	54.00	54.00	
5350.00	PK	58.60	48.77	74.00	74.00	PASS
	AV	42.65	32.76	54.00	54.00	

Note :


1. Radiated band edge field strength is measured with FCC recommended mark-delta method.
2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.
3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of Band Edge Measurement.

3.6.4 Photo of Bandedge Measurement

In 5.15 ~ 5.35GHz Band


For normal 802.11a mode

Carrier Frequency : 5180MHz

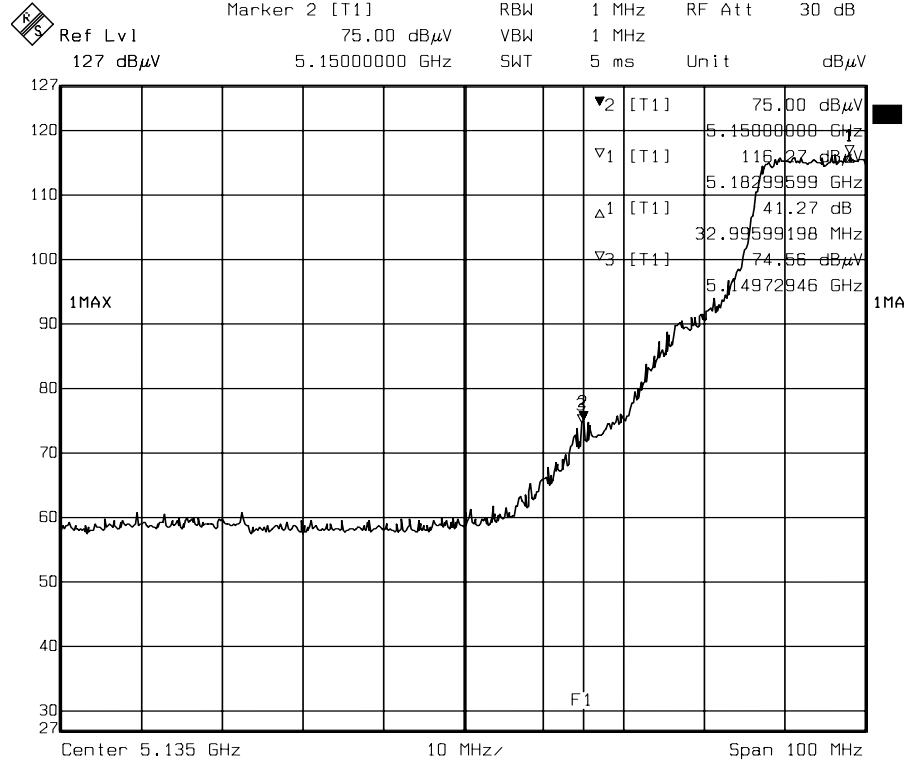

Date: 25.NOV.2004 17:00:40

Lower Band edge (Peak)

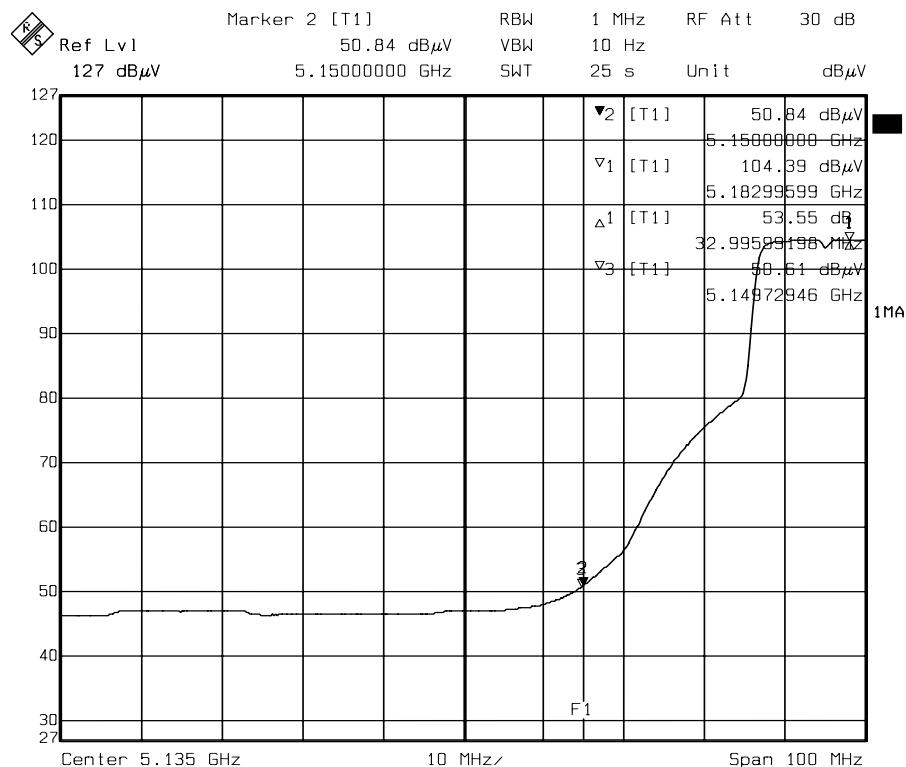

Date: 25.NOV.2004 17:01:47

Lower Band edge (Average)



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 36 of 84

Carrier Frequency : 5320MHz

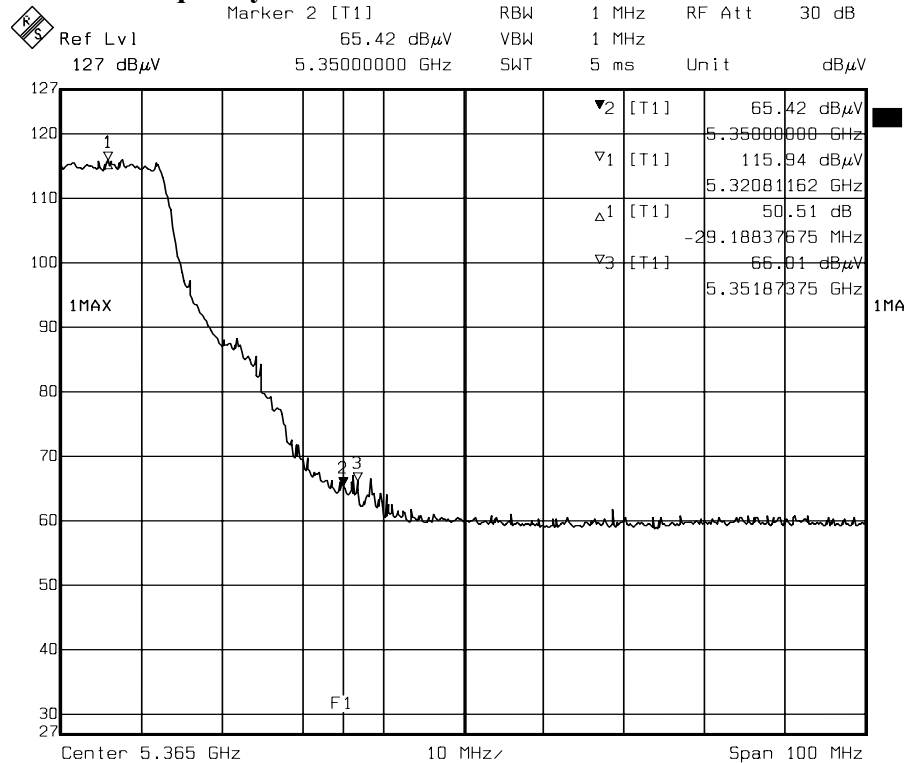

Date: 25.NOV.2004 17:08:03

Higher Band edge (Peak)

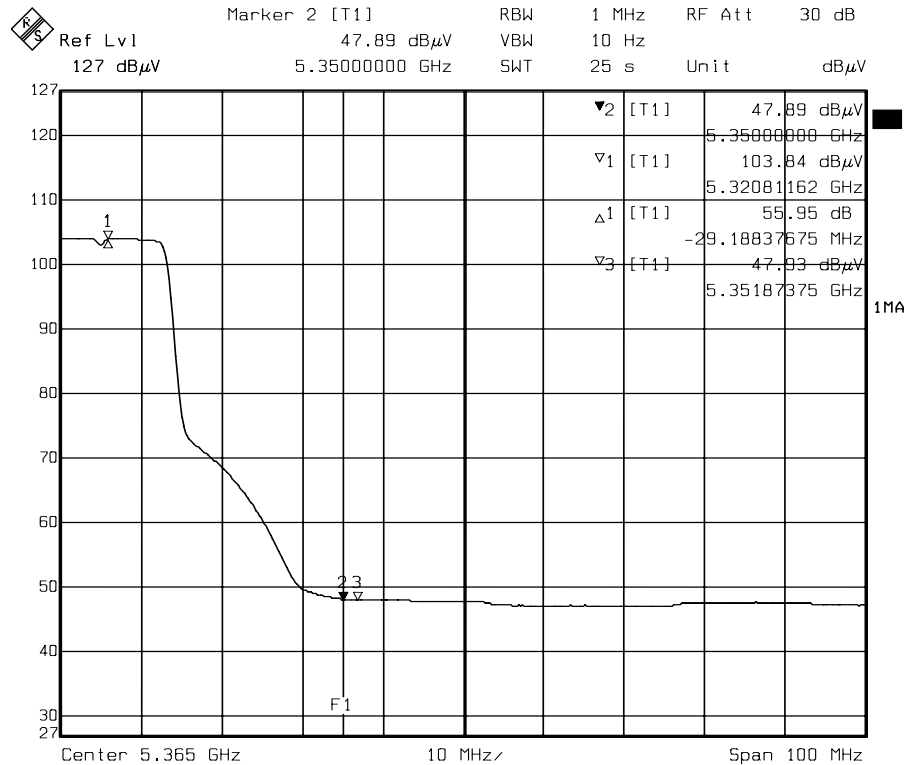

Date: 25.NOV.2004 17:09:32

Higher Band edge (Average)



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 37 of 84

For Super A mode Carrier Frequency : 5210MHz

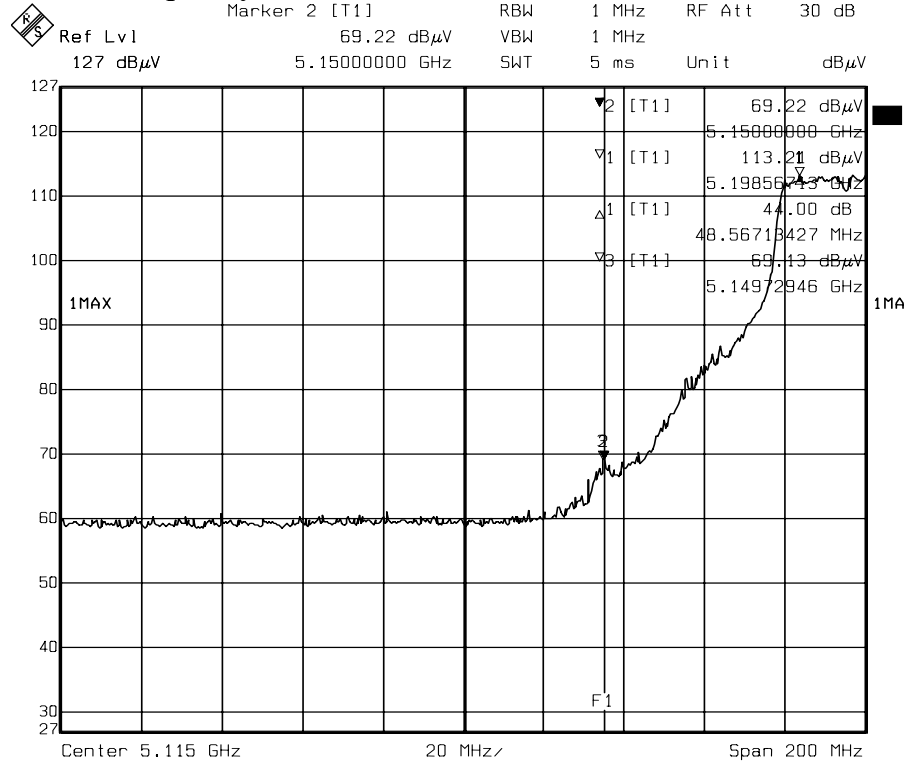

Date: 12.DEC.2004 09:48:56

Lower Band edge (Peak)

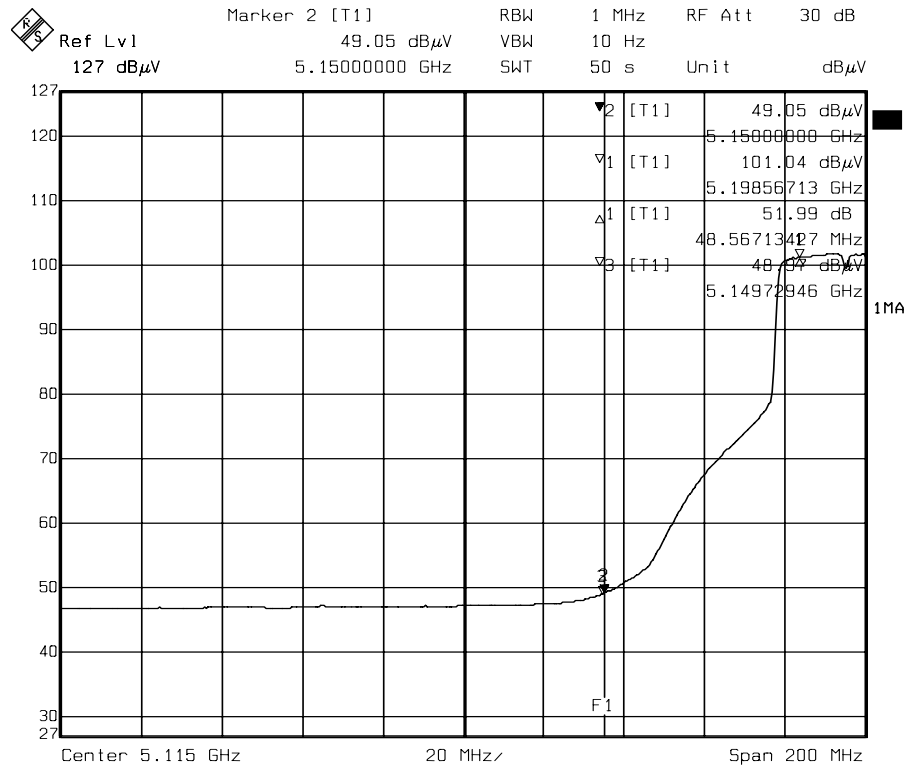

Date: 12.DEC.2004 09:50:50

Lower Band edge (Average)



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 38 of 84

Carrier Frequency : 5290MHz

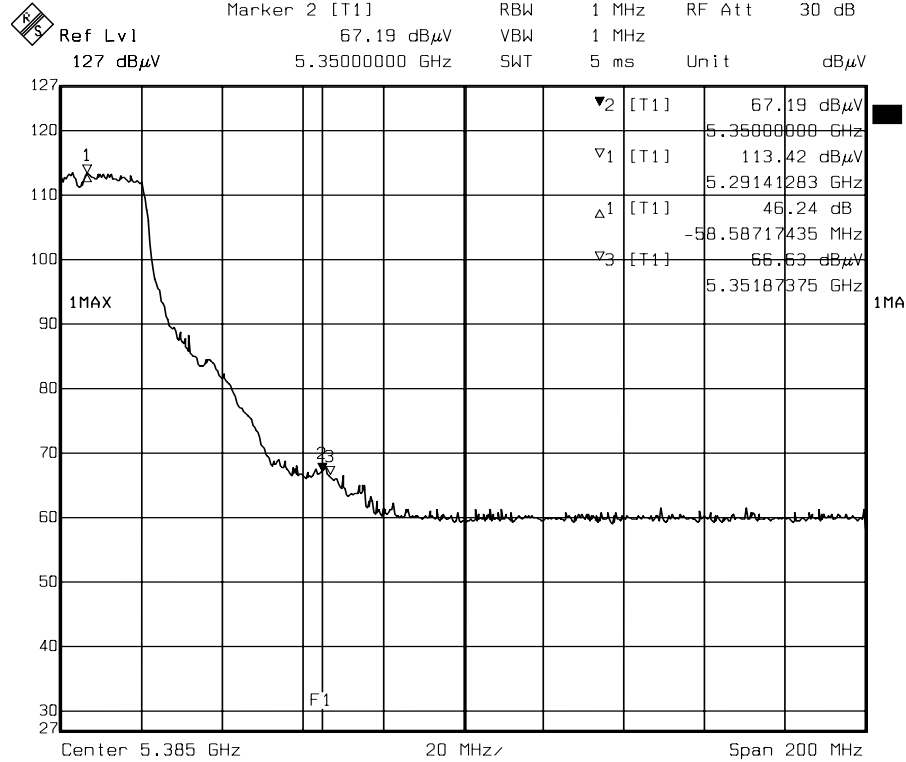

Date: 12.DEC.2004 09:59:39

Higher Band edge (Peak)

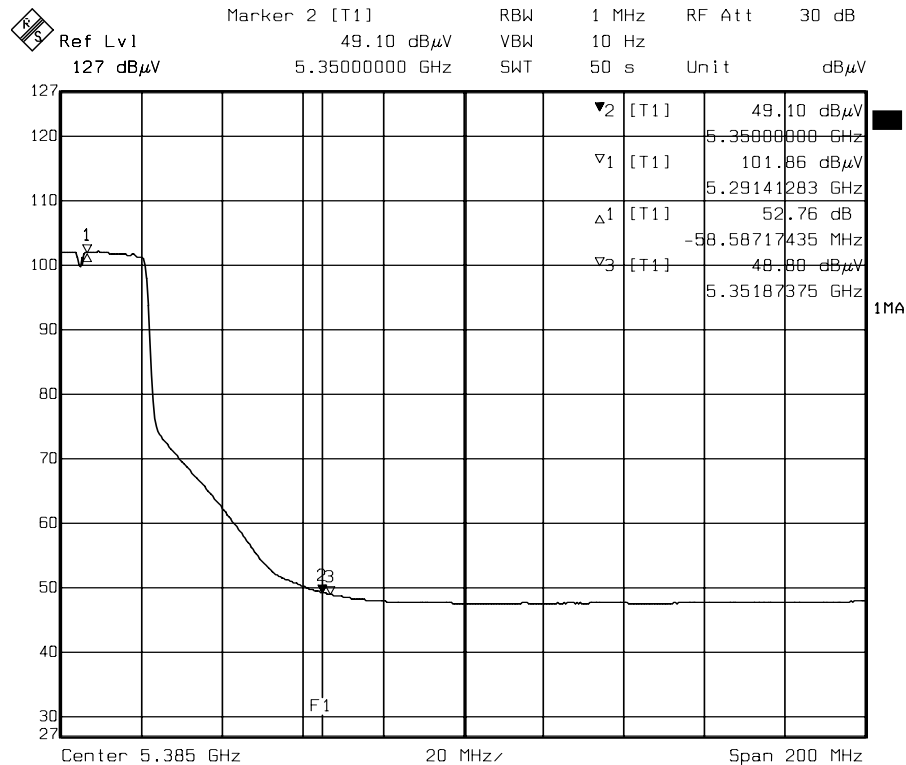

Date: 12.DEC.2004 10:01:38

Higher Band edge (Average)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 39 of 84

3.6.5 Spurious Emission Outside of the 5.15 ~ 5.35GHz Band (RX)

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH1 (5180MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1726.19	45.44	29.95	3.12	35.46	9.50	0.00	33.55	74.00	-40.45	P	1.03
1726.19	32.59	29.95	3.12	35.46	9.50	0.00	20.70	54.00	-33.30	A	1.03
3453.18	47.07	31.43	4.28	35.45	9.50	0.00	37.84	74.00	-36.16	P	1.12
3453.18	40.62	31.43	4.28	35.45	9.50	0.00	31.39	54.00	-22.61	A	1.12
6906.35	46.52	39.56	6.56	35.44	9.50	0.00	47.71	74.00	-26.29	P	1.16
6906.35	40.19	39.56	6.56	35.44	9.50	0.00	41.38	54.00	-12.62	A	1.16

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level – Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 40 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH1 (5180MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1726.65	44.73	29.96	3.12	35.46	9.50	0.00	32.85	74.00	-41.15	P	1.00
1726.65	33.77	29.96	3.12	35.46	9.50	0.00	21.89	54.00	-32.11	A	1.00
3453.30	47.95	31.43	4.28	35.45	9.50	0.00	38.72	74.00	-35.28	P	1.15
3453.30	42.10	31.43	4.28	35.45	9.50	0.00	32.87	54.00	-21.13	A	1.15
6906.51	47.52	39.56	6.56	35.44	9.50	0.00	48.71	74.00	-25.29	P	1.10
6906.51	42.32	39.56	6.56	35.44	9.50	0.00	43.51	54.00	-10.49	A	1.10

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 41 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH4 (5240MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1746.50	44.23	30.12	3.14	35.45	9.50	0.00	32.54	74.00	-41.46	P	1.00
1746.50	32.89	30.12	3.14	35.45	9.50	0.00	21.20	54.00	-32.80	A	1.00
3493.13	47.10	31.40	4.32	35.41	9.50	0.00	37.92	74.00	-36.08	P	1.18
3493.13	39.76	31.40	4.32	35.41	9.50	0.00	30.58	54.00	-23.42	A	1.18
6986.41	46.89	39.85	6.58	35.66	9.50	0.00	48.16	74.00	-25.84	P	1.14
6986.41	38.88	39.85	6.58	35.66	9.50	0.00	40.15	54.00	-13.85	A	1.14

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 42 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH4 (5240MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1746.42	45.78	30.12	3.14	35.45	9.50	0.00	34.09	74.00	-39.91	P	1.01
1746.42	33.89	30.12	3.14	35.45	9.50	0.00	22.20	54.00	-31.80	A	1.01
3493.20	48.14	31.40	4.32	35.41	9.50	0.00	38.96	74.00	-35.04	P	1.17
3493.20	41.50	31.40	4.32	35.41	9.50	0.00	32.32	54.00	-21.68	A	1.17
6986.46	47.82	39.85	6.58	35.66	9.50	0.00	49.09	74.00	-24.91	P	1.15
6986.46	41.90	39.85	6.58	35.66	9.50	0.00	43.17	54.00	-10.83	A	1.15

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 43 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH5 (5260MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1753.20	44.98	30.18	3.15	35.45	9.50	0.00	33.36	74.00	-40.64	P	1.00
1753.20	33.40	30.18	3.15	35.45	9.50	0.00	21.78	54.00	-32.22	A	1.00
3506.59	46.75	31.42	4.34	35.39	9.50	0.00	37.61	74.00	-36.39	P	1.29
3506.59	39.04	31.42	4.34	35.39	9.50	0.00	29.90	54.00	-24.10	A	1.29
7013.05	47.08	39.89	6.59	35.70	9.50	0.00	48.37	74.00	-25.63	P	1.12
7013.05	40.02	39.89	6.59	35.70	9.50	0.00	41.31	54.00	-12.69	A	1.12

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 44 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH5 (5260MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1753.29	43.89	30.18	3.15	35.45	9.50	0.00	32.27	74.00	-41.73	P	1.00
1753.29	32.59	30.18	3.15	35.45	9.50	0.00	20.97	54.00	-33.03	A	1.00
3506.44	47.31	31.42	4.34	35.39	9.50	0.00	38.17	74.00	-35.83	P	1.05
3506.44	40.74	31.42	4.34	35.39	9.50	0.00	31.60	54.00	-22.40	A	1.05
7013.10	48.02	39.89	6.59	35.70	9.50	0.00	49.31	74.00	-24.69	P	1.17
7013.10	42.19	39.89	6.59	35.70	9.50	0.00	43.48	54.00	-10.52	A	1.17

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 45 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH8 (5320MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1773.23	45.20	30.34	3.17	35.44	9.50	0.00	33.77	74.00	-40.23	P	1.02
1773.23	34.20	30.34	3.17	35.44	9.50	0.00	22.77	54.00	-31.23	A	1.02
3546.50	47.27	31.51	4.38	35.35	9.50	0.00	38.30	74.00	-35.70	P	1.21
3546.50	39.10	31.51	4.38	35.35	9.50	0.00	30.13	54.00	-23.87	A	1.21
7093.04	44.77	39.86	6.64	35.68	9.50	0.00	46.09	74.00	-27.91	P	1.00
7093.04	37.30	39.86	6.64	35.68	9.50	0.00	38.62	54.00	-15.38	A	1.00

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 46 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/11/25
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	32.4°C, 51%

CH8 (5320MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1773.29	43.80	30.34	3.17	35.44	9.50	0.00	32.37	74.00	-41.63	P	1.00
1773.29	33.65	30.34	3.17	35.44	9.50	0.00	22.22	54.00	-31.78	A	1.00
3546.50	46.70	31.51	4.38	35.35	9.50	0.00	37.73	74.00	-36.27	P	1.00
3546.50	39.01	31.51	4.38	35.35	9.50	0.00	30.04	54.00	-23.96	A	1.00
7093.03	46.54	39.86	6.64	35.68	9.50	0.00	47.86	74.00	-26.14	P	1.15
7093.03	39.52	39.86	6.64	35.68	9.50	0.00	40.84	54.00	-13.16	A	1.15

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For normal 802.11a mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 47 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

Low (5210MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1736.20	46.12	30.04	3.13	35.46	9.50	0.00	34.33	74.00	-39.67	P	1.05
1736.20	33.02	30.04	3.13	35.46	9.50	0.00	21.23	54.00	-32.77	A	1.05
3473.41	48.95	31.42	4.30	35.43	9.50	0.00	39.74	74.00	-34.26	P	1.15
3473.41	41.20	31.42	4.30	35.43	9.50	0.00	31.99	54.00	-22.01	A	1.15
6946.75	47.00	39.71	6.57	35.55	9.50	0.00	48.23	74.00	-25.77	P	1.13
6946.75	39.98	39.71	6.57	35.55	9.50	0.00	41.21	54.00	-12.79	A	1.13

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level – Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 48 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

Low (5210MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1736.19	45.12	30.04	3.13	35.46	9.50	0.00	33.33	74.00	-40.67	P	1.01
1736.19	34.01	30.04	3.13	35.46	9.50	0.00	22.22	54.00	-31.78	A	1.01
3473.50	48.56	31.42	4.30	35.43	9.50	0.00	39.35	74.00	-34.65	P	1.18
3473.50	41.87	31.42	4.30	35.43	9.50	0.00	32.66	54.00	-21.34	A	1.18
6946.62	46.52	39.71	6.57	35.55	9.50	0.00	47.75	74.00	-26.25	P	1.12
6946.62	41.74	39.71	6.57	35.55	9.50	0.00	42.97	54.00	-11.03	A	1.12

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 49 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

Middle (5250MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1749.85	45.74	30.15	3.14	35.45	9.50	0.00	34.08	74.00	-39.92	P	1.11
1749.85	33.12	30.15	3.14	35.45	9.50	0.00	21.46	54.00	-32.54	A	1.11
3499.99	46.84	31.40	4.33	35.40	9.50	0.00	37.67	74.00	-36.33	P	1.18
3499.99	40.57	31.40	4.33	35.40	9.50	0.00	31.40	54.00	-22.60	A	1.18
6999.94	48.12	39.90	6.58	35.70	9.50	0.00	49.40	74.00	-24.60	P	1.16
6999.94	40.32	39.90	6.58	35.70	9.50	0.00	41.60	54.00	-12.40	A	1.16

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 50 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

Middle (5240MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1749.95	45.23	30.15	3.14	35.45	9.50	0.00	33.57	74.00	-40.43	P	1.03
1749.95	33.11	30.15	3.14	35.45	9.50	0.00	21.45	54.00	-32.55	A	1.03
3500.02	49.68	31.40	4.33	35.40	9.50	0.00	40.51	74.00	-33.49	P	1.15
3500.02	41.56	31.40	4.33	35.40	9.50	0.00	32.39	54.00	-21.61	A	1.15
6999.58	48.89	39.90	6.58	35.70	9.50	0.00	50.17	74.00	-23.83	P	1.10
6999.58	43.28	39.90	6.58	35.70	9.50	0.00	44.56	54.00	-9.44	A	1.10

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 51 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

High (5290MHz) RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1763.25	44.23	30.26	3.16	35.44	9.50	0.00	32.71	74.00	-41.29	P	1.00
1763.25	33.87	30.26	3.16	35.44	9.50	0.00	22.35	54.00	-31.65	A	1.00
3526.41	49.52	31.46	4.36	35.37	9.50	0.00	40.47	74.00	-33.53	P	1.19
3526.41	41.23	31.46	4.36	35.37	9.50	0.00	32.18	54.00	-21.82	A	1.19
7052.98	45.23	39.88	6.62	35.69	9.50	0.00	46.54	74.00	-27.46	P	1.03
7052.98	38.12	39.88	6.62	35.69	9.50	0.00	39.43	54.00	-14.57	A	1.03

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 52 of 84

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Netgear Incorporated	Test Date	2004/12/12
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.2°C, 83%

High (5290MHz) RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1763.30	45.12	30.26	3.16	35.44	9.50	0.00	33.60	74.00	-40.40	P	1.05
1763.30	34.14	30.26	3.16	35.44	9.50	0.00	22.62	54.00	-31.38	A	1.05
3526.62	47.56	31.46	4.36	35.37	9.50	0.00	38.51	74.00	-35.49	P	1.08
3526.62	40.11	31.46	4.36	35.37	9.50	0.00	31.06	54.00	-22.94	A	1.08
7053.15	47.12	39.88	6.62	35.69	9.50	0.00	48.43	74.00	-25.57	P	1.16
7053.15	40.03	39.88	6.62	35.69	9.50	0.00	41.34	54.00	-12.66	A	1.16

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 30GHz.
7. The other emission levels were very low against the limit.
8. For Super A mode.

3.7 Photos of Open Site





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 54 of 84





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 55 of 84





4. EMISSION BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Test Procedure

- A. The transmitter output was connected to the spectrum analyzer.
- B. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300KHz RBW and 1MHz VBW.
- C. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.
- D. The measured Emission Bandwidth, B, is the 26dB bandwidth.

4.4 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 200\text{KHz}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U
Report No. : ER04-11-043FRFa
Page 57 of 84

4.5 Test Results

Company	Netgear Incorporated	Test Date	2004/12/13
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 63%

In 5.15 ~ 5.35 GHz Band
For normal 802.11a mode

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Pass / Fail
1	5180	25.45	PASS
4	5240	26.35	PASS
5	5260	26.85	PASS
8	5320	25.05	PASS

For Super A mode

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Pass / Fail
Low	5210	49.50	PASS
Middle	5250	48.10	PASS
High	5290	47.50	PASS



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 58 of 84


4.6 Photo of 26db Bandwidth Measurement

In 5.15 ~ 5.35 GHz Band For normal 802.11a mode

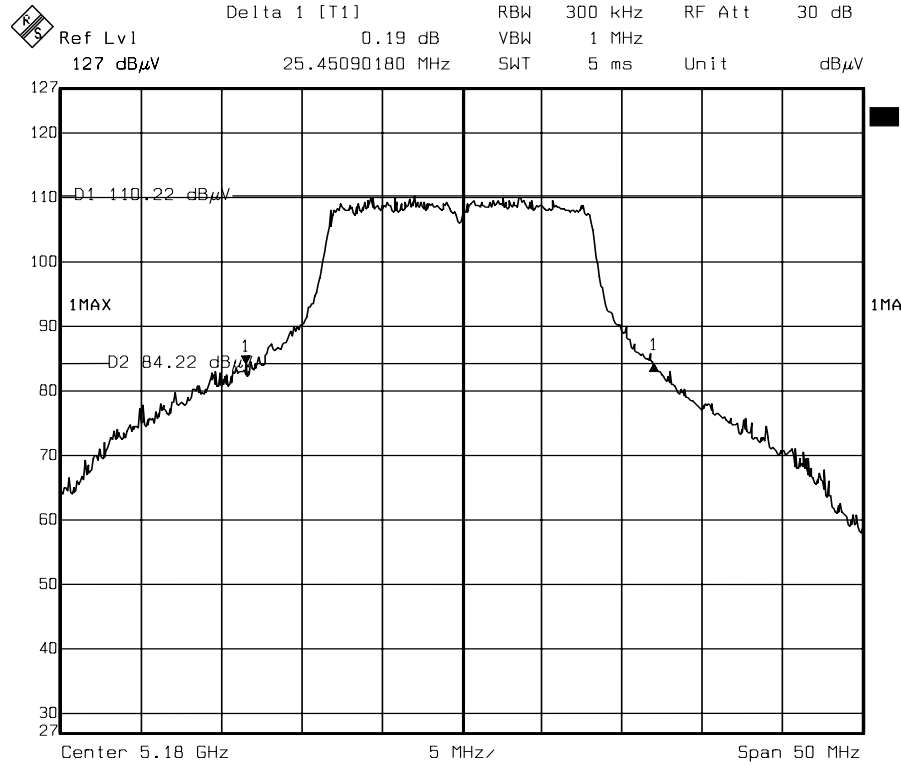

Date: 25.NOV.2004 15:47:45

Channel 1

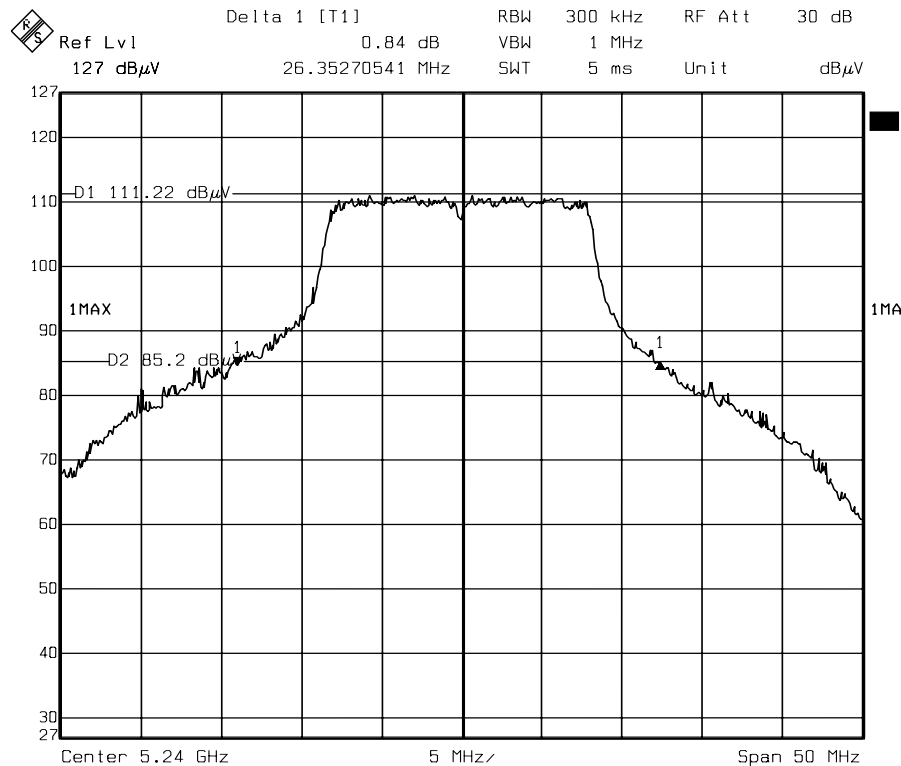

Date: 25.NOV.2004 15:50:01

Channel 4




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U


Report No. : ER04-11-043FRFa

Page 59 of 84

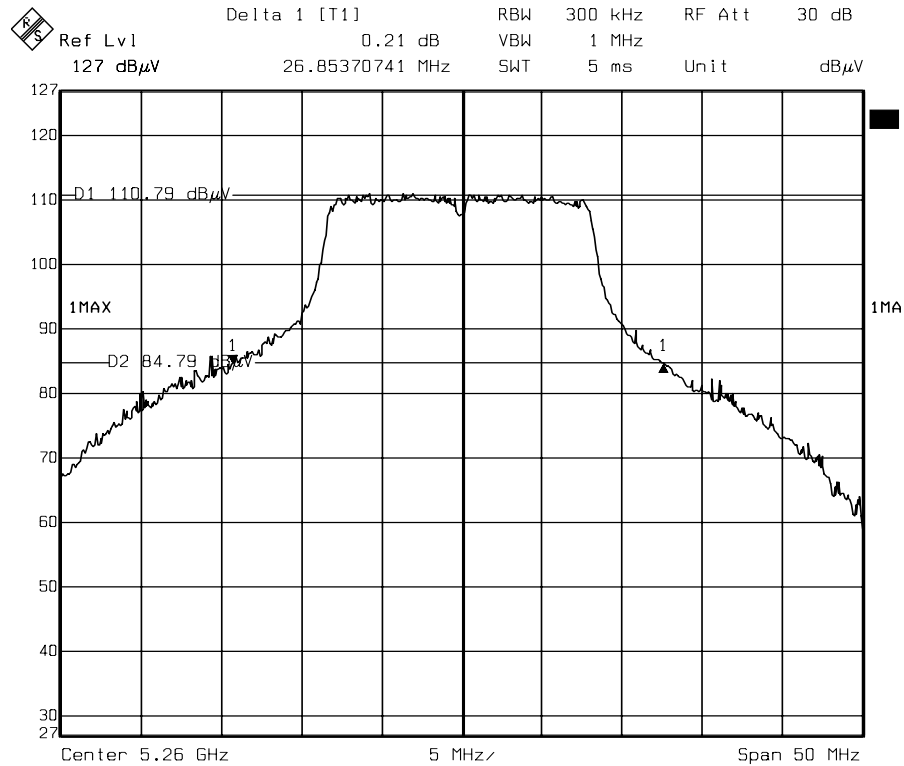

Date: 25.NOV.2004 15:54:39

Channel 5

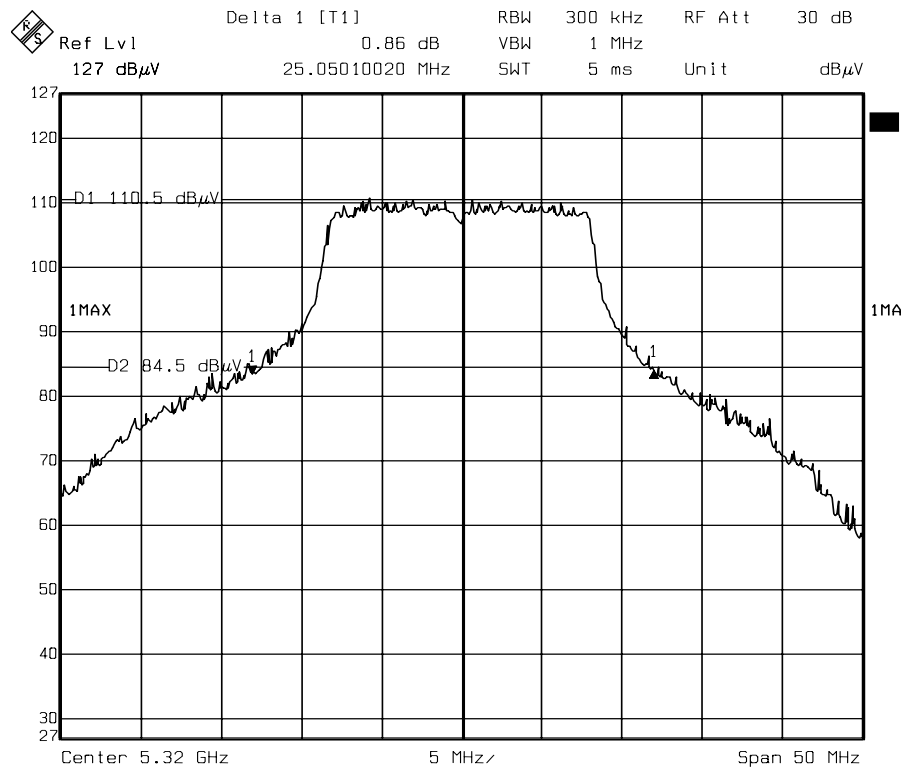

Date: 25.NOV.2004 15:56:20

Channel 8



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 60 of 84

For Super A mode

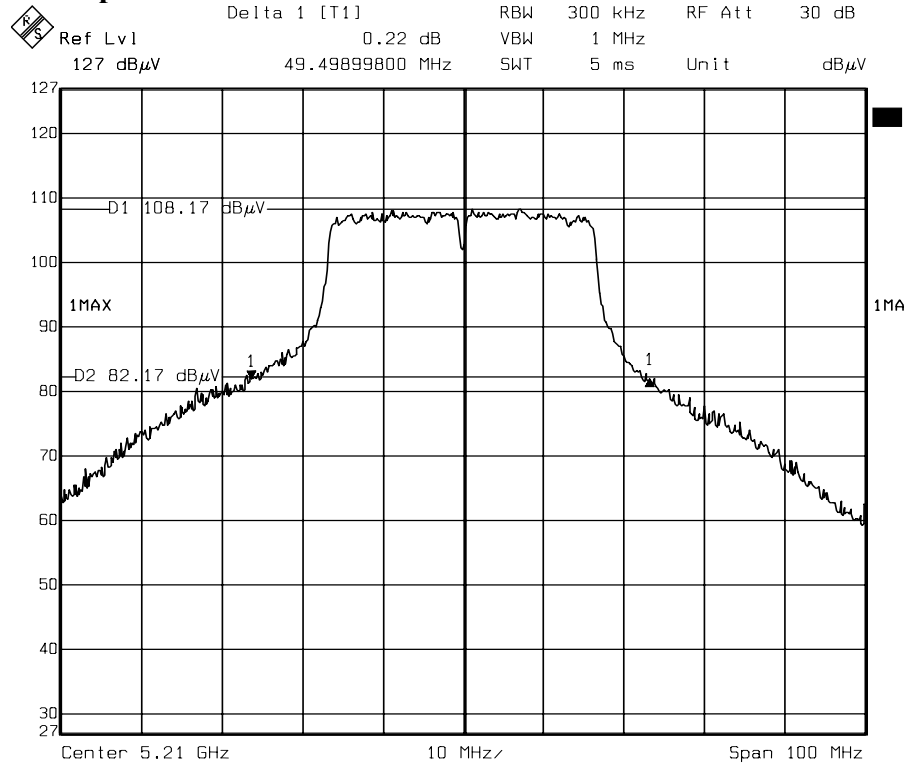

Date: 12.DEC.2004 09:36:20

Channel Low

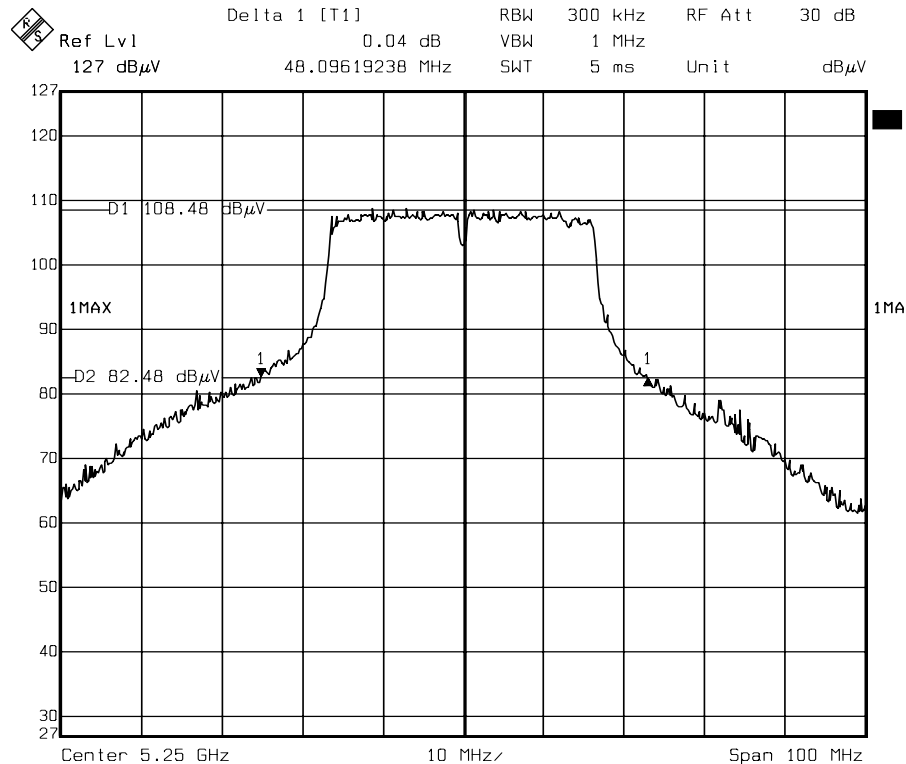

Date: 12.DEC.2004 07:04:29

Channel Middle




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 61 of 84

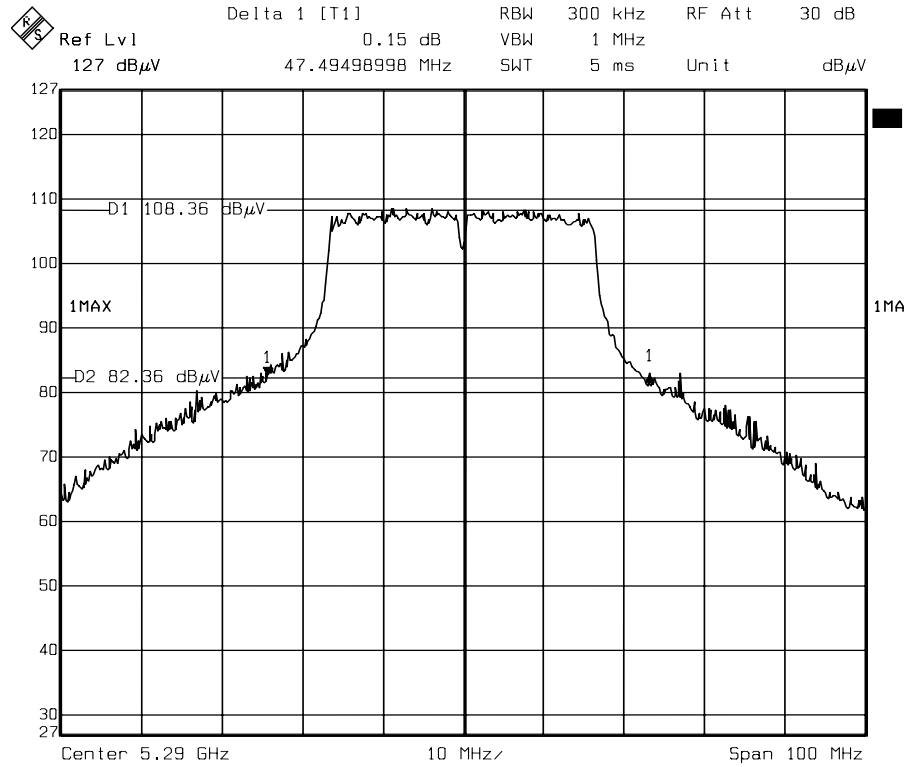

Date: 12.DEC.2004 07:06:02

Channel High

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 62 of 84

5. PEAK CONDUCTED TRANSMIT POWER

5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup





5.3 Limits of Maximum Peak Output Power

Channel Frequency Band	FCC Output Power Limit (dBm)
5.15 ~ 5.25GHz Band	17 or 4+10logB
5.25 ~ 5.35GHz Band	24 or 11+10logB
5.47 ~ 5.725GHz Band	24 or 11+10logB
5.725 ~ 5.825GHz Band	30 or 17+10logB

For 5.15 ~ 5.25GHz band, If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For 5.25 ~ 5.35GHz and 5.47 ~ 5.725GHz, if transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For 5.725 ~ 5.825GHz band, if transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

5.4 Test Procedure

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
Set RBW = 1 MHz.
Set VBW=1 MHz.
2. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
3. Transmitter must operate at full control power for entire sweep of every sweep.
4. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".
5. Trace average 100 traces in power averaging mode.
6. Compute power by integrating the spectrum across the 26 dB EBW of the signal

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82 dB.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 64 of 84

5.6 Test Results

Company	Netgear Incorporated	Test Date	2004/12/13
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 63%

In 5.15 ~ 5.35 GHz Band

For normal 802.11a mode

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	FCC Output Power Limit (dBm)	Pass / Fail
1	5180	25.45	16.01	17	PASS
4	5240	26.35	16.20	17	PASS
5	5260	26.85	16.19	24	PASS
8	5320	25.05	16.37	24	PASS

For Super A mode

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	FCC Output Power Limit (dBm)	Pass / Fail
Low	5210	49.50	16.30	17	PASS
Middle	5250	48.10	15.84	17	PASS
High	5290	47.50	16.06	24	PASS



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 65 of 84

5.7 Photo of Peak Conducted Transmit Power Measurement

In 5.15 ~ 5.35 GHz Band For normal 802.11a mode

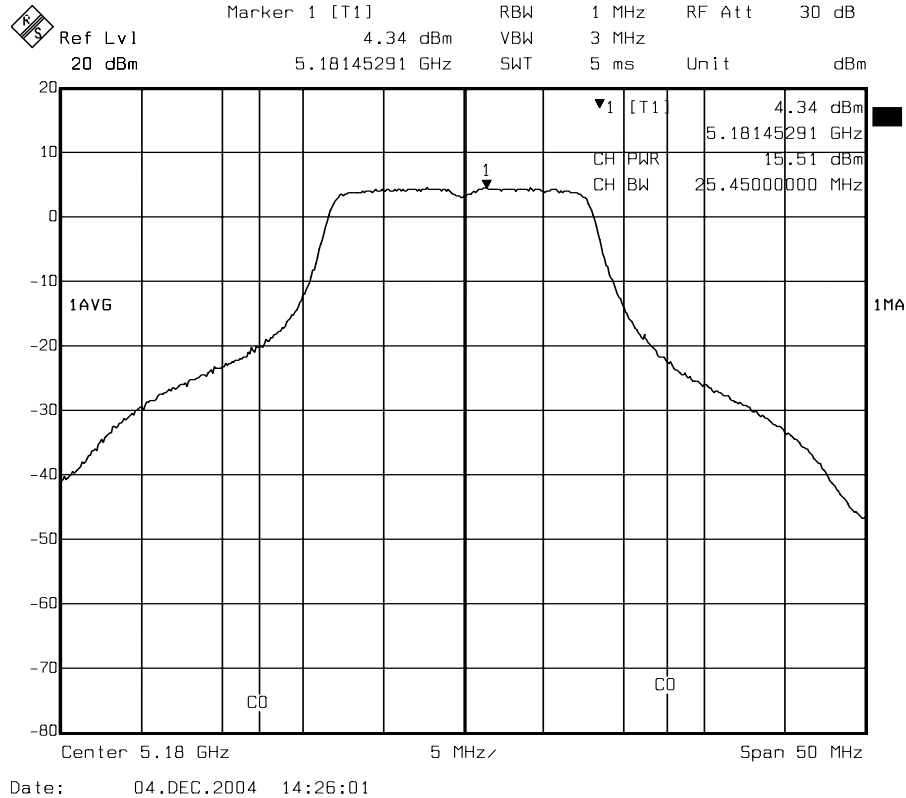

Channel 1

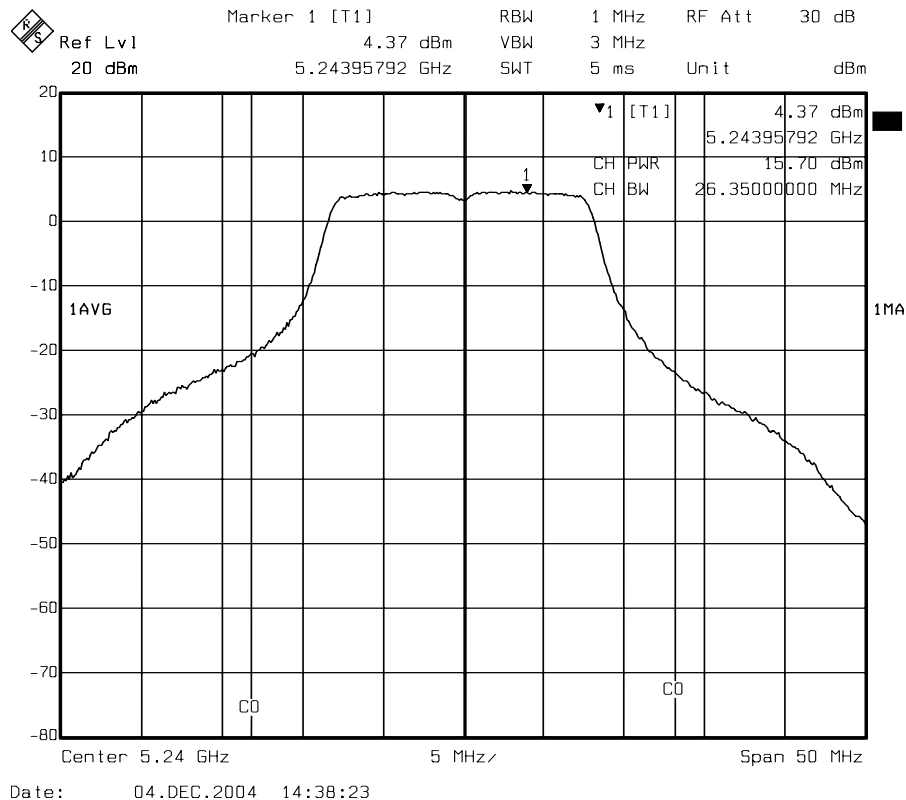

Channel 4




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U


Report No. : ER04-11-043FRFa

Page 66 of 84

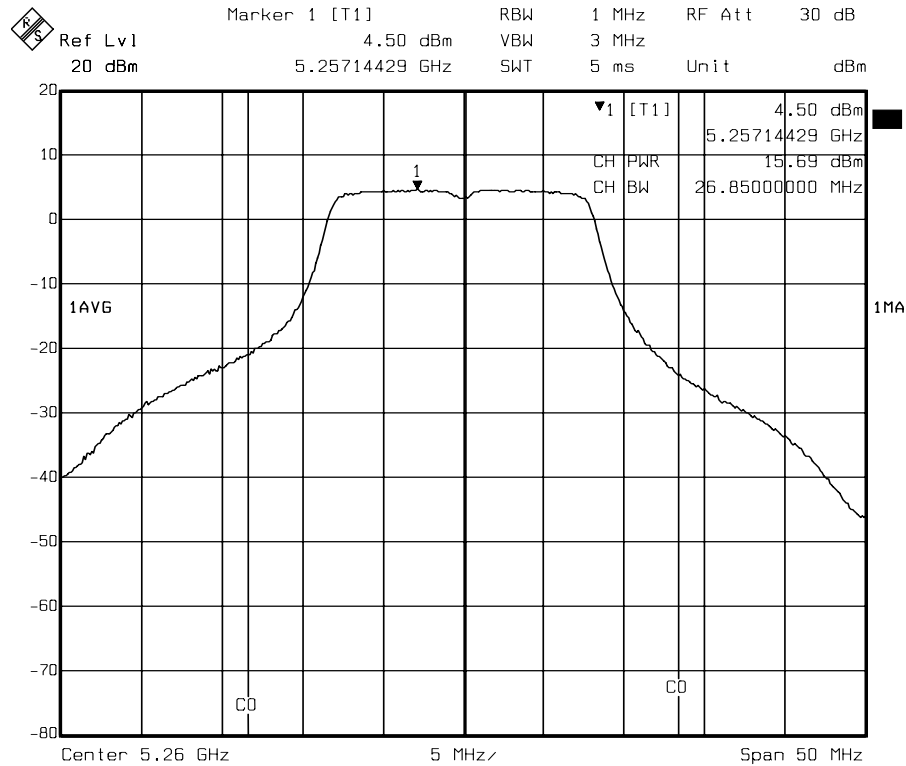

Date: 04.DEC.2004 14:42:31

Channel 5

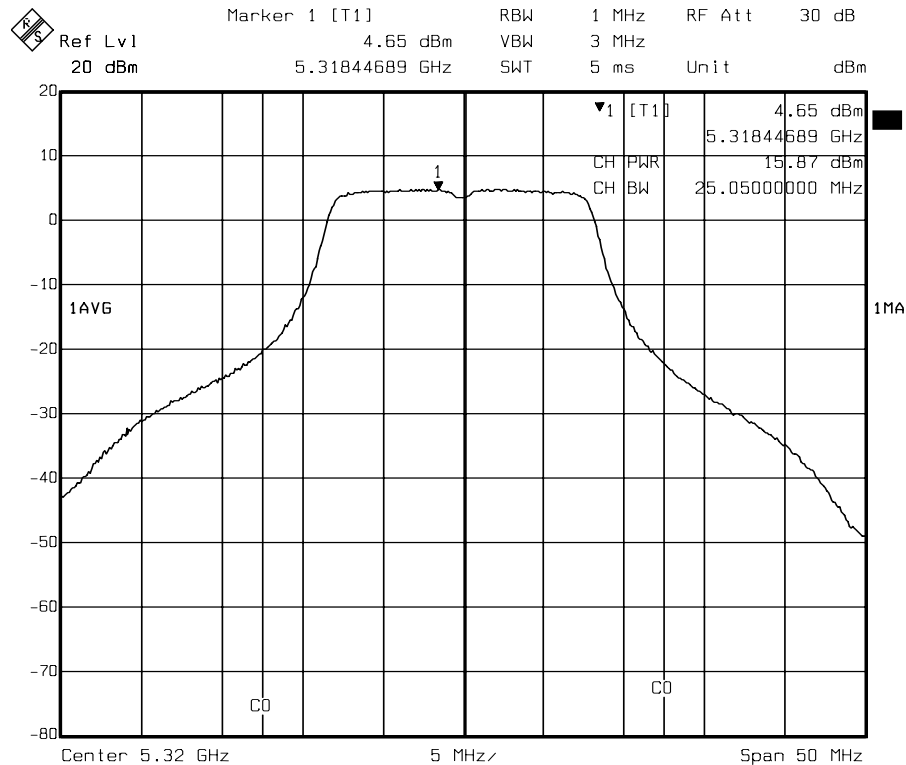

Date: 04.DEC.2004 14:49:00

Channel 8



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 67 of 84

For Super A mode

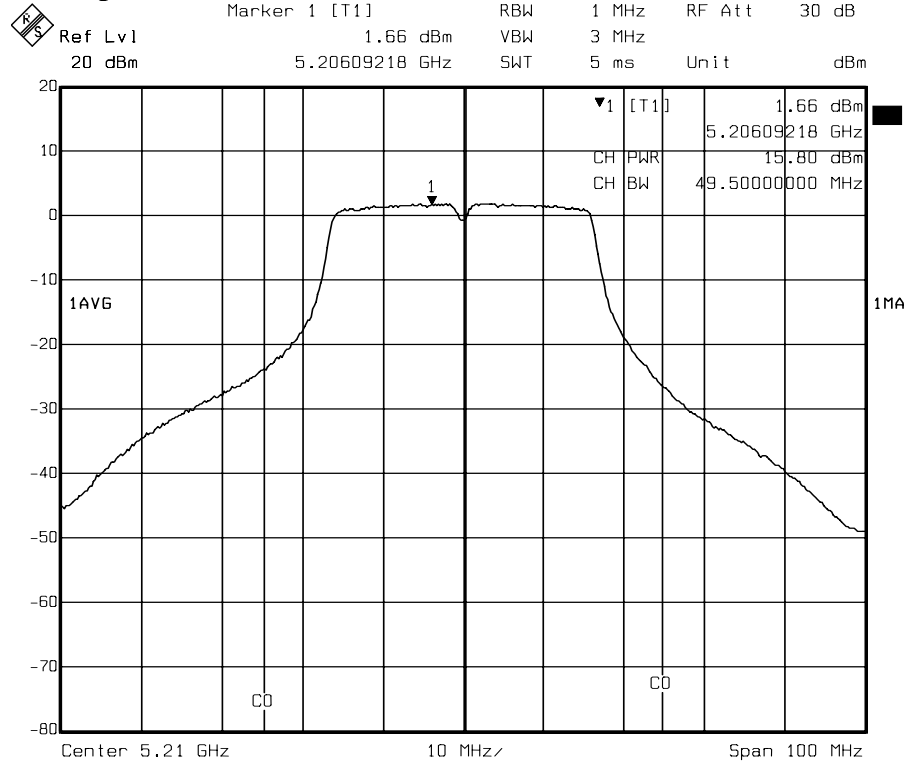

Date: 12.DEC.2004 10:51:29

Channel Low

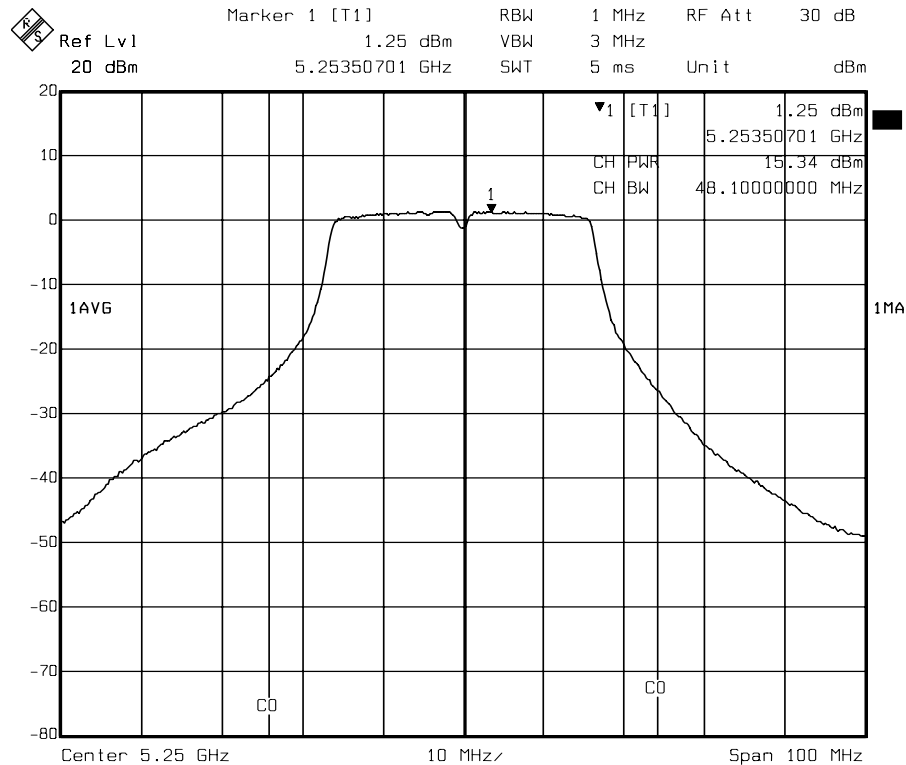

Date: 12.DEC.2004 10:55:56

Channel Middle




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 68 of 84

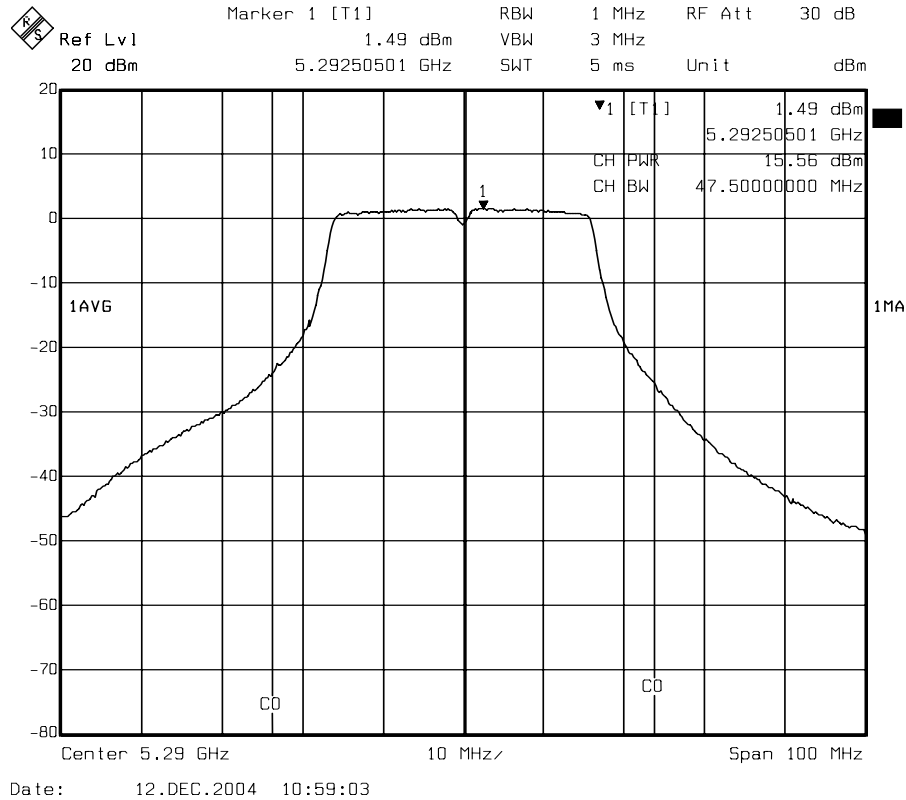

Channel High



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 69 of 84

6. PEAK POWER DENSITY MEASUREMENT

6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

Channel Frequency Band	FCC Peak Power Spectrum density Limit (dBm)
5.15 ~ 5.25GHz Band	4 dBm/MHz
5.25 ~ 5.35GHz Band	11dBm/MHz
5.47 ~ 5.725GHz Band	11 dBm/MHz
5.725 ~ 5.825GHz Band	17 dBm/MHz



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 70 of 84

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 1MHz RBW and 3MHz VBW. The power spectral density was measured and recorded.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Company	Netgear Incorporated	Test Date	2004/12/13
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 63%

In 5.15 ~ 5.35 GHz Band

For normal 802.11a mode

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Peak Power Spectrum density (dBm)	FCC Peak Power Spectrum density Limit (dBm)	Pass / Fail
1	5180	25.45	-2.06	4 dBm/MHz	PASS
4	5240	26.35	-2.37	4 dBm/MHz	PASS
5	5260	26.85	-1.41	11 dBm/MHz	PASS
8	5320	25.05	-2.41	17 dBm/MHz	PASS

For Super A mode

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Peak Power Spectrum density (dBm)	FCC Peak Power Spectrum density Limit (dBm)	Pass / Fail
Low	5210	49.50	-3.36	4 dBm/MHz	PASS
Middle	5250	48.10	-3.06	4 dBm/MHz	PASS
High	5290	47.50	-4.03	11 dBm/MHz	PASS

Note : Peak Power spectrum density test result = peak power spectrum density reading + cable loss.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 71 of 84

6.7 Photo of Peak Power Density Measurement

In 5.15 ~ 5.35GHz Band For normal 802.11a mode

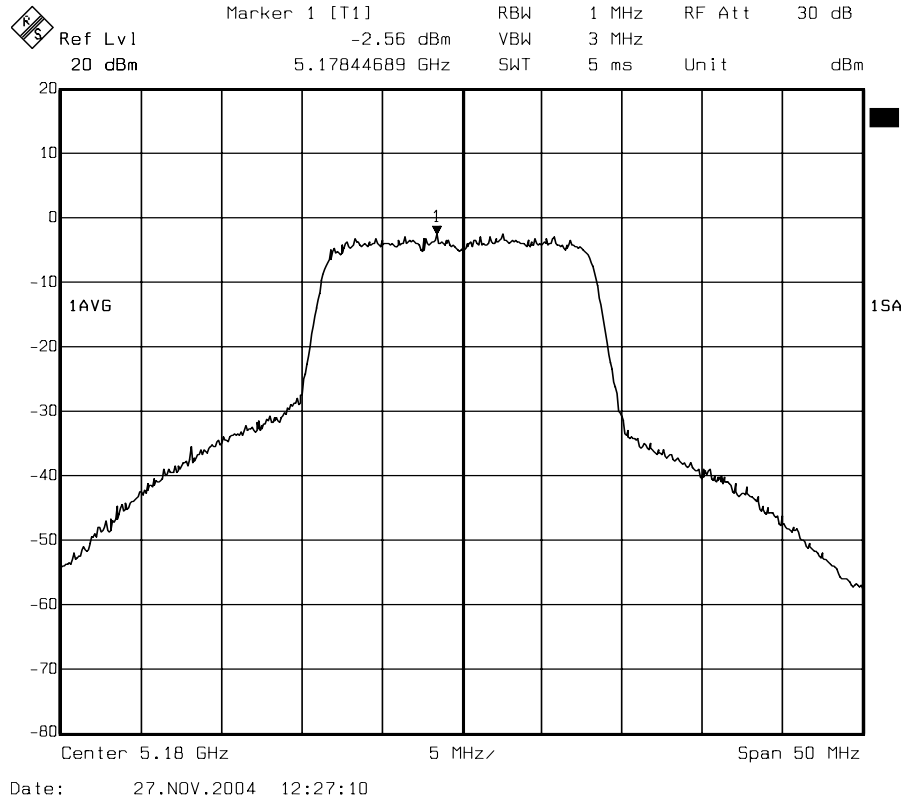

Channel 1

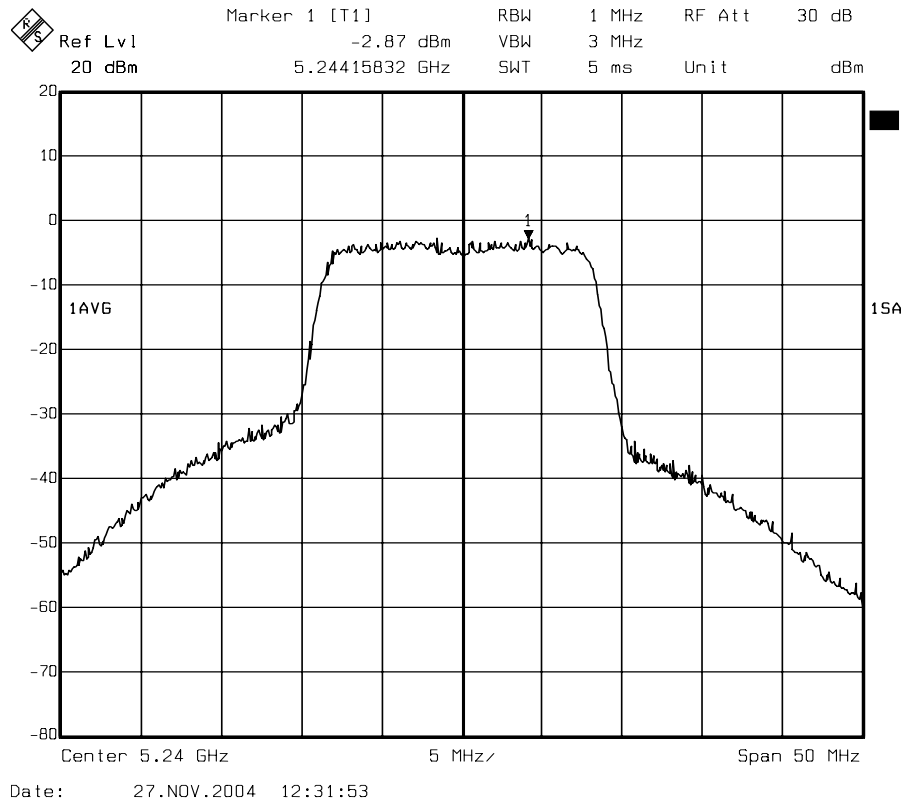

Channel 4




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U


Report No. : ER04-11-043FRFa

Page 72 of 84

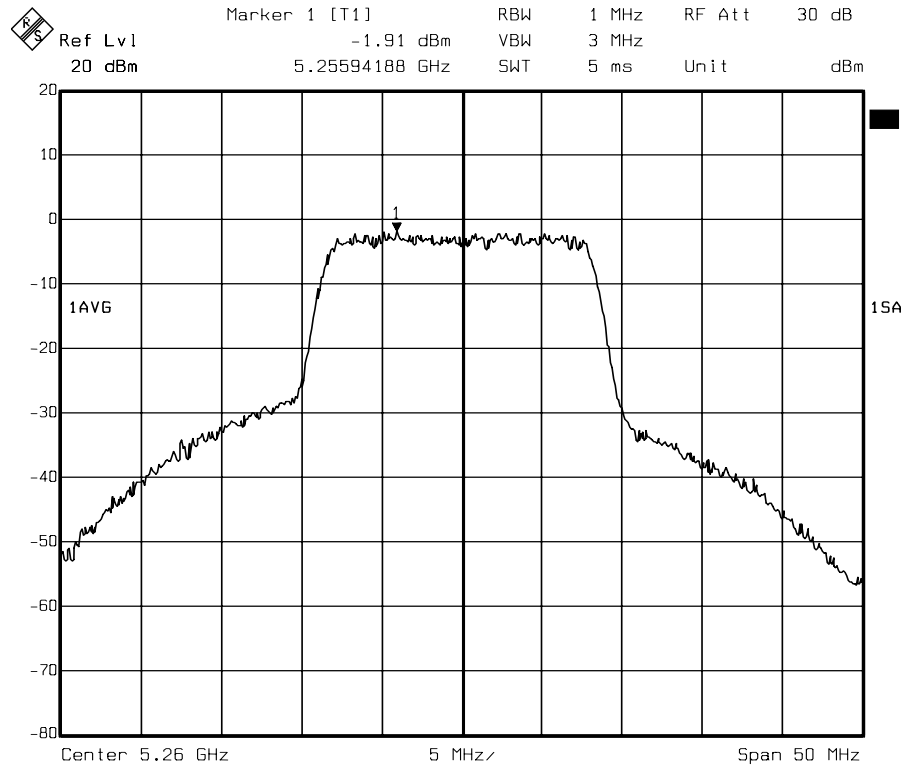

Date: 27.NOV.2004 12:35:32

Channel 5

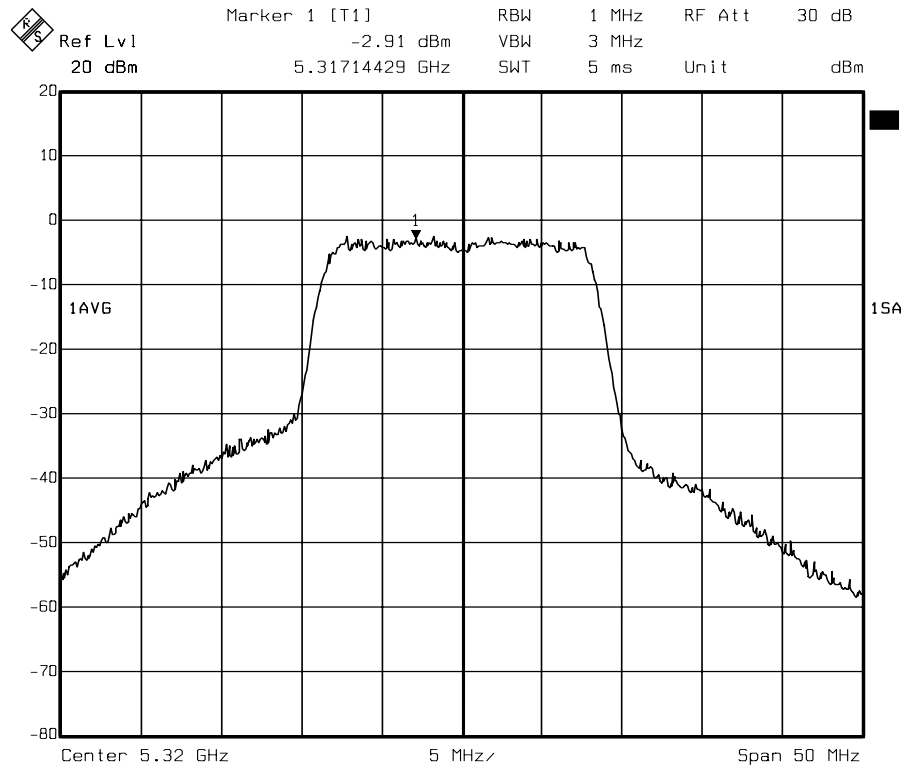

Date: 27.NOV.2004 12:37:02

Channel 8



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 73 of 84

For Super A mode

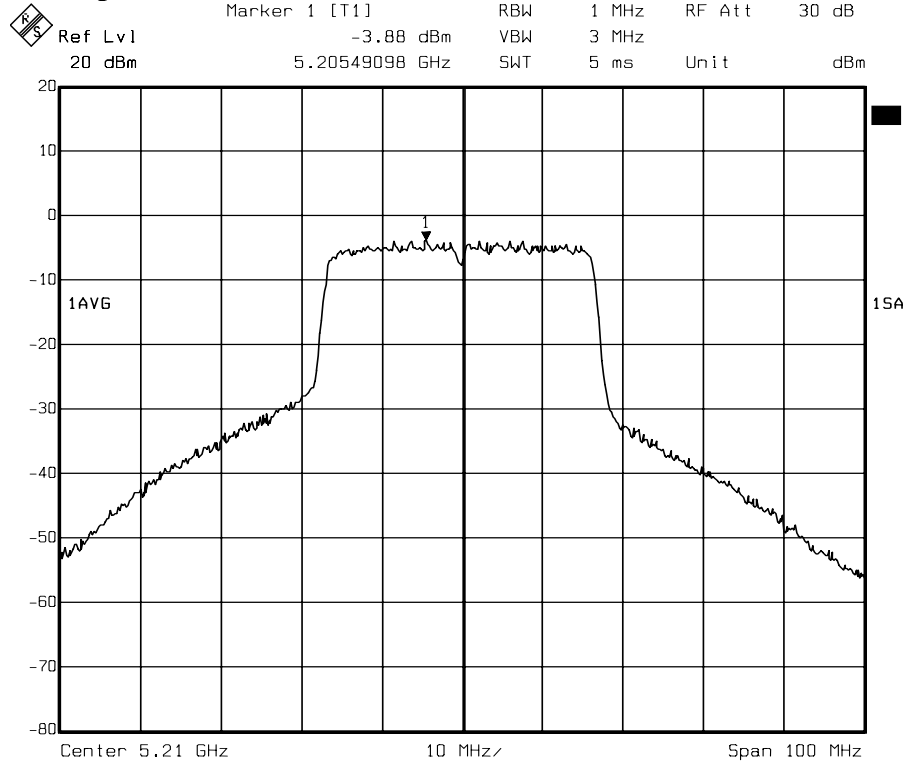

Date: 12.DEC.2004 10:14:28

Channel Low

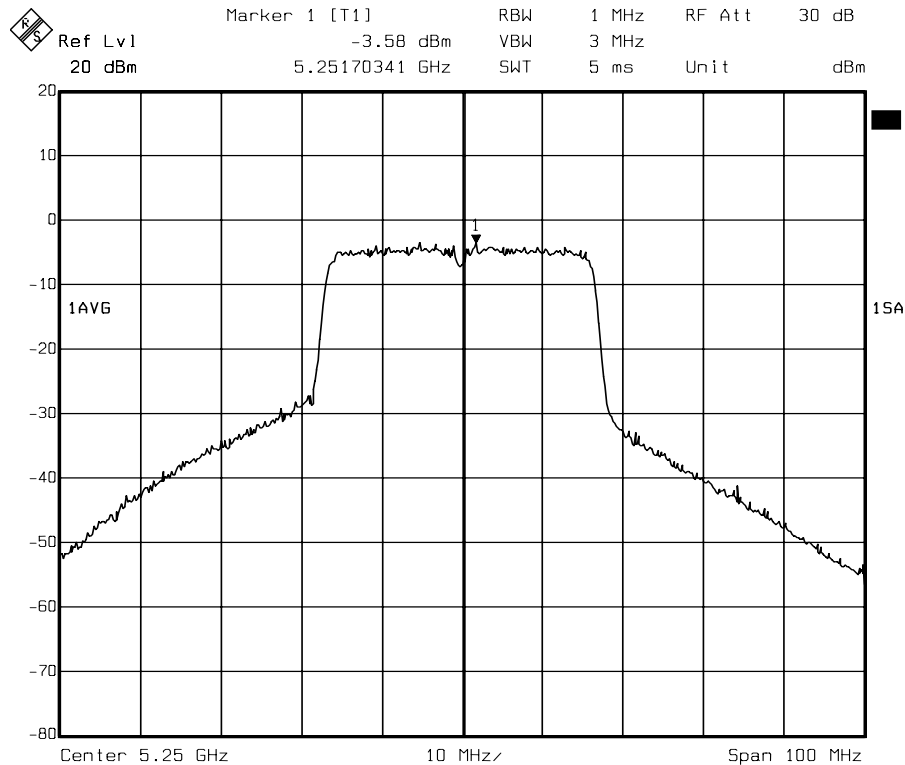

Date: 12.DEC.2004 10:13:44

Channel Middle




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 74 of 84

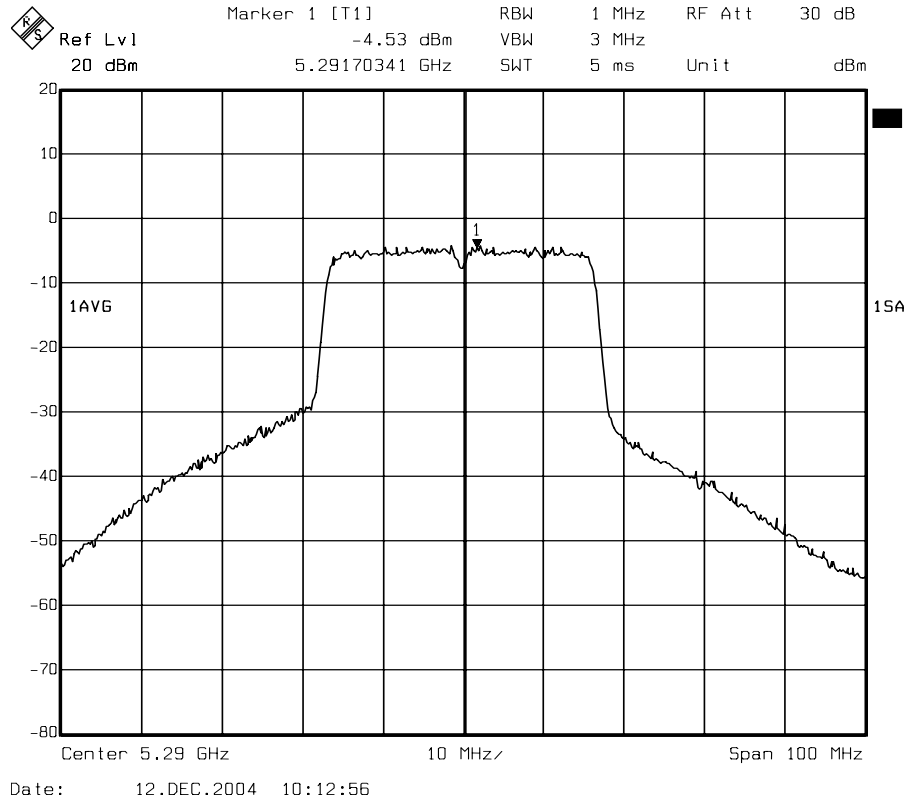

Channel High



7. PEAK POWER EXCURSION MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Band Edge Emissions Measurement

The largestest distance between the two traces described in test procedure must be fewer than 13dB. For all frequencies across the emission bandwidth.

Channel Frequency Band	(dBm)
5.15 ~ 5.25GHz Band	13 dB
5.25 ~ 5.35GHz Band	13dB
5.47 ~ 5.725GHz Band	13 dB
5.725 ~ 5.825GHz Band	13 dB

7.4 Test Procedure

- Set the spectrum to view the entire emission bandwidth.
- Measure trace 1:
- Set RBW=1MHz, VBW $\geq$ 3MHz with peak detector and Max-hold setting.
- Measure trace2:
- Set RBW=1MHz, VBW $\geq$ 30kHz with peak detector and Max-hold setting
- Plot the result of the two traces and mark the largest distance between the two trace.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 76 of 84

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

7.6 Test Results

Company	Netgear Incorporated	Test Date	2004/12/13
Product Name	Double 108 Mbps Wireless USB 2.0 Adapter WG111U	Test By	Alan Fan
Model Name	WG111U	TEMP & Humidity	21.1°C, 63%

In 5.15 ~ 5.35GHz Band
For normal 802.11a mode

Channel	Channel Frequency (MHz)	Largest distance between trace 1 and trace 2 (dB)	FCC Peak Excursion Limit (dBm)	Pass / Fail
1	5180	9.04	< 13	PASS
4	5240	9.53	< 13	PASS
5	5260	9.35	< 13	PASS
8	5320	9.58	< 13	PASS

For Super A mode

Channel	Channel Frequency (MHz)	Largest distance between trace 1 and trace 2 (dB)	FCC Peak Excursion Limit (dBm)	Pass / Fail
Low	5210	9.66	< 13	PASS
Middle	5250	9.69	< 13	PASS
High	5290	9.46	< 13	PASS



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 77 of 84


7.7 Photo of Peak Power Excursion Measurement

In 5.15 ~ 5.35 GHz Band For normal 802.11a mode

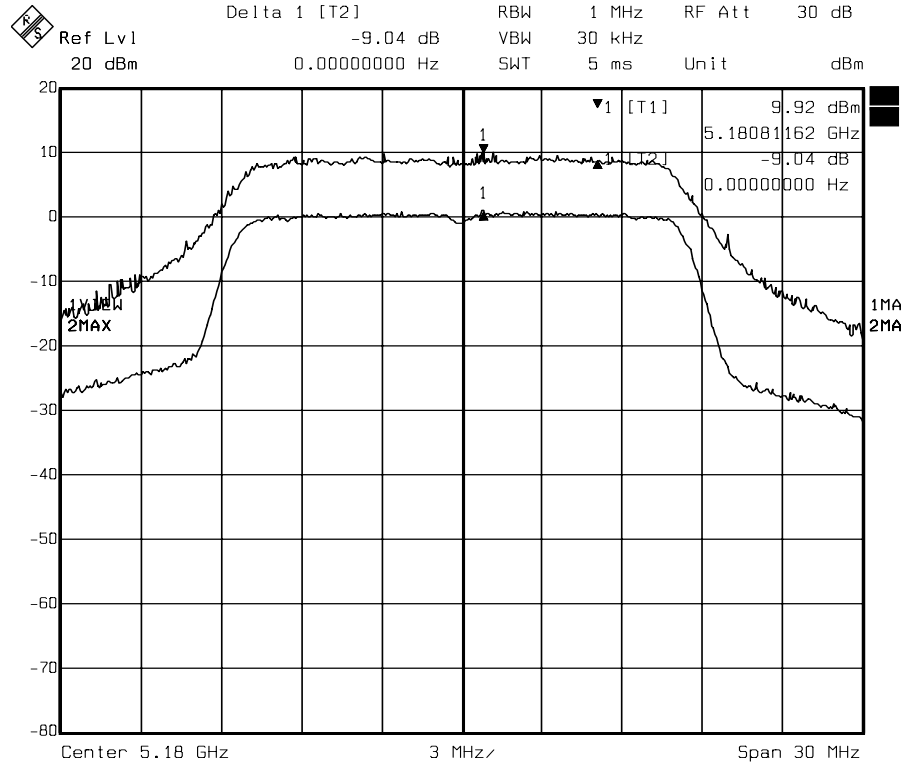

Date: 27.NOV.2004 13:19:39

Channel 1

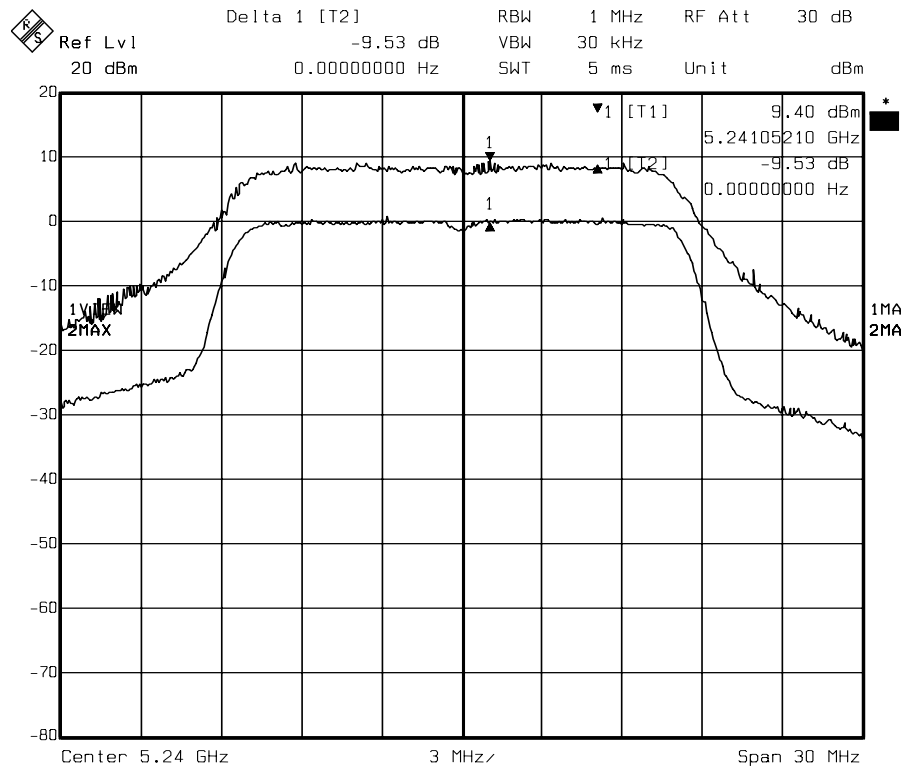

Date: 27.NOV.2004 13:15:02

Channel 4




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U


Report No. : ER04-11-043FRFa

Page 78 of 84

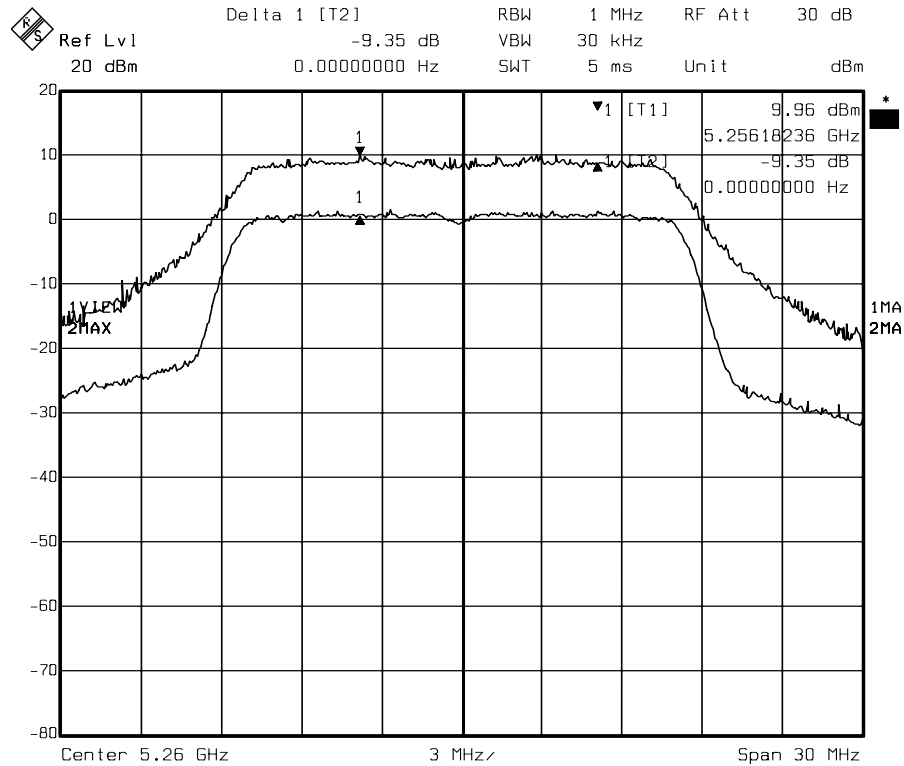

Date: 27.NOV.2004 13:10:18

Channel 5

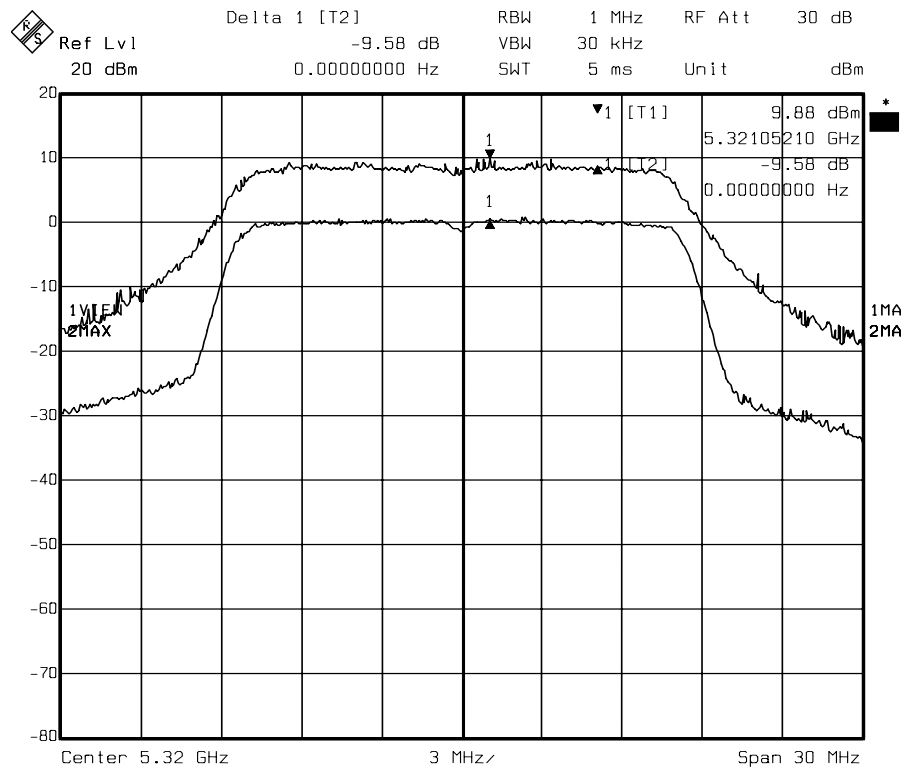

Date: 27.NOV.2004 13:06:57

Channel 8



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa


Page 79 of 84

For Super A mode

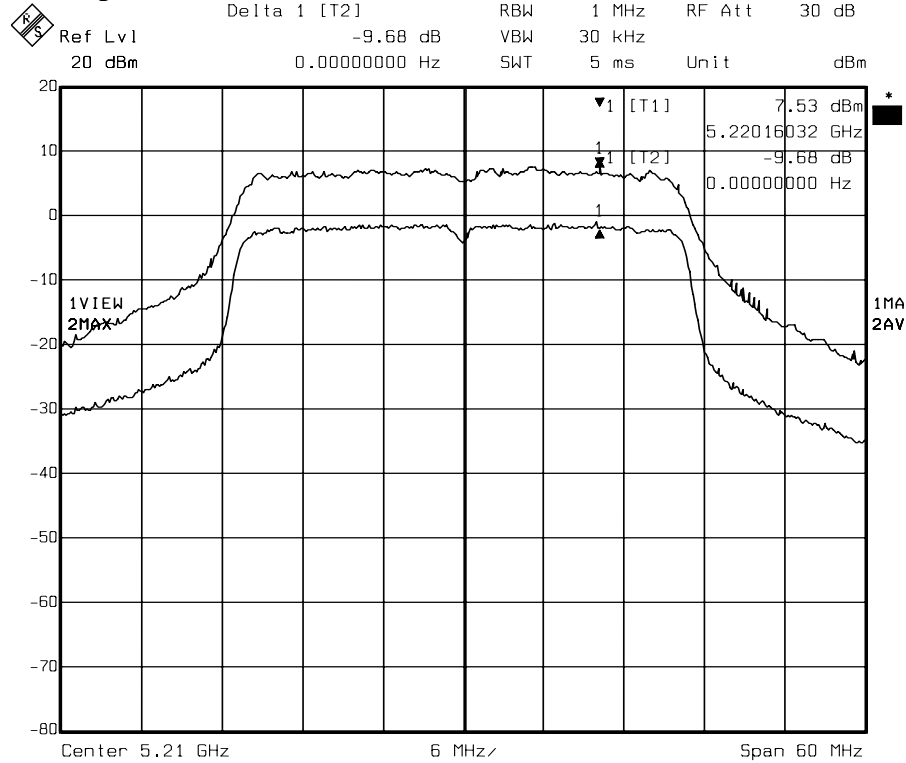

Date: 12.DEC.2004 10:32:04

Channel Low

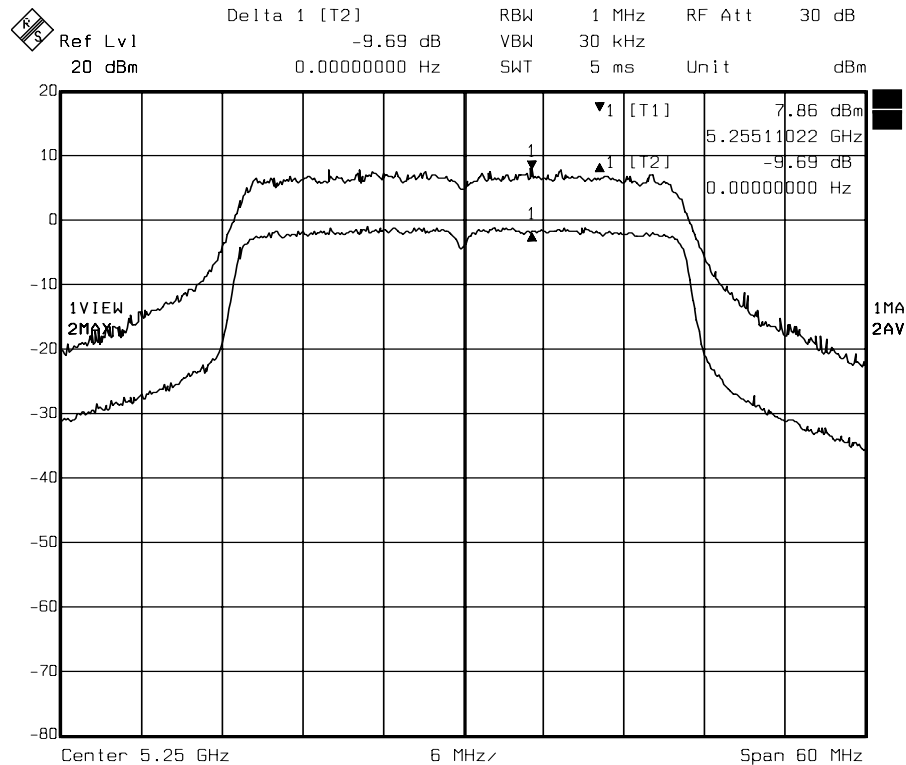

Date: 12.DEC.2004 10:35:01

Channel Middle




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PY3WG111U

Report No. : ER04-11-043FRFa

Page 80 of 84

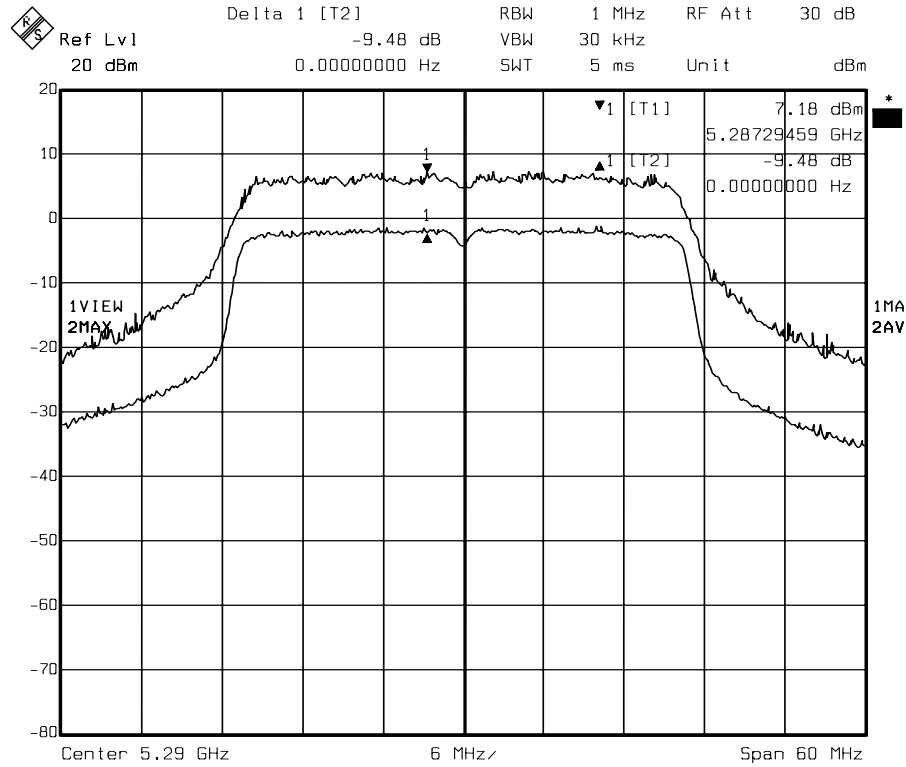

Date: 12.DEC.2004 10:38:28

Channel High

8. REQUIREMENT STABILITY


8.1 Standard Applicable

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
HP SPECTRUM ANALYZER	8595E	3829U01362	July 30, 2004	1 Year

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.2 Test Setup

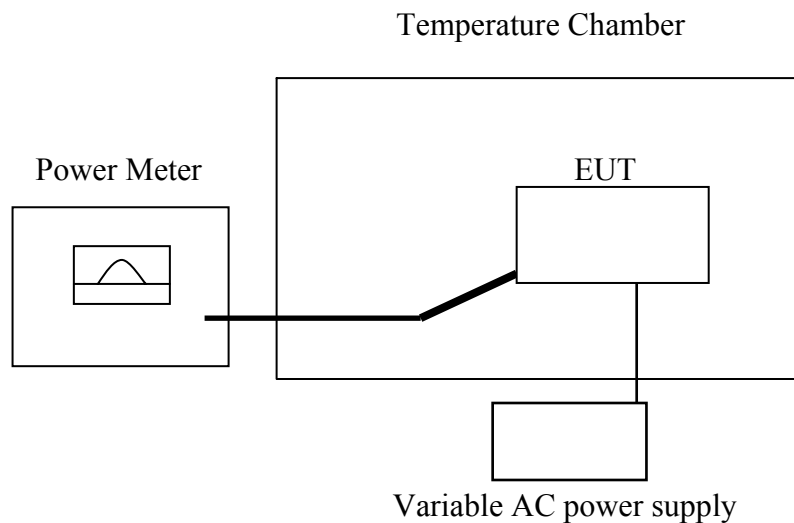

8.3 Limits of Out of Band Emissions Measurement

The frequency tolerance of the carrier signal shall be maintained within $\pm 20\text{ppm}$ of the operating frequency over a temperature variation of 0 to 50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 25 °C at normal.



8.4 Test Procedure

1. The EUT was placed inside a temperature test chamber and powered by AC voltage supply.
2. Turn the EUT on and connect the RF output port to a spectrum analyzer.
3. Set the temperature in chamber to the declared highest temperature.
4. Wait approximately 30 min to make sure the temperature of the chamber is stabilized.
5. Measure and record the center frequency of carrier at 85% to 115% nominal supplied voltage.
6. Repeat step 4 and 5 with the temperature of chamber is set to the normal temperature, 25°C.
7. Repeat step 4 and 5 with the temperature of chamber is set to the lowest temperature.

8.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.



8.6 Test Results

TEST CONDITIONS		Operating Frequency (MHz) 5180MHz			
		Measured Frequency (MHz)	Frequency Difference (KHz)	Limit (KHz)	Test Result
T _{min} (0°C)	V _{min} (102)V	5180.02806	28.0600	±103.6	PASS
	V _{nom} (120)V	5180.02806	28.0600	±103.6	PASS
	V _{max} (138)V	5180.02806	28.0600	±103.6	PASS
T _{nom} (25°C)	V _{min} (102)V	5179.93186	-68.1400	±103.6	PASS
	V _{nom} (120)V	5179.93988	-60.1200	±103.6	PASS
	V _{max} (138)V	5179.93186	-68.1400	±103.6	PASS
T _{max} (50°C)	V _{min} (102)V	5179.93988	-60.1200	±103.6	PASS
	V _{nom} (120)V	5179.91583	-84.1700	±103.6	PASS
	V _{max} (138)V	5179.93988	-60.1200	±103.6	PASS

TEST CONDITIONS		Operating Frequency (MHz) 5320MHz			
		Measured Frequency (MHz)	Frequency Difference (KHz)	Limit (KHz)	Test Result
T _{min} (0°C)	V _{min} (102)V	5320.03607	36.0700	±106.4	PASS
	V _{nom} (120)V	5320.02004	20.0400	±106.4	PASS
	V _{max} (138)V	5320.03607	36.0700	±106.4	PASS
T _{nom} (25°C)	V _{min} (102)V	5319.96393	-36.0700	±106.4	PASS
	V _{nom} (120)V	5319.96393	-36.0700	±106.4	PASS
	V _{max} (138)V	5319.96393	-36.0700	±106.4	PASS
T _{max} (50°C)	V _{min} (102)V	5319.93186	-68.1400	±106.4	PASS
	V _{nom} (120)V	5319.93988	-60.1200	±106.4	PASS
	V _{max} (138)V	5319.95591	-44.0900	±106.4	PASS



9. ANTENNA REQUIREMENT

9.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (d), Any U-NII device that operates in the 5.15 ~ 5.25GHz band shall use a transmitting antenna that is an integral part of the device. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For 5.25 ~ 5.35GHz and 5.47 ~ 5.725GHz, if transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For 5.725 ~ 5.825GHz band, if transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

9.2 Antenna Connected Construction

The antenna used for this product is Patch antenna . The antenna is soldered on PCB and the peak Gain of this antenna is only 3.73dBi at 5GHz, -0.09dBi at 2.4GHz.