



No. : BCTC/RF-EMC-005 Page: 60 of 85 / / / Edition : B.1



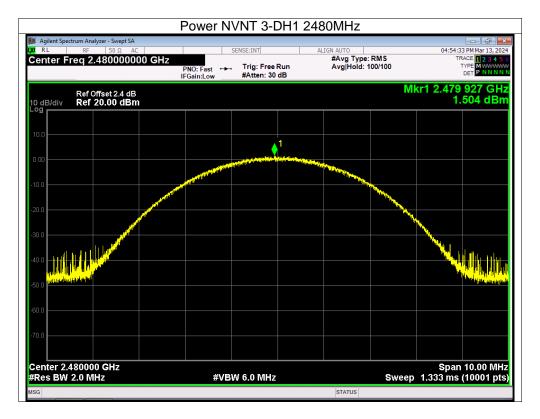

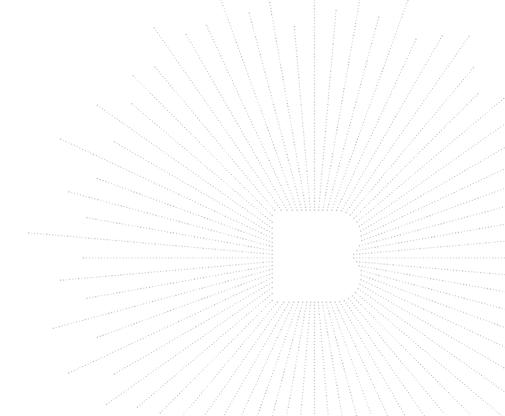

No. : BCTC/RF-EMC-005 Page: 61 of 85 / / / / Ldition : B.1



## 12. Hopping Channel Separation

## 12.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

#### 12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

## 12.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 12.4 Test Result

odulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.527	PASS
GFSK	Middle	1.000	0.519	PASS
GFSK	High	1.002	0.557	PASS
π/4 DQPSK	Low	1.002	0.812	PASS
π/4 DQPSK	Middle	1.000	0.818	PASS
π/4 DQPSK	High	1.002	0.823	PASS
8DPSK	Low	1.002	0.802	PASS
8DPSK	Middle	1.000	0.805	PASS
8DPSK	High	1.000	0.809	PASS

No.: BCTC/RF-EMC-005 Page: 62 of 85 / / / / Edition: B.1

TC





Center 2.441500 GHz #Res BW 30 kHz

> 2.441 002 GHz 2.442 002 GHz

Report No.: BCTC2403663573E


Span 2.000 MHz Sweep 2.133 ms (1001 pts)



No.: BCTC/RF-EMC-005 Page: 63 of 85 / / Edition: B.1


#VBW 100 kHz



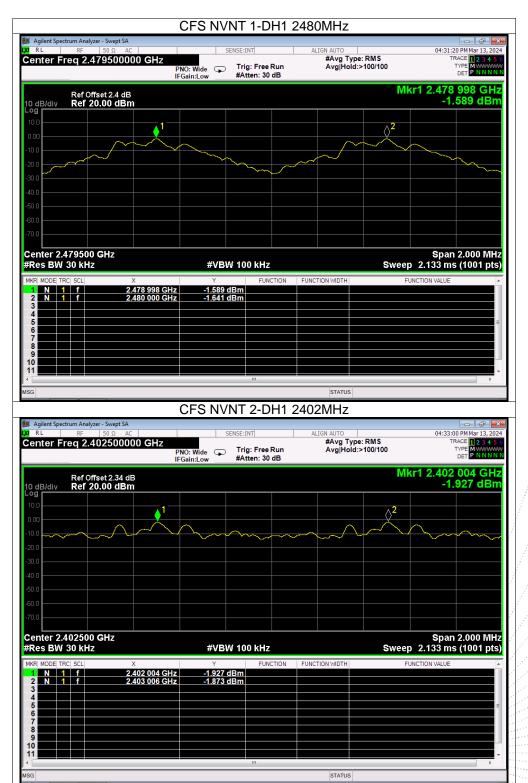


No. : BCTC/RF-EMC-005 Page: 64 of 85 / / / Edition : B.1

**BCTC** 

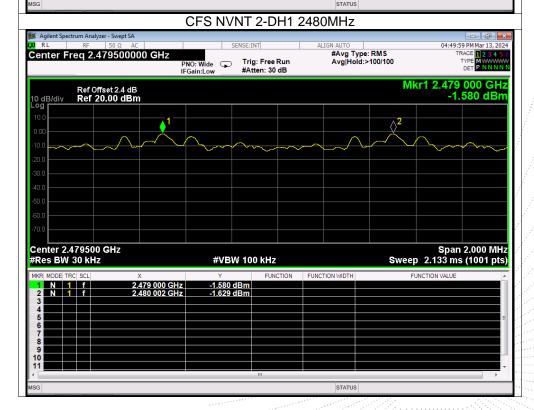

Page: 65 of 85 No.: BCTC/RF-EMC-005 Edition: B.1




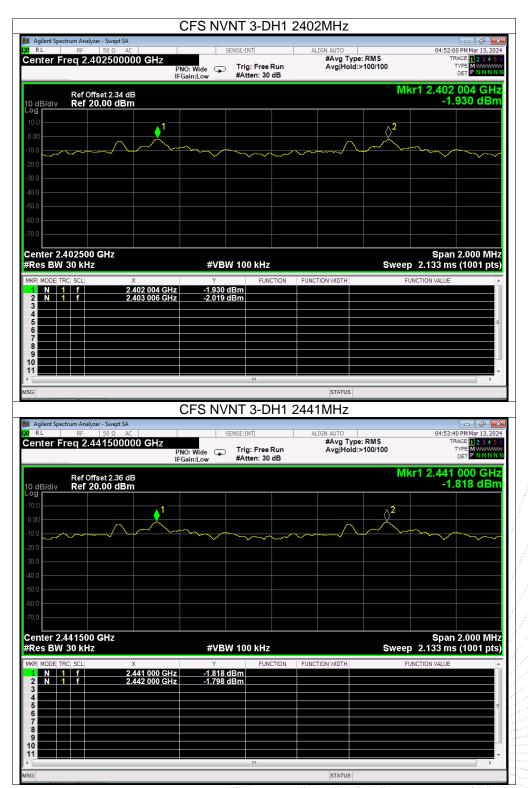




No.: BCTC/RF-EMC-005

## Report No.: BCTC2403663573E

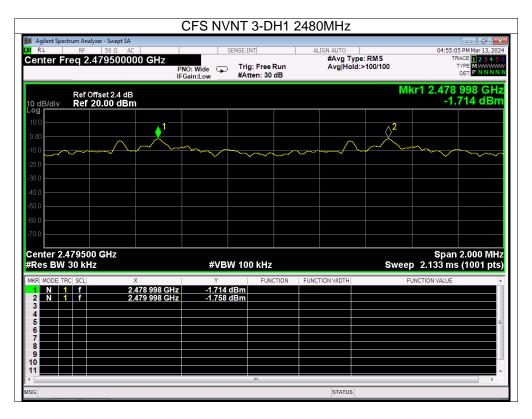

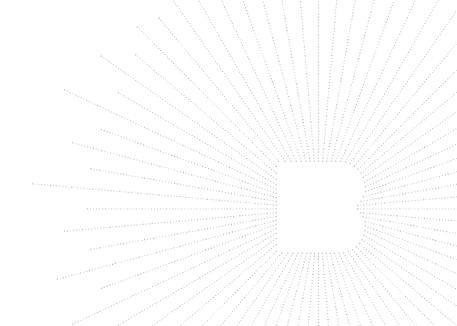

Edition: B.1

Page: 67 of 85



## 13. Number Of Hopping Frequency

## 13.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 13.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


#### 13.4 Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass


No.: BCTC/RF-EMC-005 Page: 68 of 85 / / / / Edition: B.1

,TC

еро

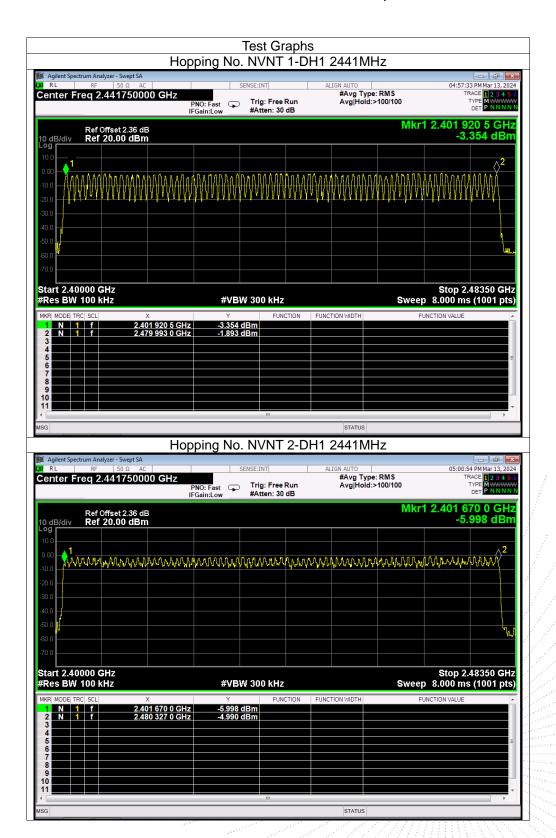



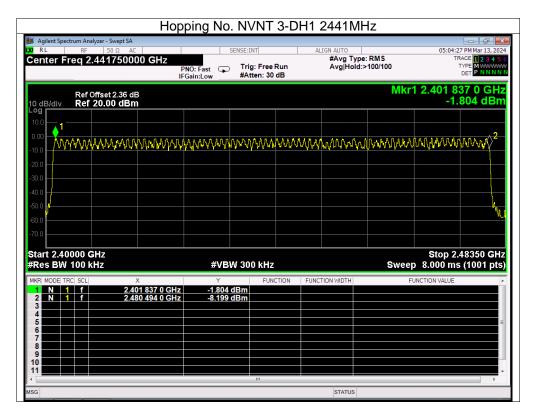





14. Dwell Time

# 14.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

Report No.: BCTC2403663573E

#### 14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 14.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set spectrum analyzer span = 0. Centred on a hopping channel;
- 3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- 4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


#### 14.4 Test Result


Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.411	131.109	319	31600	400	Pass
1-DH3	2441	1.664	262.912	158	31600	400	Pass
1-DH5	2441	2.911	343.498	118	31600	400	Pass
2-DH1	2441	0.42	133.56	318	31600	400	Pass
2-DH3	2441	1.667	271.721	163	31600	400	Pass
2-DH5	2441	2.914	314.712	108	31600	400	Pass
3-DH1	2441	0.417	132.189	317	31600	400	Pass
3-DH3	2441	1.667	270.054	162	31600	400	Pass
3-DH5	2441	2.922	303.888	104	31600	400	Pass

Note: Total Dwell Time (ms) = Pulse Time (ms)\*Burst Count

No. : BCTC/RF-EMC-005 Page: 71 of 85 / / / / / Edițion : B.1




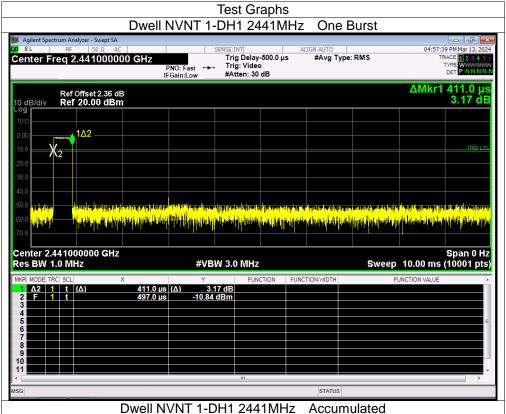

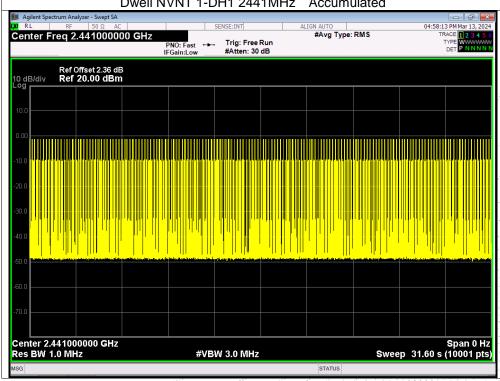

No. : BCTC/RF-EMC-005 Page: 72 of 85 / / / Edition : B.1




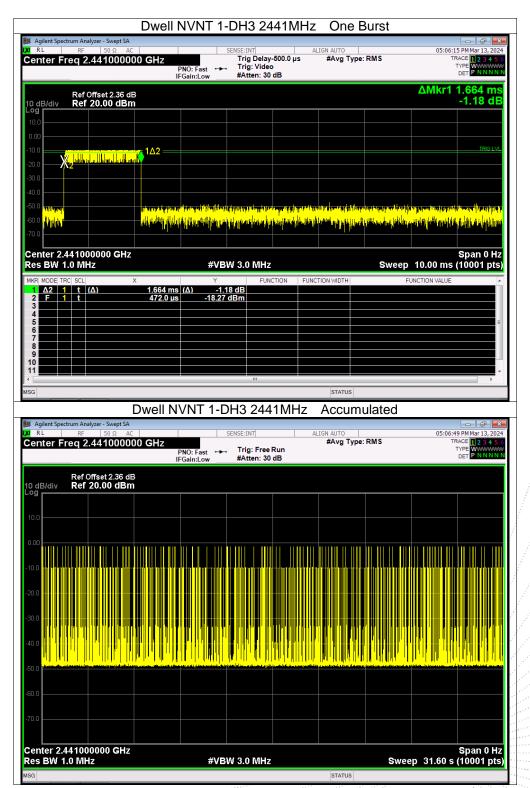

No.: BCTC/RF-EMC-005 Page: 73 of 85 / / / Edition 18.1




epor

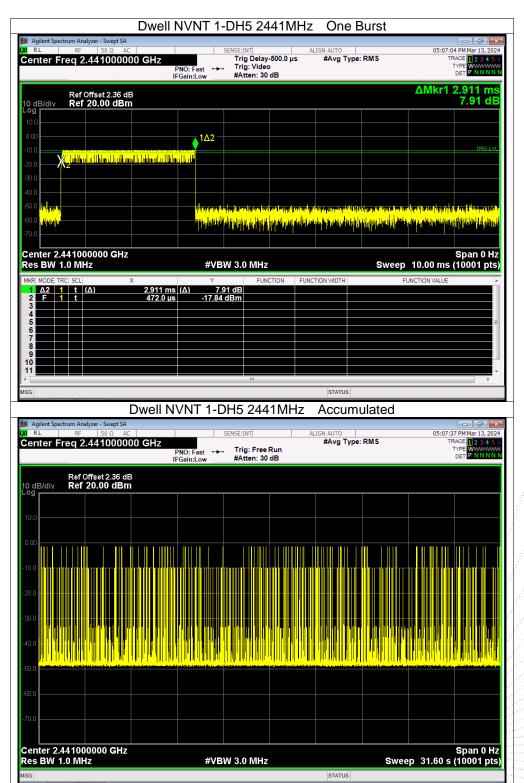


No.: BCTC/RF-EMC-005 Page: 74 of 85 / / / / Edition : B.1



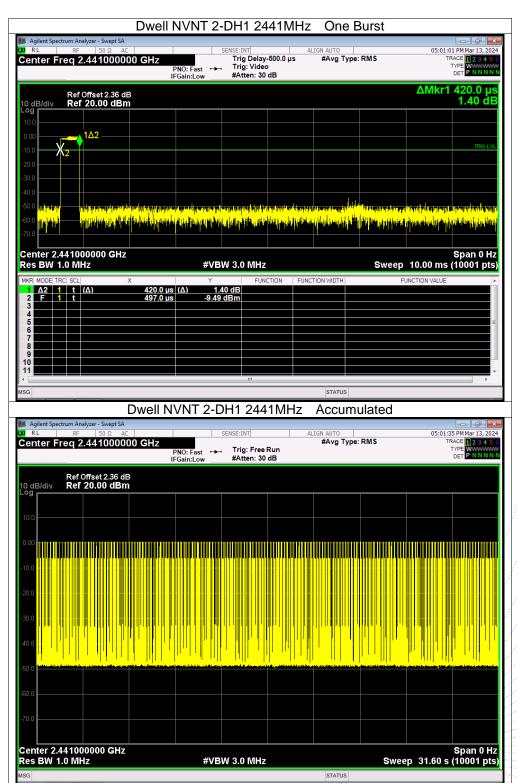


No. : BCTC/RF-EMC-005 Page: 75 of 85 / / / / Edițion : B.1



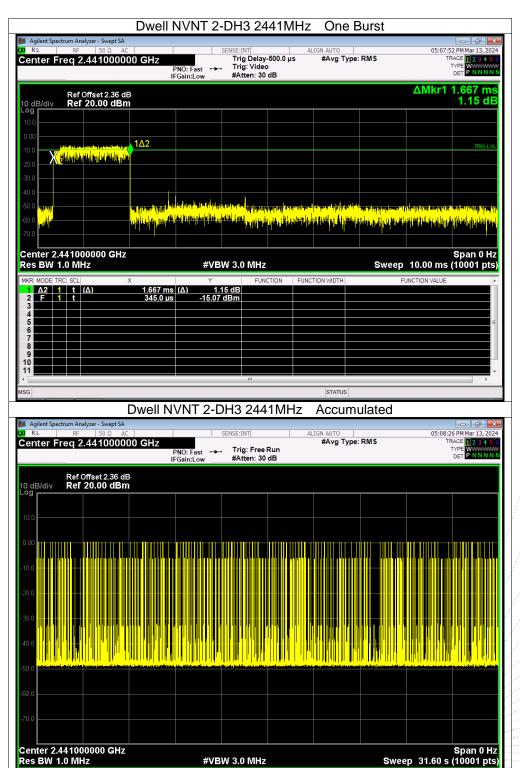


No.: BCTC/RF-EMC-005 Page: 76 of 85 / / Edition: B.1



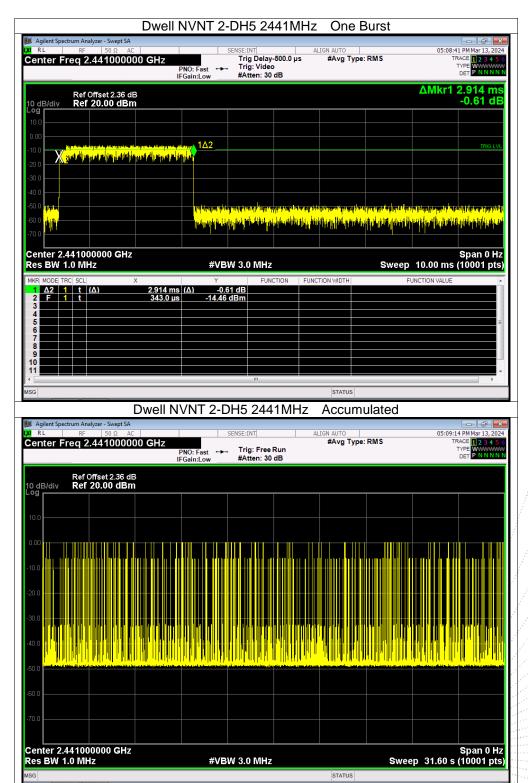


No. : BCTC/RF-EMC-005 Page: 77 of 85 / / / | Ldition : B.1



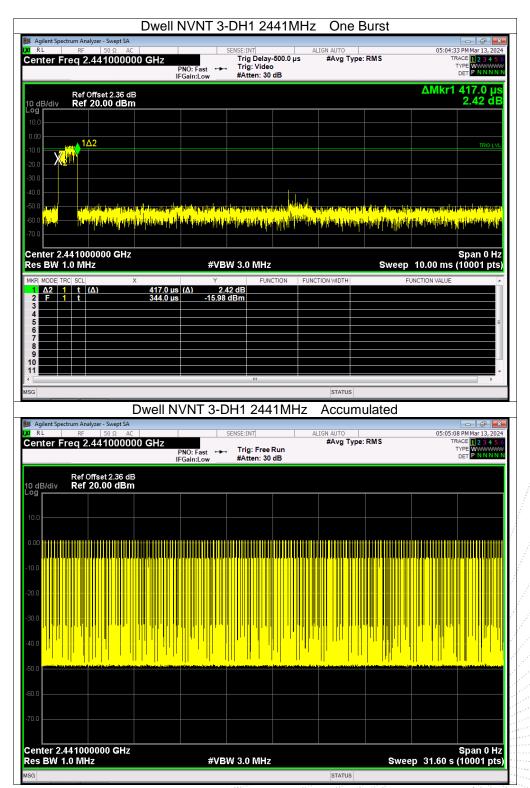




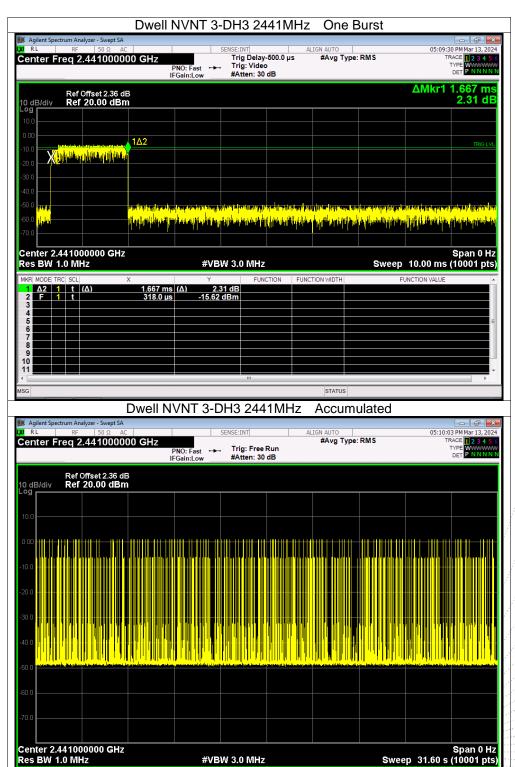

No.: BCTC/RF-EMC-005 Page: 79 of 85 / / / Edition: B.1



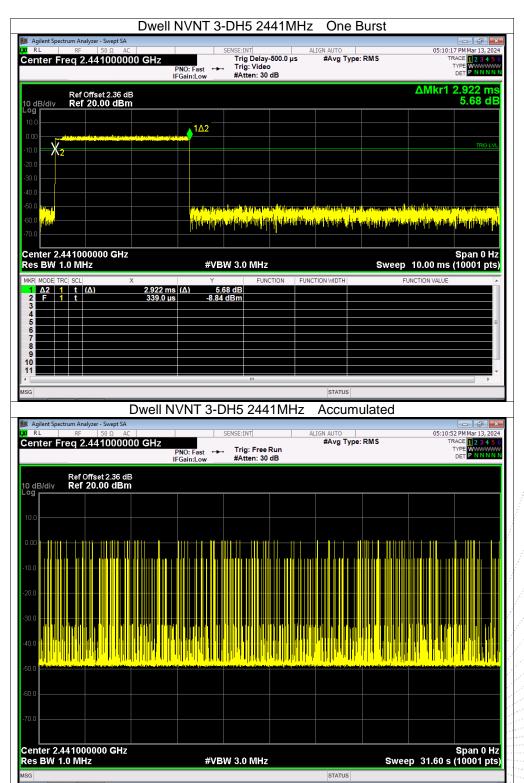

No. : BCTC/RF-EMC-005 Page: 80 of 85 / / / | Ldition : B.1




## 15. Antenna Requirement

#### 15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

## 15.2 Test Result

The EUT antenna is PCB antenna, fulfill the requirement of this section.

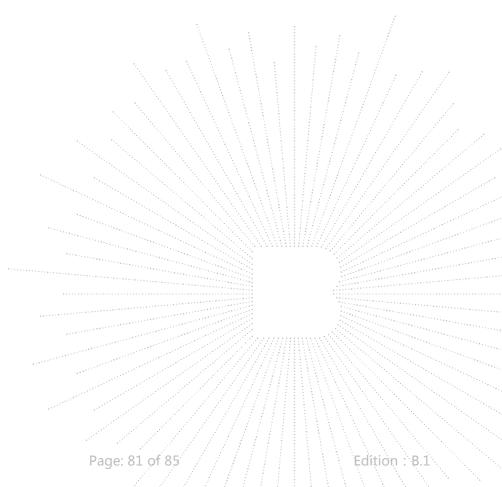

No.: BCTC/RF-EMC-005



# 16. EUT Photographs

**EUT Photo** 



NOTE: Appendix-Photographs Of EUT Constructional Details

No.: BCTC/RF-EMC-005 Page: 82 of 85 / / Edition: B.1




# 17. EUT Test Setup Photographs

### Conducted emissions



#### Radiated Measurement Photos

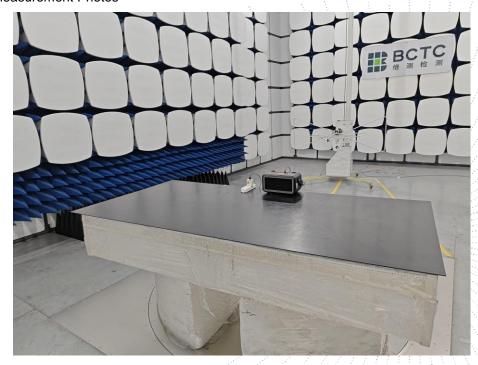


No.: BCTC/RF-EMC-005 Page: 83 of 85 / / / Edition: B.1







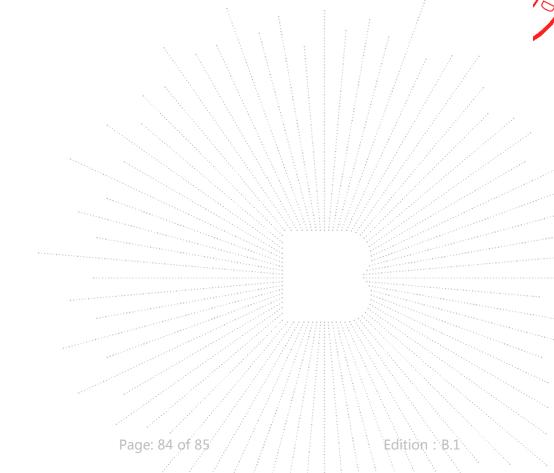

No.: BCTC/RF-EMC-005





## STATEMENT

Report No.: BCTC2403663573E

- 1. The equipment lists are traceable to the national reference standards.
- 2. The test report can not be partially copied unless prior written approval is issued from our lab.
- 3. The test report is invalid without the "special seal for inspection and testing".
- 4. The test report is invalid without the signature of the approver.
- 5. The test process and test result is only related to the Unit Under Test.
- 6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
- 7. The quality system of our laboratory is in accordance with ISO/IEC17025.
- 8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

#### Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: bctc@bctc-lab.com.cn

\*\*\*\* END \*\*\*\*

No.: BCTC/RF-EMC-005 Page: 85 of 85 / / / / Edition: B.1