



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

MAXWEST COMMUNICATION LIMITED

ROOM 1802B FORTRESS TOWER 250 KING'S ROAD, NORTH POINT HONG KONG

FCC ID: 2ASP8NEOCLAM

Report Type: Original Report	Product Type: Mobile phone
Report Number: <u>DG1210726-31141E-00B</u>	
Report Date: <u>2021-08-25</u>	
Reviewed By:	<u>Ivan Cao</u> Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	12
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §22.917(A) & §24.238(A) - BAND EDGES.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY26

 APPLICABLE STANDARD26

 TEST PROCEDURE26

 TEST EQUIPMENT LIST AND DETAILS.....27

 TEST DATA27

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile phone
EUT Model:		NEO CLAM
Operation modes:		GSM Voice, GPRS Data
Operation Frequency:		GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)
Antenna Gain▲:		GSM850: 2.35 dBi(0.2 dBd) PCS1900: 0.2 dBi
Modulation Type:		GMSK
Adapter Information	Model:	NEO CLAM
	Input:	100-240Vac 50/60Hz 0.15A
	Output:	5.0Vdc 500mA
Rated Input Voltage:		DC 3.7V from battery or DC 5V from Adapter
Serial Number:		DG1210726-31141E-RF-S1
EUT Received Date:		2021.07.27
EUT Received Status:		Good

Objective

This report is prepared on behalf of **MAXWEST COMMUNICATION LIMITED** in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: 2ASP8NEOCLAM

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22H, Part 24E.

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The test items were performed with the EUT operating at testing mode. The device operates on GSM Band 850/1900MHz, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM/GPRS 850	0.25	824.2	836.6	848.8
GSM/GPRS 1900	0.25	1850.2	1880	1909.8


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	106 891
Un-Known	ANTENNA	Un-Known	Un-Known

Configuration of Test Setup

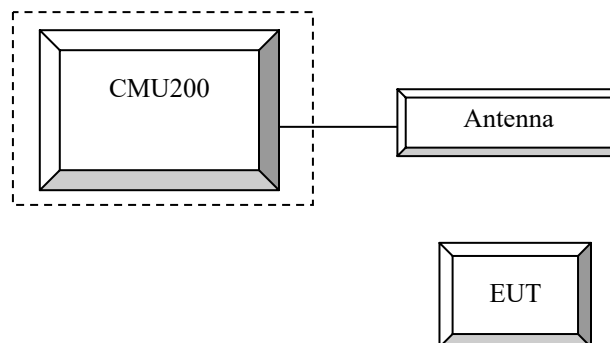

Block Diagram of Test Setup

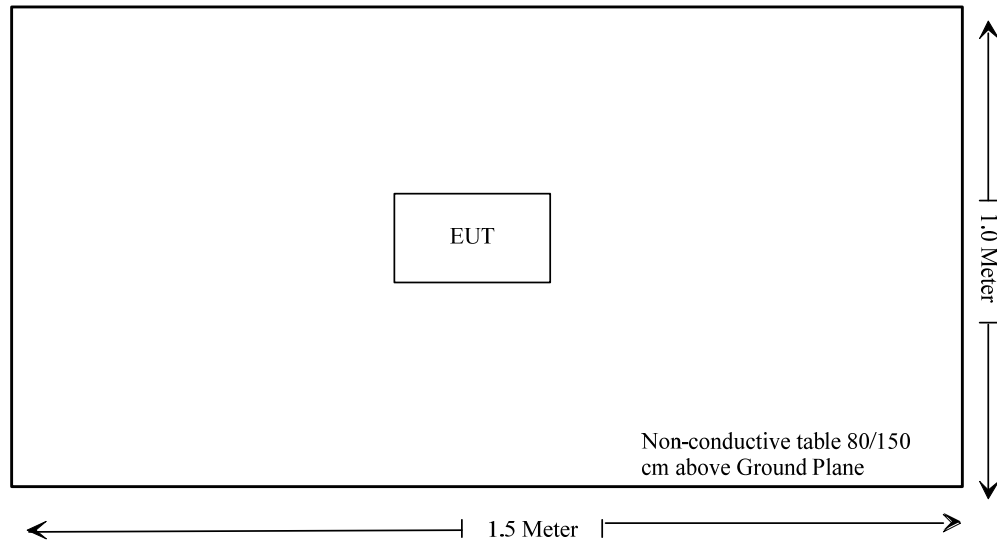

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§1.1310, §2.1093	RF Exposure	Compliance
FCC§2.1046;§ 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: DG1210726-31141E-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	106 891	2020-09-12	2021-09-12

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.6 °C
Relative Humidity:	69 %
ATM Pressure:	100.4 kPa
Tester:	Lay Lei
Test Date:	2021-08-20

Test Result: Compliance

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 uplink slot	GPRS 2 uplink slots	GPRS 3 uplink slots	GPRS 4 uplink slots
Cellular	128	31.56	30.15	28.67	26.81	24.88
	190	31.28	30.23	28.74	26.76	24.82
	251	31.67	30.18	28.82	26.87	24.76
PCS	512	28.87	27.16	25.88	23.91	21.97
	661	28.94	27.27	25.79	23.87	21.86
	810	28.62	27.31	25.83	23.93	21.89

ERP/EIRP:

Band	Channel	Conducted Power	Antenna Gain	Result	Limit
		(dBm)	(dBi/dBd)	(dBm)	(dBm)
Cellular	Low	31.56	0.2	31.76	38.45
	Middle	31.28	0.2	31.48	38.45
	High	31.67	0.2	31.87	38.45
PCS	Low	28.87	0.2	29.07	33.00
	Middle	28.94	0.2	29.14	33.00
	High	28.62	0.2	28.82	33.00

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Result = Conducted Power + Antenna Gain
- 3) Antenna gain(dBd)= Antenna gain(dBi)-2.15

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

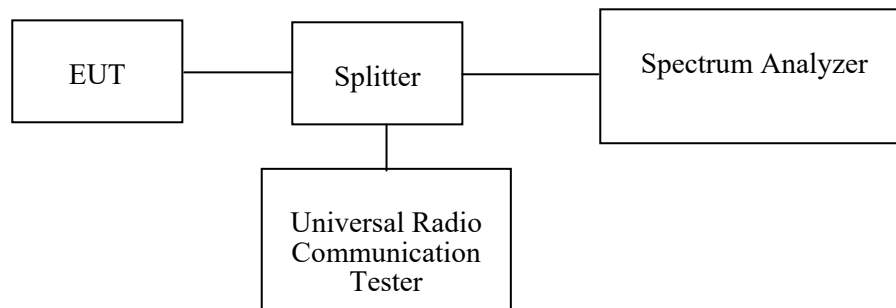

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-07	2022-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4 ~27.6 °C
Relative Humidity:	68~69 %
ATM Pressure:	100.3~100.4kPa
Tester:	Lay Lei
Test Date:	2021-08-19~2021-08-20


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

GSM:


Band	Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
		Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
Cellular	GSM	0.244	0.248	0.246	0.318	0.321	0.320
PCS	GSM	0.242	0.244	0.246	0.314	0.315	0.316

Cellular 850 Band, GSM, Low Channel

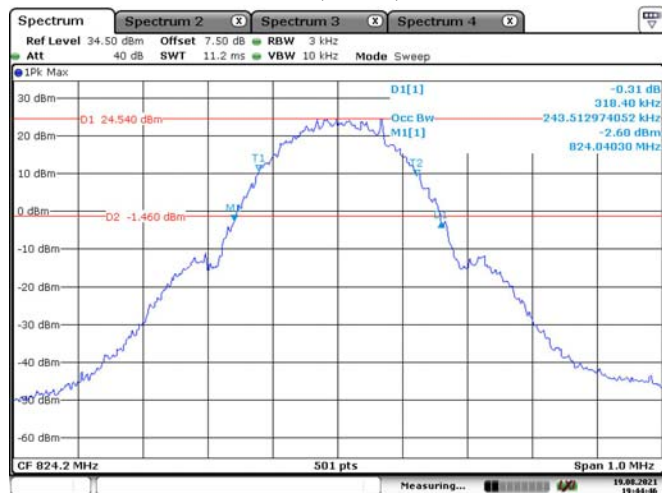

Date: 19.AUG.2021 19:44:46

Cellular 850 Band, GSM, Middle Channel

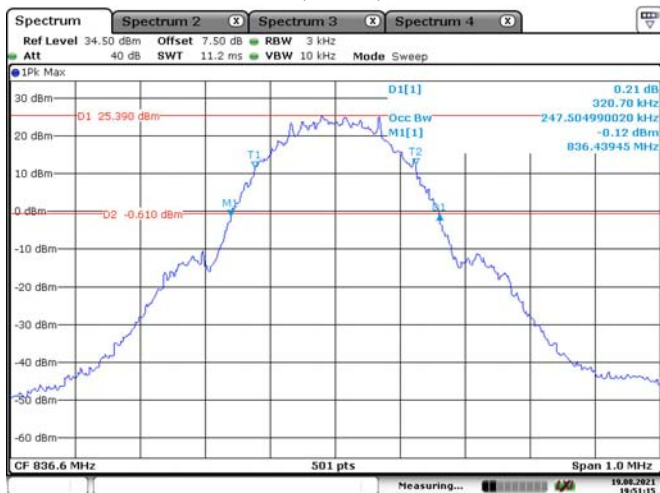


Date: 19.AUG.2021 19:51:15

Cellular 850 Band, GSM, High Channel




Date: 19.AUG.2021 19:54:31

PCS 1900 Band, GSM, Low Channel

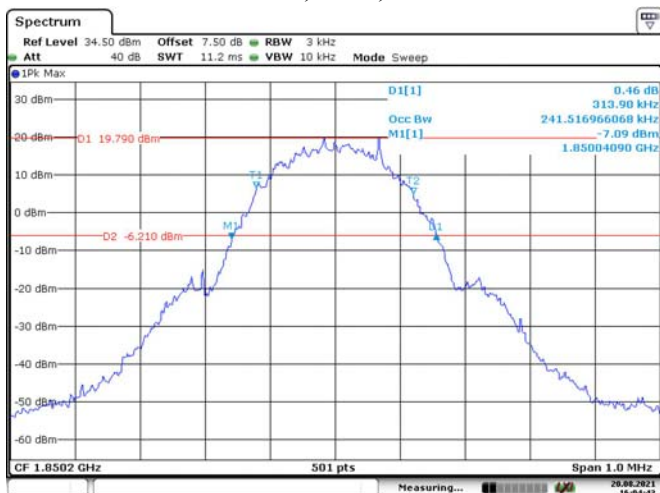


Date: 20.AUG.2021 16:04:43

PCS 1900 Band, GSM, Middle Channel

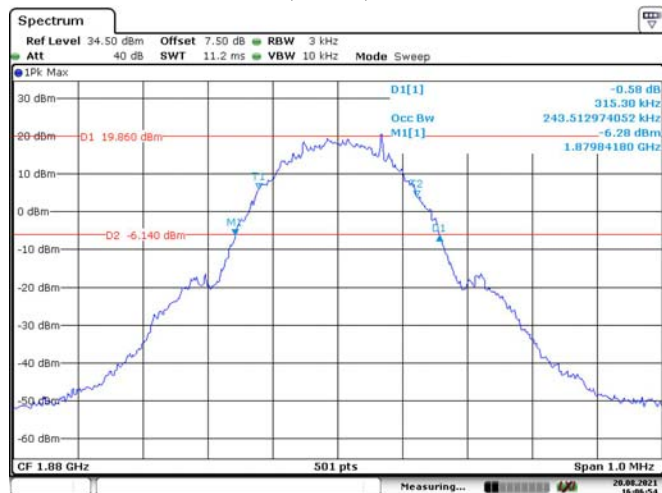

Date: 20.AUG.2021 16:06:54

PCS 1900 Band, GSM, High Channel

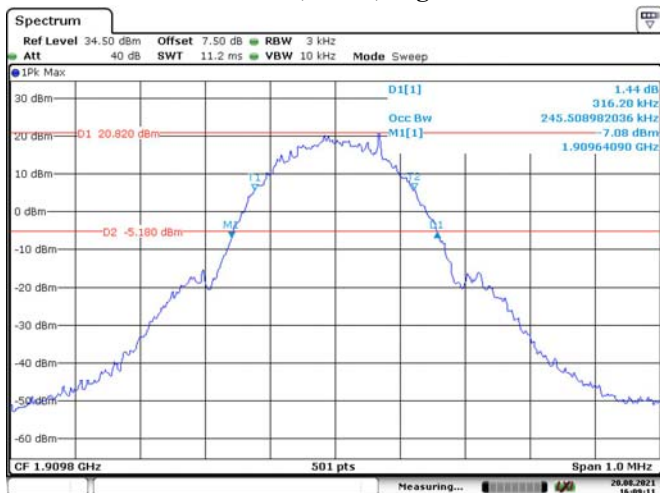

Date: 20.AUG.2021 16:09:11

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a)

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

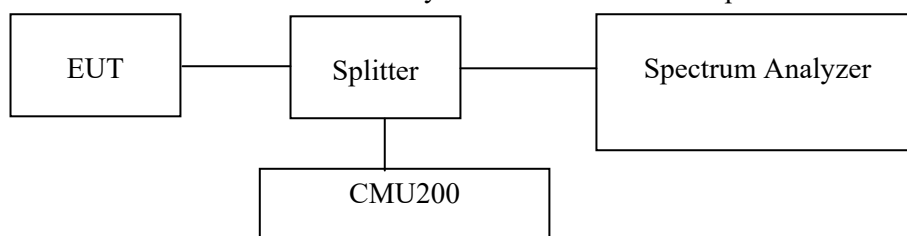

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-07	2022-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions


Temperature:	27.4~27.6 °C
Relative Humidity:	68~69%
ATM Pressure:	100.3~100.4kPa
Tester:	Lay Lei
Test Date:	2021-08-19~2021-08-20

Test Result: Compliance. Please refer to the following plots.

GSM 850, Low Channel

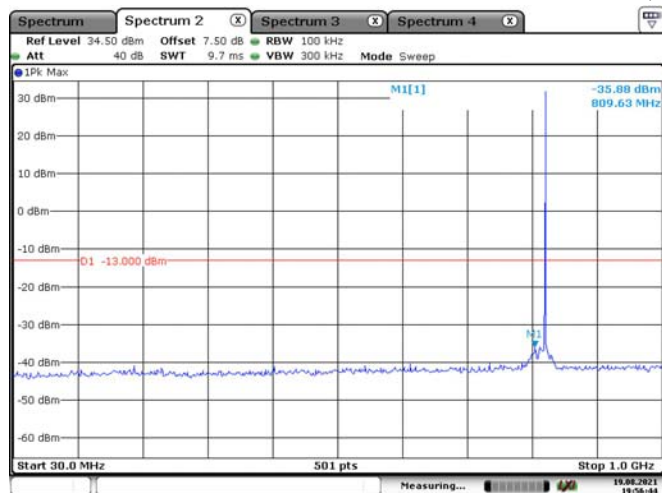


Date: 19.AUG.2021 19:56:44

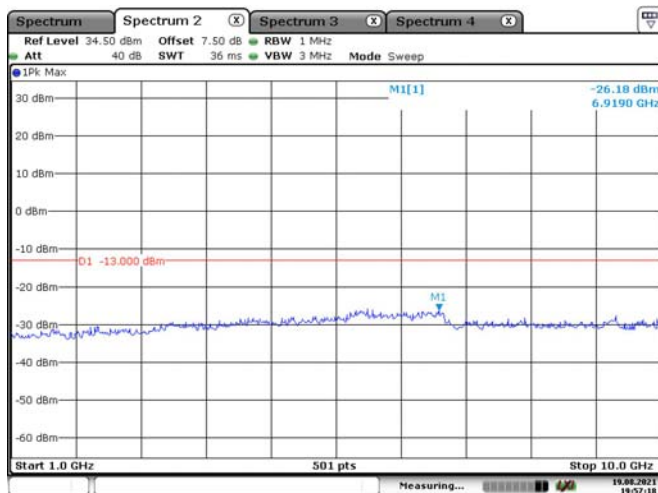


Date: 19.AUG.2021 19:57:18

GSM 850, Middle Channel

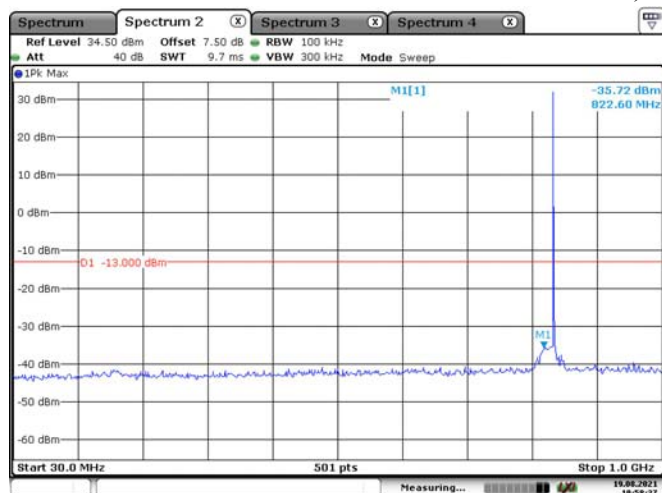


Date: 19.AUG.2021 19:58:37

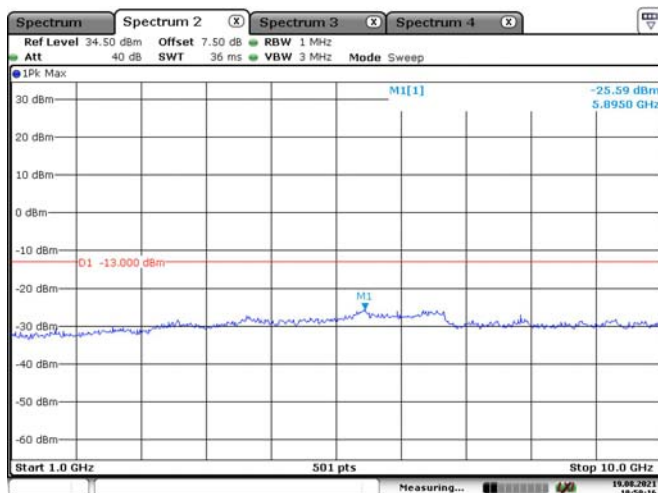


Date: 19.AUG.2021 19:59:16

GSM 850, High Channel


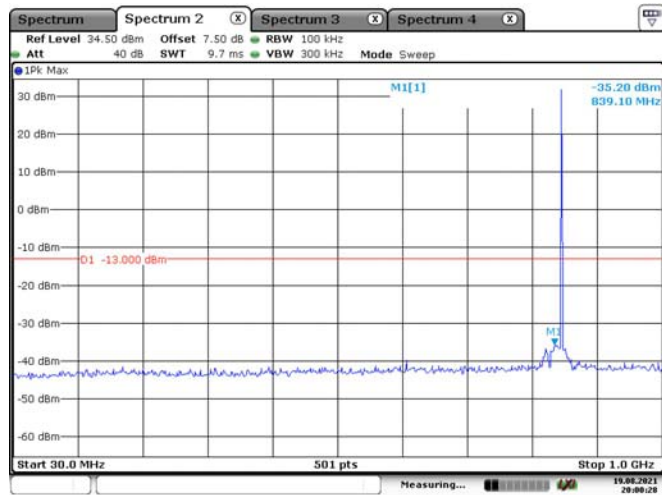


Date: 19.AUG.2021 20:00:28


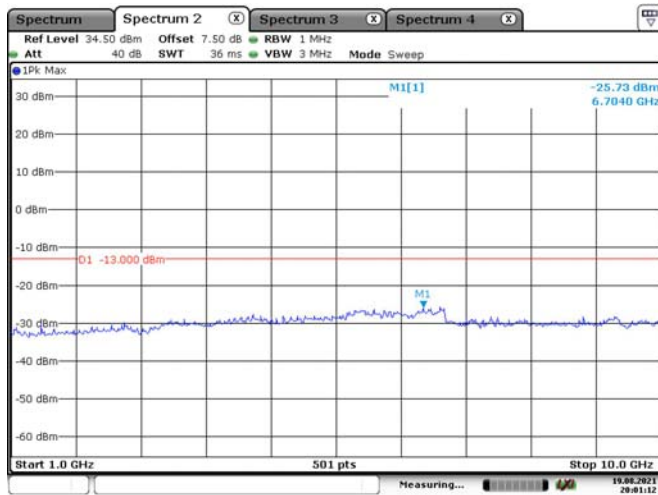


Date: 19.AUG.2021 20:01:13



PCS 1900, Low Channel

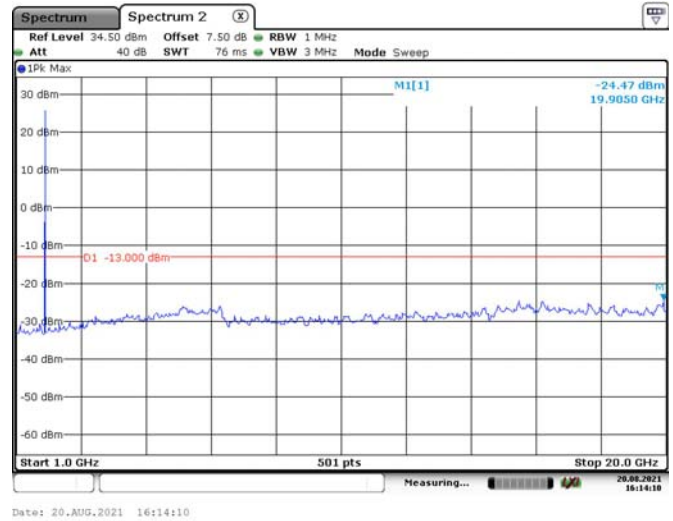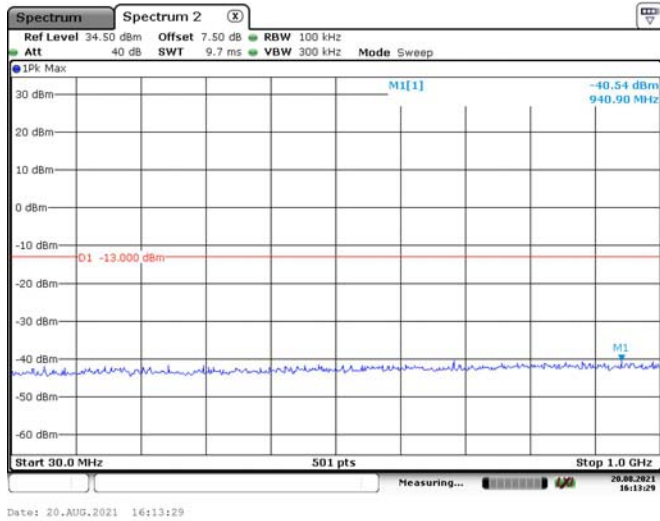

PCS 1900, Middle Channel

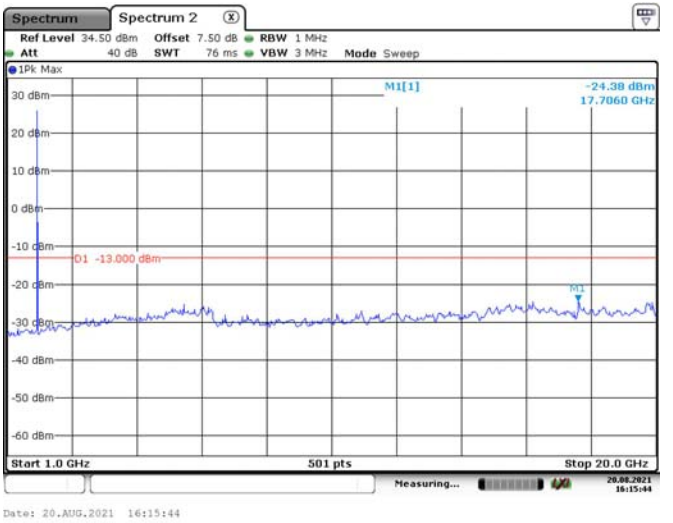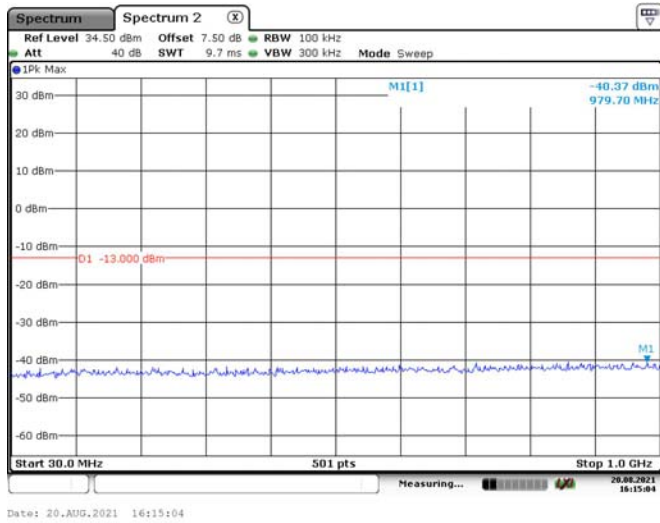

PCS 1900, High Channel

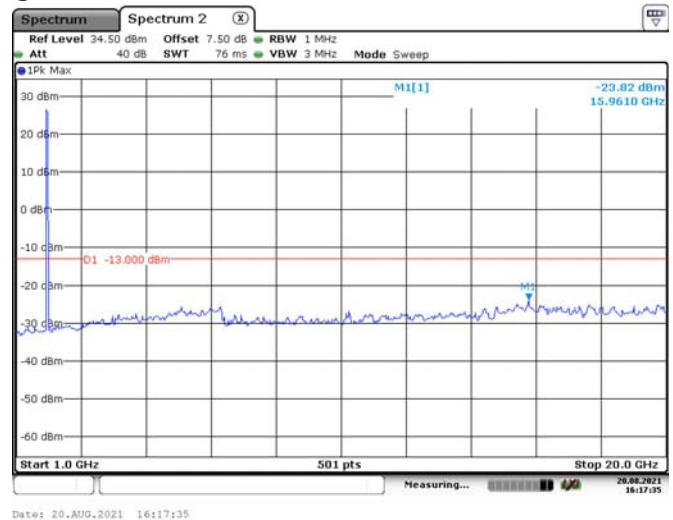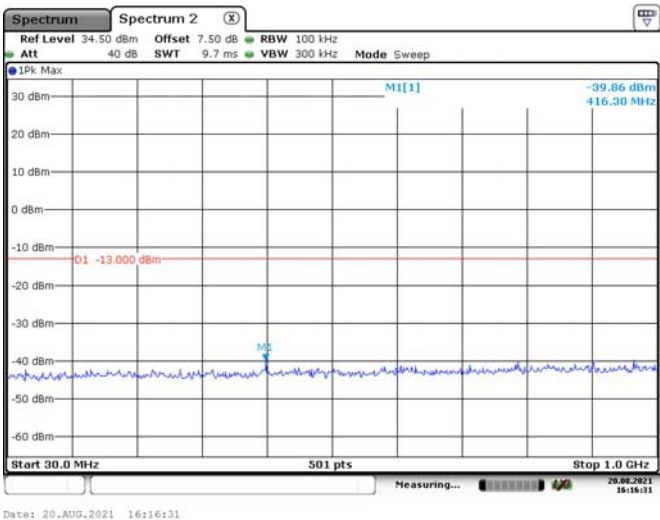

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-09-05	2021-09-05
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2021-06-27	2022-06-26
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2021-06-27	2022-06-26
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2020-12-05	2023-12-04
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2020-09-05	2021-09-05
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2020-09-05	2021-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	26.5°C	27.5°C
Relative Humidity:	62 %	60 %
ATM Pressure:	100 kPa	100.7 kPa
Tester:	Joker Chen	Jeremy Liang
Test Date:	2021-08-14	2021-08-16

Test Result: Compliance.

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850 Frequency:824.2MHz								
1648.40	H	69.85	-48.67	8.68	0.80	-40.79	-13.00	27.79
1648.40	V	70.28	-48.32	8.68	0.80	-40.44	-13.00	27.44
2472.60	H	56.04	-58.80	9.38	1.00	-50.42	-13.00	37.42
2472.60	V	57.34	-57.45	9.38	1.00	-49.07	-13.00	36.07
3296.80	H	56.31	-54.84	10.32	1.15	-45.67	-13.00	32.67
3296.80	V	56.31	-54.60	10.32	1.15	-45.43	-13.00	32.43
468.70	H	42.31	-67.76	0.00	0.68	-68.44	-13.00	55.44
468.70	V	46.03	-67.17	0.00	0.68	-67.85	-13.00	54.85
GSM850 Frequency:836.6MHz								
1673.20	H	69.44	-49.05	8.71	0.85	-41.19	-13.00	28.19
1673.20	V	68.59	-50.00	8.71	0.85	-42.14	-13.00	29.14
2509.80	H	56.05	-58.61	9.42	1.01	-50.20	-13.00	37.20
2509.80	V	57.19	-57.48	9.42	1.01	-49.07	-13.00	36.07
3346.40	H	51.98	-59.61	10.34	1.16	-50.43	-13.00	37.43
3346.40	V	50.95	-60.51	10.34	1.16	-51.33	-13.00	38.33
888.40	H	39.07	-63.45	0.00	1.04	-64.49	-13.00	51.49
901.00	V	38.32	-65.96	0.00	1.05	-67.01	-13.00	54.01
GSM850 Frequency:848.8MHz								
1697.60	H	68.35	-50.11	8.74	0.90	-42.27	-13.00	29.27
1697.60	V	66.89	-51.70	8.74	0.90	-43.86	-13.00	30.86
2546.40	H	66.35	-48.03	9.47	1.01	-39.57	-13.00	26.57
2546.40	V	61.95	-52.38	9.47	1.01	-43.92	-13.00	30.92
3395.20	H	51.68	-60.40	10.36	1.19	-51.23	-13.00	38.23
3395.20	V	52.58	-59.47	10.36	1.19	-50.30	-13.00	37.30
468.70	H	39.44	-70.63	0.00	0.68	-71.31	-13.00	58.31
468.70	V	45.18	-68.02	0.00	0.68	-68.70	-13.00	55.70

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900 Frequency:1850.2MHz								
3700.40	H	72.59	-39.49	10.60	1.25	-30.14	-13.00	17.14
3700.40	V	74.35	-37.71	10.60	1.25	-28.36	-13.00	15.36
5550.60	H	58.46	-50.70	11.44	1.49	-40.75	-13.00	27.75
5550.60	V	57.76	-51.24	11.44	1.49	-41.29	-13.00	28.29
844.90	H	36.06	-67.20	0.00	0.98	-68.18	-13.00	55.18
468.70	V	50.98	-62.22	0.00	0.68	-62.90	-13.00	49.90
GSM 1900 Frequency:1880MHz								
3760.00	H	74.65	-36.51	10.66	1.24	-27.09	-13.00	14.09
3760.00	V	73.25	-37.79	10.66	1.24	-28.37	-13.00	15.37
5640.00	H	60.38	-48.96	11.33	1.54	-39.17	-13.00	26.17
5640.00	V	61.35	-47.87	11.33	1.54	-38.08	-13.00	25.08
832.30	H	38.95	-64.53	0.00	0.97	-65.50	-13.00	52.50
468.70	V	50.65	-62.55	0.00	0.68	-63.23	-13.00	50.23
GSM 1900 Frequency:1909.8MHz								
3819.60	H	70.25	-40.32	10.72	1.29	-30.89	-13.00	17.89
3819.60	V	70.45	-39.98	10.72	1.29	-30.55	-13.00	17.55
5729.40	H	59.68	-49.75	11.22	1.59	-40.12	-13.00	27.12
5729.40	V	61.23	-48.07	11.22	1.59	-38.44	-13.00	25.44
783.10	H	36.13	-68.41	0.00	0.93	-69.34	-13.00	56.34
468.70	V	50.43	-62.77	0.00	0.68	-63.45	-13.00	50.45

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) - BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

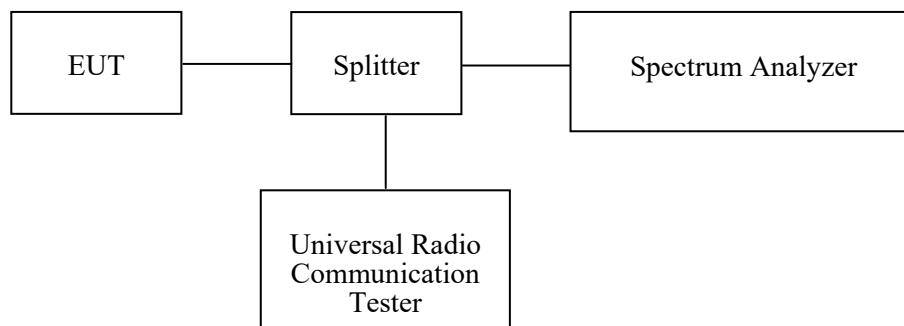

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-07	2022-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.4~27.6 °C
Relative Humidity:	68~69%
ATM Pressure:	100.3~100.4kPa
Tester:	Lay Lei
Test Date:	2021-08-19~2021-08-20


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


GSM 850, Left Band Edge

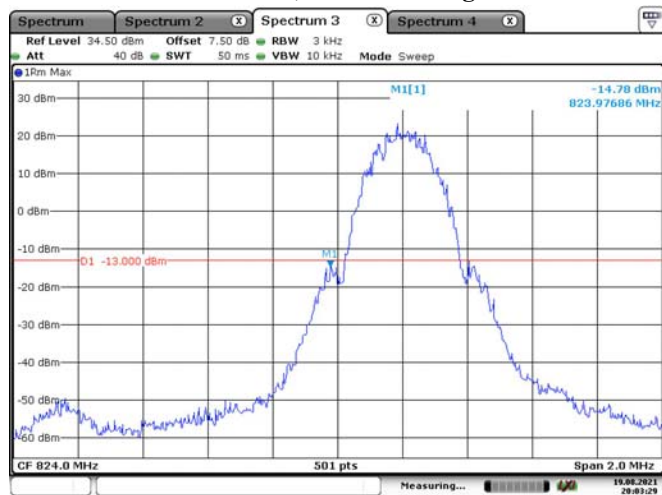


GSM 850, Right Band Edge

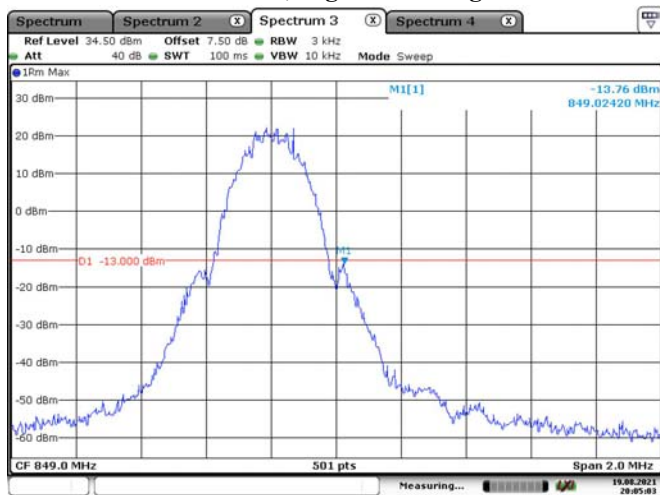

PCS 1900, Left Band Edge

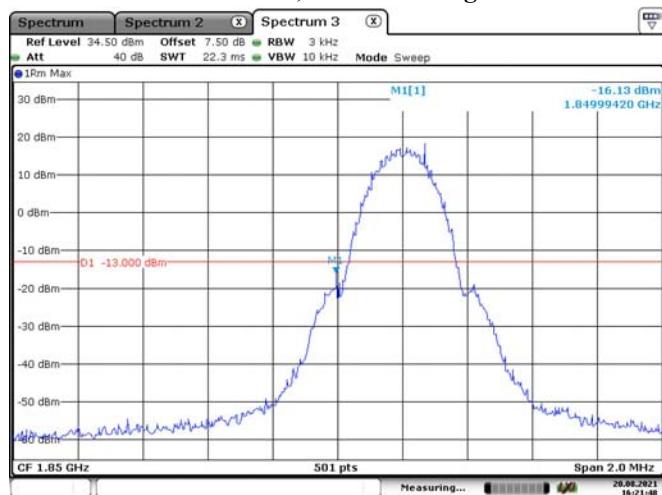

PCS 1900, Right Band Edge

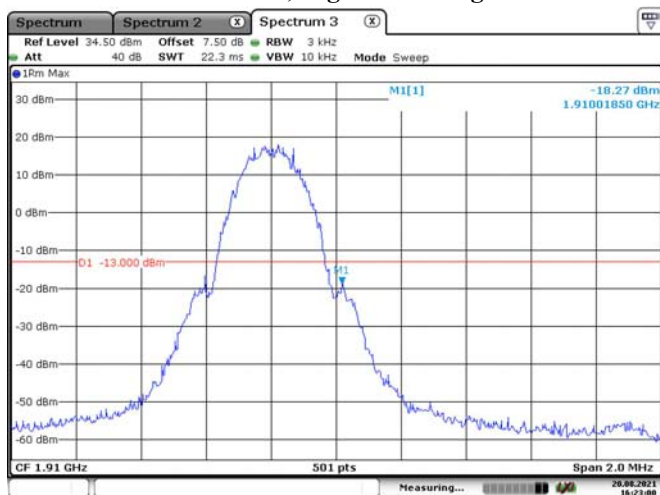

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard


FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

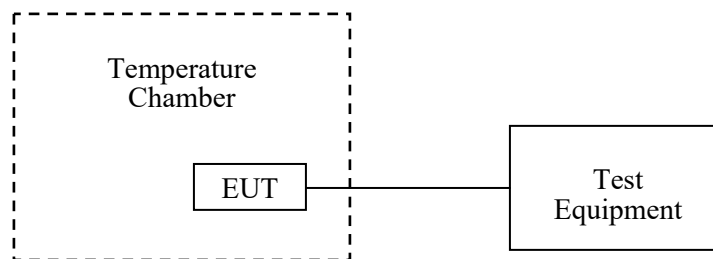

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
R&S	Universal Radio Communication Tester	CMU200	106 891	2020-09-12	2021-09-12
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2021-03-10	2022-03-09
UNI-T	Multimeter	UT39A	M130199938	2021-07-01	2022-07-01
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.6 °C
Relative Humidity:	69%
ATM Pressure:	100.4kPa
Tester:	Lay Lei
Test Date:	2021-08-20

Test Result: Compliance.

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	8	0.00956	2.5
-20		4	0.00478	
-10		14	0.01673	
0		9	0.01076	
10		6	0.00717	
20		12	0.01434	
30		8	0.00956	
40		14	0.01673	
50		8	0.00956	
20	3.5	12	0.01434	
20	4.2	10	0.01195	

GMSK, Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	14	0.00745	Pass
-20		10	0.00532	
-10		12	0.00638	
0		16	0.00851	
10		14	0.00745	
20		18	0.00957	
30		8	0.00426	
40		14	0.00745	
50		16	0.00851	
20	3.5	8	0.00426	
20	4.2	15	0.00798	

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

***** END OF REPORT *****