

TEST REPORT

Reference No..... : WTX23X07164180W004
FCC ID : 2AUW9-ZENIUS08
Applicant : GeoMax AG
Address : Espenstrasse 135 Widnau, St. Gallen 9443 Switzerland
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Zenius08
Model No..... : GMT-08QA-2301
Standards : FCC Part 15.407
Date of Receipt sample : 2023-04-01
Date of Test..... : 2023-04-01 to 2023-08-28
Date of Issue : 2023-08-28
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE.....	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	13
3. ANTENNA REQUIREMENT	14
3.1 STANDARD APPLICABLE.....	14
3.2 EVALUATION INFORMATION	14
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	15
4.1 STANDARD APPLICABLE.....	15
4.2 SUMMARY OF TEST RESULTS	15
5. POWER SPECTRAL DENSITY	16
5.1 STANDARD APPLICABLE.....	16
5.2 TEST PROCEDURE.....	16
5.3 SUMMARY OF TEST RESULTS/PLOTS	17
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 SUMMARY OF TEST RESULTS/PLOTS	20
7. MAXIMUM CONDUCTED OUTPUT POWER.....	21
7.1 STANDARD APPLICABLE.....	21
7.2 TEST PROCEDURE.....	21
7.3 SUMMARY OF TEST RESULTS/PLOTS	22
8. RADIATED SPURIOUS EMISSIONS.....	23
8.1 STANDARD APPLICABLE.....	23
8.2 TEST PROCEDURE.....	23
8.3 TEST RECEIVER SETUP	25
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	25
8.5 SUMMARY OF TEST RESULTS/PLOTS	26
9. FREQUENCY STABILITY	94
9.1 STANDARD APPLICABLE.....	94
9.2 TEST PROCEDURE.....	94
9.3 SUMMARY OF TEST RESULTS/PLOTS	94
10 CONDUCTED EMISSIONS	95
10.1 TEST PROCEDURE.....	95
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	95
10.3 TEST RECEIVER SETUP	95
10.4 SUMMARY OF TEST RESULTS/PLOTS	95
APPENDIX SUMMARY	98
APPENDIX A.....	99
APPENDIX B.....	127
APPENDIX C.....	181
APPENDIX D.....	209

APPENDIX PHOTOGRAPHS.....211

Report version

Version No.	Date of issue	Description
Rev.00	2023-08-28	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Zenius08
Trade Name:	GeoMax
Model No.:	GMT-08QA-2301
Adding Model(s):	/
Rated Voltage:	DC3.8V
Battery:	8200mAh
Adapter Model:	MODEL:ASUC71w-050912300 Input: AC100-240V 50/60Hz 0.7A Output:DC5.0V3.0A or DC9.0V2.0A or DC12.0V1.5A
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	Antenna 1: 15.60dBm (Conducted) Antenna 2: 14.92m (Conducted)
Type of Modulation:	QPSK,16QAM,64QAM, 256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	Antenna 1: 3.62dBi; Antenna 2: 3.62dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter "3646631+=" into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	16	16	16	16	16	16	16	16	16	16	16	16	16
802.11n-HT20 MCS0	16	16	16	16	16	16	16	16	16	16	16	16	16
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	15	15	15	15	15	15	15	15	15	15			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	14		14		14		14		14		14		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz ,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz ,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5550MHz,5670MHz ,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
Note 1: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report. Note 2: The 5GHz WIFI has two antennas and support Multiple Outputs for 802.11n/ac mode for this report; Antenna 1 Gain is 3.62dBi; Antenna 2 Gain is 3.62dBi; For this function is belong to Correlated Categorization equipment According to KDB 662911, for same directional gain. Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi = $3.62 + 10 \log(2)$ dBi = 6.63dBi		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	1.0	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	L13 Yoga	/
Adapter	/	ASUC71w-050912300	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24
☒ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☒ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18

WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☐ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☐ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two FPC Antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{ MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3\text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX23X07164180W004

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

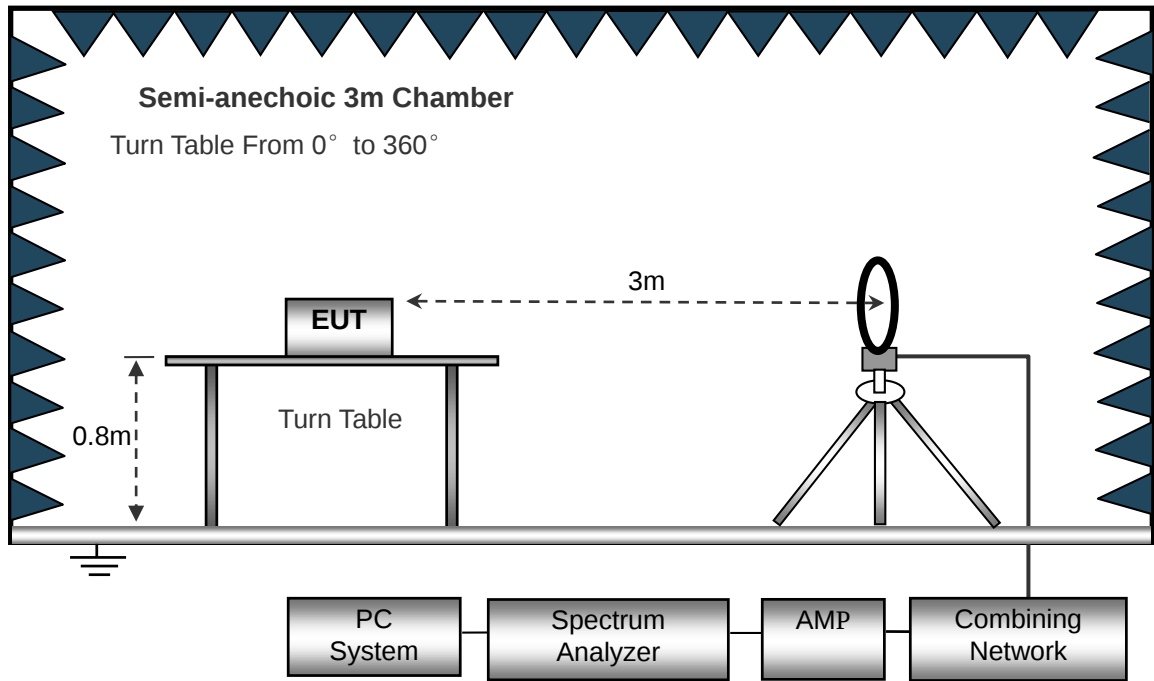
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



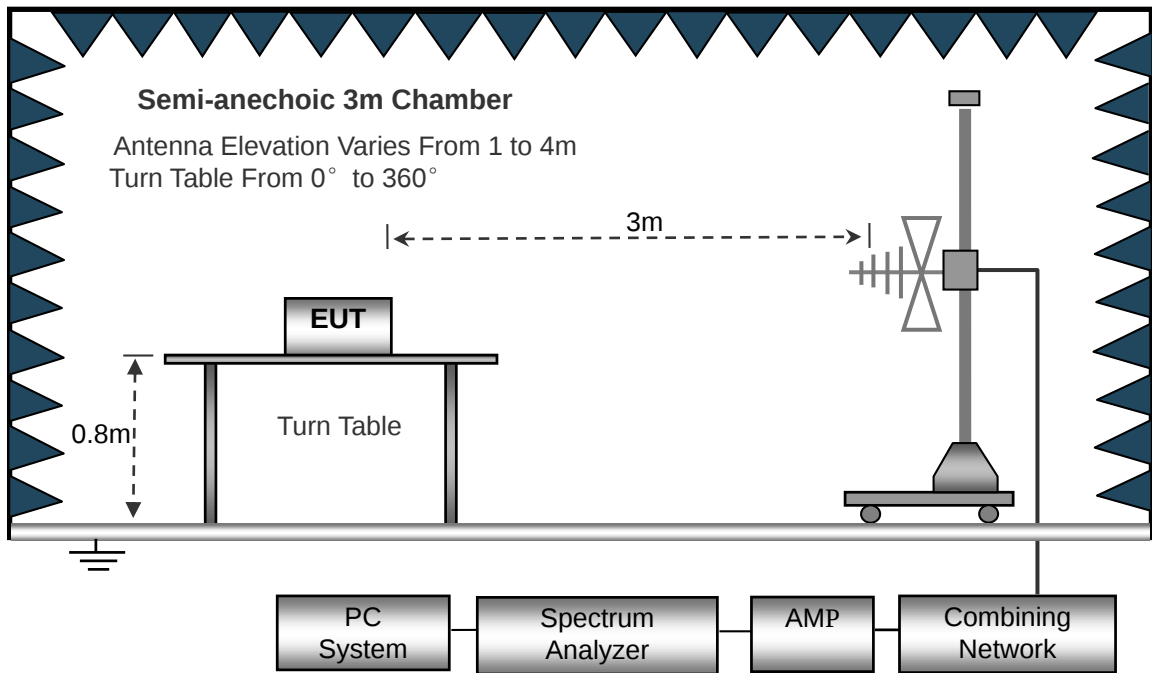The test setup for emission measurement from 30 MHz to 1 GHz.



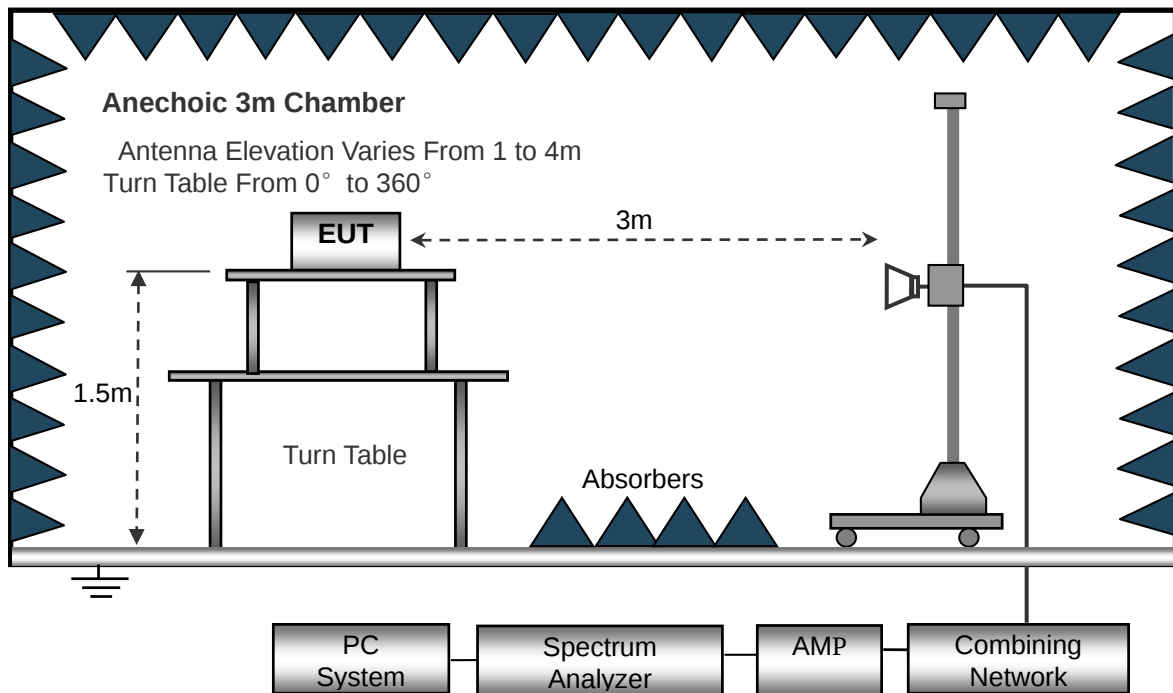The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emission From 30MHz to 1GHz

➤ Antenna 1(Worst case)

➤ 5150-5250MHz


802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

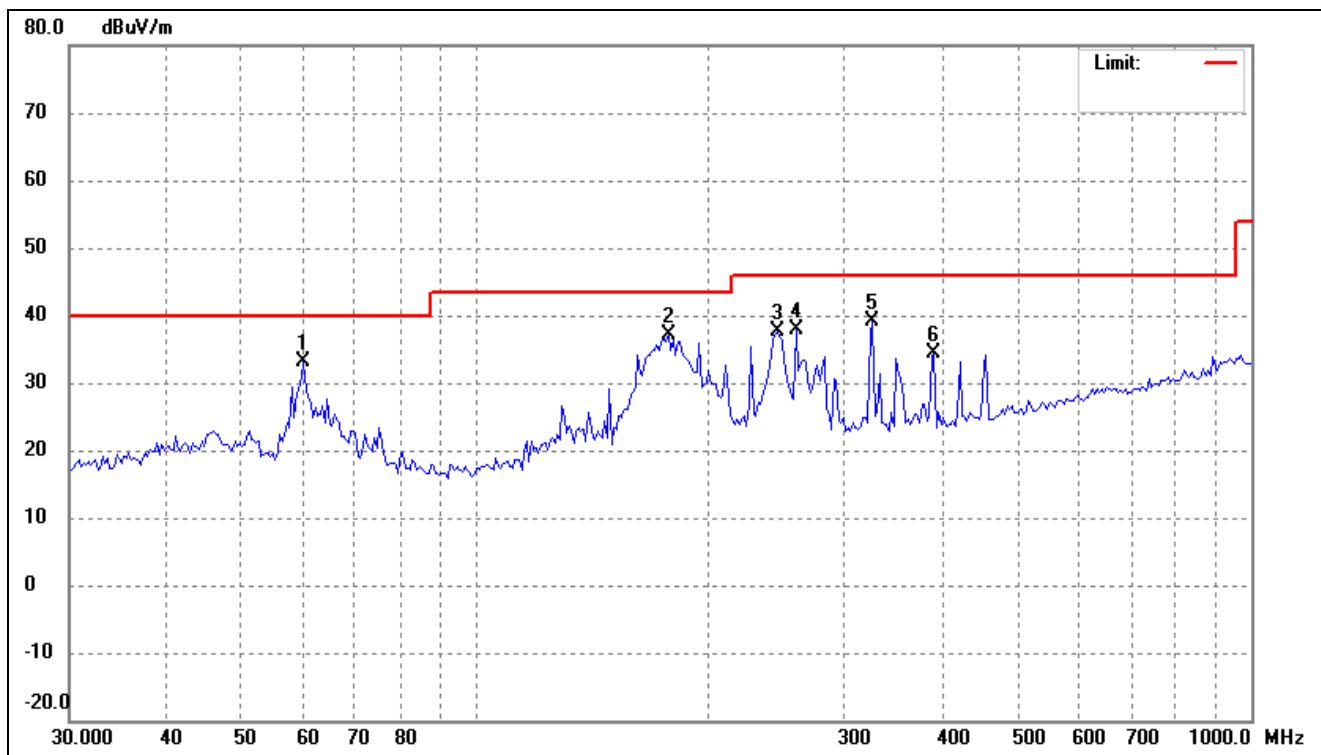


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.1528	42.06	-8.97	33.09	40.00	-6.91	-	-	peak
2	177.5179	47.06	-9.96	37.10	43.50	-6.40	-	-	peak
3	245.2606	47.96	-10.36	37.60	46.00	-8.40	-	-	peak
4	259.4433	47.61	-9.79	37.82	46.00	-8.18	-	-	peak
5	324.8645	46.76	-7.55	39.21	46.00	-6.79	-	-	peak
6	389.9874	40.64	-6.16	34.48	46.00	-11.52	-	-	peak

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Vertical

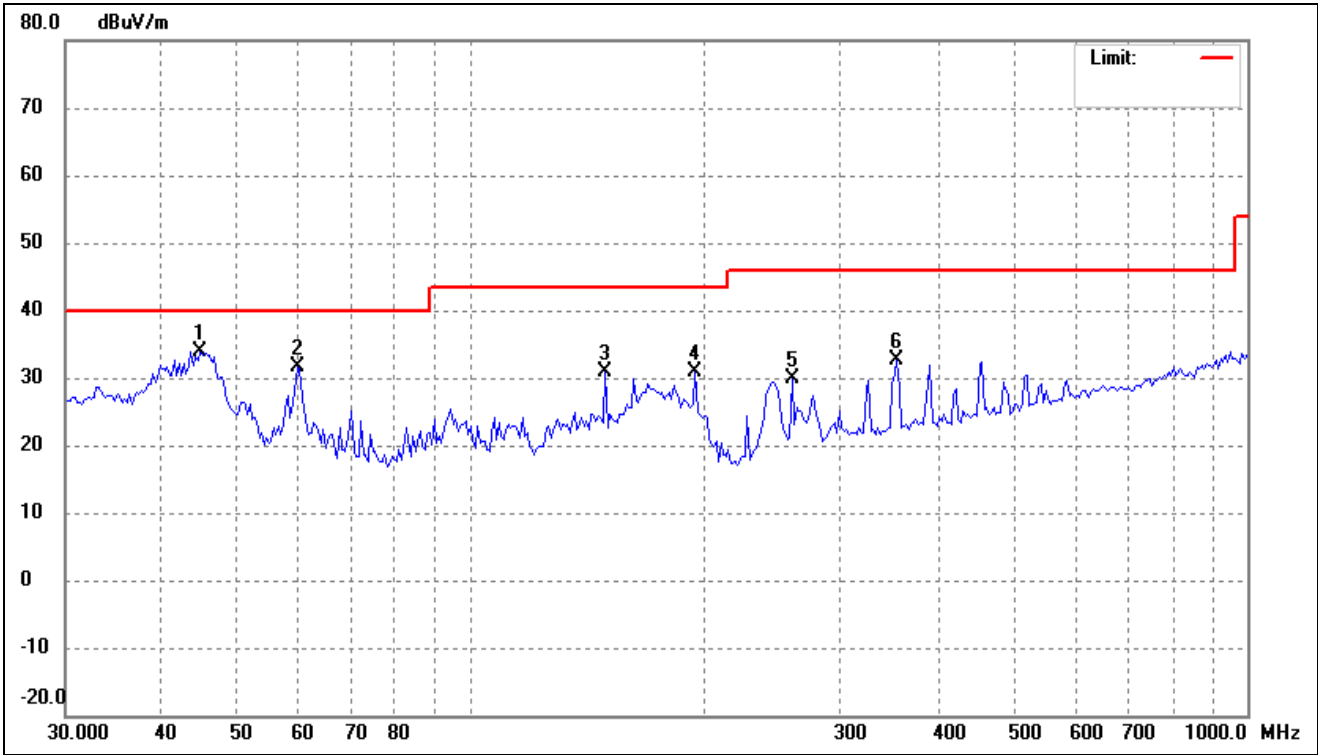

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.7793	42.45	-8.47	33.98	40.00	-6.02	-	-	peak
2	59.7315	40.54	-8.92	31.62	40.00	-8.38	-	-	peak
3	148.9175	39.48	-8.68	30.80	43.50	-12.70	-	-	peak
4	194.4985	42.61	-11.67	30.94	43.50	-12.56	-	-	peak
5	259.4434	39.65	-9.79	29.86	46.00	-16.14	-	-	peak
6	353.4472	39.53	-7.02	32.51	46.00	-13.49	-	-	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

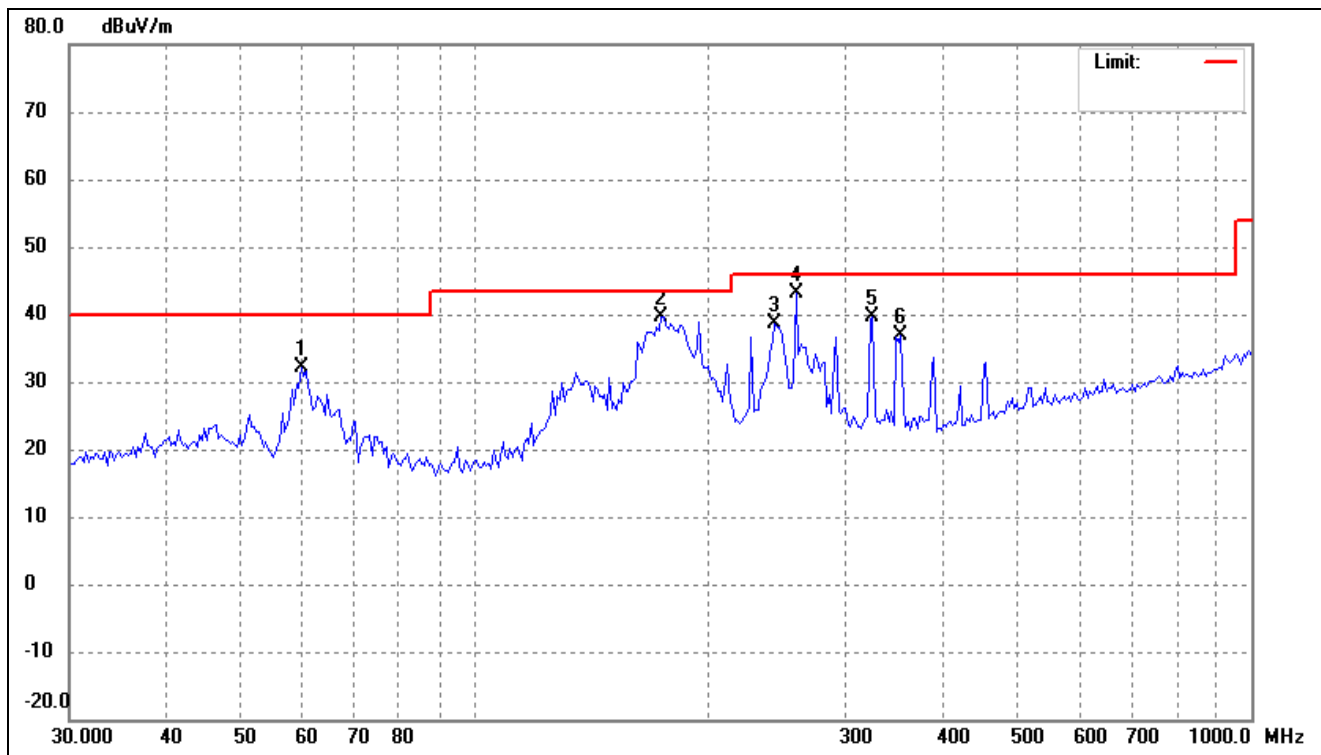

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.7315	41.03	-8.92	32.11	40.00	-7.89	-	-	peak
2	173.8147	49.16	-9.42	39.74	43.50	-3.76	-	-	peak
3	243.5431	49.09	-10.42	38.67	46.00	-7.33	-	-	peak
4	259.4434	52.87	-9.79	43.08	46.00	-2.92	-	-	peak
5	324.8645	47.20	-7.55	39.65	46.00	-6.35	-	-	peak
6	353.4472	43.90	-7.02	36.88	46.00	-9.12	-	-	peak

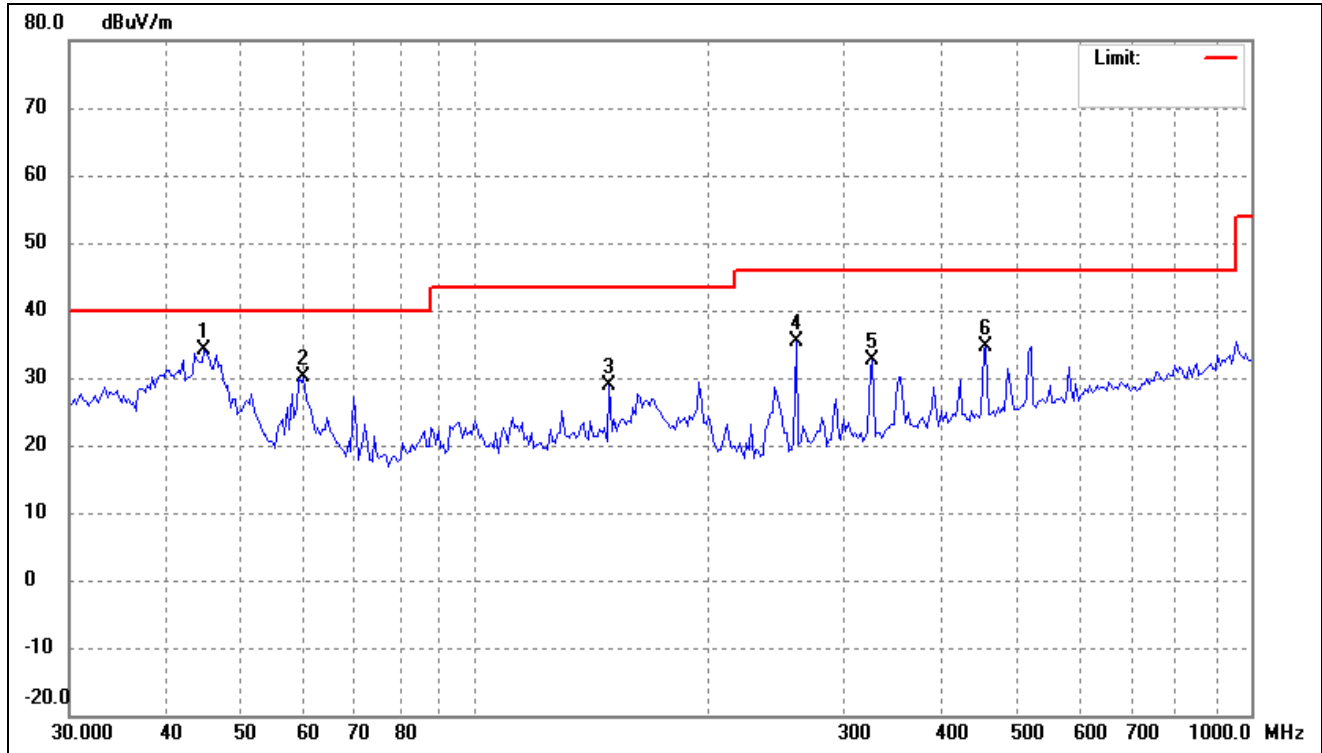
802.11a(Worst case)

Test Channel

5240MHz

Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.7793	42.71	-8.47	34.24	40.00	-5.76	-	-	peak
2	60.1528	39.01	-8.97	30.04	40.00	-9.96	-	-	peak
3	148.9175	37.50	-8.68	28.82	43.50	-14.68	-	-	peak
4	259.4434	45.11	-9.79	35.32	46.00	-10.68	-	-	peak
5	324.8645	40.09	-7.55	32.54	46.00	-13.46	-	-	peak
6	455.1888	39.23	-4.52	34.71	46.00	-11.29	-	-	peak

➤ 5250-5350MHz

802.11a(Worst case)


Test Channel	5260MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

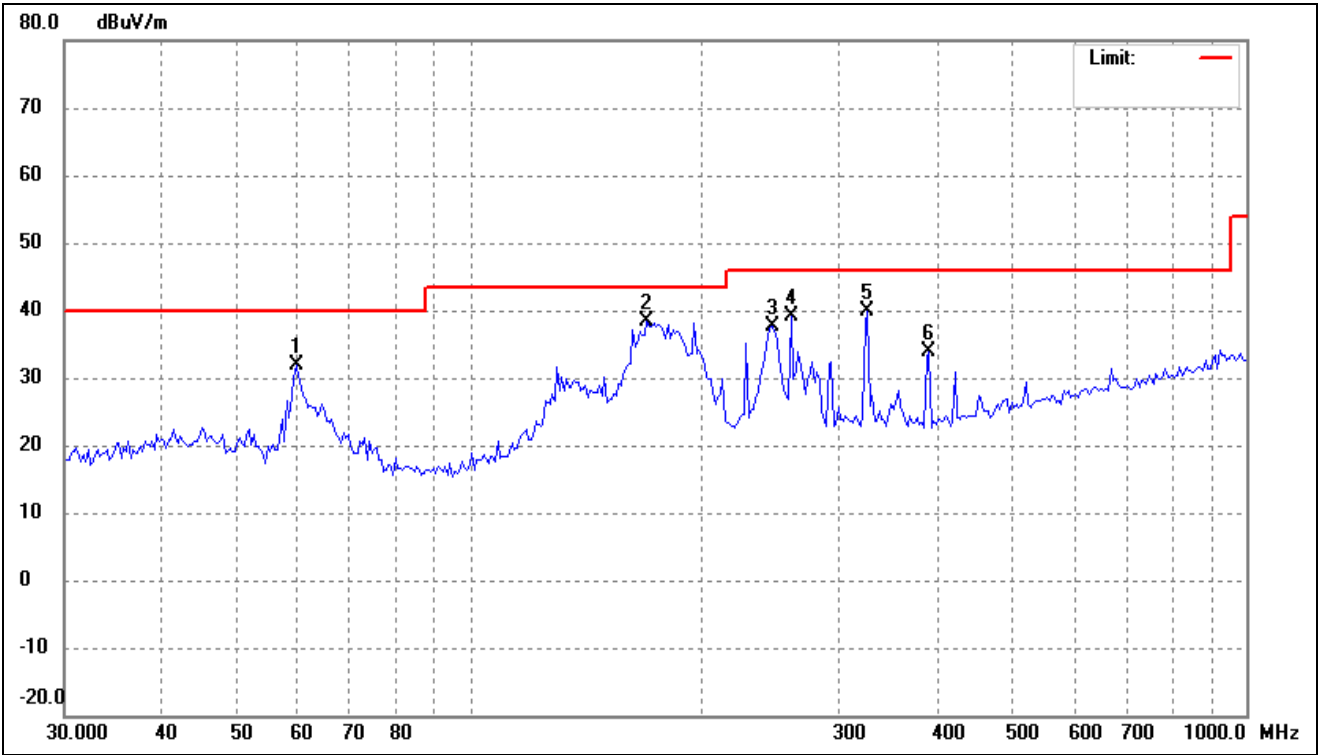

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.7315	40.72	-8.92	31.80	40.00	-8.20	-	-	peak
2	168.9970	47.17	-8.85	38.32	43.50	-5.18	-	-	peak
3	245.2606	47.98	-10.36	37.62	46.00	-8.38	-	-	peak
4	259.4434	49.04	-9.79	39.25	46.00	-6.75	-	-	peak
5	324.8645	47.33	-7.55	39.78	46.00	-6.22	-	-	peak
6	389.9874	39.96	-6.16	33.80	46.00	-12.20	-	-	peak


802.11a(Worst case)

Test Channel	5260MHz	Polarity:	Vertical
--------------	---------	-----------	----------

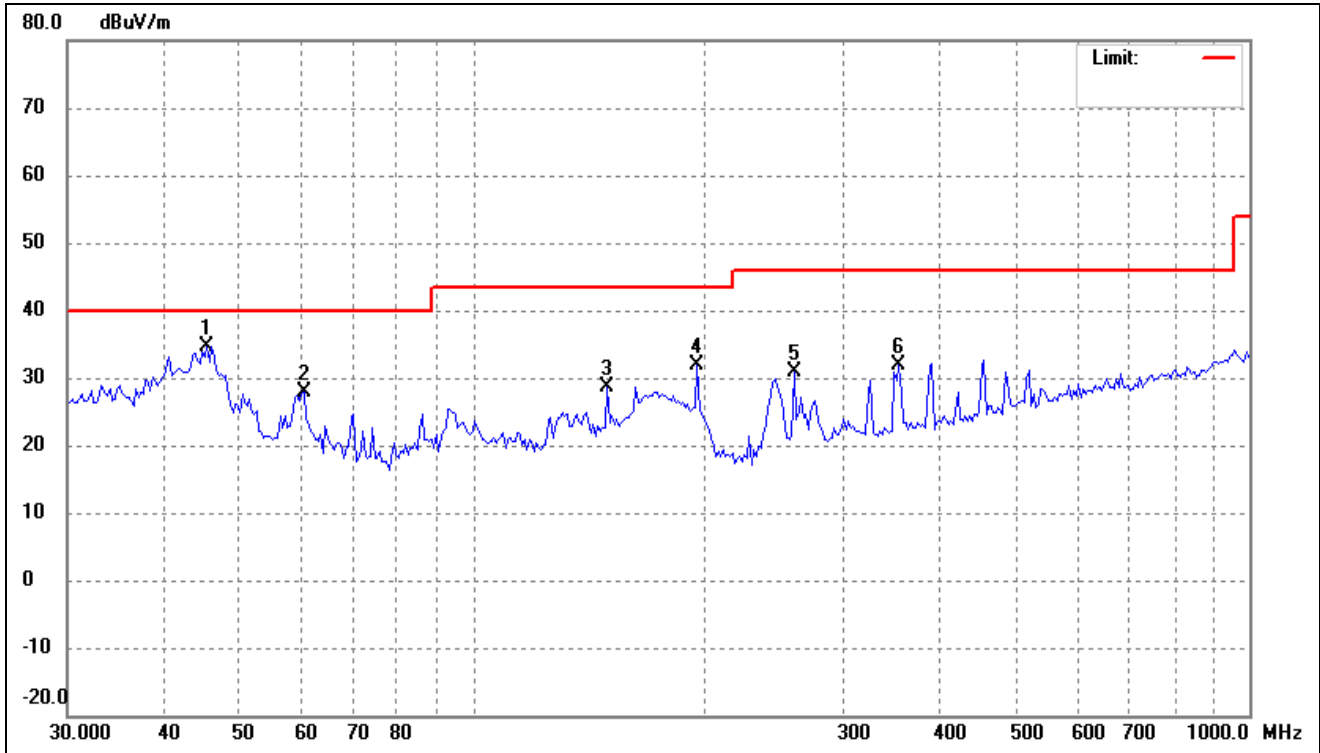

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4131	43.13	-8.43	34.70	40.00	-5.30	-	-	peak
2	60.5769	36.91	-9.04	27.87	40.00	-12.13	-	-	peak
3	148.9175	37.41	-8.68	28.73	43.50	-14.77	-	-	peak
4	194.4985	43.58	-11.67	31.91	43.50	-11.59	-	-	peak
5	259.4434	40.65	-9.79	30.86	46.00	-15.14	-	-	peak
6	353.4472	38.99	-7.02	31.97	46.00	-14.03	-	-	peak

802.11a(Worst case)			
Test Channel	5320MHz	Polarity:	Horizontal

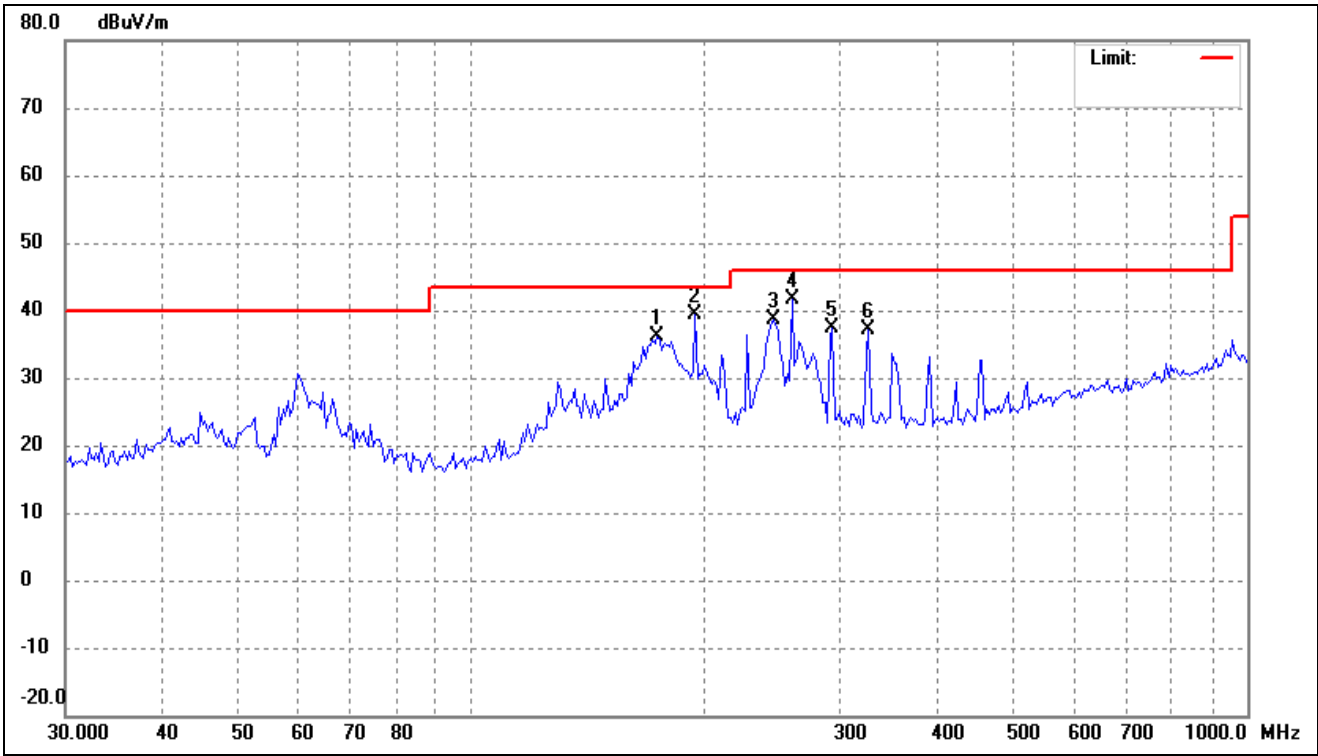

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	173.8147	45.65	-9.42	36.23	43.50	-7.27	-	-	peak
2	194.4985	51.09	-11.67	39.42	43.50	-4.08	-	-	peak
3	245.2606	48.94	-10.36	38.58	46.00	-7.42	-	-	peak
4	259.4434	51.46	-9.79	41.67	46.00	-4.33	-	-	peak
5	292.3643	45.83	-8.52	37.31	46.00	-8.69	-	-	peak
6	324.8645	44.80	-7.55	37.25	46.00	-8.75	-	-	peak

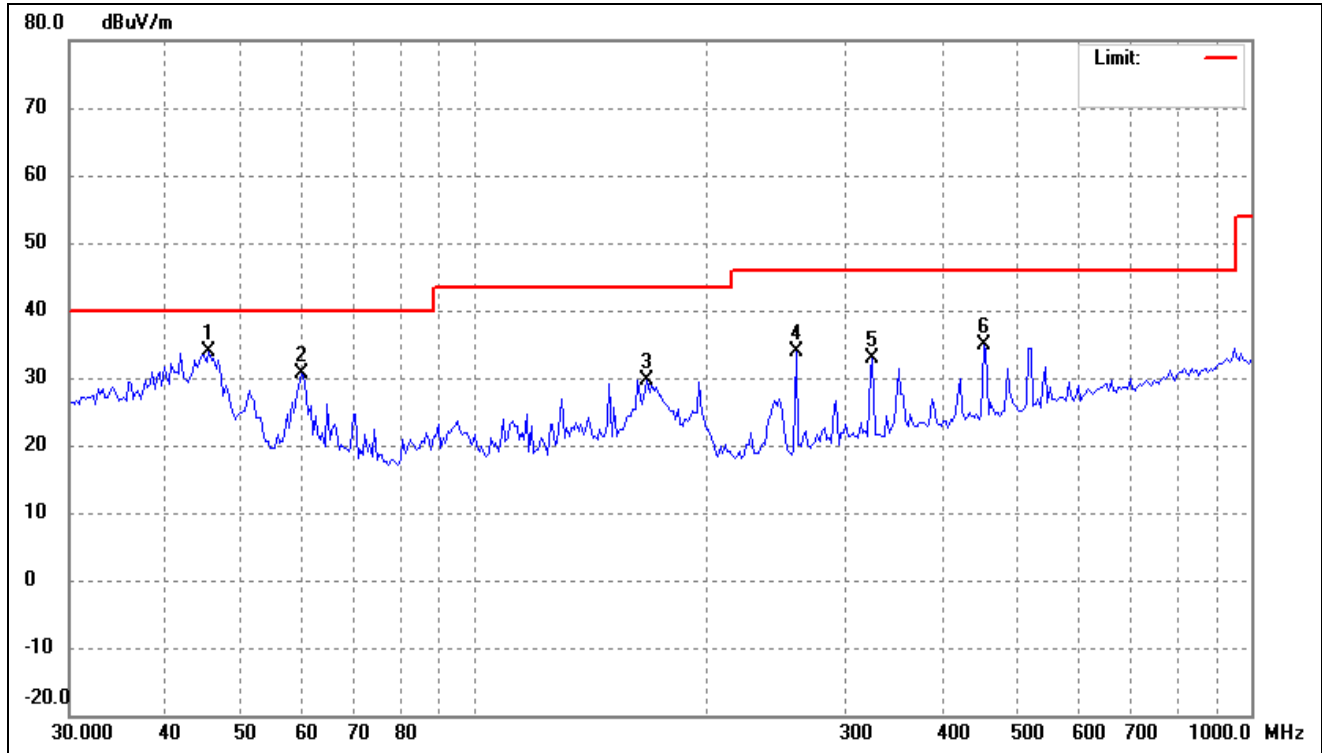
802.11a(Worst case)

Test Channel

5320MHz

Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4131	42.39	-8.43	33.96	40.00	-6.04	-	-	peak
2	59.7315	39.60	-8.92	30.68	40.00	-9.32	-	-	peak
3	166.6385	38.51	-8.79	29.72	43.50	-13.78	-	-	peak
4	259.4434	43.78	-9.79	33.99	46.00	-12.01	-	-	peak
5	324.8645	40.33	-7.55	32.78	46.00	-13.22	-	-	peak
6	452.0013	39.44	-4.56	34.88	46.00	-11.12	-	-	peak

➤ 5470-5725MHz


802.11a(Worst case)

Test Channel	5500MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

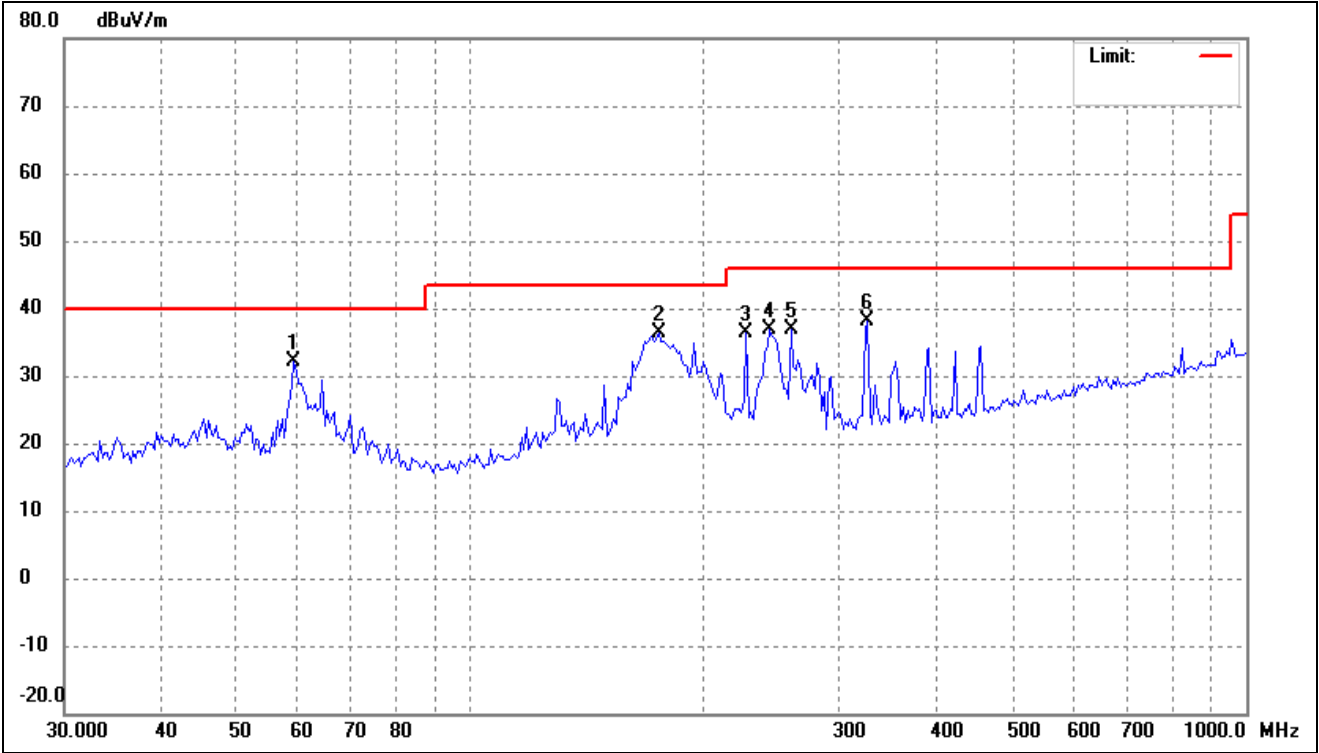


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.3133	41.09	-8.90	32.19	40.00	-7.81	-	-	peak
2	175.0404	45.92	-9.61	36.31	43.50	-7.19	-	-	peak
3	227.0164	48.14	-11.76	36.38	46.00	-9.62	-	-	peak
4	243.5431	47.31	-10.42	36.89	46.00	-9.11	-	-	peak
5	259.4434	46.75	-9.79	36.96	46.00	-9.04	-	-	peak
6	324.8645	45.77	-7.55	38.22	46.00	-7.78	-	-	peak

802.11a(Worst case)			
Test Channel	5500MHz	Polarity:	Vertical

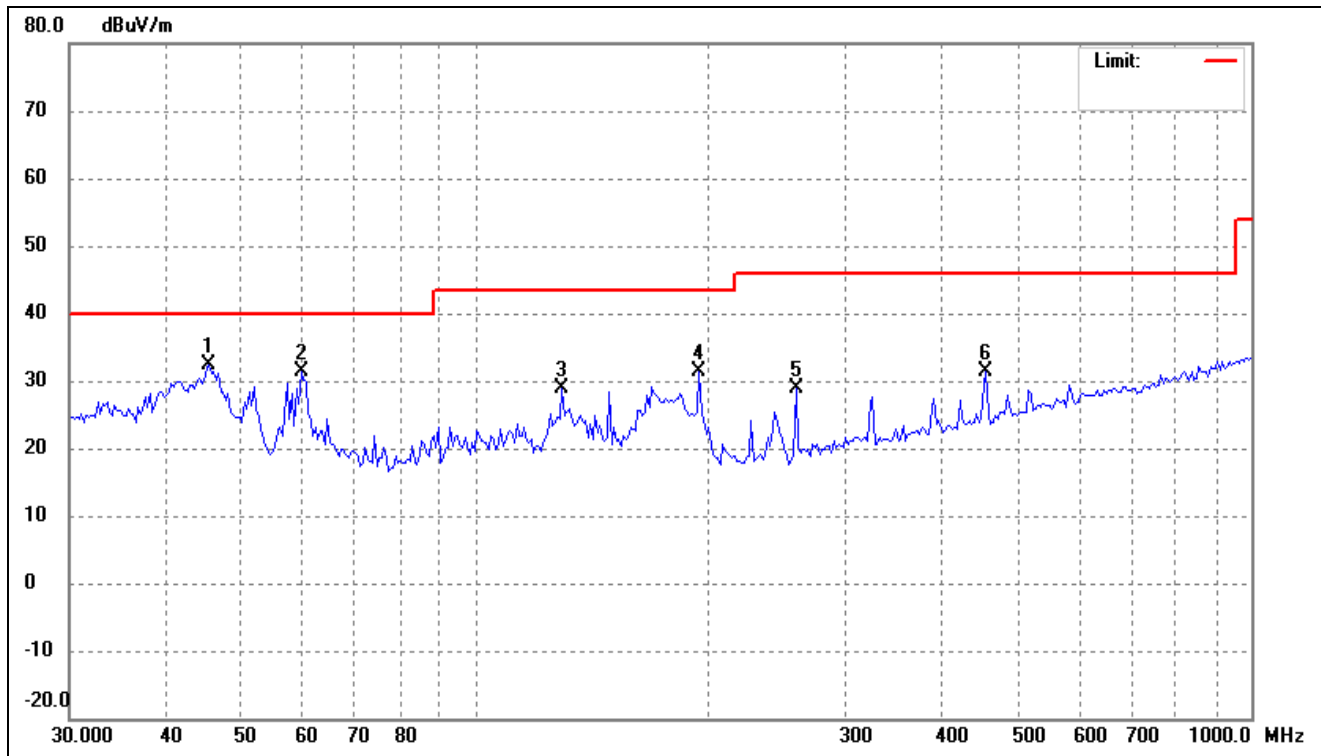


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4131	40.70	-8.43	32.27	40.00	-7.73	-	-	peak
2	59.7315	40.36	-8.92	31.44	40.00	-8.56	-	-	peak
3	129.3923	38.81	-9.89	28.92	43.50	-14.58	-	-	peak
4	194.4985	43.16	-11.67	31.49	43.50	-12.01	-	-	peak
5	259.4434	38.56	-9.79	28.77	46.00	-17.23	-	-	peak
6	455.1888	35.96	-4.52	31.44	46.00	-14.56	-	-	peak

802.11a(Worst case)			
Test Channel	5600MHz	Polarity:	Horizontal

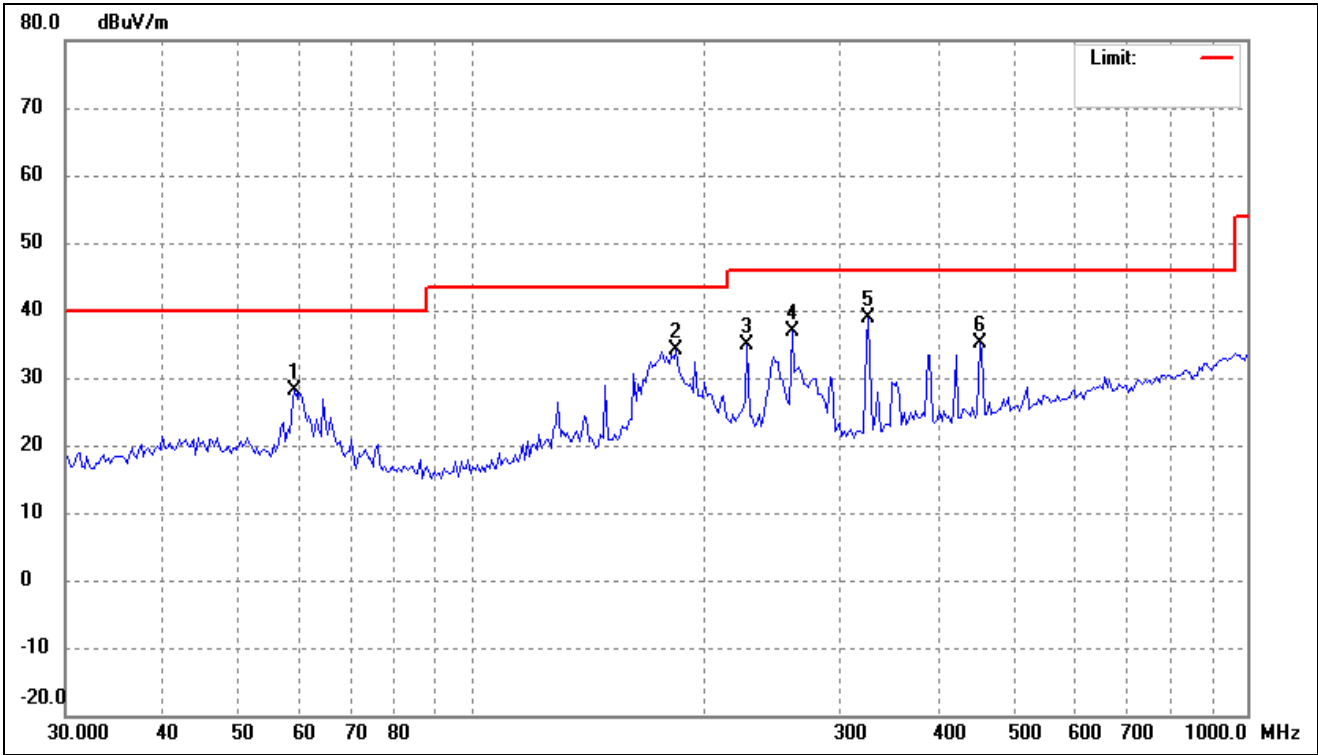


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.3133	37.11	-8.90	28.21	40.00	-11.79	-	-	peak
2	183.8660	44.90	-10.74	34.16	43.50	-9.34	-	-	peak
3	227.0164	46.62	-11.76	34.86	46.00	-11.14	-	-	peak
4	259.4434	46.71	-9.79	36.92	46.00	-9.08	-	-	peak
5	324.8645	46.44	-7.55	38.89	46.00	-7.11	-	-	peak
6	452.0013	39.65	-4.56	35.09	46.00	-10.91	-	-	peak

802.11a(Worst case)			
Test Channel	5600MHz	Polarity:	Vertical

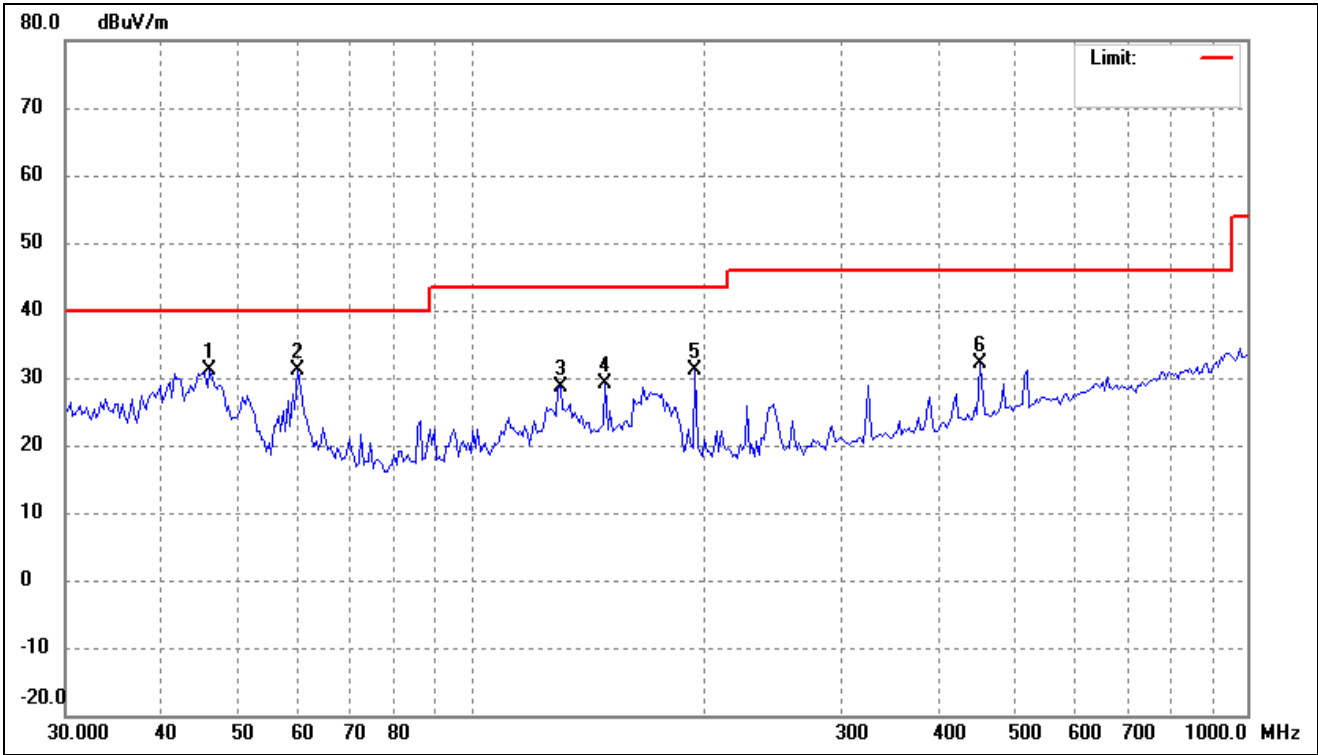


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0558	39.41	-8.38	31.03	40.00	-8.97	-	-	peak
2	59.7315	40.07	-8.92	31.15	40.00	-8.85	-	-	peak
3	130.3048	38.51	-9.84	28.67	43.50	-14.83	-	-	peak
4	148.9175	37.88	-8.68	29.20	43.50	-14.30	-	-	peak
5	194.4985	42.83	-11.67	31.16	43.50	-12.34	-	-	peak
6	452.0013	36.76	-4.56	32.20	46.00	-13.80	-	-	peak

802.11a(Worst case)			
Test Channel	5700MHz	Polarity:	Horizontal

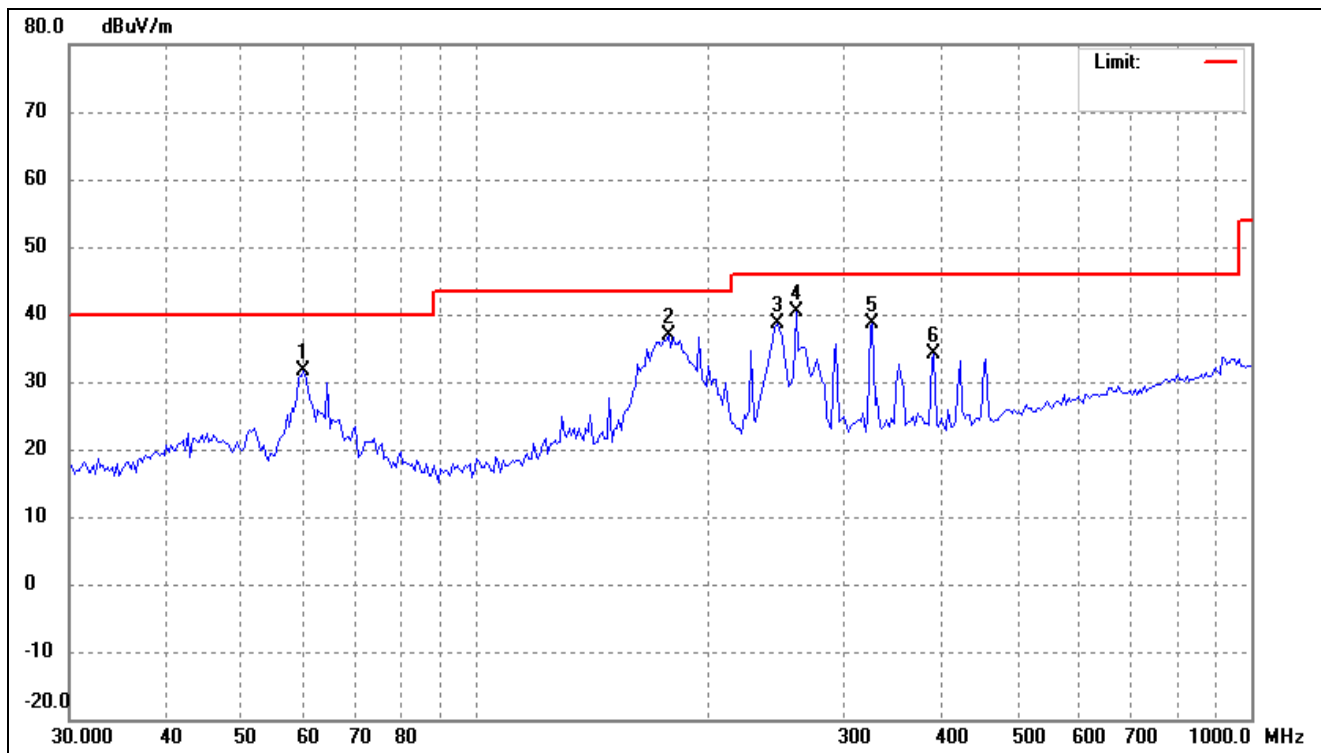

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.1528	40.57	-8.97	31.60	40.00	-8.40	-	-	peak
2	177.5179	46.78	-9.96	36.82	43.50	-6.68	-	-	peak
3	245.2606	49.11	-10.36	38.75	46.00	-7.25	-	-	peak
4	259.4434	50.10	-9.79	40.31	46.00	-5.69	-	-	peak
5	324.8645	46.12	-7.55	38.57	46.00	-7.43	-	-	peak
6	389.9874	40.31	-6.16	34.15	46.00	-11.85	-	-	peak

802.11a(Worst case)			
Test Channel	5700MHz	Polarity:	Vertical

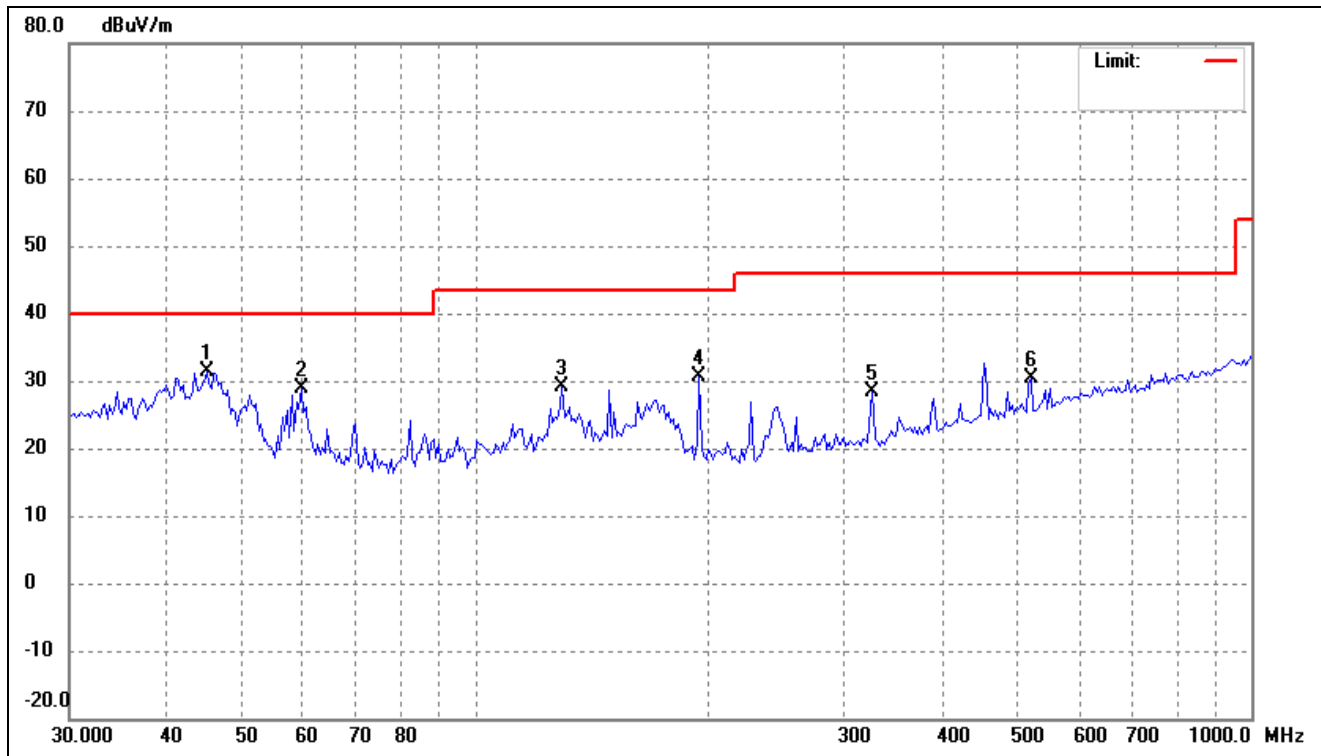


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0951	39.80	-8.46	31.34	40.00	-8.66	-	-	peak
2	59.7315	37.73	-8.92	28.81	40.00	-11.19	-	-	peak
3	129.3923	39.04	-9.89	29.15	43.50	-14.35	-	-	peak
4	194.4985	42.20	-11.67	30.53	43.50	-12.97	-	-	peak
5	324.8645	36.02	-7.55	28.47	46.00	-17.53	-	-	peak
6	520.2079	33.86	-3.59	30.27	46.00	-15.73	-	-	peak

➤ 5725-5850MHz


802.11a(Worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

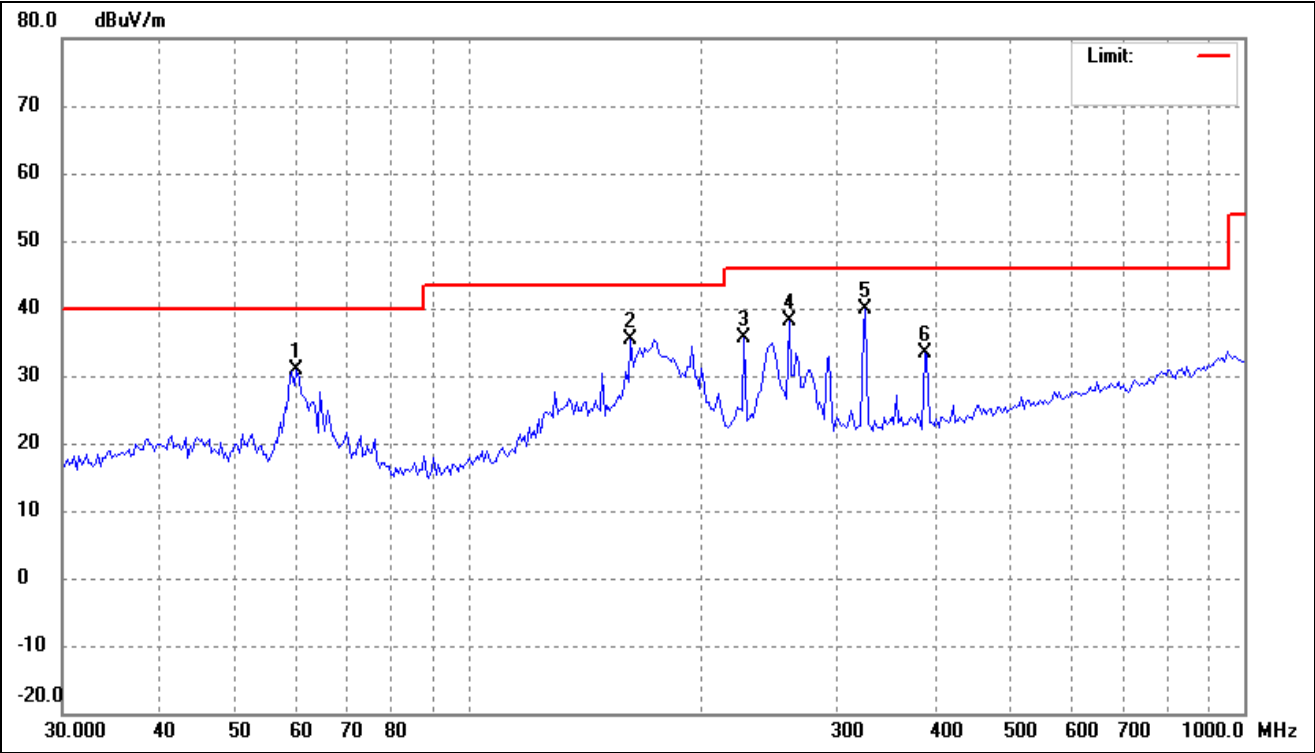

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.1528	39.88	-8.97	30.91	40.00	-9.09	-	-	peak
2	162.0197	44.13	-8.66	35.47	43.50	-8.03	-	-	peak
3	227.0164	47.35	-11.76	35.59	46.00	-10.41	-	-	peak
4	259.4434	48.03	-9.79	38.24	46.00	-7.76	-	-	peak
5	324.8645	47.37	-7.55	39.82	46.00	-6.18	-	-	peak
6	387.2565	39.69	-6.22	33.47	46.00	-12.53	-	-	peak

802.11a(Worst case)			
Test Channel	5745MHz	Polarity:	Vertical

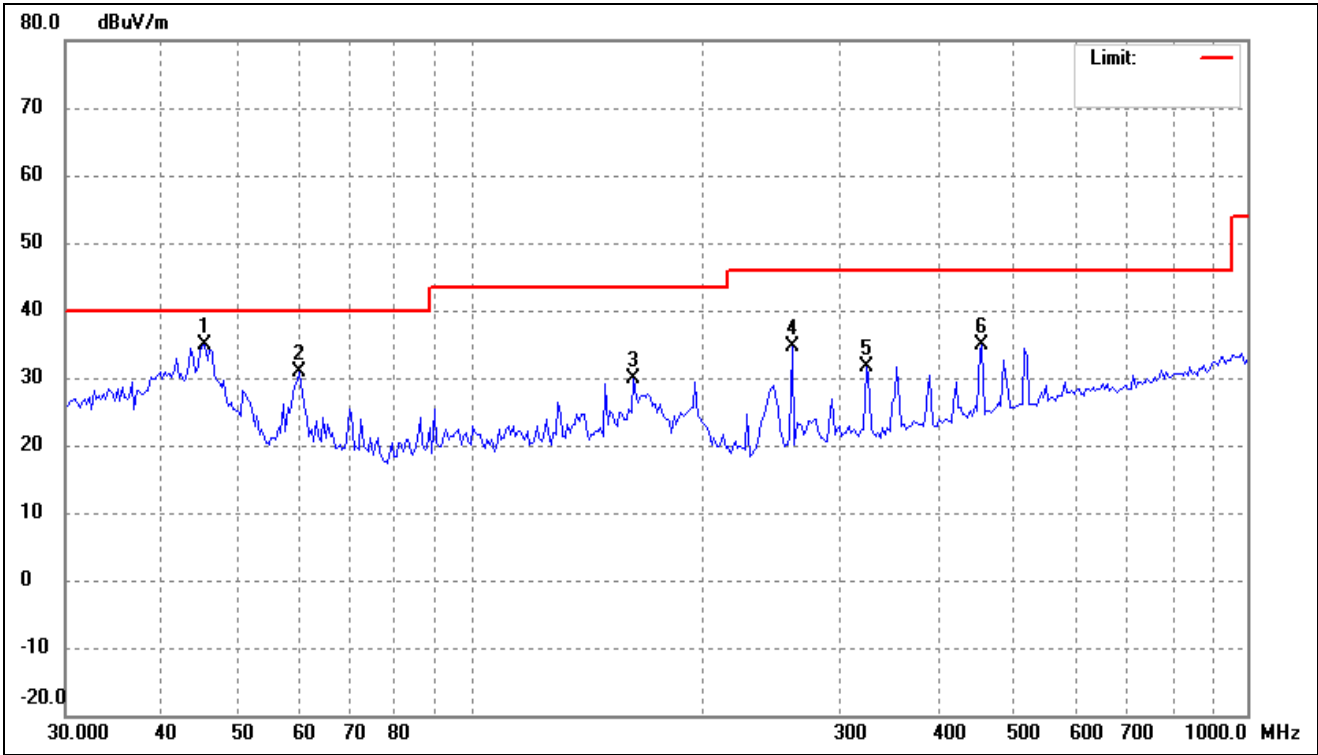

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4131	43.42	-8.43	34.99	40.00	-5.01	-	-	peak
2	60.1528	39.93	-8.97	30.96	40.00	-9.04	-	-	peak
3	162.0197	38.53	-8.66	29.87	43.50	-13.63	-	-	peak
4	259.4434	44.53	-9.79	34.74	46.00	-11.26	-	-	peak
5	322.5896	39.37	-7.62	31.75	46.00	-14.25	-	-	peak
6	455.1888	39.43	-4.52	34.91	46.00	-11.09	-	-	peak

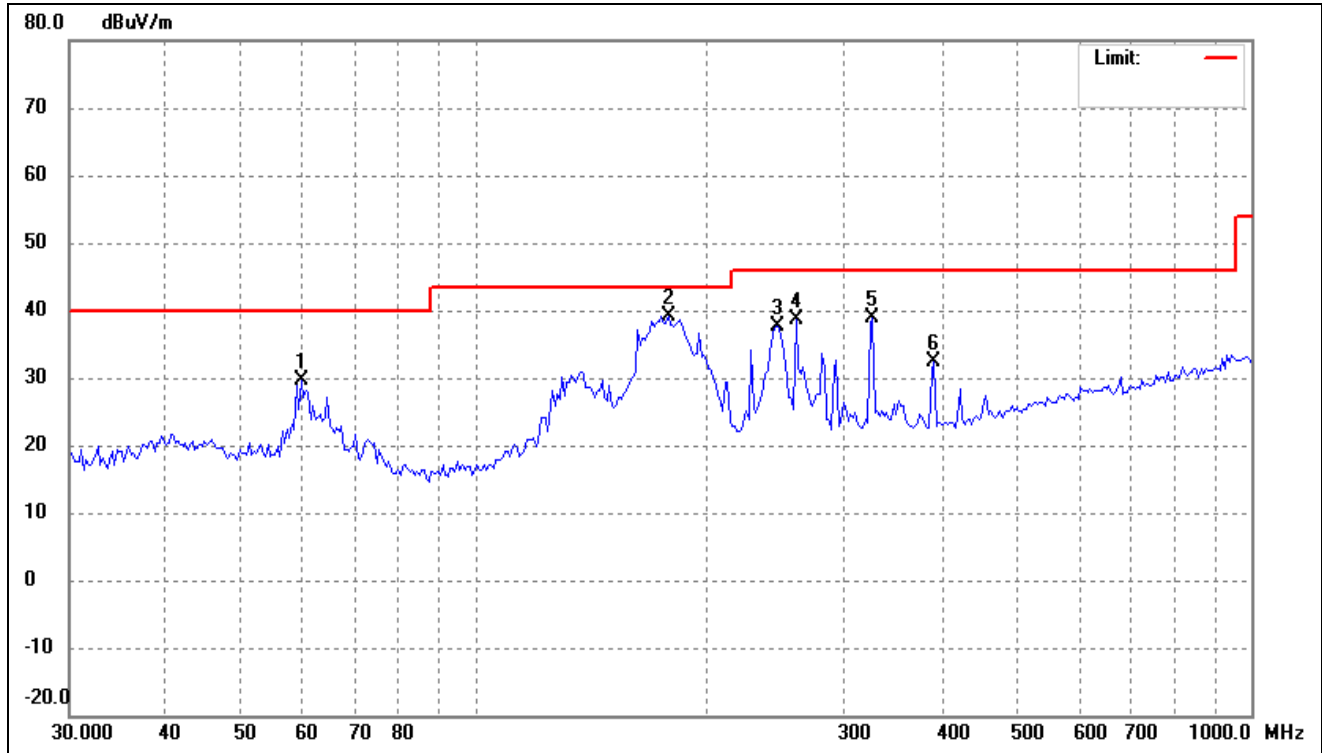
802.11a(Worst case)

Test Channel

5785MHz


Polarity:

Horizontal




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.7315	38.65	-8.92	29.73	40.00	-10.27	-	-	peak
2	177.5179	49.18	-9.96	39.22	43.50	-4.28	-	-	peak
3	245.2606	47.93	-10.36	37.57	46.00	-8.43	-	-	peak
4	259.4434	48.36	-9.79	38.57	46.00	-7.43	-	-	peak
5	324.8645	46.32	-7.55	38.77	46.00	-7.23	-	-	peak
6	389.9874	38.60	-6.16	32.44	46.00	-13.56	-	-	peak

802.11a(Worst case)			
Test Channel	5785MHz	Polarity:	Vertical

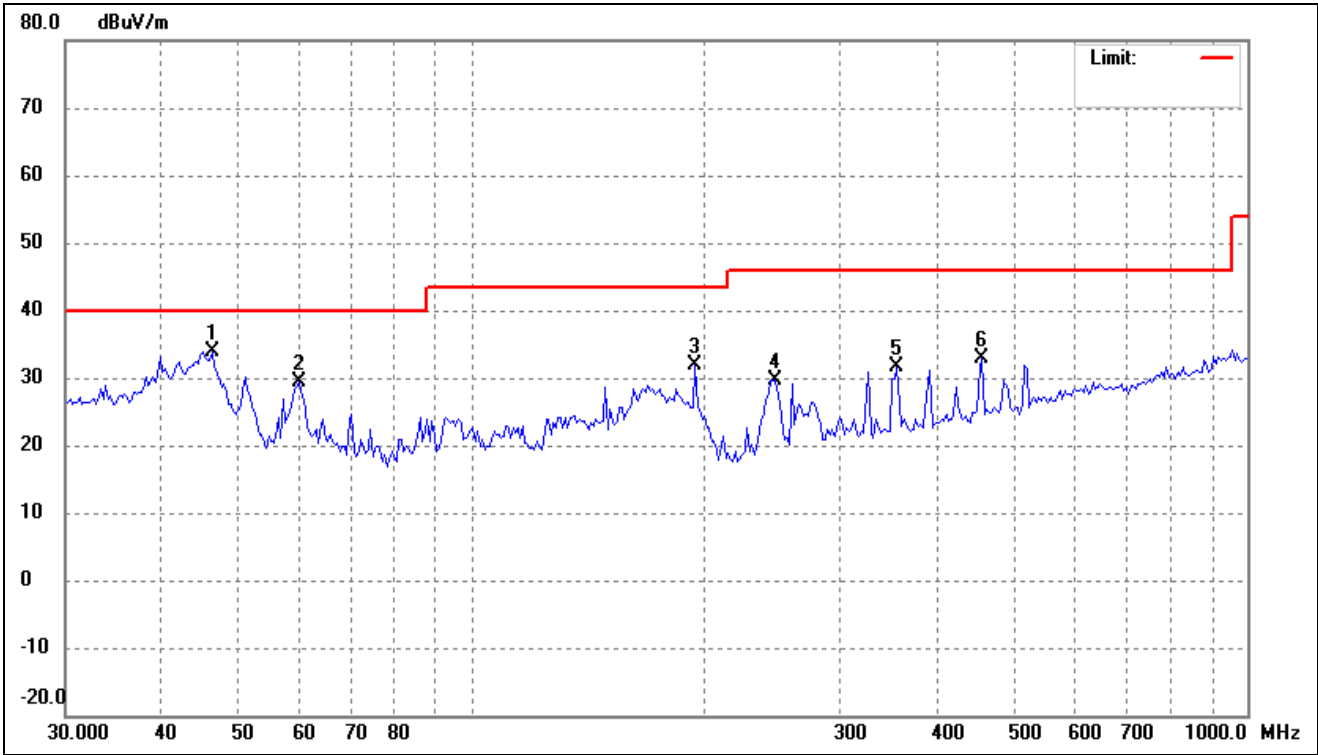

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.3806	42.27	-8.37	33.90	40.00	-6.10	-	-	peak
2	60.1528	38.28	-8.97	29.31	40.00	-10.69	-	-	peak
3	194.4985	43.46	-11.67	31.79	43.50	-11.71	-	-	peak
4	246.9901	40.04	-10.30	29.74	46.00	-16.26	-	-	peak
5	353.4472	38.61	-7.02	31.59	46.00	-14.41	-	-	peak
6	455.1888	37.49	-4.52	32.97	46.00	-13.03	-	-	peak


802.11a(Worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

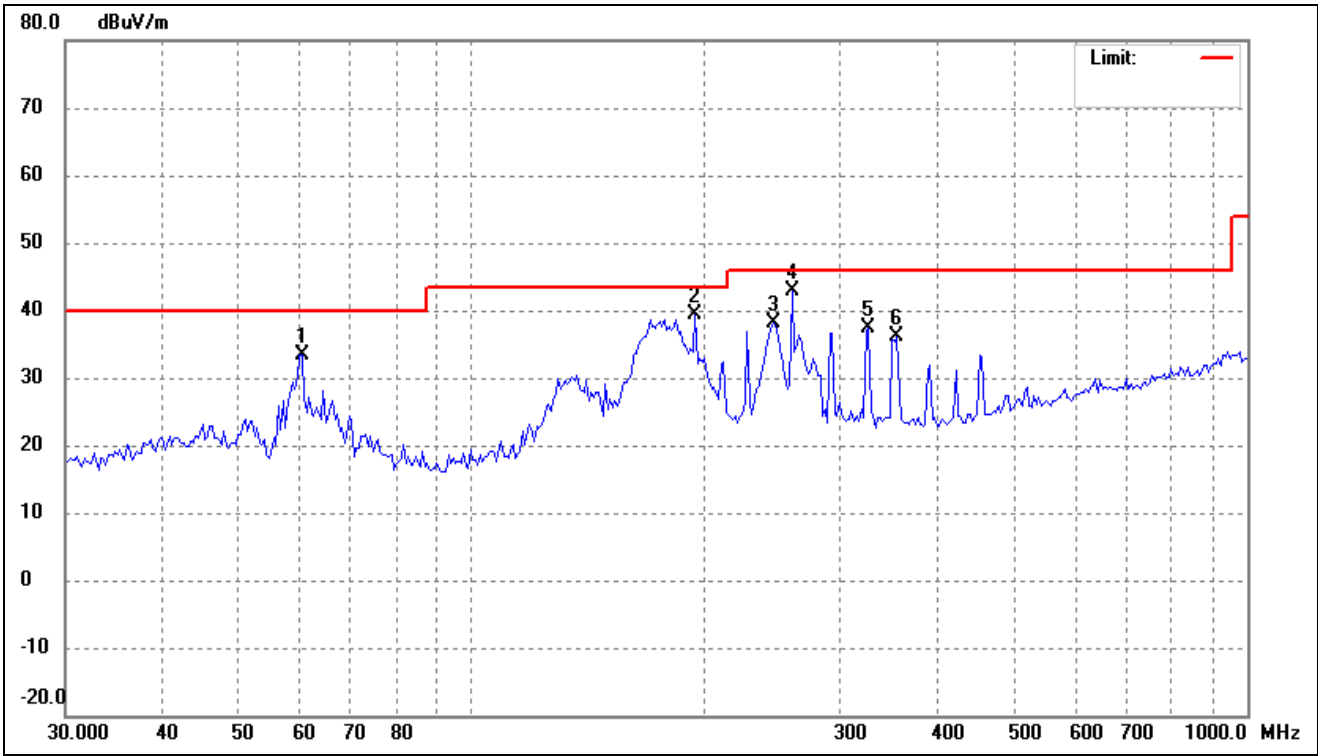

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.5769	42.49	-9.04	33.45	40.00	-6.55	-	-	peak
2	194.4985	51.17	-11.67	39.50	43.50	-4.00	-	-	peak
3	245.2606	48.49	-10.36	38.13	46.00	-7.87	-	-	peak
4	259.4434	52.58	-9.79	42.79	46.00	-3.21	-	-	peak
5	324.8645	45.04	-7.55	37.49	46.00	-8.51	-	-	peak
6	353.4472	43.18	-7.02	36.16	46.00	-9.84	-	-	peak

802.11a(Worst case)

Test Channel	5825MHz	Polarity:	Vertical
--------------	---------	-----------	----------

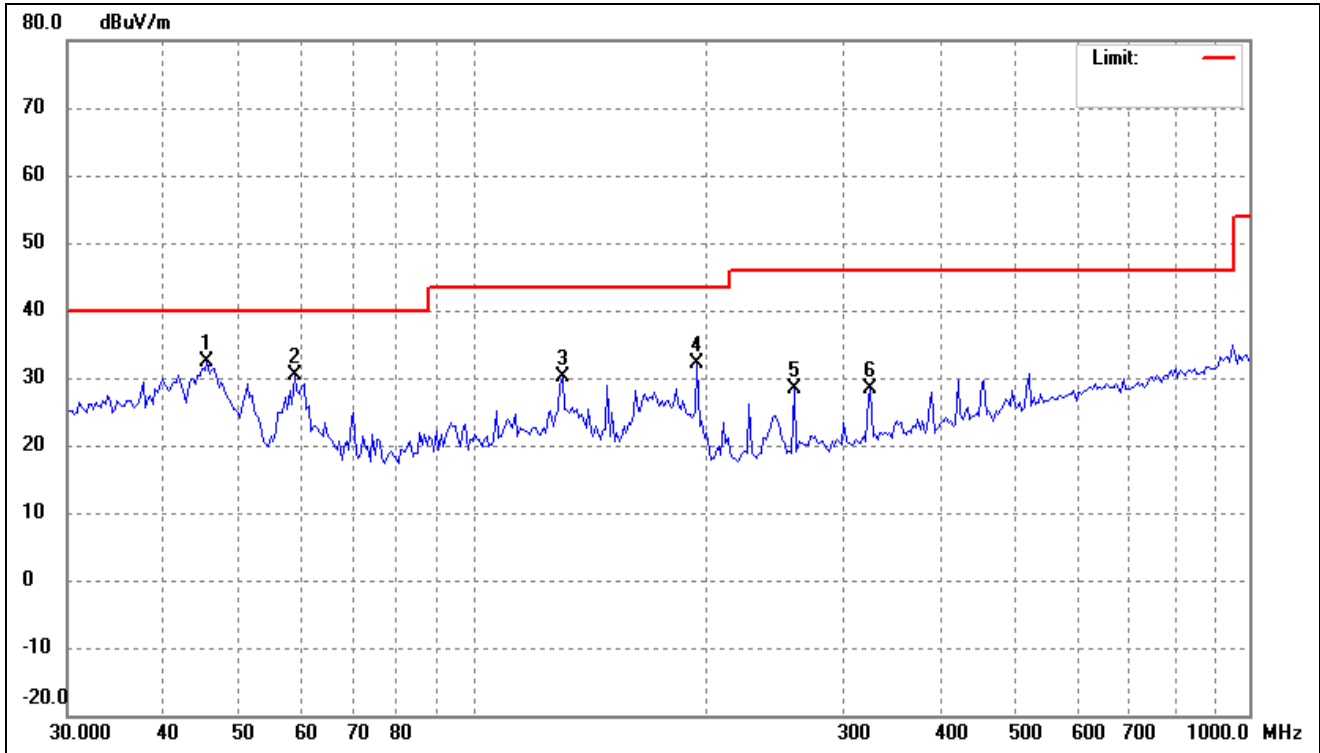


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4131	40.73	-8.43	32.30	40.00	-7.70	-	-	peak
2	58.8979	39.35	-8.87	30.48	40.00	-9.52	-	-	peak
3	130.3048	39.87	-9.84	30.03	43.50	-13.47	-	-	peak
4	194.4985	43.87	-11.67	32.20	43.50	-11.30	-	-	peak
5	259.4434	38.08	-9.79	28.29	46.00	-17.71	-	-	peak
6	324.8645	35.99	-7.55	28.44	46.00	-17.56	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emission above 1GHz
- Antenna 1(worst case)


5150-5250MHz

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)

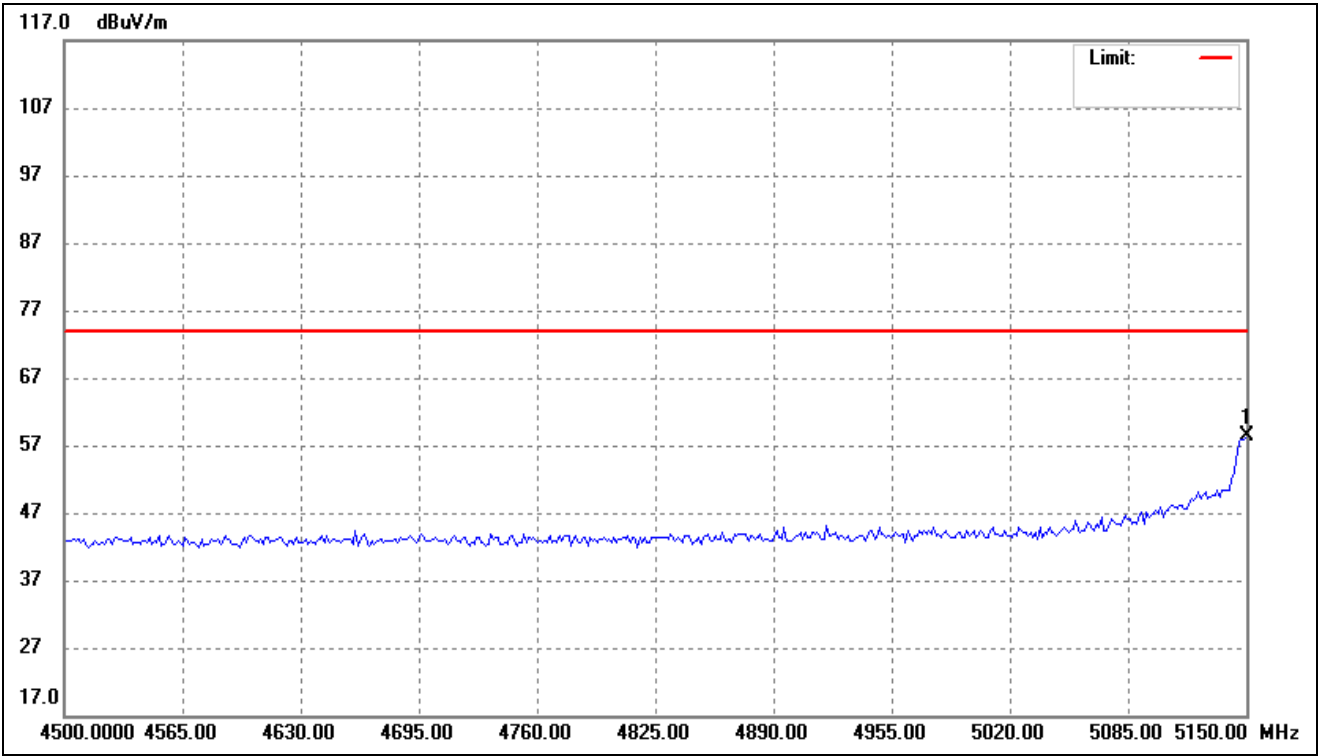

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	70.15	-11.66	58.49	74.00	-15.51	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)

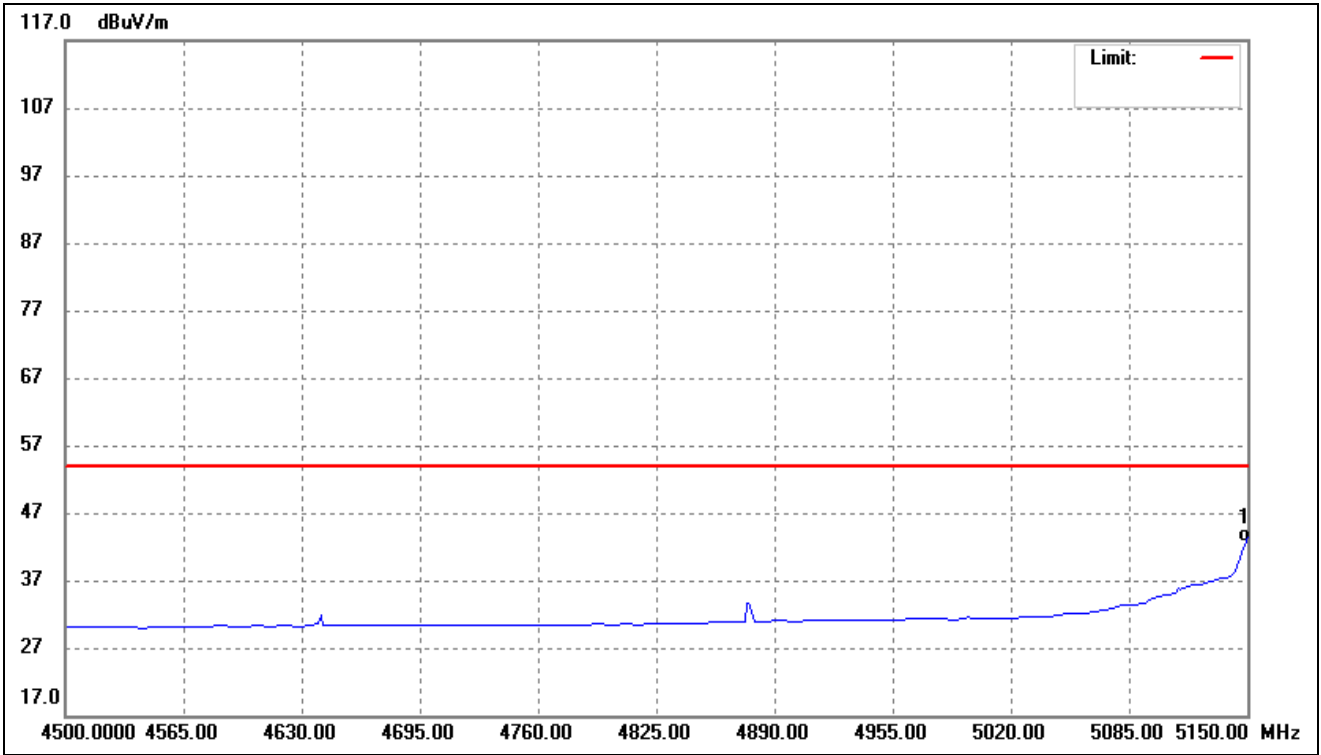


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	55.31	-11.66	43.65	54.00	-10.35	-	-	AVG

5250-5350MHz


802.11a- Restricted Bandedge (worst case)

Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)
--------------	-------------------	-----------	-------------------------

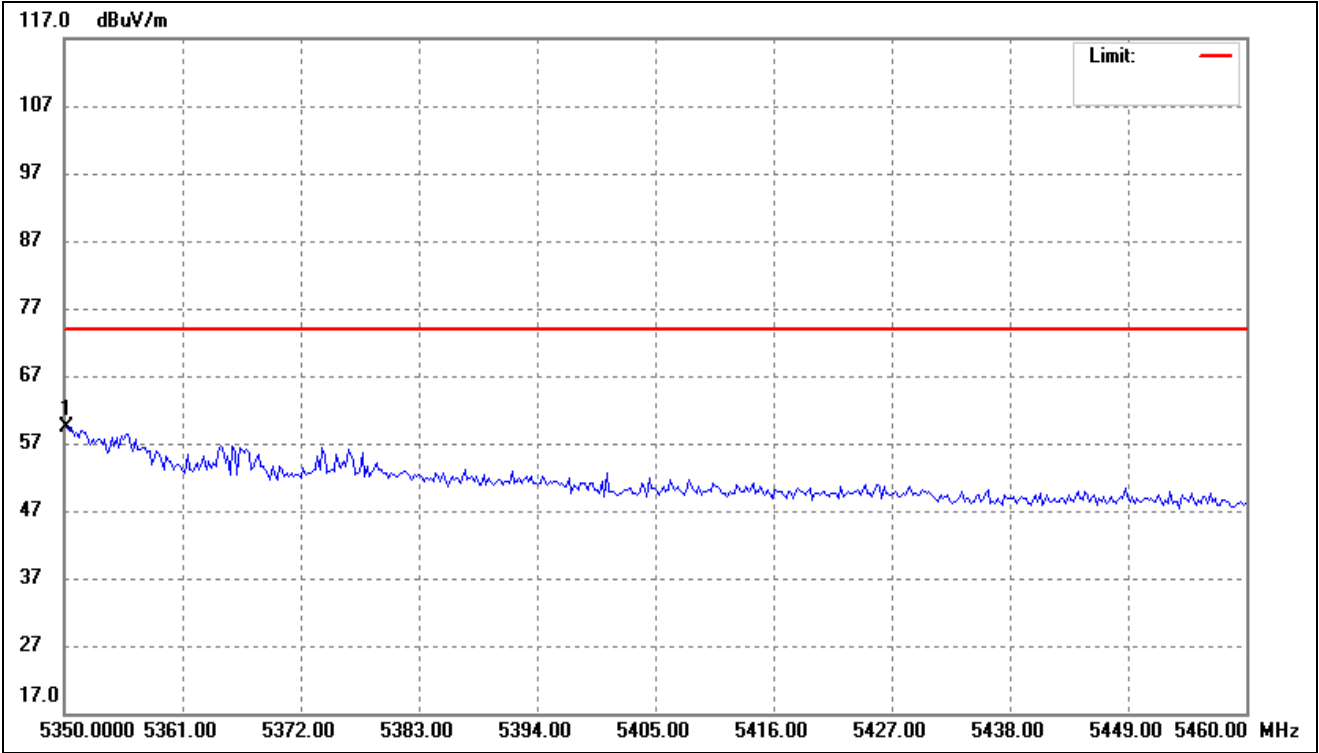

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.220	70.13	-10.67	59.46	74.00	-14.54	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)

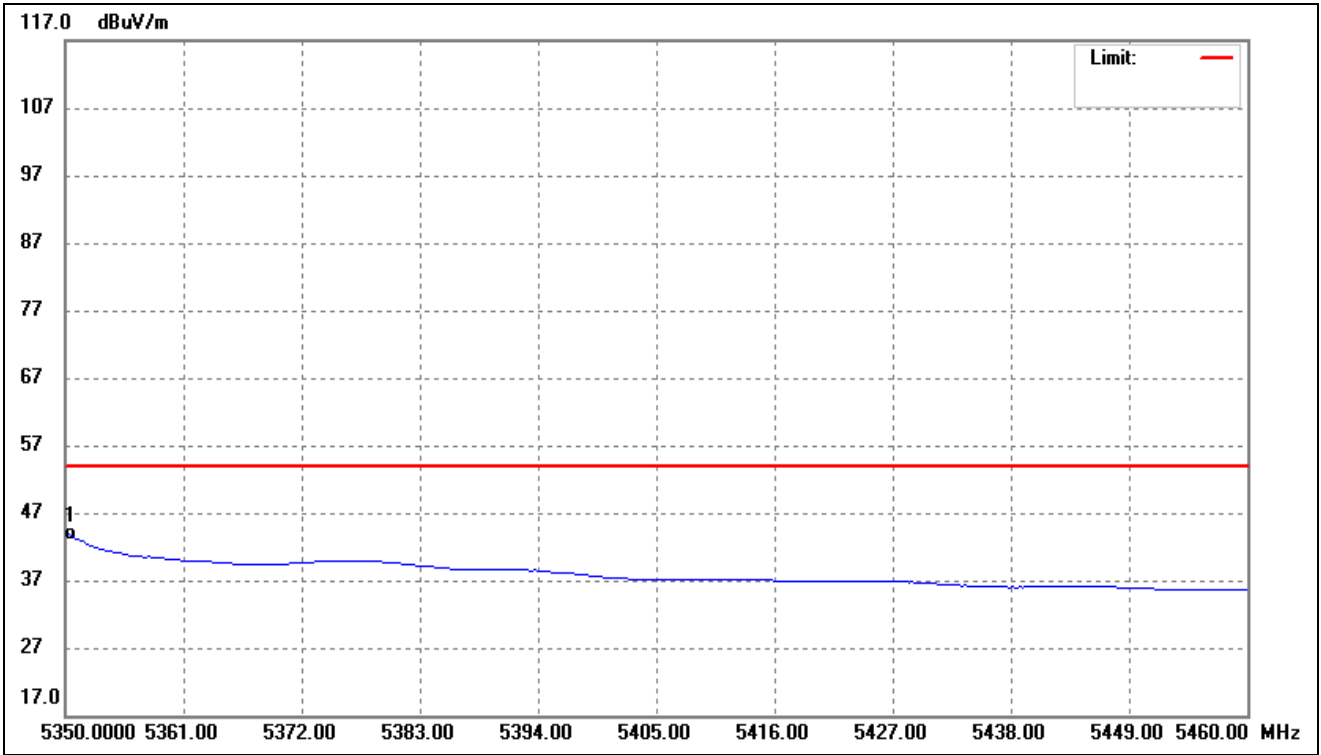


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	54.50	-10.67	43.83	54.00	-10.17	-	-	AVG

5470-5725MHz


802.11a- Restricted Bandedge (worst case)

Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)
--------------	-------------------	-----------	-------------------------

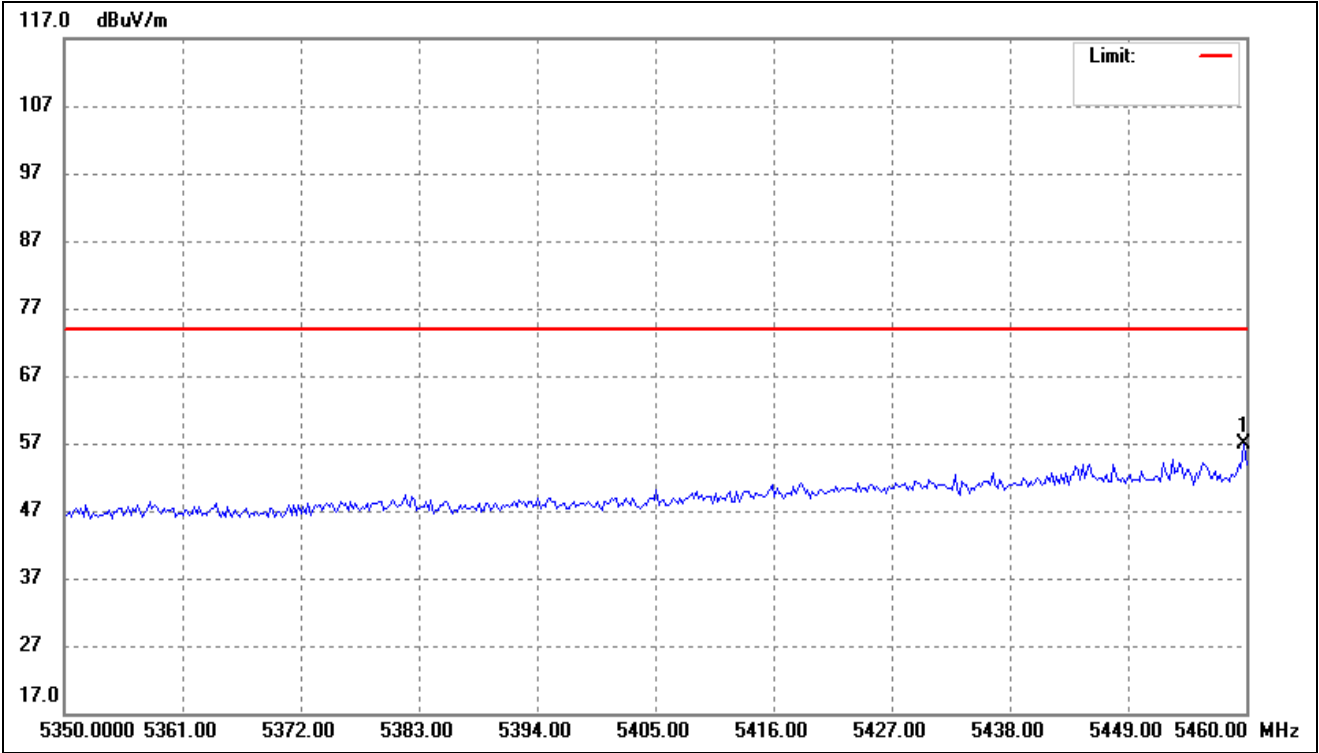

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5459.780	67.00	-10.13	56.87	74.00	-17.13	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal (worst case)

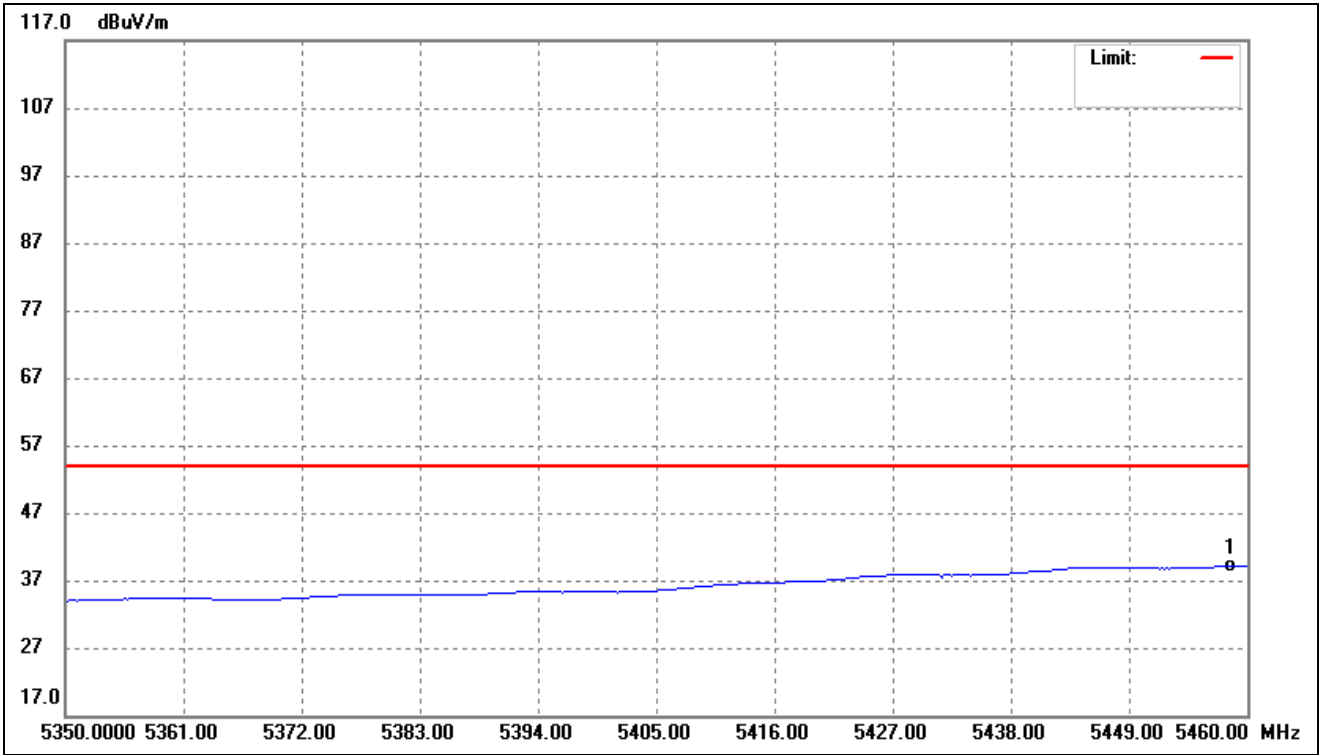


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5458.457	49.25	-10.13	39.12	54.00	-14.88	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.


- Antenna 1(worst case)
- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

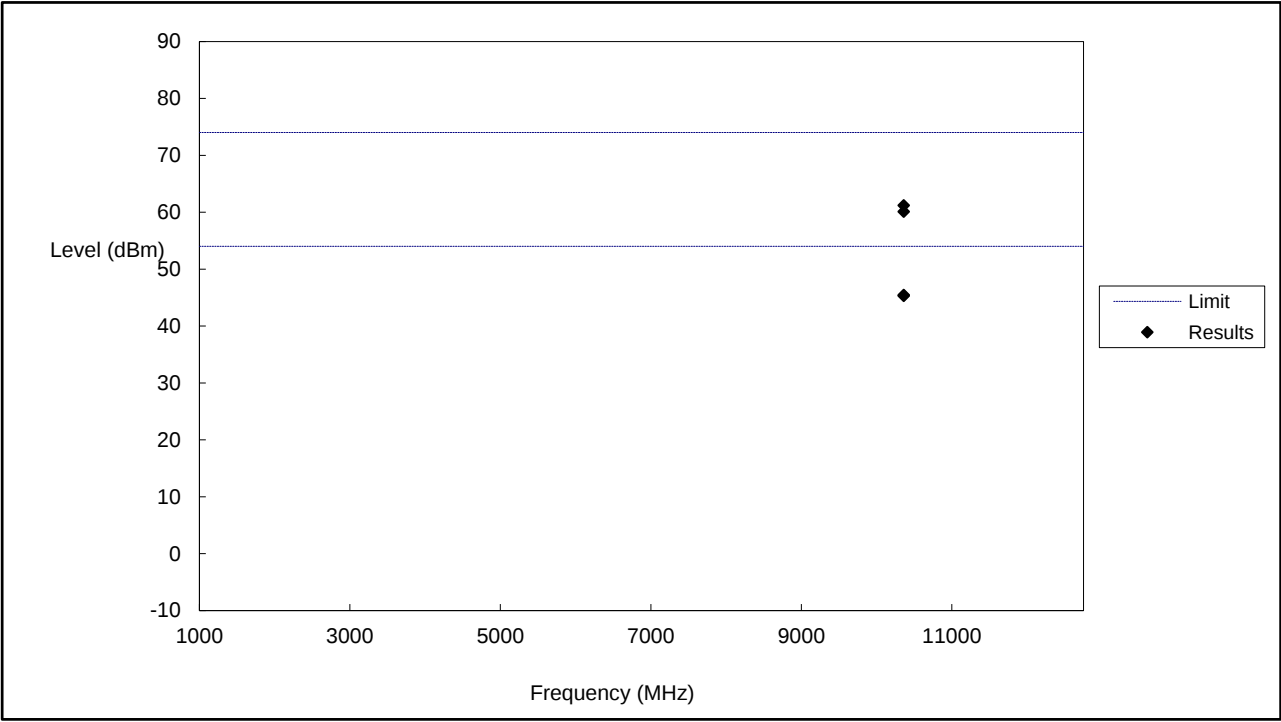Low Channel (5180MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10360	61.19	74	-12.81	H	RMS
2	10360	45.46	54	-8.54	H	RMS
1	10360	60.10	74	-13.90	V	RMS
2	10360	45.32	54	-8.68	V	RMS

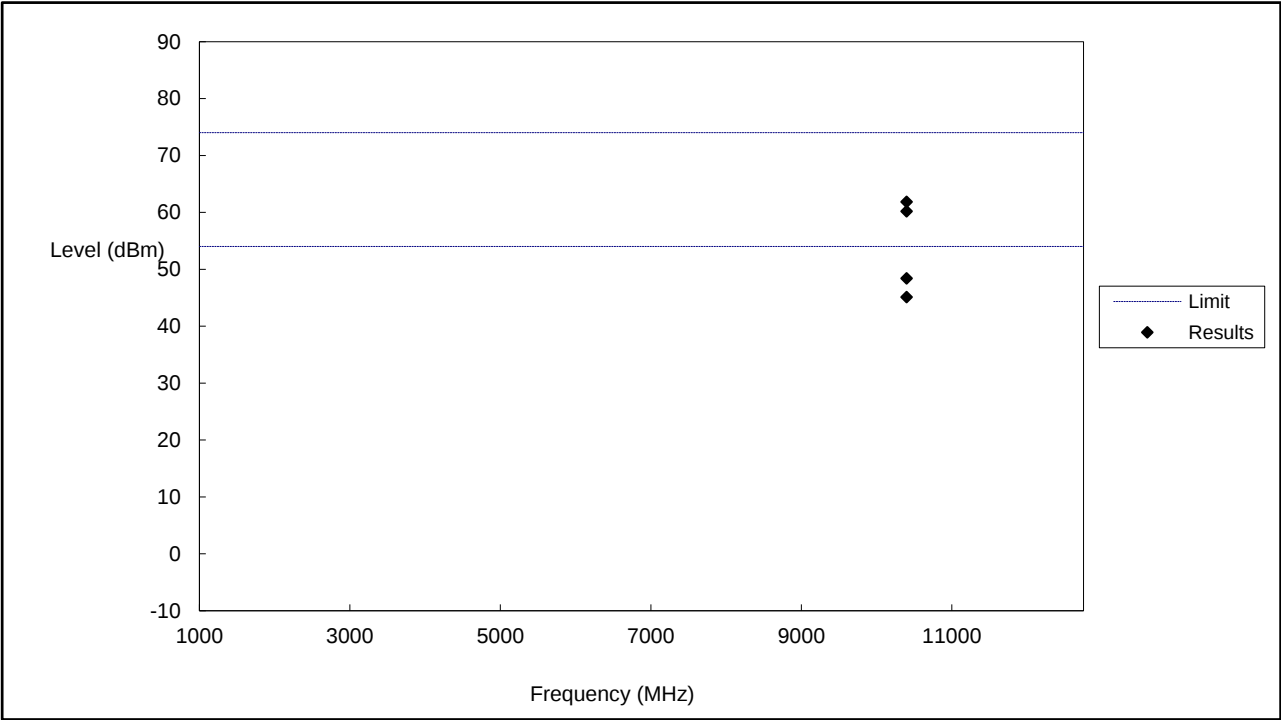Middle Channel (5200MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10400	60.19	74	-13.81	H	RMS
2	10400	45.12	54	-8.88	H	RMS
1	10400	61.84	74	-12.16	V	RMS
2	10400	48.40	54	-5.60	V	RMS

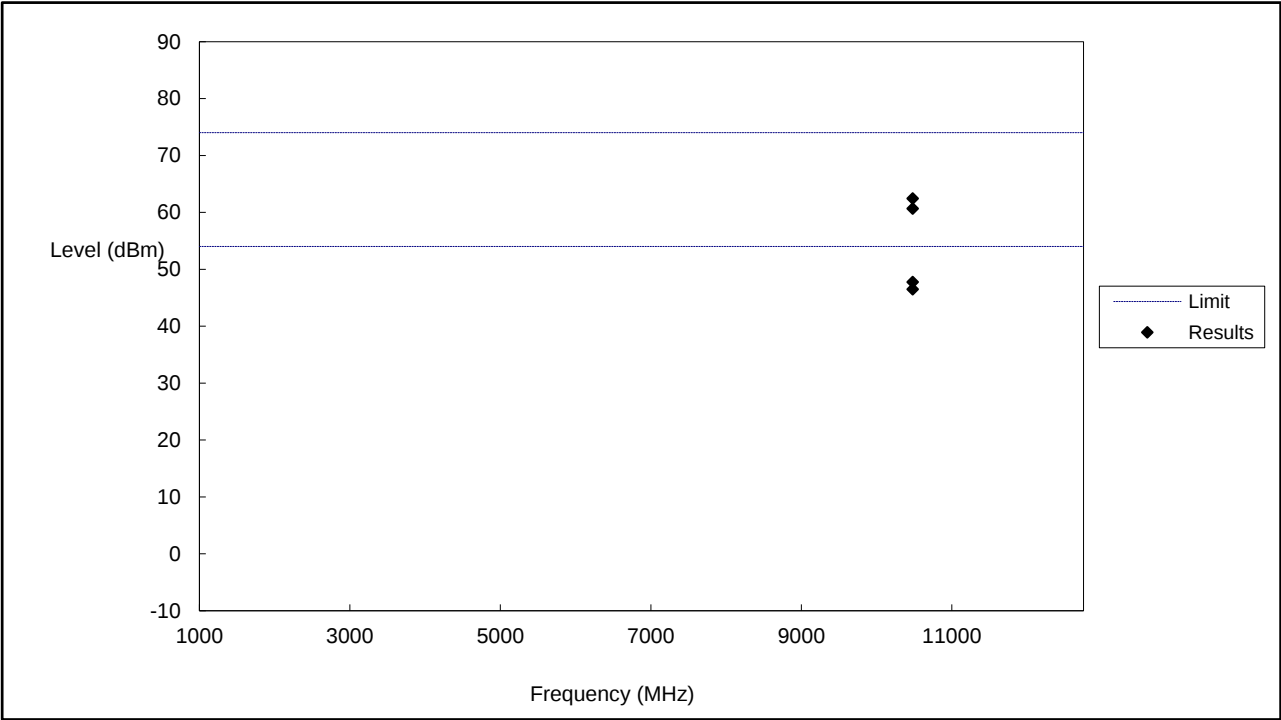High Channel (5240MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10480	62.43	74	-11.57	H	RMS
2	10480	46.50	54	-7.50	H	RMS
1	10480	60.67	74	-13.33	V	RMS
2	10480	47.75	54	-6.25	V	RMS

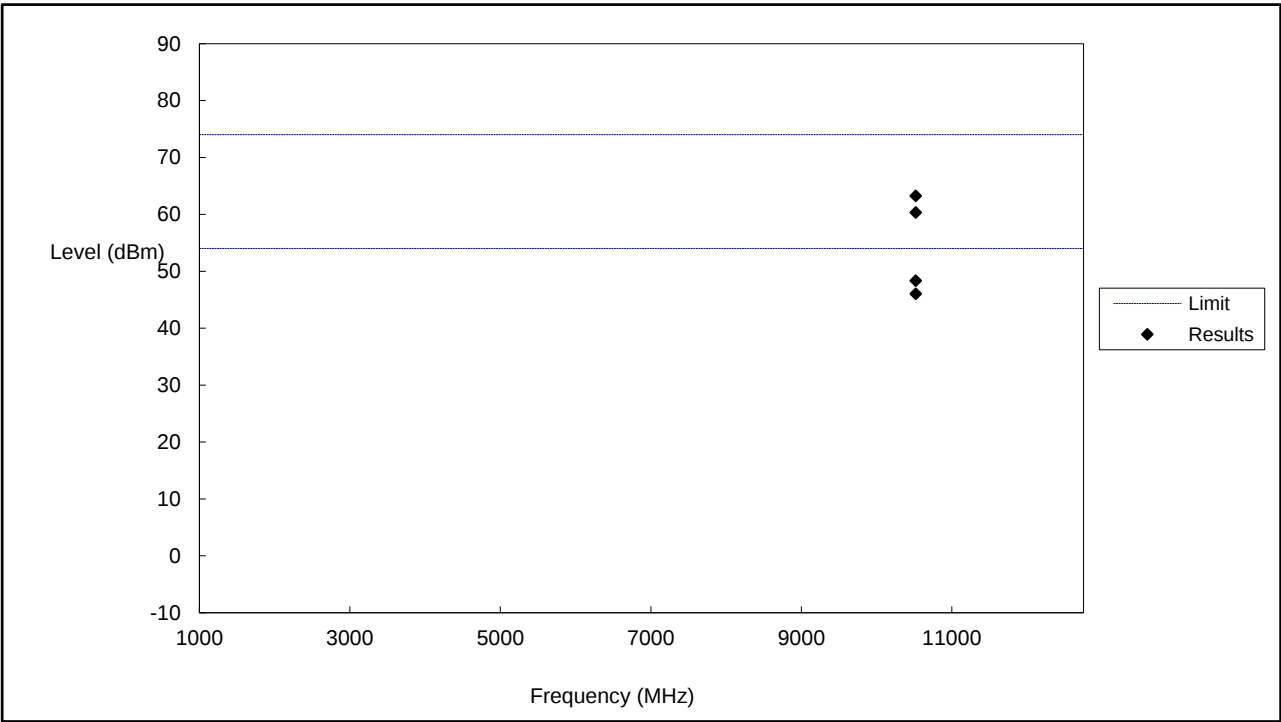Low Channel (5260MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10520	60.32	74	-13.68	H	RMS
2	10520	48.34	54	-5.66	H	RMS
1	10520	63.25	74	-10.75	V	RMS
2	10520	46.05	54	-7.95	V	RMS

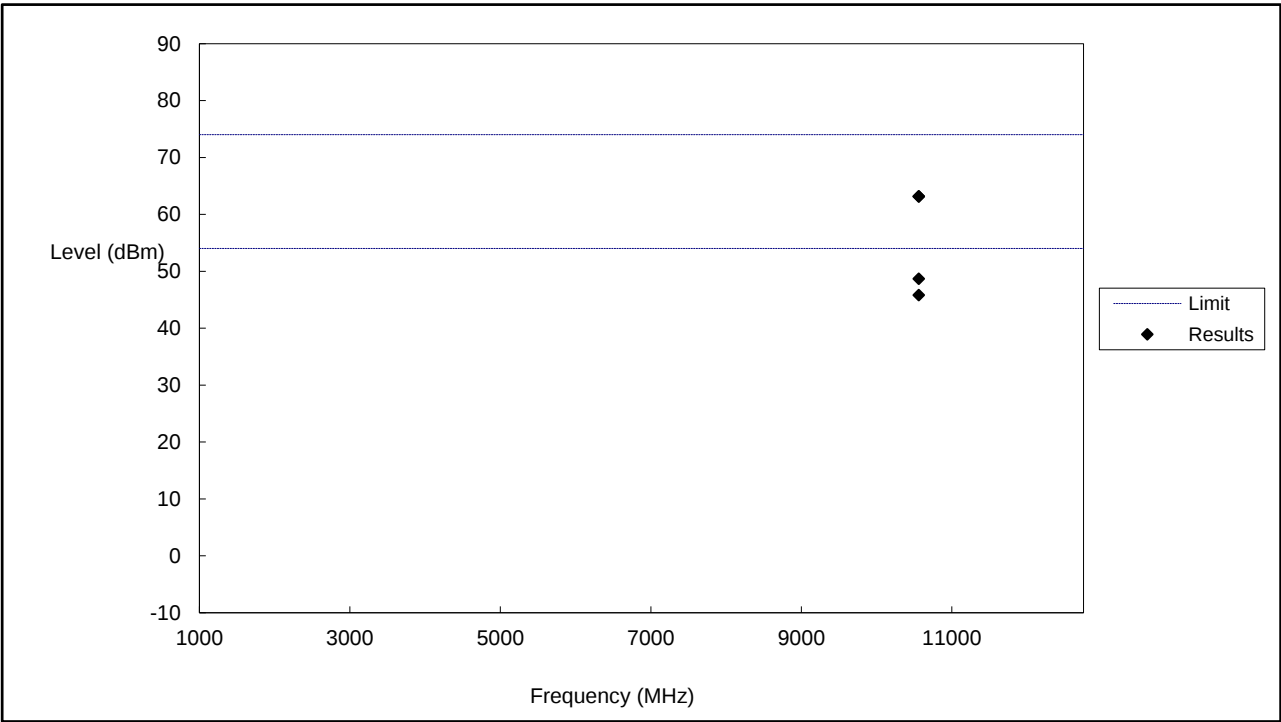Middle Channel (5280MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10560	63.18	74	-10.82	H	RMS
2	10560	45.80	54	-8.20	H	RMS
1	10560	63.13	74	-10.87	V	RMS
2	10560	48.68	54	-5.32	V	RMS

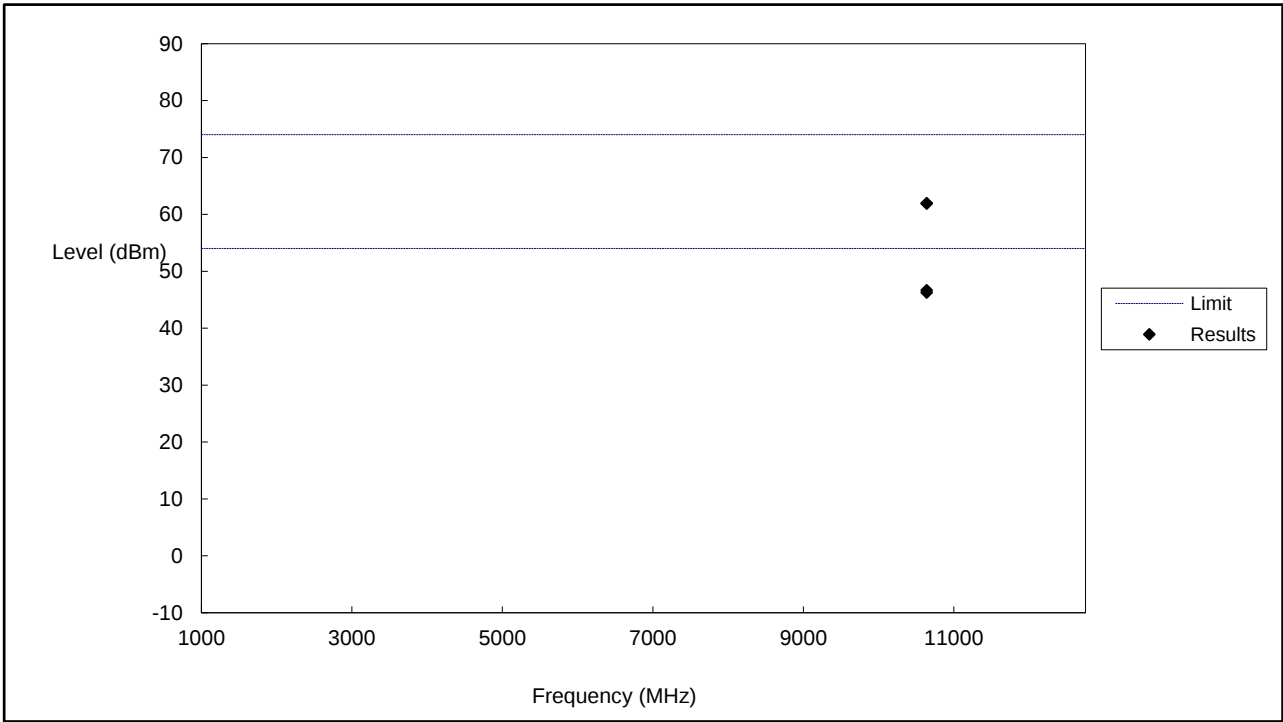High Channel (5320MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10640	61.94	74	-12.06	H	RMS
2	10640	46.27	54	-7.73	H	RMS
1	10640	61.93	74	-12.07	V	RMS
2	10640	46.67	54	-7.33	V	RMS

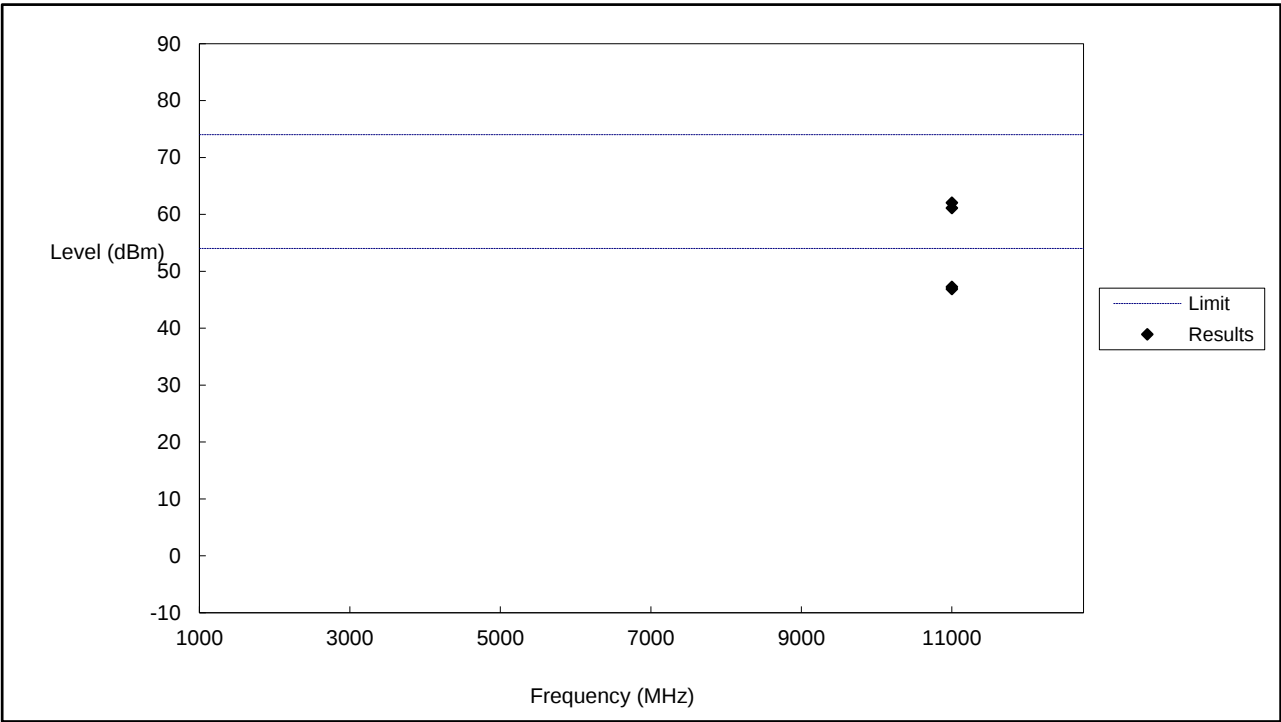Low Channel (5500MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11000	62.05	74	-11.95	H	RMS
2	11000	46.88	54	-7.12	H	RMS
1	11000	61.12	74	-12.88	V	RMS
2	11000	47.25	54	-6.75	V	RMS

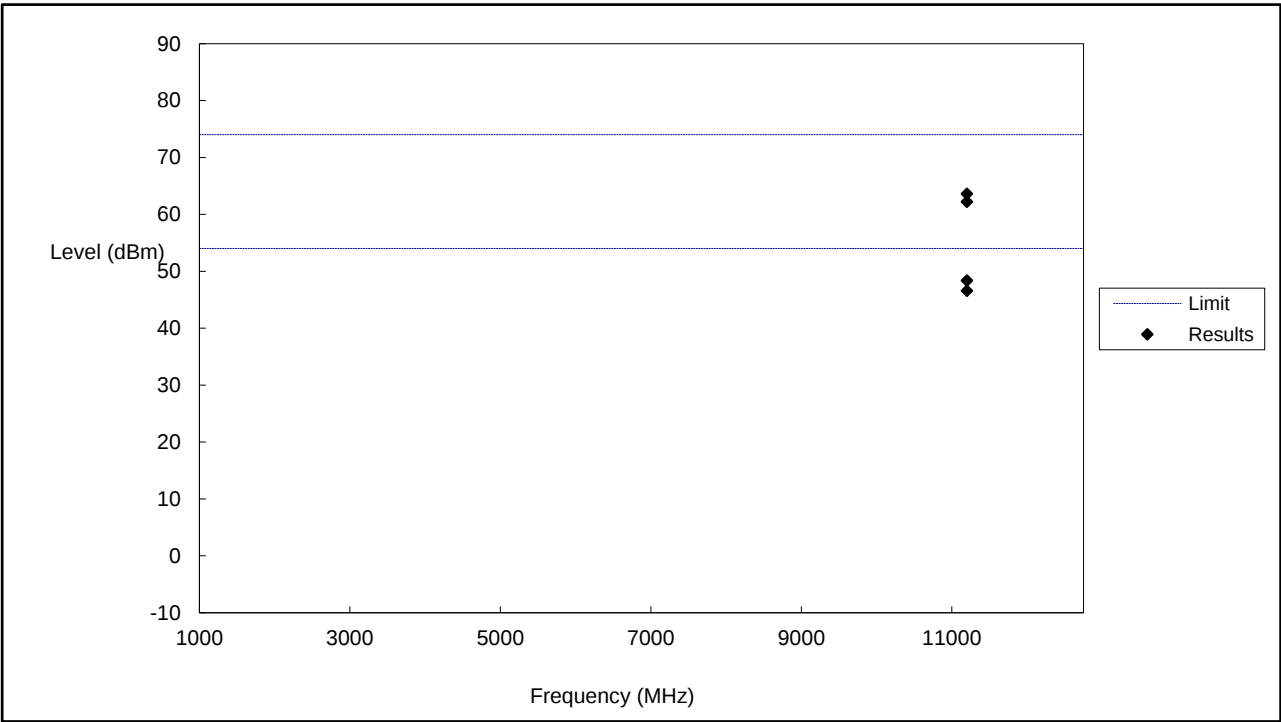Middle Channel (5600MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11200	62.20	74	-11.80	H	RMS
2	11200	48.37	54	-5.63	H	RMS
1	11200	63.61	74	-10.39	V	RMS
2	11200	46.56	54	-7.44	V	RMS

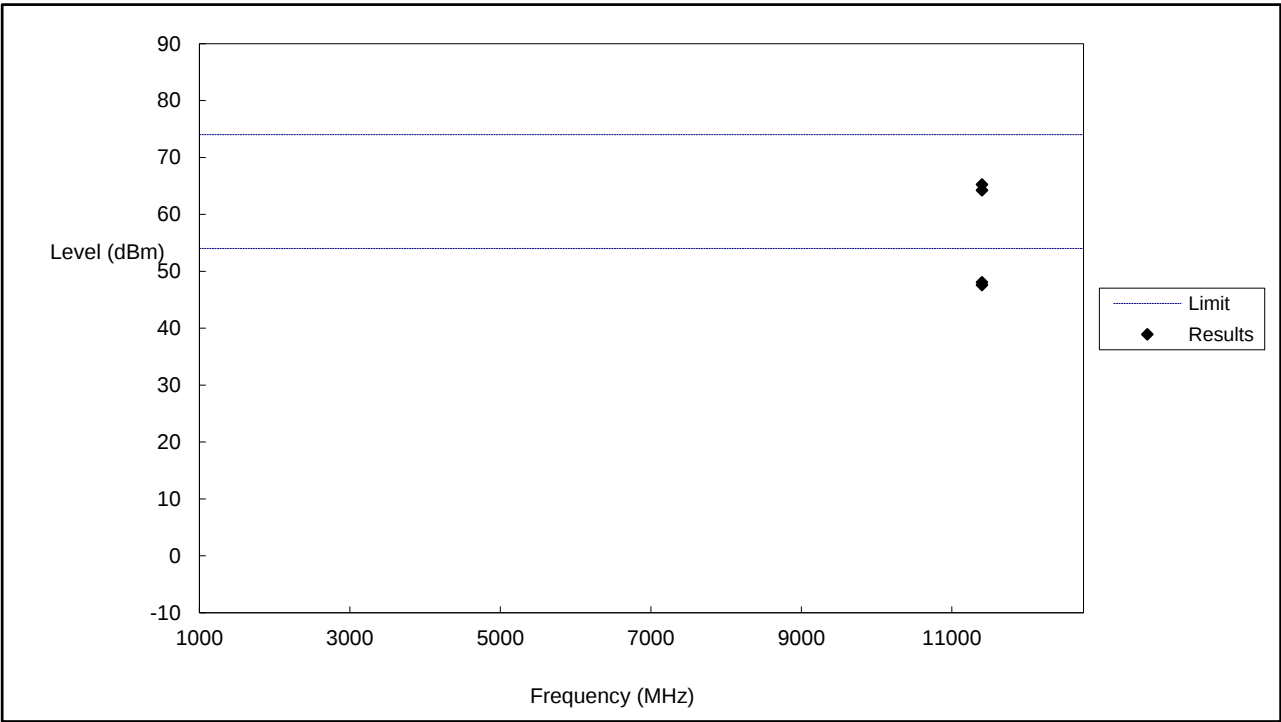High Channel (5700MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11400	64.25	74	-9.75	H	RMS
2	11400	48.05	54	-5.95	H	RMS
1	11400	65.26	74	-8.74	V	RMS
2	11400	47.59	54	-6.41	V	RMS

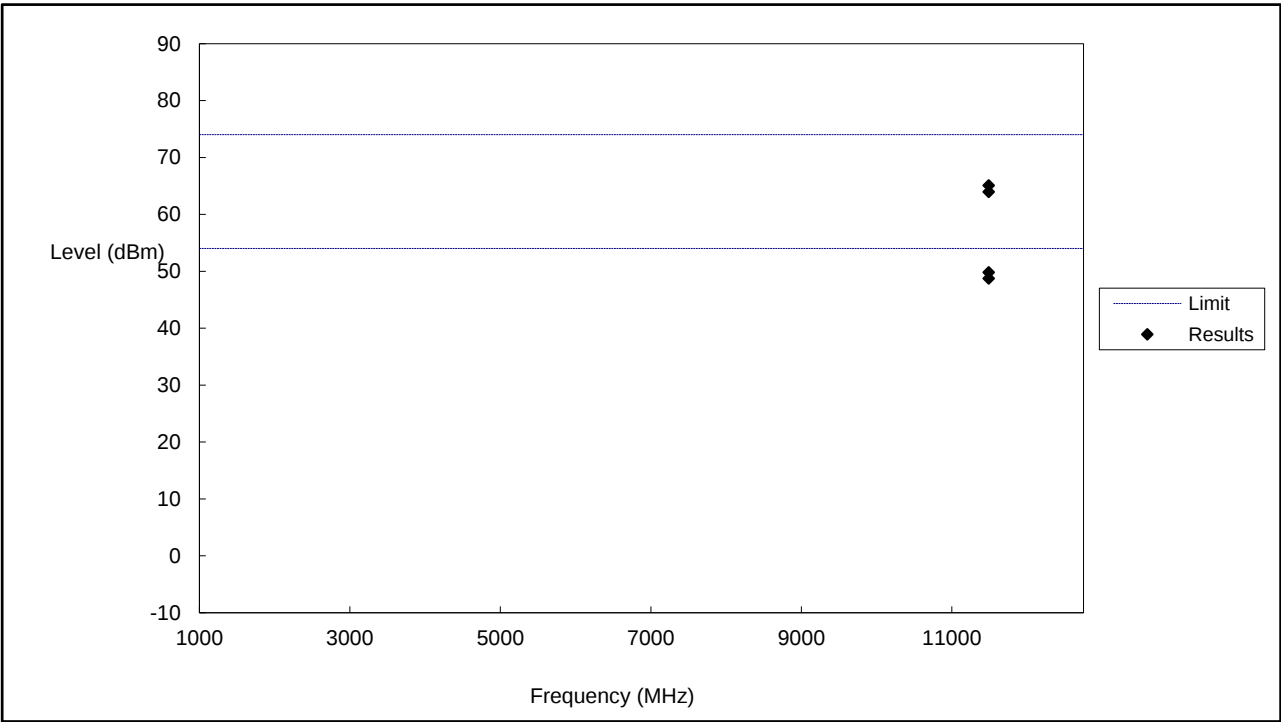Low Channel (5745MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11490	63.96	74	-10.04	H	RMS
2	11490	48.75	54	-5.25	H	RMS
1	11490	65.07	74	-8.93	V	RMS
2	11490	49.82	54	-4.18	V	RMS

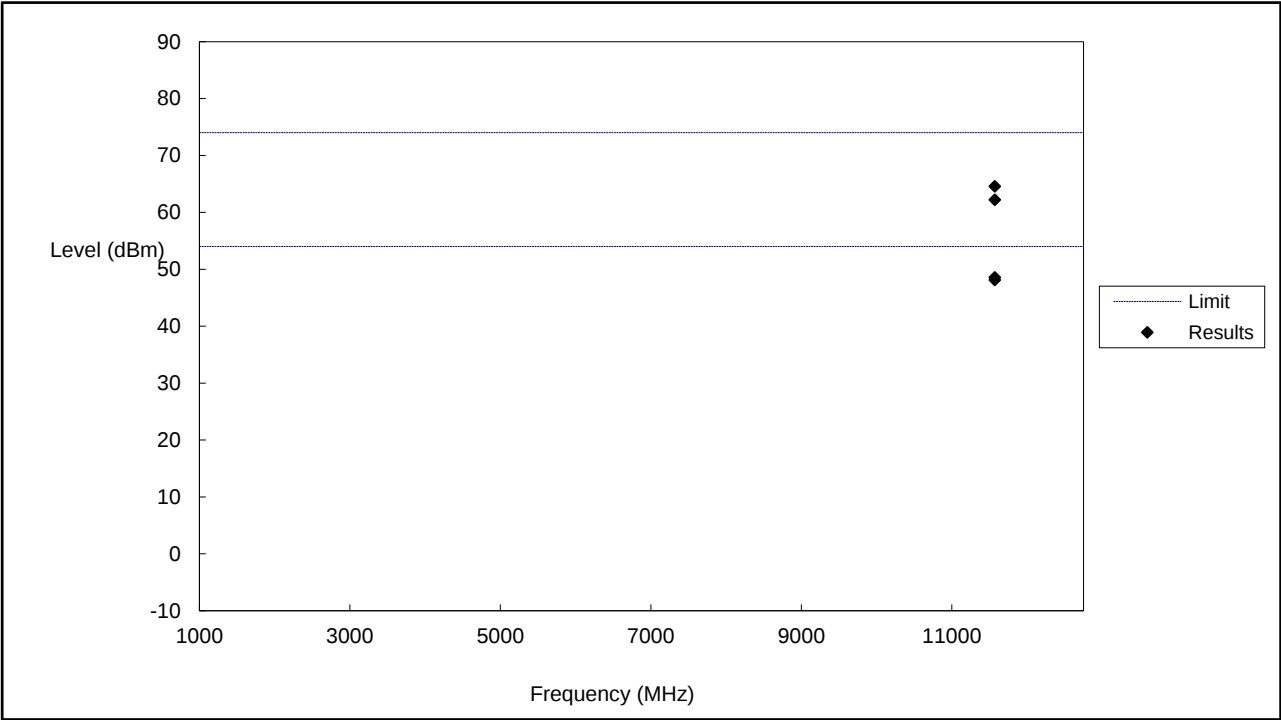Middle Channel (5785MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11570	62.20	74	-11.80	H	RMS
2	11570	48.56	54	-5.44	H	RMS
1	11570	64.57	74	-9.43	V	RMS
2	11570	48.12	54	-5.88	V	RMS

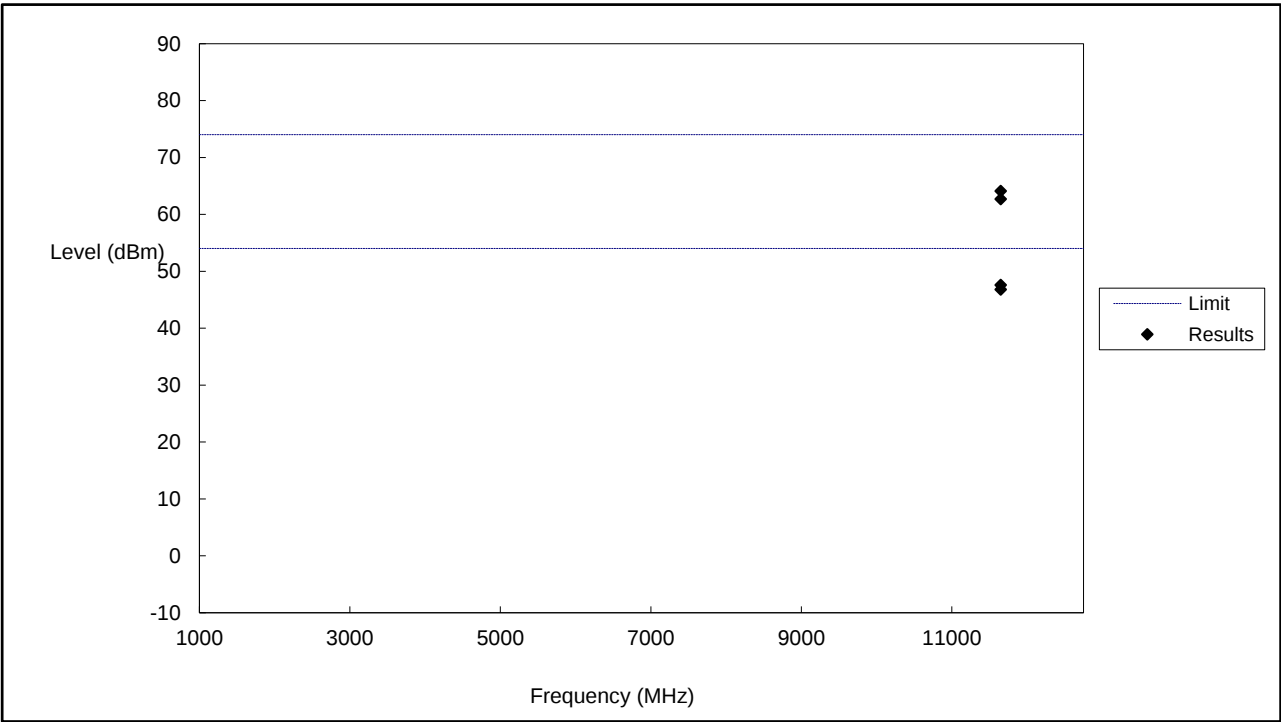High Channel (5825MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11650	64.09	74	-9.91	H	RMS
2	11650	46.81	54	-7.19	H	RMS
1	11650	62.70	74	-11.30	V	RMS
2	11650	47.59	54	-6.41	V	RMS

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.79	-27
Highest	Above 5350	-41.12	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-44.37	-27
Highest	Above 5350	-41.70	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz


Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-40.79	-27
Highest	Above 5725	-37.59	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-43.83	-27
	5650 to 5700	-36.47	-27 to -17
	5700 to 5720	-27.92	-17 to 15.6
	5720 to 5725	-17.48	15.6 to 27
Highest	5850 to 5855	-15.49	27 to 15.6
	5855 to 5875	-25.89	15.6 to -17
	5875 to 5925	-34.41	-17 to -27
	Above 5925	-40.79	-27
Note: the data just list the worst cases			


- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

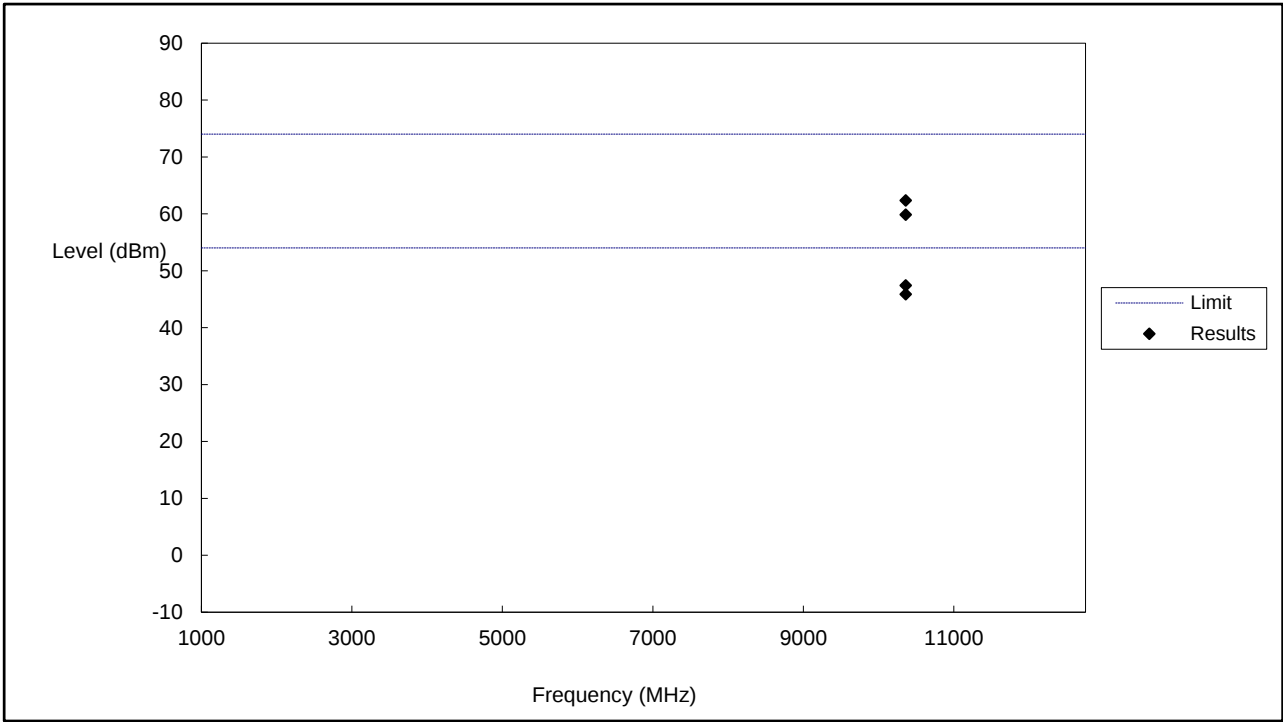Low Channel (5180MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10360	59.86	74	-14.14	H	RMS
2	10360	45.86	54	-8.14	H	RMS
1	10360	62.36	74	-11.64	V	RMS
2	10360	47.41	54	-6.59	V	RMS

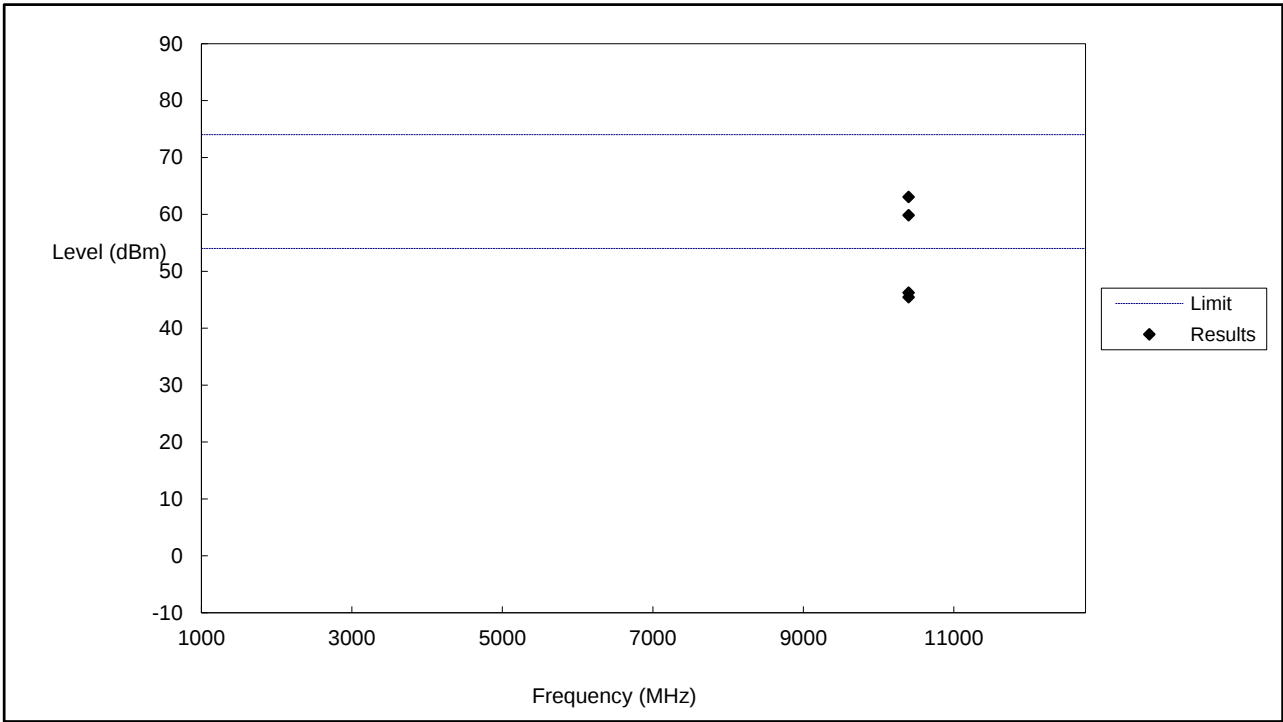Middle Channel (5200MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10400	63.05	74	-10.95	H	RMS
2	10400	46.24	54	-7.76	H	RMS
1	10400	59.85	74	-14.15	V	RMS
2	10400	45.45	54	-8.55	V	RMS

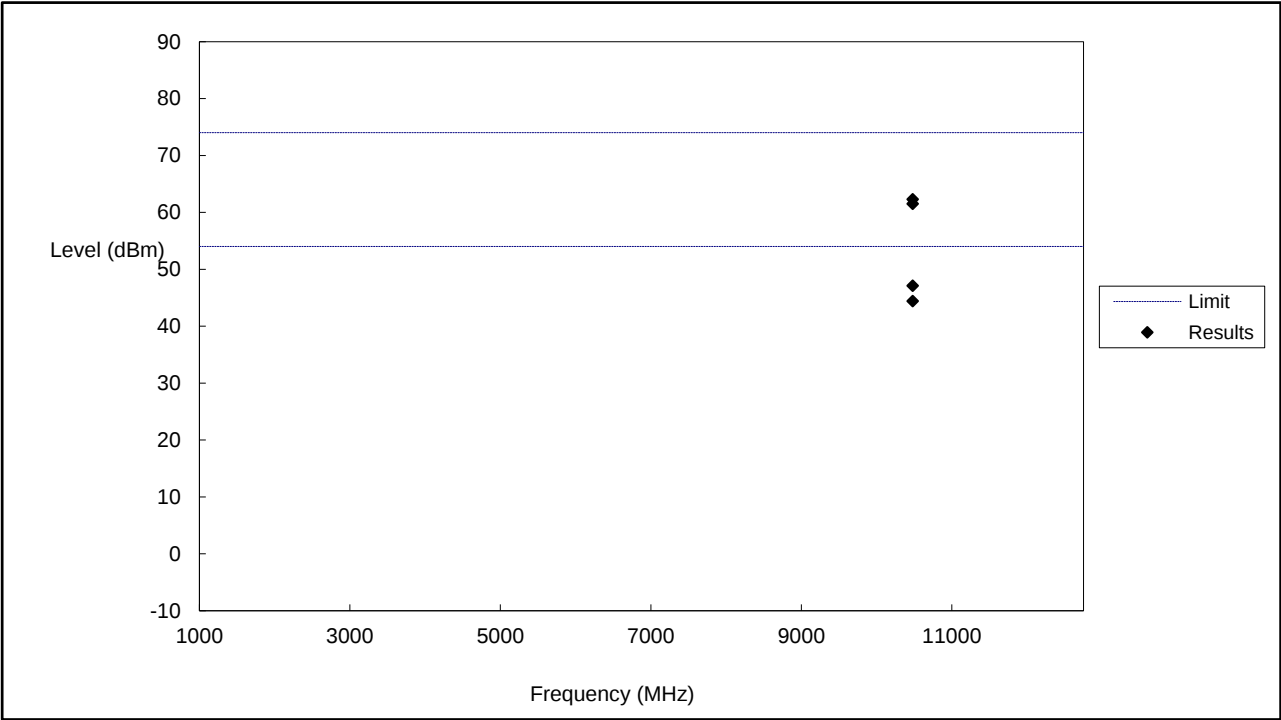High Channel (5240MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10480	62.29	74	-11.71	H	RMS
2	10480	47.11	54	-6.89	H	RMS
1	10480	61.50	74	-12.50	V	RMS
2	10480	44.40	54	-9.60	V	RMS

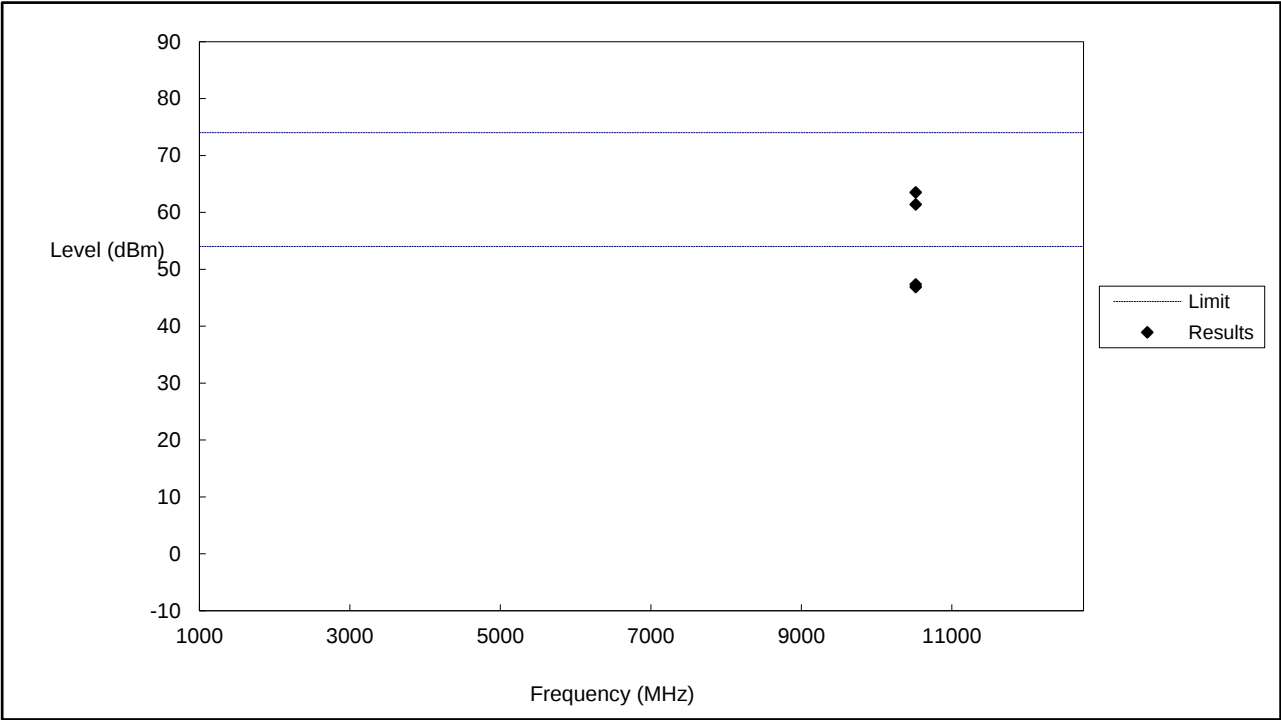Low Channel (5260MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10520	61.40	74	-12.60	H	RMS
2	10520	47.32	54	-6.68	H	RMS
1	10520	63.50	74	-10.50	V	RMS
2	10520	46.88	54	-7.12	V	RMS

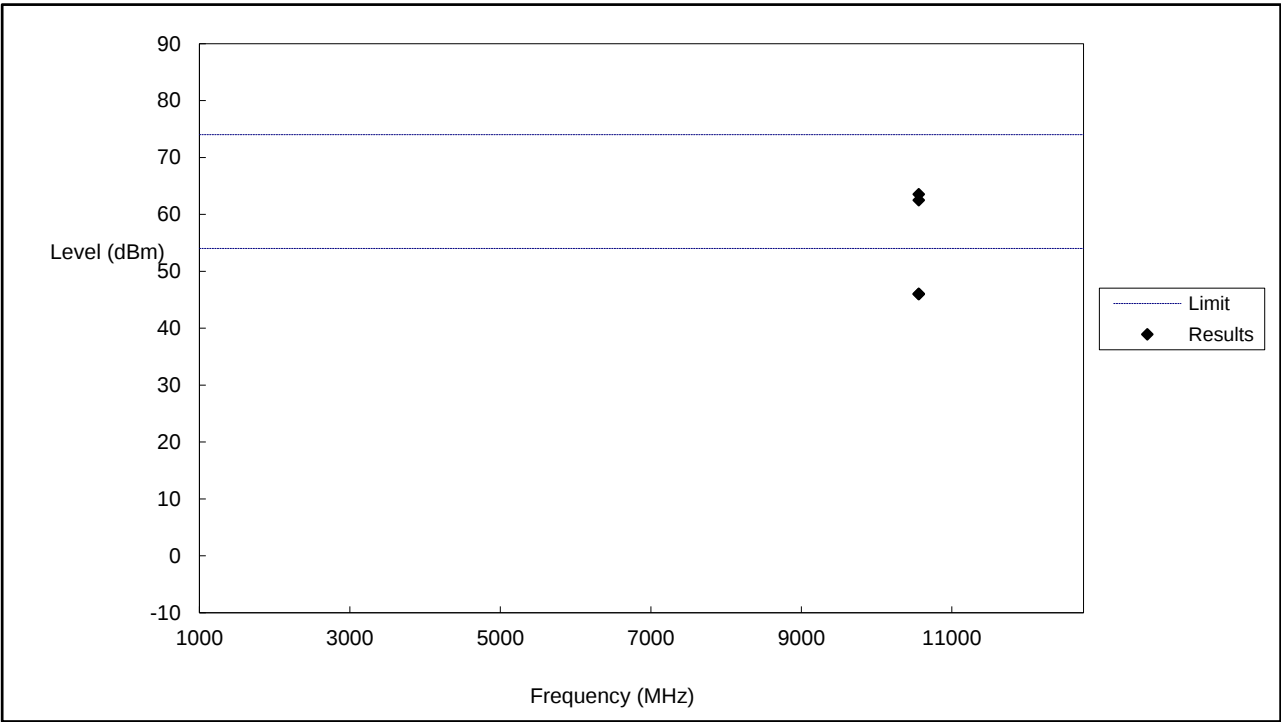Middle Channel (5280MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10560	62.48	74	-11.52	H	RMS
2	10560	45.97	54	-8.03	H	RMS
1	10560	63.53	74	-10.47	V	RMS
2	10560	46.04	54	-7.96	V	RMS

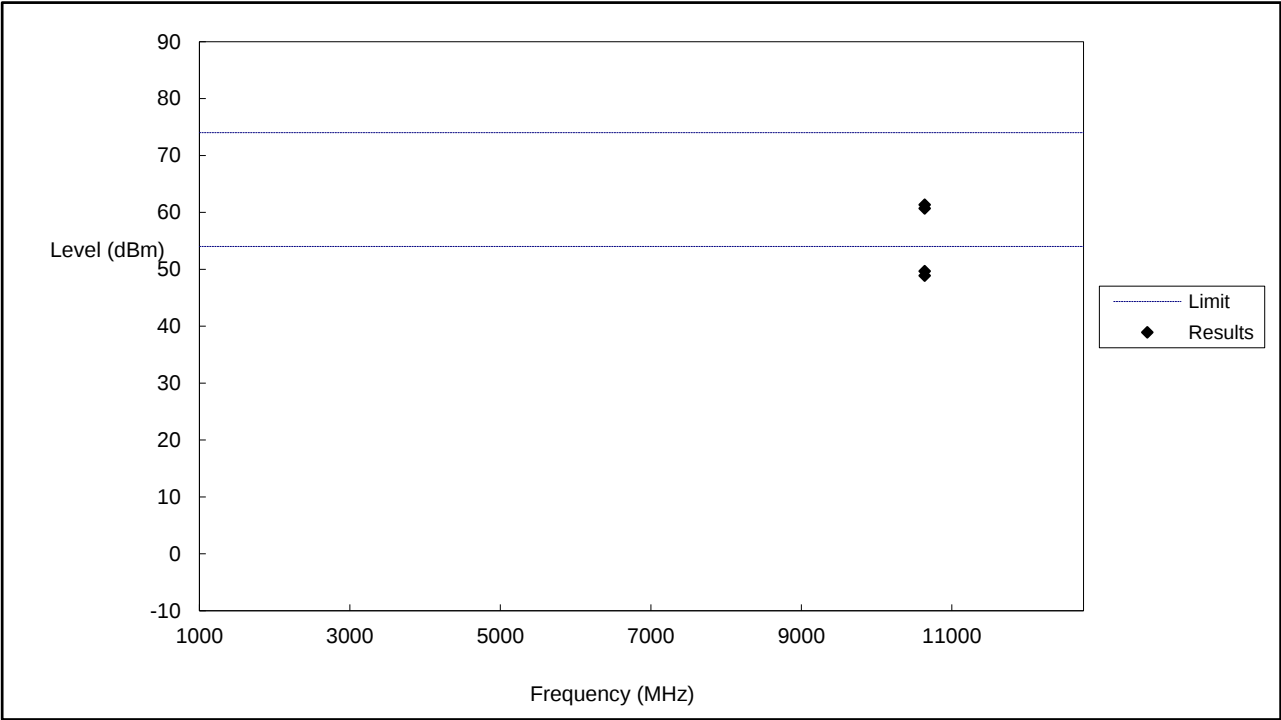High Channel (5320MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10640	61.34	74	-12.66	H	RMS
2	10640	48.88	54	-5.12	H	RMS
1	10640	60.68	74	-13.32	V	RMS
2	10640	49.66	54	-4.34	V	RMS

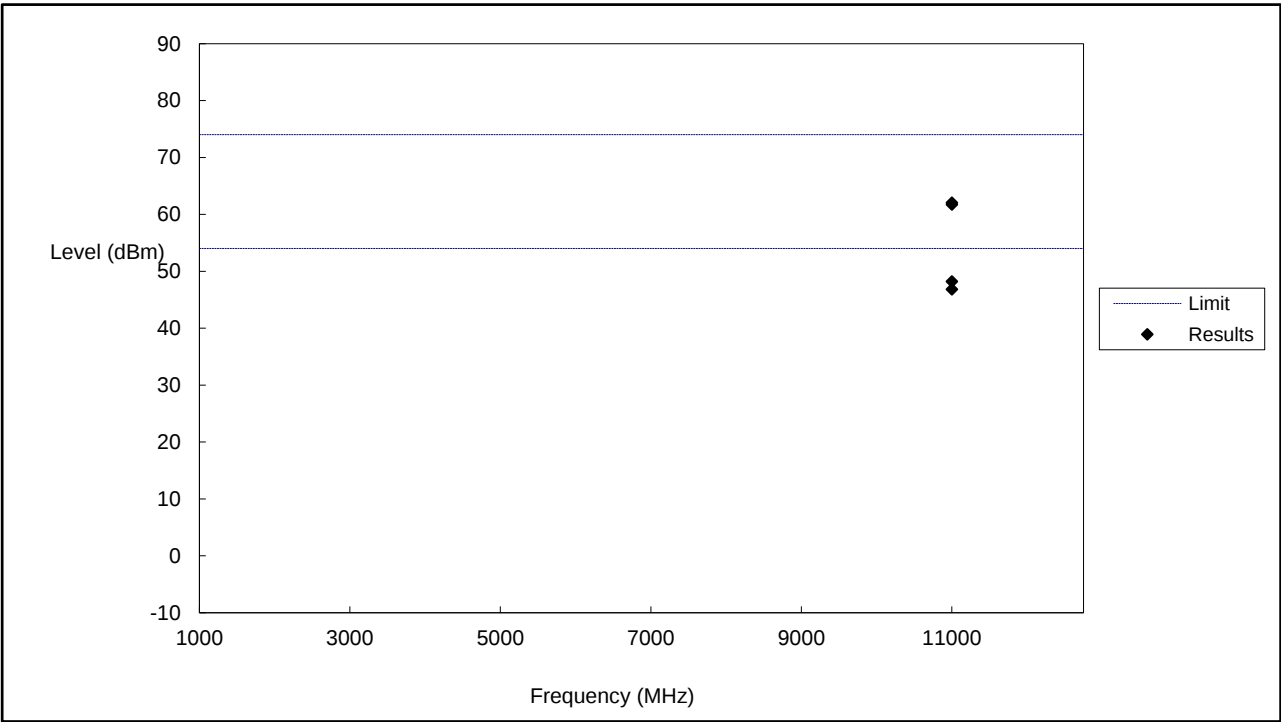Low Channel (5500MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11000	61.73	74	-12.27	H	RMS
2	11000	46.82	54	-7.18	H	RMS
1	11000	62.03	74	-11.97	V	RMS
2	11000	48.21	54	-5.79	V	RMS

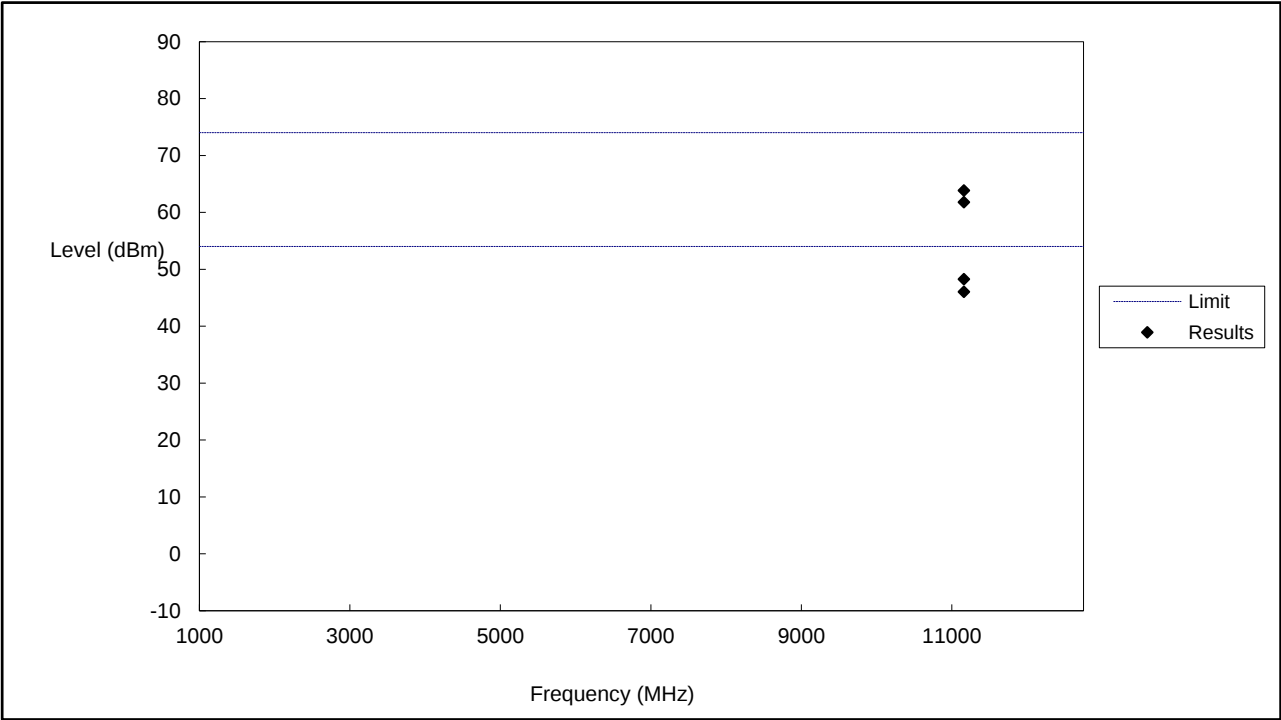Middle Channel (5550MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11160	61.78	74	-12.22	H	RMS
2	11160	48.26	54	-5.74	H	RMS
1	11160	63.83	74	-10.17	V	RMS
2	11160	46.03	54	-7.97	V	RMS

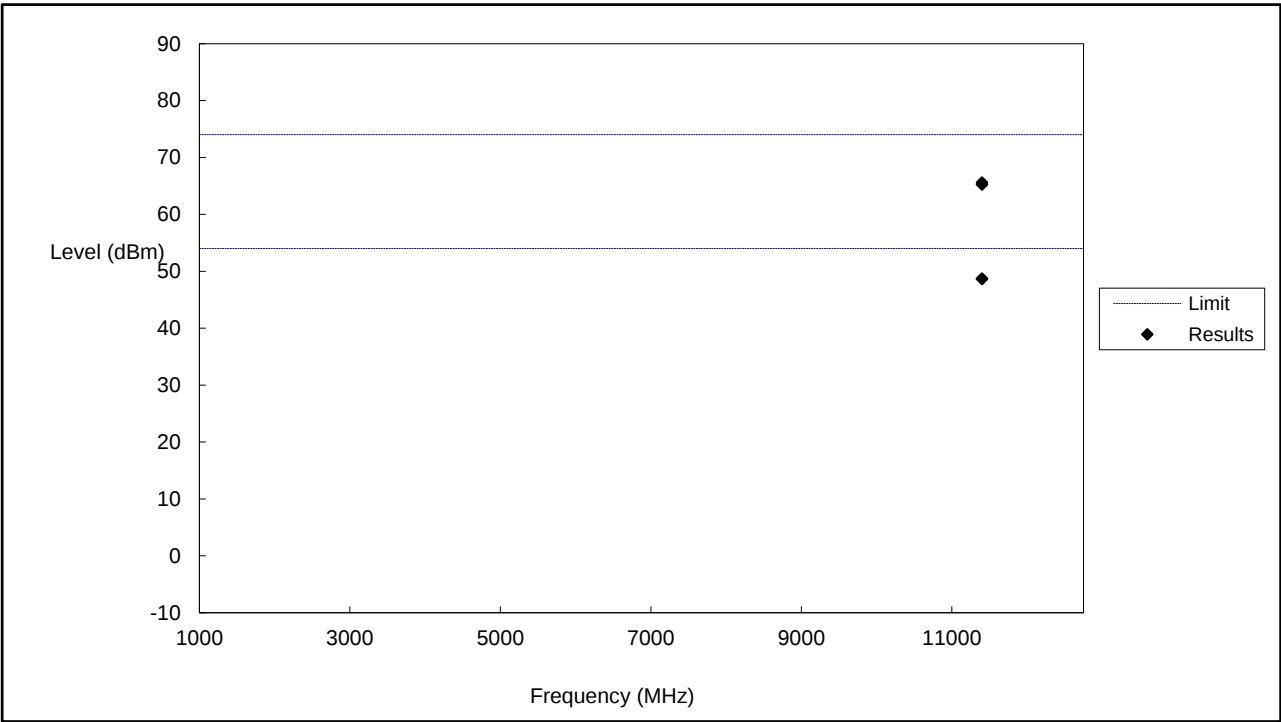High Channel (5700MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11400	65.59	74	-8.41	H	RMS
2	11400	48.69	54	-5.31	H	RMS
1	11400	65.26	74	-8.74	V	RMS
2	11400	48.65	54	-5.35	V	RMS

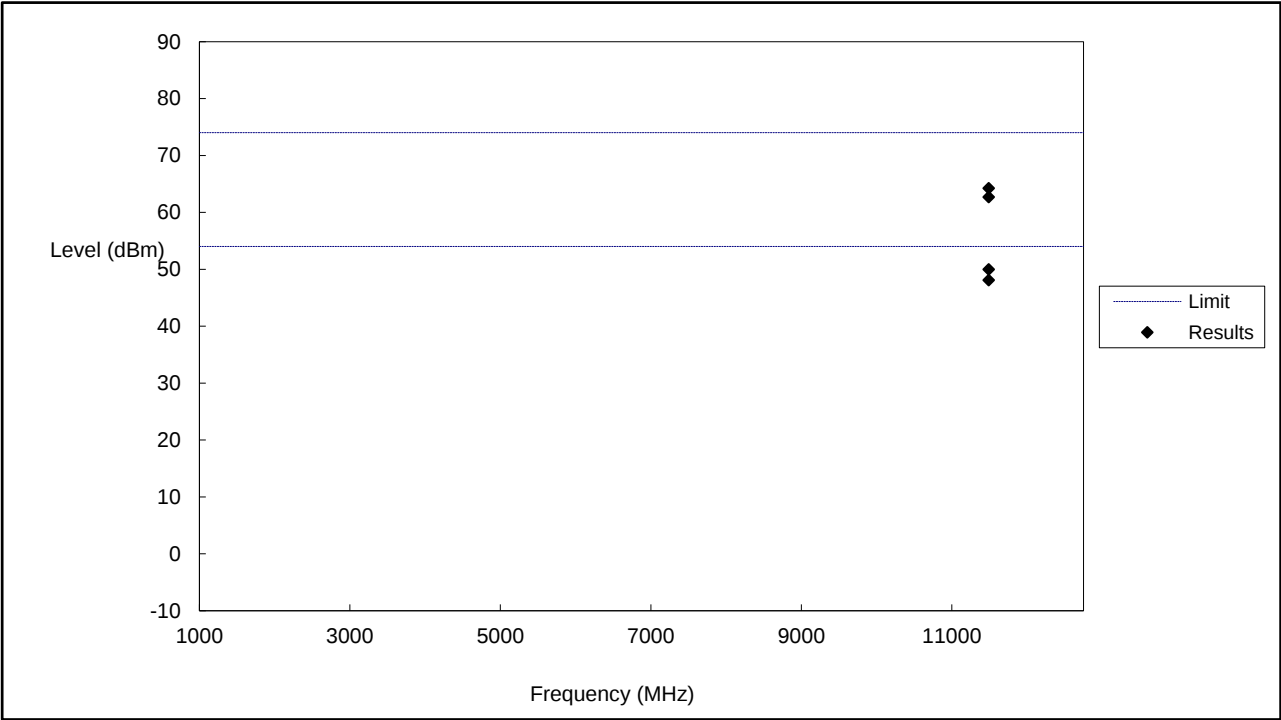Low Channel (5745MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11490	62.68	74	-11.32	H	RMS
2	11490	49.98	54	-4.02	H	RMS
1	11490	64.23	74	-9.77	V	RMS
2	11490	48.08	54	-5.92	V	RMS

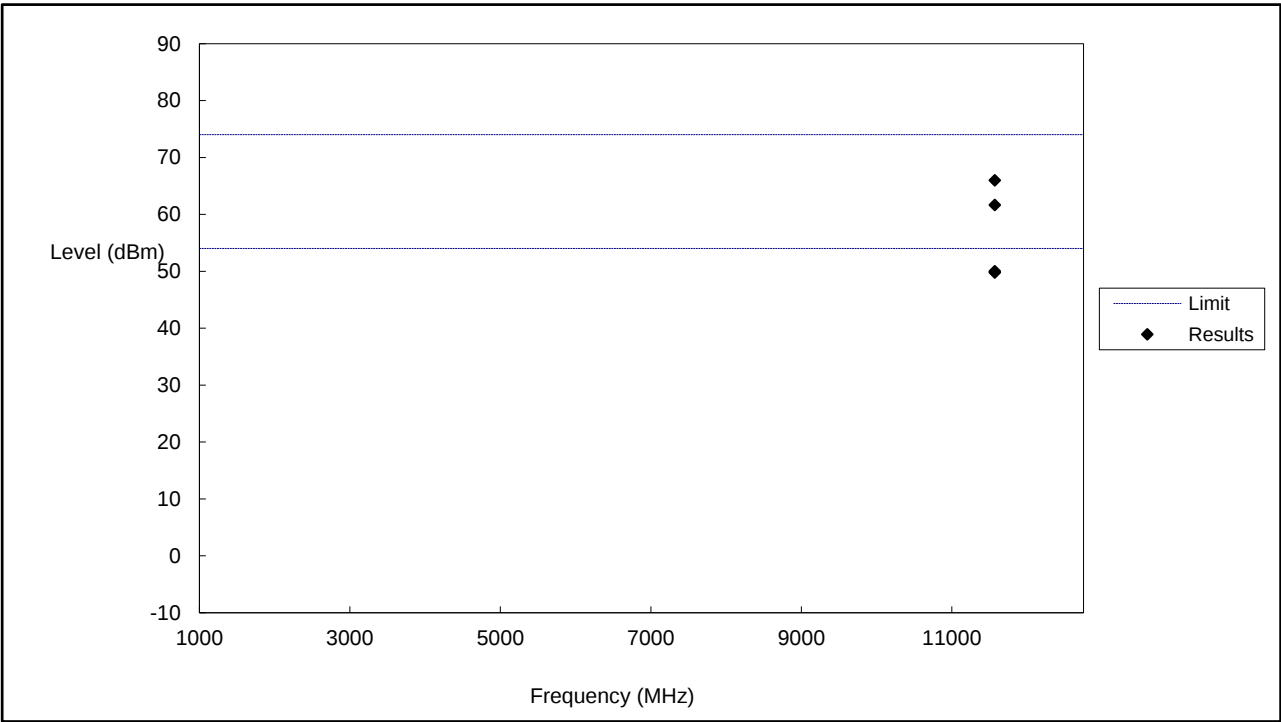Middle Channel (5785MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11570	65.97	74	-8.03	H	RMS
2	11570	50.00	54	-4.00	H	RMS
1	11570	61.64	74	-12.36	V	RMS
2	11570	49.79	54	-4.21	V	RMS

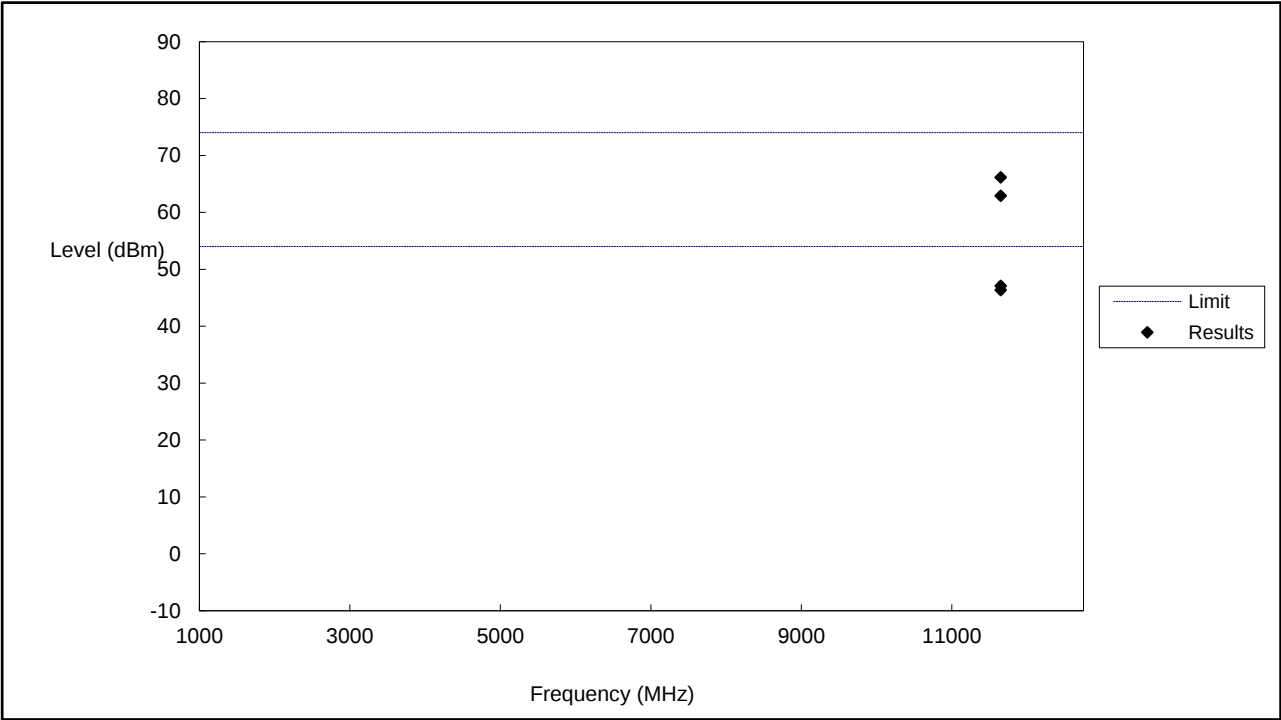High Channel (5825MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11650	66.14	74	-7.86	H	RMS
2	11650	47.09	54	-6.91	H	RMS
1	11650	62.92	74	-11.08	V	RMS
2	11650	46.35	54	-7.65	V	RMS

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.07	-27
Highest	Above 5350	-41.10	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.63	-27
Highest	Above 5350	-42.64	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.65	-27
Highest	Above 5725	-38.70	-27
Note: the data just list the worst cases			


➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-44.62	-27
	5650 to 5700	-36.34	-27 to -17
	5700 to 5720	-28.86	-17 to 15.6
	5720 to 5725	-18.45	15.6 to 27
Highest	5850 to 5855	-15.48	27 to 15.6
	5855 to 5875	-26.17	15.6 to -17
	5875 to 5925	-35.41	-17 to -27
	Above 5925	-40.45	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.


- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

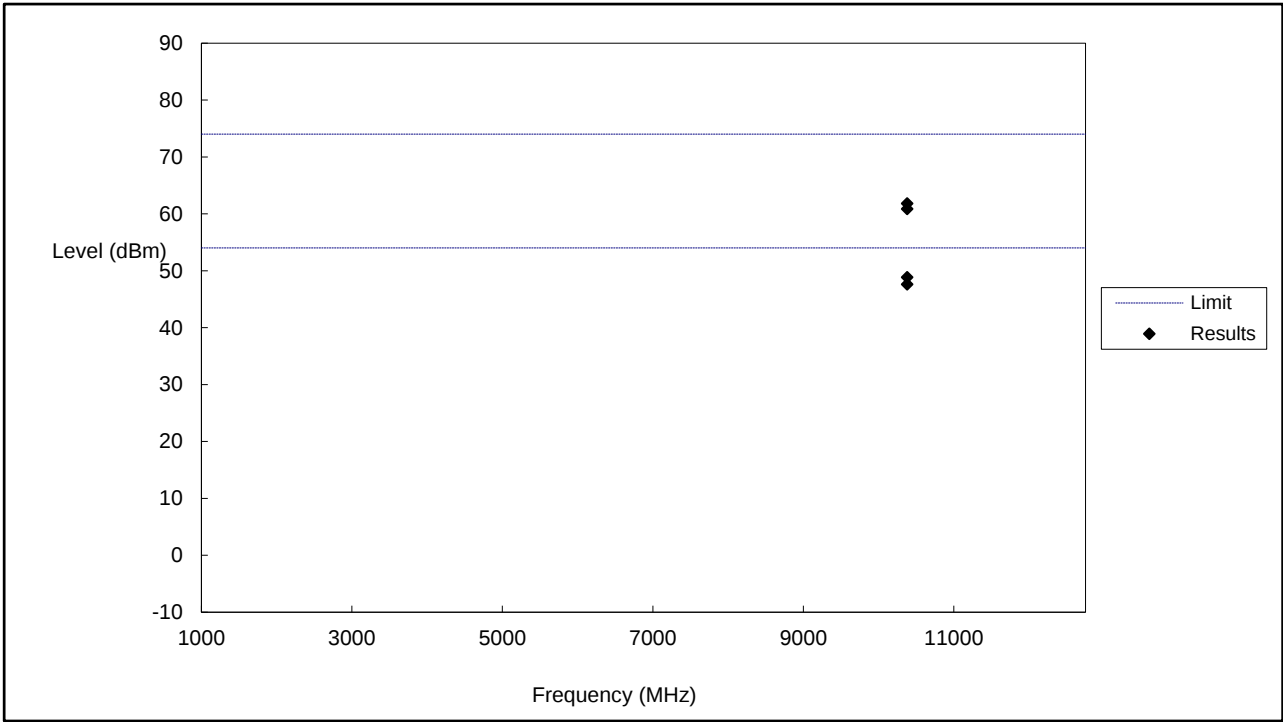Low Channel (5190MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10380	61.83	74	-12.17	H	RMS
2	10380	47.61	54	-6.39	H	RMS
1	10380	60.86	74	-13.14	V	RMS
2	10380	48.85	54	-5.15	V	RMS

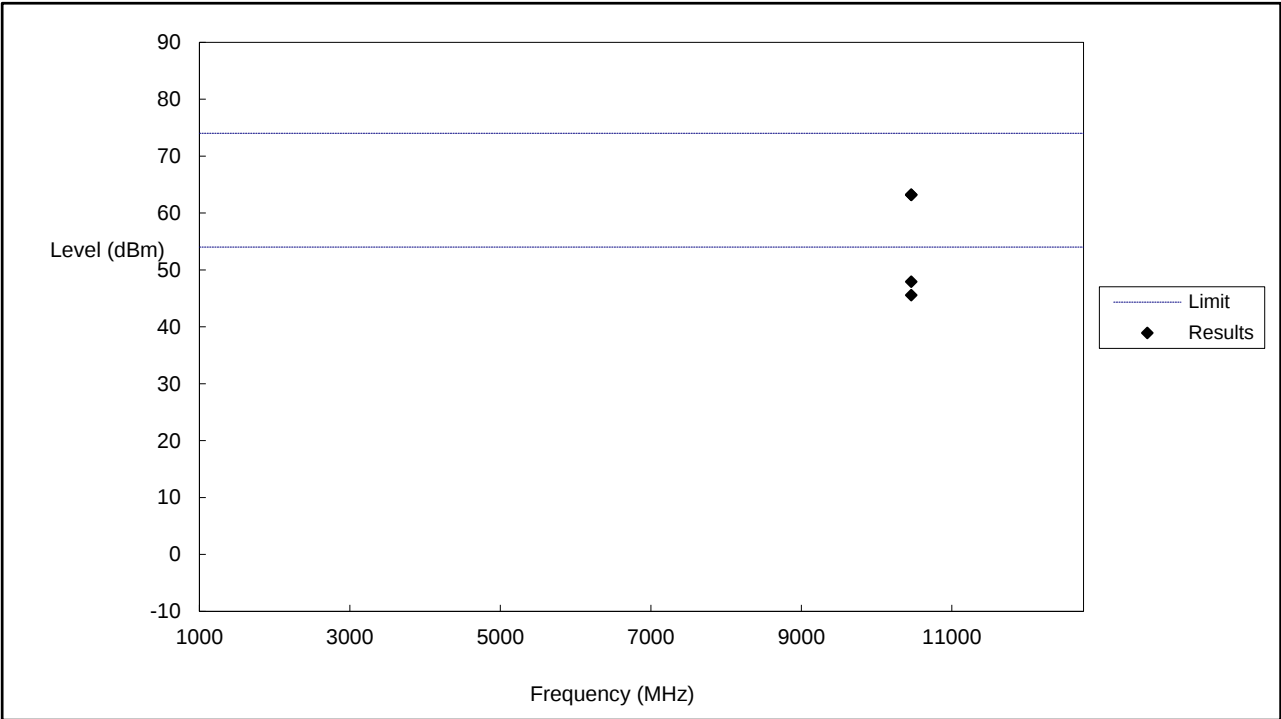High Channel (5230MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10460	63.22	74	-10.78	H	RMS
2	10460	47.91	54	-6.09	H	RMS
1	10460	63.16	74	-10.84	V	RMS
2	10460	45.55	54	-8.45	V	RMS

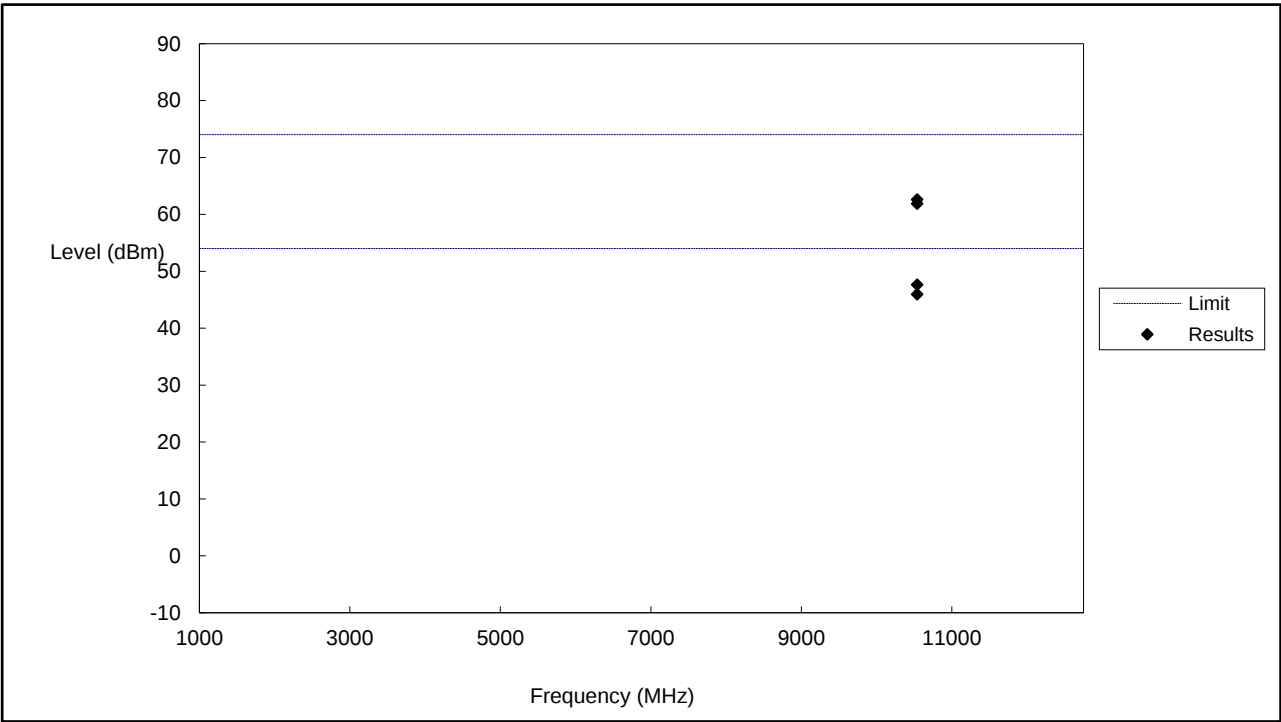Low Channel (5270MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10540	61.88	74	-12.12	H	RMS
2	10540	45.95	54	-8.05	H	RMS
1	10540	62.61	74	-11.39	V	RMS
2	10540	47.64	54	-6.36	V	RMS

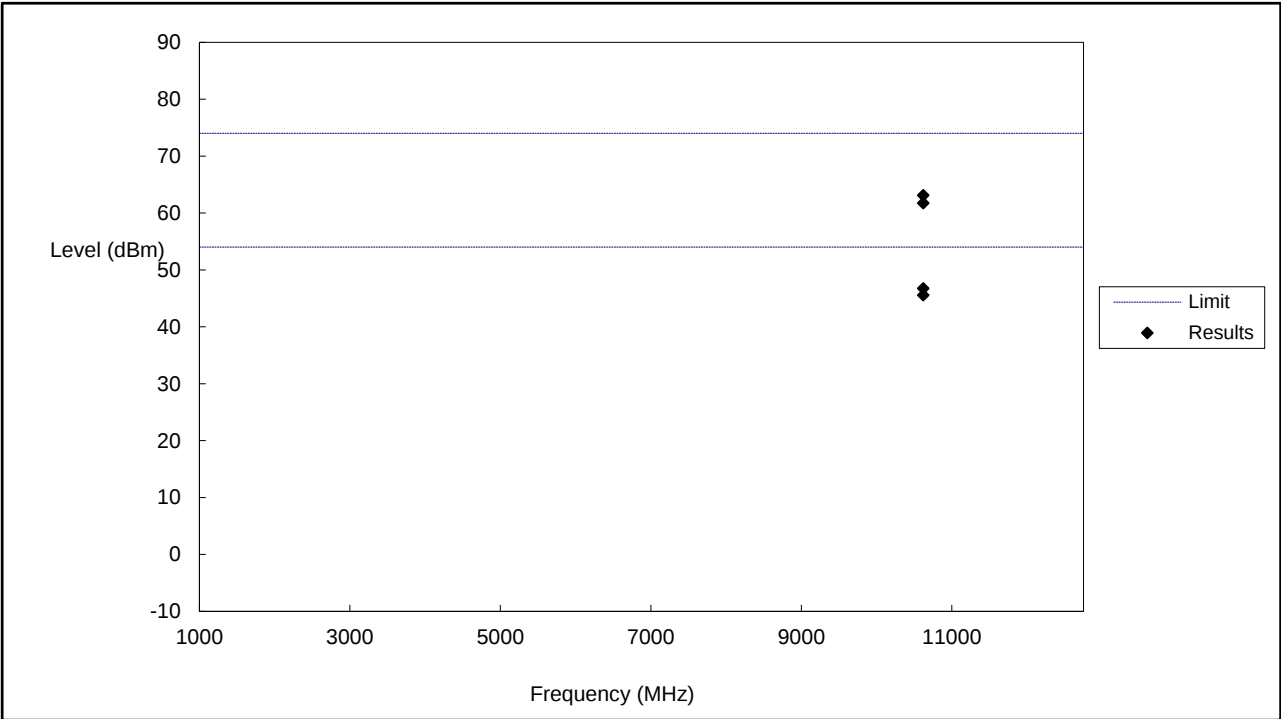High Channel (5310MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10620	61.73	74	-12.27	H	RMS
2	10620	45.55	54	-8.45	H	RMS
1	10620	63.11	74	-10.89	V	RMS
2	10620	46.75	54	-7.25	V	RMS

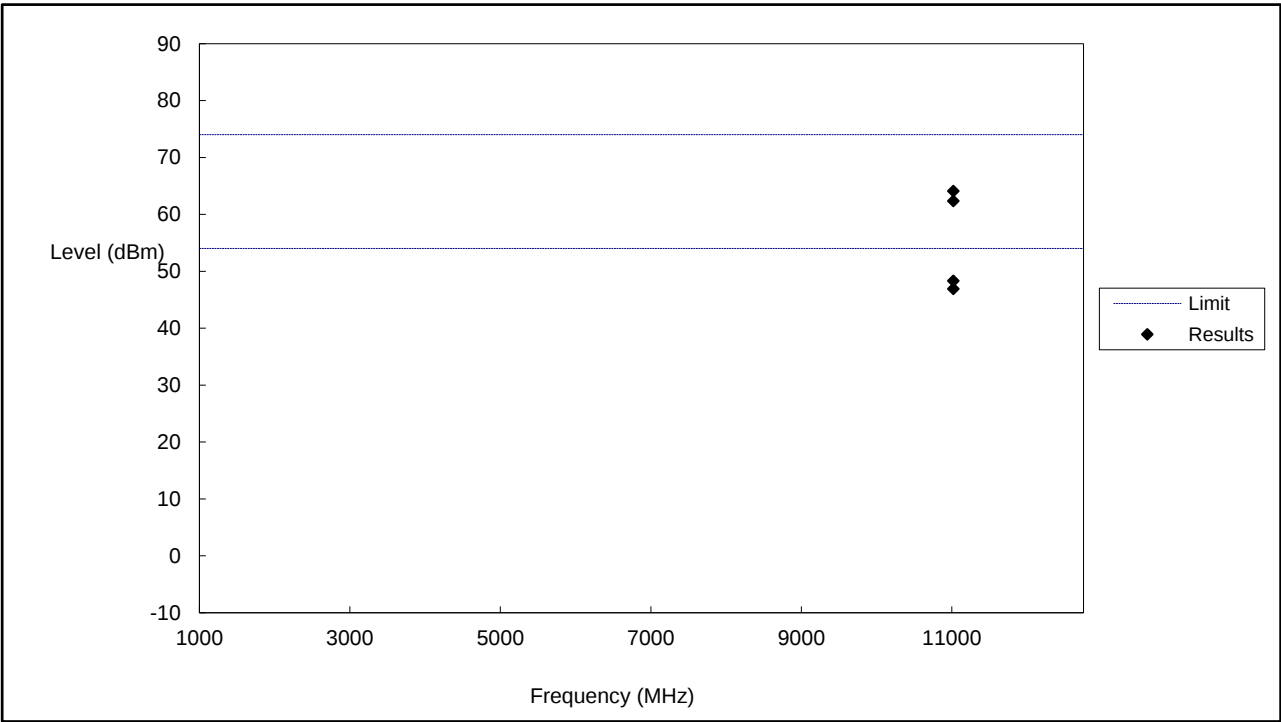Low Channel (5510MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11020	64.11	74	-9.89	H	RMS
2	11020	46.90	54	-7.10	H	RMS
1	11020	62.36	74	-11.64	V	RMS
2	11020	48.33	54	-5.67	V	RMS

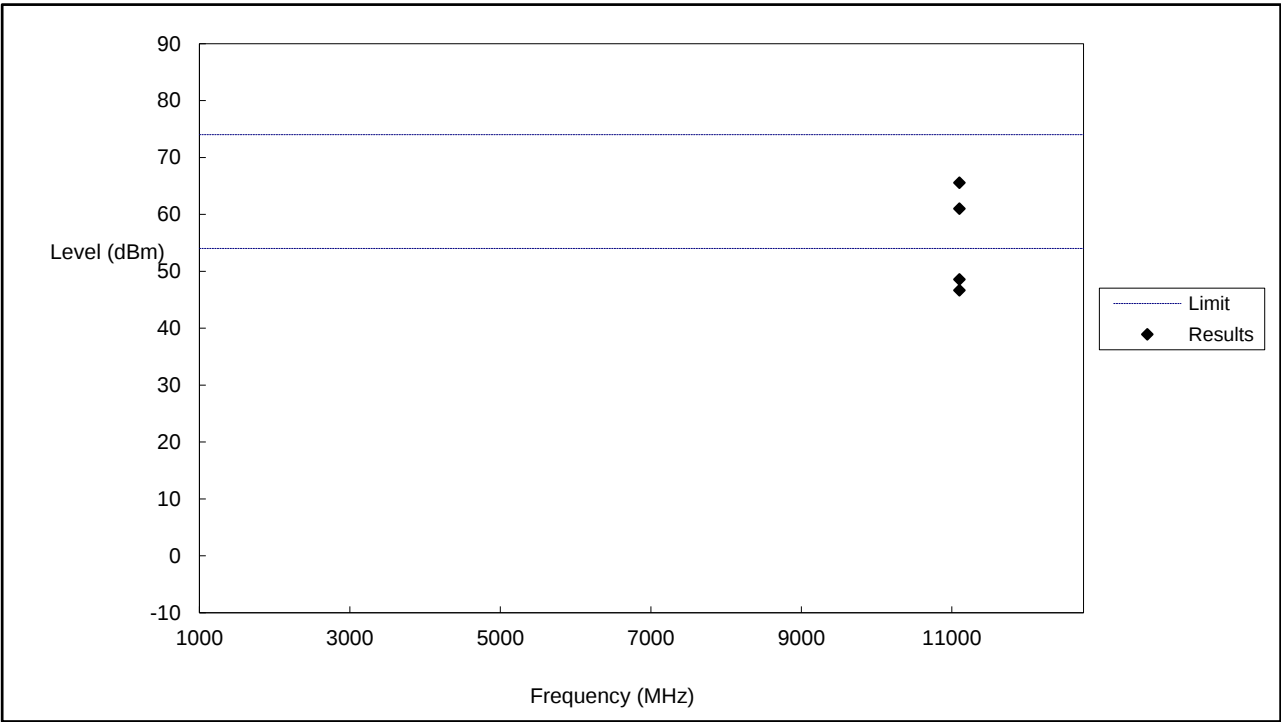Middle Channel (5590MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11100	61.01	74	-12.99	H	RMS
2	11100	48.58	54	-5.42	H	RMS
1	11100	65.55	74	-8.45	V	RMS
2	11100	46.66	54	-7.34	V	RMS

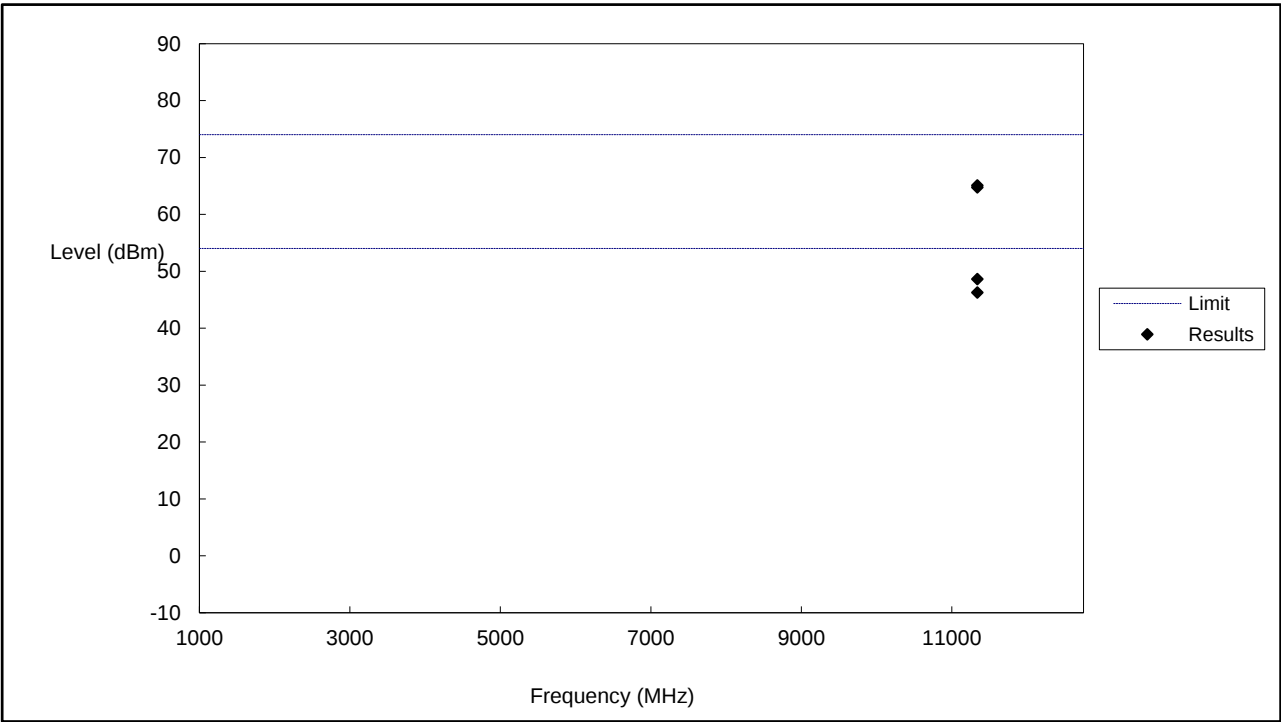High Channel (5670MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11340	64.73	74	-9.27	H	RMS
2	11340	46.25	54	-7.75	H	RMS
1	11340	65.09	74	-8.91	V	RMS
2	11340	48.62	54	-5.38	V	RMS

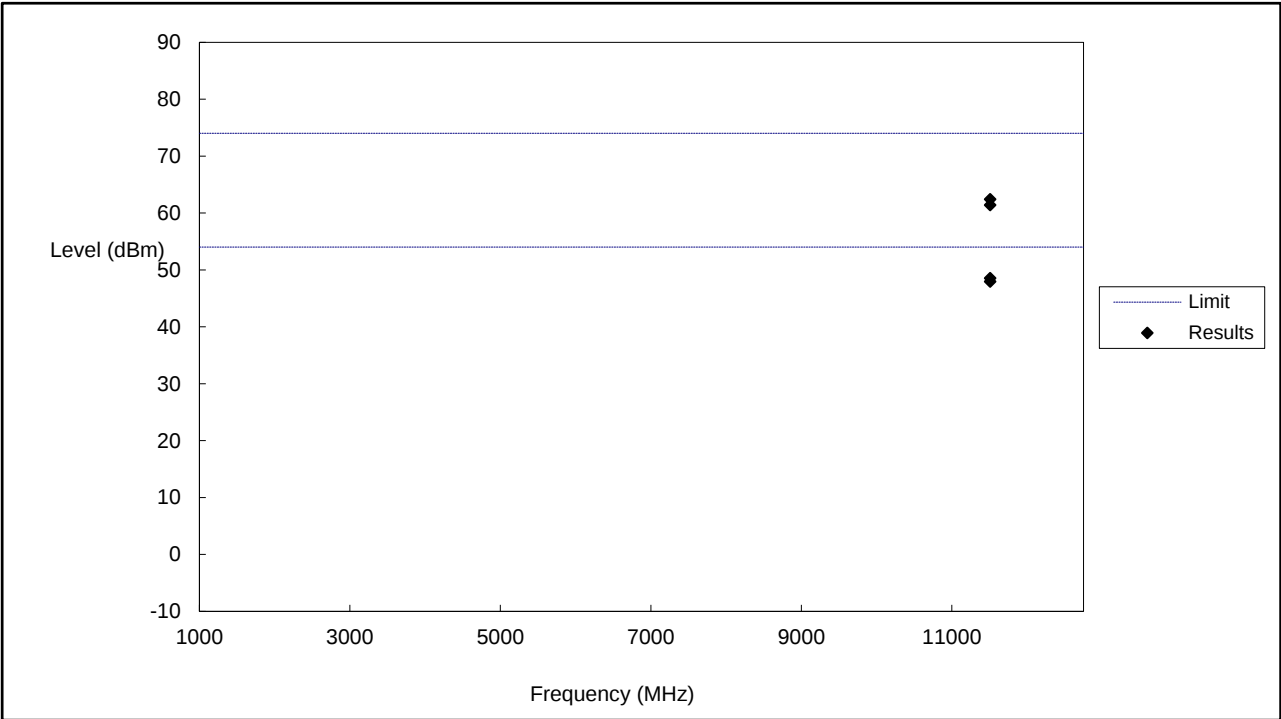Low Channel (5755MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11510	61.39	74	-12.61	H	RMS
2	11510	47.94	54	-6.06	H	RMS
1	11510	62.41	74	-11.59	V	RMS
2	11510	48.54	54	-5.46	V	RMS

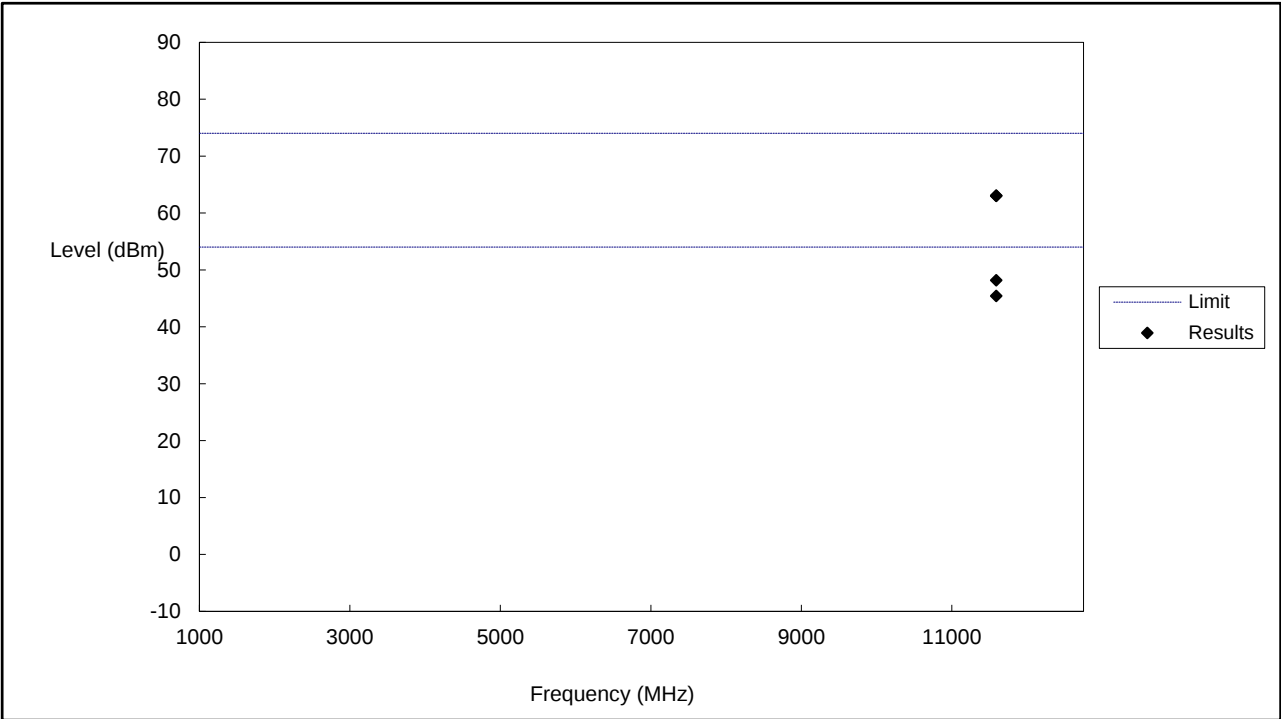High Channel (5795MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11590	63.07	74	-10.93	H	RMS
2	11590	48.19	54	-5.81	H	RMS
1	11590	62.99	74	-11.01	V	RMS
2	11590	45.42	54	-8.58	V	RMS

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.98	-27
Highest	Above 5350	-36.25	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.20	-27
Highest	Above 5350	-38.22	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz


Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-34.80	-27
Highest	Above 5725	-36.41	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-44.80	-27
	5650 to 5700	-36.64	-27 to -17
	5700 to 5720	-29.00	-17 to 15.6
	5720 to 5725	-19.19	15.6 to 27
Highest	5850 to 5855	-14.07	27 to 15.6
	5855 to 5875	-25.49	15.6 to -17
	5875 to 5925	-35.37	-17 to -27
	Above 5925	-39.50	-27
Note: the data just list the worst cases			


- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

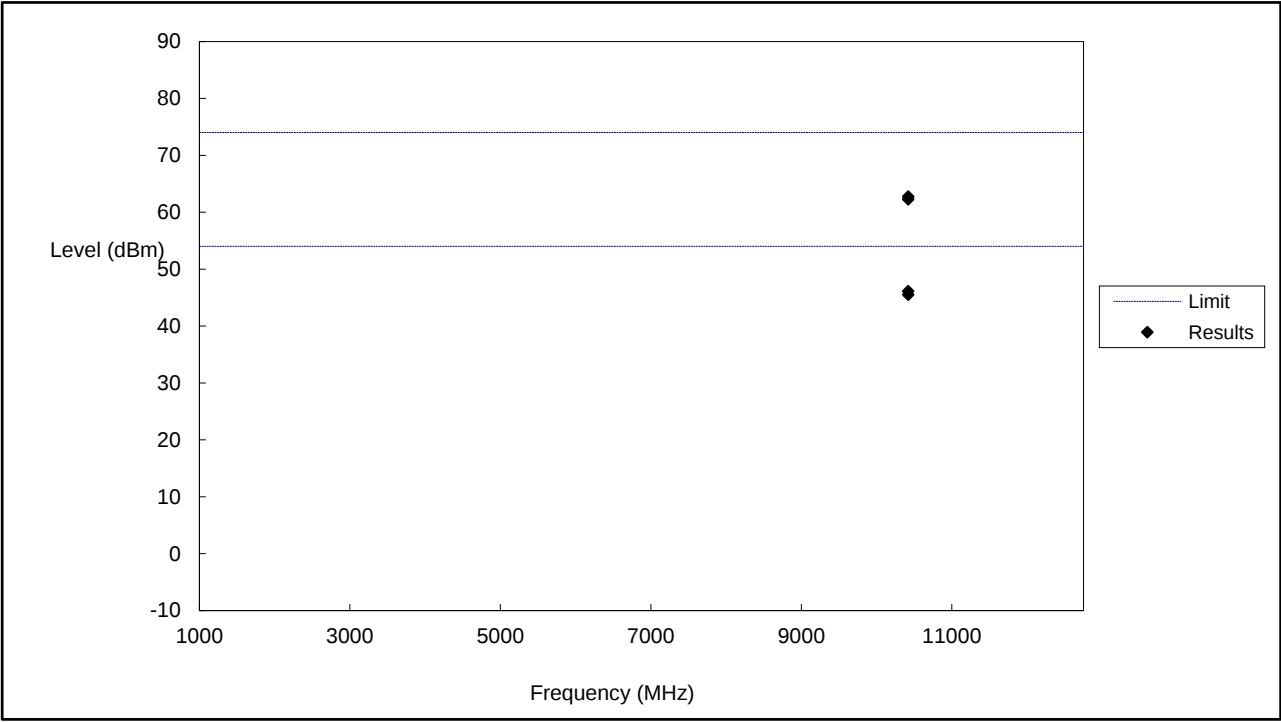5210MHz




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10420	62.26	74	-11.74	H	RMS
2	10420	45.50	54	-8.50	H	RMS
1	10420	62.75	74	-11.25	V	RMS
2	10420	46.11	54	-7.89	V	RMS

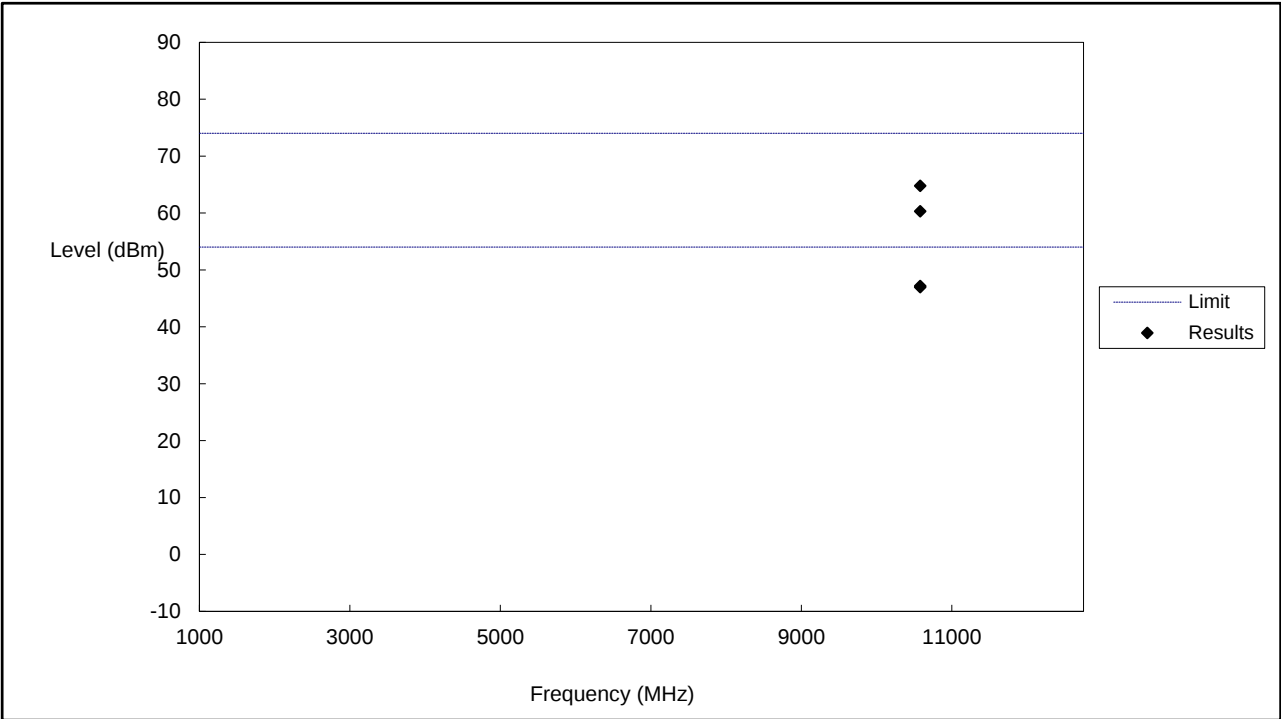5290MHz




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	10580	64.77	74	-9.23	H	RMS
2	10580	46.97	54	-7.03	H	RMS
1	10580	60.30	74	-13.70	V	RMS
2	10580	47.16	54	-6.84	V	RMS

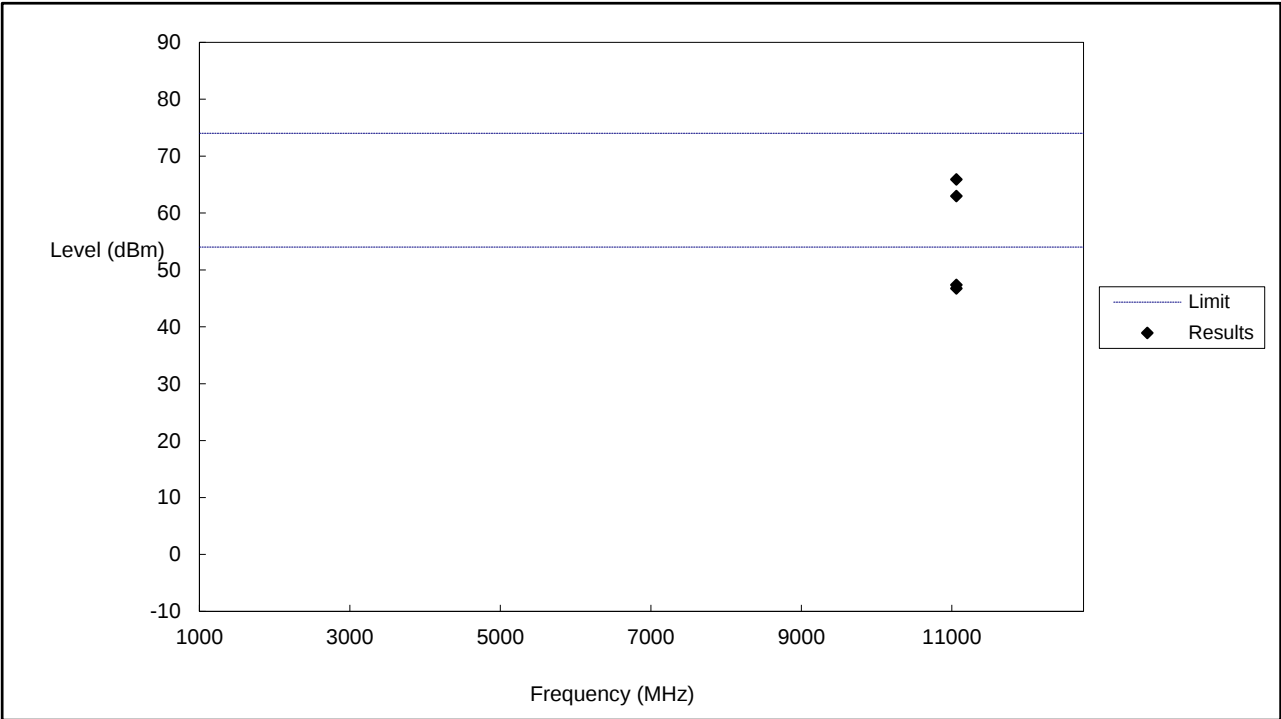Low Channel (5530MHz)




No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11060	65.89	74	-8.11	H	RMS
2	11060	47.36	54	-6.64	H	RMS
1	11060	62.96	74	-11.04	V	RMS
2	11060	46.75	54	-7.25	V	RMS

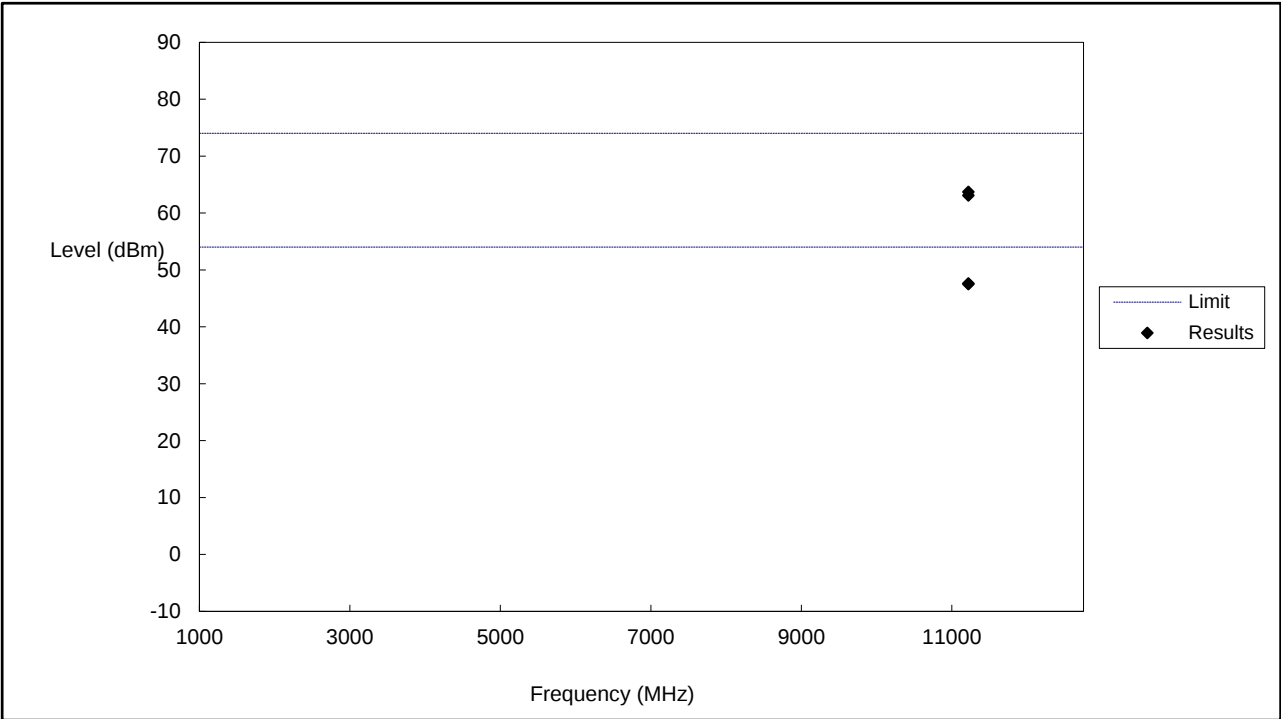High Channel (5610MHz)



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11220	63.08	74	-10.92	H	RMS
2	11220	47.50	54	-6.50	H	RMS
1	11220	63.69	74	-10.31	V	RMS
2	11220	47.61	54	-6.39	V	RMS

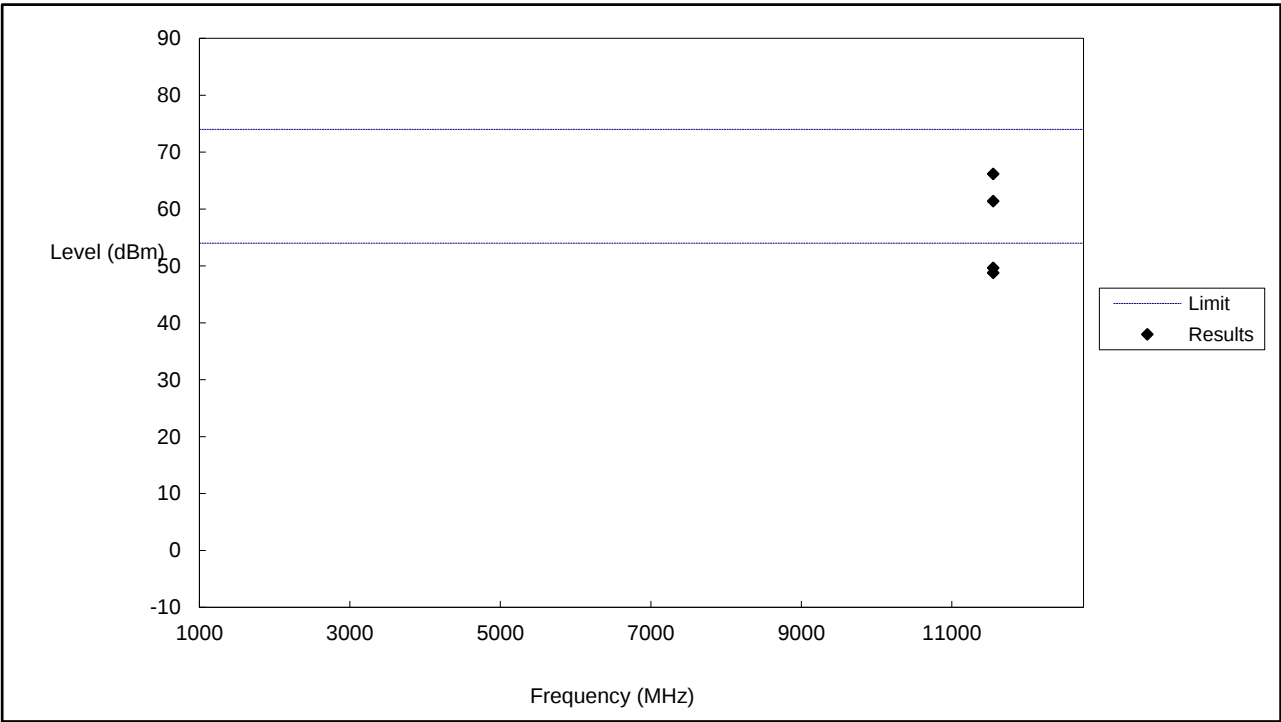5775MHz



No.	Frequency	Result	Limit	Margin	Polarity	Remark
	(MHz)	(dBm)	(dBm)	(dB)		
1	11550	66.16	74	-7.84	H	RMS
2	11550	48.79	54	-5.21	H	RMS
1	11550	61.39	74	-12.61	V	RMS
2	11550	49.65	54	-4.35	V	RMS

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.60	-27
Highest	Above 5350	-36.85	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.05	-27
Highest	Above 5350	-36.75	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-40.46	-27
Highest	Above 5725	-36.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-43.93	-27
	5650 to 5700	-36.53	-27 to -17
	5700 to 5720	-29.51	-17 to 15.6
	5720 to 5725	-17.48	15.6 to 27
Highest	5850 to 5855	-14.85	27 to 15.6
	5855 to 5875	-25.97	15.6 to -17
	5875 to 5925	-34.12	-17 to -27
	Above 5925	-40.74	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

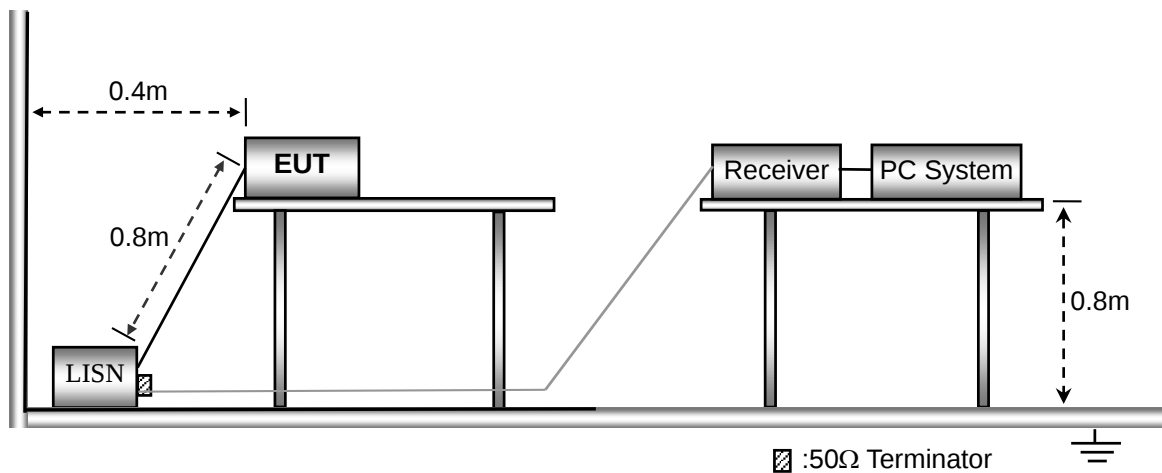
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram




10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

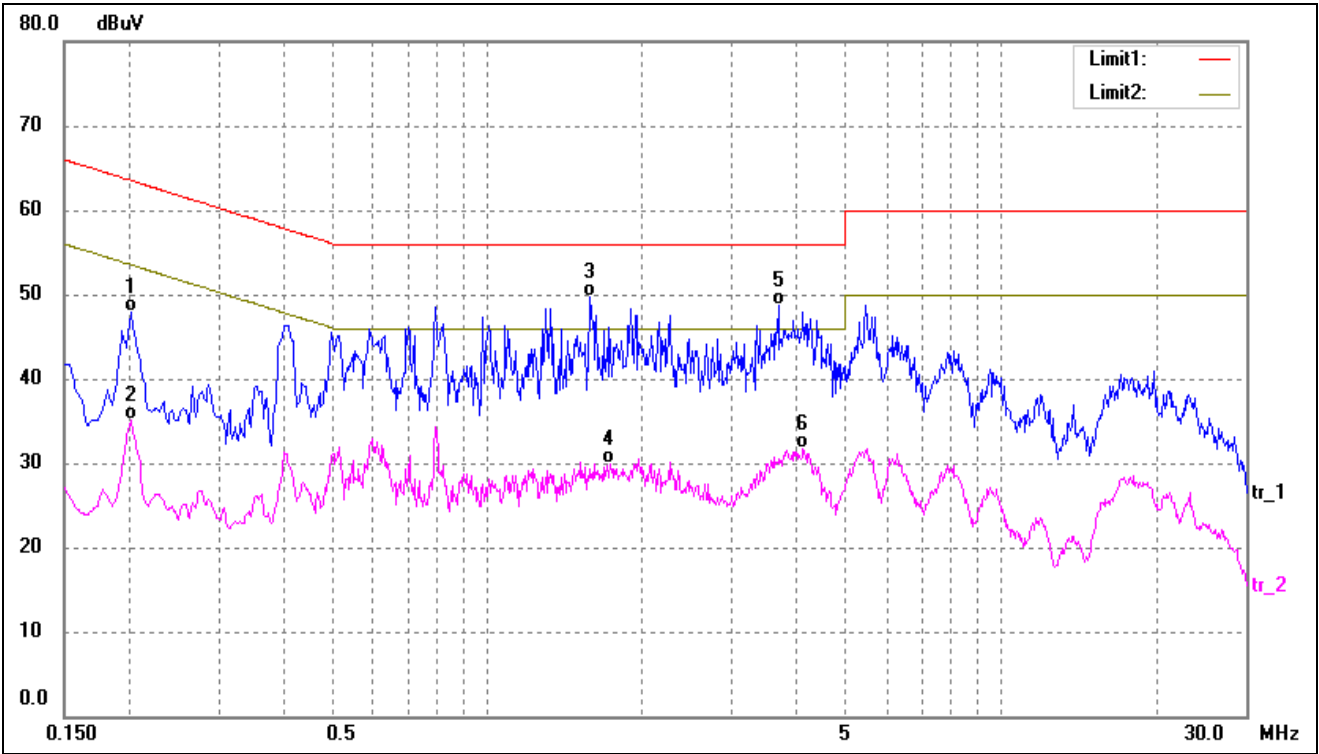

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	37.54	10.39	47.93	63.52	-15.59	QP
2	0.2020	24.77	10.39	35.16	53.52	-18.36	AVG
3*	1.5859	39.45	10.25	49.70	56.00	-6.30	QP
4	1.7420	19.66	10.28	29.94	46.00	-16.06	AVG
5	3.6900	38.27	10.36	48.63	56.00	-7.37	QP
6	4.1140	21.43	10.37	31.80	46.00	-14.20	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

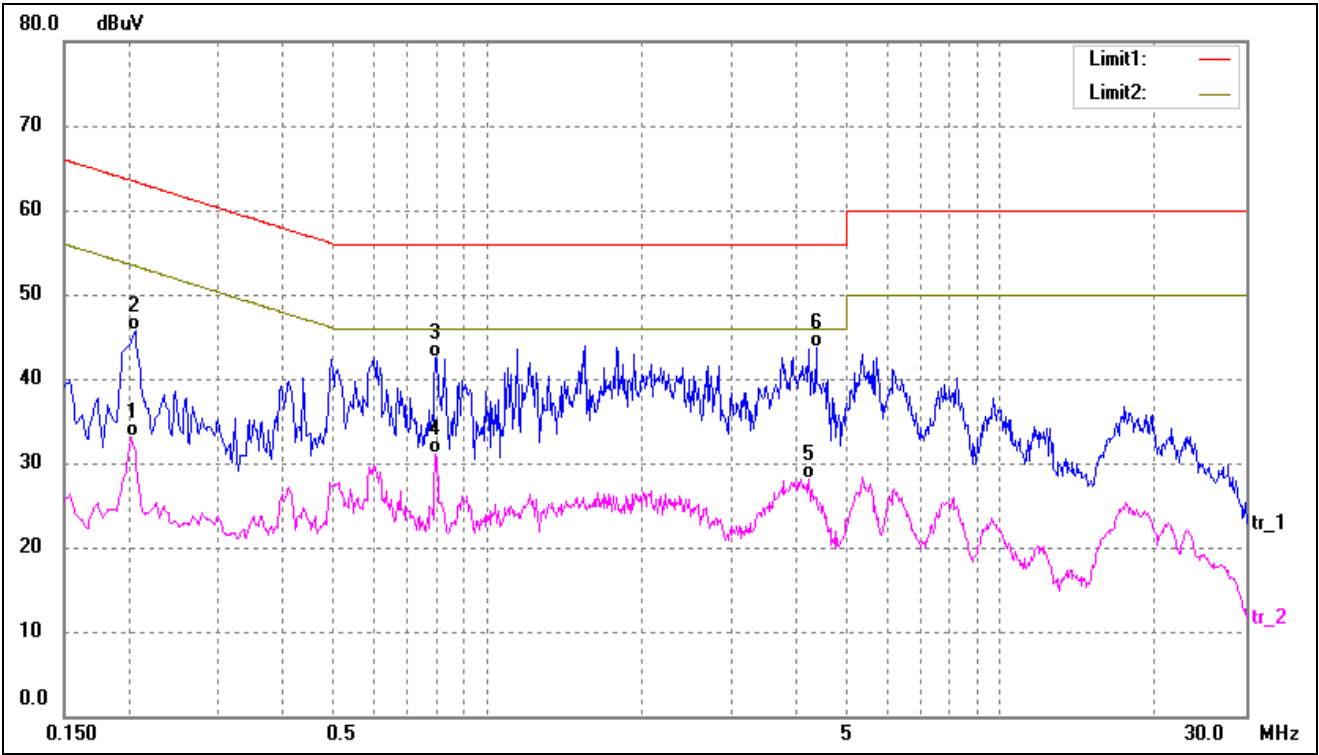

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	22.66	10.39	33.05	53.52	-20.47	AVG
2	0.2060	35.36	10.38	45.74	63.36	-17.62	QP
3	0.7940	32.36	10.18	42.54	56.00	-13.46	QP
4	0.7940	20.97	10.18	31.15	46.00	-14.85	AVG
5	4.2340	17.73	10.37	28.10	46.00	-17.90	AVG
6*	4.3740	33.39	10.37	43.76	56.00	-12.24	QP

APPENDIX SUMMARY

Project No.	WTX23X07164180W	Test Engineer	Timi Huang
Start date	2023/4/1	Finish date	2023/7/21
Temperature	23℃	Humidity	58%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 1 dBm/MHz	ANT 2 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	4.58	3.93	/	11
	5200	4.73	3.88	/	11
	5240	4.91	3.89	/	11
802.11n-HT20	5180	3.04	2.09	5.60	10.37
	5200	3.21	2.19	5.74	10.37
	5240	3.14	2.06	5.64	10.37
802.11n-HT40	5190	-0.03	-1.13	2.47	10.37
	5230	-0.21	-1.44	2.23	10.37
802.11ac-HT80	5210	-4.99	-5.62	-2.28	10.37

Power Spectral Density					
U-NII-2A: 5250-5350MHz					
Operating mode	Test Channel	ANT 1 dBm/MHz	ANT 2 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5260	4.74	3.76	/	11
	5280	4.99	3.59	/	11
	5320	4.84	3.62	/	11
802.11n-HT20	5260	2.74	1.69	5.26	10.37
	5280	3.09	1.81	5.51	10.37
	5320	3.29	1.97	5.69	10.37
802.11n-HT40	5270	-1.49	-1.62	1.46	10.37
	5310	-1.00	-1.57	1.73	10.37
802.11ac-HT80	5290	-5.86	-5.82	-2.83	10.37

Power Spectral Density					
U-NII-2C: 5470-5725MHz					
Operating mode	Test Channel	ANT 1 dBm/MHz	ANT 2 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5500	3.57	3.88	/	11
	5600	4.41	4.00	/	11
	5700	4.13	3.74	/	11
802.11n-HT20	5500	2.52	2.55	5.55	10.37
	5600	3.71	2.52	6.17	10.37
	5700	2.67	1.96	5.34	10.37
802.11n-HT40	5510	-0.97	-1.58	1.75	10.37
	5590	-0.71	-1.07	2.12	10.37
	5670	0.21	-1.85	2.31	10.37
802.11ac-HT80	5530	-6.33	-5.90	-3.10	10.37
	5610	-5.05	-5.77	-2.38	10.37




Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 1 dBm/300kHz	ANT 2 dBm/300kHz	Factor	ANT 1 dBm/500kHz*	ANT 2 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	4.25	3.09	2.22	6.47	5.31	30
	5785	4.32	3.13	2.22	6.54	5.35	30
	5825	4.47	2.76	2.22	6.69	4.98	30
*Note: Maximum PSD=PSD(dBm/300kHz)+[10log(500kHz/300kHz)=2.22]							

Power Spectral Density						
U-NII-3: 5725-5850MHz						
Operating mode	Test Channel	ANT 1 dBm/300kHz	ANT 2 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	2.44	2.27	2.22	7.59	29.37
	5785	3.38	2.48	2.22	8.18	29.37
	5825	2.62	1.93	2.22	7.52	29.37
802.11n HT40	5755	-0.41	-2.31	2.22	3.97	29.37
	5795	-0.58	-2.07	2.22	3.97	29.37
802.11ac VH80	5775	-5.39	-5.64	2.22	-0.28	29.37
*Note: Maximum PSD=PSD(dBm/300kHz)+[10log(500kHz/300kHz)=2.22]						



ANT 1
5150-5250MHz

802.11a-Low	Date: 17.JUL.2023 15:14:18
802.11a-Middle	Date: 17.JUL.2023 15:14:56
802.11a-High	Date: 17.JUL.2023 15:15:22



802.11n-HT20-Low	Date: 17.JUL.2023 15:16:14
802.11n-HT20-Middle	Date: 17.JUL.2023 15:16:32
802.11n-HT20-High	Date: 17.JUL.2023 15:16:47

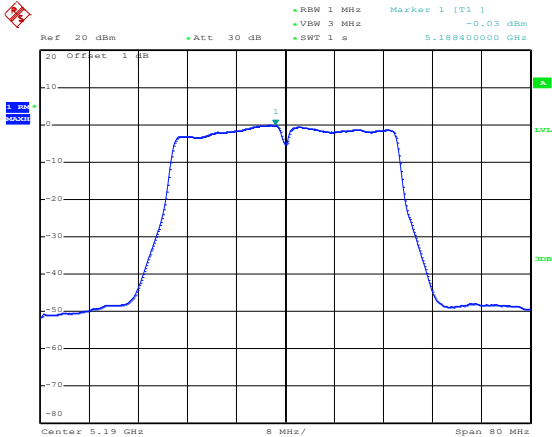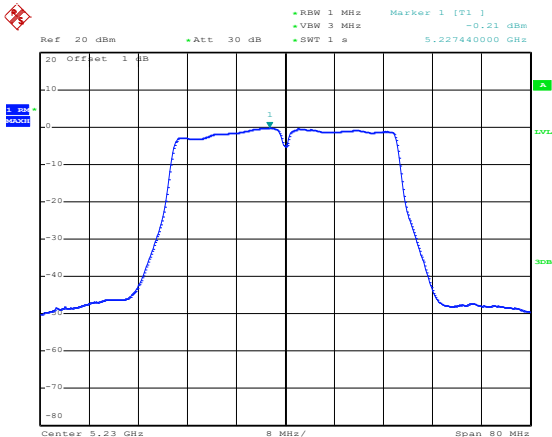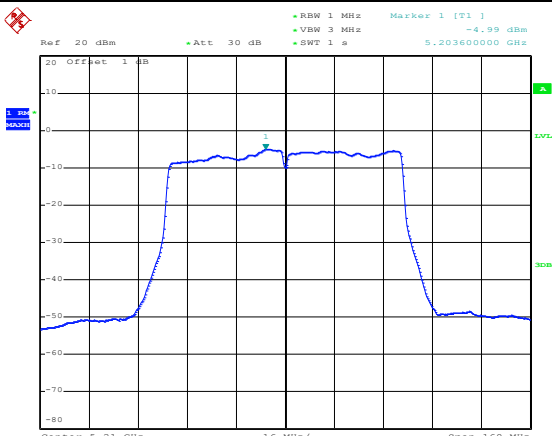802.11n-HT40-Low	 Date: 17.JUL.2023 16:30:37
802.11n-HT40-High	 Date: 17.JUL.2023 16:31:08
802.11ac-HT80	 Date: 17.JUL.2023 15:12:43

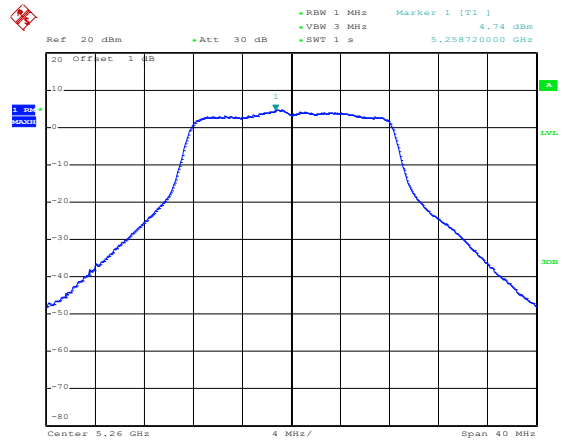

5250-5350MHz



Date: 17.JUL.2023 17:20:49


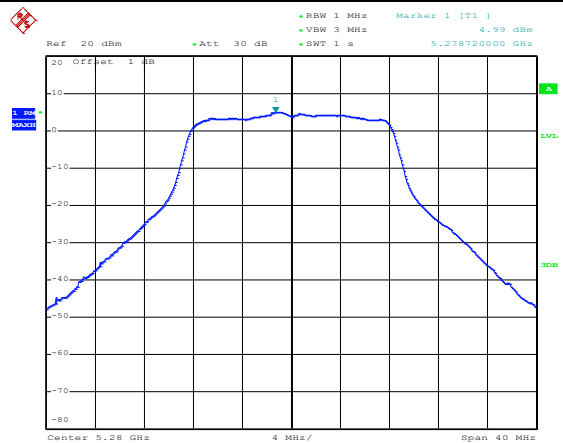



Date: 17.JUL.2023 17:23:35


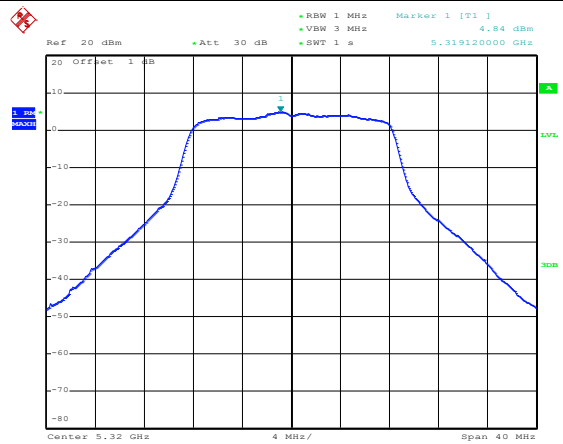






Date: 17.JUL.2023 17:24:36




802.11n-HT20-Low	Date: 17.JUL.2023 17:25:17
802.11n-HT20-Middle	Date: 17.JUL.2023 17:25:34
802.11n-HT20-High	Date: 17.JUL.2023 17:25:52

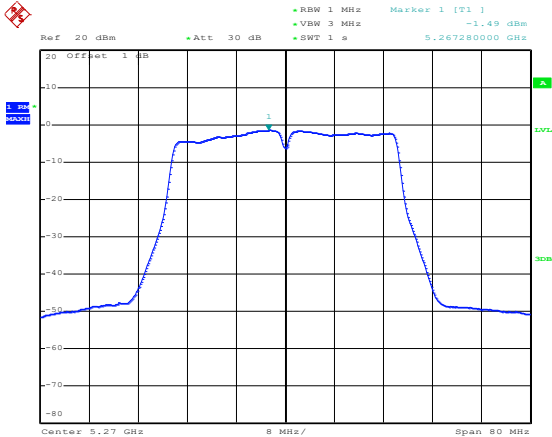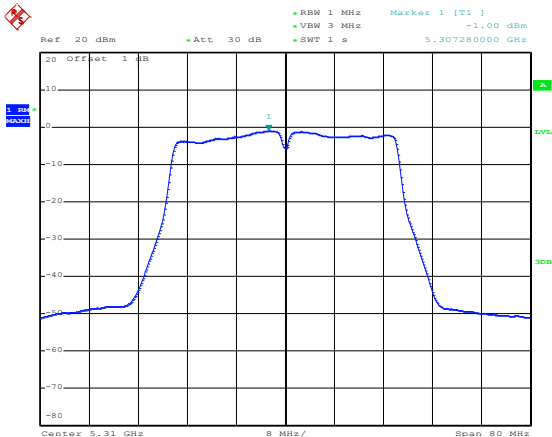
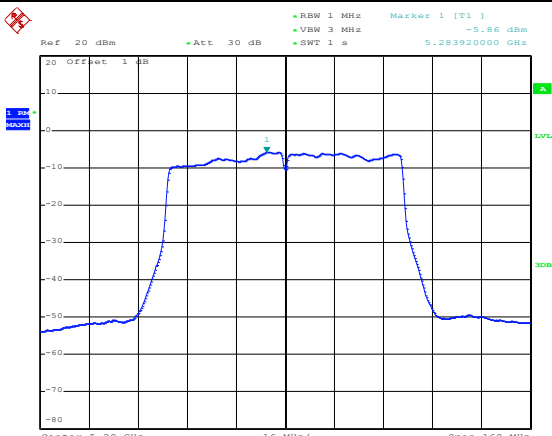
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -1.49 dBm VSW 3 MHz SWT 1 s 5.267280000 GHz 20 Offset 1 dB Center 5.27 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 17:26:25
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -1.00 dBm VSW 3 MHz SWT 1 s 5.307280000 GHz 20 Offset 1 dB Center 5.31 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 17:26:44
802.11ac-HT80	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -5.86 dBm VSW 3 MHz SWT 1 s 5.283920000 GHz 20 Offset 1 dB Center 5.29 GHz 16 MHz/ Span 160 MHz Date: 17.JUL.2023 17:17:45

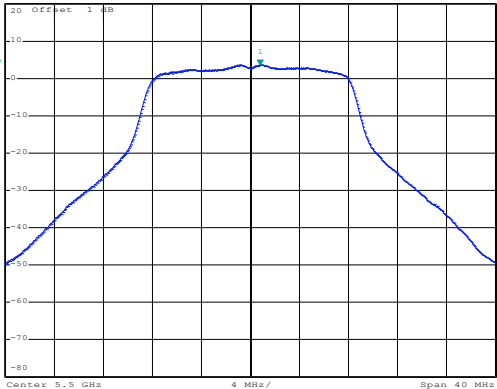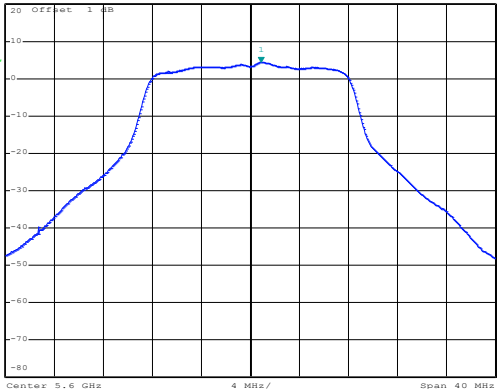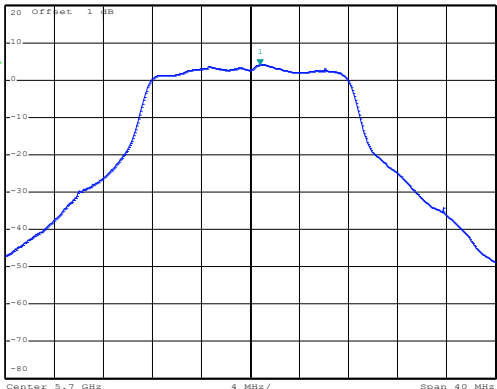5470-5725MHz




802.11a-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 1 s Marker 1 [T1] 3.57 dBm 5.50080000 GHz Center 5.5 GHz 4 MHz/ Span 40 MHz Date: 17.JUL.2023 19:34:27
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 1 s Marker 1 [T1] 4.41 dBm 5.600880000 GHz Center 5.6 GHz 4 MHz/ Span 40 MHz Date: 17.JUL.2023 19:34:49
802.11a-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 1 s Marker 1 [T1] 4.13 dBm 5.700880000 GHz Center 5.7 GHz 4 MHz/ Span 40 MHz Date: 17.JUL.2023 19:35:13

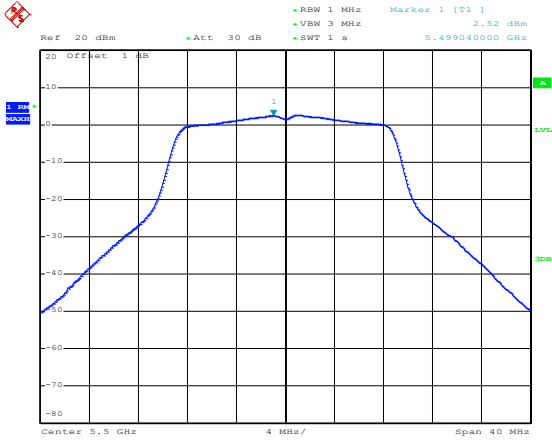
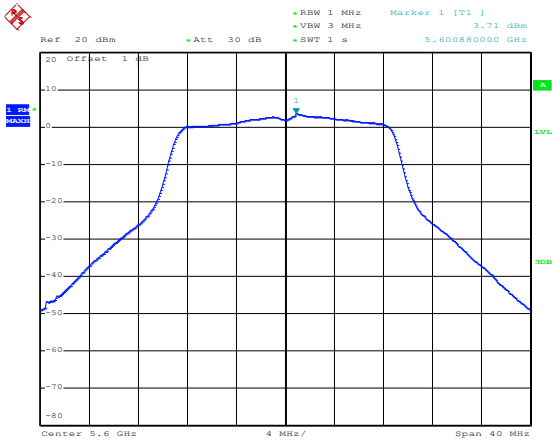
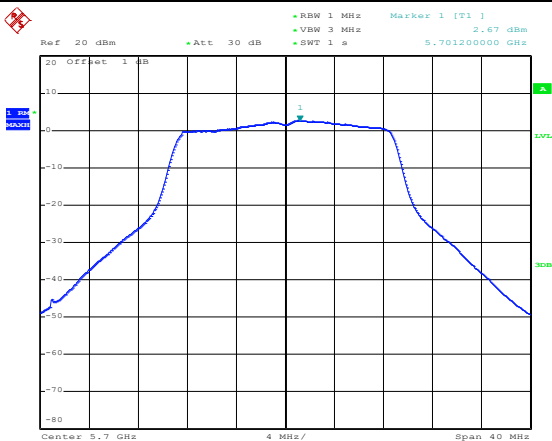
802.11n-HT20-Low	 Date: 17.JUL.2023 19:36:24
802.11n-HT20-Middle	 Date: 17.JUL.2023 19:36:46
802.11n-HT20-High	 Date: 17.JUL.2023 19:37:04

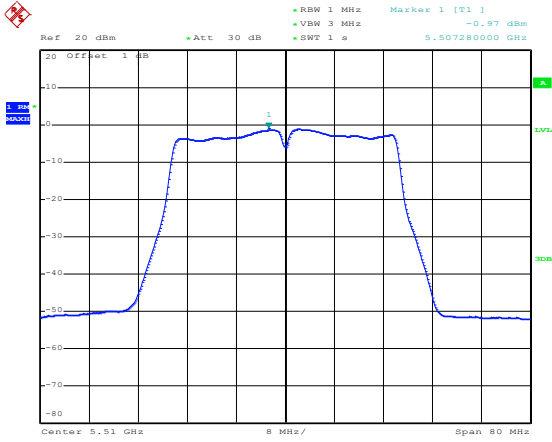
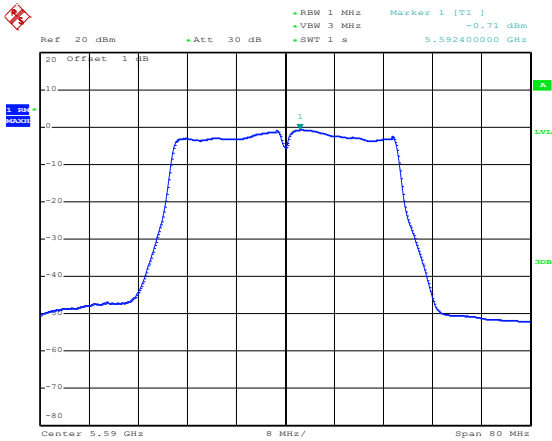
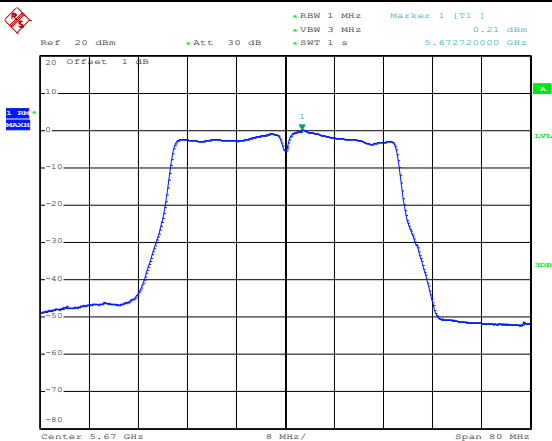
802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -0.97 dBm VBW 3 MHz 5.507280000 GHz SWT 1 s Center 5.51 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 19:38:06
802.11n-HT40- Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -0.71 dBm VBW 3 MHz 5.592400000 GHz SWT 1 s Center 5.59 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 19:38:26
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 0.21 dBm VBW 3 MHz 5.672720000 GHz SWT 1 s Center 5.67 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 19:38:44

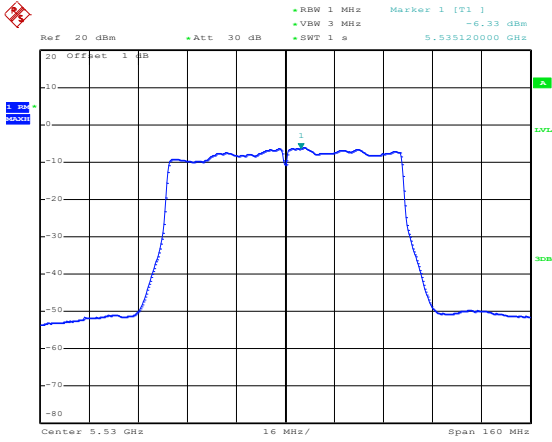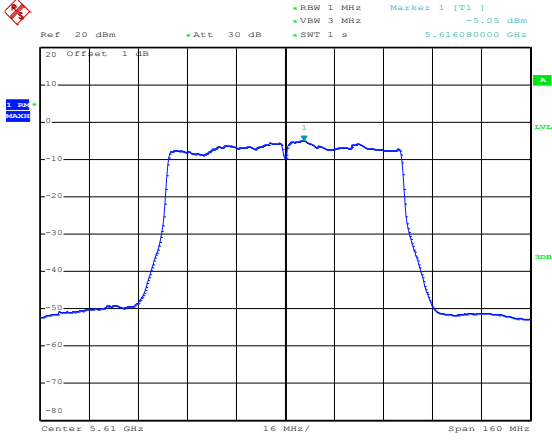802.11ac-HT80-Low	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -6.33 dBm +VBW 3 MHz +SWT 1 s 5.535120000 GHz Center 5.53 GHz 16 MHz/ Span 160 MHz Date: 17.JUL.2023 19:32:53
802.11ac-HT80-High	 Ref 20 dBm +Att 30 dB +RBW 1 MHz Marker 1 [T1] -5.05 dBm +VBW 3 MHz +SWT 1 s 5.616080000 GHz Center 5.61 GHz 16 MHz/ Span 160 MHz Date: 17.JUL.2023 19:33:29

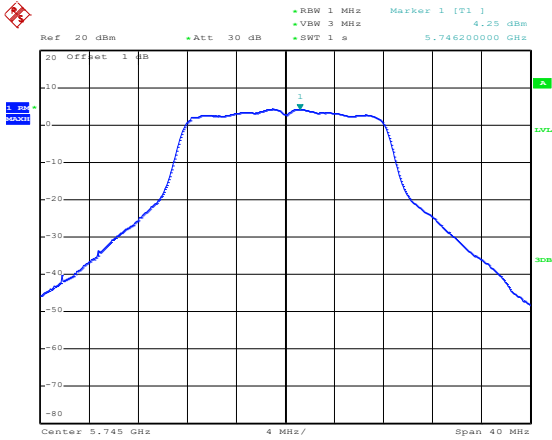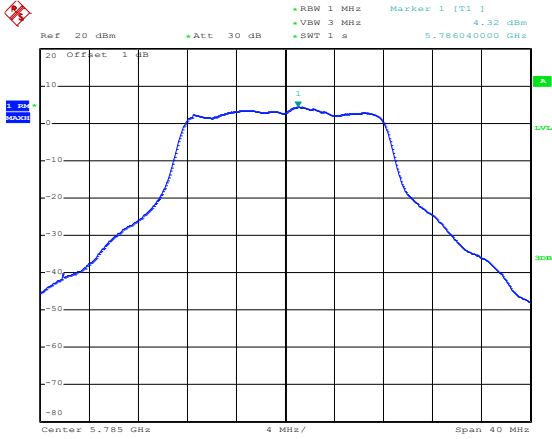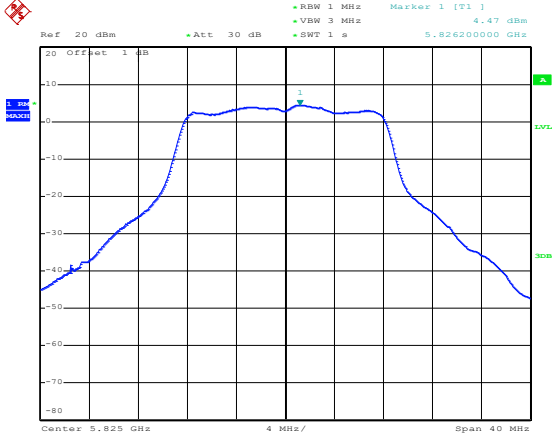5725-5850MHz

802.11a-Low	 Date: 17.JUL.2023 18:47:50
802.11a-Middle	 Date: 17.JUL.2023 18:48:10
802.11a-High	 Date: 17.JUL.2023 18:48:28

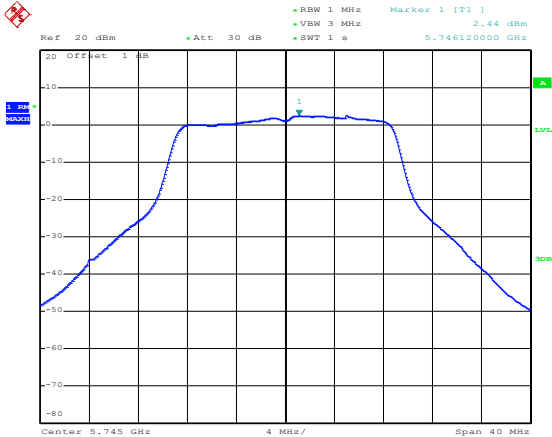
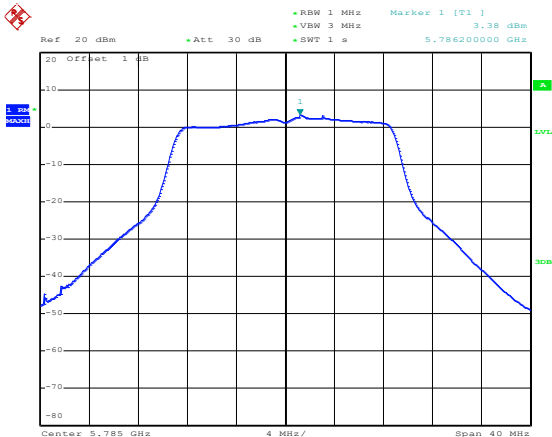
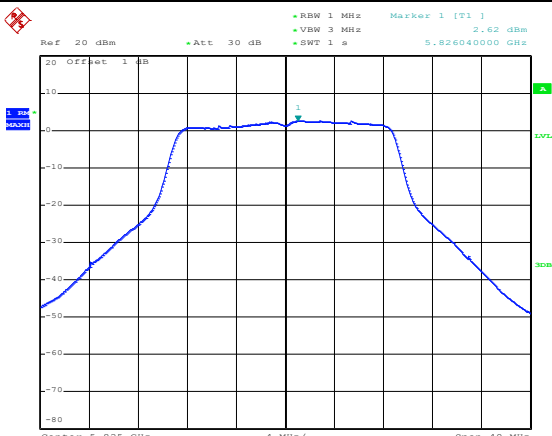
802.11n-HT20-Low	 Date: 17.JUL.2023 18:48:58
802.11n-HT20-Middle	 Date: 17.JUL.2023 18:49:19
802.11n-HT20-High	 Date: 17.JUL.2023 18:49:38

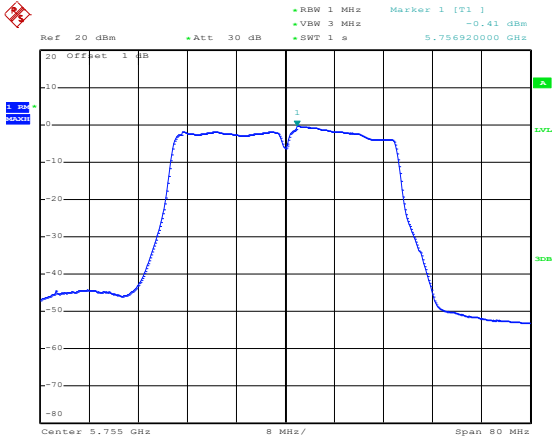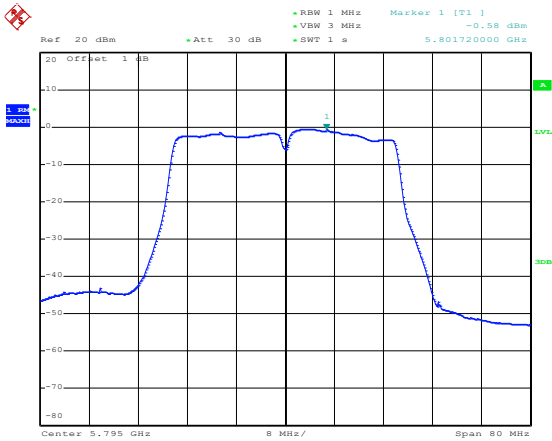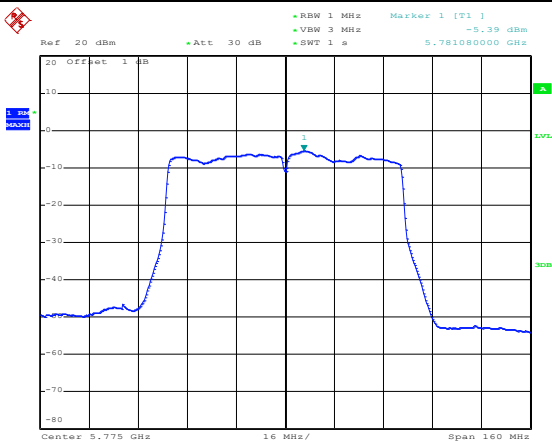802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -0.41 dBm •VSW 3 MHz •SWT 1 s 5.755920000 GHz 20 Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 18:50:15
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -0.58 dBm •VSW 3 MHz •SWT 1 s 5.801720000 GHz 20 Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 17.JUL.2023 18:50:37
802.11ac-HT80	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.39 dBm •VSW 3 MHz •SWT 1 s 5.781080000 GHz 20 Offset 1 dB Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 17.JUL.2023 18:47:05



ANT 2
5150-5250MHz

802.11a-Low	Date: 17.JUL.2023 20:29:37
802.11a-Middle	Date: 17.JUL.2023 20:29:51
802.11a-High	Date: 17.JUL.2023 20:30:17



802.11n-HT20-Low	Date: 17.JUL.2023 20:30:40
802.11n-HT20-Middle	Date: 17.JUL.2023 20:30:55
802.11n-HT20-High	Date: 17.JUL.2023 20:31:10

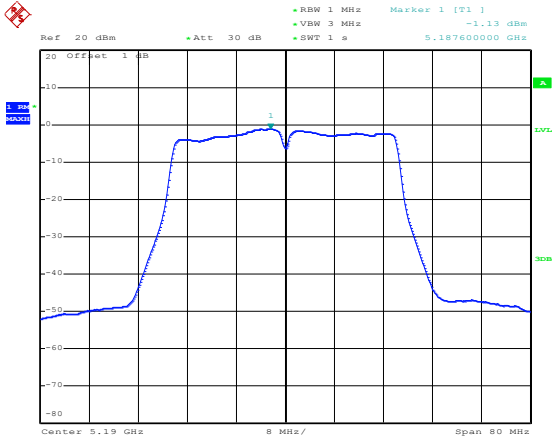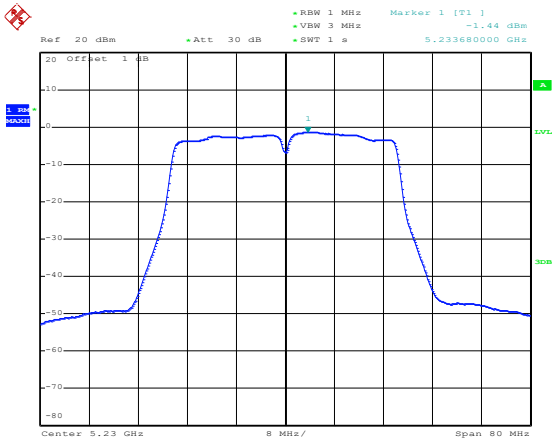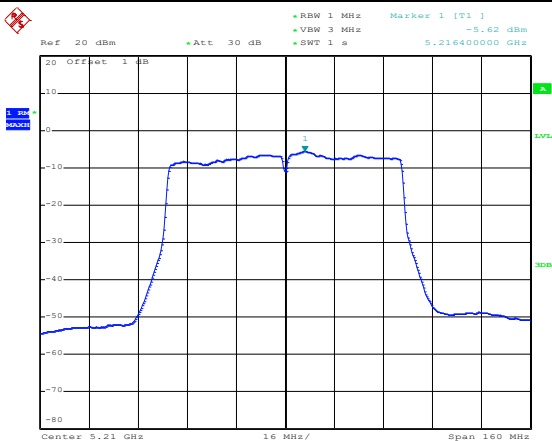802.11n-HT40-Low	 Date: 17.JUL.2023 20:31:43
802.11n-HT40-High	 Date: 17.JUL.2023 20:31:59
802.11ac-HT80	 Date: 17.JUL.2023 20:29:03

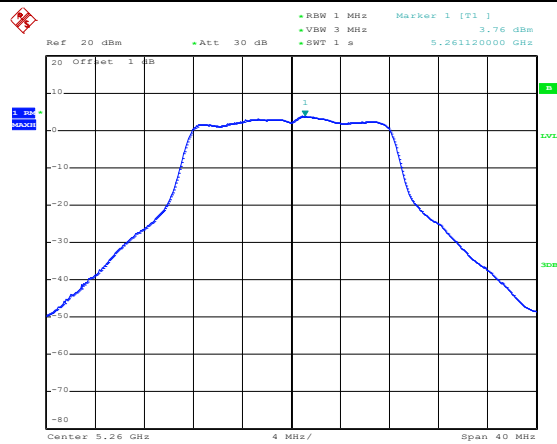

5250-5350MHz






Date: 18.JUL.2023 10:03:58


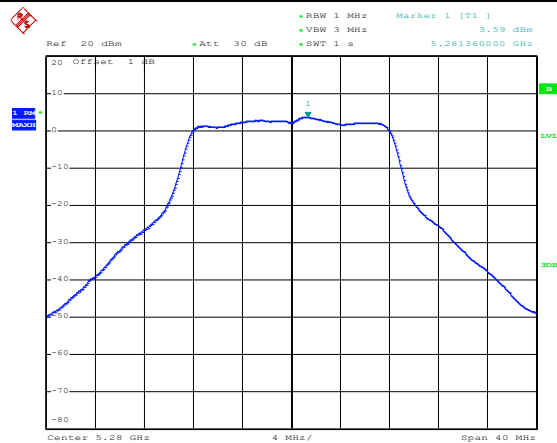



Date: 18.JUL.2023 10:04:27

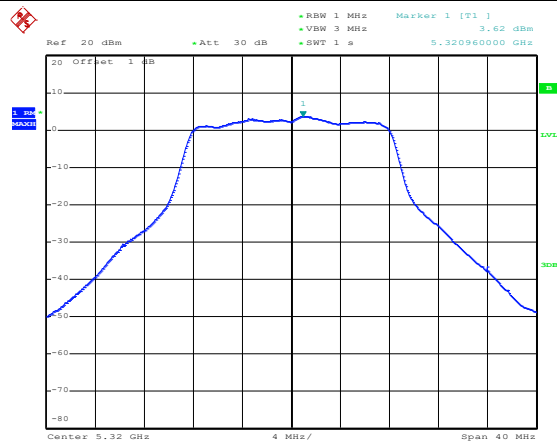



Date: 18.JUL.2023 10:04:48

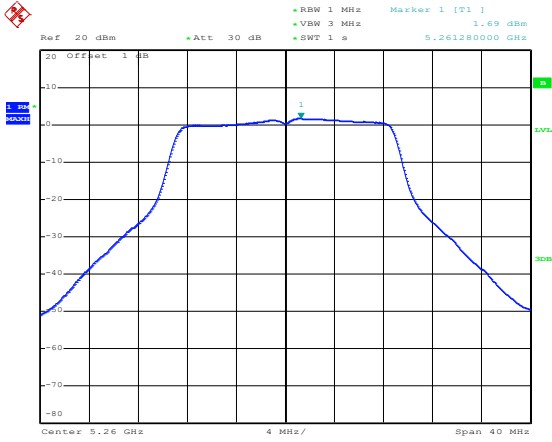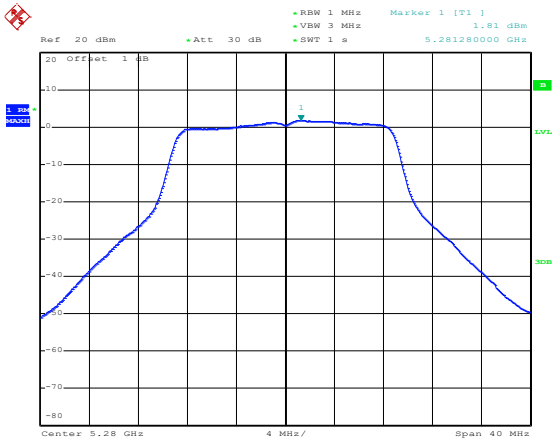
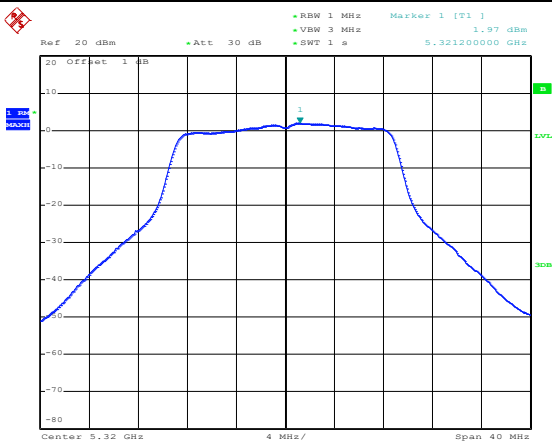
802.11n-HT20-Low	 Date: 18.JUL.2023 10:05:21
802.11n-HT20-Middle	 Date: 18.JUL.2023 10:05:43
802.11n-HT20-High	 Date: 18.JUL.2023 10:06:03

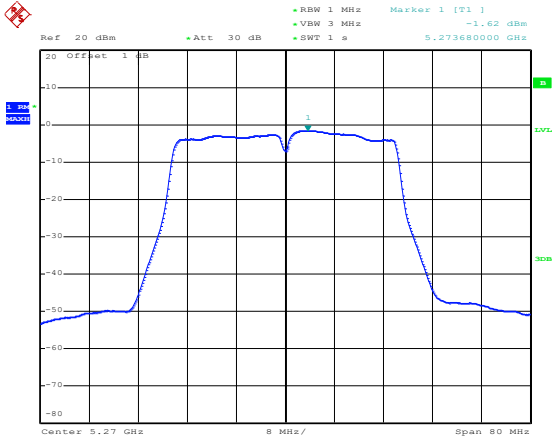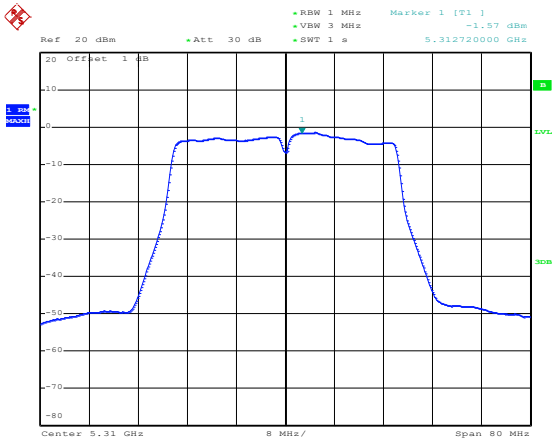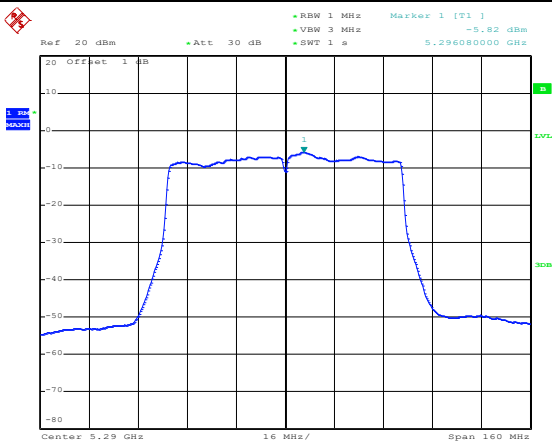802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -1.62 dBm VSW 3 MHz SWT 1 s 5.273680000 GHz 20 Offset 1 dB Center 5.27 GHz 8 MHz/ Span 80 MHz Date: 18.JUL.2023 10:06:43
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -1.57 dBm VSW 3 MHz SWT 1 s 5.312720000 GHz 20 Offset 1 dB Center 5.31 GHz 8 MHz/ Span 80 MHz Date: 18.JUL.2023 10:07:06
802.11ac-HT80	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -5.82 dBm VSW 3 MHz SWT 1 s 5.296080000 GHz 20 Offset 1 dB Center 5.29 GHz 16 MHz/ Span 160 MHz Date: 18.JUL.2023 10:01:58

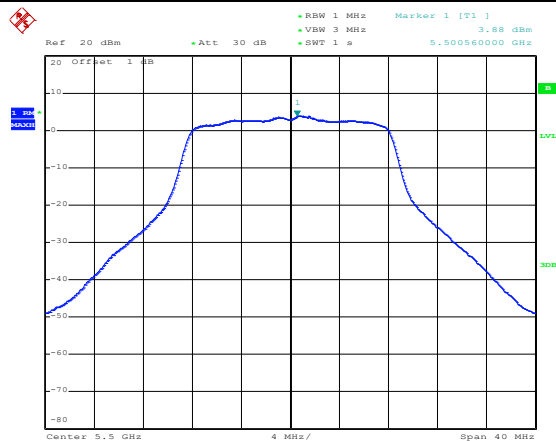

5470-5725MHz



Date: 18.JUL.2023 14:41:59


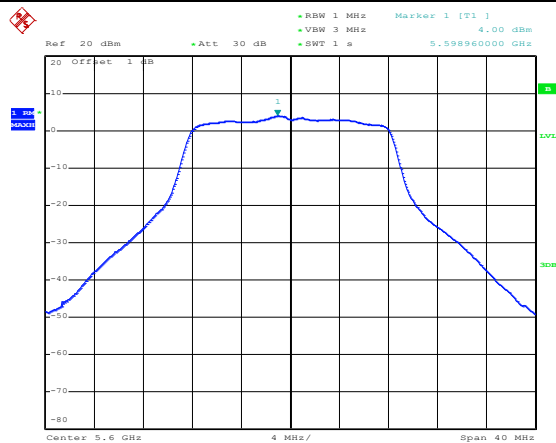





Date: 18.JUL.2023 14:42:40

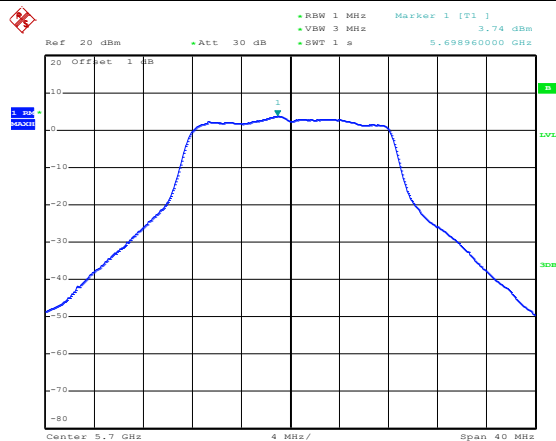




Date: 18.JUL.2023 14:43:03




802.11n-HT20-Low	Date: 18.JUL.2023 14:43:50
802.11n-HT20-Middle	Date: 18.JUL.2023 14:44:52
802.11n-HT20-High	Date: 18.JUL.2023 14:45:13

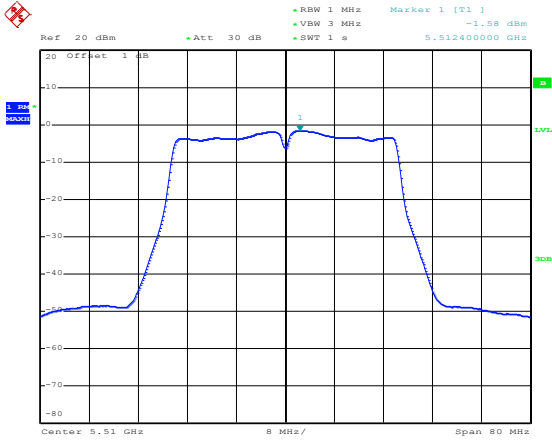
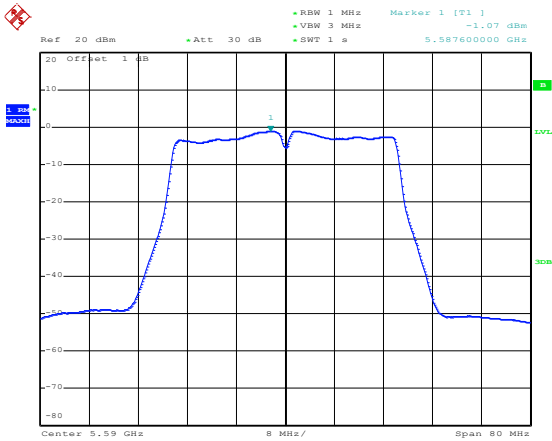
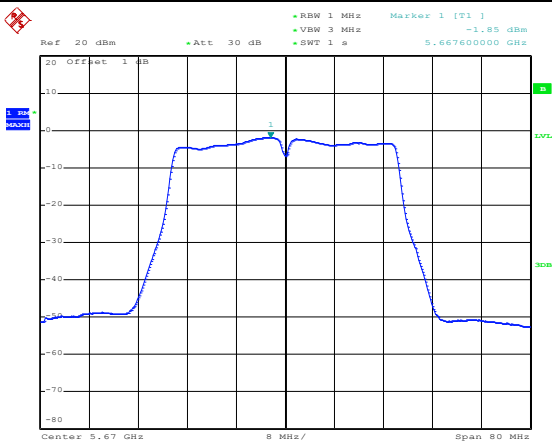
802.11n-HT40-Low	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1] -1.58 dBm 5.512400000 GHz Center: 5.51 GHz Span: 80 MHz Date: 18.JUL.2023 14:46:15
802.11n-HT40- Middle	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1] -1.07 dBm 5.587600000 GHz Center: 5.59 GHz Span: 80 MHz Date: 18.JUL.2023 14:46:39
802.11n-HT40-High	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1] -1.85 dBm 5.667600000 GHz Center: 5.67 GHz Span: 80 MHz Date: 18.JUL.2023 14:46:58

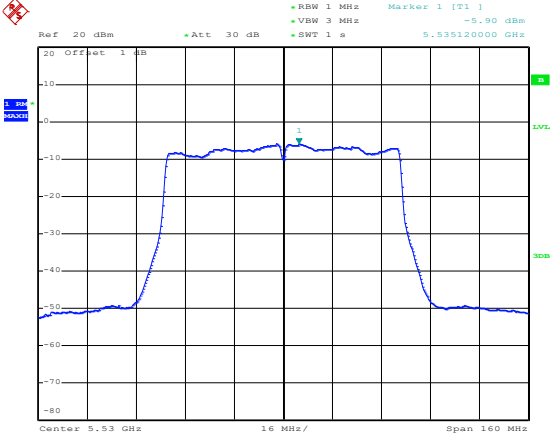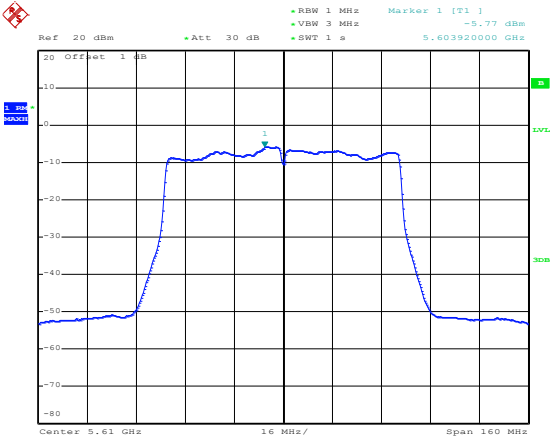802.11ac-HT80-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.90 dBm •VSW 3 MHz •SWT 1 s 5.535120000 GHz 20 Offset 1 dB Center 5.53 GHz 16 MHz/ Span 160 MHz Date: 18.JUL.2023 14:40:44
802.11ac-HT80-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.77 dBm •VSW 3 MHz •SWT 1 s 5.603920000 GHz 20 Offset 1 dB Center 5.61 GHz 16 MHz/ Span 160 MHz Date: 18.JUL.2023 14:41:23

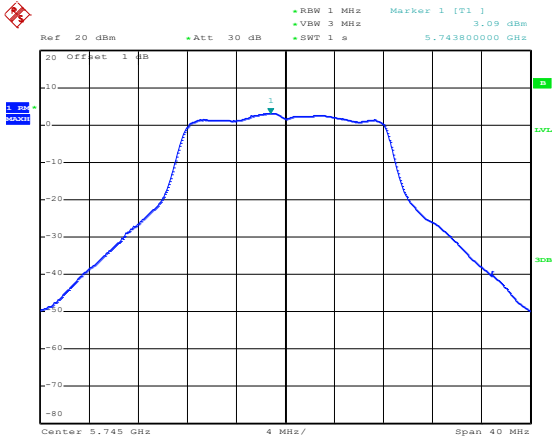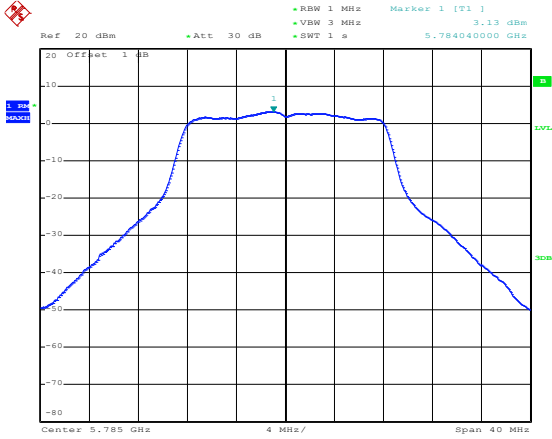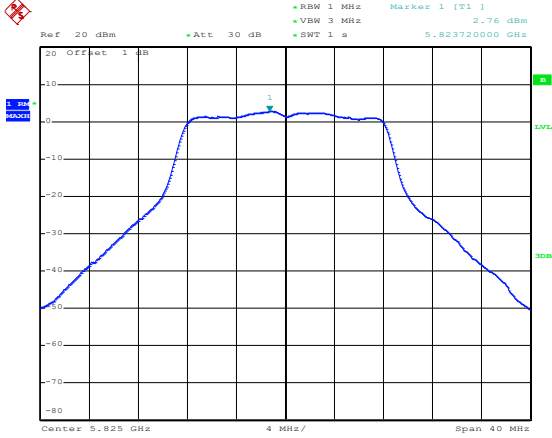5725-5850MHz

802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1]: 3.09 dBm 5.74380000 GHz Center: 5.745 GHz 4 MHz/ Span: 40 MHz Date: 18.JUL.2023 11:48:39
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1]: 3.13 dBm 5.784040000 GHz Center: 5.785 GHz 4 MHz/ Span: 40 MHz Date: 18.JUL.2023 11:48:56
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW: 1 MHz VSW: 3 MHz SWT: 1 s Marker 1 [T1]: 2.76 dBm 5.823720000 GHz Center: 5.825 GHz 4 MHz/ Span: 40 MHz Date: 18.JUL.2023 11:49:13

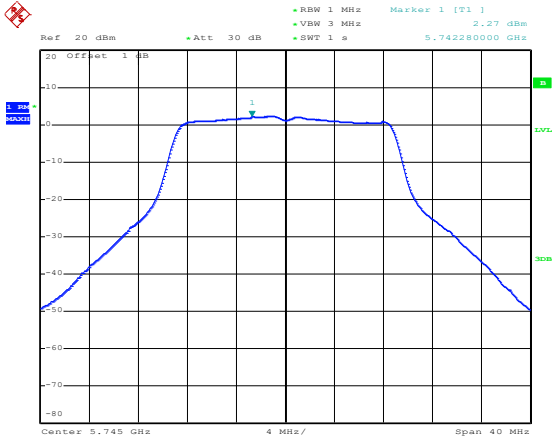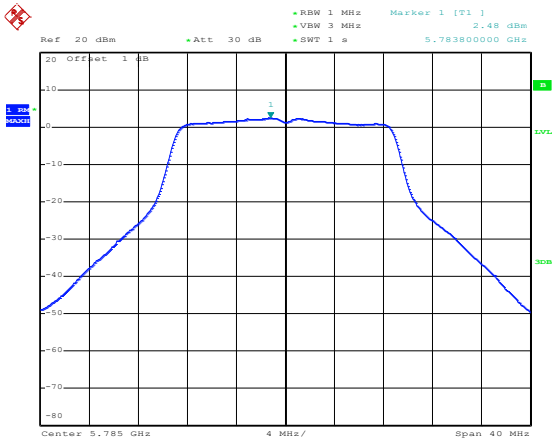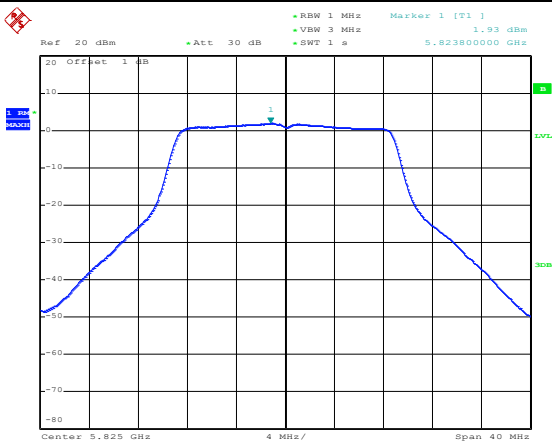802.11n-HT20-Low	 Date: 18.JUL.2023 11:49:39
802.11n-HT20-Middle	 Date: 18.JUL.2023 11:49:55
802.11n-HT20-High	 Date: 18.JUL.2023 11:50:09

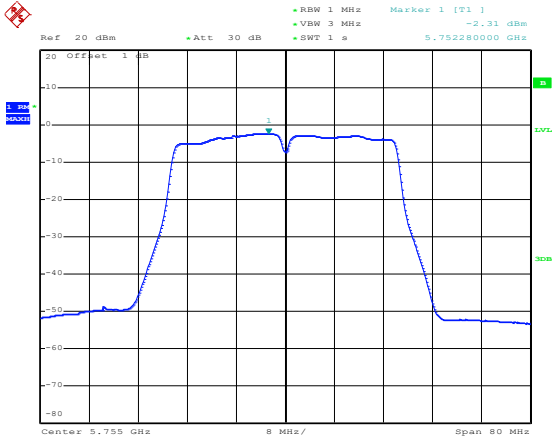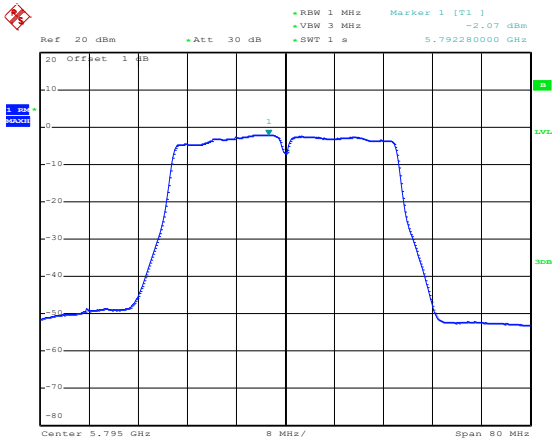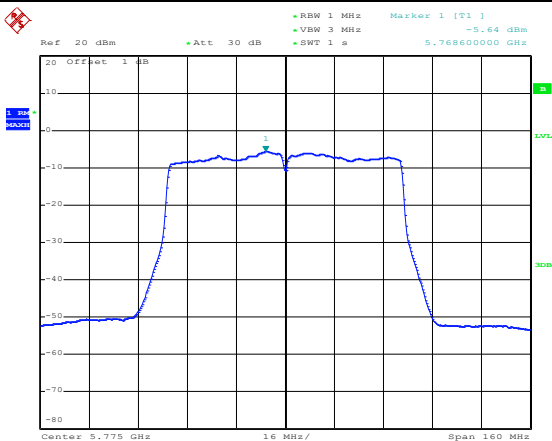802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.31 dBm VBW 3 MHz SWT 1 s 5.752280000 GHz 20 Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 18.JUL.2023 11:50:42
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.07 dBm VBW 3 MHz SWT 1 s 5.792280000 GHz 20 Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 18.JUL.2023 11:51:05
802.11ac-HT80	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -5.64 dBm VBW 3 MHz SWT 1 s 5.768600000 GHz 20 Offset 1 dB Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 18.JUL.2023 11:47:50

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 1		ANT 2		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	22.6	16.9	21.8	16.7	Pass
	5200	22.6	16.8	21.8	16.7	Pass
	5240	22.0	16.9	21.8	16.7	Pass
802.11n-HT20	5180	23.5	18.0	23.0	17.9	Pass
	5200	23.1	17.9	23.2	17.9	Pass
	5240	23.3	17.9	23.6	17.9	Pass
802.11n-HT40	5190	41.6	36.8	41.0	36.6	Pass
	5230	41.4	36.8	41.0	36.6	Pass
802.11ac-HT80	5210	84.8	76.0	83.6	76.0	Pass

U-NII-2A: 5250-5350MHz						
Test Mode	Test Channel MHz	ANT 1		ANT 2		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5260	22.3	16.9	22.0	16.7	Pass
	5280	21.9	16.7	21.9	16.7	Pass
	5320	22.4	16.8	21.8	16.7	Pass
802.11n-HT20	5260	23.2	17.9	23.7	17.9	Pass
	5280	23.0	17.9	23.6	17.9	Pass
	5320	22.8	17.9	23.1	17.9	Pass
802.11n-HT40	5270	41.6	36.8	41.0	36.6	Pass
	5310	41.6	36.8	41.0	36.6	Pass
802.11ac-HT80	5290	84.4	76.0	84.0	76.0	Pass



U-NII-2C: 5470-5725MHz						
Test Mode	Test Channel MHz	ANT 1		ANT 2		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5500	22.5	16.8	21.9	16.6	Pass
	5600	22.5	16.8	21.8	16.7	Pass
	5700	22.0	16.8	22.0	16.7	Pass
802.11n-HT20	5500	22.8	17.9	22.8	17.8	Pass
	5600	22.9	17.9	22.8	17.9	Pass
	5700	22.9	17.9	23.4	17.9	Pass
802.11n-HT40	5510	41.4	36.6	41.2	36.8	Pass
	5590	41.0	36.8	41.2	36.6	Pass
	5670	41.4	36.8	41.2	36.6	Pass
802.11ac-HT80	5530	84.0	75.6	84.4	76.0	Pass
	5610	84.8	76.0	83.6	76.0	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 1		ANT 2		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	15.6	16.8	15.5	16.7	≥500
	5785	15.6	16.8	15.6	16.7	≥500
	5825	16.0	16.8	15.8	16.7	≥500
802.11n-HT20	5745	15.5	17.9	16.6	17.9	≥500
	5785	15.4	18.0	16.7	17.9	≥500
	5825	16.9	18.1	15.9	18.0	≥500
802.11n-HT40	5755	36.2	36.8	36.0	36.6	≥500
	5795	36.0	36.8	35.6	36.6	≥500
802.11ac-HT80	5775	76.0	76.0	76.0	75.6	≥500



ANT 1

26 dB BandwidthMHz

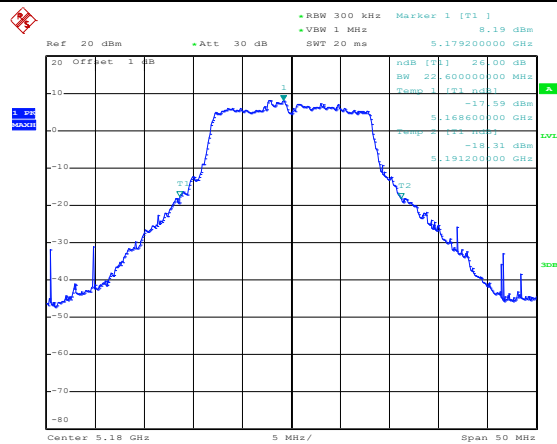

5150-5250MHz






Date: 17.JUL.2023 16:46:59


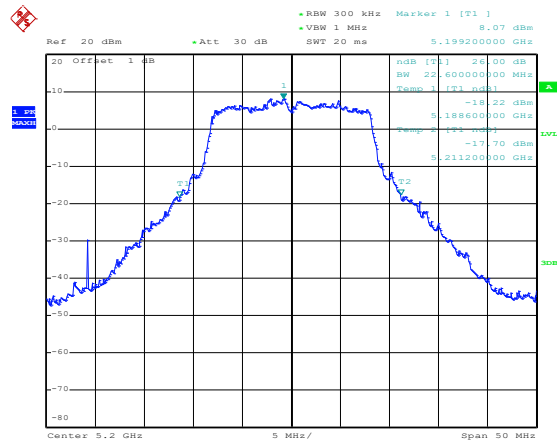



Date: 17.JUL.2023 16:47:18

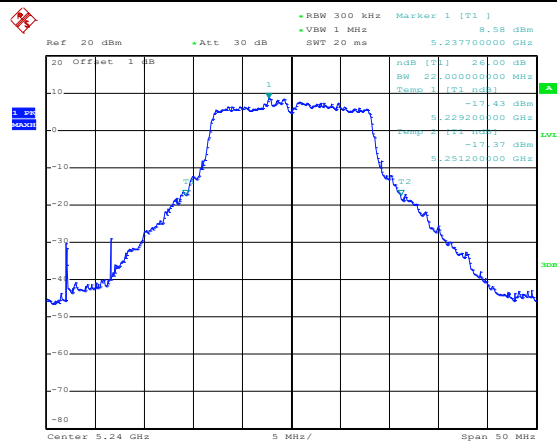



Date: 17.JUL.2023 16:47:38

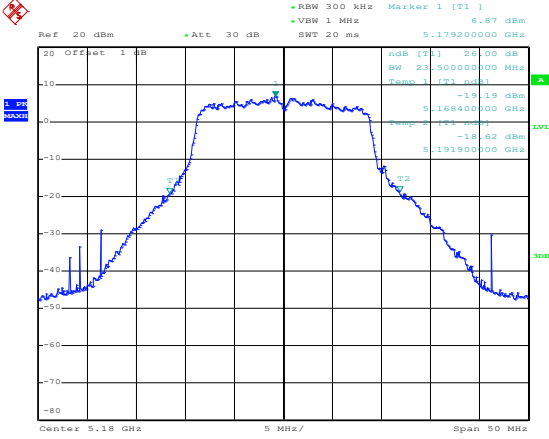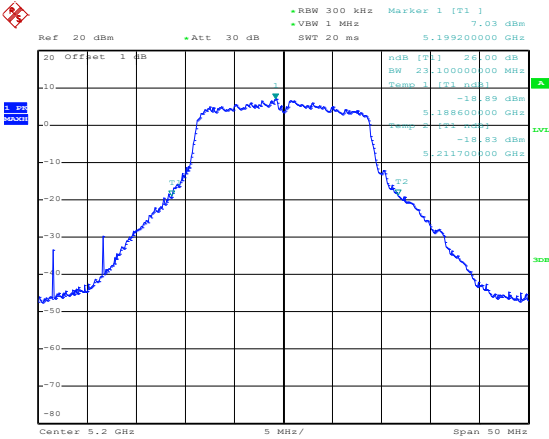
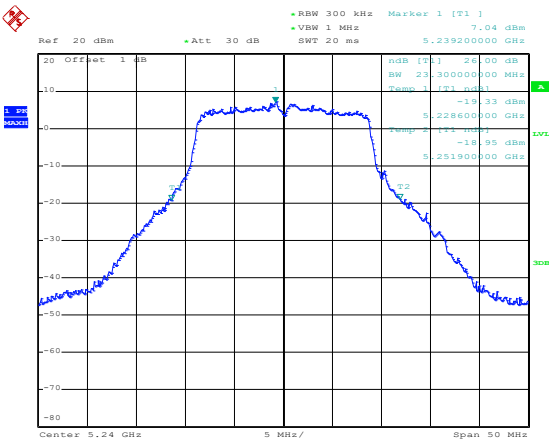
802.11n-HT20-Low	 Date: 17.JUL.2023 16:48:14
802.11n-HT20-Middle	 Date: 17.JUL.2023 16:48:37
802.11n-HT20-High	 Date: 17.JUL.2023 16:48:56

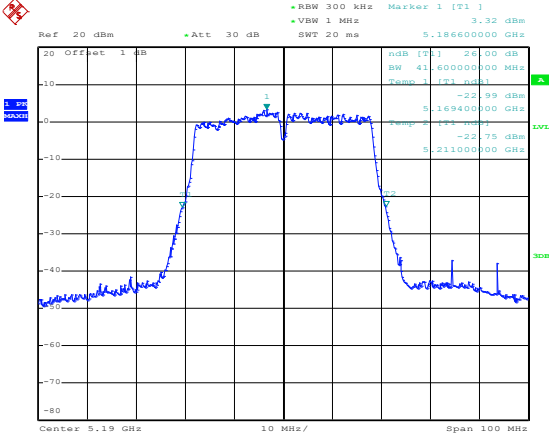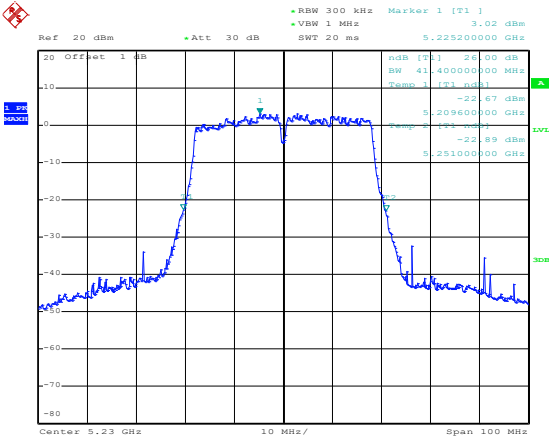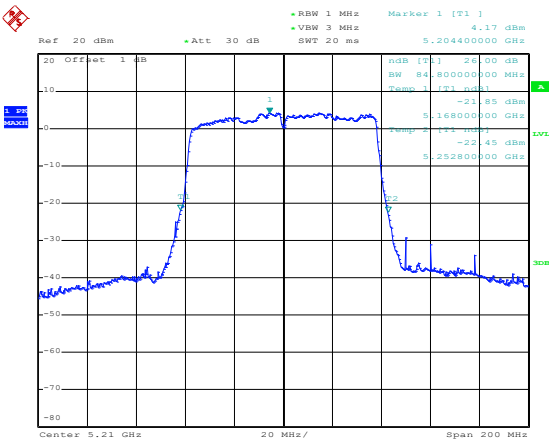802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 3.32 dBm •VSW 1 MHz SWT 20 ms 5.186600000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 41.60000000 MHz Temp 1 [T1] n dB -22.99 dBm 5.169400000 GHz 5.213000000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 16:49:35
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 3.02 dBm •VSW 1 MHz SWT 20 ms 5.225200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 41.40000000 MHz Temp 1 [T1] n dB -22.67 dBm 5.209600000 GHz 5.251000000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 16:49:59
802.11ac-HT80	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] 4.17 dBm •VSW 3 MHz SWT 20 ms 5.204400000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 84.80000000 MHz Temp 1 [T1] n dB -21.85 dBm 5.169000000 GHz 5.252800000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 17.JUL.2023 16:46:09

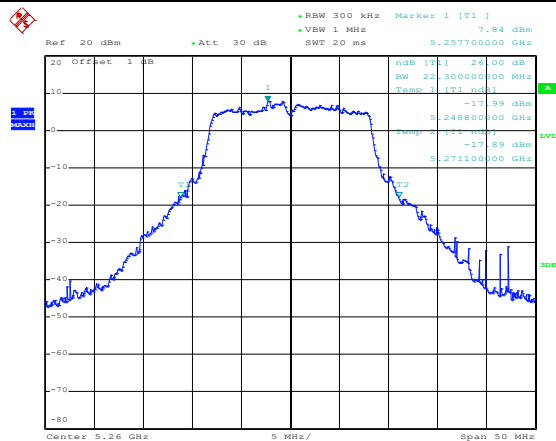

5250-5350MHz






Date: 17.JUL.2023 17:36:46


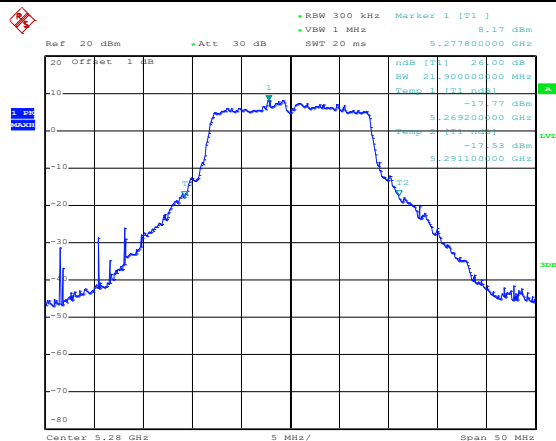



Date: 17.JUL.2023 17:37:09

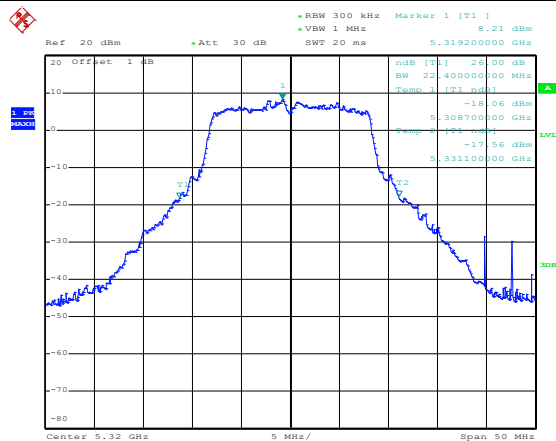



Date: 17.JUL.2023 17:37:32

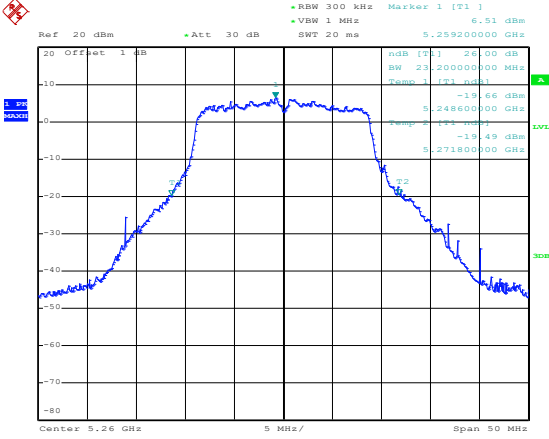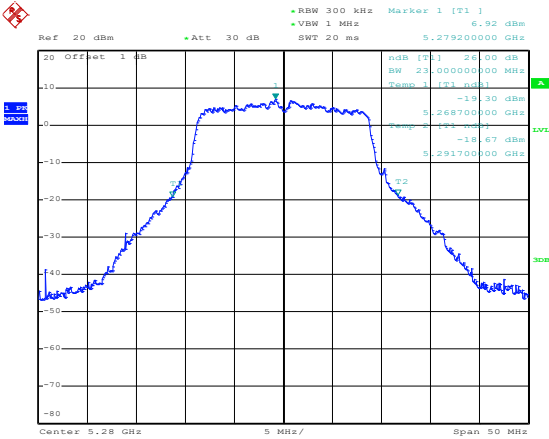
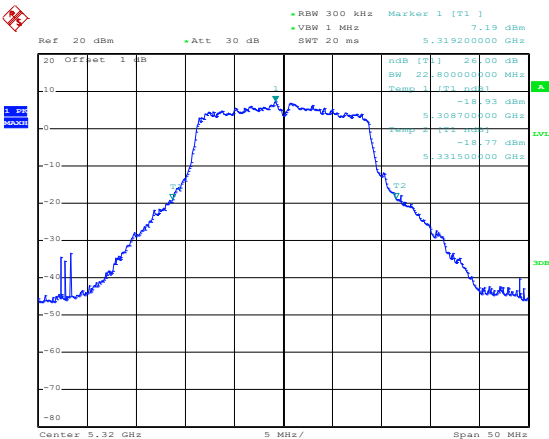
802.11n-HT20-Low	 Date: 17.JUL.2023 17:38:05
802.11n-HT20-Middle	 Date: 17.JUL.2023 17:38:31
802.11n-HT20-High	 Date: 17.JUL.2023 17:39:00

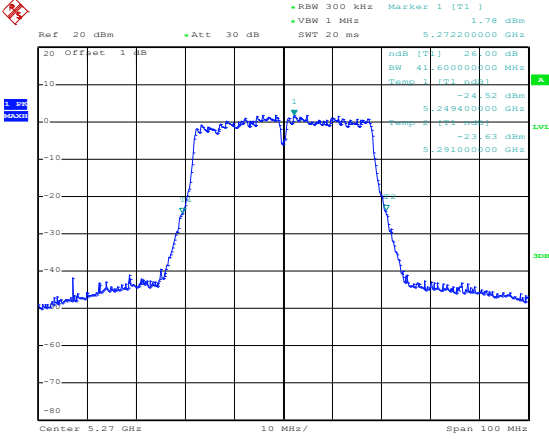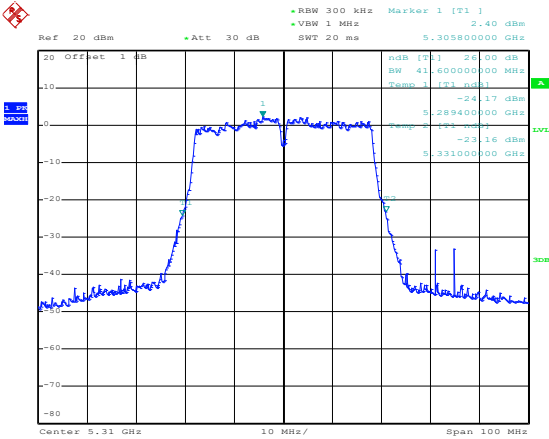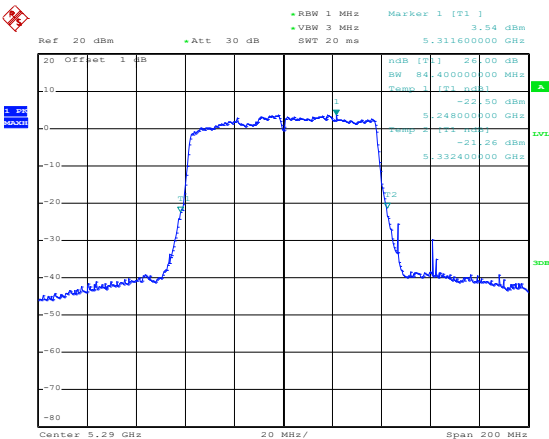802.11n-HT40-Low	 Date: 17.JUL.2023 17:39:34
802.11n-HT40-High	 Date: 17.JUL.2023 17:39:57
802.11ac-HT80	 Date: 17.JUL.2023 17:35:51

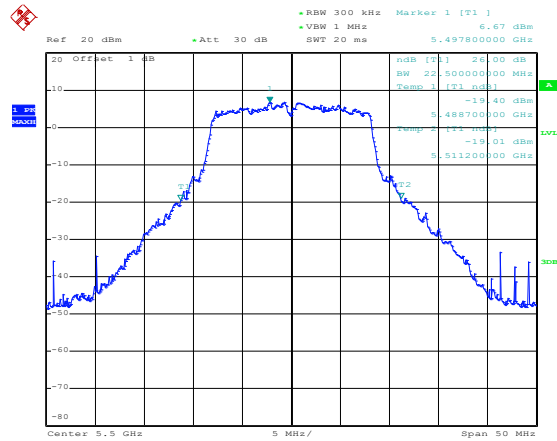

5470-5725MHz






Date: 17.JUL.2023 20:06:01


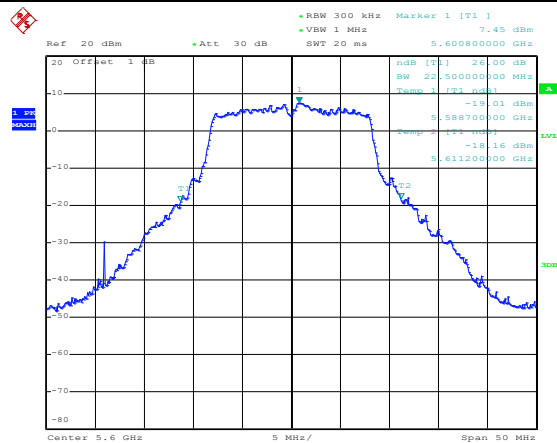



Date: 17.JUL.2023 20:06:25

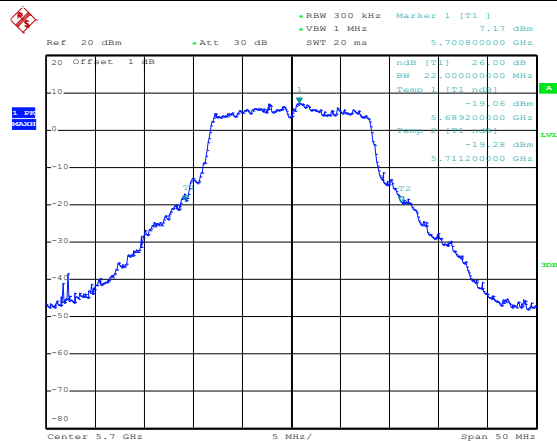


Date: 17.JUL.2023 20:06:45

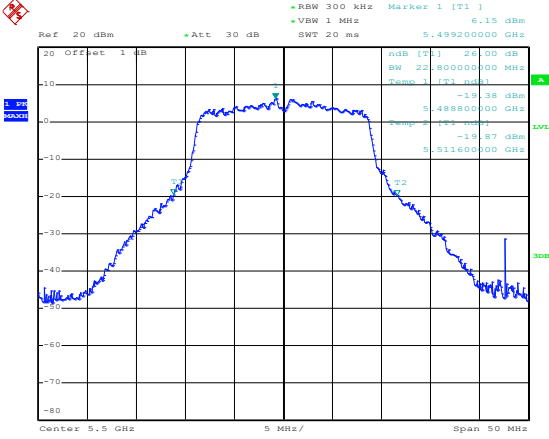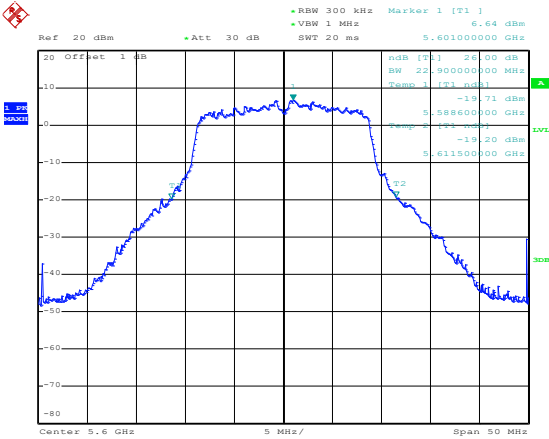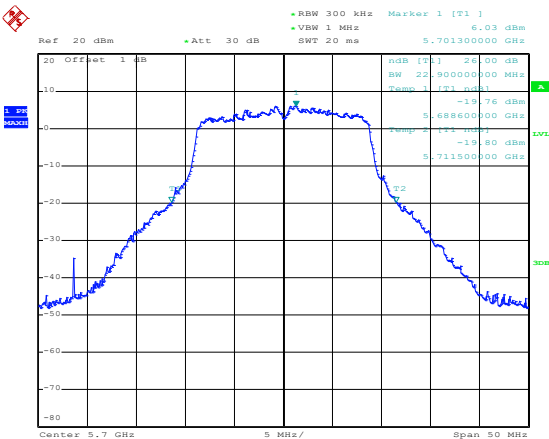
802.11n-HT20-Low	 Date: 17.JUL.2023 20:07:45
802.11n-HT20-Middle	 Date: 17.JUL.2023 20:08:09
802.11n-HT20-High	 Date: 17.JUL.2023 20:08:29

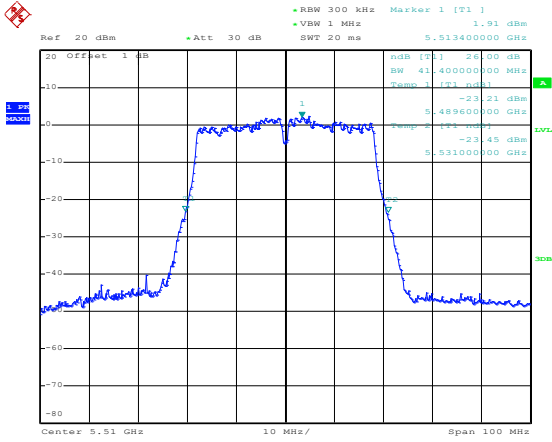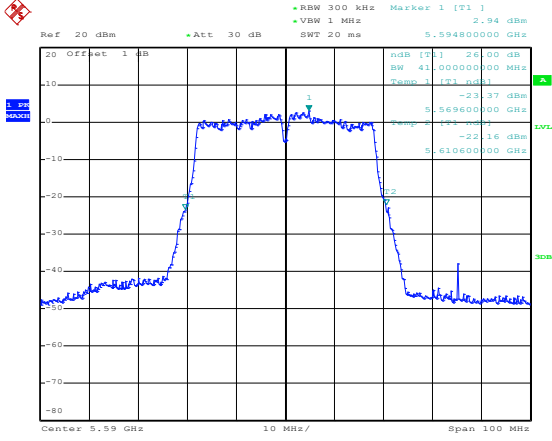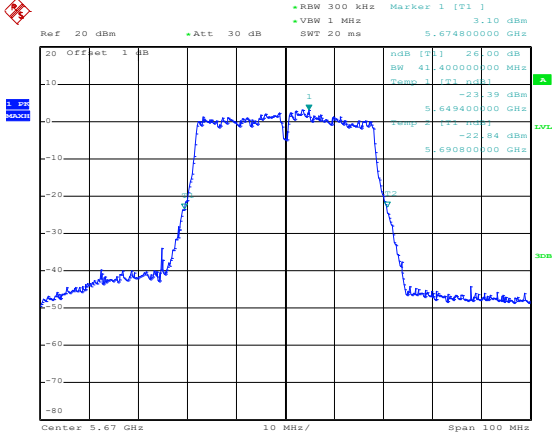802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 1.91 dBm •VSW 1 MHz SWT 20 ms 5.513400000 GHz 20 Offset 1 dB 1 -23.21 dBm BW 41.400000000 MHz Temp 1 [T1] dBm 5.489600000 GHz -23.45 dBm 5.531000000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 20:09:29
802.11n-HT40- Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 2.94 dBm •VSW 1 MHz SWT 20 ms 5.594800000 GHz 20 Offset 1 dB 1 -23.37 dBm BW 41.000000000 MHz Temp 1 [T1] dBm 5.569600000 GHz -23.16 dBm 5.610600000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 20:09:50
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 3.10 dBm •VSW 1 MHz SWT 20 ms 5.674800000 GHz 20 Offset 1 dB 1 -23.39 dBm BW 41.400000000 MHz Temp 1 [T1] dBm 5.649400000 GHz -22.84 dBm 5.690800000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 20:10:12



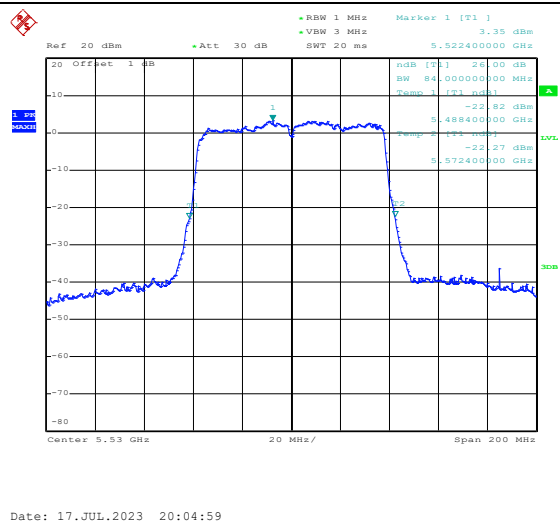
802.11ac-HT80-Low








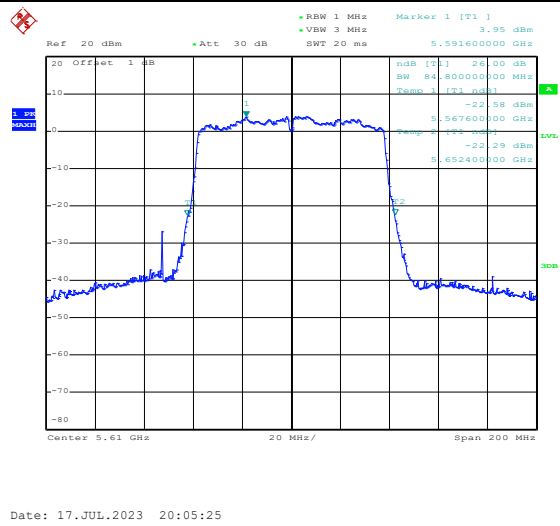
802.11ac-HT80--High






6 dB BandwidthMHz
5725-5850MHz

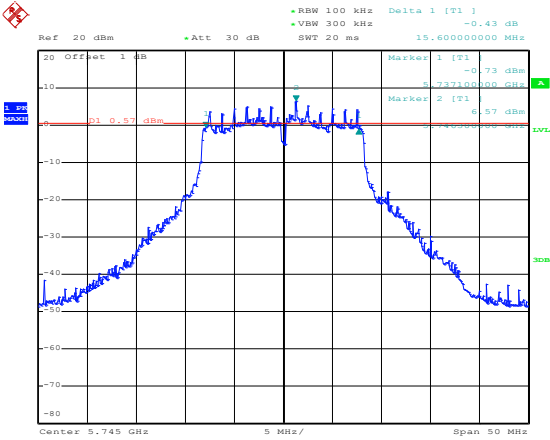
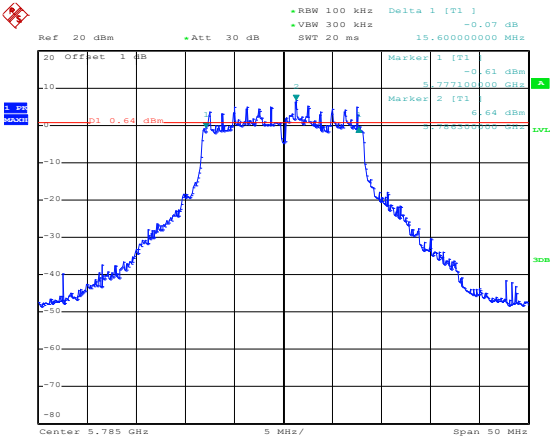
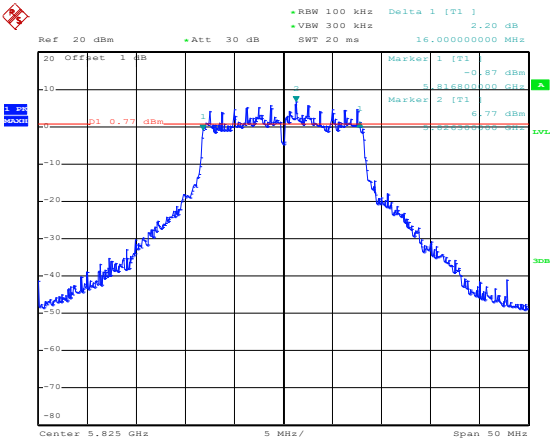
802.11a-Low	 Date: 17.JUL.2023 19:05:37
802.11a-Middle	 Date: 17.JUL.2023 19:06:47
802.11a-High	 Date: 17.JUL.2023 19:07:31

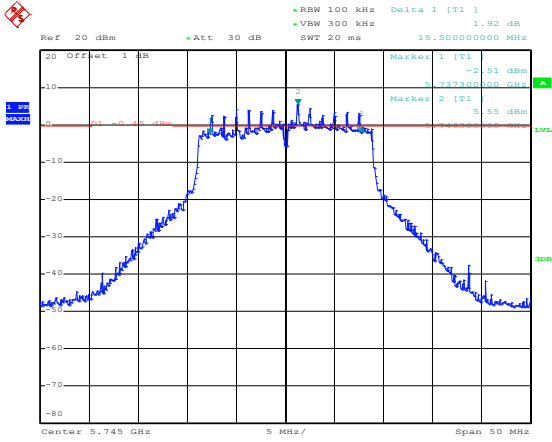
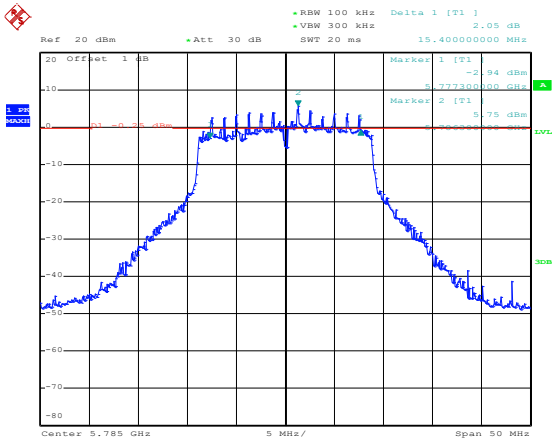
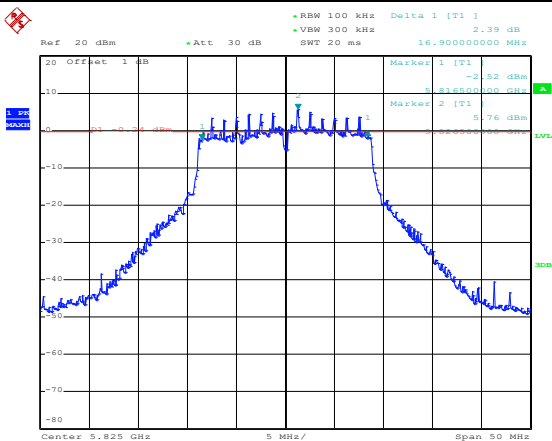
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 1.92 dB VSW 300 kHz SWT 20 ms 15.500000000 MHz Marker 1 [T1] -2.51 dBm 5.737300000 GHz Marker 2 [T1] -5.55 dBm 5.737300000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:08:34
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 2.05 dB VSW 300 kHz SWT 20 ms 15.400000000 MHz Marker 1 [T1] -2.94 dBm 5.777300000 GHz Marker 2 [T1] -5.75 dBm 5.777300000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:09:27
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 2.39 dB VSW 300 kHz SWT 20 ms 16.900000000 MHz Marker 1 [T1] -2.52 dBm 5.816500000 GHz Marker 2 [T1] -5.76 dBm 5.816500000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:10:27

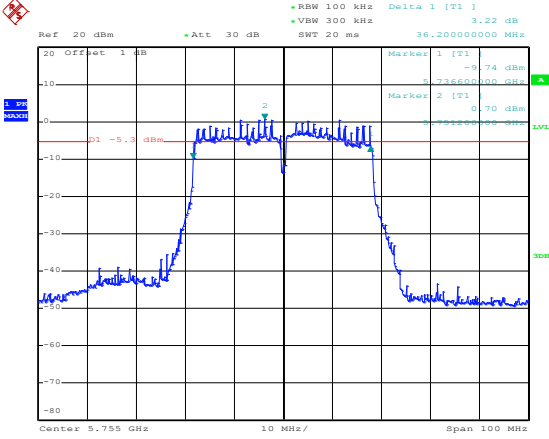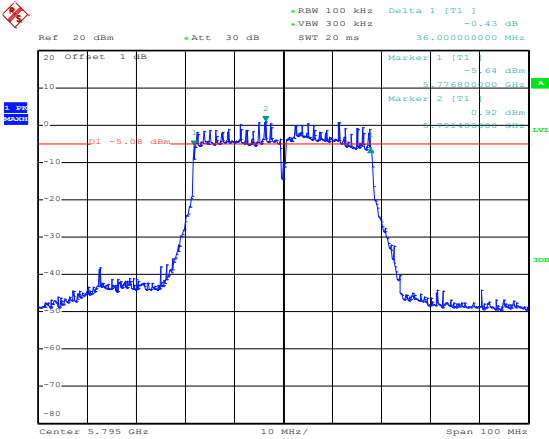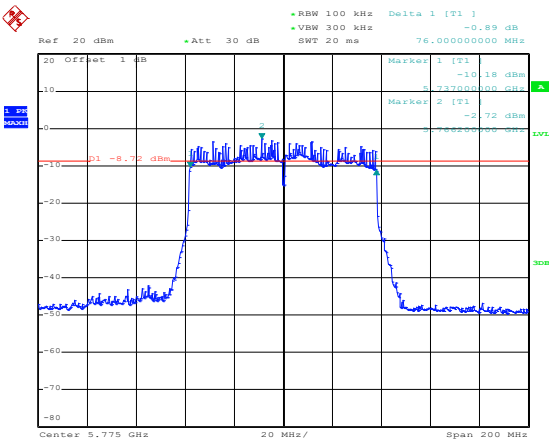802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 3.22 dB VBW 300 kHz SWT 20 ms 36.200000000 MHz Marker 1 [T1] -9.74 dBm Marker 2 [T1] 0.70 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:11:47
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -0.43 dB VBW 300 kHz SWT 20 ms 36.000000000 MHz Marker 1 [T1] -5.64 dBm Marker 2 [T1] 0.92 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:12:37
802.11ac-HT80	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] -0.89 dB VBW 300 kHz SWT 20 ms 76.000000000 MHz Marker 1 [T1] -10.18 dBm Marker 2 [T1] -2.72 dBm Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 17.JUL.2023 19:04:17

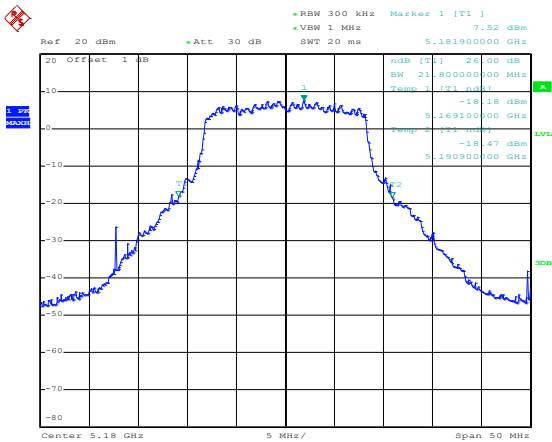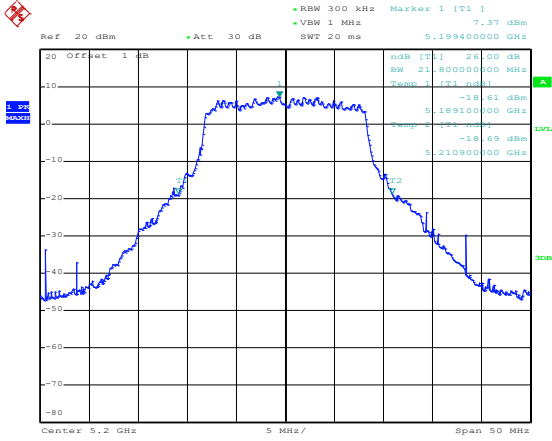
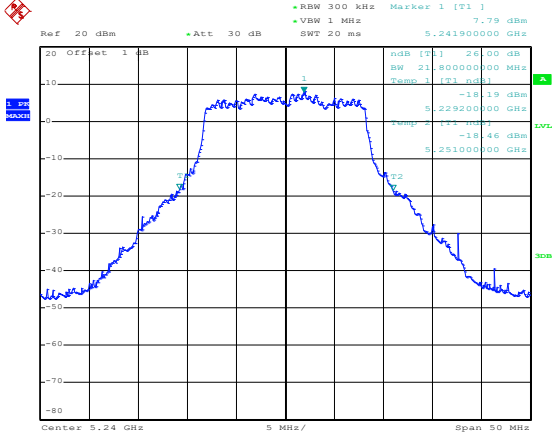
ANT 2
26 dB BandwidthMHz
5150-5250MHz

802.11a-Low	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 7.52 dBm 5.181900000 GHz ndB [T1] -26.00 dB BW 21.800000000 MHz Temp 1 [T1] ndB 1 -18.18 dBm 5.169100000 GHz 2 -18.47 dBm 5.190900000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:23:42
802.11a-Middle	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 7.37 dBm 5.199400000 GHz ndB [T1] -26.00 dB BW 21.800000000 MHz Temp 1 [T1] ndB 1 -18.61 dBm 5.189100000 GHz 2 -18.69 dBm 5.210900000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:24:09
802.11a-High	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] 7.79 dBm 5.241900000 GHz ndB [T1] -26.00 dB BW 21.800000000 MHz Temp 1 [T1] ndB 1 -18.19 dBm 5.229200000 GHz 2 -18.46 dBm 5.251000000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:24:31

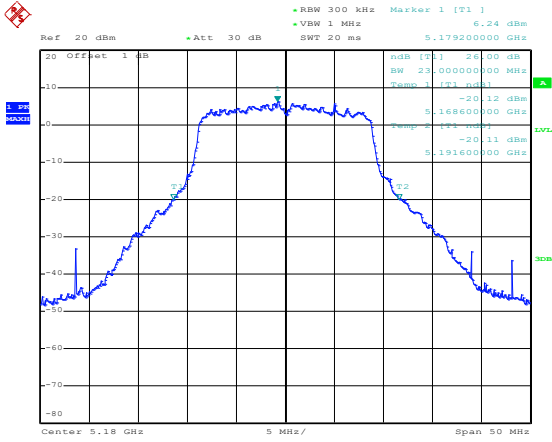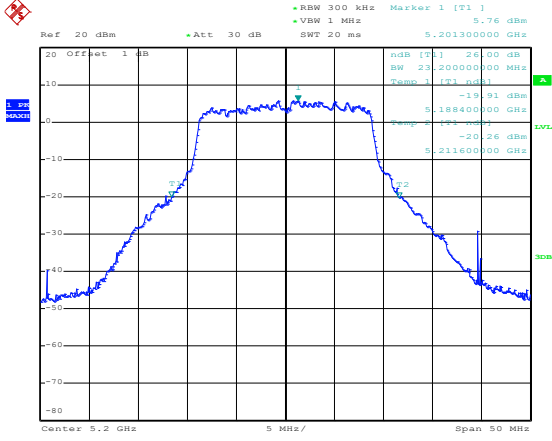
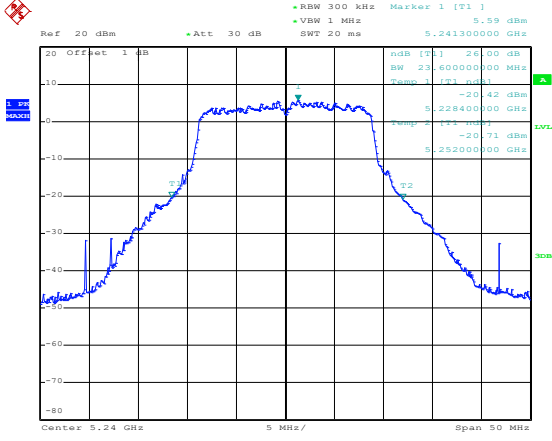
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.24 dBm VSW 1 MHz SWT 20 ms 5.179200000 GHz ndB [T1] -20.00 dB BW 23.00000000 MHz Temp 1 [T1] -20.12 dBm 5.168600000 GHz Temp 2 [T2] -20.11 dBm 5.191600000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:25:09
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.76 dBm VSW 1 MHz SWT 20 ms 5.201300000 GHz ndB [T1] -20.00 dB BW 23.00000000 MHz Temp 1 [T1] -19.91 dBm 5.188400000 GHz Temp 2 [T2] -20.26 dBm 5.211600000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:25:34
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.59 dBm VSW 1 MHz SWT 20 ms 5.241300000 GHz ndB [T1] -20.00 dB BW 23.60000000 MHz Temp 1 [T1] -20.42 dBm 5.228400000 GHz Temp 2 [T2] -20.71 dBm 5.252000000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:25:58

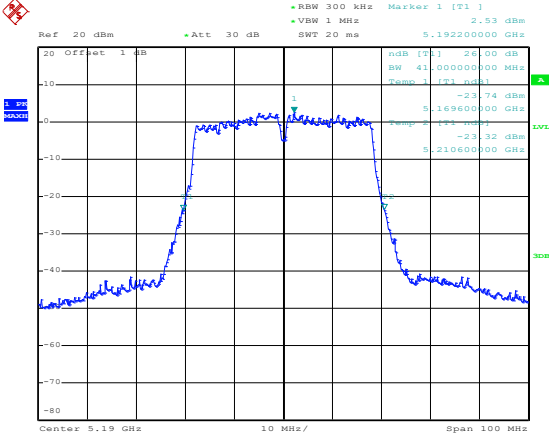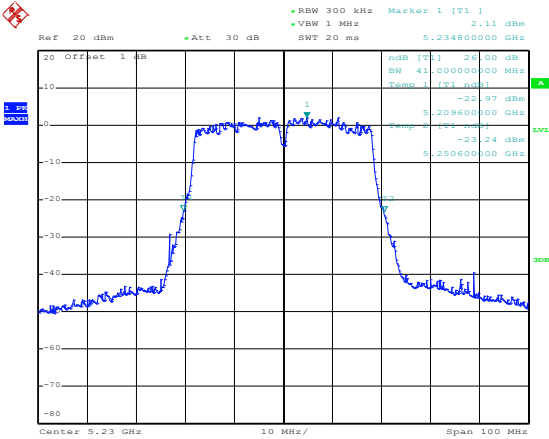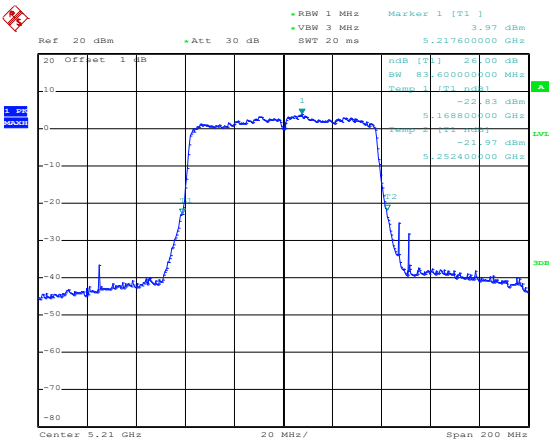802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] VSW 1 MHz SWT 20 ms 5.192200000 GHz 20 Offset 1 dB 1 -23.74 dBm 5.192200000 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 09:26:35
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] VSW 1 MHz SWT 20 ms 5.234800000 GHz 20 Offset 1 dB 1 -22.97 dBm 5.234800000 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 09:26:57
802.11ac-HT80	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] VSW 3 MHz SWT 20 ms 5.217600000 GHz 20 Offset 1 dB 1 -22.83 dBm 5.217600000 GHz 20 MHz/ Span 200 MHz Date: 18.JUL.2023 09:23:00

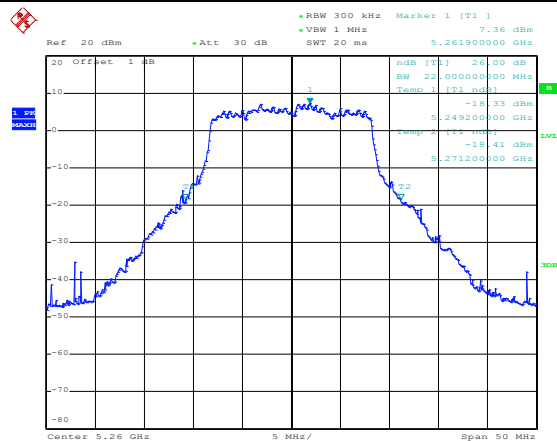

5250-5350MHz






Date: 18.JUL.2023 10:27:43

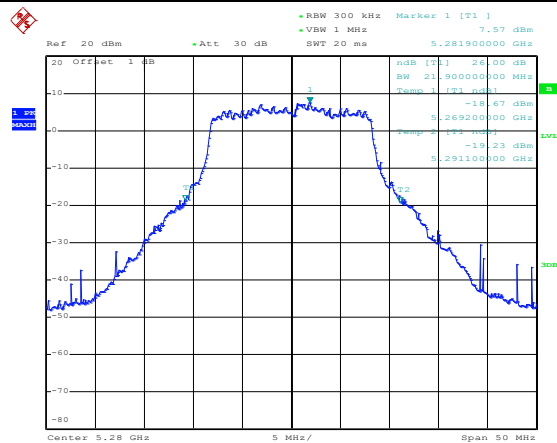

Date: 18.JUL.2023 10:28:20


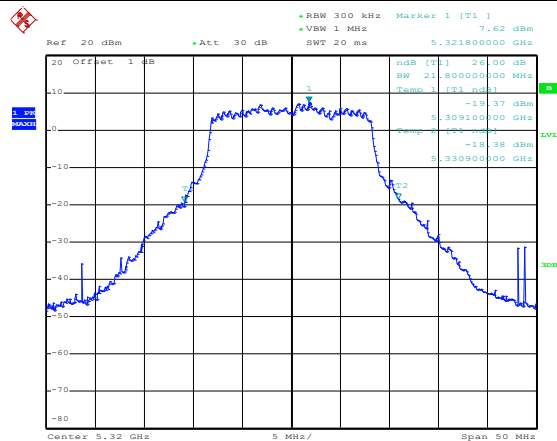






Date: 18.JUL.2023 10:28:46

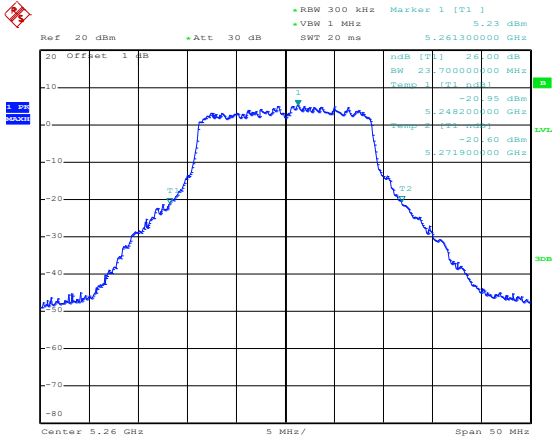
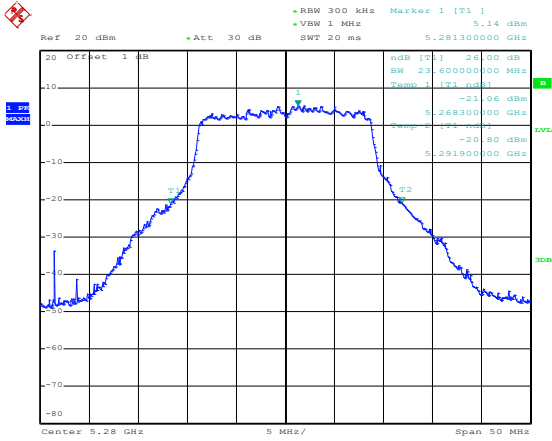
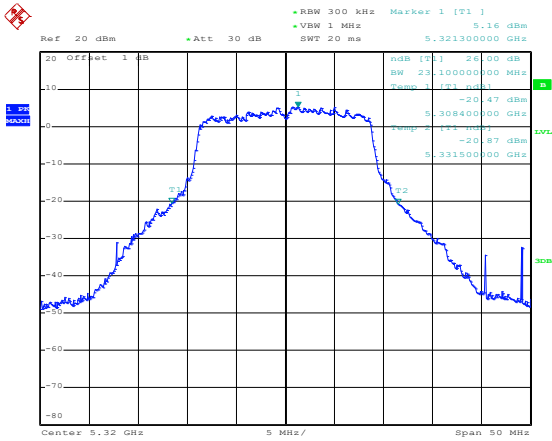
802.11n-HT20-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 5.23 dBm •VBW 1 MHz SWT 20 ms 5.261300000 GHz 20 Offset 1 dB n dB [T1] 20.00 dB BW 23.700000000 MHz Temp 1 [T1] n dB -20.95 dBm 5.248200000 GHz -20.60 dBm 5.271900000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 10:29:16
802.11n-HT20-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 5.14 dBm •VBW 1 MHz SWT 20 ms 5.281300000 GHz 20 Offset 1 dB n dB [T1] 20.00 dB BW 23.600000000 MHz Temp 1 [T1] n dB -21.06 dBm 5.268300000 GHz -20.80 dBm 5.291900000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 10:29:35
802.11n-HT20-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 5.16 dBm •VBW 1 MHz SWT 20 ms 5.321300000 GHz 20 Offset 1 dB n dB [T1] 20.00 dB BW 23.100000000 MHz Temp 1 [T1] n dB -20.47 dBm 5.308400000 GHz -20.87 dBm 5.331500000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 10:29:56

802.11n-HT40-Low	Ref: 20 dBm, Att: 30 dB, RBW: 300 KHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [71.1] 1.85 dBm Center: 5.27 GHz, Span: 100 MHz Date: 18.JUL.2023 10:30:28
802.11n-HT40-High	Ref: 20 dBm, Att: 30 dB, RBW: 300 KHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [71.1] 2.20 dBm Center: 5.31 GHz, Span: 100 MHz Date: 18.JUL.2023 10:30:51
802.11ac-HT80	Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [71.1] 3.25 dBm Center: 5.29 GHz, Span: 200 MHz Date: 18.JUL.2023 10:27:00

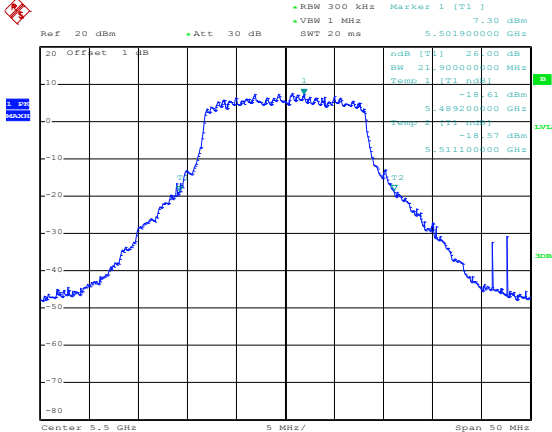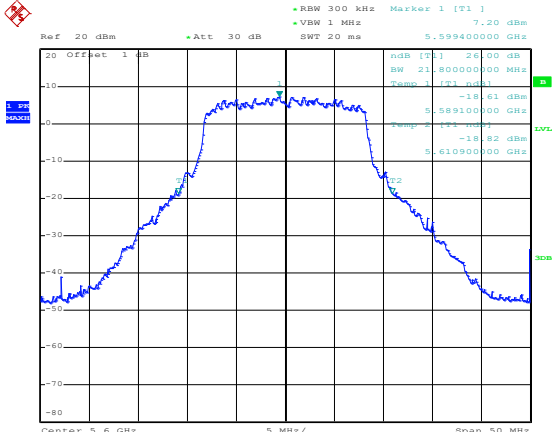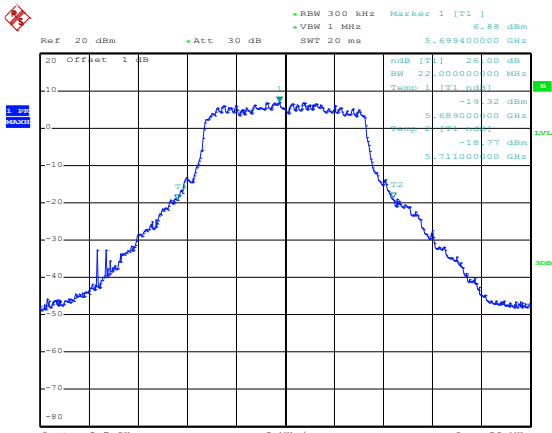
5470-5725MHz

802.11a-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.501900000 GHz, 7.30 dBm ndB [T1]: 26.00 dB, BW: 21.80000000 MHz, Temp: 1 [T1]: 0.00 dBm 18.61 dBm, 5.501900000 GHz, 18.57 dBm, 5.511000000 GHz Center: 5.5 GHz, Span: 50 MHz Date: 18.JUL.2023 14:59:22
802.11a-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.599400000 GHz, 7.20 dBm ndB [T1]: 26.00 dB, BW: 21.80000000 MHz, Temp: 1 [T1]: 0.00 dBm 18.61 dBm, 5.599400000 GHz, 18.82 dBm, 5.610900000 GHz Center: 5.6 GHz, Span: 50 MHz Date: 18.JUL.2023 14:59:47
802.11a-High	 Ref: 20 dBm, Att: 30 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.699400000 GHz, 6.88 dBm ndB [T1]: 26.00 dB, BW: 22.00000000 MHz, Temp: 1 [T1]: 0.00 dBm 18.32 dBm, 5.689000000 GHz, 18.77 dBm, 5.711000000 GHz Center: 5.7 GHz, Span: 50 MHz Date: 18.JUL.2023 15:00:13

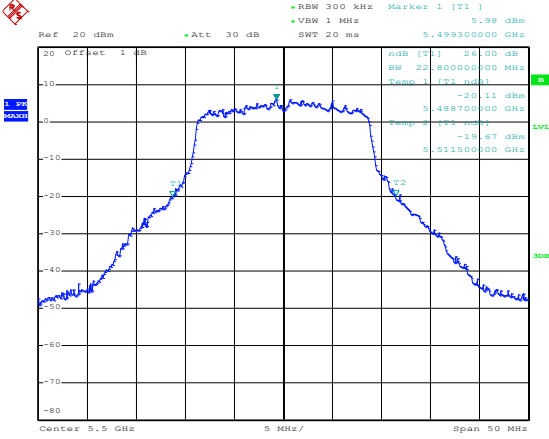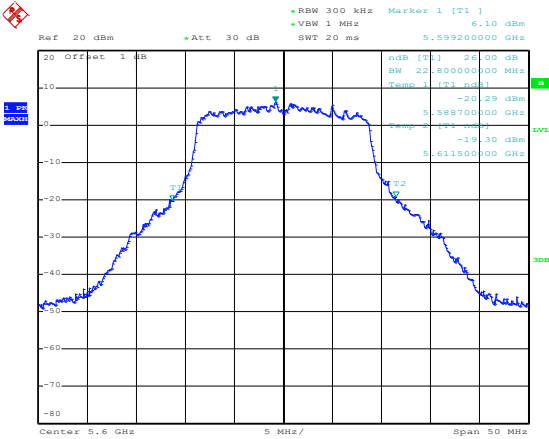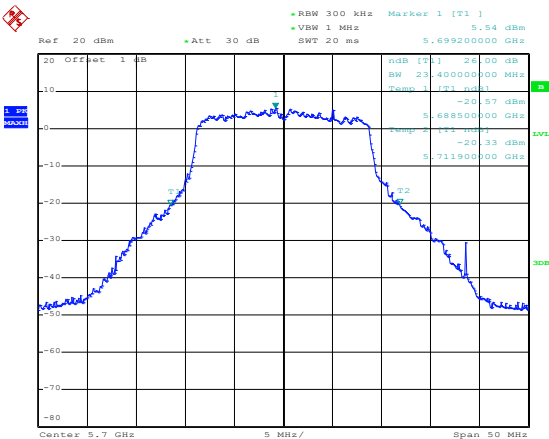
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.98 dBm VSW 1 MHz SWT 20 ms 5.499300000 GHz 20 Offset 1 dB ndB [T1] 20.00 dB BW 22.800000000 MHz Temp 1 [T1] ndB -20.11 dBm 5.488700000 GHz -19.67 dBm 5.511500000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 15:00:45
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.10 dBm VSW 1 MHz SWT 20 ms 5.599200000 GHz 20 Offset 1 dB ndB [T1] 20.00 dB BW 22.800000000 MHz Temp 1 [T1] ndB -20.29 dBm 5.588700000 GHz -19.30 dBm 5.611500000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 15:01:05
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.54 dBm VSW 1 MHz SWT 20 ms 5.699200000 GHz 20 Offset 1 dB ndB [T1] 20.00 dB BW 23.400000000 MHz Temp 1 [T1] ndB -20.57 dBm 5.688500000 GHz -20.33 dBm 5.711500000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 15:01:21

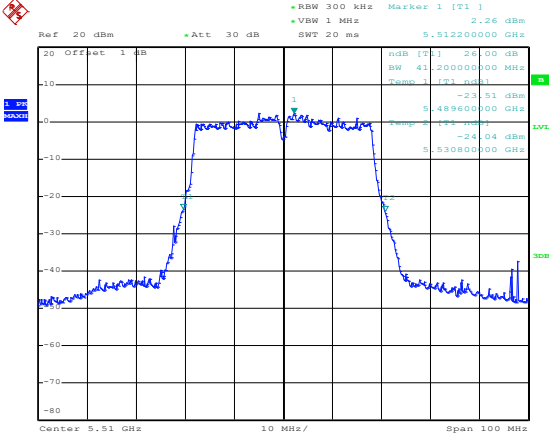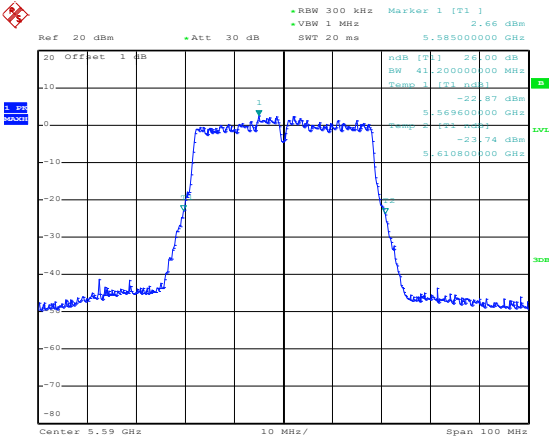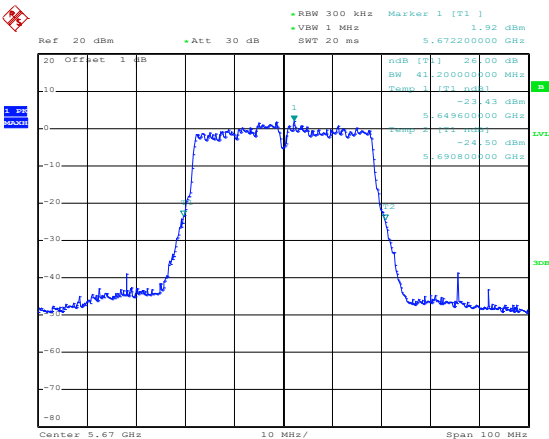802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.26 dBm VSW 1 MHz SWT 20 ms 5.512200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 41.200000000 MHz Temp 1 [T1] n dB -23.51 dBm 5.489600000 GHz -24.04 dBm 5.530800000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 15:02:15
802.11n-HT40- Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.66 dBm VSW 1 MHz SWT 20 ms 5.585000000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 41.200000000 MHz Temp 1 [T1] n dB -22.87 dBm 5.569600000 GHz -23.74 dBm 5.610800000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 15:02:35
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 1.92 dBm VSW 1 MHz SWT 20 ms 5.672200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB BW 41.200000000 MHz Temp 1 [T1] n dB -23.43 dBm 5.649600000 GHz -24.50 dBm 5.690800000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 15:03:00



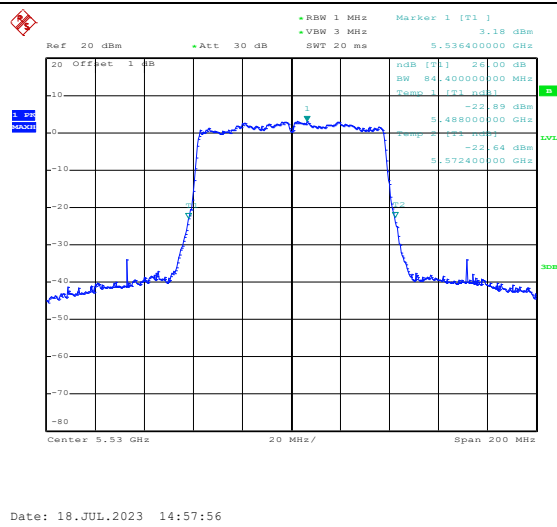
802.11ac-HT80-Low








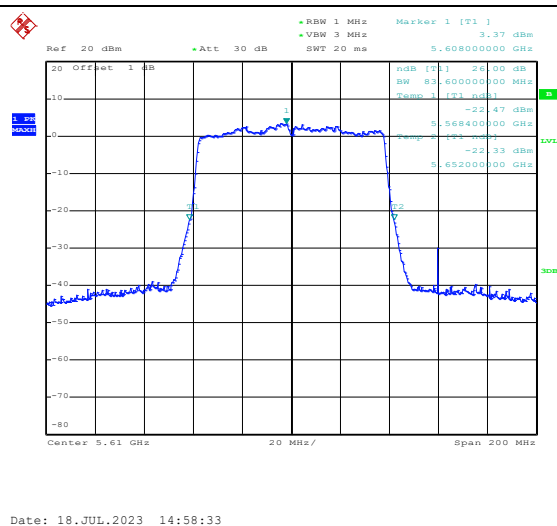
802.11ac-HT80-High






6 dB BandwidthMHz
5725-5850MHz

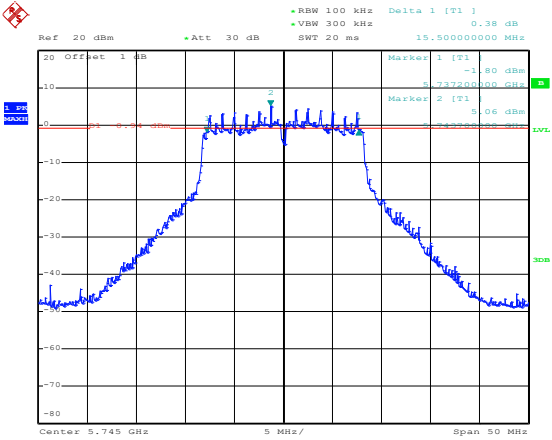
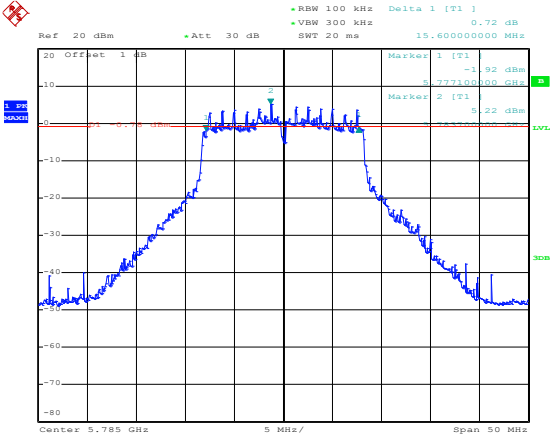
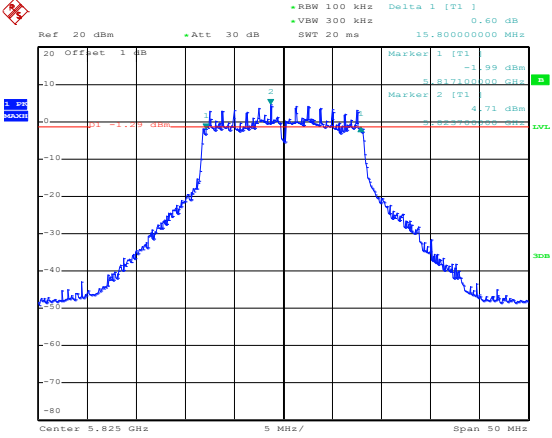
802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.38 dB •VBW 300 kHz SWT 20 ms 15.500000000 MHz Marker 1 [T1] -1.30 dBm Marker 2 [T1] -5.06 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 12:00:35
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.72 dB •VBW 300 kHz SWT 20 ms 15.600000000 MHz Marker 1 [T1] -1.92 dBm Marker 2 [T1] -5.22 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 12:01:29
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 100 kHz Delta 1 [T1] 0.60 dB •VBW 300 kHz SWT 20 ms 15.800000000 MHz Marker 1 [T1] -1.99 dBm Marker 2 [T1] -4.71 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 12:02:33

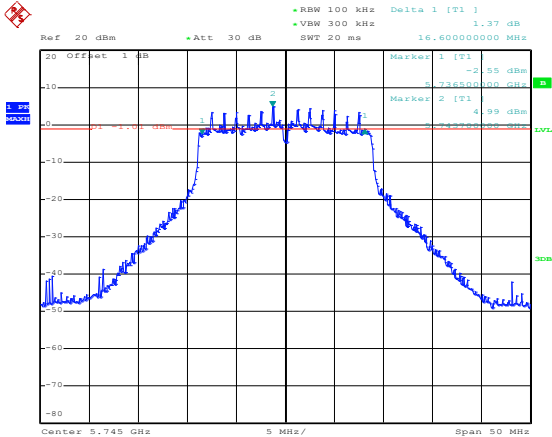
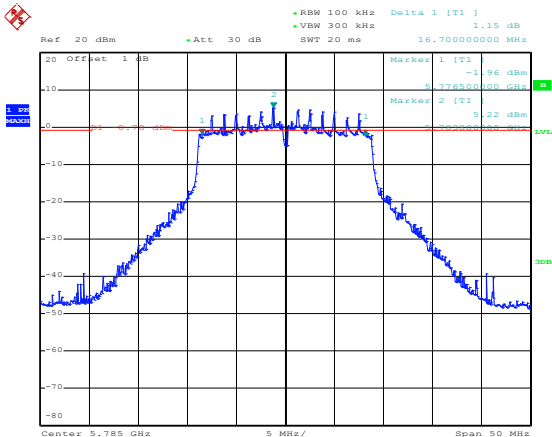
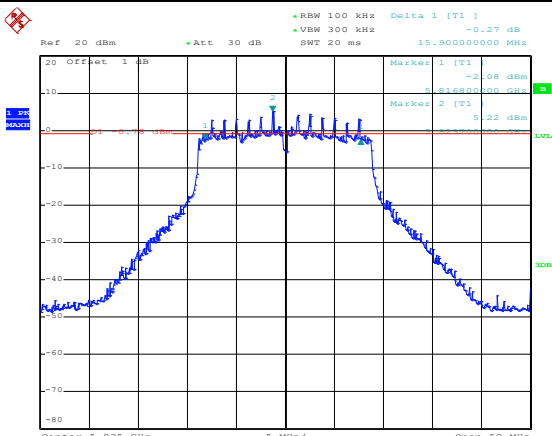
802.11n-HT20-Low	 Date: 18.JUL.2023 12:03:43
802.11n-HT20-Middle	 Date: 18.JUL.2023 12:05:42
802.11n-HT20-High	 Date: 18.JUL.2023 12:06:53

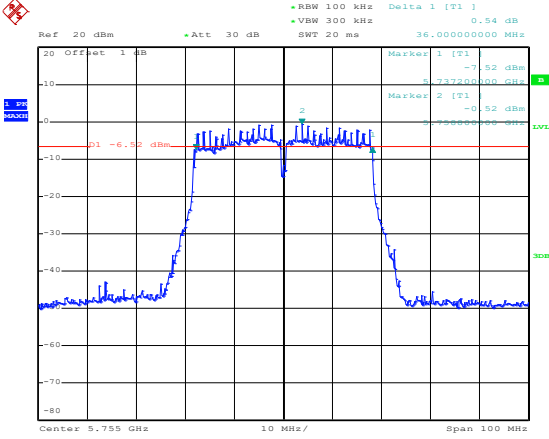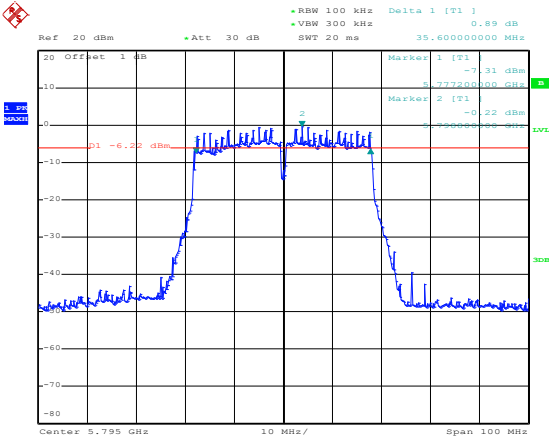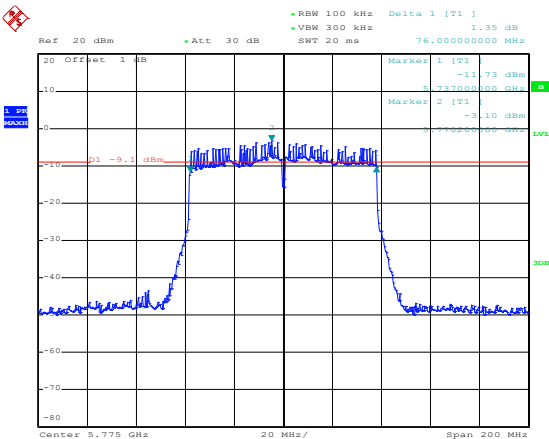802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.54 dB VSW 300 kHz SWT 20 ms 36.00000000 MHz Marker 1 [T1] -7.52 dBm 5.737200000 GHz Marker 2 [T1] -0.52 dBm 5.755000000 GHz D1 -6.52 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 12:07:58
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 0.89 dB VSW 300 kHz SWT 20 ms 35.60000000 MHz Marker 1 [T1] -7.31 dBm 5.777200000 GHz Marker 2 [T1] -0.22 dBm 5.795000000 GHz D1 -6.22 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 12:09:03
802.11ac-HT80	 Ref 20 dBm +Att 30 dB RBW 100 kHz Delta 1 [T1] 1.35 dB VSW 300 kHz SWT 20 ms 76.00000000 MHz Marker 1 [T1] -11.73 dBm 5.737200000 GHz Marker 2 [T1] -3.10 dBm 5.775000000 GHz D1 -9.1 dBm Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 18.JUL.2023 11:59:26

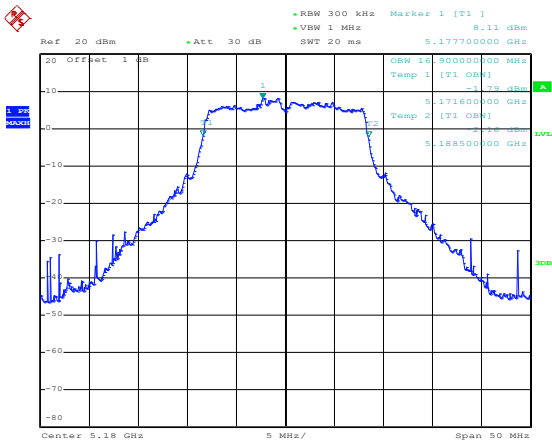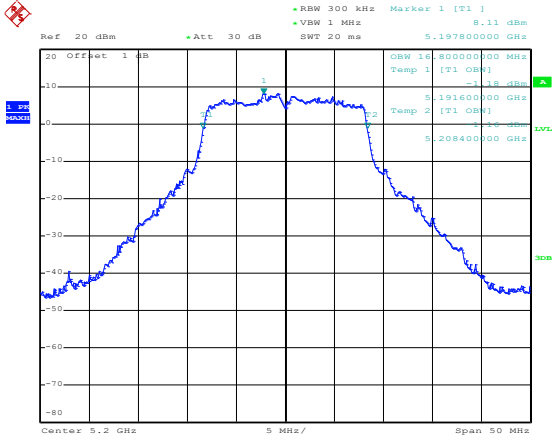
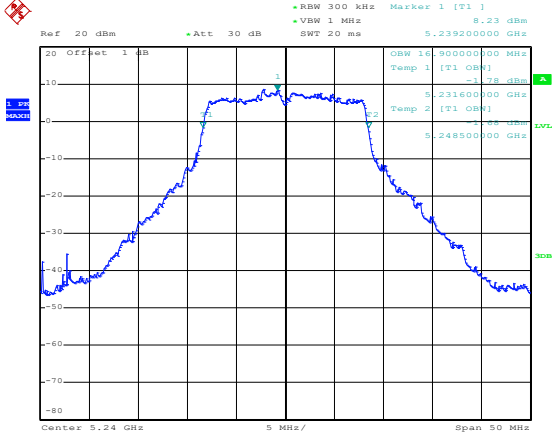
99% BandwidthMHz
ANT 1
5150-5250MHz

802.11a-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz Marker 1 [T1] 5.11 dBm 5.177700000 GHz SWT 20 ms OSW 16.800000000 MHz Temp 1 [T1] 8.11 dBm -1.73 dBm 5.171600000 GHz Temp 2 [T1] 8.11 dBm 5.188500000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:39:01
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz Marker 1 [T1] 8.11 dBm 5.197800000 GHz SWT 20 ms OSW 16.800000000 MHz Temp 1 [T1] 8.11 dBm -1.18 dBm 5.191600000 GHz Temp 2 [T1] 8.11 dBm 5.208400000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:39:30
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VBW 1 MHz Marker 1 [T1] 8.23 dBm 5.239200000 GHz SWT 20 ms OSW 16.800000000 MHz Temp 1 [T1] 8.23 dBm -1.73 dBm 5.231800000 GHz Temp 2 [T1] 8.23 dBm 5.248500000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:39:50

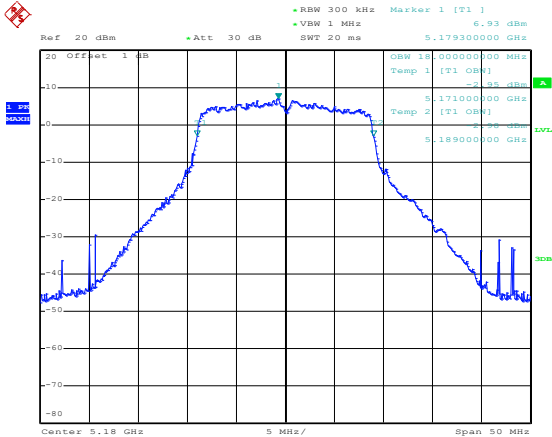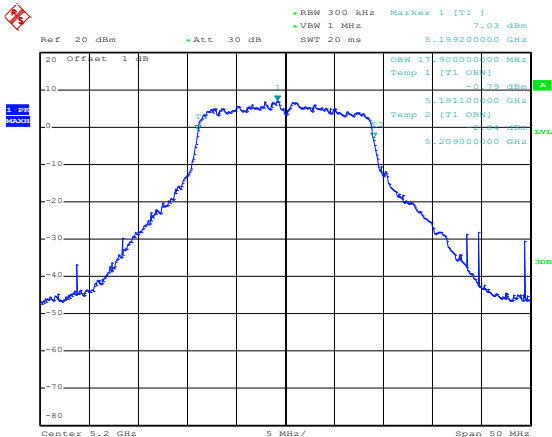
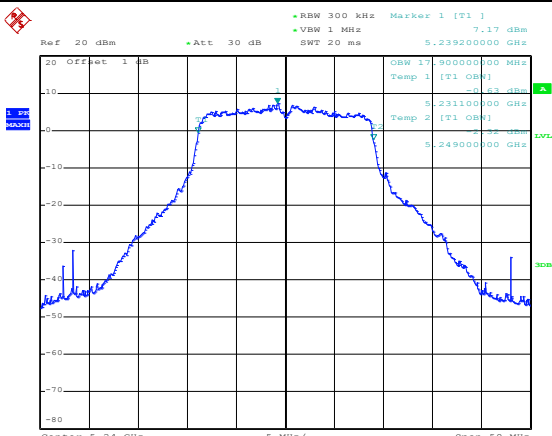
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.93 dBm VBW 1 MHz SWT 20 ms 5.179300000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.00 dBm 5.171000000 GHz Temp 2 [T1] 0.00 dBm 5.189000000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:40:40
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 7.03 dBm VBW 1 MHz SWT 20 ms 5.199200000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.00 dBm 5.191100000 GHz Temp 2 [T1] 0.00 dBm 5.209000000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:41:14
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 7.17 dBm VBW 1 MHz SWT 20 ms 5.239200000 GHz OSW 10.00000000 MHz Temp 1 [T1] 0.00 dBm 5.231100000 GHz Temp 2 [T1] 0.00 dBm 5.249000000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 16:41:38

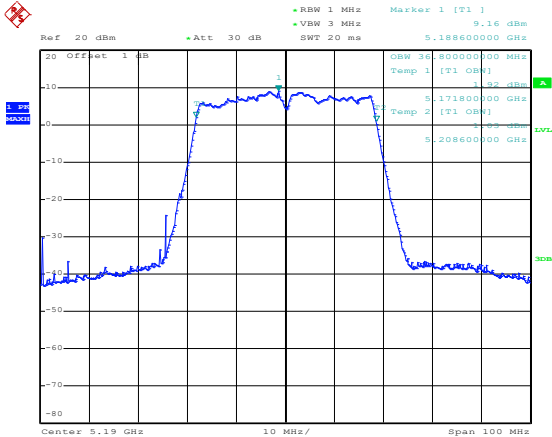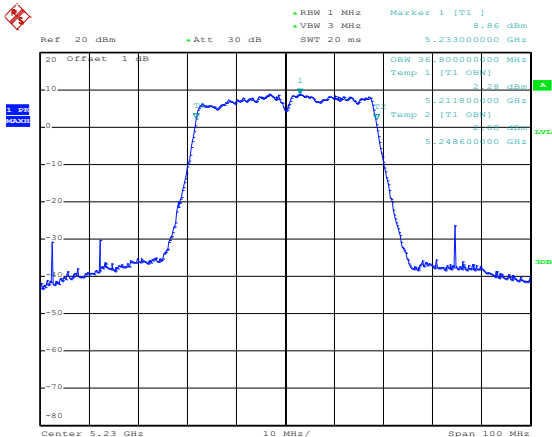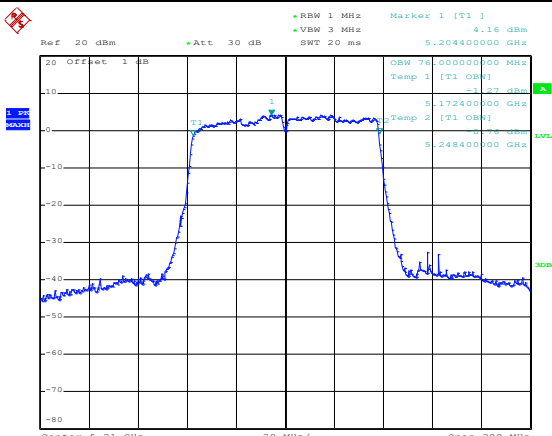802.11n-HT40-Low	 Date: 17.JUL.2023 16:42:23
802.11n-HT40-High	 Date: 17.JUL.2023 16:42:54
802.11ac-HT80	 Date: 17.JUL.2023 16:35:52

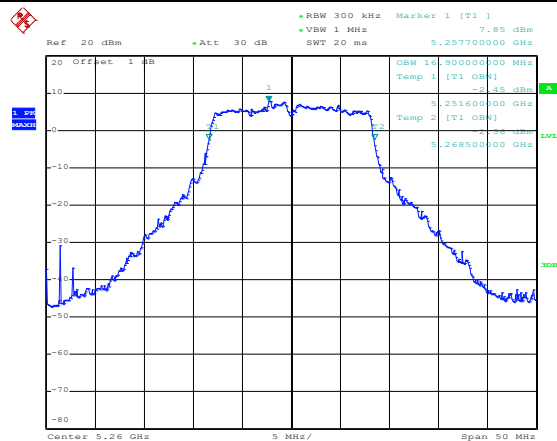

5250-5350MHz






Date: 17.JUL.2023 17:30:36


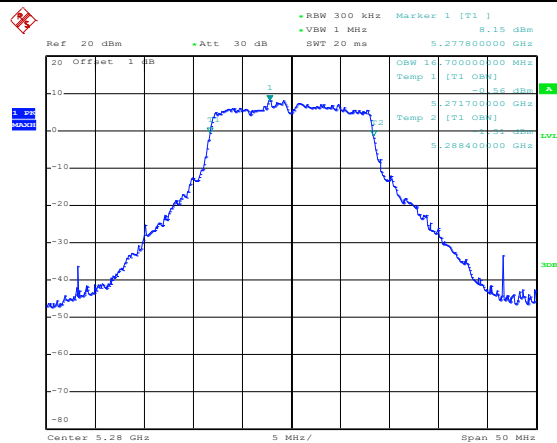



Date: 17.JUL.2023 17:30:54


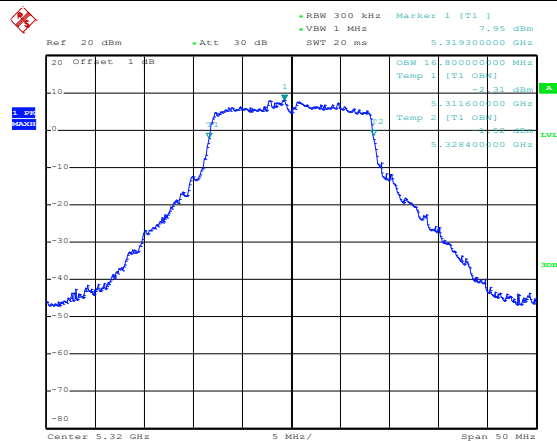






Date: 17.JUL.2023 17:31:15

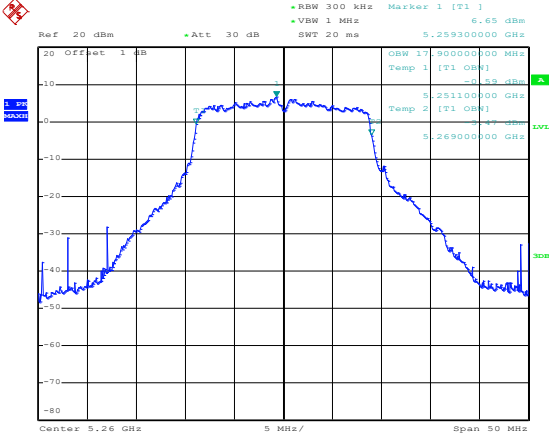
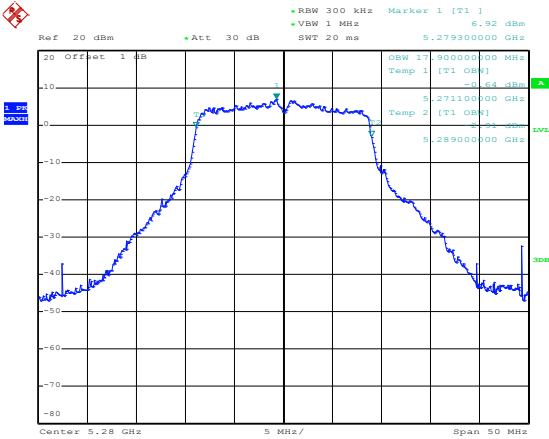
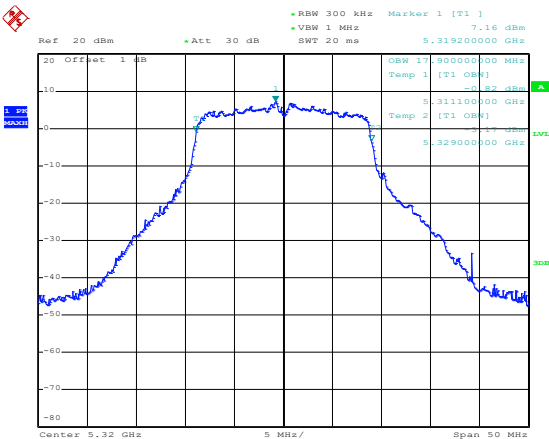
802.11n-HT20-Low	 Date: 17.JUL.2023 17:31:45
802.11n-HT20-Middle	 Date: 17.JUL.2023 17:32:07
802.11n-HT20-High	 Date: 17.JUL.2023 17:32:29

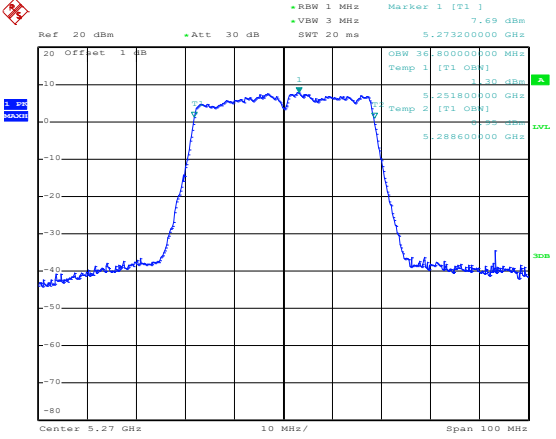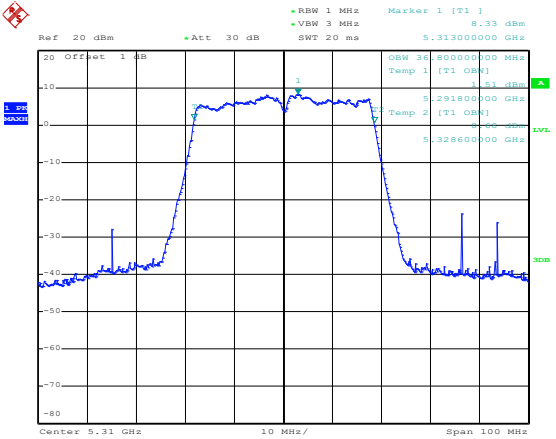
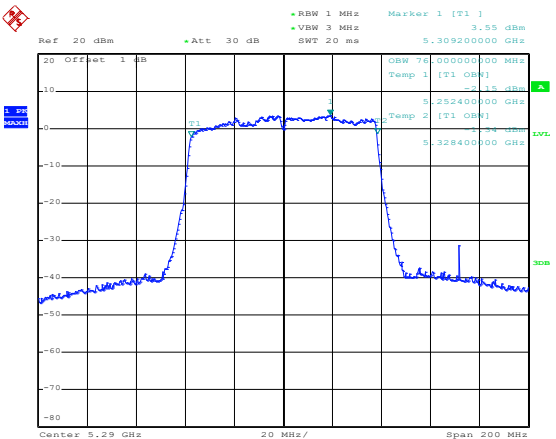
802.11n-HT40-Low	 Date: 17.JUL.2023 17:33:11
802.11n-HT40-High	 Date: 17.JUL.2023 17:33:34
802.11ac-HT80	 Date: 17.JUL.2023 17:29:46

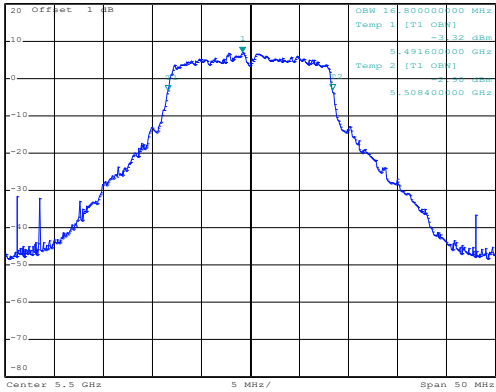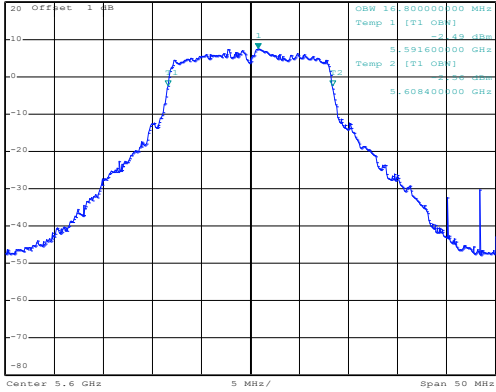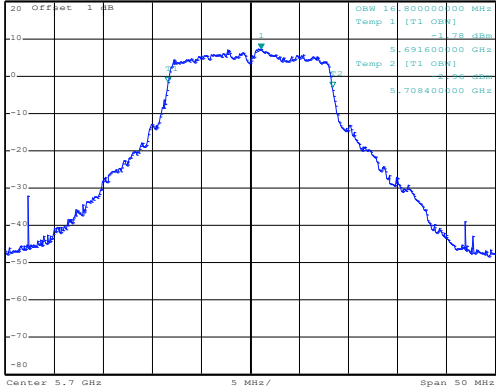5470-5725MHz


802.11a-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.90 dBm VBW 1 MHz SWT 20 ms 5.499200000 GHz OSW 16.800000000 MHz Temp 1 [T1] 0.00 dBm 5.491600000 GHz Temp 2 [T1] 0.00 dBm 5.508400000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:54:47
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 7.45 dBm VBW 1 MHz SWT 20 ms 5.608600000 GHz OSW 16.800000000 MHz Temp 1 [T1] 0.00 dBm 5.591600000 GHz Temp 2 [T1] 0.00 dBm 5.608400000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:55:10
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 7.27 dBm VBW 1 MHz SWT 20 ms 5.701300000 GHz OSW 16.800000000 MHz Temp 1 [T1] 0.00 dBm 5.691600000 GHz Temp 2 [T1] 0.00 dBm 5.708400000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 19:55:31

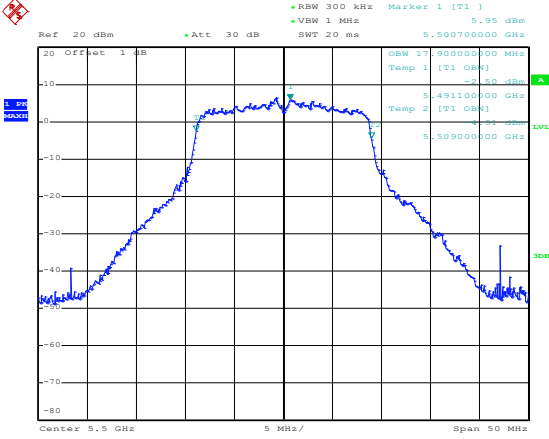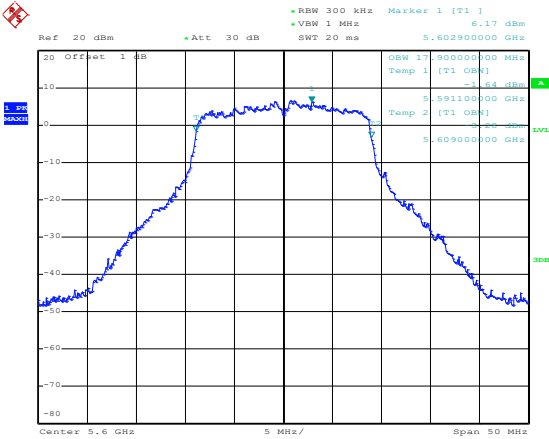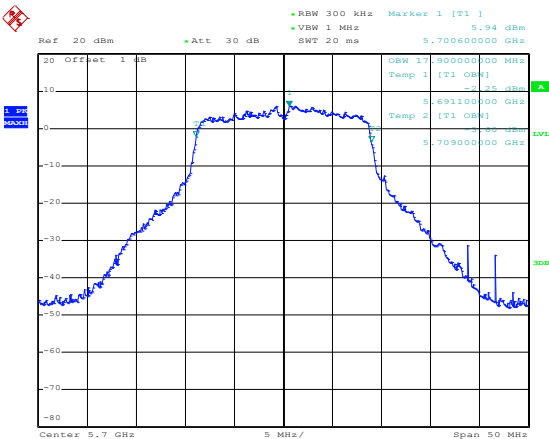802.11n-HT20-Low	 Date: 17.JUL.2023 19:56:41
802.11n-HT20-Middle	 Date: 17.JUL.2023 19:57:02
802.11n-HT20-High	 Date: 17.JUL.2023 19:57:21

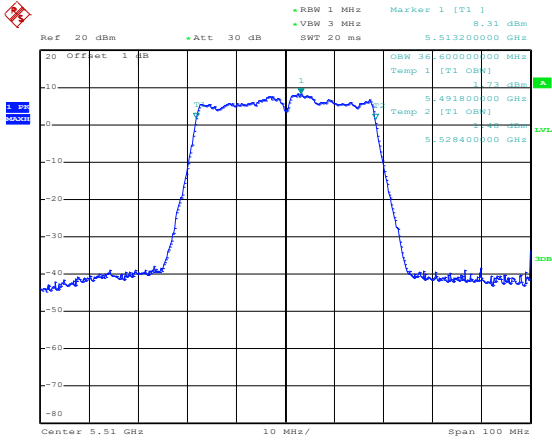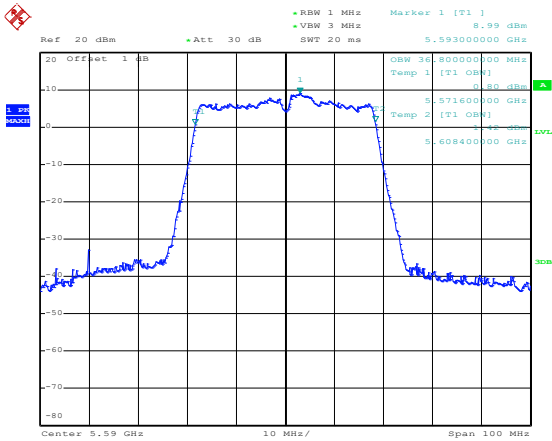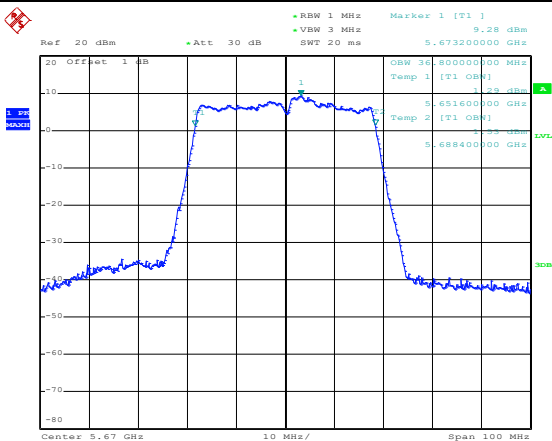802.11n-HT40-Low	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] 5.513200000 GHz OSW 30.00000000 MHz • Temp 1 [T1] 8.31 dBm • Temp 2 [T1] 1.73 dBm • Temp 3 [T1] 5.491800000 GHz • Temp 4 [T1] 1.48 dBm • Temp 5 [T1] 5.528400000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:58:28
802.11n-HT40- Middle	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] 5.593000000 GHz OSW 30.00000000 MHz • Temp 1 [T1] 8.99 dBm • Temp 2 [T1] 0.80 dBm • Temp 3 [T1] 5.571600000 GHz • Temp 4 [T1] 1.48 dBm • Temp 5 [T1] 5.608400000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:58:48
802.11n-HT40-High	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] 5.673200000 GHz OSW 30.00000000 MHz • Temp 1 [T1] 9.28 dBm • Temp 2 [T1] 1.29 dBm • Temp 3 [T1] 5.651600000 GHz • Temp 4 [T1] 1.48 dBm • Temp 5 [T1] 5.688400000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:59:08

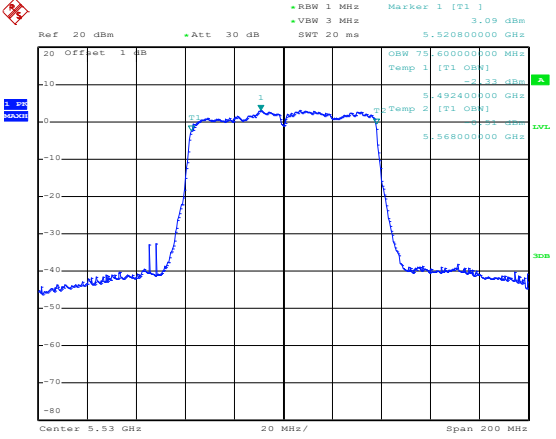
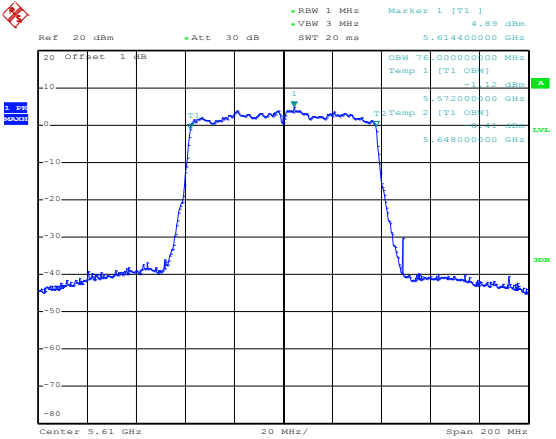
802.11ac-HT80-Low	 Date: 17.JUL.2023 19:53:29
802.11ac-HT80-High	 Date: 17.JUL.2023 19:54:03

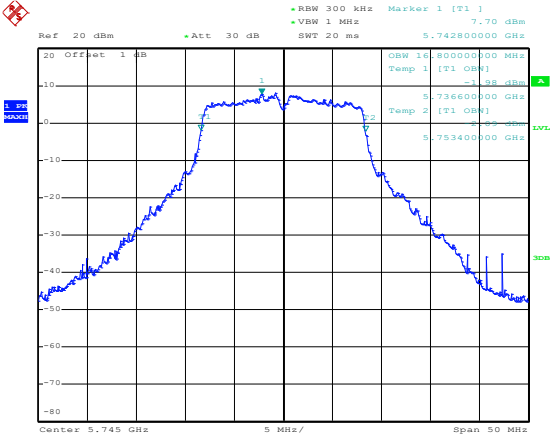5725-5850MHz


802.11a-Low	 Date: 17.JUL.2023 18:57:29
-------------	--




802.11a-Middle	Ref 20 dBm Att 30 dB SWT 20 ms RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.786200000 GHz 7.70 dBm 10.00000000 MHz Temp 1 [T1] 5.776600000 GHz Temp 2 [T1] 5.793400000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 18:58:08
802.11a-High	Ref 20 dBm Att 30 dB SWT 20 ms RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.822700000 GHz 8.00 dBm 10.00000000 MHz Temp 1 [T1] 5.816600000 GHz Temp 2 [T1] 5.833400000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 18:58:33
802.11n-HT20-Low	Ref 20 dBm Att 30 dB SWT 20 ms RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.746300000 GHz 6.09 dBm 10.00000000 MHz Temp 1 [T1] 5.736100000 GHz Temp 2 [T1] 5.754000000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 17.JUL.2023 18:59:11




802.11n-HT20-Middle	Date: 17.JUL.2023 18:59:31
802.11n-HT20-High	Date: 17.JUL.2023 18:59:53
802.11n-HT40-Low	Date: 17.JUL.2023 19:00:41

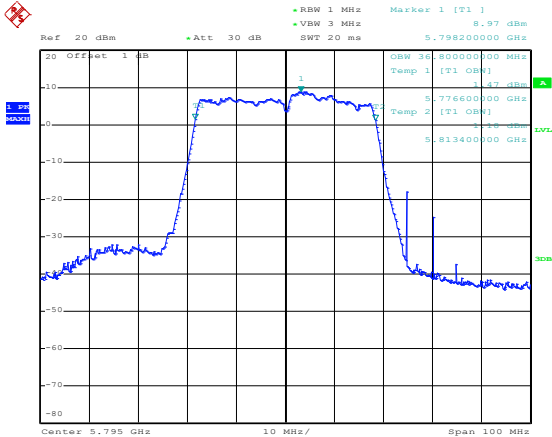
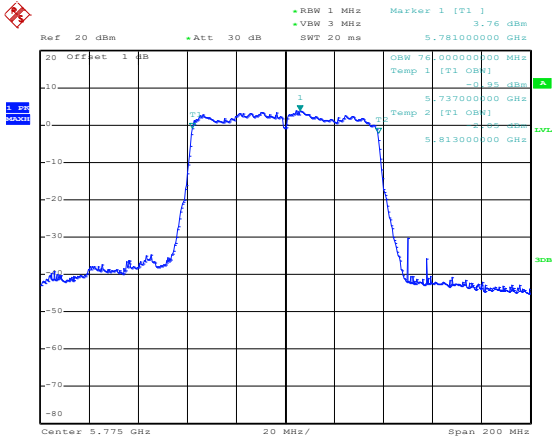
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz •VSW 3 MHz •SWT 20 ms Marker 1 [T1] 8.97 dBm 5.795200000 GHz 20 Offset 1 dB 1 5.795200000 MHz Temp 1 [T1] 8.97 dBm 5.776600000 GHz Temp 2 [T1] 8.97 dBm 5.813400000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 17.JUL.2023 19:01:04
802.11ac-HT80	 Ref 20 dBm •Att 30 dB •RBW 1 MHz •VSW 3 MHz •SWT 20 ms Marker 1 [T1] 3.76 dBm 5.781000000 GHz 20 Offset 1 dB 1 5.781000000 MHz Temp 1 [T1] 3.76 dBm 5.737000000 GHz Temp 2 [T1] 3.76 dBm 5.813000000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 17.JUL.2023 18:56:32

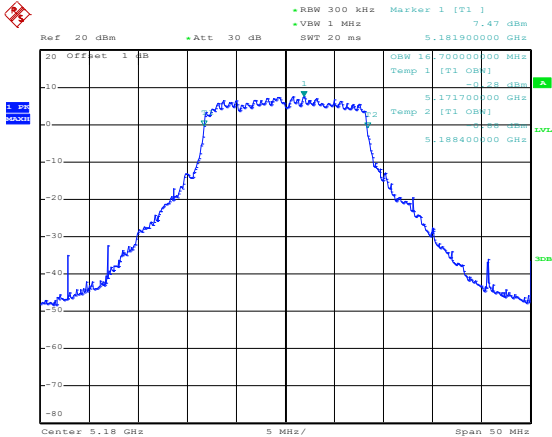ANT 2
5150-5250MHz


802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz •VSW 1 MHz •SWT 20 ms Marker 1 [T1] 7.47 dBm 5.181900000 GHz 20 Offset 1 dB 1 5.181900000 MHz Temp 1 [T1] 7.47 dBm 5.171700000 GHz Temp 2 [T1] 7.47 dBm 5.188400000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:16:58
--------------------	---

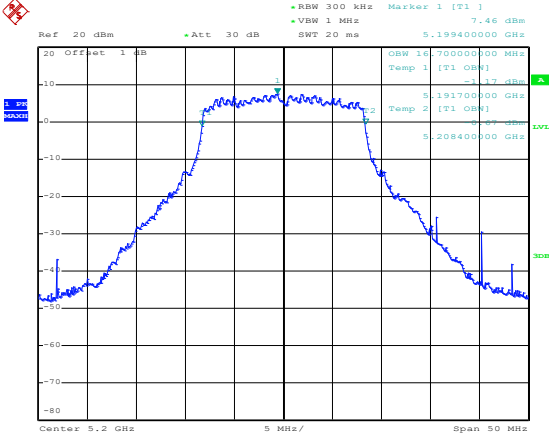
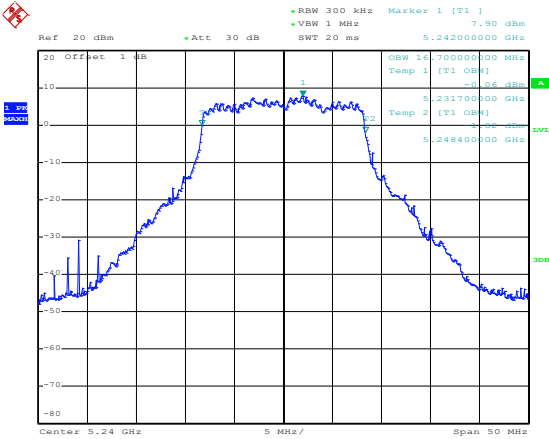
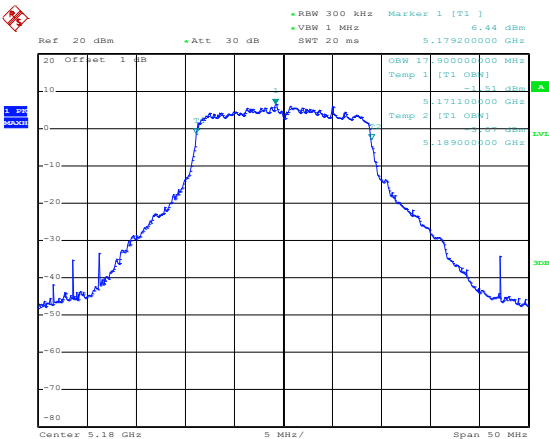
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 7.46 dBm OSW 10.70000000 MHz Temp 1 [T1] 0.00 dBm 5.199400000 GHz 5.191700000 GHz 5.208400000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:17:31
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 7.90 dBm OSW 10.70000000 MHz Temp 1 [T1] 0.00 dBm 5.242000000 GHz 5.231700000 GHz 5.248400000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:17:56
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 6.44 dBm OSW 17.90000000 MHz Temp 1 [T1] 0.00 dBm 5.179200000 GHz 5.171100000 GHz 5.189000000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 09:18:37

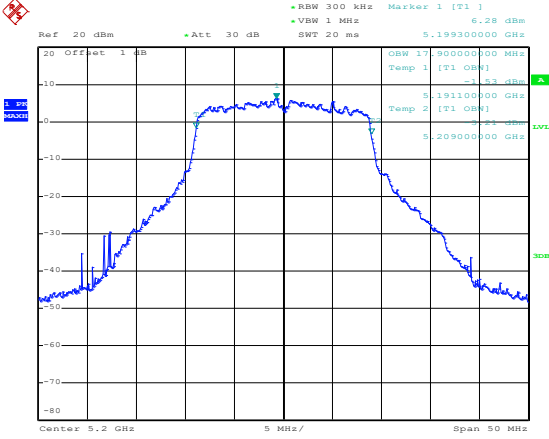
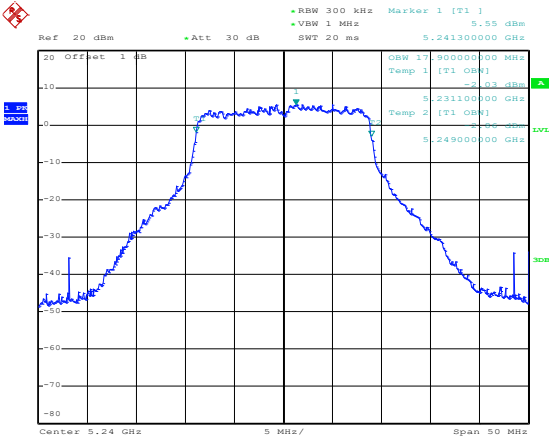
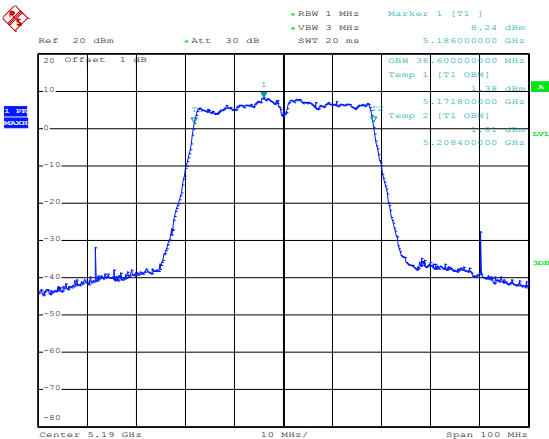
802.11n-HT20-Middle	 Date: 18.JUL.2023 09:19:08
802.11n-HT20-High	 Date: 18.JUL.2023 09:19:33
802.11n-HT40-Low	 Date: 18.JUL.2023 09:20:18

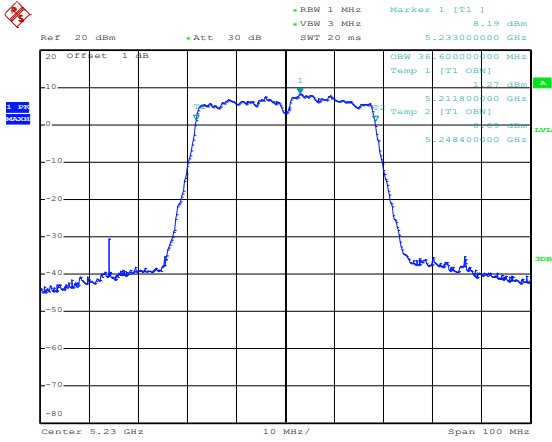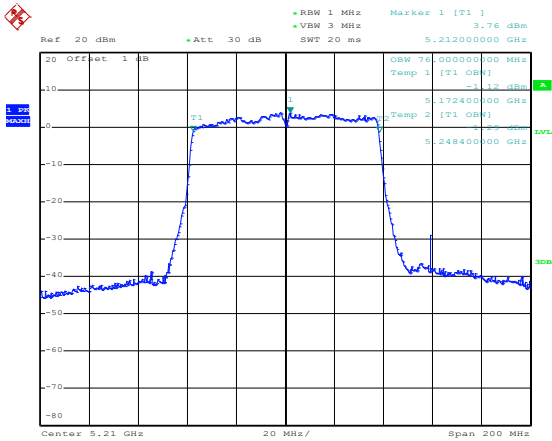802.11n-HT40-High	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.233000000 GHz Temp 1 [T1] 5.218000000 GHz Temp 2 [T1] 5.248400000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 09:20:42
802.11ac-HT80	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.212000000 GHz Temp 1 [T1] 5.172400000 GHz Temp 2 [T1] 5.248400000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 18.JUL.2023 09:16:13

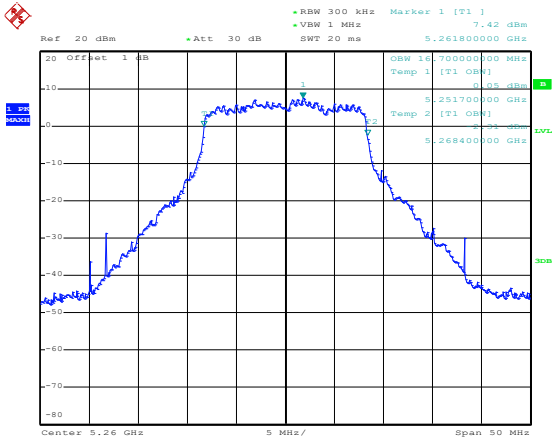5250-5350MHz

802.11a-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] 5.261800000 GHz Temp 1 [T1] 5.251700000 GHz Temp 2 [T1] 5.268400000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 10:20:52
-------------	---

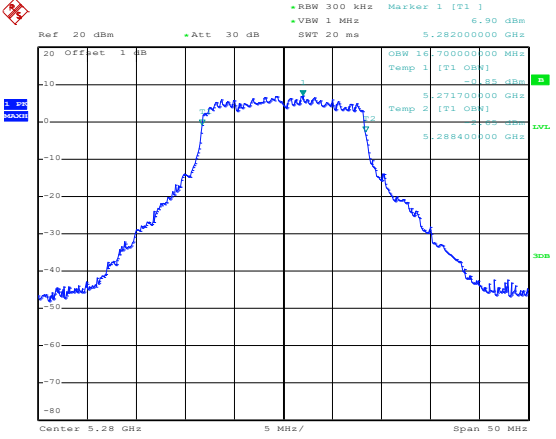
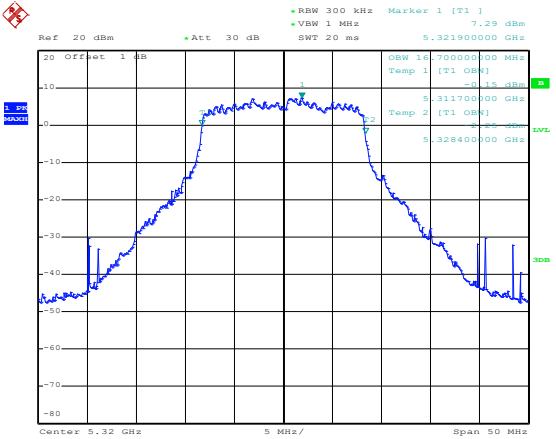
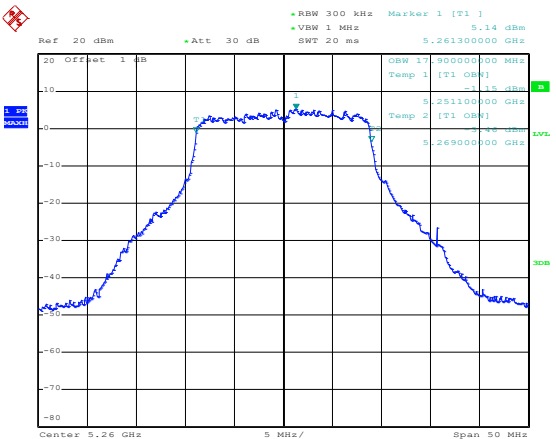
802.11a-Middle	 Date: 18.JUL.2023 10:21:16
802.11a-High	 Date: 18.JUL.2023 10:21:46
802.11n-HT20-Low	 Date: 18.JUL.2023 10:22:16

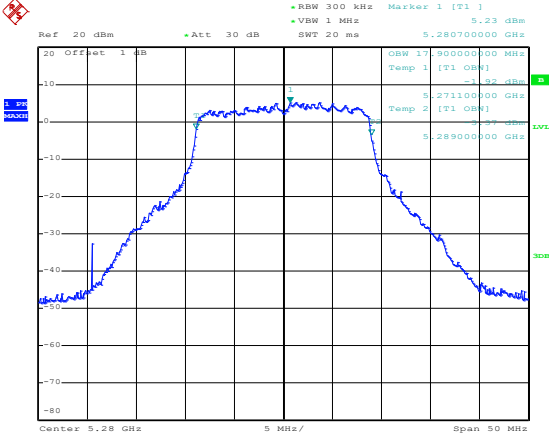
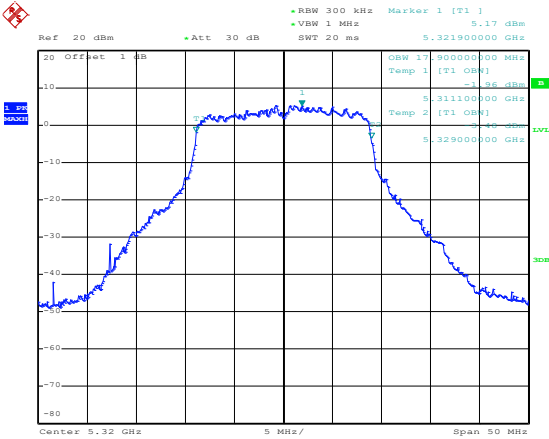
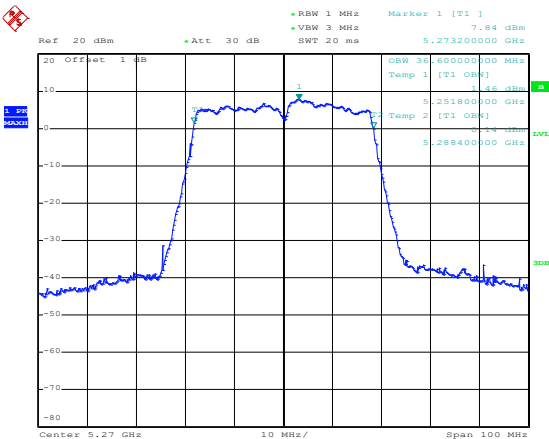
802.11n-HT20-Middle	 Date: 18.JUL.2023 10:22:39
802.11n-HT20-High	 Date: 18.JUL.2023 10:22:58
802.11n-HT40-Low	 Date: 18.JUL.2023 10:23:33




802.11n-HT40-High	
802.11ac-HT80	


5470-5725MHz

802.11a-Low	
-------------	-------------

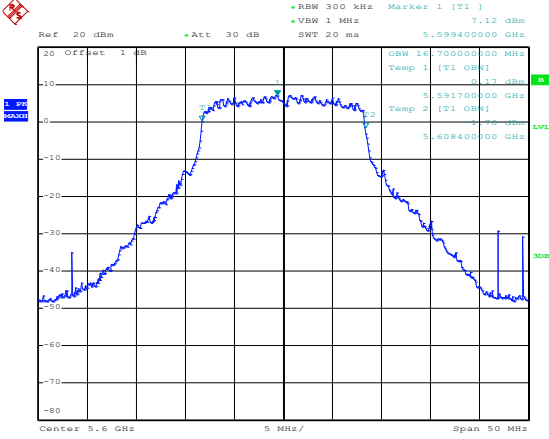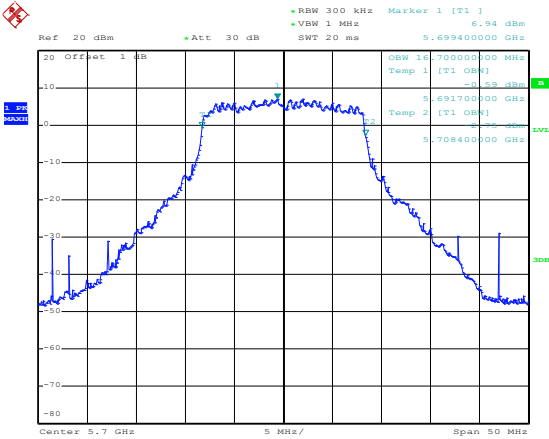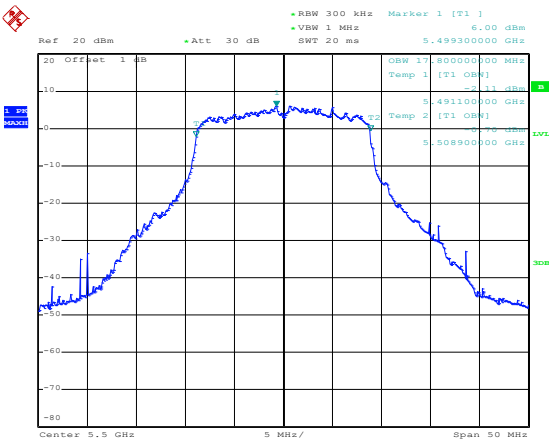
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 7.12 dBm •VBW 1 MHz 5.599400000 GHz SWT 20 ms OSW 10.700000000 MHz Temp 1 [T1] 0.17 dBm 5.591700000 GHz Temp 2 [T1] 0.18 dBm 5.608400000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 14:51:51
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 6.94 dBm •VBW 1 MHz 5.699400000 GHz SWT 20 ms OSW 10.700000000 MHz Temp 1 [T1] -0.69 dBm 5.691700000 GHz Temp 2 [T1] -0.69 dBm 5.708400000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 14:52:14
802.11n-HT20-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 6.00 dBm •VBW 1 MHz 5.499300000 GHz SWT 20 ms OSW 17.800000000 MHz Temp 1 [T1] -0.11 dBm 5.491100000 GHz Temp 2 [T1] -0.10 dBm 5.508900000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 14:52:49

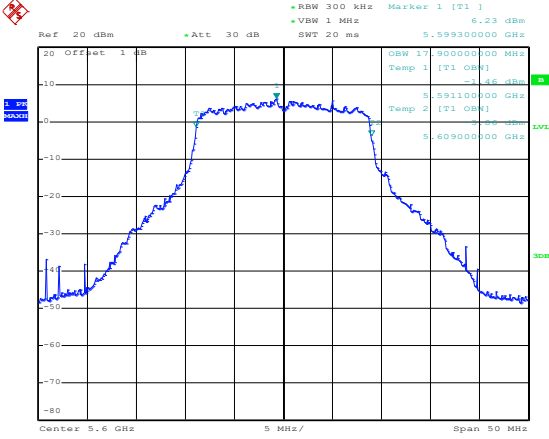
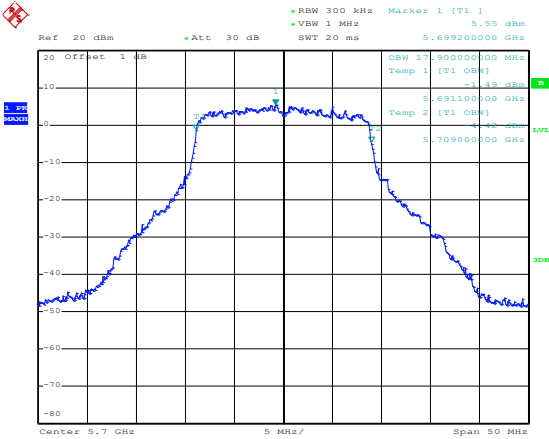
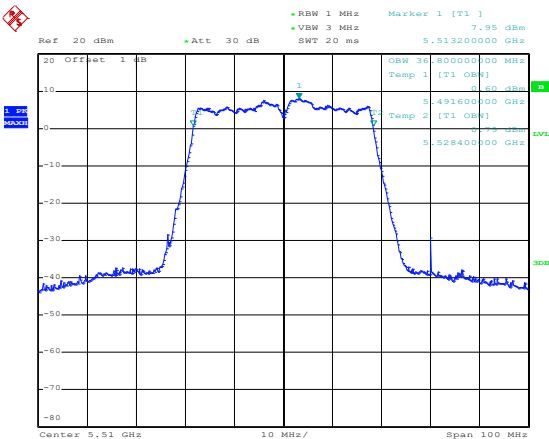
802.11n-HT20-Middle	 Date: 18.JUL.2023 14:53:13
802.11n-HT20-High	 Date: 18.JUL.2023 14:53:35
802.11n-HT40-Low	 Date: 18.JUL.2023 14:54:31

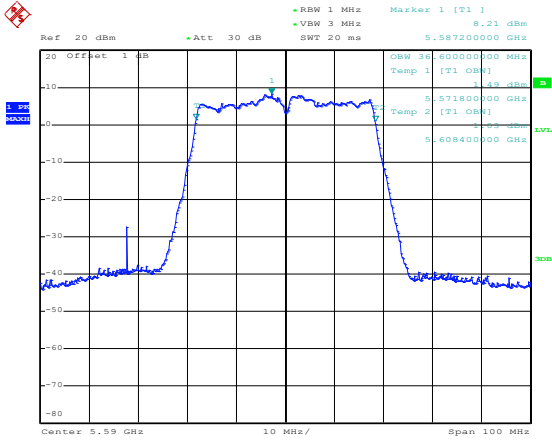
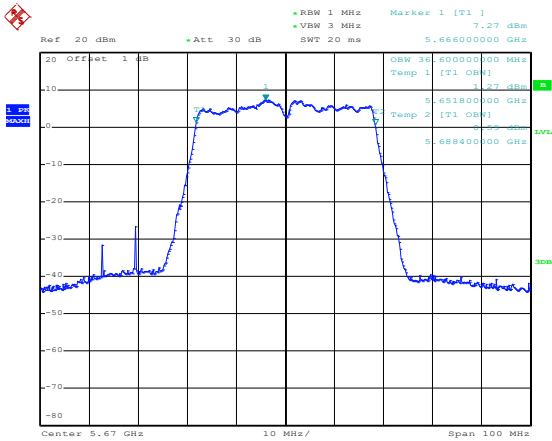
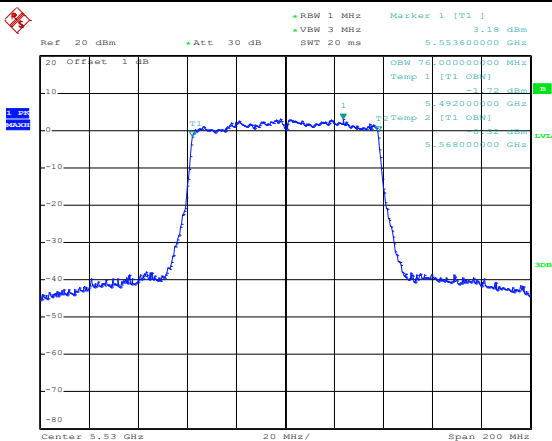
802.11n-HT40- Middle	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] 8.21 dBm •VSW 3 MHz SWT 20 ms 5.587200000 GHz 20 Offset 1 dB 1 5.587200000 MHz 8.21 dBm Temp 1 [T1] 5.571800000 GHz 1.42 dBm Temp 2 [T1] 5.608400000 GHz 1.42 dBm Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 14:54:53
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] 7.27 dBm •VSW 3 MHz SWT 20 ms 5.666000000 GHz 20 Offset 1 dB 1 5.666000000 MHz 7.27 dBm Temp 1 [T1] 5.651800000 GHz 1.67 dBm Temp 2 [T1] 5.688400000 GHz 1.67 dBm Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 18.JUL.2023 14:55:18
802.11ac-HT80-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] 3.18 dBm •VSW 3 MHz SWT 20 ms 5.553600000 GHz 20 Offset 1 dB 1 5.553600000 MHz 3.18 dBm Temp 1 [T1] 5.492000000 GHz 1.72 dBm Temp 2 [T1] 5.568000000 GHz 1.72 dBm Center 5.53 GHz 20 MHz/ Span 200 MHz Date: 18.JUL.2023 14:49:26

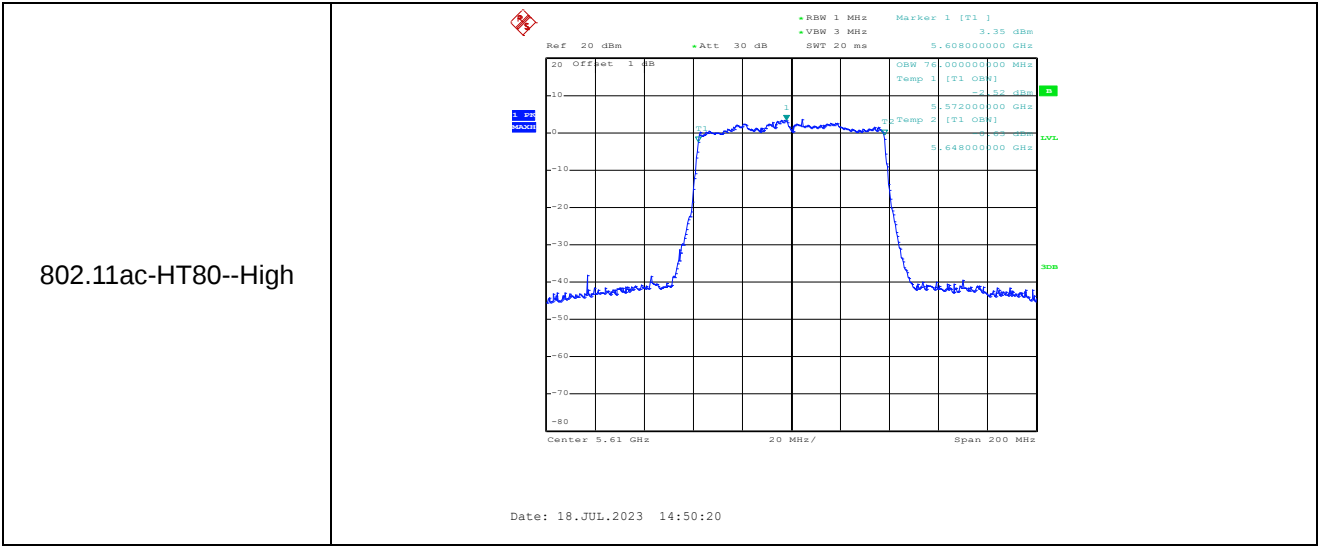


5725-5850MHz

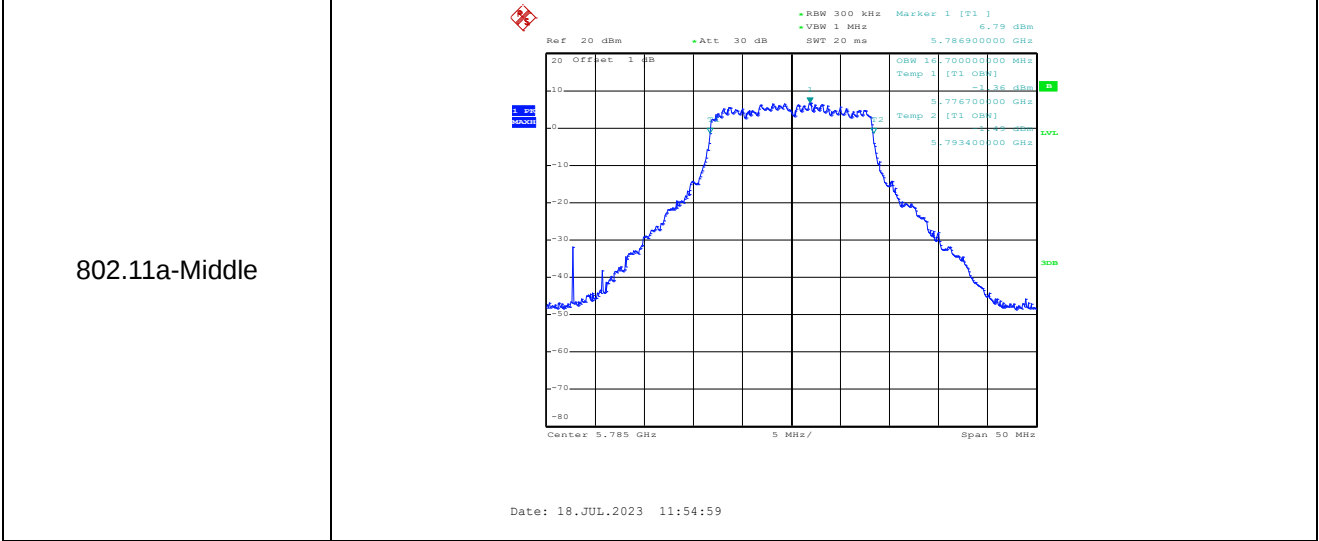

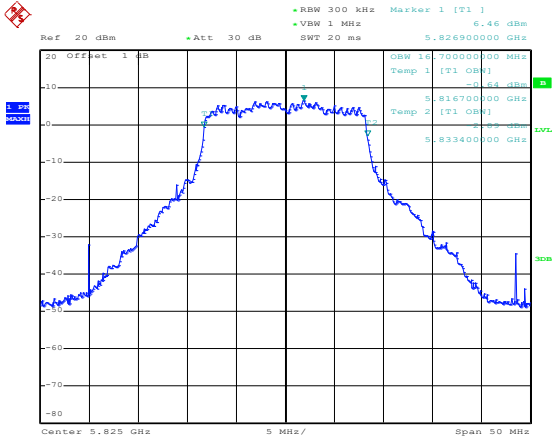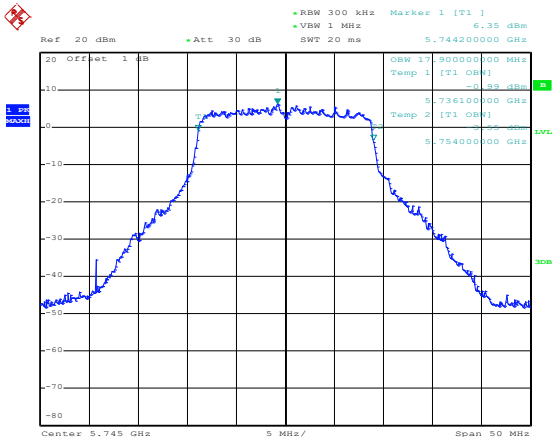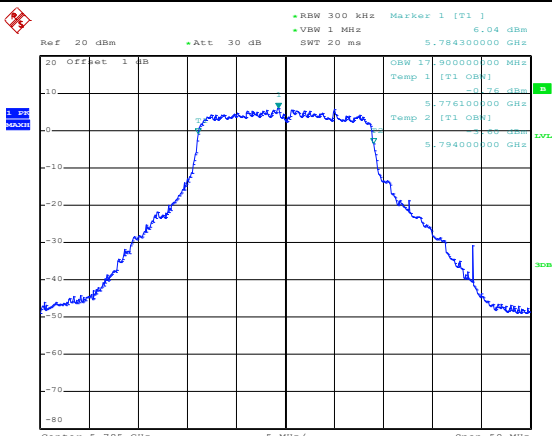802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.46 dBm VSW 1 MHz SWT 20 ms 5.826900000 GHz OSW 10.700000000 MHz Temp 1 [T1 OBW] -0.64 dBm 5.816700000 GHz Temp 2 [T1 OBW] -0.69 dBm 5.833400000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 11:55:21
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.35 dBm VSW 1 MHz SWT 20 ms 5.744200000 GHz OSW 17.900000000 MHz Temp 1 [T1 OBW] -0.49 dBm 5.736100000 GHz Temp 2 [T1 OBW] -0.50 dBm 5.754000000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 11:55:49
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 6.04 dBm VSW 1 MHz SWT 20 ms 5.784300000 GHz OSW 17.900000000 MHz Temp 1 [T1 OBW] -0.78 dBm 5.776100000 GHz Temp 2 [T1 OBW] -0.80 dBm 5.794000000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 18.JUL.2023 11:56:04

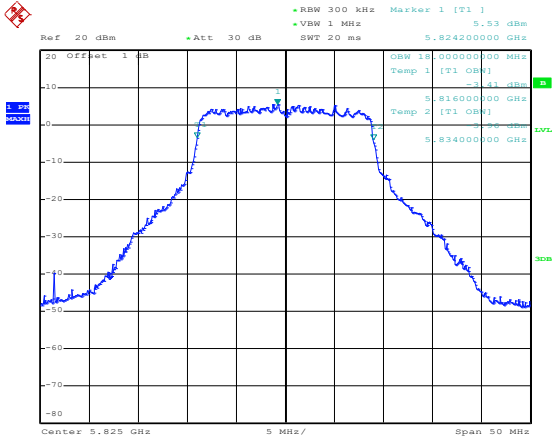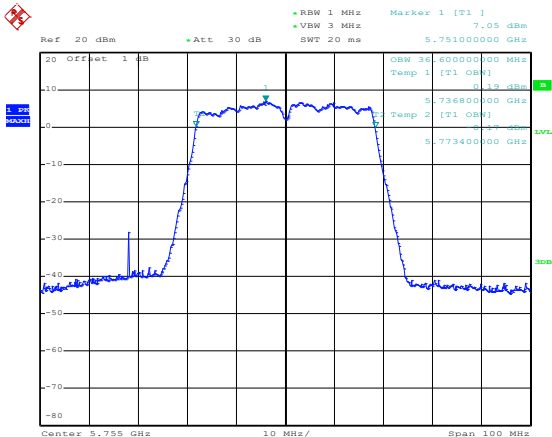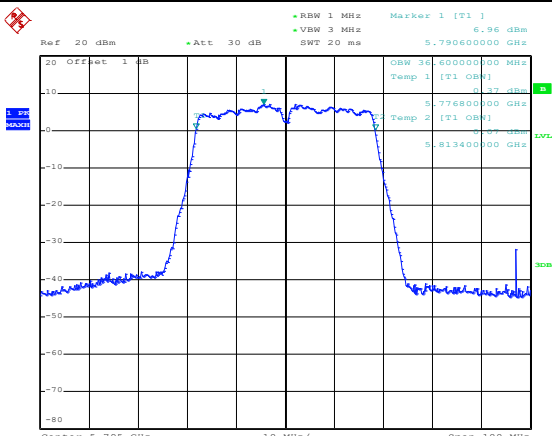802.11n-HT20-High	 Date: 18.JUL.2023 11:56:19
802.11n-HT40-Low	 Date: 18.JUL.2023 11:56:52
802.11n-HT40-High	 Date: 18.JUL.2023 11:57:10

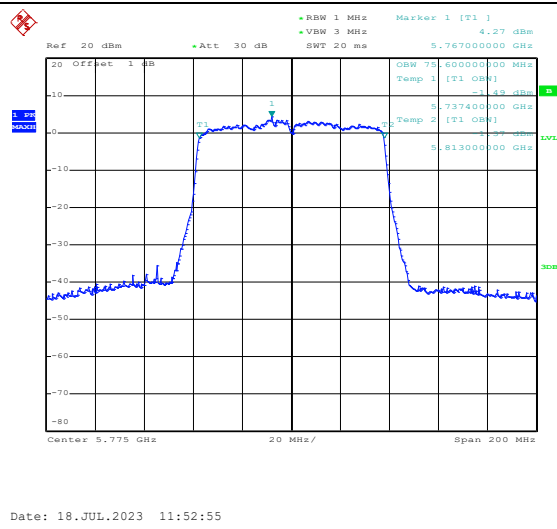802.11ac-HT80



APPENDIX C

Maximum Conducted Output Power




U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 1	ANT 2		
802.11a	5180	15.25	14.86	/	23.98
	5200	15.25	14.92	/	23.98
	5240	15.60	14.75	/	23.98
802.11n-HT20	5180	14.37	13.84	17.12	23.35
	5200	14.52	13.90	17.23	23.35
	5240	14.72	13.81	17.30	23.35
802.11n-HT40	5190	13.65	13.12	16.40	23.35
	5230	13.95	13.11	16.56	23.35
802.11ac VH80	5210	12.78	12.03	15.43	23.35




U-NII-2A: 5250-5350MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 1	ANT 2		
802.11a	5260	15.17	14.66	/	23.98
	5280	15.48	14.54	/	23.98
	5320	15.52	14.39	/	23.98
802.11n-HT20	5260	14.32	13.60	16.99	23.35
	5280	14.57	13.43	17.05	23.35
	5320	14.59	13.46	17.07	23.35
802.11n-HT40	5270	13.03	12.93	15.99	23.35
	5310	13.30	12.57	15.96	23.35
802.11ac VH80	5290	12.17	11.5	14.86	23.35

U-NII-2C: 5470-5725MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 1	ANT 2		
802.11a	5500	14.46	14.73	/	23.98
	5600	15.06	14.63	/	23.98
	5700	14.86	14.60	/	23.98
802.11n-HT20	5500	13.89	13.80	16.86	23.35
	5600	14.40	13.87	17.15	23.35
	5700	14.06	13.41	16.76	23.35
802.11n-HT40	5510	13.09	12.69	15.90	23.35
	5590	13.42	12.93	16.19	23.35
	5670	13.69	12.28	16.05	23.35
802.11ac VH80	5530	11.74	11.70	14.73	23.35
	5610	12.62	11.33	15.03	23.35

U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 1	ANT 2		
802.11a	5745	15.10	14.18	/	30.00
	5785	15.05	14.38	/	30.00
	5825	15.35	13.94	/	30.00
802.11n-HT20	5745	14.11	14.05	17.09	29.37
	5785	14.33	14.08	17.22	29.37
	5825	14.44	13.93	17.20	29.37
802.11n-HT40	5755	13.71	12.16	16.01	29.37
	5795	13.52	12.44	16.02	29.37
802.11ac VH80	5775	12.12	12.19	15.17	29.37

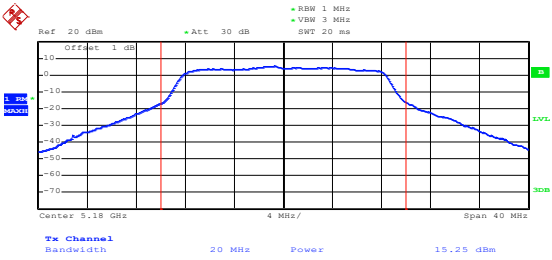
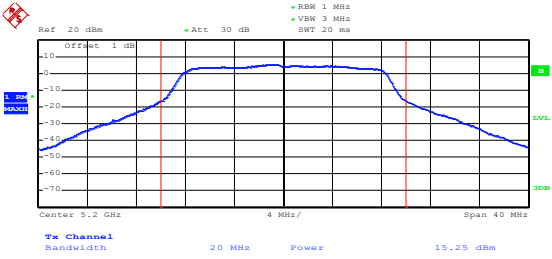
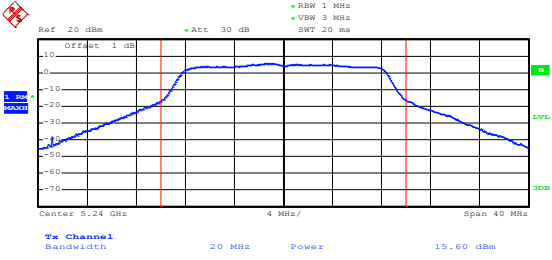
ANT 1
5150-5250MHz




802.11a-Low	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms Center: 5.18 GHz, Span: 40 MHz, 4 MHz/div Tx Channel Bandwidth: 20 MHz, Power: 15.25 dBm Date: 15.JUL.2023 16:51:38
802.11a-Middle	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms Center: 5.2 GHz, Span: 40 MHz, 4 MHz/div Tx Channel Bandwidth: 20 MHz, Power: 15.25 dBm Date: 15.JUL.2023 16:53:12
802.11a-High	 Ref: 20 dBm, Offset: 1 dB, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms Center: 5.24 GHz, Span: 40 MHz, 4 MHz/div Tx Channel Bandwidth: 20 MHz, Power: 15.60 dBm Date: 15.JUL.2023 16:53:29

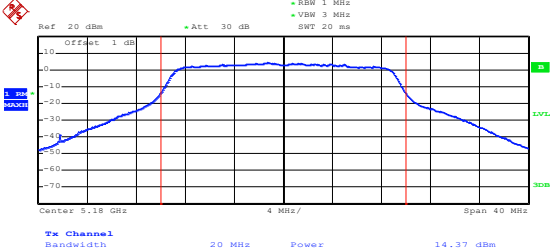
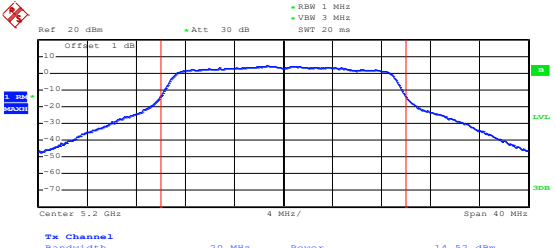
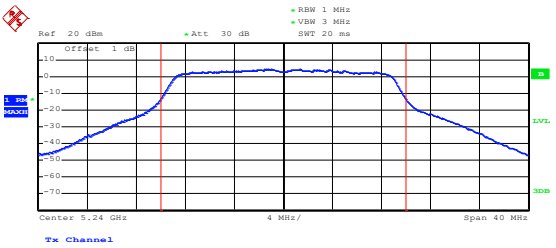
802.11n-HT20-Low	 Date: 15.JUL.2023 16:54:03
802.11n-HT20-Middle	 Date: 15.JUL.2023 16:54:19
802.11n-HT20-High	 Date: 15.JUL.2023 16:54:38

802.11n-HT40-Low	Date: 15.JUL.2023 16:55:30
802.11n-HT40-High	Date: 15.JUL.2023 16:56:06
802.11ac-HT80	Date: 17.JUL.2023 15:11:04

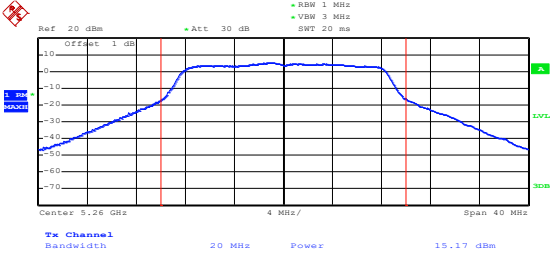
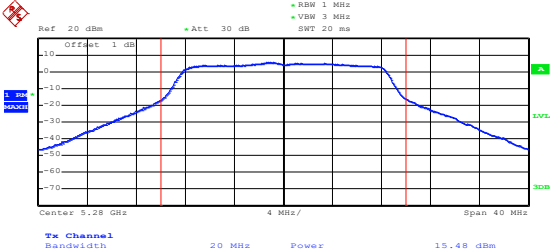
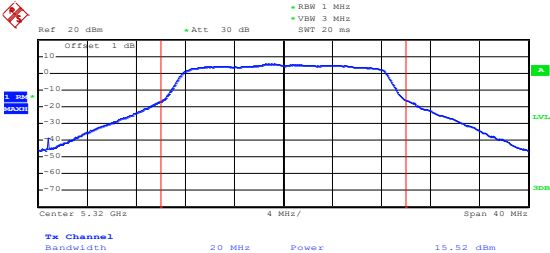
5250-5350MHz




802.11a-Low	 Date: 17.JUL.2023 16:55:31
802.11a-Middle	 Date: 17.JUL.2023 16:56:00
802.11a-High	 Date: 17.JUL.2023 16:56:21

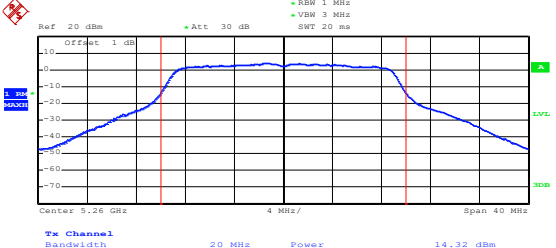
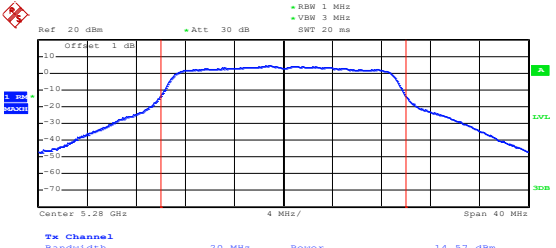
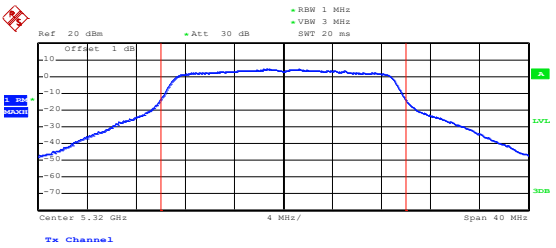
802.11n-HT20-Low	 Date: 17.JUL.2023 16:56:56
802.11n-HT20-Middle	 Date: 17.JUL.2023 16:57:12
802.11n-HT20-High	 Date: 17.JUL.2023 16:57:30

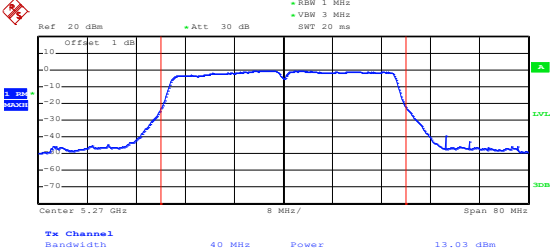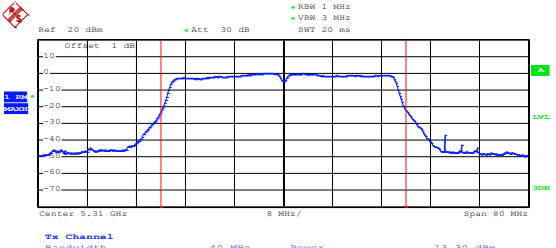
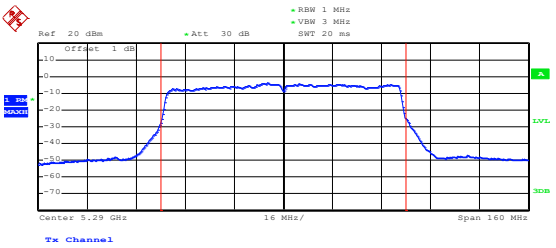
802.11n-HT40-Low	 Date: 17.JUL.2023 16:59:36
802.11n-HT40-High	 Date: 17.JUL.2023 16:58:57
802.11ac-HT80	 Date: 17.JUL.2023 16:54:23

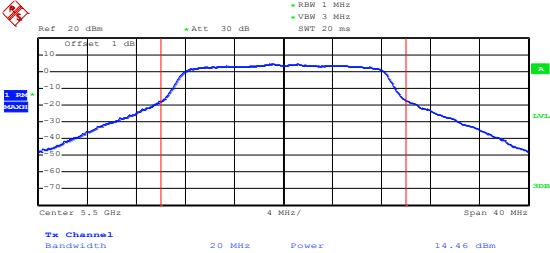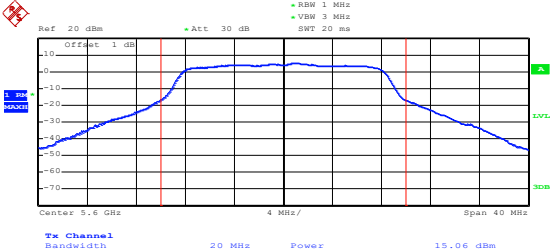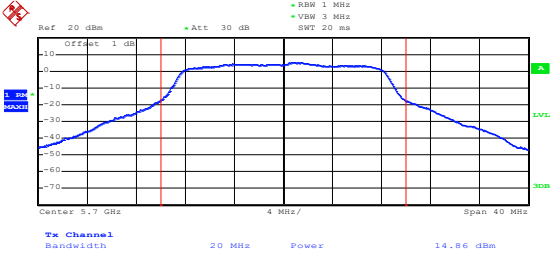5470-5725MHz

802.11a-Low	 Date: 17.JUL.2023 19:19:15
802.11a-Middle	 Date: 17.JUL.2023 19:18:51
802.11a-High	 Date: 17.JUL.2023 19:19:36

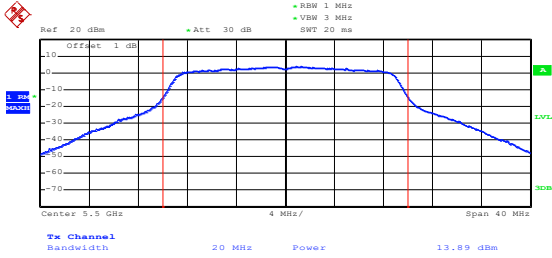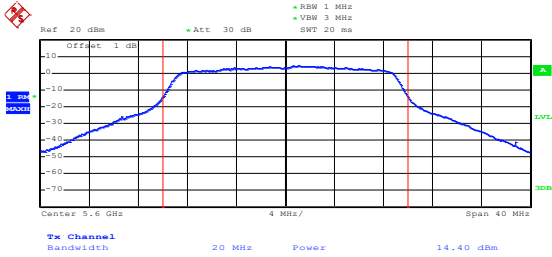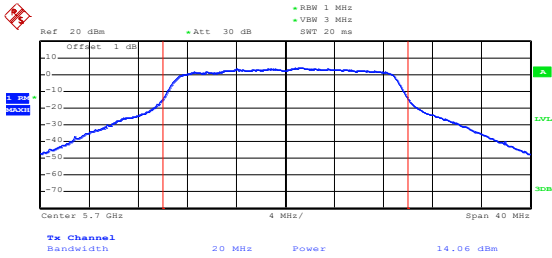
802.11n-HT20-Low	 Date: 17.JUL.2023 19:21:34
802.11n-HT20-Middle	 Date: 17.JUL.2023 19:22:04
802.11n-HT20-High	 Date: 17.JUL.2023 19:22:30

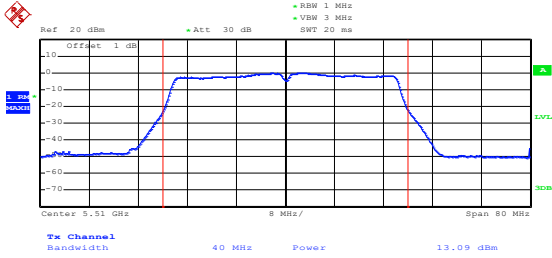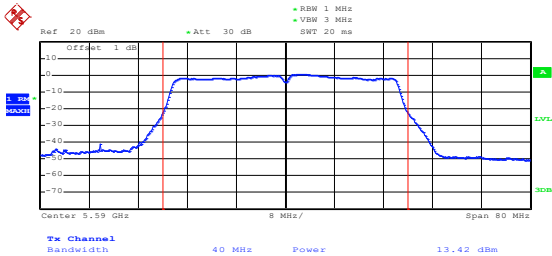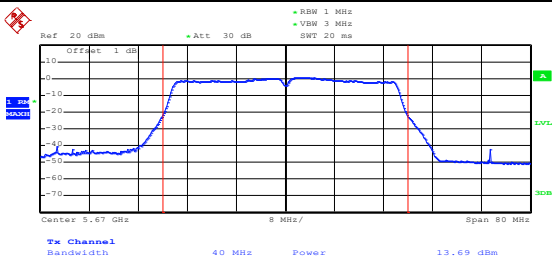802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.51 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 13.09 dBm Date: 17.JUL.2023 19:24:00
802.11n-HT40- Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.59 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 13.42 dBm Date: 17.JUL.2023 19:24:25
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.67 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 13.69 dBm Date: 17.JUL.2023 19:24:42

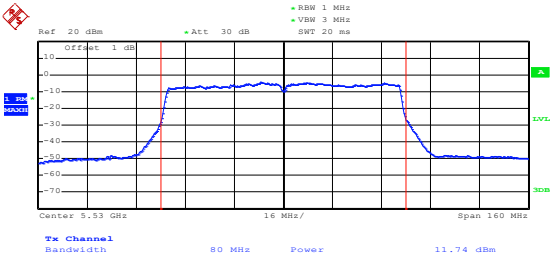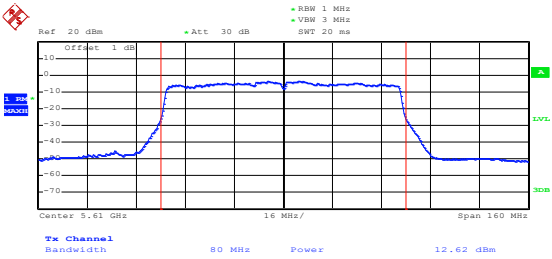802.11ac-HT80-Low	 Date: 17.JUL.2023 19:17:18
802.11ac-HT80--High	 Date: 17.JUL.2023 19:16:50


5725-5850MHz

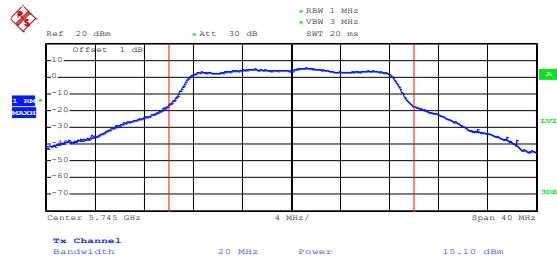802.11a-Low




Date: 17.JUL.2023 17:55:16

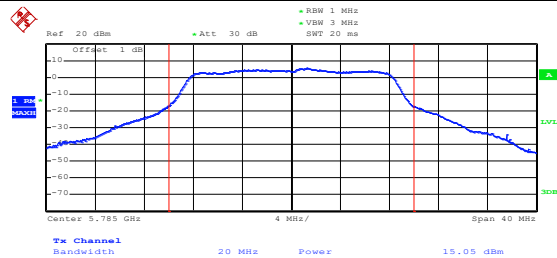802.11a-Middle









Date: 17.JUL.2023 17:56:00

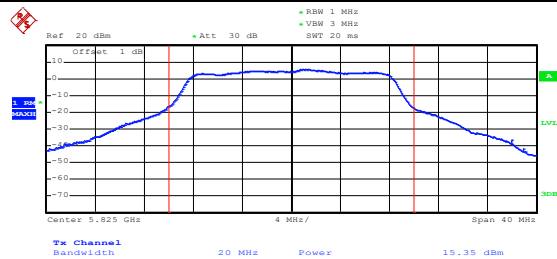802.11a-High









Date: 17.JUL.2023 17:56:20

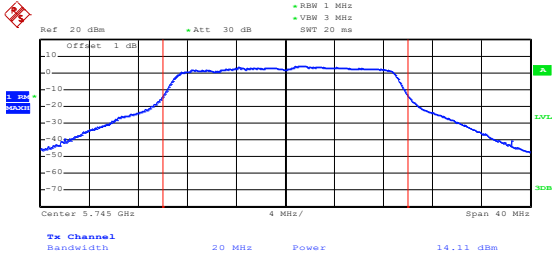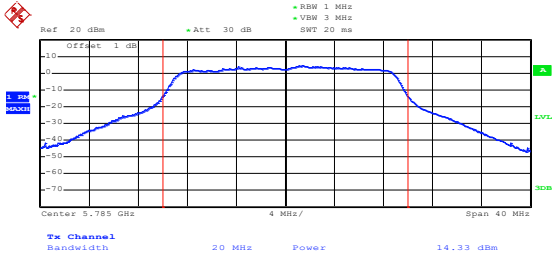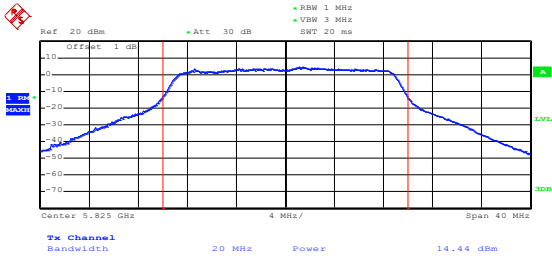802.11n-HT20-Low	 Date: 17.JUL.2023 17:57:18
802.11n-HT20-Middle	 Date: 17.JUL.2023 17:58:14
802.11n-HT20-High	 Date: 17.JUL.2023 17:58:35

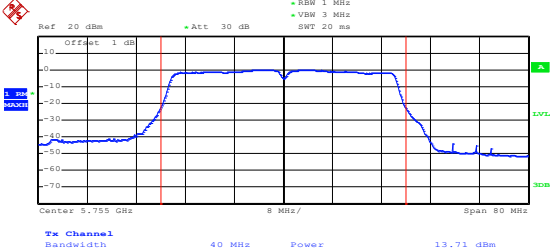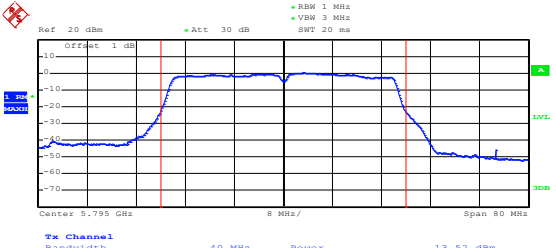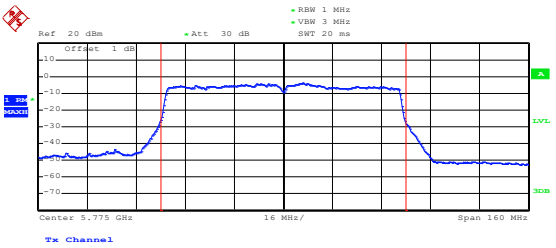802.11n-HT40-Low	 Date: 17.JUL.2023 17:59:20
802.11n-HT40-High	 Date: 17.JUL.2023 17:59:50
802.11ac-HT80	 Date: 17.JUL.2023 17:45:10

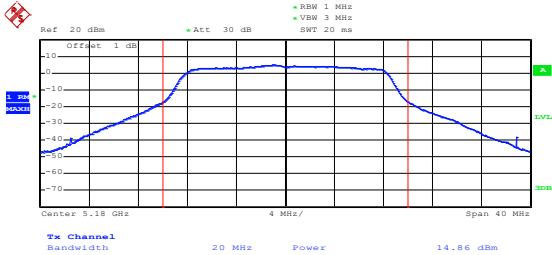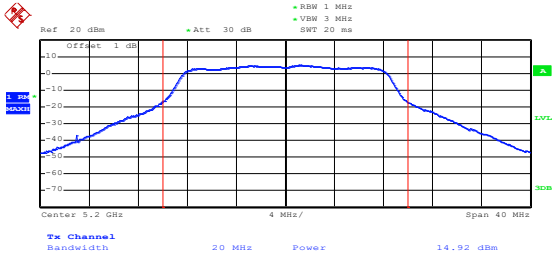
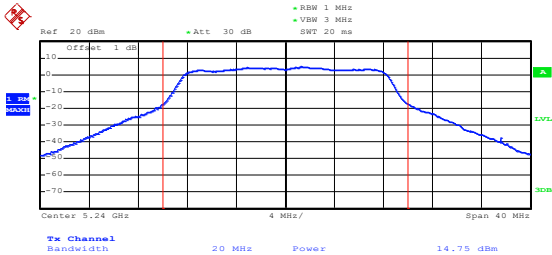
ANT 2
5150-5250MHz

802.11a-Low	 Date: 17.JUL.2023 20:24:07
802.11a-Middle	 Date: 17.JUL.2023 20:24:34
802.11a-High	 Date: 17.JUL.2023 20:24:49

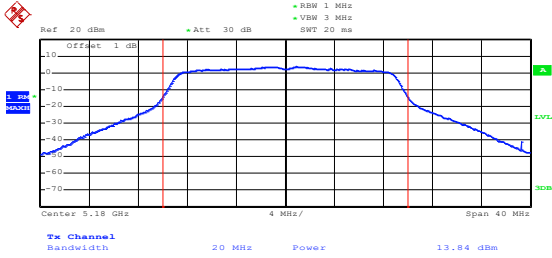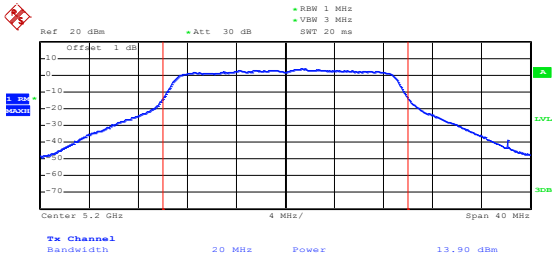
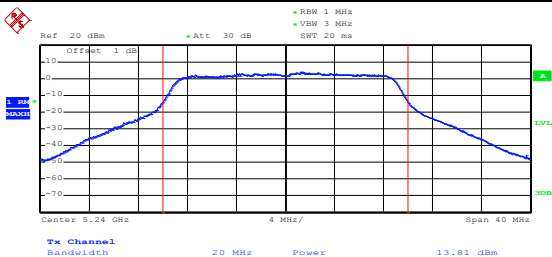
802.11n-HT20-Low	 Date: 17.JUL.2023 20:25:24
802.11n-HT20-Middle	 Date: 17.JUL.2023 20:25:43
802.11n-HT20-High	 Date: 17.JUL.2023 20:26:02

802.11n-HT40-Low	Date: 17.JUL.2023 20:26:36
802.11n-HT40-High	Date: 17.JUL.2023 20:26:54
802.11ac-HT80	Date: 17.JUL.2023 20:22:58

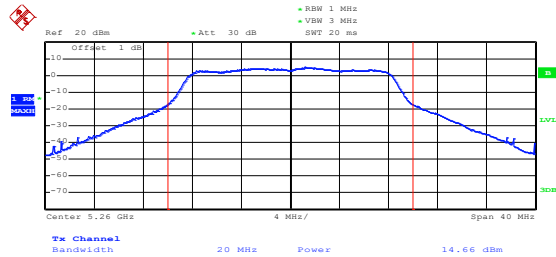

5250-5350MHz






Date: 18.JUL.2023 09:56:01


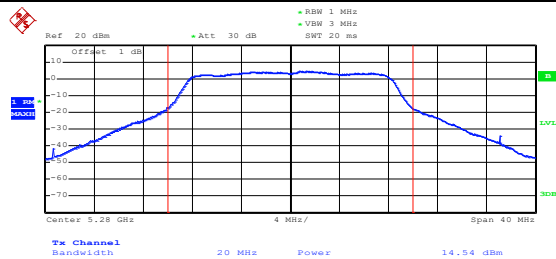



Date: 18.JUL.2023 09:56:41

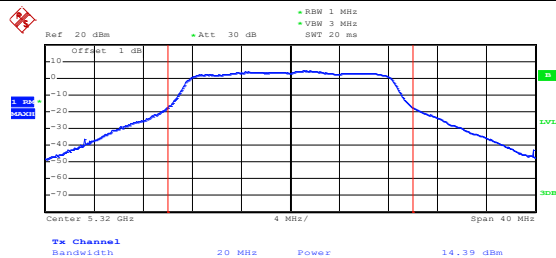




Date: 18.JUL.2023 09:57:02

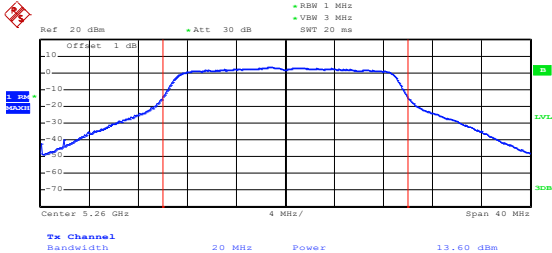
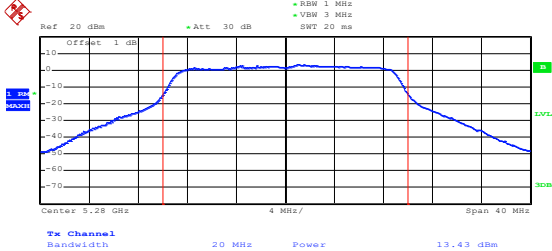
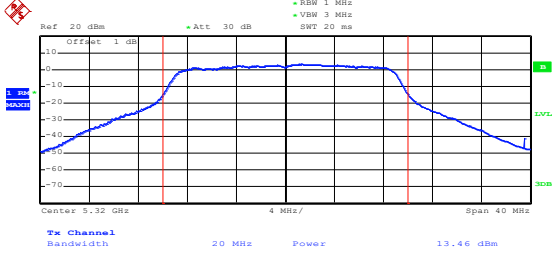
802.11n-HT20-Low	 Date: 18.JUL.2023 09:57:44
802.11n-HT20-Middle	 Date: 18.JUL.2023 09:58:05
802.11n-HT20-High	 Date: 18.JUL.2023 09:58:34

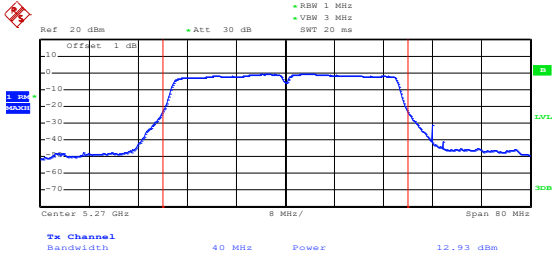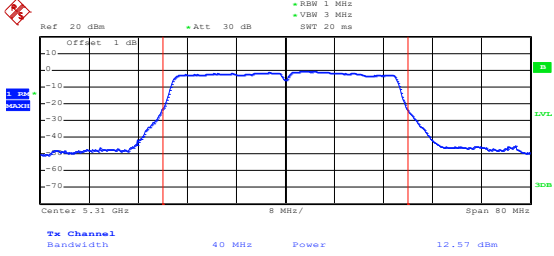
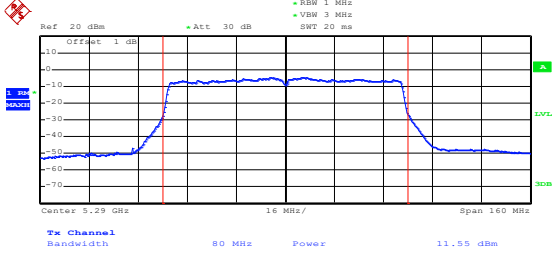
802.11n-HT40-Low	 Ref: 20 dBm • Att: 30 dB • RBW: 1 MHz • VBW: 3 MHz • SWT: 20 ms Offset: 1 dB Center: 5.27 GHz 8 MHz/ Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 12.93 dBm Date: 18.JUL.2023 09:59:16
802.11n-HT40-High	 Ref: 20 dBm • Att: 30 dB • RBW: 1 MHz • VBW: 3 MHz • SWT: 20 ms Offset: 1 dB Center: 5.31 GHz 8 MHz/ Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 12.57 dBm Date: 18.JUL.2023 09:59:36
802.11ac-HT80	 Ref: 20 dBm • Att: 30 dB • RBW: 1 MHz • VBW: 3 MHz • SWT: 20 ms Offset: 1 dB Center: 5.29 GHz 16 MHz/ Span: 160 MHz Tx Channel Bandwidth: 80 MHz Power: 11.55 dBm Date: 18.JUL.2023 09:50:55

5470-5725MHz




802.11a-Low	Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.5 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.73 dBm Date: 18.JUL.2023 14:22:32
802.11a-Middle	Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.6 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.63 dBm Date: 18.JUL.2023 14:22:59
802.11a-High	Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Center 5.7 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 14.60 dBm Date: 18.JUL.2023 14:23:25

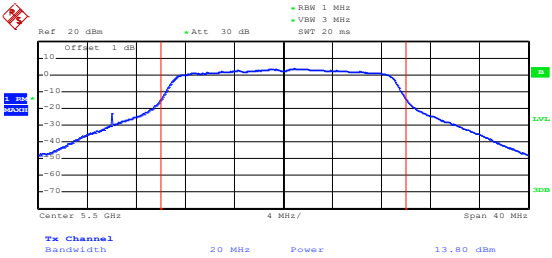
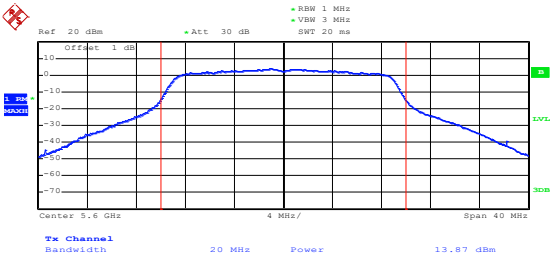
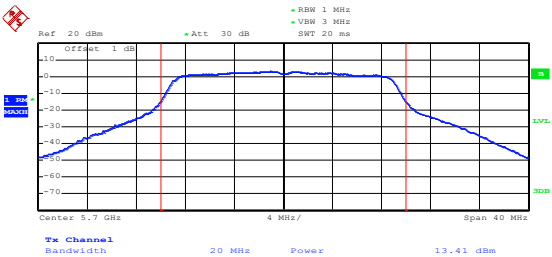
802.11n-HT20-Low	 Date: 18.JUL.2023 14:24:11
802.11n-HT20-Middle	 Date: 18.JUL.2023 14:24:38
802.11n-HT20-High	 Date: 18.JUL.2023 14:24:55

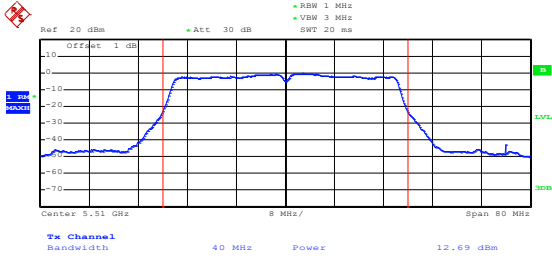
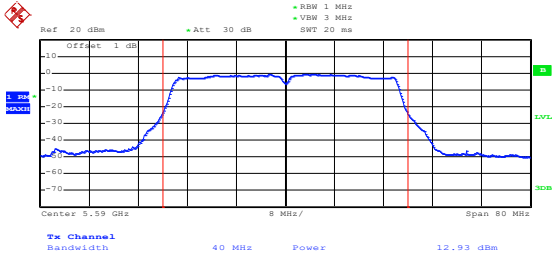
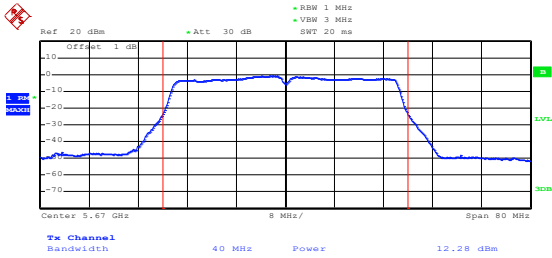
802.11n-HT40-Low	 Date: 18.JUL.2023 14:25:52
802.11n-HT40- Middle	 Date: 18.JUL.2023 14:26:34
802.11n-HT40-High	 Date: 18.JUL.2023 14:26:54

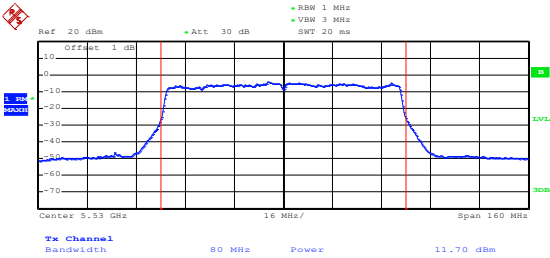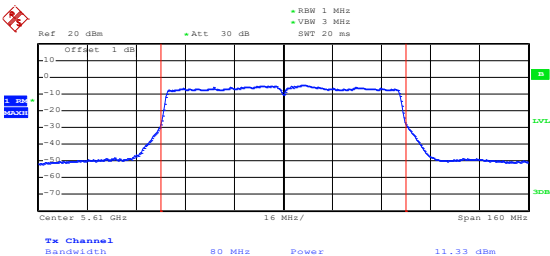802.11ac-HT80-Low	 Date: 18.JUL.2023 14:21:15
802.11ac-HT80-High	 Date: 18.JUL.2023 14:21:51

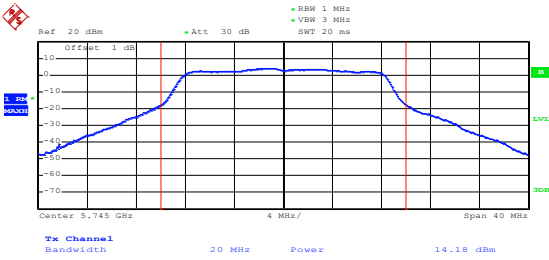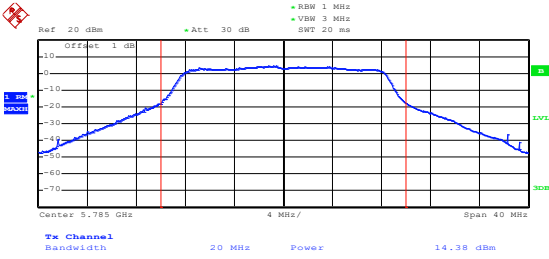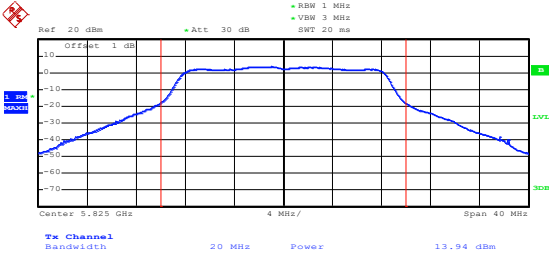5725-5850MHz

802.11a-Low	 Date: 18.JUL.2023 11:39:27
802.11a-Middle	 Date: 18.JUL.2023 11:40:22
802.11a-High	 Date: 18.JUL.2023 11:41:15

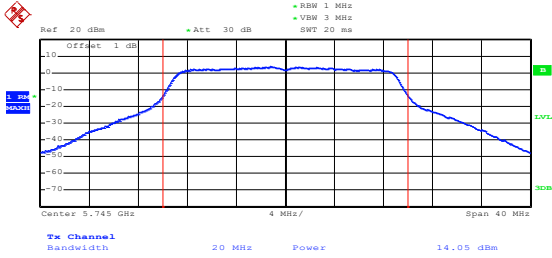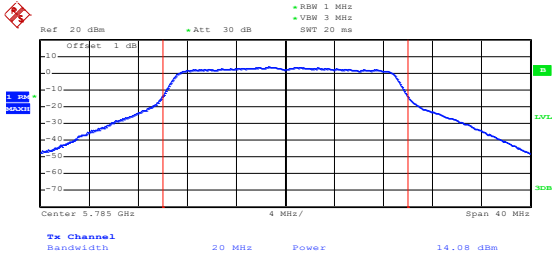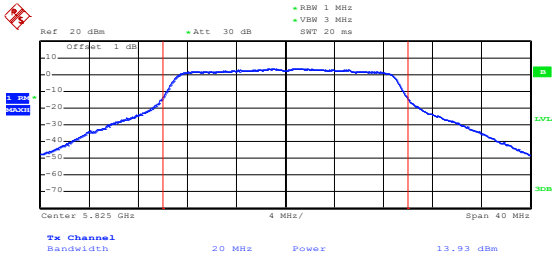802.11n-HT20-Low	 Date: 18.JUL.2023 11:42:06
802.11n-HT20-Middle	 Date: 18.JUL.2023 11:42:30
802.11n-HT20-High	 Date: 18.JUL.2023 11:42:50

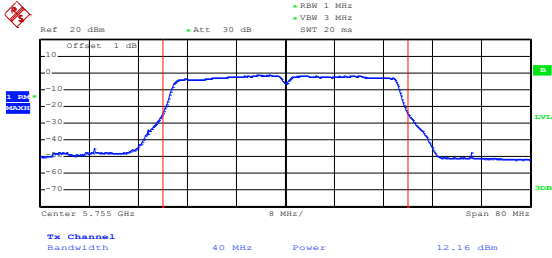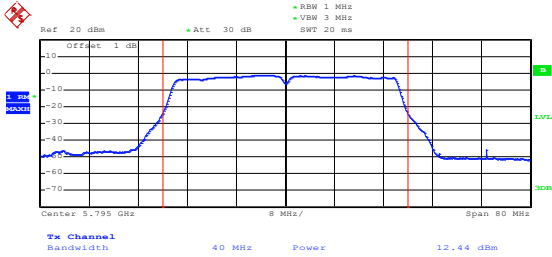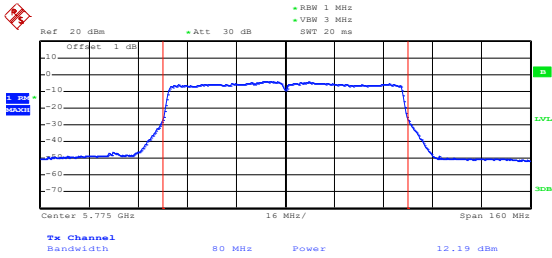802.11n-HT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.755 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 12.16 dBm Date: 18.JUL.2023 11:43:51
802.11n-HT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.795 GHz Span: 80 MHz Tx Channel Bandwidth: 40 MHz Power: 12.44 dBm Date: 18.JUL.2023 11:44:15
802.11ac-HT80	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.775 GHz Span: 160 MHz Tx Channel Bandwidth: 80 MHz Power: 12.19 dBm Date: 18.JUL.2023 11:37:46

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	1600	0.3077
100%		-20	1588	0.3054
100%		-10	1600	0.3077
100%		0	1599	0.3076
100%		+10	1592	0.3062
100%		+20	1597	0.3071
100%		+30	1599	0.3075
100%		+40	1604	0.3084
100%		+50	1598	0.3074
Low Battery power	3.4	+20	1600	0.3077
High Battery power	4.2	+20	1593	0.3064

U-NII-1: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	1601	0.3032
100%		-20	1589	0.3009
100%		-10	1606	0.3041
100%		0	1602	0.3033
100%		+10	1594	0.3019
100%		+20	1596	0.3023
100%		+30	1600	0.3030
100%		+40	1598	0.3026
100%		+50	1603	0.3036
Low Battery power	3.4	+20	1597	0.3024
High Battery power	4.2	+20	1589	0.3009

U-NII-1: 5470-5725MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	1600	0.2910
100%		-20	1587	0.2885
100%		-10	1600	0.2908
100%		0	1600	0.2908
100%		+10	1602	0.2912
100%		+20	1605	0.2918
100%		+30	1598	0.2906
100%		+40	1602	0.2914
100%		+50	1602	0.2913
Low Battery power	3.4	+20	1596	0.2903
High Battery power	4.2	+20	1590	0.2891

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	1604	0.2773
100%		-20	1584	0.2739
100%		-10	1606	0.2776
100%		0	1600	0.2766
100%		+10	1596	0.2759
100%		+20	1596	0.2760
100%		+30	1599	0.2763
100%		+40	1601	0.2767
100%		+50	1602	0.2770
Low Battery power	3.4	+20	1592	0.2753
High Battery power	4.2	+20	1593	0.2754

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****