



No. I22Z61849-SEM01

For

HMD Global Oy

Smart Phone

Model Name: TA-1515

With

Hardware Version: V1.0

Software Version: 00US_0_060

FCC ID: 2AJOTTA-1515

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

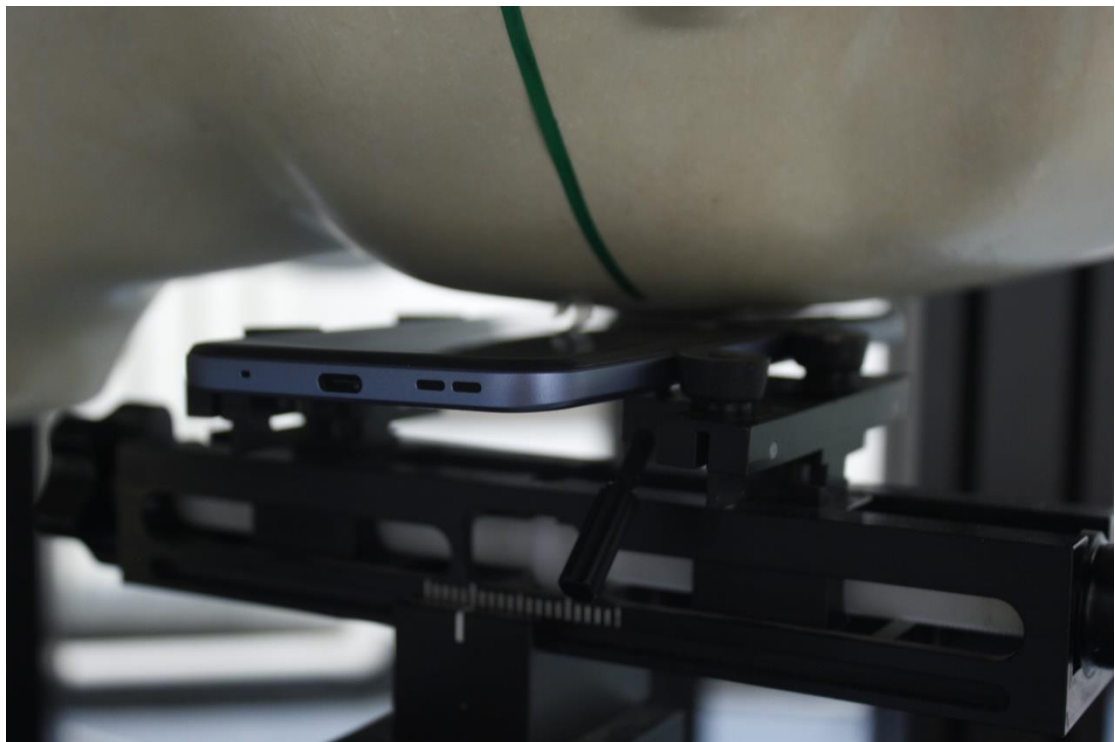

Picture 2: Left Head Touch Cheek Position

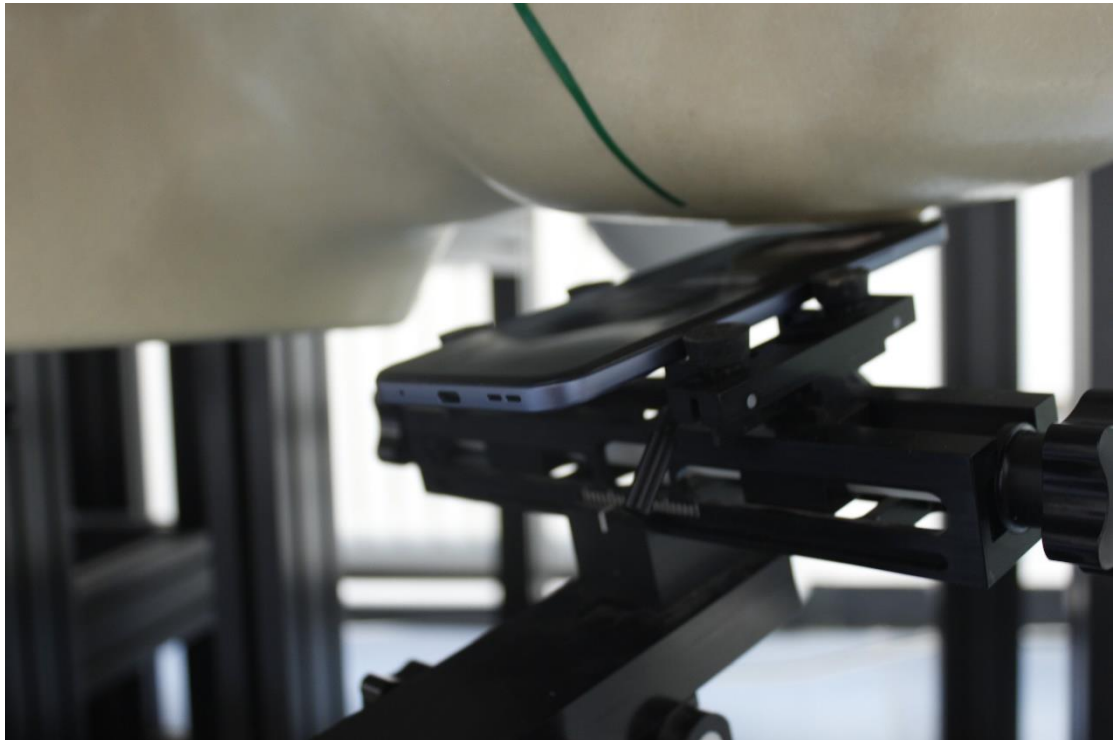

Picture 3: Left Head Tilt 15° Position

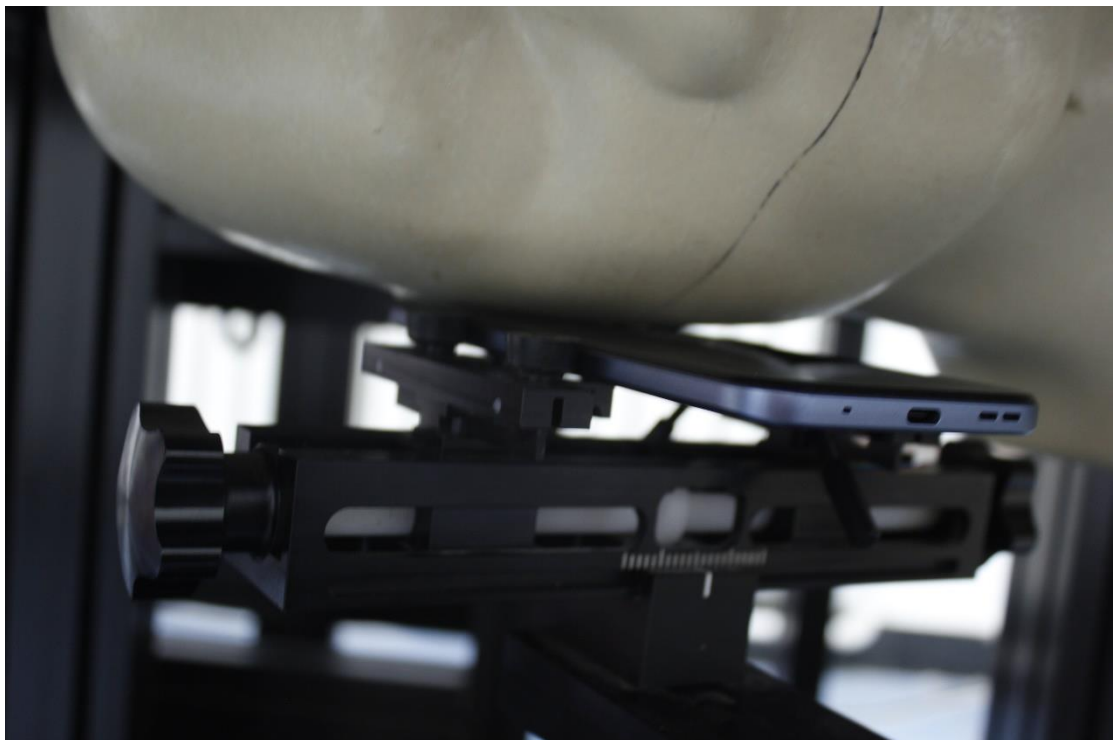


Picture 4: Right Head Touch Cheek Position



Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 9 test positions all with the distance =10/15/0mm between the EUT and the phantom bottom:

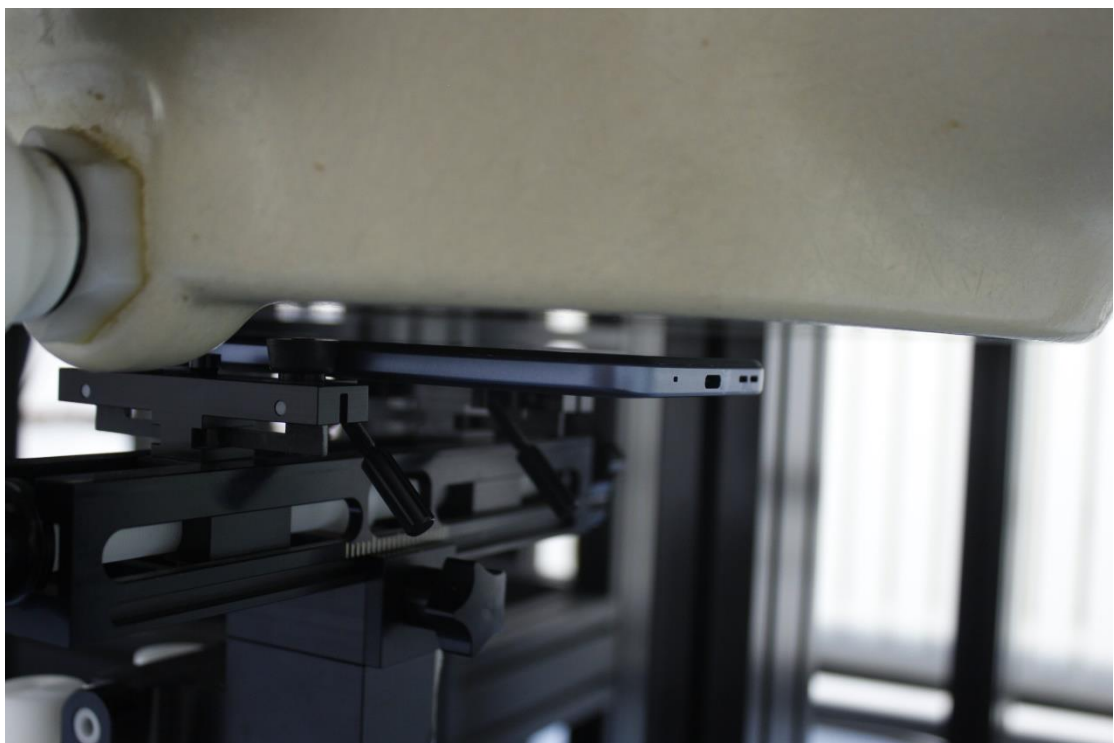

Picture 6: Front 10mm



Picture 7: Rear 10mm




Picture 8: Left 10mm




Picture 9: Right 10mm




Picture 10: Top 10mm

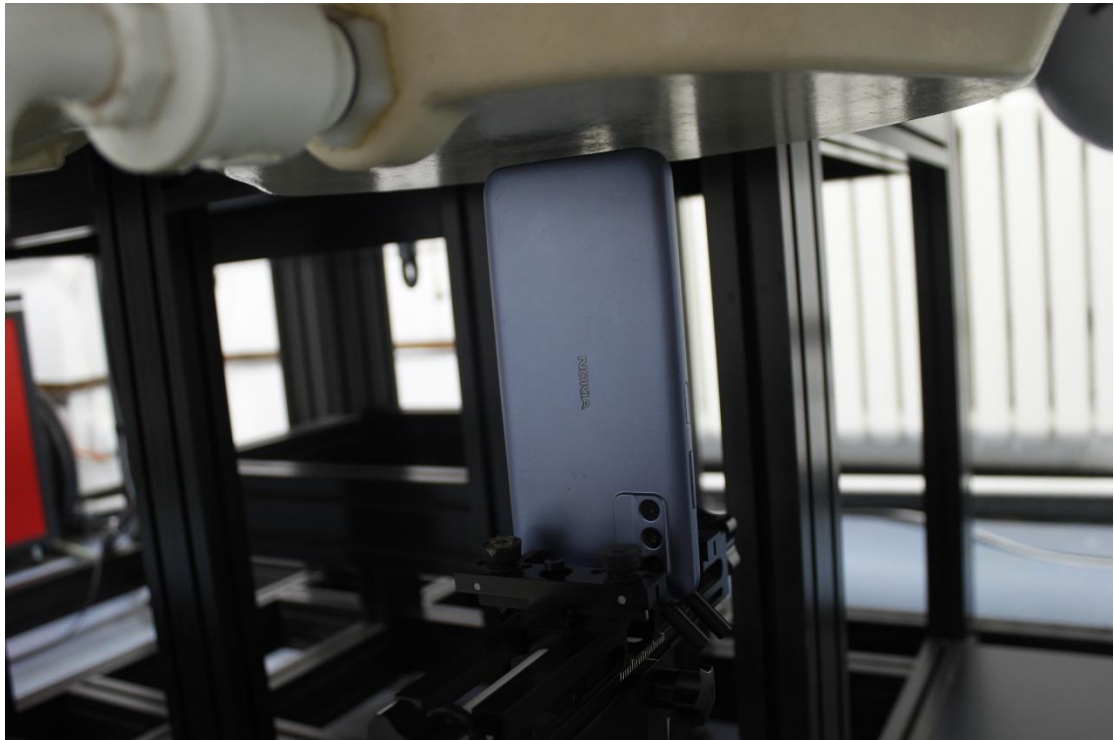


Picture 11: Bottom 10mm

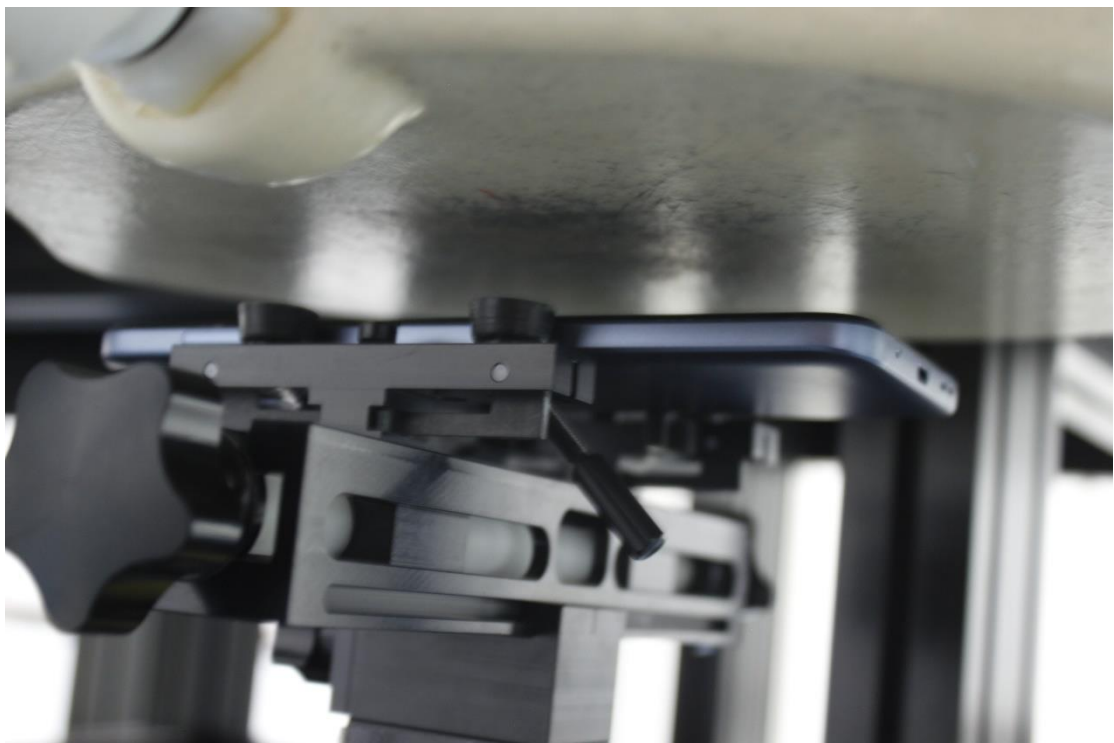


Picture 12: Front 15mm

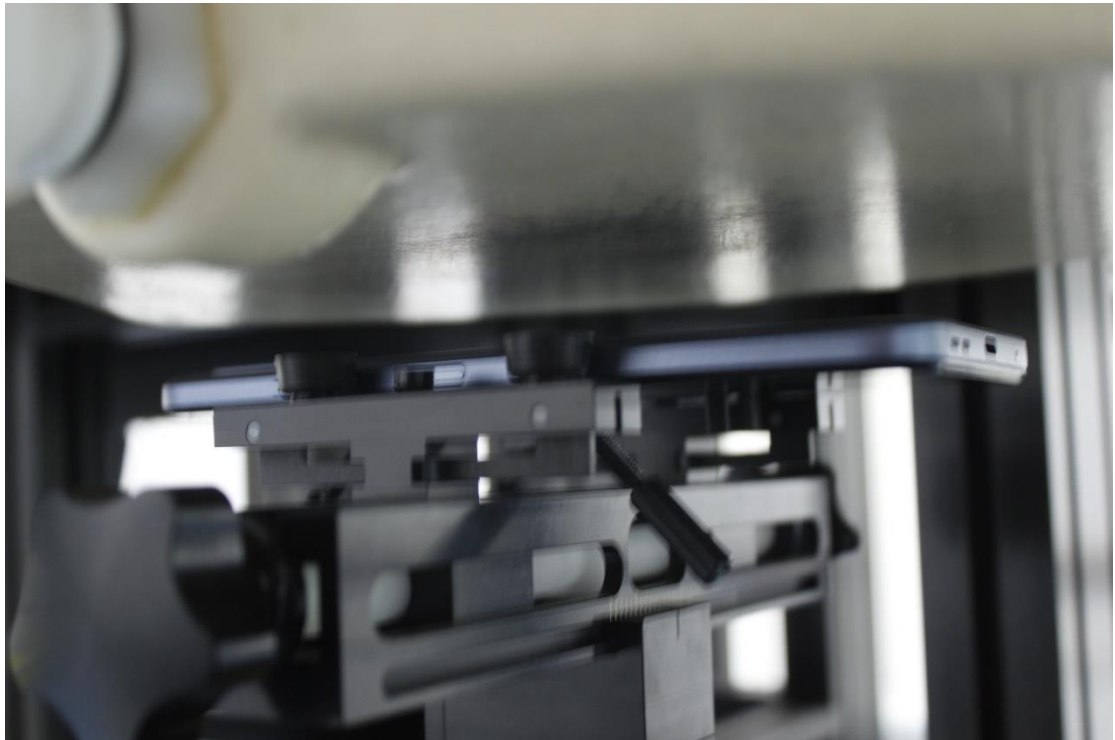

Picture 13: Rear 15mm

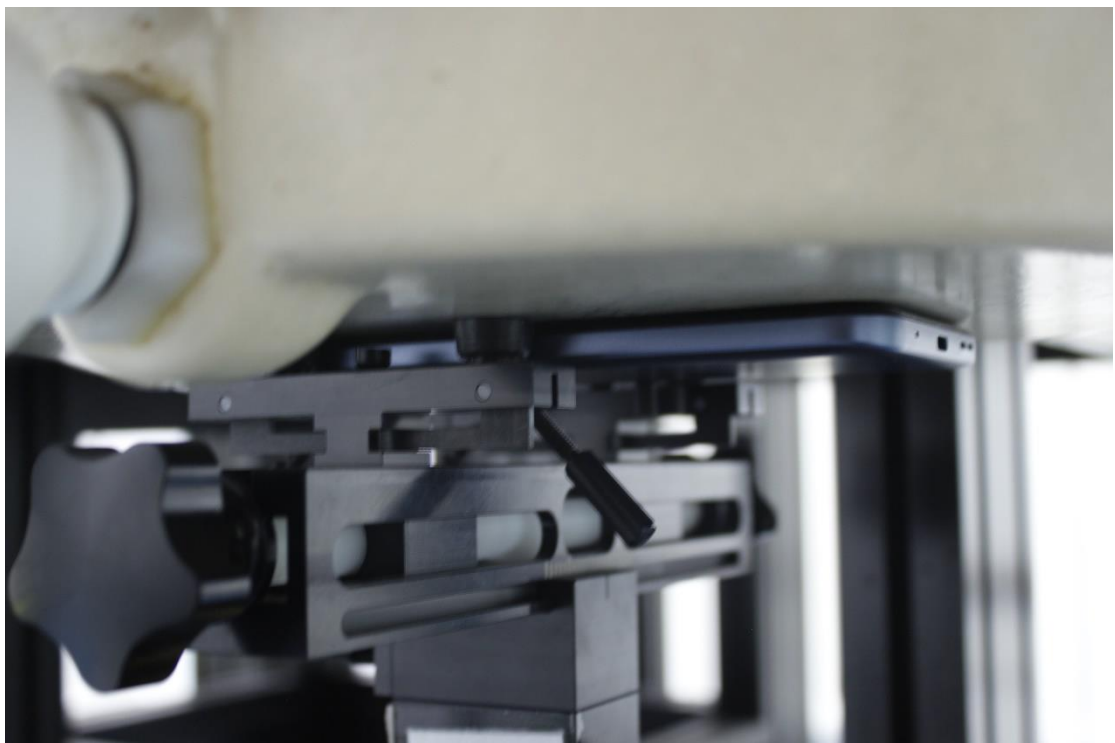

Picture 14: Front 0mm


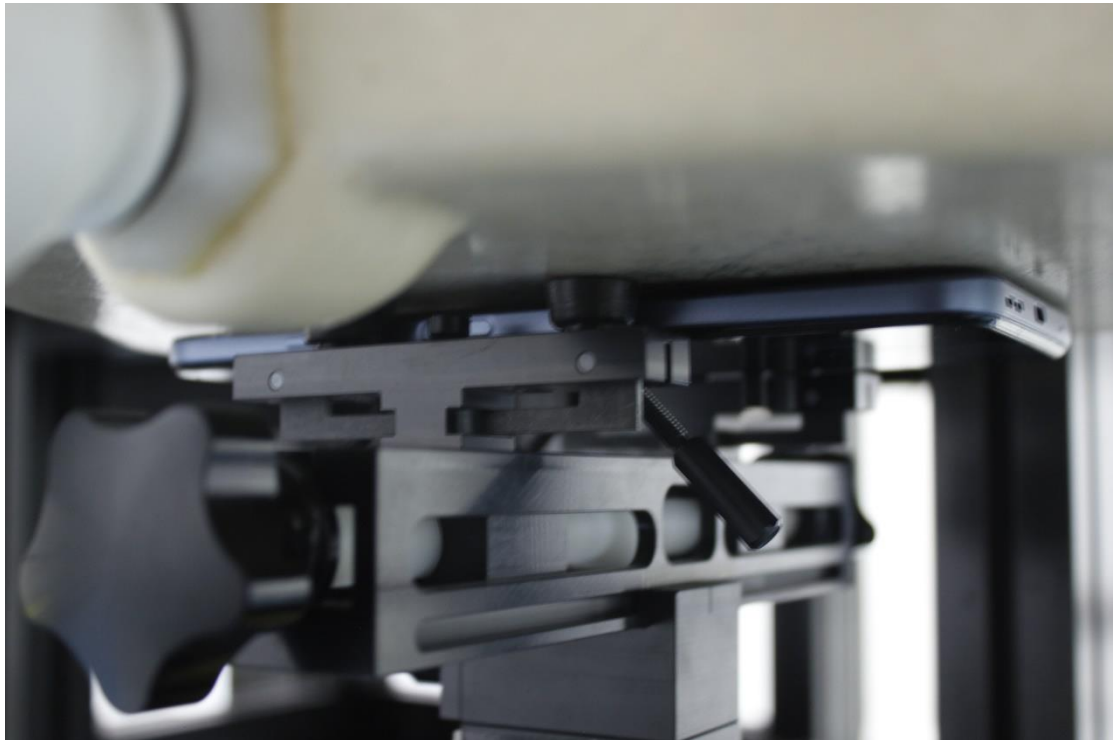


Picture 15: rear 0mm



Picture 16: Bottom 0mm

Transmit Antenna Separation Distances

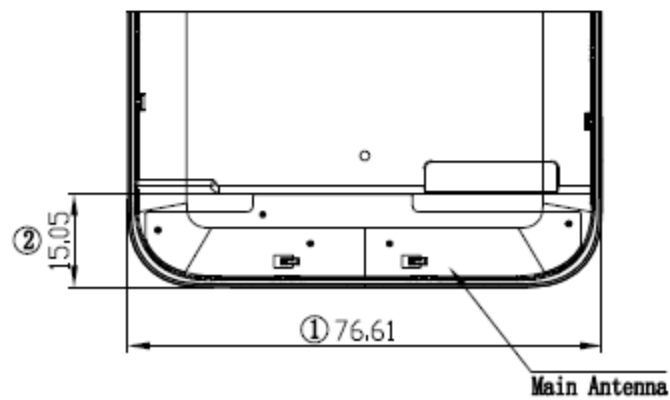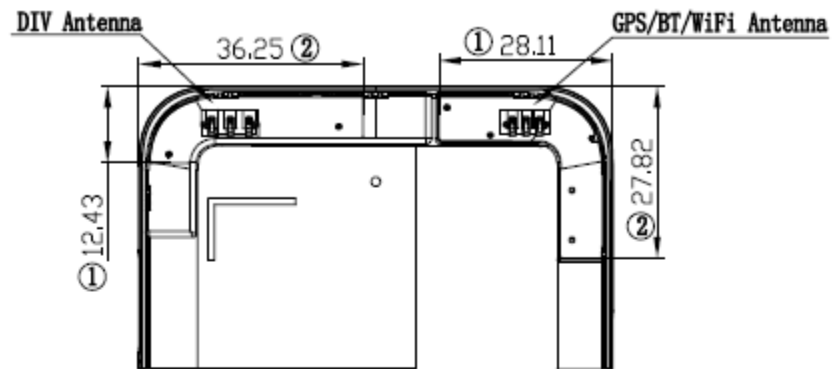

Picture 17 Antenna Locations