

Test Plot 1#: GSM 850 Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.866 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

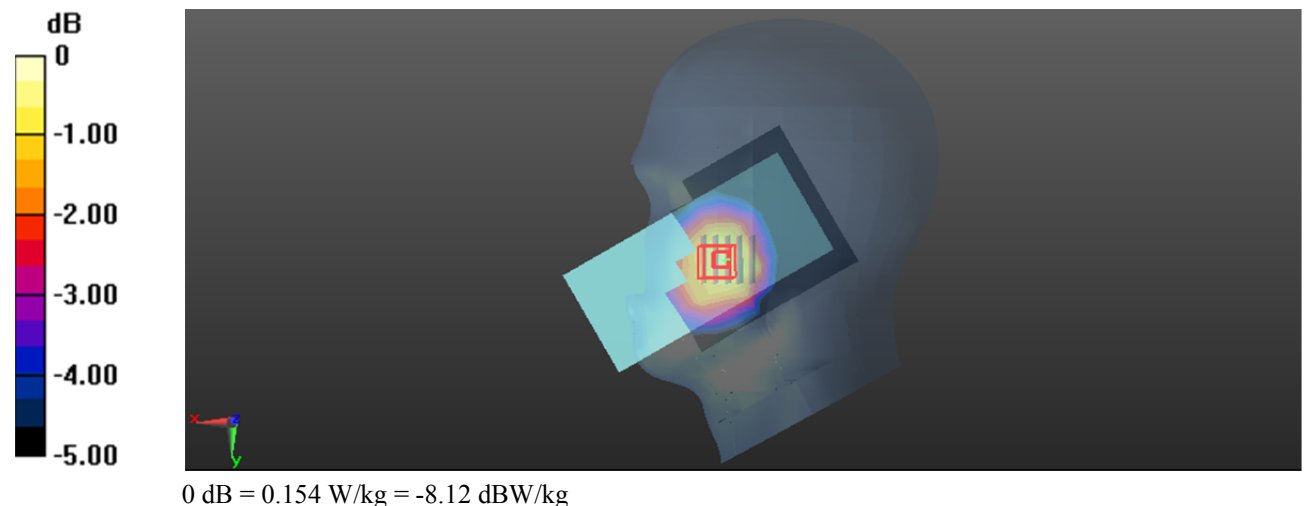

Test Plot 2#: GSM 850 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.13 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

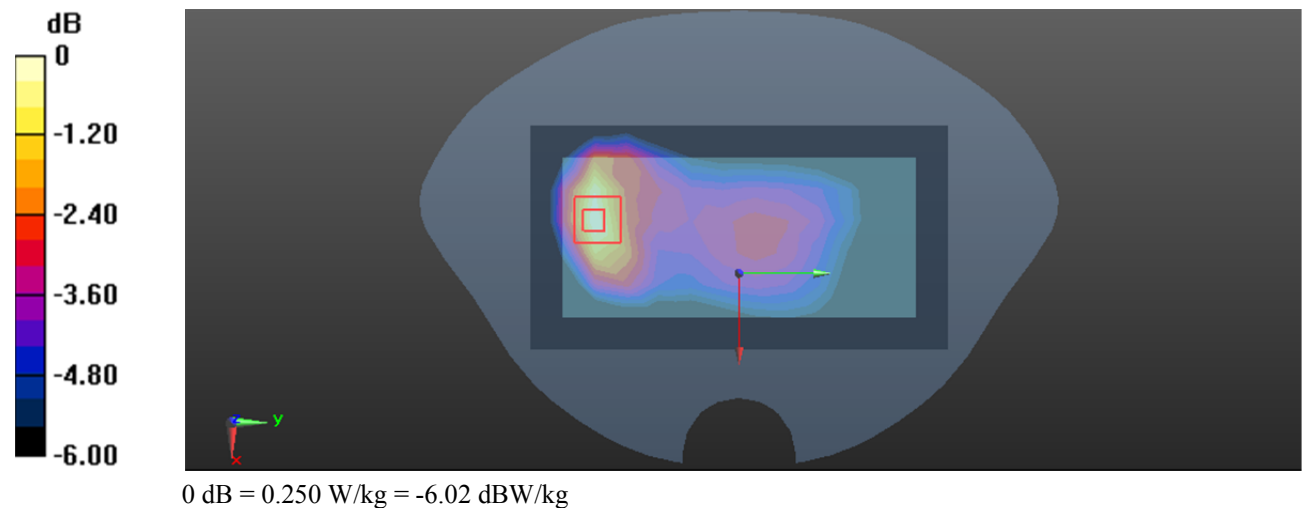

Test Plot 3#: GSM 850 Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.733 W/kg


Zoom Scan (5x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.04 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.806 W/kg

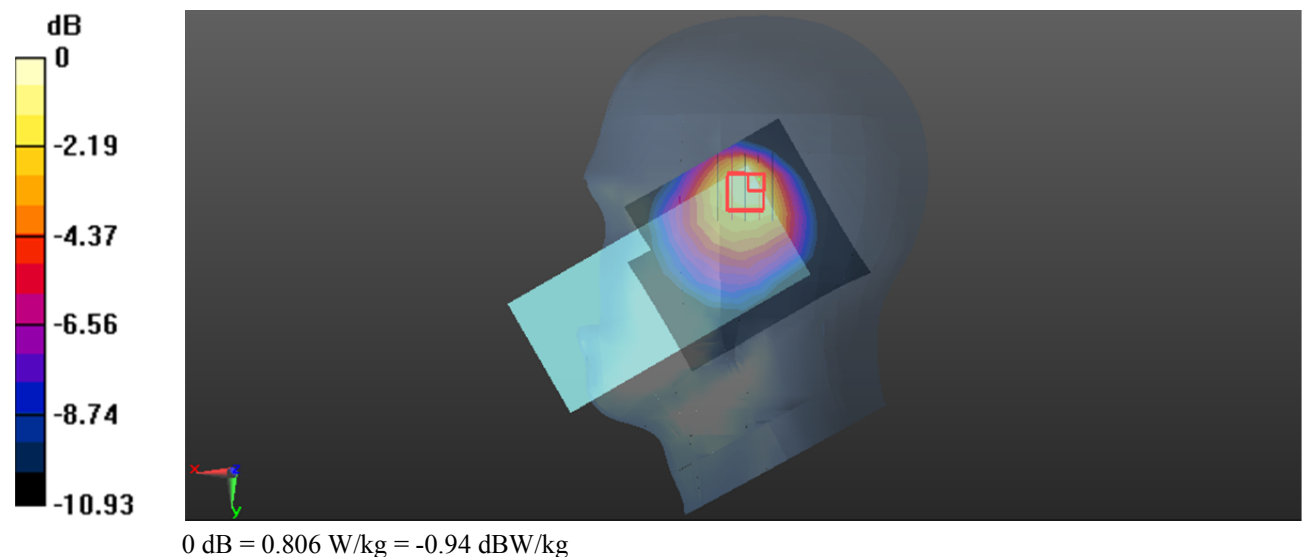

Test Plot 4#: GSM 850 Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.312 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.41 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

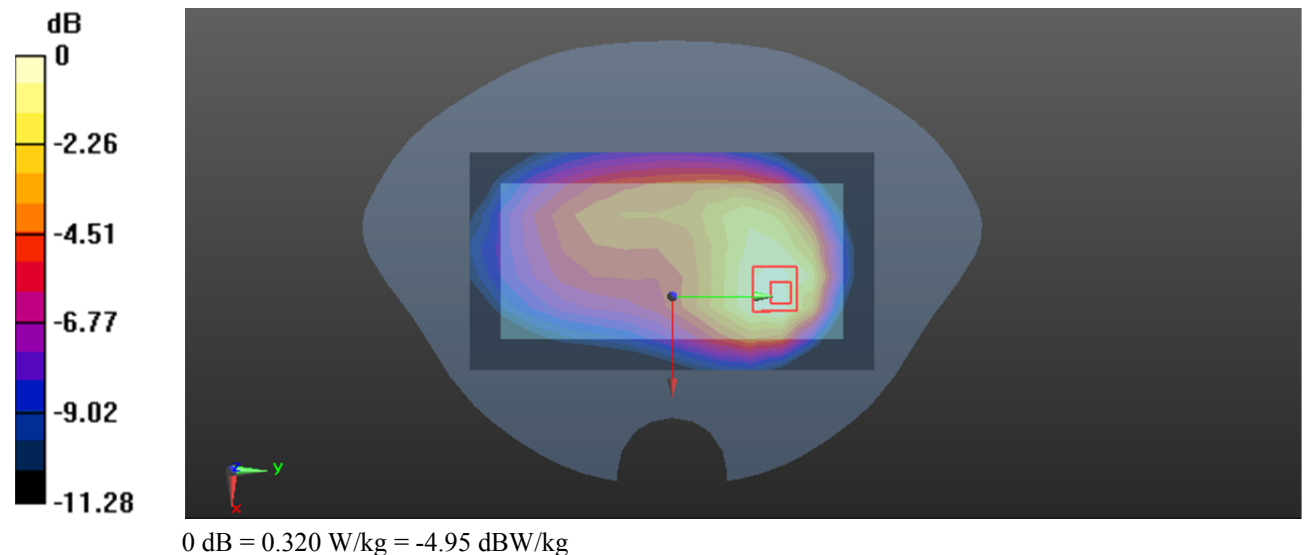

Test Plot 5#: PCS 1900 Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0943 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.946 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

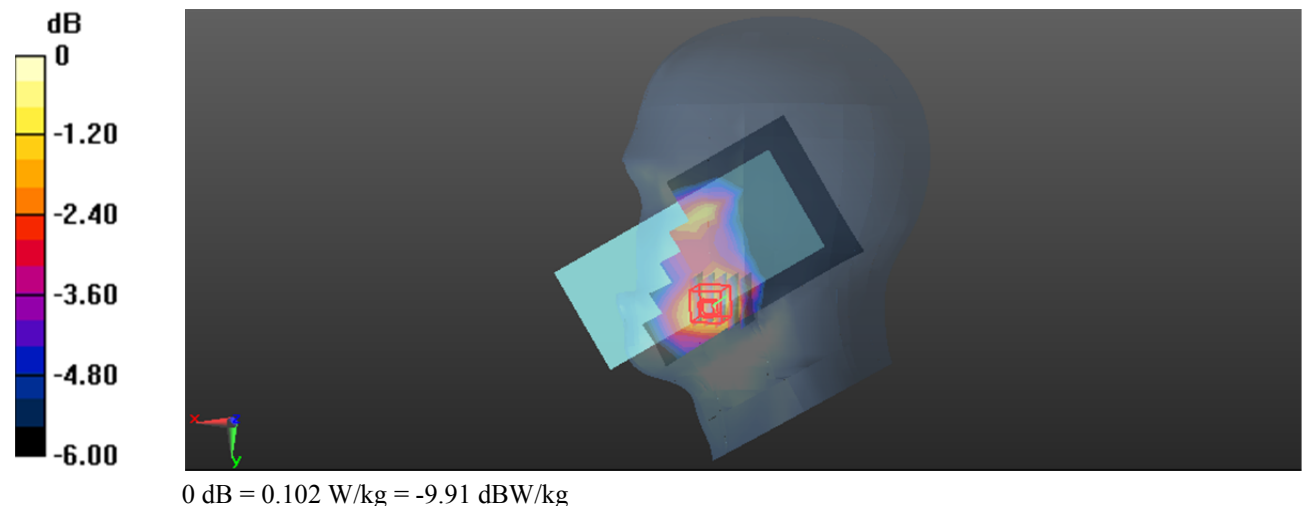

Test Plot 6#: PCS 1900 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.612 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.912 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

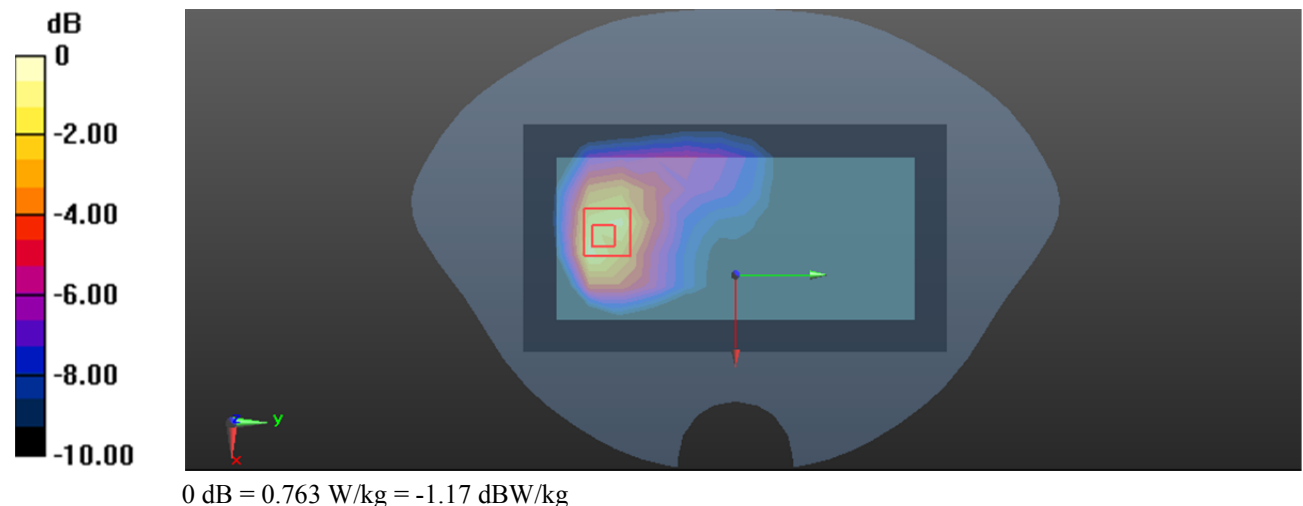

Test Plot 7#: PCS 1900 Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.605 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

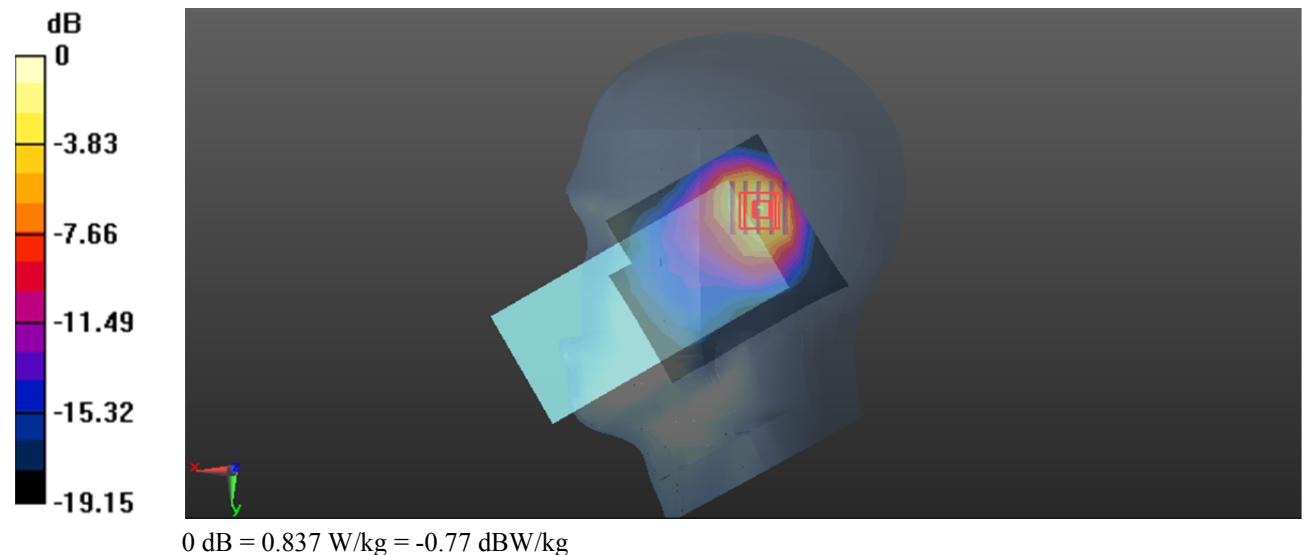

Test Plot 8#: PCS 1900 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.30 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.626 W/kg

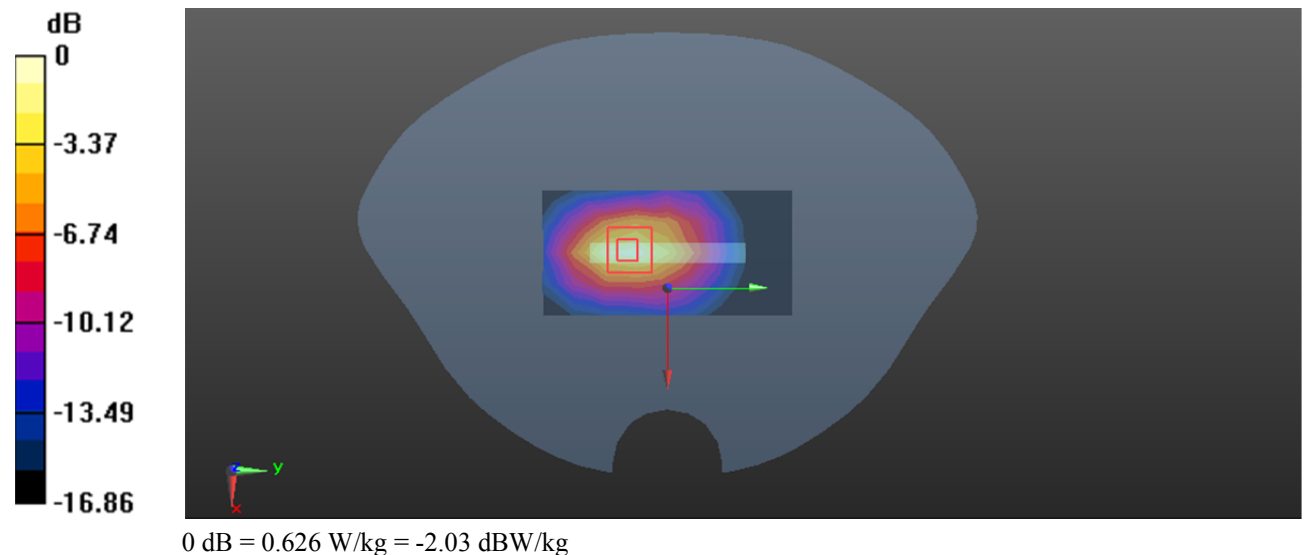

Test Plot 9#: WCDMA Band 2 Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.202 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

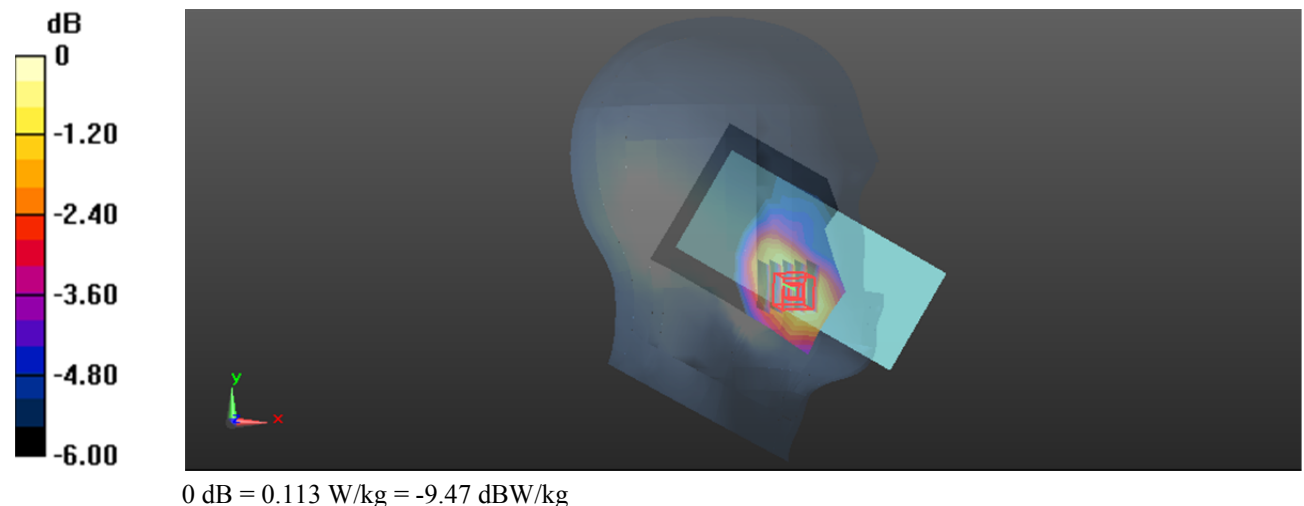

Test Plot 10#: WCDMA Band 2 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.061 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

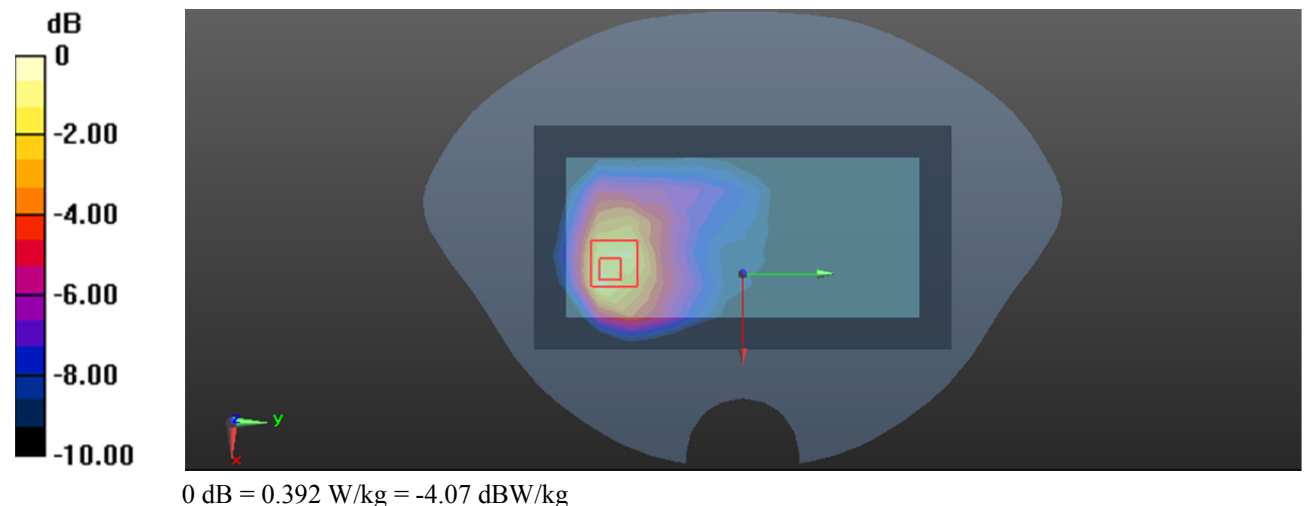

Test Plot 11#: WCDMA Band 2 Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.656 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.64 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.879 W/kg

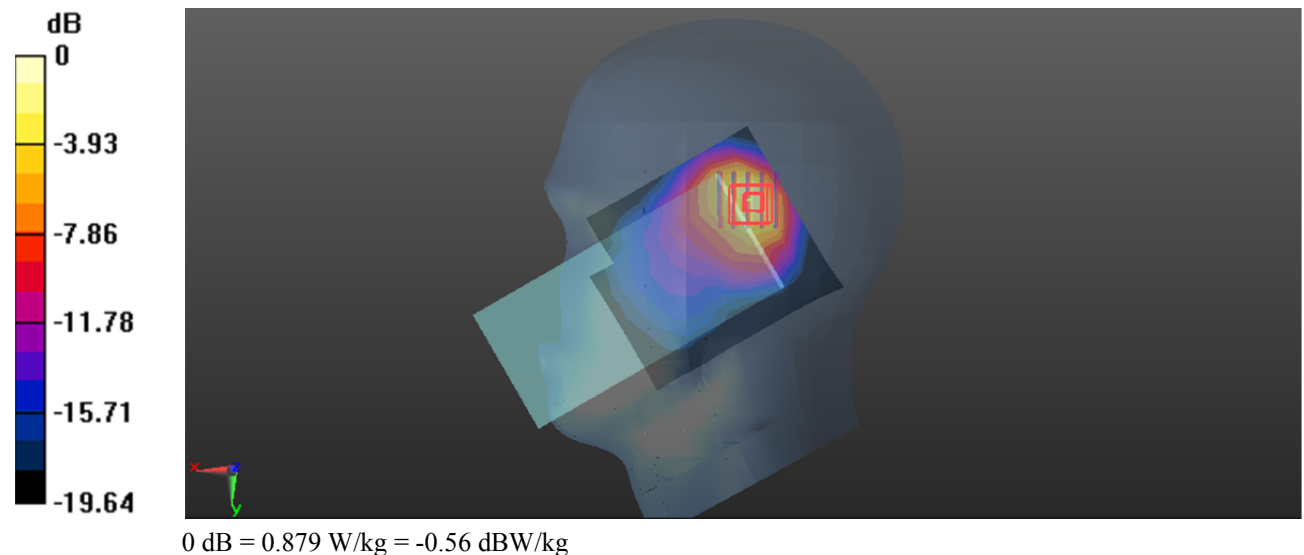

Test Plot 12#: WCDMA Band 2 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.705$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.350 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.81 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

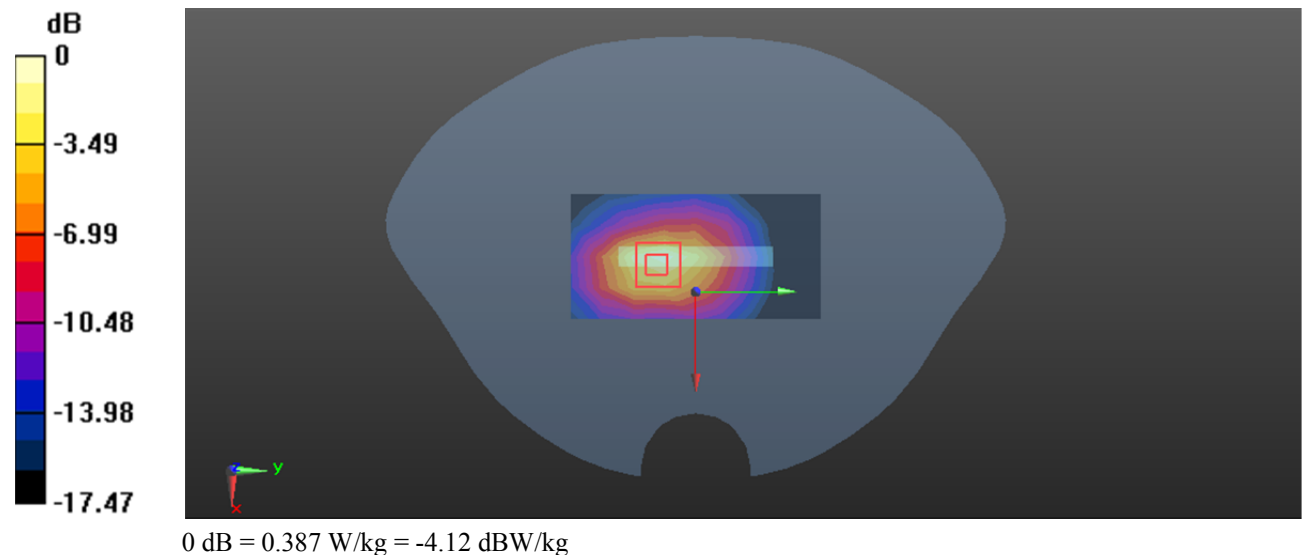

Test Plot 13#: WCDMA Band 4 Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 41.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0445 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.214 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0423 W/kg

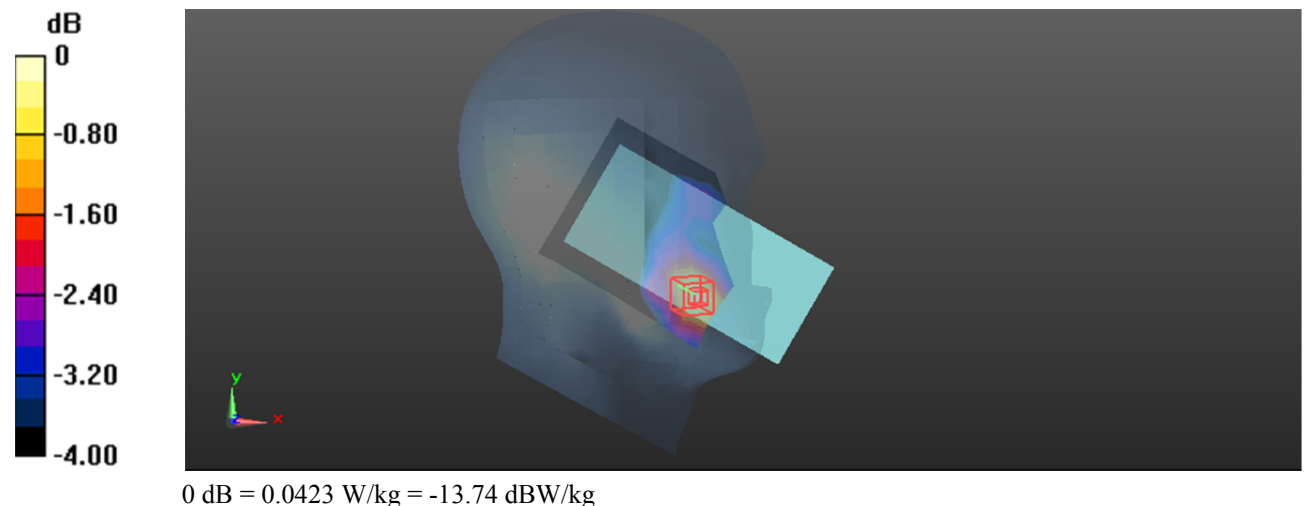

Test Plot 14#: WCDMA Band 4 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 41.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.224 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.271 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

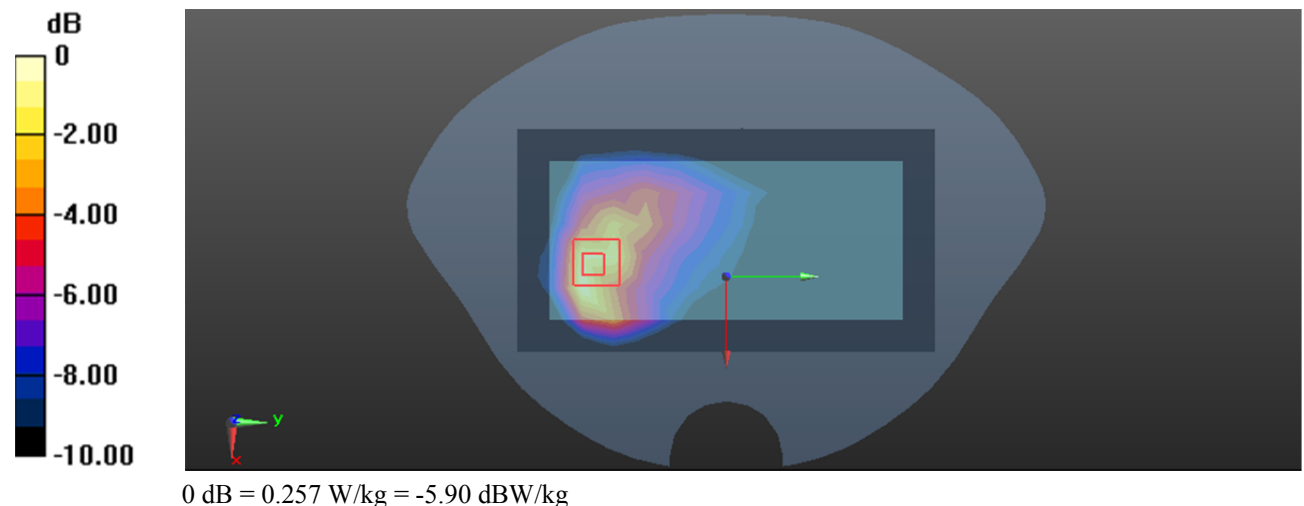

Test Plot 15#: WCDMA Band 4 Low ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1712.4 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

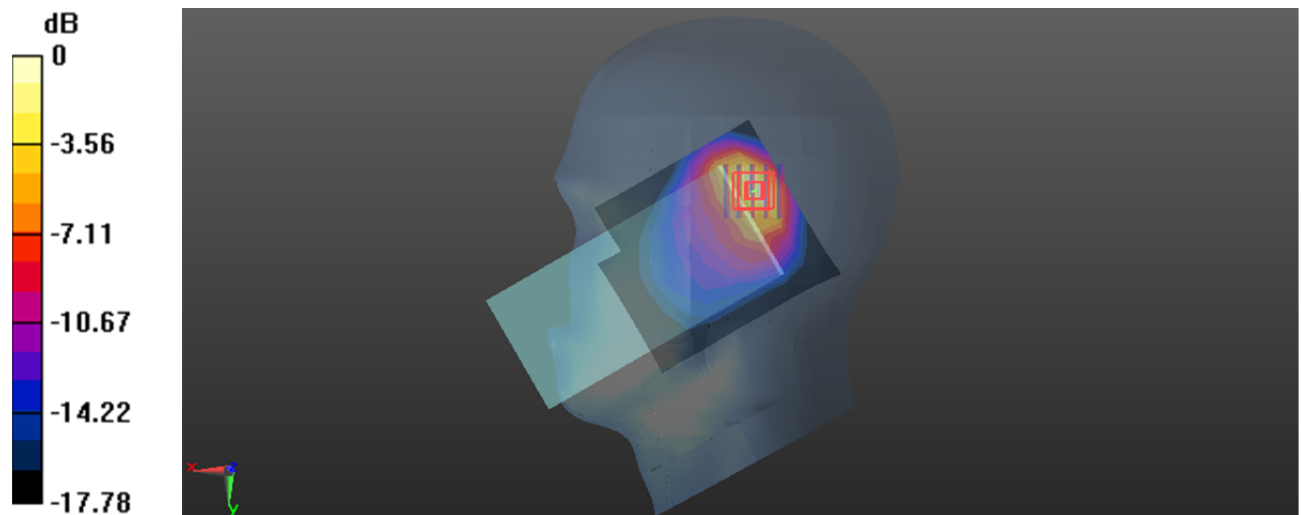

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Plot 16#: WCDMA Band 4 Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 41.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.70 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

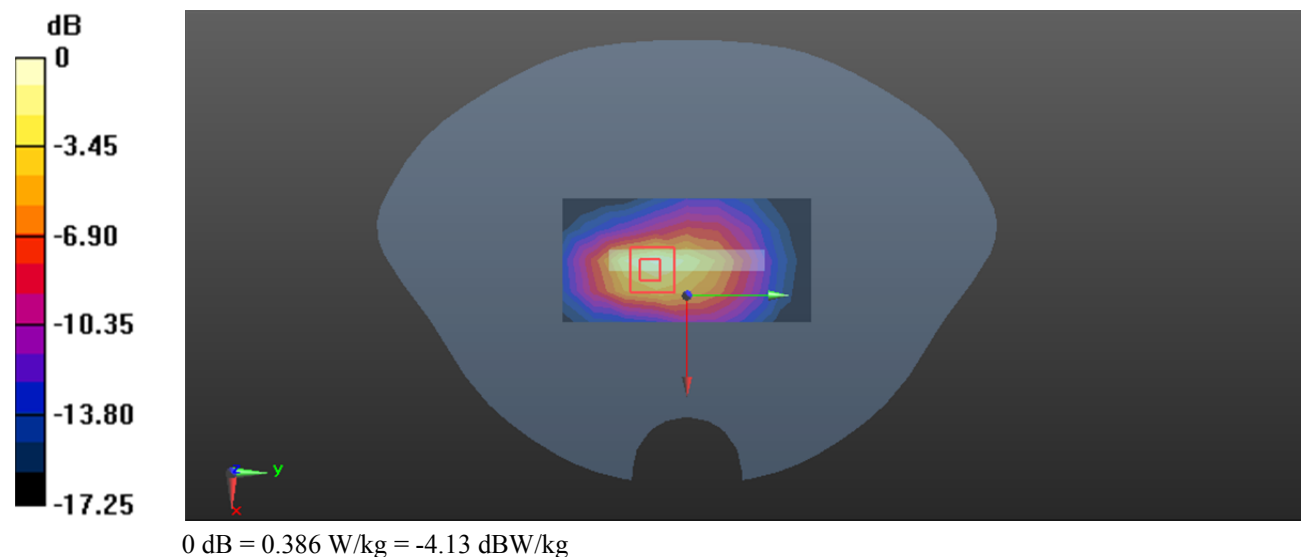

Test Plot 17#: WCDMA Band 5 Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0343 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.751 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0350 W/kg

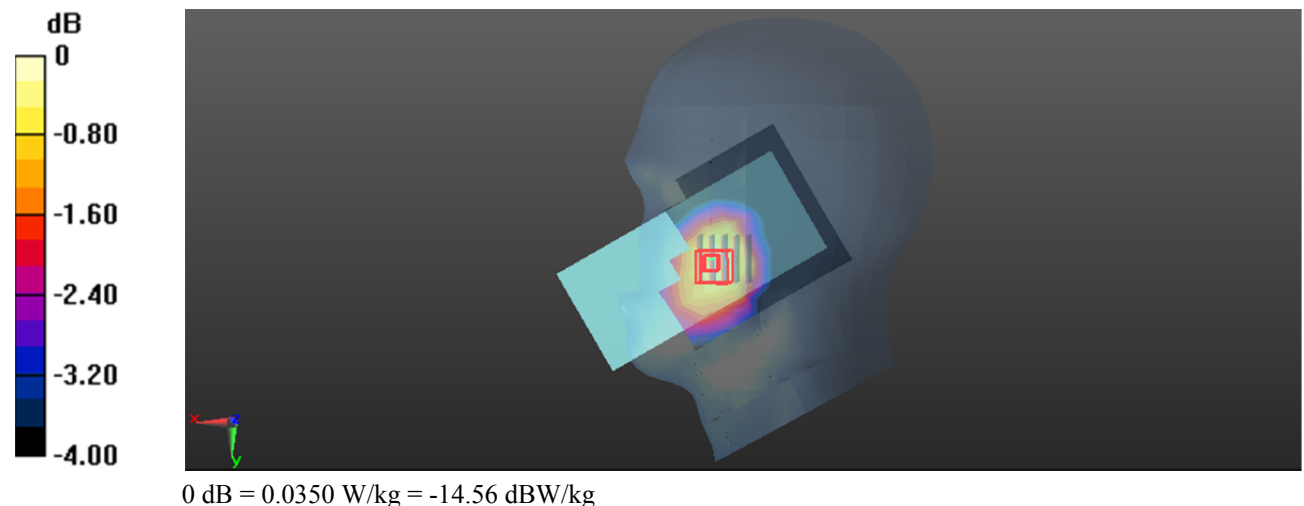

Test Plot 18#: WCDMA Band 5 Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0930 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.077 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

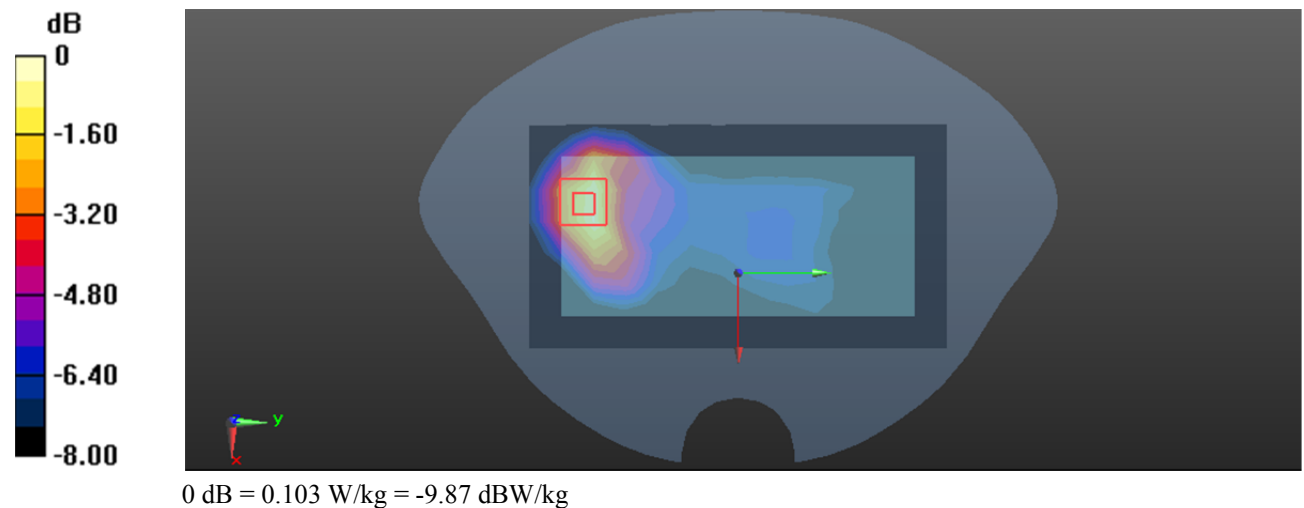

Test Plot 19#: WCDMA Band 5 Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.483 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.67 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

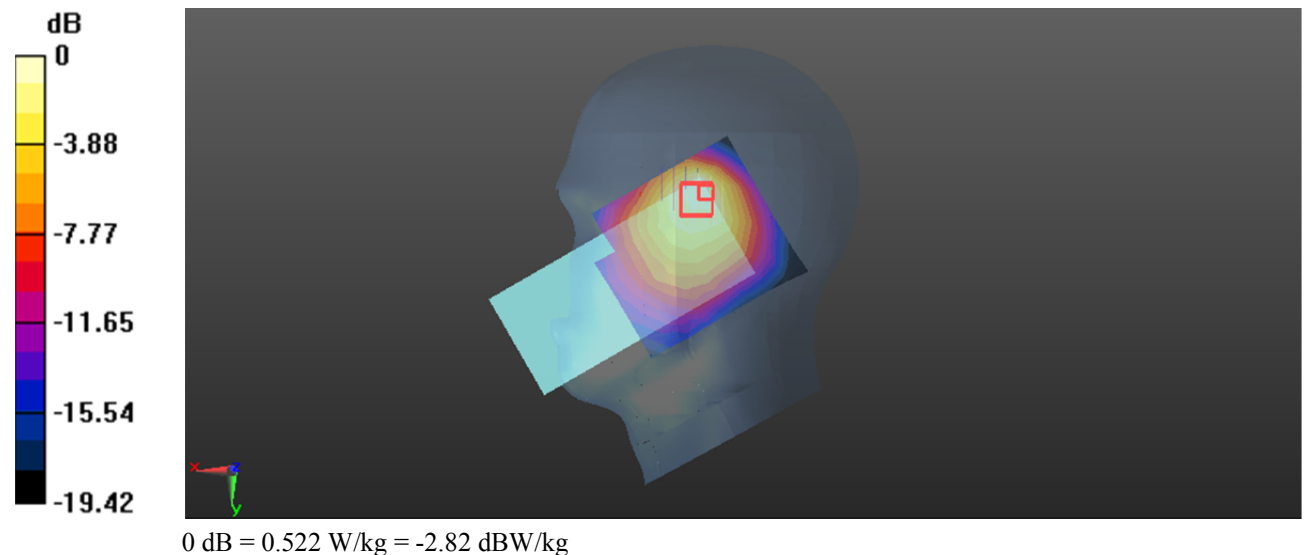

Test Plot 20#: WCDMA Band 5 Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.127$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.6 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.991 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

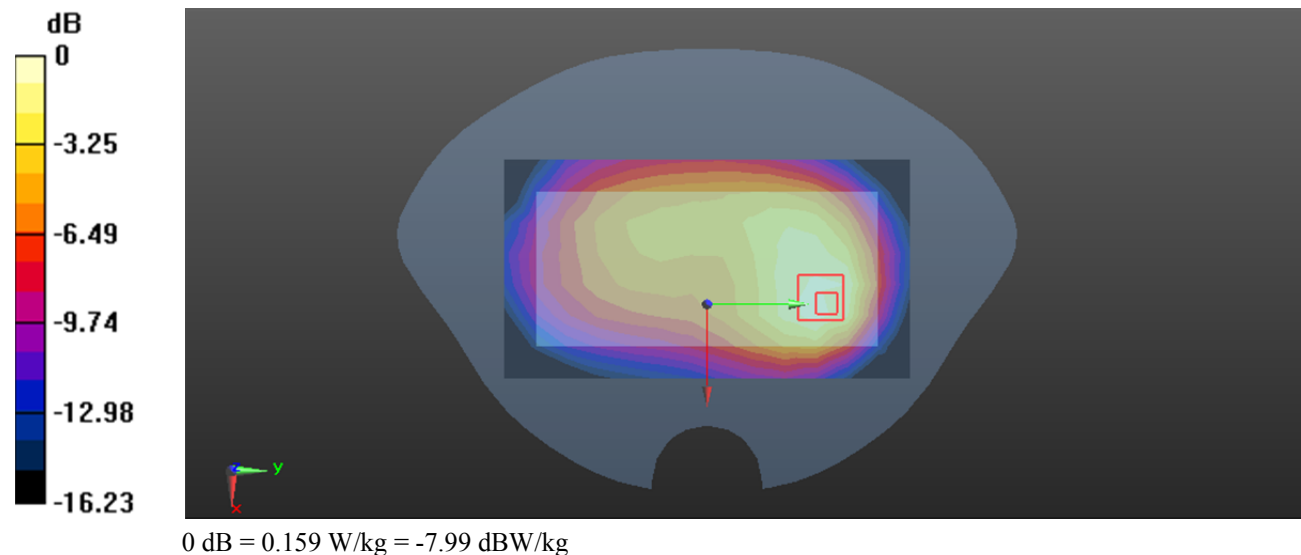

Test Plot 21#: LTE Band 2 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.209 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

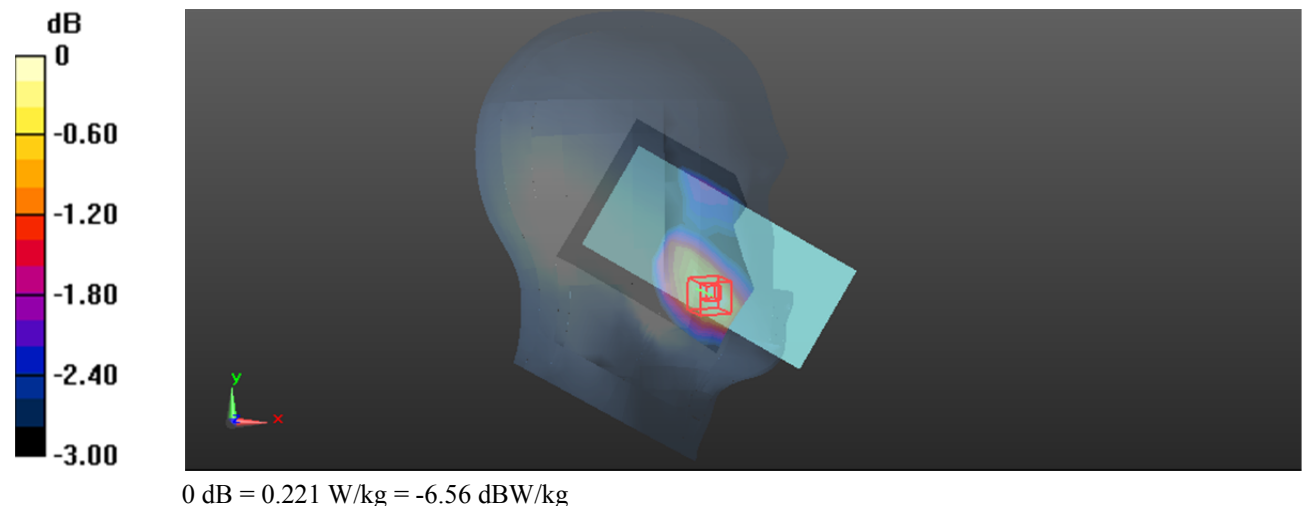

Test Plot 22#: LTE Band 2 50%RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.669 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.761 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

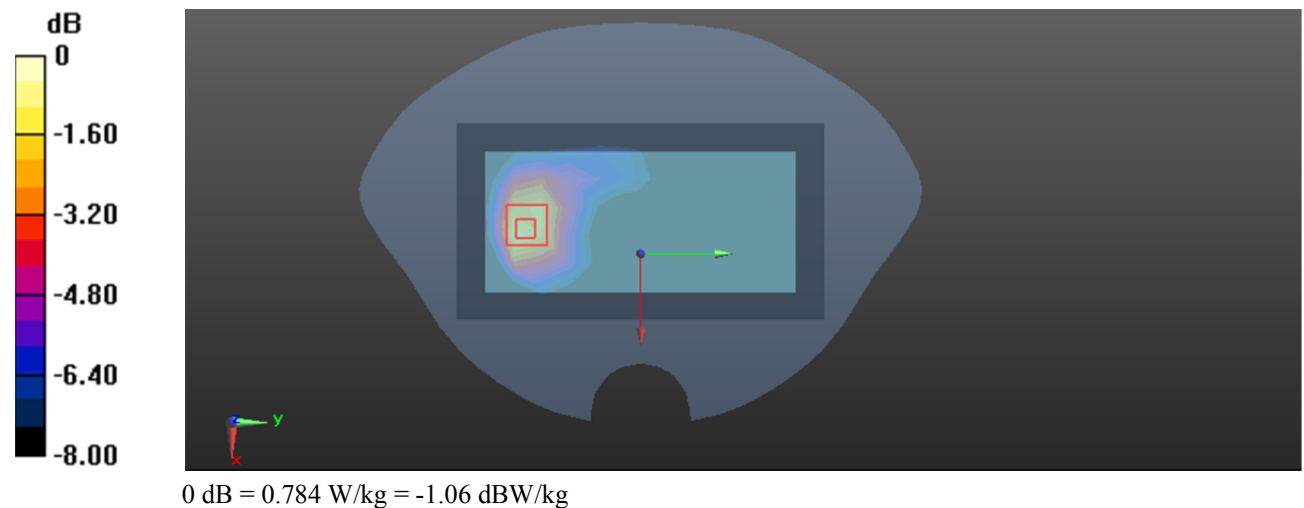

Test Plot 23#: LTE Band 2 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.942 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

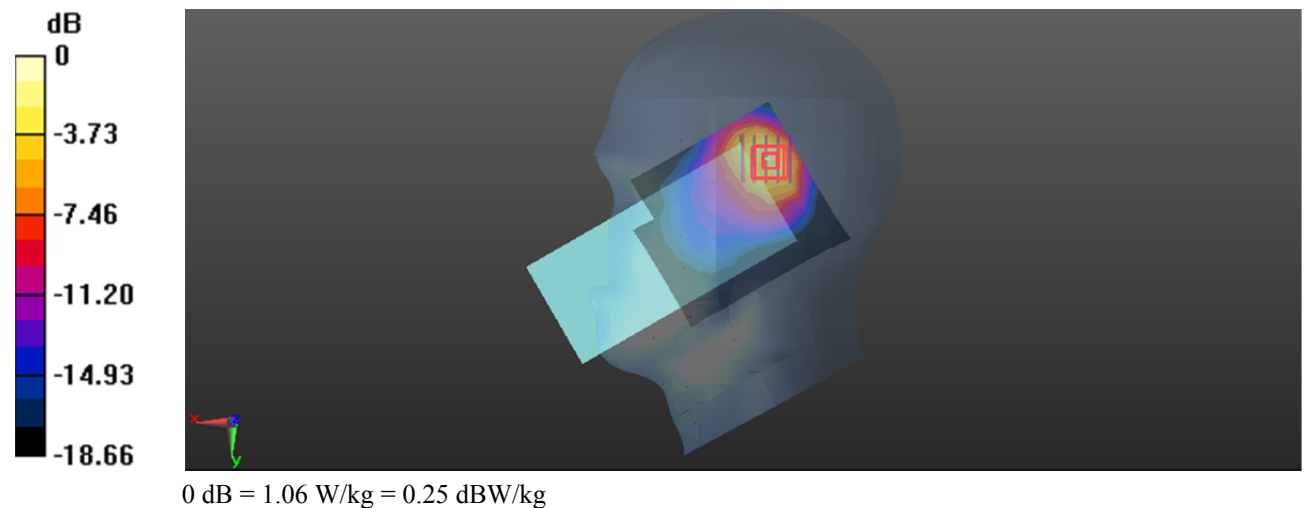

Test Plot 24#: LTE Band 2 1RB Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.548$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1880 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.655 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.08 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

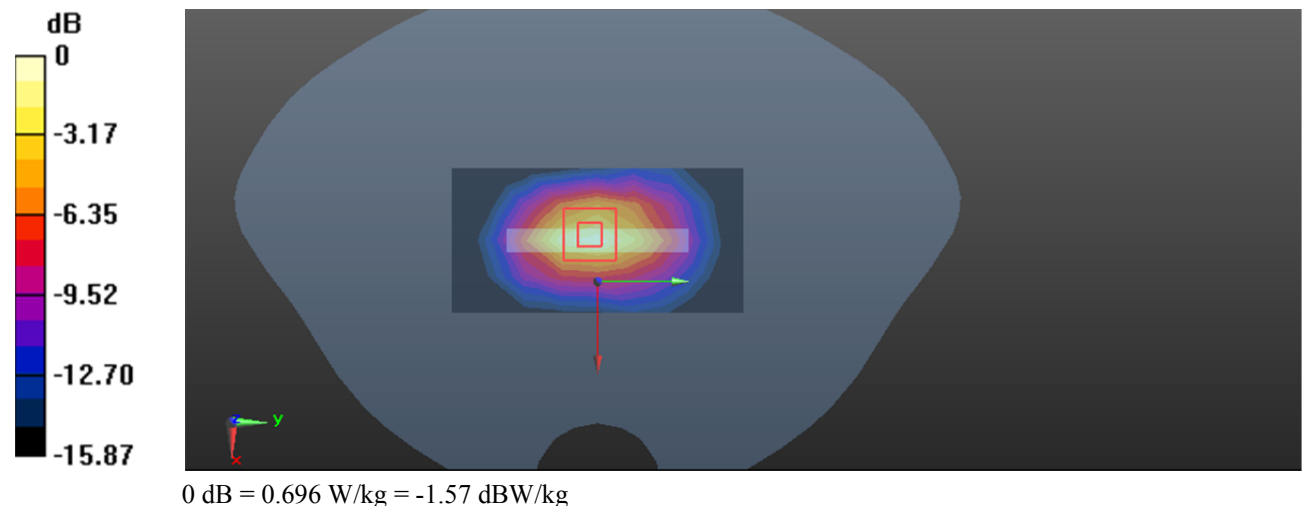

Test Plot 25#: LTE Band 4 50%RB Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 41.029$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.226 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.022 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

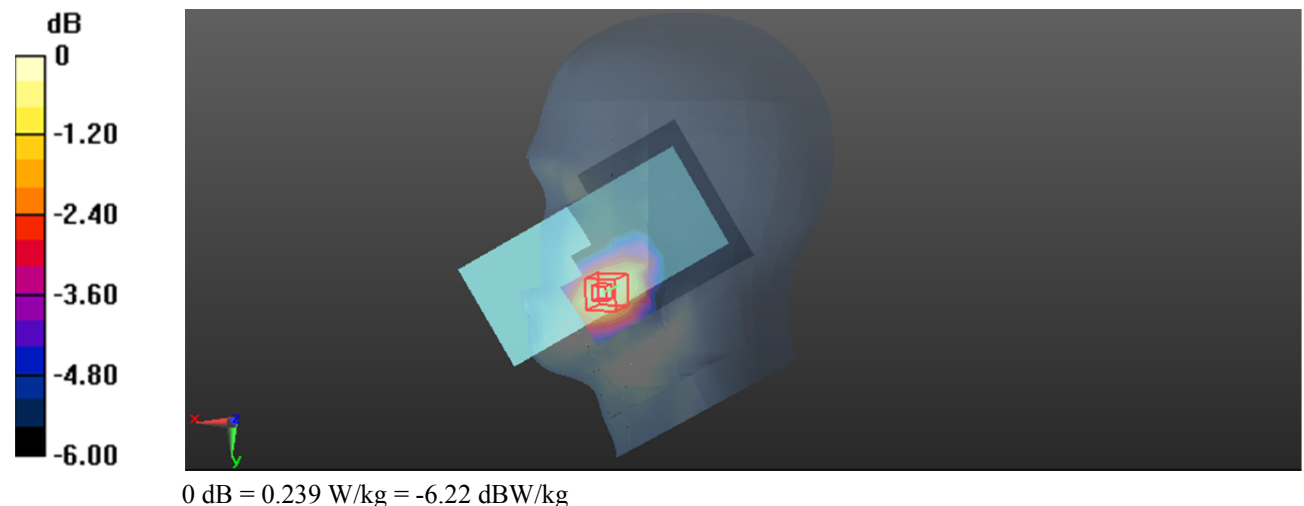

Test Plot 26#: LTE Band 4 50%RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 41.029$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.633 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.834 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

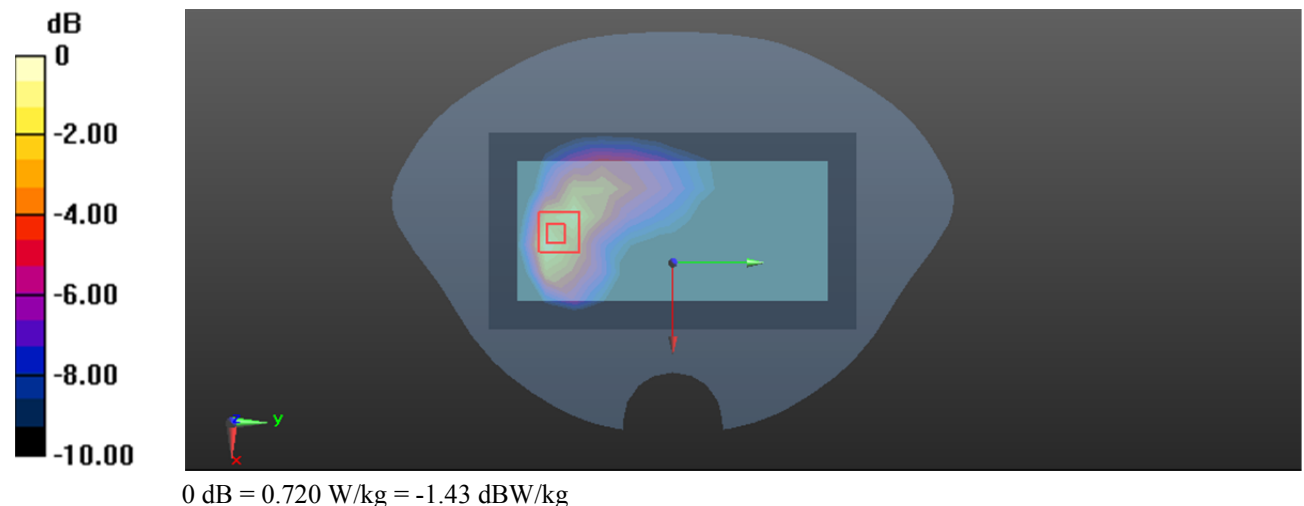

Test Plot 27#: LTE Band 4 50%RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 41.029$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.580 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

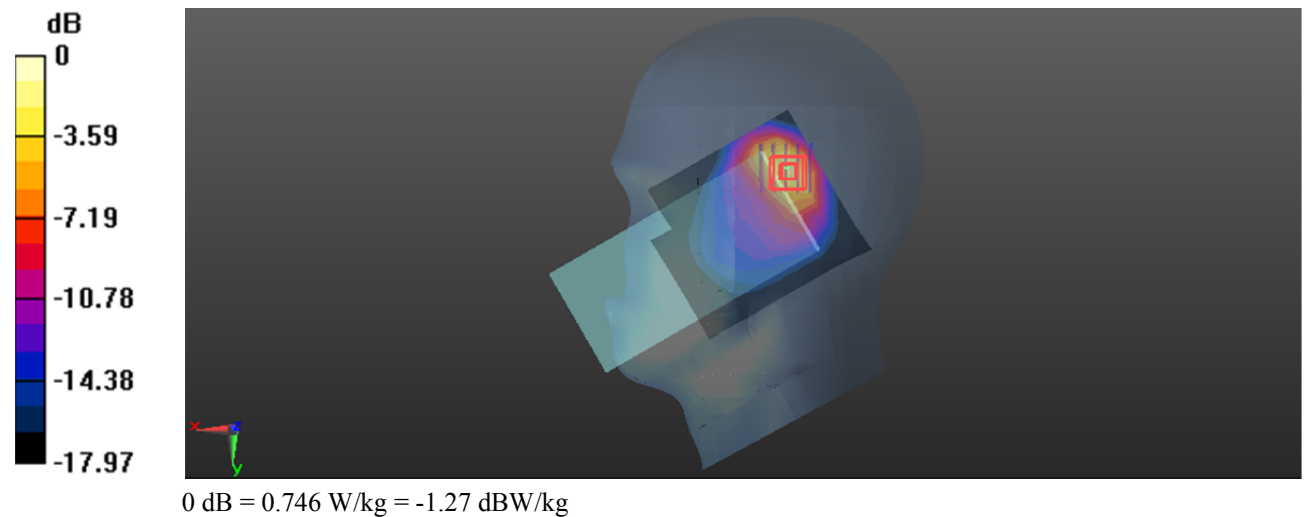

Test Plot 28#: LTE Band 4 1RB Mid ANT1 Body Top**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 41.029$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1732.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.412 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.69 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

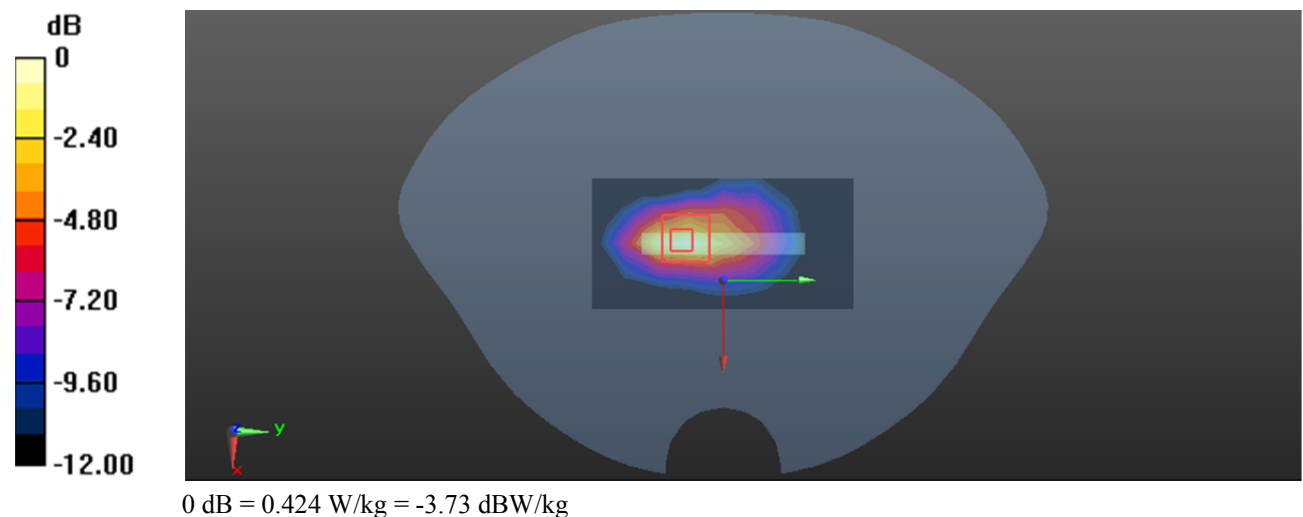

Test Plot 29#: LTE Band 5 1RB Mid ANT0 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.677$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.536 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

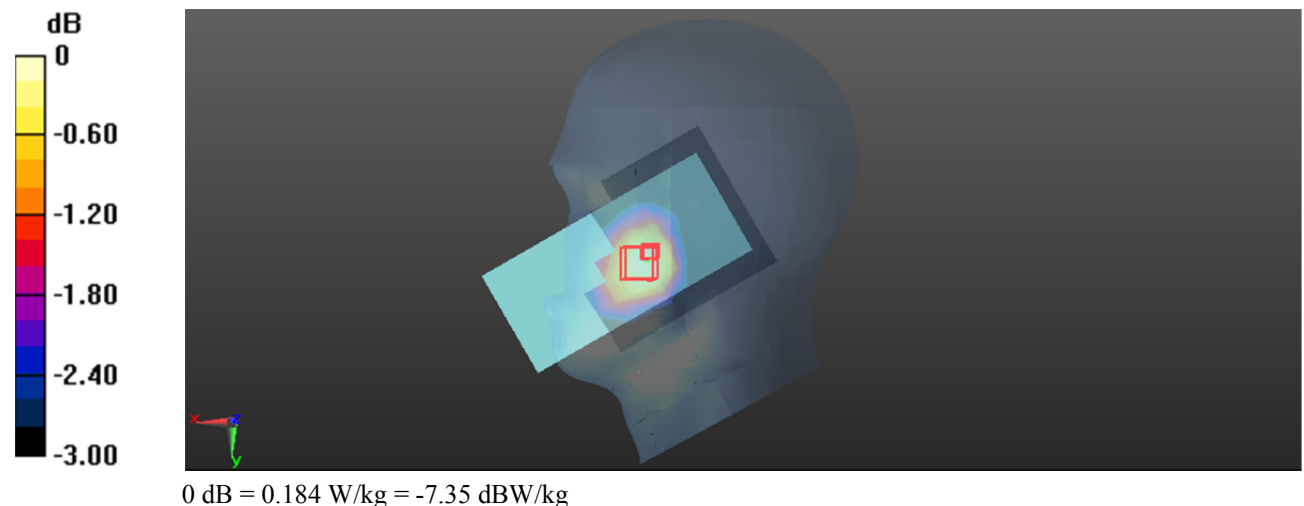

Test Plot 30#: LTE Band 5 1RB Mid ANT0 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.677$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.228 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

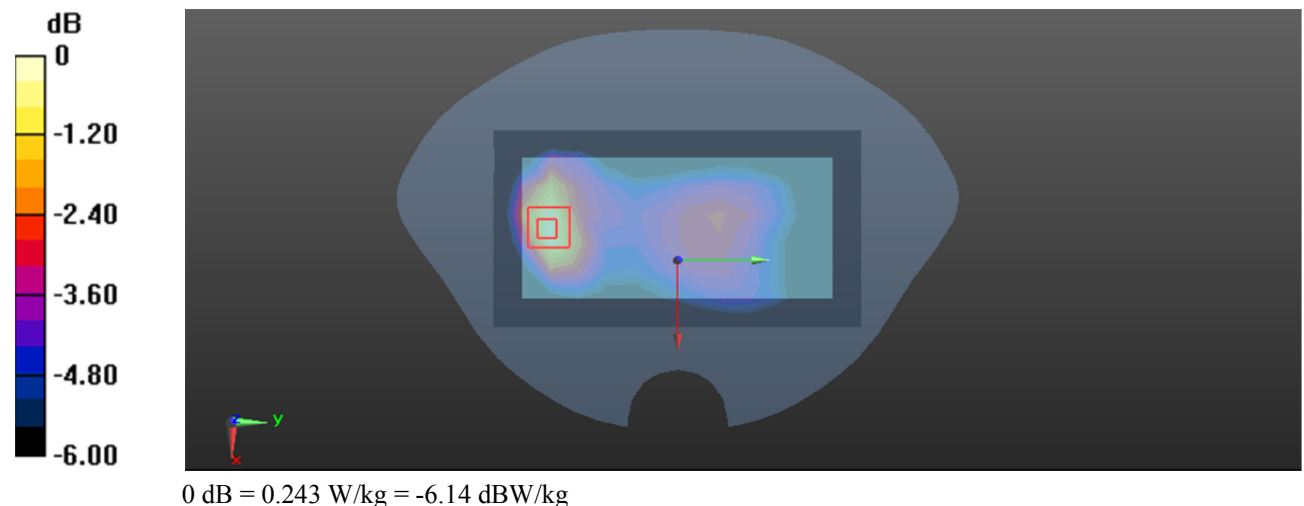

Test Plot 31#: LTE Band 5 50%RB Mid ANT1 Head Right Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.677$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.457 W/kg


Zoom Scan (5x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.75 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

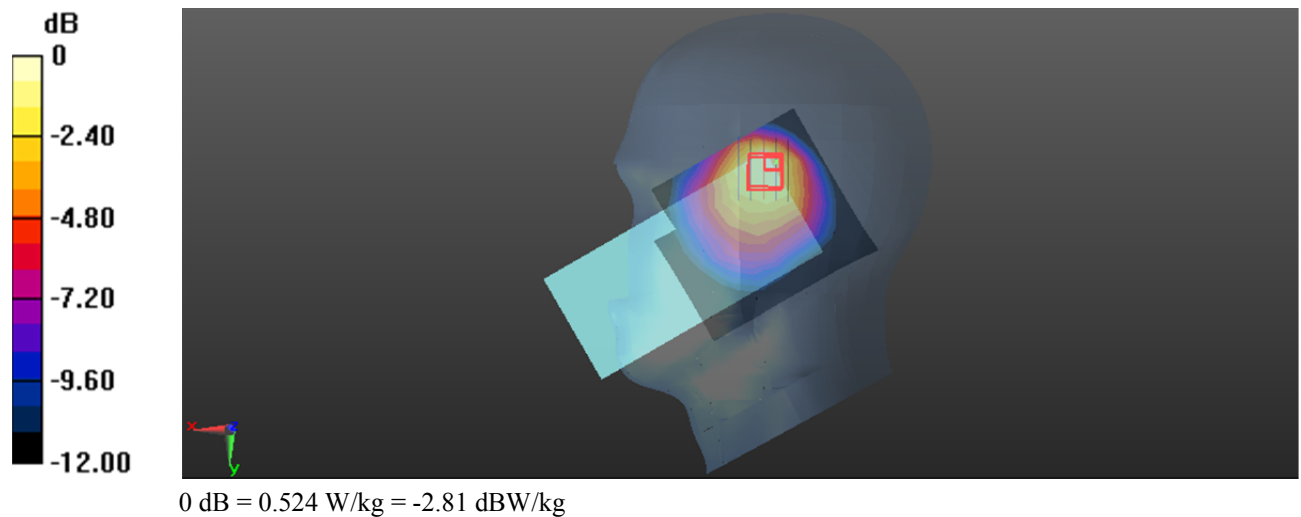

Test Plot 32#: LTE Band 5 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.677$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @836.5 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.194 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.439 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

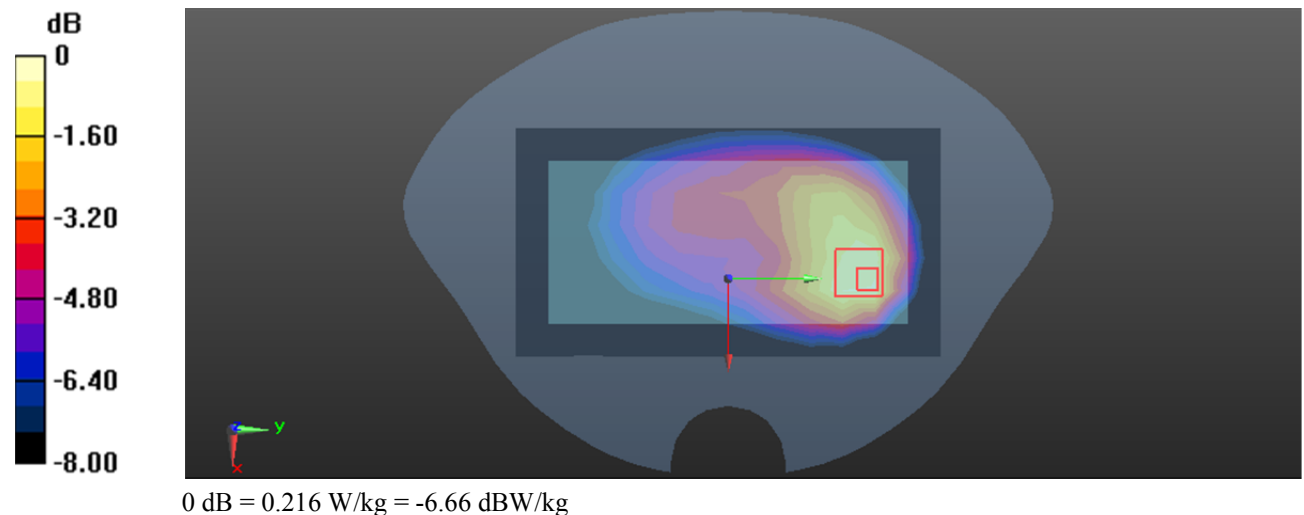

Test Plot 33#: LTE Band 7 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.374$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2535 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.354 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.901 V/m; Power Drift = 0.20dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

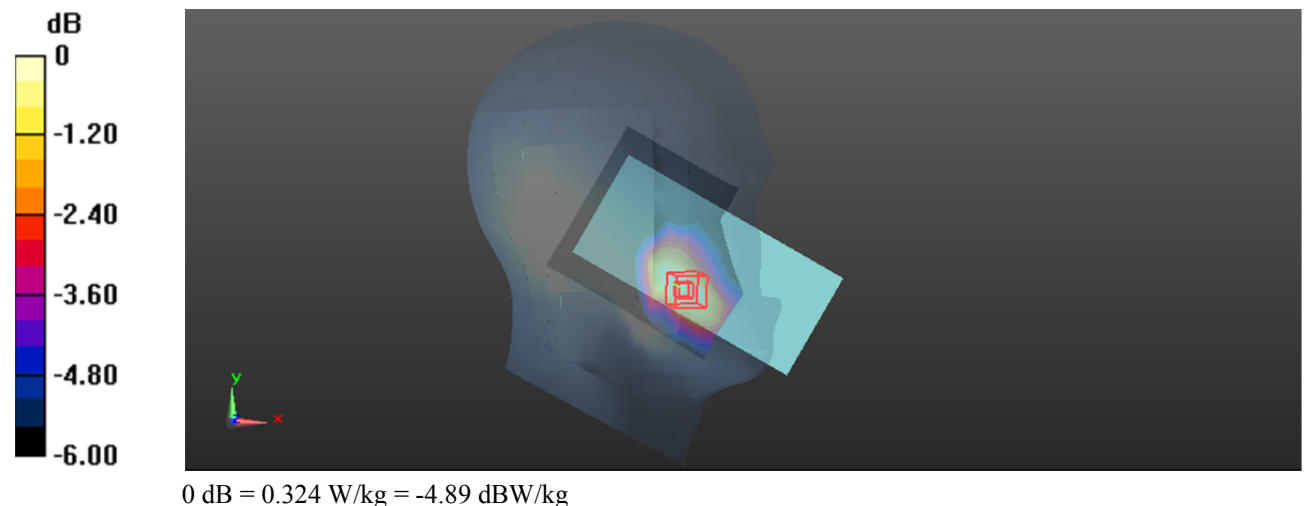

Test Plot 34#: LTE Band 7 1RB High ANT0 Body Bottom**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.142$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2560 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.05 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.64 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

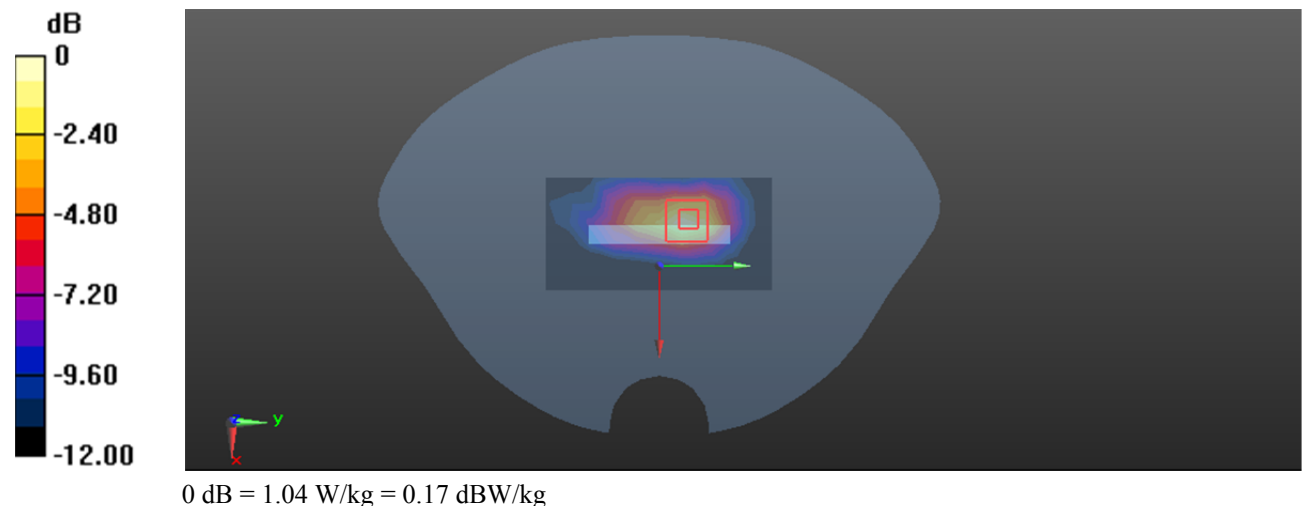

Test Plot 35#: LTE Band 7 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.374$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2535 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.016 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

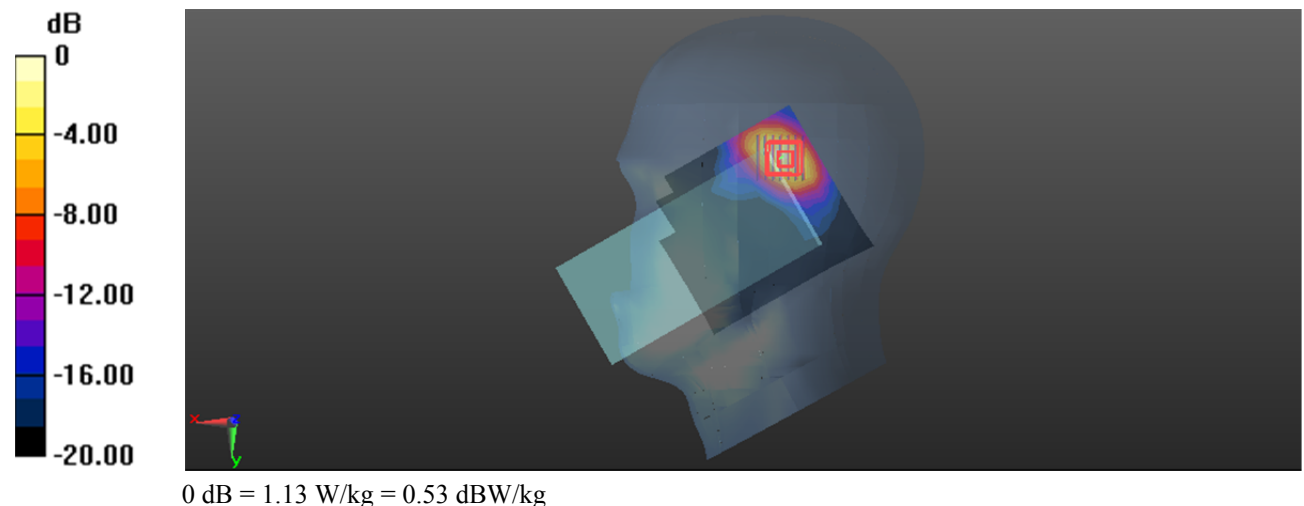

Test Plot 36#: LTE Band 7 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.374$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2535 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.994 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.112 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.938 W/kg

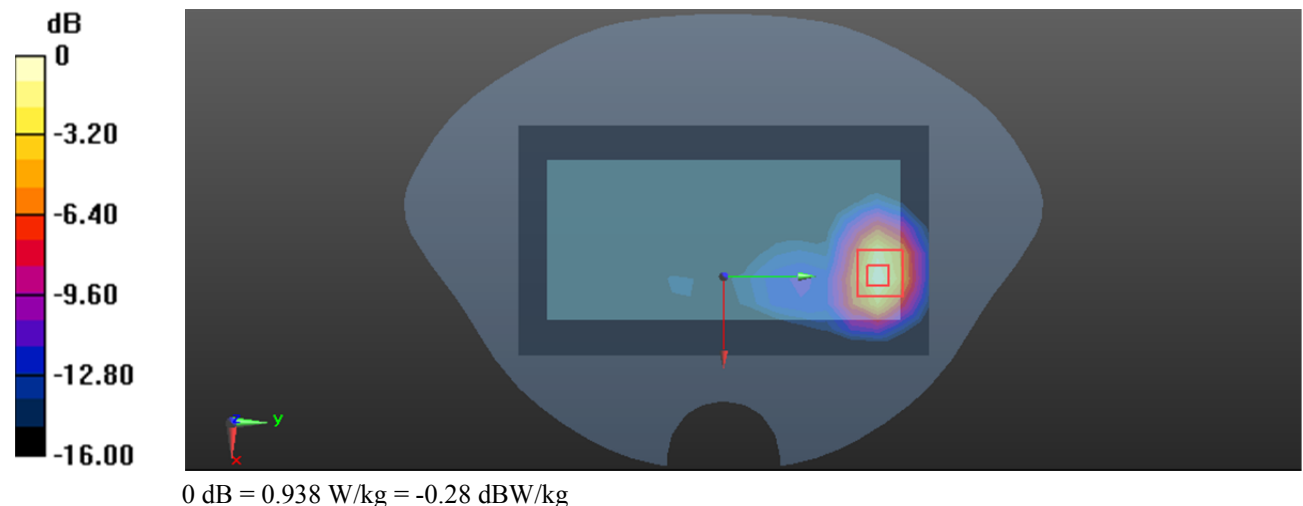

Test Plot 37#: LTE Band 38 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.230 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.086 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

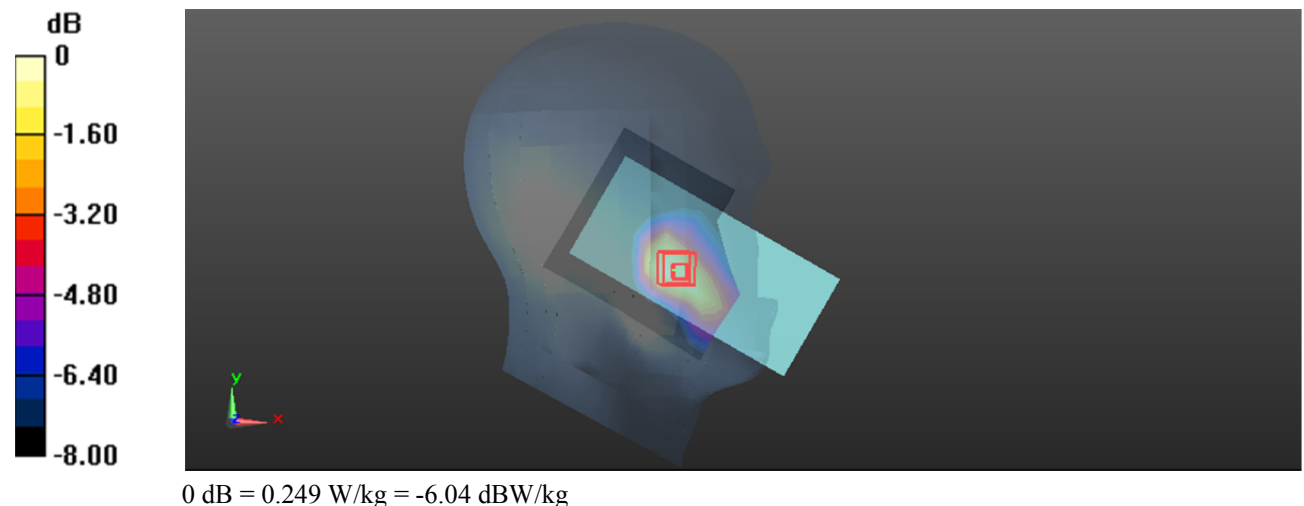

Test Plot 38#: LTE Band 38 1RB Mid ANT0 Body Bottom**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.385 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.451 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

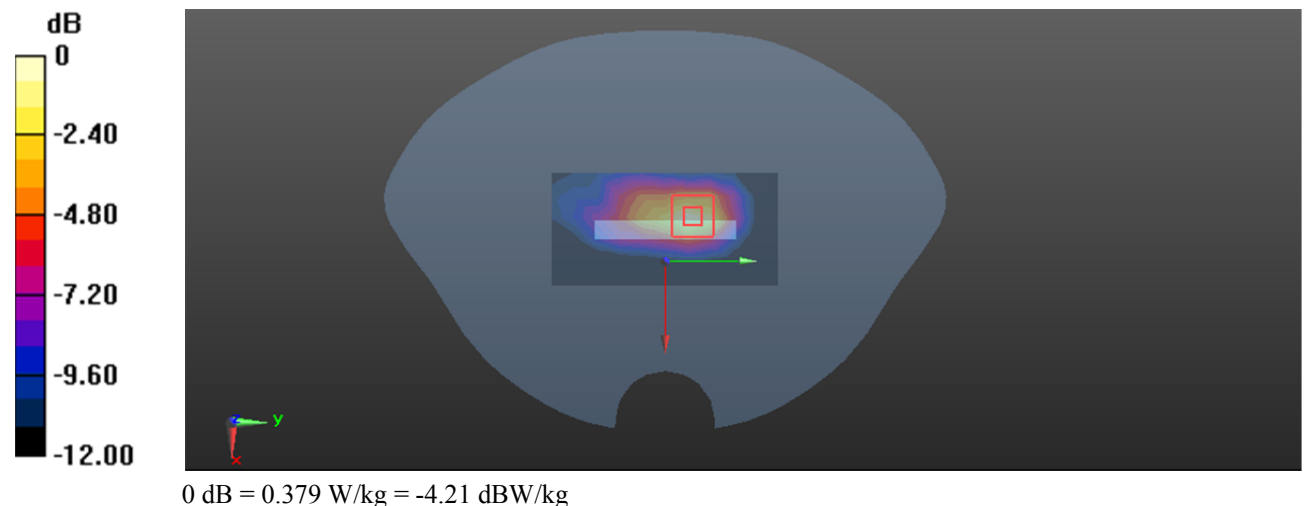

Test Plot 39#: LTE Band 38 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.847 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.819 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.964 W/kg

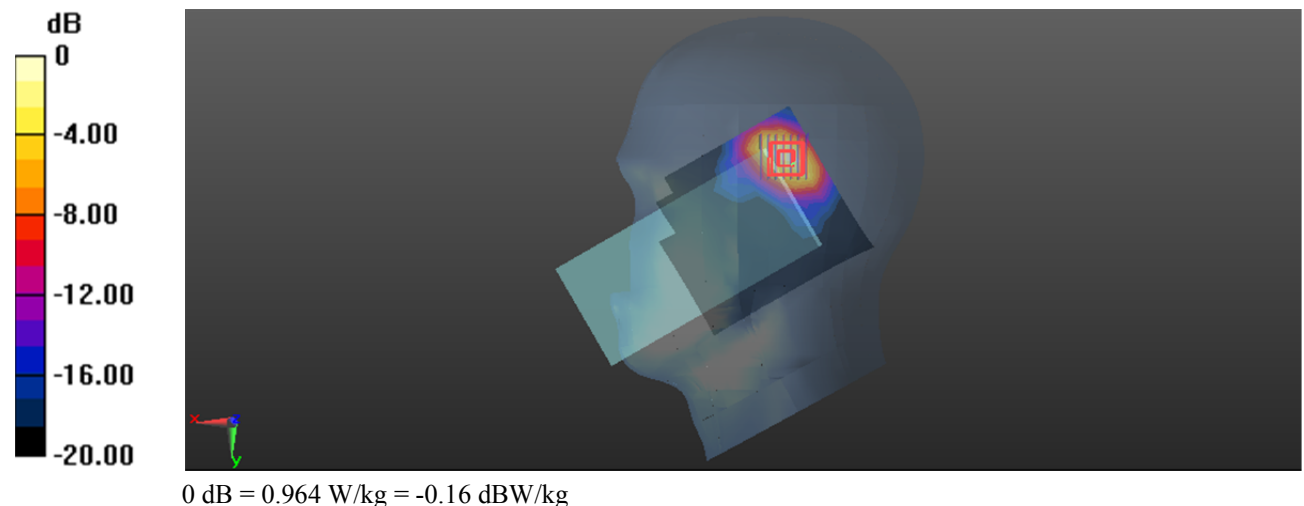

Test Plot 40#: LTE Band 38 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.715 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.773 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

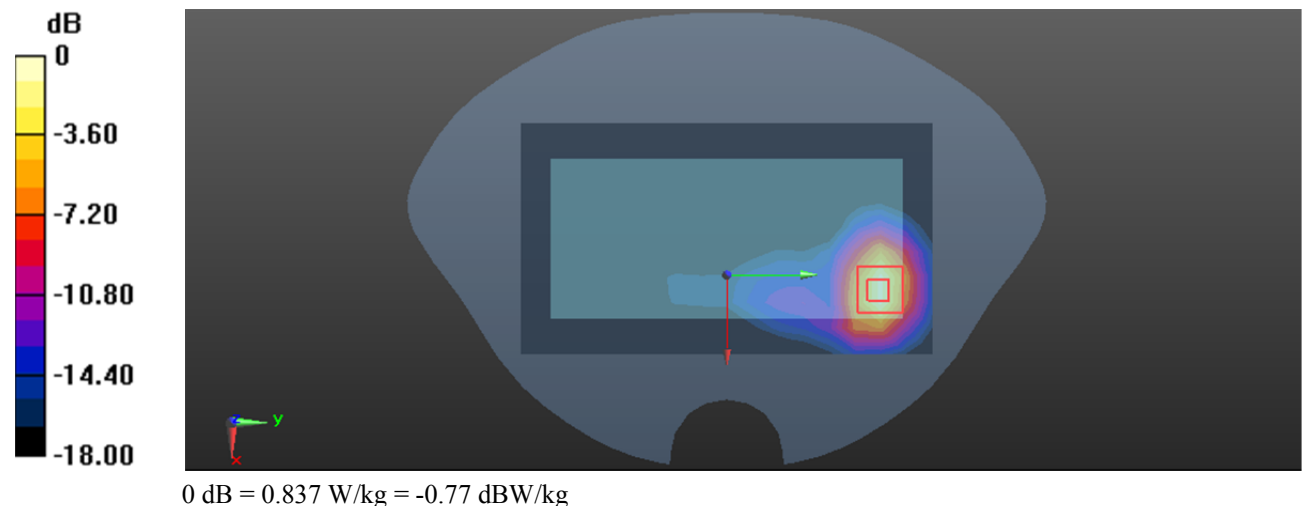

Test Plot 41#: LTE Band 41 1RB Mid ANT0 Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.674$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.226 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.302 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

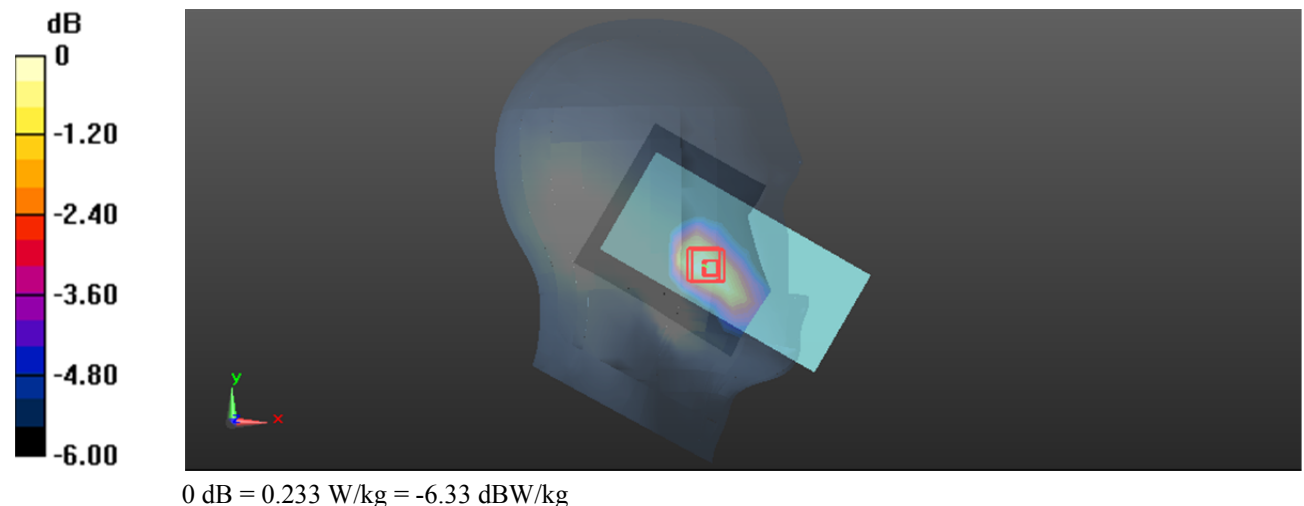

Test Plot 42#: LTE Band 41 1RB Mid ANT0 Body Bottom**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.674$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.345 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.847 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.358 W/kg

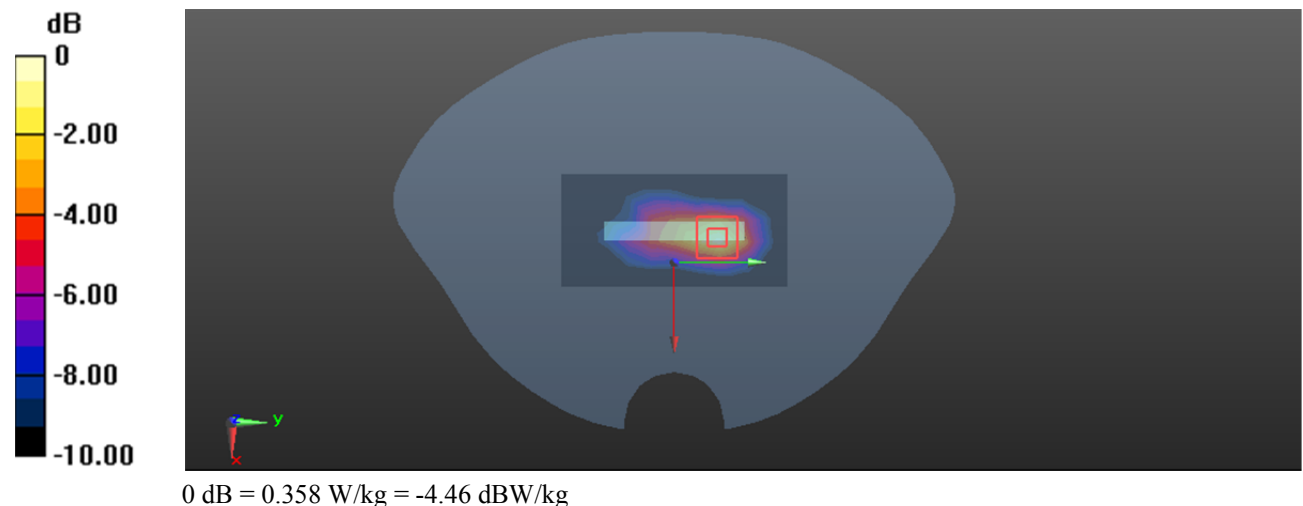

Test Plot 43#: LTE Band 41 1RB Mid ANT1 Head Right Tilt**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.674$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.854 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.999 V/m; Power Drift = 0.20dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

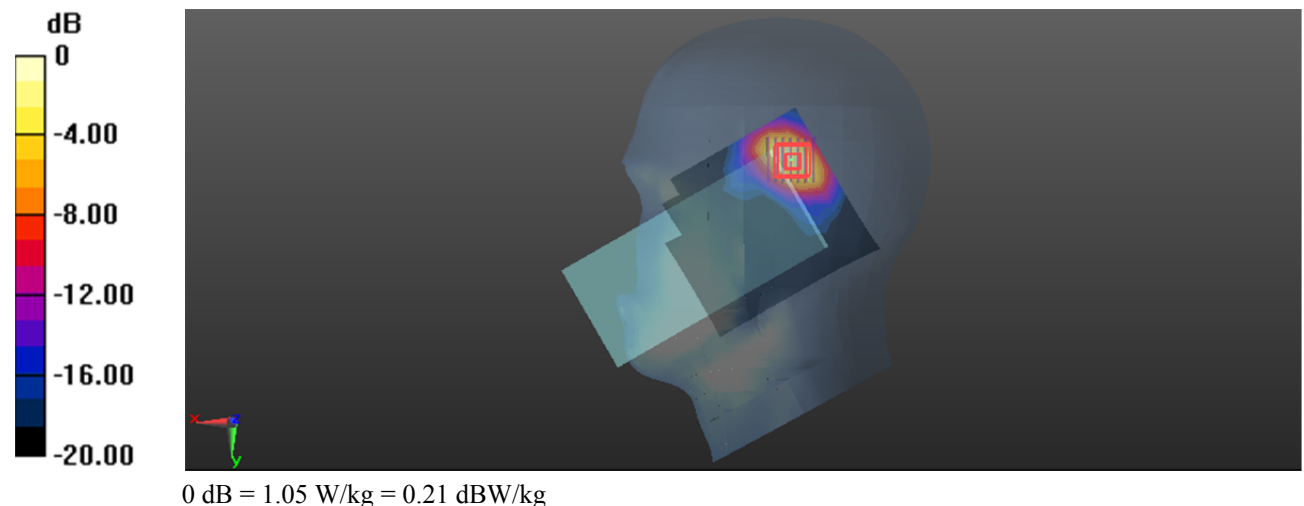

Test Plot 44#: LTE Band 41 1RB Mid ANT1 Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.674$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.55, 4.55, 4.55) @2595 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.748 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.338 V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.826 W/kg

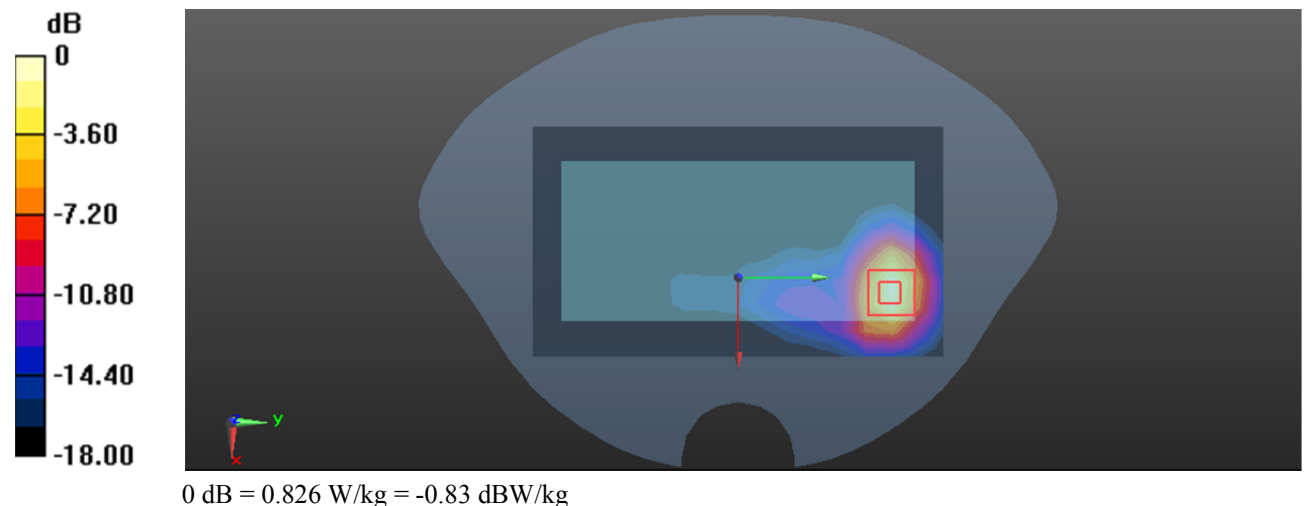

Test Plot 45#: 2.4G WIFI Mid Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: 802.11 b(2412-2462MHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.021
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2437 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.475 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.727 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

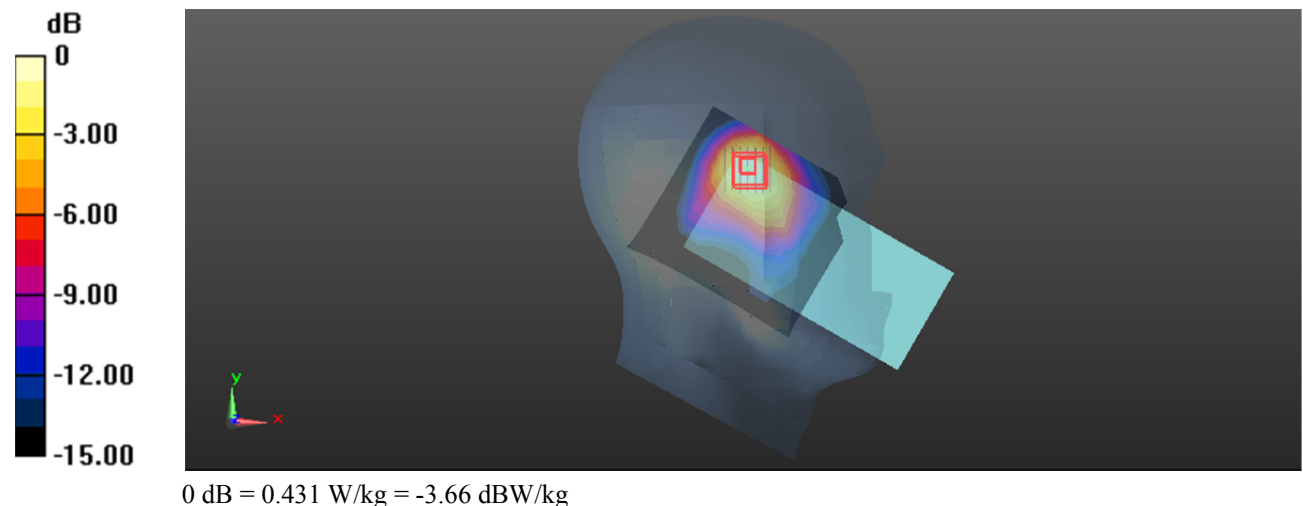

Test Plot 46#: 2.4G WIFI Mid Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: 802.11 b(2412-2462MHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.021
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2437 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.307 W/kg


Zoom Scan (8x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.633 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

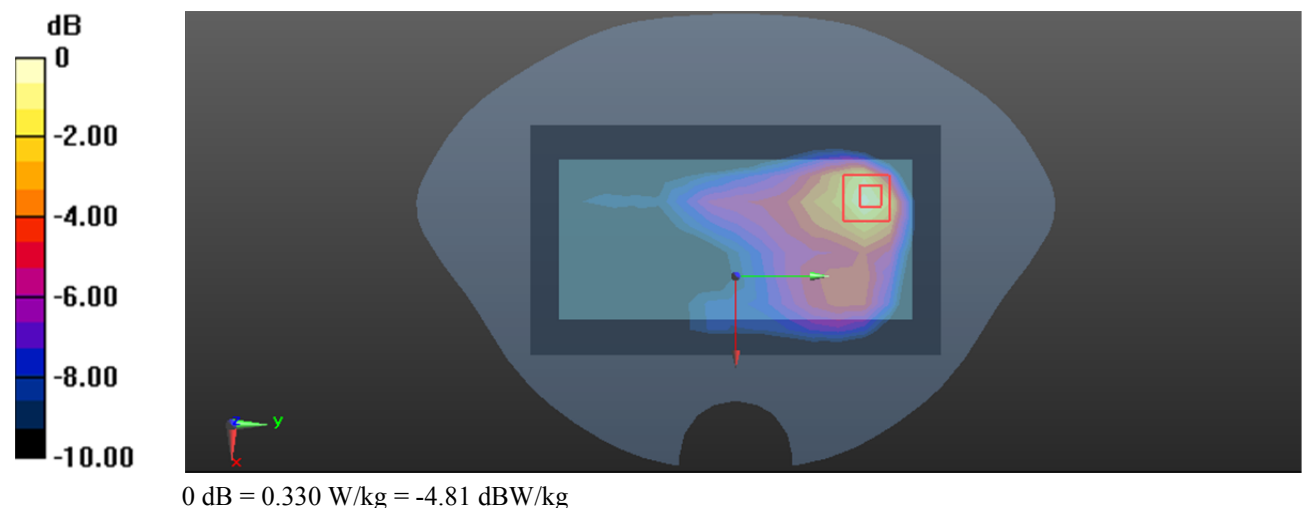

Test Plot 47#: WLAN 5.3G 802.11a Mid Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.759 \text{ S/m}$; $\epsilon_r = 36.369$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.580 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.824 W/kg

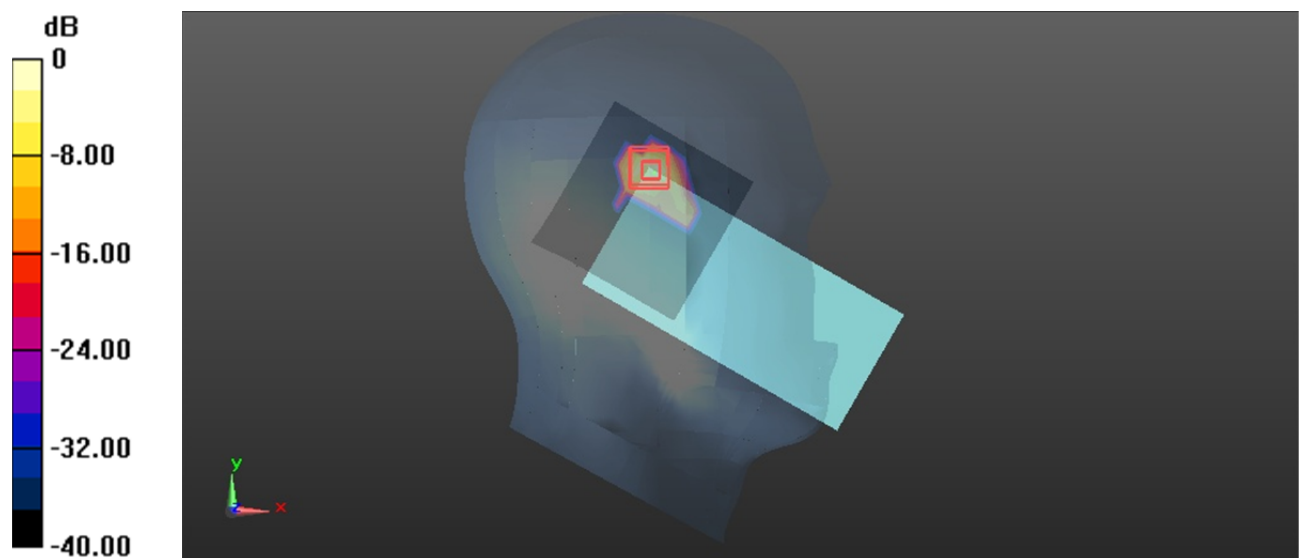 $0 \text{ dB} = 0.824 \text{ W/kg} = -0.84 \text{ dBW/kg}$

Test Plot 48#: WLAN 5.3G 802.11a Mid Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.759 \text{ S/m}$; $\epsilon_r = 36.369$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.267 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.799 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

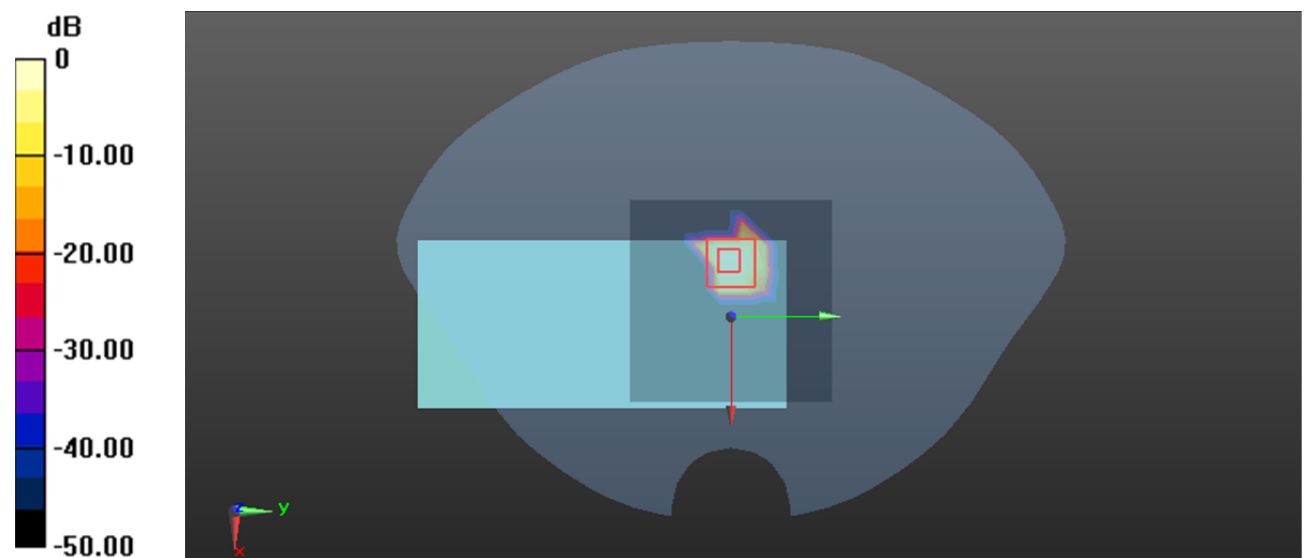 $0 \text{ dB} = 0.359 \text{ W/kg} = -4.45 \text{ dBW/kg}$

Test Plot 49#: WLAN 5.6G 802.11a Mid Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**


Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.048 \text{ S/m}$; $\epsilon_r = 35.751$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

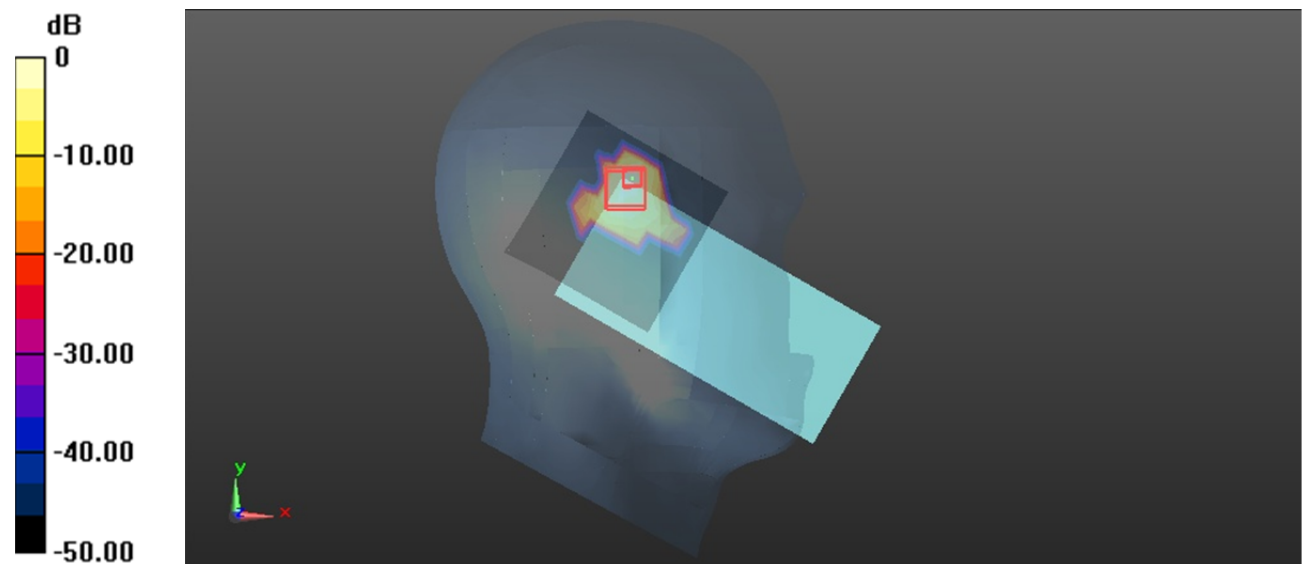Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.630 W/kg **Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.52 W/kg **SAR(1 g) = 0.268 W/kg ; SAR(10 g) = 0.078 W/kg** Maximum value of SAR (measured) = 0.615 W/kg  $0 \text{ dB} = 0.615 \text{ W/kg} = -2.11 \text{ dBW/kg}$

Test Plot 50#: WLAN 5.6G 802.11a Mid Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.048$ S/m; $\epsilon_r = 35.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.173 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.024 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

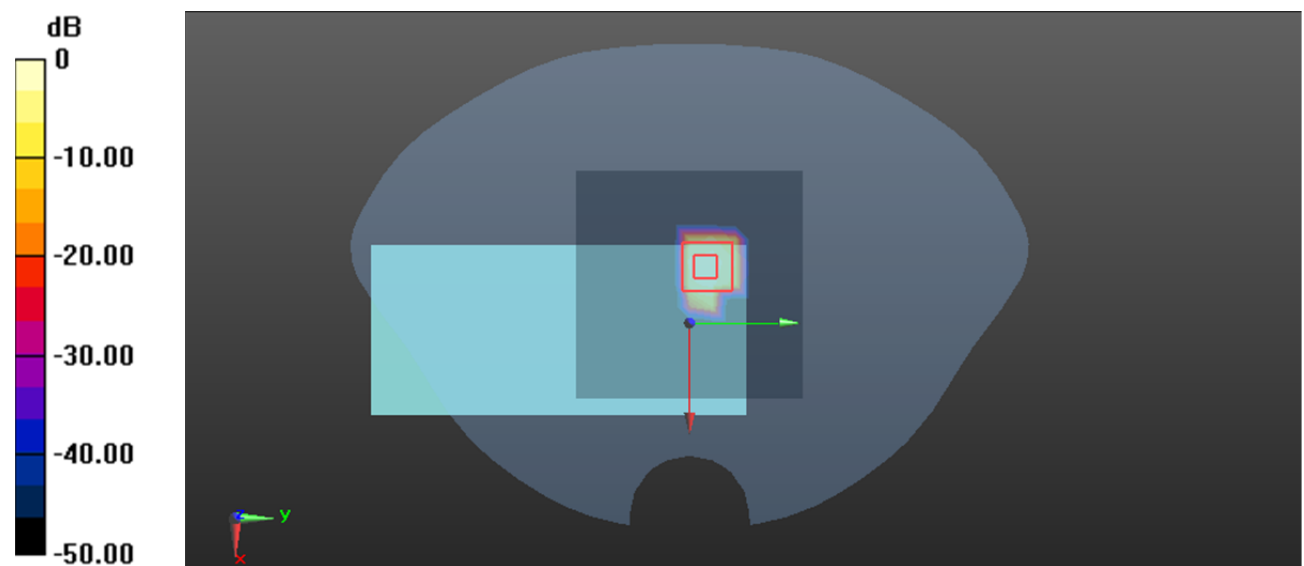

0 dB = 0.204 W/kg = -6.90 dBW/kg

Test Plot 51#: WLAN 5.8G 802.11a Mid Head Left Cheek**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 35.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.602 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.596 W/kg

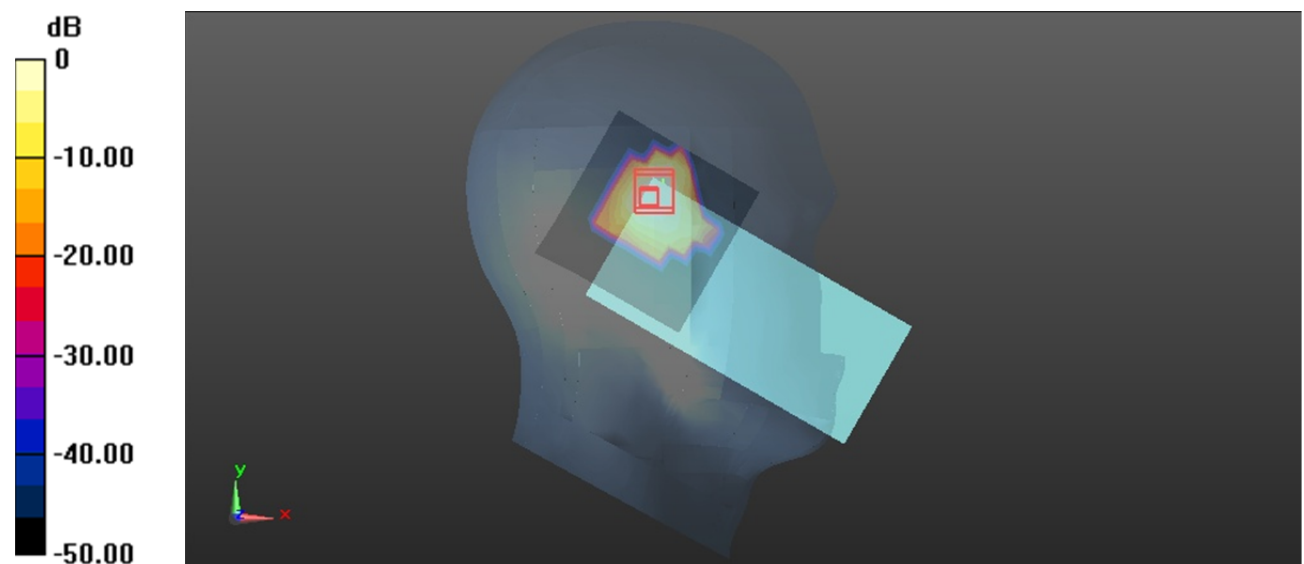

0 dB = 0.596 W/kg = -2.25 dBW/kg

Test Plot 52#: WLAN 5.8G 802.11a Mid Body Back**DUT: Mobile Phone; Type: X6725; Serial: 2Z6I-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.124

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.296 \text{ S/m}$; $\epsilon_r = 35.179$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @5745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.235 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.901 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

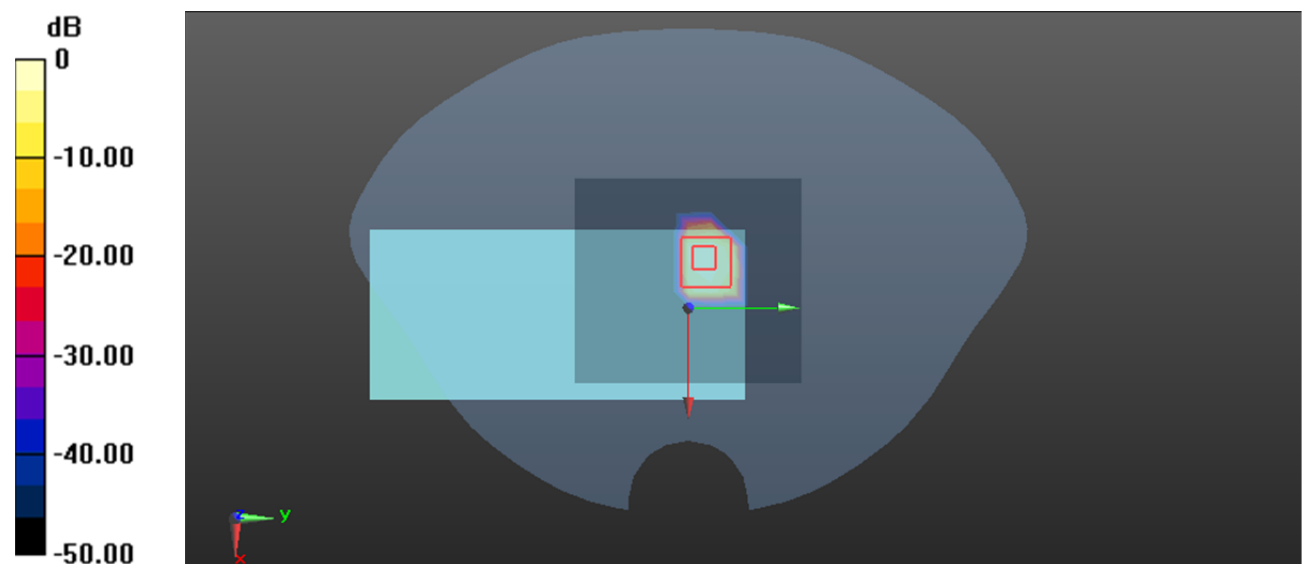

0 dB = 0.328 W/kg = -4.84 dBW/kg