



Report No.: TW2009393-02E File reference No.: 2020-10-27

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Laptop

Model No.: NP141AQ-T, N14550

Trademark: PACKARD BELL

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: October 27, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2009393-02E

Date: 2020-10-27



Page 2 of 46

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —**Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number: 5013.01

Page 3 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement Bandwidth.	24
8.0	Maximum Peak Output Power	29
9.0	Power Spectral Density Measurement.	31
10.0	Out of Band Measurement	36
11.0	Antenna Requirement	43
12.0	FCC ID Label.	44
13.0	Photo of Test Setup and EUT View.	45

Report No.: TW2009393-02E Page 4 of 46

Date: 2020-10-27



General Details 1.0

Test Lab Details 1.1

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

0755-84688843 Telephone:

Fax:

1.3 Description of EUT

Product: Laptop

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Brand Name: PACKARD BELL

Additional Brand Name: N/A

Model Number: NP141AQ-T Additional Model Number: N14550

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Test Voltage: DC12V, 2A

Power Adapter Model: FJ-SW1202000U;

Input: 100-240V~50/60Hz 0.6A Max; Output: DC12V, 2000mA

The report refers only to the sample tested and does not apply to the bulk.

adopt any other remedies which may be appropriate.

Report No.: TW2009393-02E Page 5 of 46

Date: 2020-10-27



1.4 Submitted Sample: 2 Samples

1.5 Test Duration 2020-09-29 to 2020-10-27

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Remark:

RF Test Software Name: DRTU.Ink

Power Setting Level: 1

Page 6 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2009393-02E

Date: 2020-10-27



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 46


Report No.: TW2009393-02E

Date: 2020-10-27



5.Power Line Conducted Emission Test

5.1 Schematics of the test

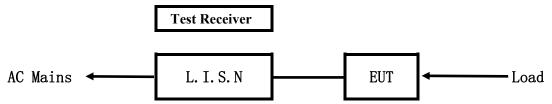


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 50 ohm/50 uH as specified by section 5.1 of ANSI C63.10 -2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

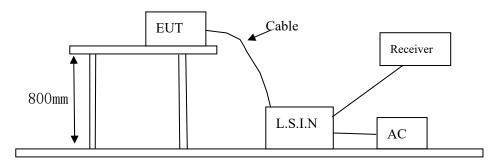

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Lon	Shenzhen Jingwah Information	NP141AQ-T,	RBD-NP141AT
Lapt	Technology Co., Ltd.	N14550	KDD-NF141A1

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2009393-02E Page 9 of 46

Date: 2020-10-27



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: TW2009393-02E

Date: 2020-10-27



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

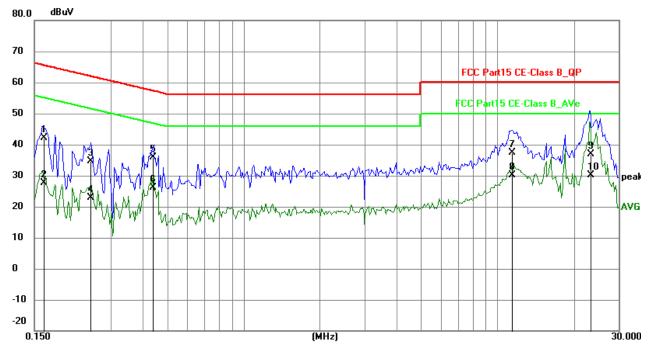

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1633	32.36	9.78	42.14	65.29	-23.15	QP	Р
2	0.1633	17.79	9.78	27.57	55.29	-27.72	AVG	Р
3	0.2495	24.83	9.75	34.58	61.77	-27.19	QP	Р
4	0.2495	13.20	9.75	22.95	51.77	-28.82	AVG	Р
5	0.4397	26.22	9.77	35.99	57.07	-21.08	QP	Р
6	0.4397	16.37	9.77	26.14	47.07	-20.93	AVG	Р
7	11.4161	27.11	10.22	37.33	60.00	-22.67	QP	Р
8	11.4161	19.91	10.22	30.13	50.00	-19.87	AVG	Р
9	23.1404	25.89	10.87	36.76	60.00	-23.24	QP	Р
10	23.1404	19.26	10.87	30.13	50.00	-19.87	AVG	Р

Report No.: TW2009393-02E

Date: 2020-10-27



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

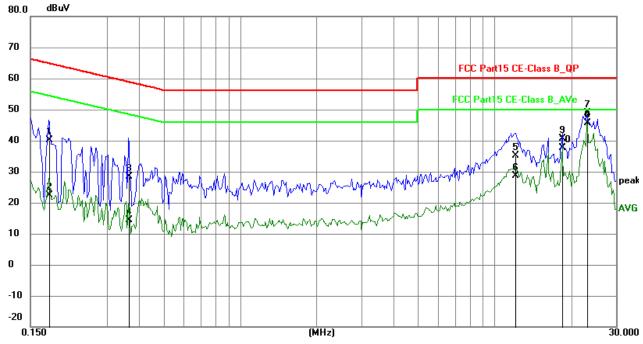

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1777	30.43	9.77	40.20	64.59	-24.39	QP	Р
2	0.1777	12.72	9.77	22.49	54.59	-32.10	AVG	Р
3	0.3645	18.59	9.76	28.35	58.63	-30.28	QP	Ъ
4	0.3645	4.63	9.76	14.39	48.63	-34.24	AVG	Р
5	12.0129	25.00	10.25	35.25	60.00	-24.75	QP	Р
6	12.0129	18.47	10.25	28.72	50.00	-21.28	AVG	П
7	23.1279	37.91	10.87	48.78	60.00	-11.22	QP	Ъ
8	23.1279	34.81	10.87	45.68	50.00	-4.32	AVG	Р
9	18.4323	30.07	10.59	40.66	60.00	-19.34	QP	Ը
10	18.4323	27.02	10.59	37.61	50.00	-12.39	AVG	Р

Report No.: TW2009393-02E Page 12 of 46


Date: 2020-10-27



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

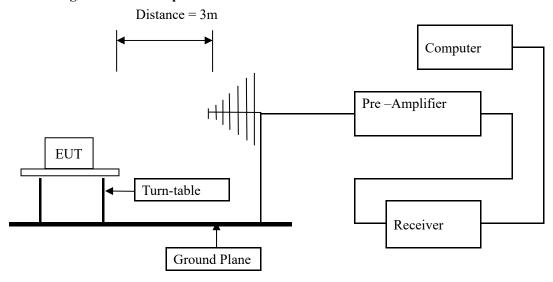

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2009393-02E Page 13 of 46

Date: 2020-10-27



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

	_	
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Page 14 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

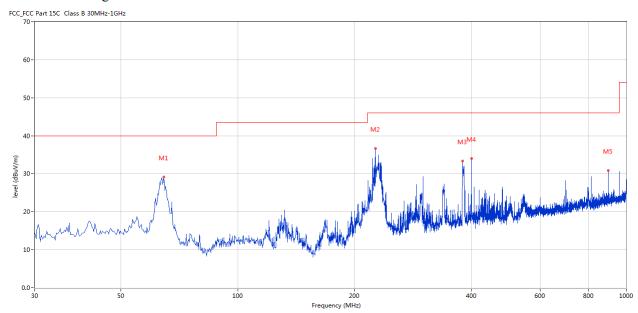

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	64.426	29.18	-13.43	40.0	-10.82	Peak	334.00	100	Horizontal	Pass
2	226.133	36.69	-12.83	46.0	-9.31	Peak	46.00	100	Horizontal	Pass
3	378.870	33.33	-9.28	46.0	-12.67	Peak	275.00	100	Horizontal	Pass
4	399.720	34.02	-8.57	46.0	-11.98	Peak	257.00	100	Horizontal	Pass
5	899.388	30.79	-1.83	46.0	-15.21	Peak	157.00	100	Horizontal	Pass

Page 15 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15C Class B 30MHz-1GHz 60 50 evel (dBuV/m) 20 10 0.0-400 600 100 1000 Frequency (MHz)

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	35.091	33.69	-14.00	40.0	-6.31	Peak	357.00	100	Vertical	Pass
2	63.699	29.87	-13.33	40.0	-10.13	Peak	360.00	100	Vertical	Pass
3	227.831	29.52	-12.78	46.0	-16.48	Peak	352.00	100	Vertical	Pass
4	379.113	30.48	-9.26	46.0	-15.52	Peak	165.00	100	Vertical	Pass
5	479.968	32.60	-7.40	46.0	-13.40	Peak	355.00	100	Vertical	Pass
6	959.998	42.16	-1.63	46.0	-3.84	Peak	79.00	100	Vertical	Pass

Report No.: TW2009393-02E Page 16 of 46

Date: 2020-10-27



Operation Mode: Transmitting under Low Channel (2402MHz)

	8	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		H/V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4880		H/V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: TW2009393-02E Page 17 of 46

Date: 2020-10-27



Operation Mode: Transmitting under High Channel (2480MHz)

	0 0	· , , , , , , , , , , , , , , , , , , ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		H/V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 18 of 46

Report No.: TW2009393-02E


Date: 2020-10-27



Please refer to the following test plots for details:

Low Channel: Vertical



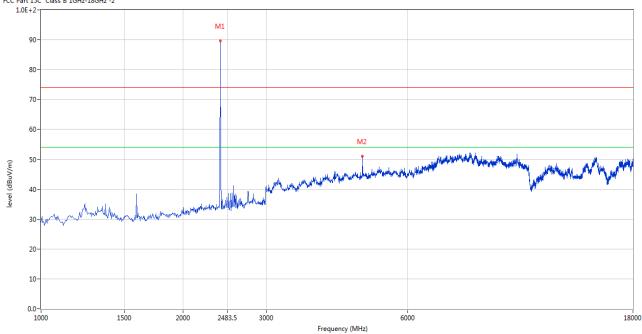

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4803.750	50.99	3.13	54.0	-3.01	Peak	187.00	100	Vertical	Pass


Page 19 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Low Channel: Horizontal

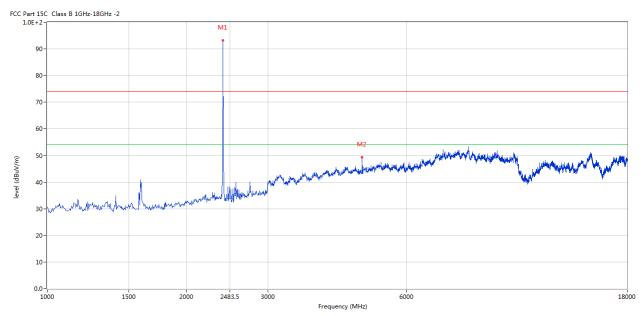

Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
Ī	2	4803.750	49.33	3.13	54.0	-4.67	Peak	191.00	100	Horizontal	Pass


Page 20 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Middle Channel: Vertical

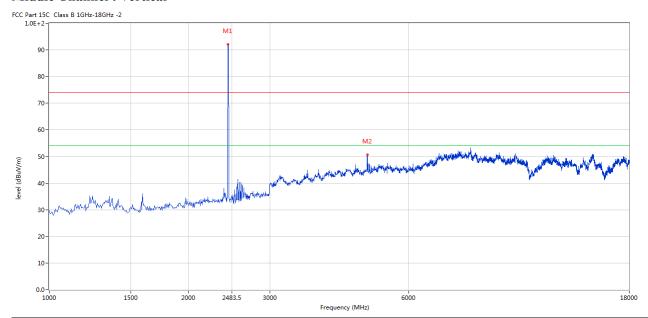

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4880.250	50.47	3.20	74.0	-23.53	Peak	25.00	100	Vertical	Pass


Page 21 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



Middle Channel: Horizontal

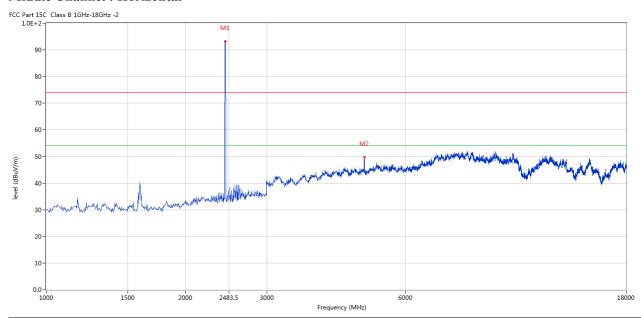

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4880.250	49.79	3.20	54.0	-4.21	Peak	143.00	100	Horizontal	Pass


Page 22 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



High Channel: Vertical

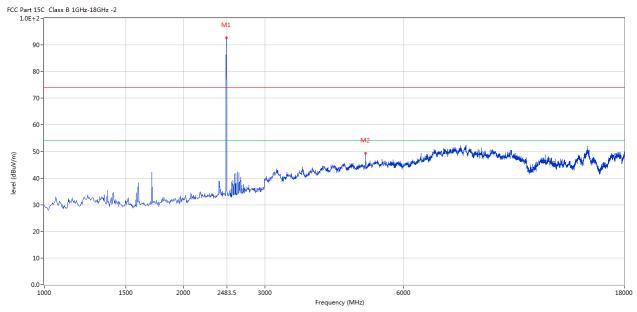

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4956.750	49.28	3.35	54.0	-4.72	Peak	1.00	100	Vertical	Pass


Page 23 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



High Channel: Horizontal

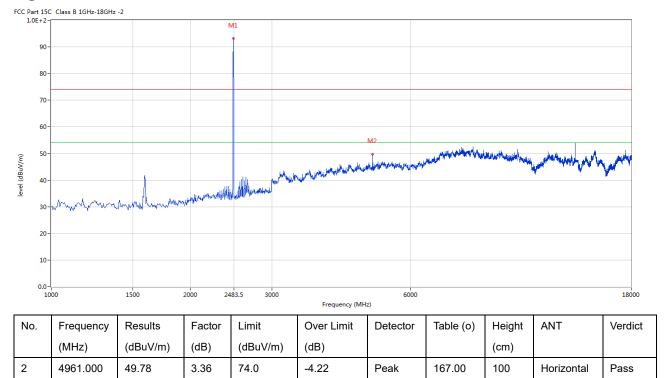

Note: for the radiated emissions above 18G, it is the floor noise.

Page 24 of 46


Report No.: TW2009393-02E

Date: 2020-10-27



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2009393-02E Page 25 of 46

Date: 2020-10-27



6dB BW

ub b ii								
EUT		La	ptop	Model		NP141AQ-T		
Mode		Keep Tr	Test Voltage			DC7.6V		
Temperature		24 d	Humidity		56% RH			
Channel		Channel Frequency 6 dB Bandwi (MHz) (kHz)		dth	Minimum Limit (MHz)		Pass/ Fail	
Low	Low 2402		703		0.5		Pass	
Middle	e 2440 721		721 0.5 Pa		Pass			
High	•	2480	721			0.5	Pass	

Page 26 of 46


Report No.: TW2009393-02E

Date: 2020-10-27



Test Figure:

1. Condition: Low Channel

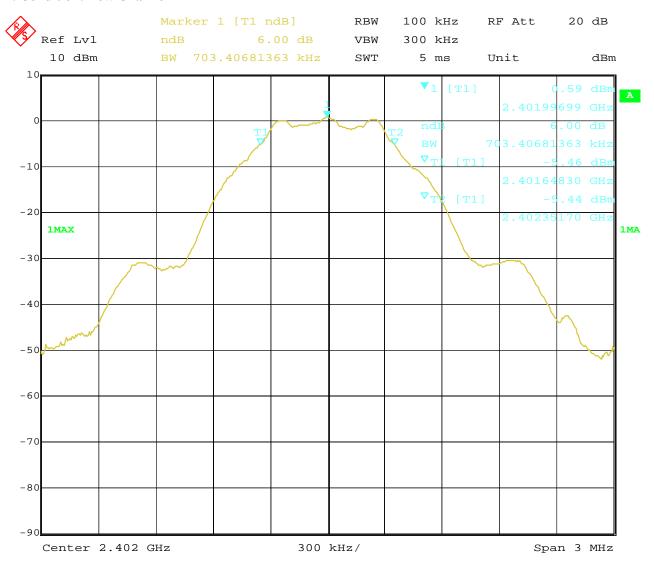

Date: 13.OCT.2020 18:11:45


Page 27 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



2. Condition: Middle Channel

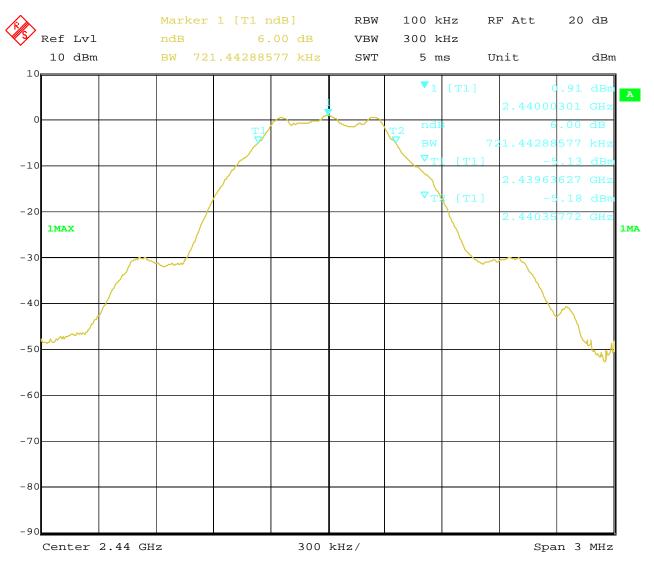

Date: 13.OCT.2020 18:12:39


Page 28 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



3. High Channel

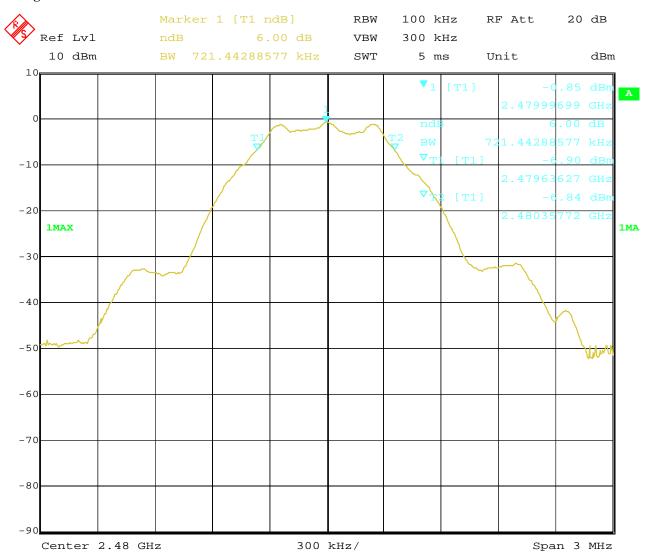

Date: 13.OCT.2020 18:13:50

Report No.: TW2009393-02E


Date: 2020-10-27



Page 29 of 46

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: TW2009393-02E

Date: 2020-10-27



Page 30 of 46

8.4Test Results

EUT		La	aptop	Model	NP141AQ-T		
Mode		Keep Tı	ransmitting	Test Voltage	DC7.6V		
Temperature		24 0	deg. C,	Humidity	56% RH		
Channel	Channel Frequency		Max. Power O	output (dBm)	Peak Power Limit	Pass/ Fail	
Chamier		(MHz)	Peak		(dBm)		
Low		2402	0.9	6	30	Pass	
Middle	dle 2440 1.2		5	30	Pass		
High		2480	-0.1	8	30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: TW2009393-02E Page 31 of 46

Date: 2020-10-27



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No.: TW2009393-02E Page 32 of 46

Date: 2020-10-27



9.4Test Result

EUT		Laptop			Model		NP141AQ-T		
Mode		Keep Transmitting			Test Voltage		DC7.6V		
Temperature			24 deg. C,			Humidity		56% RH	
	Peak	Power	Cable	Final Pow	ver Spectral Max		num		
Channel	Re	ading	Loss	Density		Limit		Pass/ Fail	
	(d	lBm)	(dB)	(dBm/10kHz)		(dBm/3kHz)			
Low	-:	8.29	0.2	-8	3.09	8		Pass	
Middle	-:	8.14	0.2	-7.94		4 8		Pass	
High	-9	9.96	0.2	-9	0.76	8		Pass	

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss


Report No.: TW2009393-02E Page 33 of 46

Date: 2020-10-27



Test Figure:

1. Condition: Low Channel

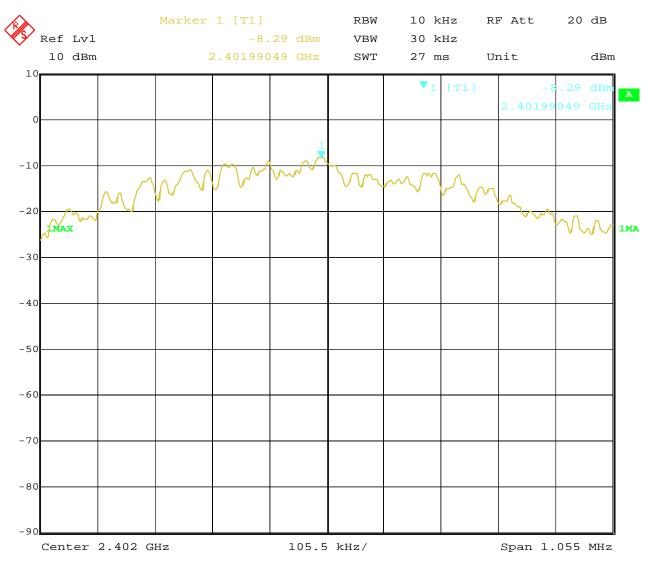

Date: 13.OCT.2020 18:24:09


Page 34 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



2. Condition: Middle Channel

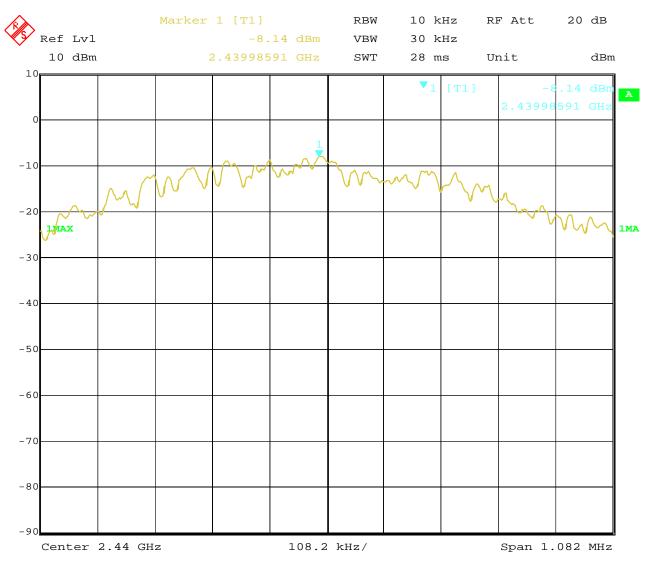


13.OCT.2020 18:25:24 Date:

Report No.: TW2009393-02E Page 35 of 46

Date: 2020-10-27



3. High Channel

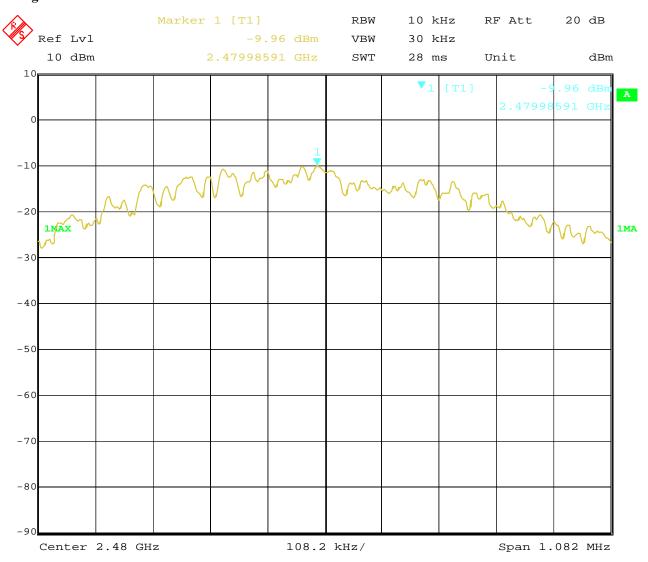

Date: 13.OCT.2020 18:25:57


Report No.: TW2009393-02E

Date: 2020-10-27



Page 36 of 46

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 37 of 46

Report No.: TW2009393-02E


Date: 2020-10-27



10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keep Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

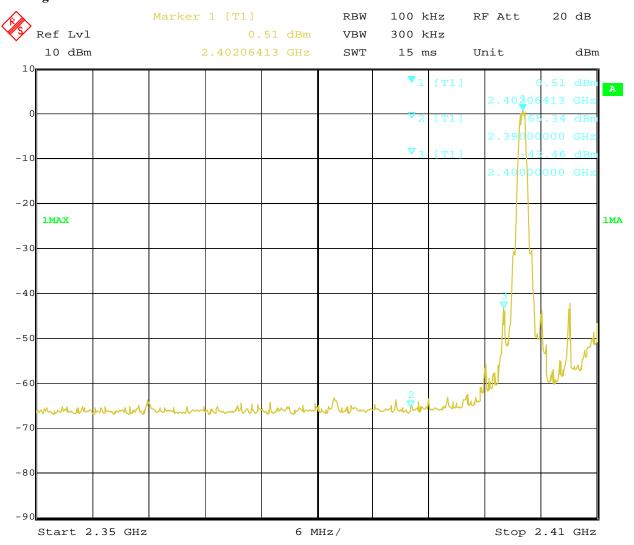

Date: 13.OCT.2020 18:19:15

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 38 of 46

Report No.: TW2009393-02E


Date: 2020-10-27



10.4 Band-edge Measurement

EUT	Laptop	Model	NP141AQ-T
Mode	Keeping Transmitting	Test Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

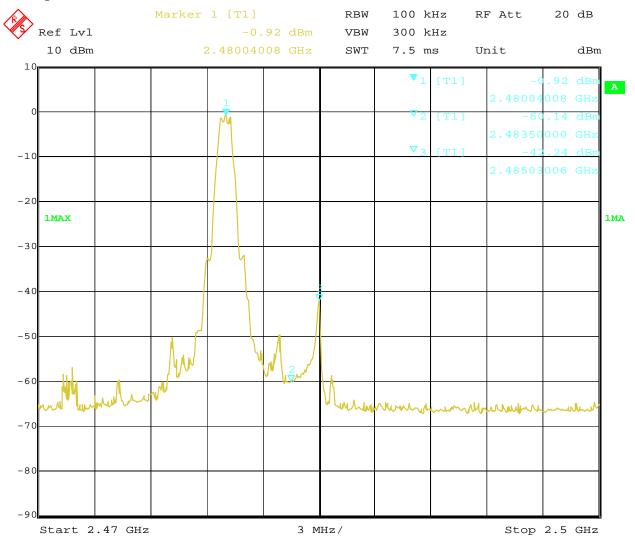

Date: 13.OCT.2020 18:20:43


Note: The Max. FS in Restrict Band are measured in conventional method.

Report No.: TW2009393-02E Page 39 of 46

Date: 2020-10-27



10.4 Restrict Band Measurement

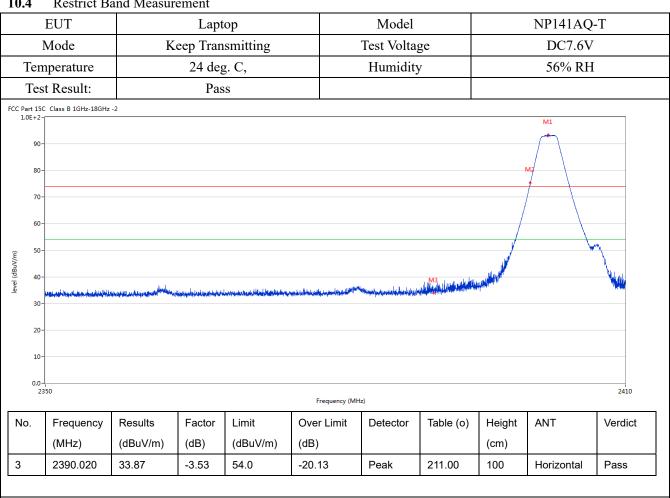


Page 40 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



10.4 Restrict Band Measurement

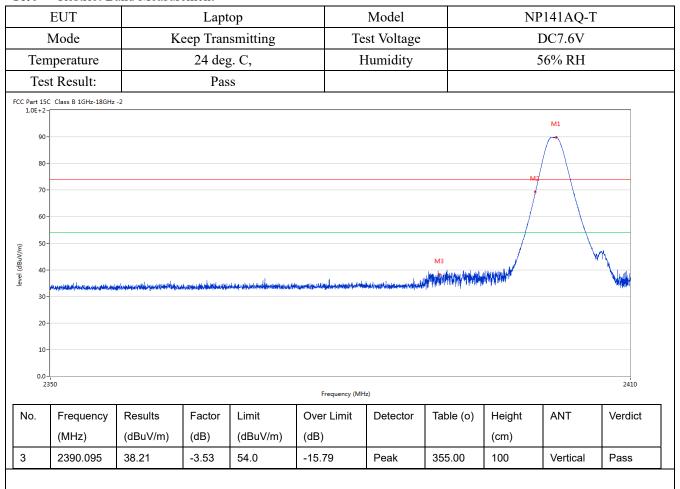


Page 41 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



10.4 Restrict Band Measurement

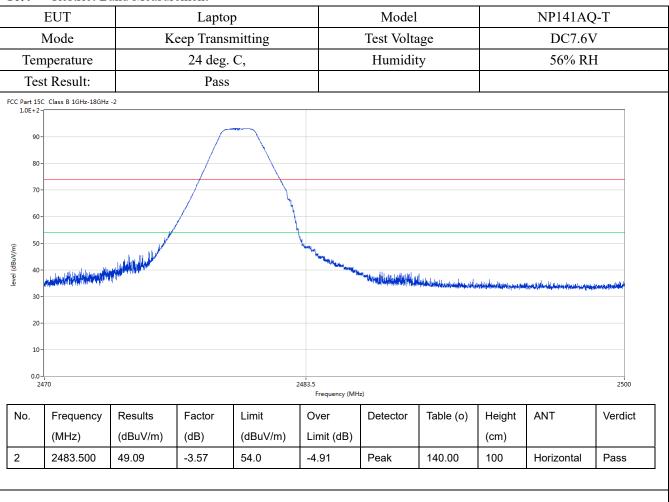

Page 42 of 46

Report No.: TW2009393-02E

Date: 2020-10-27



10.4 Restrict Band Measurement

EUT Laptop			op	Model			NP141AQ-T				
Mode Temperature		Keep Transmitting 24 deg. C,				Test Voltage Humidity		DC7.6V			
								,		I	
Tes	st Result:		Pas	SS							
CC Part 15	iC Class B 1GHz-18GHz	: -2					•				
90											
70	70-										
60	50-										
€ 50·		A Villeday									
(m//\mgp) 40	li i i i	A STATE OF THE STA				- L					
30	- dishinan balanca and har dishina har principle and dishina har principle and dishinance and the same and th					Mary that from the state of the					
20											
10	_										
0.0 2	470				2483.5 Frequency (MI	Hz)				2500	
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			
		1		-	-3.40	Peak	21.00	100	Vertical	+	

Report No.: TW2009393-02E

Date: 2020-10-27



Page 43 of 46

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

FPC antennas used. The gain of the antennas is 1.79dBi. (get from the antenna specification provided the applicant)

Report No.: TW2009393-02E Page 44 of 46

Date: 2020-10-27




12.0 FCC ID Label

FCC ID: RBD-NP141AT

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

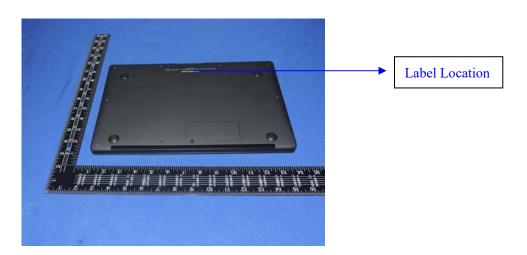

Page 45 of 46


Report No.: TW2009393-02E

Date: 2020-10-27



13.0 Photo of testing

Conducted Emission Test Setup:

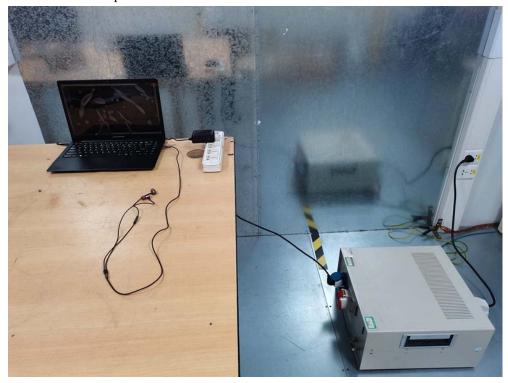


Report No.: TW2009393-02E

Date: 2020-10-27



Radiated Emission Test Setup:

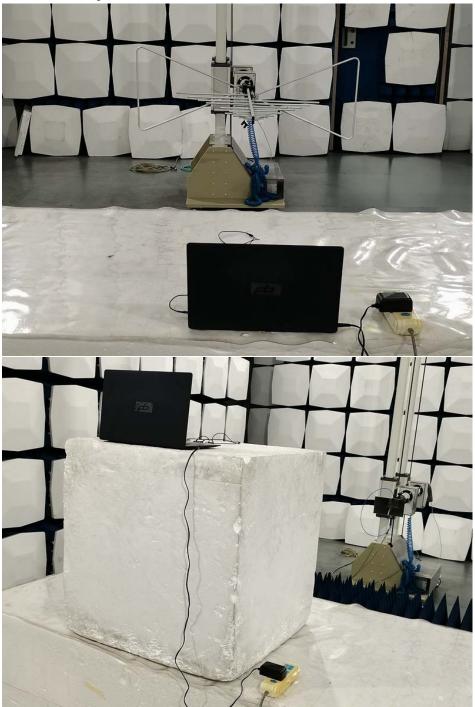

Photographs - EUT

Please see test report TW2009393-01E

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.