



# TEST REPORT

**No. C20T00044-SRD04**

***For***

**Client: Shanghai Wanway Digital Technology Co.,Ltd.**

**Production: GPS Tracker**

**Model Name: GS05**

**Brand Name: WANWAY**

**FCC ID: 2AWBA-GS05**

**Hardware Version: GS05-V1.0-20191202**

**Software Version: GS05\_WW\_V\_1\_1-20200610**

**Issued date: 2020-12-23**

**Industrial Internet Innovation Center (Shanghai) Co.,Lt**

## NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

**Test Laboratory:**

Industrial Internet Innovation Center (Shanghai) Co.,Ltd

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

---

Industrial Internet Innovation Center (Shanghai) Co.,Ltd

Page Number: 2 of 33  
Report Issued Date: Dec. 23, 2020



### Revision Version

Report Number	Revision	Date	Memo
C20T00044-SRD04	00	2020-12-23	Initial creation of test report



## CONTENTS

<b>1. TEST LABORATORY</b>	<b>5</b>
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. SIGNATURE	5
<b>2. CLIENT INFORMATION</b>	<b>6</b>
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b>	<b>7</b>
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
<b>4. REFERENCE DOCUMENTS</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
<b>5. TEST RESULTS</b>	<b>9</b>
5.1. SUMMARY OF TEST RESULTS	9
5.2. STATEMENTS	9
<b>6. TEST EQUIPMENTS UTILIZED</b>	<b>10</b>
6.1. RADIATED EMISSION TEST SYSTEM	10
<b>7. MEASUREMENT UNCERTAINTY</b>	<b>11</b>
<b>8. TEST ENVIRONMENT</b>	<b>12</b>
<b>ANNEX A. DETAILED TEST RESULTS</b>	<b>13</b>
<b>ANNEX A.1 EMISSION LIMIT</b>	<b>13</b>
<b>ANNEX B. ACCREDITATION CERTIFICATE</b>	<b>33</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd
Address	Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	+86 21 63843300
FCC registration No	CN1177

### 1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	20%-75%

#### Project Data

Project Leader	Xu Yuting
Testing Start Date	2020-08-21
Testing End Date	2020-10-24


### 1.3. Signature



**Liu Yan**  
(Prepared this test report)



**Fan Songyan**  
(Reviewed this test report)



**Xiong Zengxin**  
(Approved this test report)



## 2. Client Information

### 2.1. Applicant Information

Company Name	Shanghai Wanway Digital Technology Co.,Ltd.
Address	Floor 23,Yibo Building,No.1999,Wenchuan Road Baoshan District,Shanghai
Telephone	18516719968
Postcode	/

### 2.2. Manufacturer Information

Company Name	Shanghai Wanway Digital Technology Co.,Ltd.
Address	Floor 23,Yibo Building,No.1999,Wenchuan Road Baoshan District,Shanghai
Telephone	18516719968
Postcode	/

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Production	GPS Tracker
Model name	GS05
GSM Frequency Band	850/900/1800/1900
UMTS Frequency Band	I/II/V/VI
Extreme Temperature	-20/+60°C
Nominal Voltage	12V
Extreme High Voltage	75V
Extreme Low Voltage	9V

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N10	/	GS05-V1.0-20191202	GS05_WW_V_1_1-20200610	2020-08-17
N15	/	GS05-V1.0-20191202	GS05_WW_V_1_1-20200610	2020-08-17
N16	/	GS05-V1.0-20191202	GS05_WW_V_1_1-20200610	2020-10-24

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	RF cable	---	AE1

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

All technical documents are supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	2018-10-01
FCC Part 22	PUBLIC MOBILE SERVICES	2018-10-01
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2018-10-01
ANSI-TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01



## 5. Test Results

### 5.1. Summary of Test Results

Measurement Items	Sub-clause of Part2/22/24	Verdict
Emission Limit	2.1051/22.917/24.238/22.913/24.232	P

Note: please refer to Annex A in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by 3IN.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

### 5.2. Statements

The GS05 is a variant model for testing.

3IN only performed test cases which identified with P/NP/NA/F results in Annex A.

In this report, we only retest the radiation emission. And the conduct test results please refer to report No: R2007A0437-R1 YIYUAN UC200T-GL FCC Part22; R2007A0437-R2 YIYUAN UC200T-GL FCC Part24.

3IN has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

## 6. Test Equipments Utilized

### 6.1. Radiated Emission Test System

The test equipment and ancillaries used are as follows.

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2020-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2020-05-10	1 year
3	TRILOG Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged guide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2020-05-10	1 year
6	RF Signal Generator	SMF100A	102314	R&S	2020-05-10	1 year
7	Amplifier	SCU08	10146	R&S	2020-05-10	1 year

#### **Anechoic chamber**

Fully anechoic chamber by ETS

## 7. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	$\pm 0.544\text{dB}$
EBW and VBW	30MHz-3600MHz	95%	$\pm 62.04\text{Hz}$
Transmitter Spurious Emission-Conducted	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Transmitter Spurious Emission-Conducted	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Transmitter Spurious Emission-Conducted	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Transmitter Spurious Emission-Conducted	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
Frequency stability	1MHz-16GHz	95%	$\pm 62.04\text{Hz}$

## 8. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## ANNEX A. Detailed Test Results

### ANNEX A.1 EMISSION LIMIT


#### A.1.1 GSM Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

##### A.1.1.1 The procedure of radiated spurious emissions is as follows:

1. Below 1 GHz, EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10<sup>th</sup> harmonic were measured with peak detector.

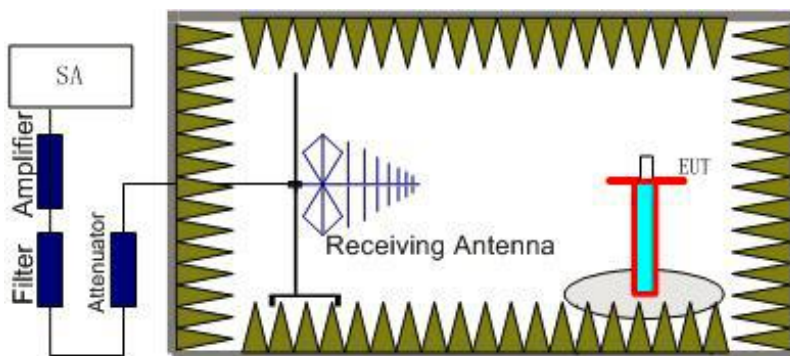

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

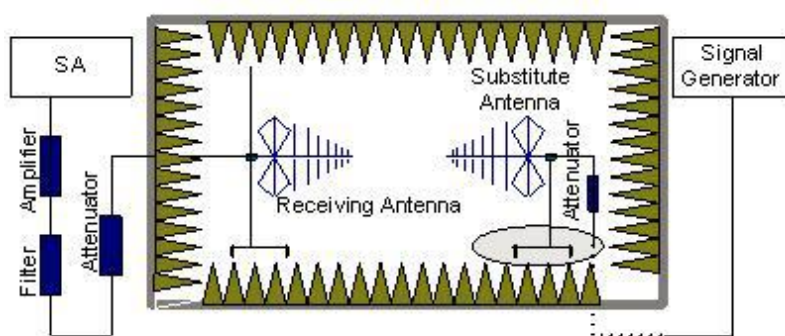

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$

#### A.1.1.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### A.1.1.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must



still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**Measurements results:**

Frequency	Channel	Frequency Range	Result
<b>GSM850</b>	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
<b>GSM1900</b>	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

**DC 12V:**
**GSM850 CH128**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1673.6	-36.85	4.3	2.9	-38.25	-13	H
3345.0	-42.03	6.2	4.7	-43.53	-13	V
4374.2	-47.53	7.2	7.7	-47.03	-13	H
5048.1	-46.88	7.8	9.0	-45.68	-13	H
5895.0	-49.01	8.5	10.4	-47.11	-13	V
6818.5	-51.11	9.2	12.3	-48.01	-13	H



**GSM850 CH189**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1671.4	-35.98	4.3	2.9	-37.38	-13	H
3346.2	-43.14	6.2	4.7	-44.64	-13	V
4271.5	-50.3	7.1	7.7	-49.7	-13	V
5049.2	-46.52	7.8	9.0	-45.32	-13	H
5980.4	-48.89	8.6	10.4	-47.09	-13	V
6960.0	-50.45	9.3	12.9	-46.85	-13	V

**GPRS 850 CH251**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-41.04	6.6	7.7	-39.94	-13	V
5551.2	-41.86	8.2	9.5	-40.56	-13	H
7602.0	-52.15	9.7	14.6	-47.25	-13	V
9679.2	-53.8	10.9	18.3	-46.4	-13	V
11101.2	-48.32	12.1	18.1	-42.32	-13	V
12724.8	-45.86	12.7	19.2	-39.36	-13	H

**GPRS 850 CH128**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1651.1	-31.98	4.3	2.9	-33.38	-13	H
2470.7	-36.02	5.3	3.7	-37.62	-13	H
3296.5	-36.37	6.2	4.7	-37.87	-13	V
4091.5	-49.38	7.0	7.7	-48.68	-13	H
4935.0	-47.56	7.7	9.0	-46.26	-13	H
5771.5	-49.07	8.5	10.5	-47.07	-13	H

**GPRS 850 CH189**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1674.6	-31.69	4.3	2.9	-33.09	-13	V
2540.4	-36.15	5.4	3.7	-37.85	-13	V
3347.3	-44.66	6.2	4.7	-46.16	-13	H
4242.7	-49.79	7.1	7.7	-49.19	-13	V
5023.8	-46.92	7.8	9.0	-45.72	-13	H
5869.6	-50.37	8.4	10.5	-48.27	-13	H

**GPRS 850 CH251**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1696.1	-28	4.4	2.9	-29.5	-13	V
2546.8	-32.44	5.4	3.7	-34.14	-13	H
3395.8	-42.3	6.3	4.7	-43.9	-13	V
4077.7	-48.87	7.0	7.7	-48.17	-13	V
4819.6	-47.16	7.6	7.9	-46.86	-13	V
5586.9	-49.63	8.3	9.5	-48.43	-13	H

**EGPRS 850 CH128**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1630.7	-44.93	4.3	2.9	-46.33	-13	H
2527.5	-36.75	5.4	3.7	-38.45	-13	V
3621.9	-42.23	6.5	4.7	-44.03	-13	V
4123.8	-49.79	7.0	7.7	-49.09	-13	V
4707.7	-47.26	7.5	7.9	-46.86	-13	V
5555.8	-49.23	8.2	9.5	-47.93	-13	V

**EGPRS 850 CH189**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1831.1	-41.84	4.6	2.9	-43.54	-13	H
2536.1	-37.05	5.4	3.7	-38.75	-13	V
3597.7	-42.74	6.5	4.7	-44.54	-13	V
4714.6	-47.88	7.5	7.9	-47.48	-13	V
5930.8	-49.49	8.5	10.4	-47.59	-13	H
6664.6	-50.02	9.1	12.3	-46.82	-13	V

**EGPRS 850 CH251**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1616.8	-45.4	4.3	3.4	-46.3	-13	H
2561.8	-36.54	5.4	3.7	-38.24	-13	H
3576.9	-43.5	6.5	4.7	-45.3	-13	V
4547.3	-47.27	7.4	7.3	-47.37	-13	V
5057.3	-46.53	7.8	9.0	-45.33	-13	H
5763.5	-51.05	8.5	10.5	-49.05	-13	H

**PCS1900 CH512**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-44.51	6.6	7.7	-43.41	-13	H
5551.2	-40.67	8.2	9.5	-39.37	-13	H
7190.4	-53.3	9.5	13.7	-49.1	-13	H
9372.0	-54.56	10.7	18.5	-46.76	-13	H
11101.2	-47.26	12.1	18.1	-41.26	-13	H
13778.4	-49.73	13.8	24.8	-38.73	-13	H

**PCS1900 CH661**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3759.6	-42.85	6.6	7.7	-41.75	-13	V
5640.0	-37.85	8.3	10.5	-35.65	-13	H
7520.4	-51.59	9.7	14.6	-46.69	-13	H
9592.8	-54.16	10.8	18.6	-46.36	-13	H
11584.8	-46.82	12.2	18.1	-40.92	-13	H
13622.4	-48.62	13.8	23.4	-39.02	-13	V

**PCS1900 CH 810**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-41.04	6.6	7.7	-39.94	-13	V
5551.2	-41.86	8.2	9.5	-40.56	-13	H
7602.0	-52.15	9.7	14.6	-47.25	-13	V
9679.2	-53.8	10.9	18.3	-46.4	-13	V
11101.2	-48.32	12.1	18.1	-42.32	-13	V
12724.8	-45.86	12.7	19.2	-39.36	-13	H

**PCS1900 GPRS CH512**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3699.6	-27.48	6.6	7.7	-26.38	-13	H
5551.2	-41.69	8.2	9.5	-40.39	-13	H
7400.4	-46.9	9.7	14.6	-42	-13	H
9250.8	-52.94	10.6	18.5	-45.04	-13	H
11102.4	-44.82	12.1	18.1	-38.82	-13	H
14800.8	-41.93	14.3	23.3	-32.93	-13	H

**PCS1900 GPRS CH661**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3759.6	-34.4	6.6	7.7	-33.3	-13	H
5640.6	-42.3	8.3	10.5	-40.1	-13	H
7520.4	-50.68	9.7	14.6	-45.78	-13	V
8940.0	-55.79	10.4	18.3	-47.89	-13	H
10216.8	-47.92	11.3	17.4	-41.82	-13	V
11280.0	-44.58	12.1	18.5	-38.18	-13	H

**PCS1900 GPRS CH 810**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.6	-32.49	6.7	7.7	-31.49	-13	V
5729.4	-38.36	8.5	10.5	-36.36	-13	V
7639.2	-49.6	9.7	15.3	-44	-13	H
9549.6	-47.1	10.7	18.6	-39.2	-13	H
11458.8	-36.64	12.3	18.1	-30.84	-13	H
13368.0	-43.96	13.7	21.8	-35.86	-13	V

**PCS1900 EGPRS CH512**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3601.8	-46.31	6.5	4.7	-48.11	-13	H
5094.0	-50.04	7.9	9.0	-48.94	-13	H
6334.8	-50.93	8.8	10.8	-48.93	-13	V
8070.0	-54.53	9.9	16.6	-47.83	-13	H
9652.8	-53.53	10.9	18.3	-46.13	-13	H
11601.6	-47.44	12.2	18.1	-41.54	-13	H

**PCS1900 EGPRS CH661**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3590.4	-46.6	6.5	4.7	-48.4	-13	H
4738.8	-51.02	7.5	7.9	-50.62	-13	V
5755.8	-53.2	8.5	10.5	-51.2	-13	H
7888.8	-55.05	9.9	16.6	-48.35	-13	H
10230.0	-50.63	11.4	17.4	-44.63	-13	V
13317.6	-47.09	13.6	21.8	-38.89	-13	V



**PCS1900 EGPRS CH810**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.6	-40.8	6.7	7.7	-39.8	-13	V
5728.8	-33.34	8.5	10.5	-31.34	-13	V
7639.2	-49.44	9.7	15.3	-43.84	-13	V
9548.4	-49.46	10.7	18.6	-41.56	-13	H
11458.8	-42.59	12.3	18.1	-36.79	-13	V
13369.2	-46.03	13.7	21.8	-37.93	-13	V

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

**DC 24V:****PCS1900 GPRS CH 512**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3760.2	-29.02	6.6	7.7	-27.92	-13	H
5640.0	-44.88	8.3	10.5	-42.68	-13	H
7519.2	-48.66	9.7	14.6	-43.76	-13	V
9399.6	-48.23	10.7	18.6	-40.33	-13	H
11280.0	-45.46	12.1	18.5	-39.06	-13	V
13095.6	-46.32	13.0	20.2	-39.12	-13	V

**PCS1900 GPRS CH 661**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3760.2	-37.29	6.6	7.7	-36.19	-13	V
5640.0	-36.31	8.3	10.5	-34.11	-13	H
7519.2	-50.41	9.7	14.6	-45.51	-13	H
9399.6	-45.88	10.7	18.6	-37.98	-13	H
11280.0	-41.74	12.1	18.5	-35.34	-13	H
15040.8	-44.79	14.4	24.4	-34.79	-13	V

**PCS1900 GPRS CH810**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.0	-36.08	6.7	7.7	-35.08	-13	H
5729.4	-38.44	8.5	10.5	-36.44	-13	H
7638.0	-48.48	9.7	15.3	-42.88	-13	V
9548.4	-51.54	10.7	18.6	-43.64	-13	H
11458.8	-36.48	12.3	18.1	-30.68	-13	V
15278.4	-44.12	14.4	25.1	-33.42	-13	H

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

### A.1.2 WCDMA Measurement Method

The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

**The procedure of radiated spurious emissions is the same like GSM.**

#### A.1.2.1 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### A.1.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.1.2.3 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band V	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P

**DC 12V:****WCDMA BAND II Mode Channel 9262**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3707.2	-42.34	6.6	7.7	-41.24	-13	V
5052.4	-56.83	7.8	9.0	-55.63	-13	H
5554.0	-56.77	8.2	9.5	-55.47	-13	H
7414.4	-59.47	9.7	14.6	-54.57	-13	V
9257.6	-58.05	10.6	18.5	-50.15	-13	V
13281.3	-54.85	13.6	21.8	-46.65	-13	V

**WCDMA BAND II Mode Channel 9400**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3757.6	-44.61	6.6	7.7	-43.51	-13	V
5637.6	-53.03	8.3	10.5	-50.83	-13	H
7423.2	-59.68	9.7	14.6	-54.78	-13	V
9405.6	-59.68	10.7	18.6	-51.78	-13	V
11570.2	-53.45	12.2	18.1	-47.55	-13	V
14855.2	-52.9	14.3	23.3	-43.9	-13	H

**WCDMA BAND II Mode Channel 9538**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3814.4	-53.26	6.7	7.7	-52.26	-13	H
5719.2	-50.68	8.5	10.5	-48.68	-13	H
7702.4	-61.4	9.8	15.3	-55.9	-13	H
9534.0	-60.3	10.7	18.6	-52.4	-13	V
12854.0	-53.17	13.0	19.2	-46.97	-13	H
14894.1	-53.8	14.3	24.4	-43.7	-13	H

**WCDMA BAND V Mode Channel 4132**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1651.4	-58.03	4.3	2.9	-59.43	-13	H
2414.2	-32.2	5.3	3.7	-33.8	-13	V
3600.4	-55.31	6.5	4.7	-57.11	-13	V
4859.2	-57.36	7.6	7.9	-57.06	-13	V
6570.0	-59.75	9.0	11.5	-57.25	-13	H
8279.8	-63.3	10.1	17.3	-56.1	-13	H

**WCDMA BAND V Mode Channel 4183**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1675.4	-54.04	4.4	2.9	-55.54	-13	V
2528.8	-50.71	5.4	3.7	-52.41	-13	V
3616.8	-54.5	6.5	4.7	-56.3	-13	V
5048.8	-57.91	7.8	9.0	-56.71	-13	H
6694.4	-58.96	9.1	12.3	-55.76	-13	H
9130.0	-61.61	10.5	18.5	-53.61	-13	H

**WCDMA BAND V Mode Channel 4233**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1691.4	-53.23	4.4	2.9	-54.73	-13	V
2578.1	-49.65	5.5	3.7	-51.45	-13	H
3613.2	-54.44	6.5	4.7	-56.24	-13	H
4895.6	-58.19	7.7	9.0	-56.89	-13	V
6339.2	-59.1	8.8	10.8	-57.1	-13	H
7943.2	-62.45	9.8	16.6	-55.65	-13	V

**Note: the EUT was displayed in several different direction, the worst cases were shown.**

**DC 24V:****WCDMA BAND V Mode Channel 4132**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1651.1	-44.73	4.3	2.9	-46.13	-13	H
2559.2	-49.67	5.4	3.7	-51.37	-13	H
3606.4	-53.77	6.5	4.7	-55.57	-13	H
5036.4	-56.05	7.8	9.0	-54.85	-13	V
6619.2	-58.98	9.1	11.5	-56.58	-13	H
8057.2	-62.52	9.9	16.6	-55.82	-13	V

**WCDMA BAND V Mode Channel 4183**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1674.6	-44.07	4.3	2.9	-45.47	-13	H
2548.5	-49.85	5.4	3.7	-51.55	-13	H
3609.2	-53.52	6.5	4.7	-55.32	-13	H
4903.6	-57.32	7.7	9.0	-56.02	-13	V
6387.2	-59.14	8.9	11.5	-56.54	-13	H
8048.2	-61.78	9.9	16.6	-55.08	-13	H

**WCDMA BAND V Mode Channel 4233**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1691.4	-48.17	4.4	2.9	-49.67	-13	H
2512.3	-51	5.4	3.7	-52.7	-13	V
3612.4	-53.18	6.5	4.7	-54.98	-13	V
5045.6	-57.12	7.8	9.0	-55.92	-13	H
6489.2	-59.41	9.0	11.5	-56.91	-13	V
8049.4	-62.47	9.9	16.6	-55.77	-13	H

**Note: the EUT was displayed in several different direction, the worst cases were shown.**



**ANNEX B. Accreditation Certificate****Accredited Laboratory**

A2LA has accredited

**3IN (Industrial Internet Innovation Center (Shanghai) Co., Ltd.)**

Shanghai, People's Republic of China

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the «field» field. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 6th day of May 2019.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to February 28, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical«field» Scope of Accreditation.

**\*\*\*\*\*END OF REPORT\*\*\*\*\***