

FCC PART 15 SUBPART C TEST REPORT

Issued By: Dongguan New Testing Centre Co., Ltd

Add: 3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China, 523808.

A2LA Number:5426.01

Tel: 86-769-22212079

<http://www.ntc-cert.com>



Marking:

1. The test report is invalid without the official stamp of test center.
2. Nobody is allowed to photocopy or partly photocopy this test report without written permission of test center.
3. The test report is invalid without the signatures of approver, reviewer and testing engineer.
4. The test report is invalid if altered.
5. Objections to the test report must be submitted to NTC within 15 days.
6. The test report is valid for the tested samples only.
7. As for test verdict, "—" means is "no need for judgment" "N/A" means is "not applicable", "P" means "pass", "F" means "fail".

TABLE OF CONTENTS

TEST REPORT DECLARE	3
1. Summary of test results	4
2. General test information	5
2.1. Detail models.....	6
2.2. Test Peripheral List.....	6
2.3. Block diagram EUT configuration for test	7
2.4. Test environment conditions	7
2.5. Measurement uncertainty	7
3. Power Line Conducted Emission Test	8
3.1. Test equipment	8
3.2. Block diagram of test setup.....	8
3.3. Power Line Conducted Emission Limits (Class B)	8
3.4. Test Procedure.....	9
3.5. Test Result.....	9
4. Radiated emission test.....	12
4.1. Test equipment	12
4.2. Block diagram of test setup.....	13
4.3. Limit	15
4.4. Test Procedure.....	16
4.5. Test result	16
5. Peak Output Power	28
5.1. Test equipment	28
5.2. Block diagram of test setup.....	28
5.3. Limit	28
5.4. Test Procedure.....	28
5.5. Test result	29
6. -6dB Bandwidth.....	35
6.1. Test equipment	35
6.2. Block diagram of test setup.....	35
6.3. Limit	35
6.4. Test Procedure.....	35
6.5. Test result	36
7. Band Edges Measurement.....	42
7.1. Test equipment	42

7.2.	Block diagram of test setup.....	42
7.3.	Limit	42
7.4.	Test Procedure.....	42
7.5.	Test result	43
8.	Conducted Spurious Emission.....	48
8.1.	Test equipment	48
8.2.	Block diagram of test setup.....	48
8.3.	Limit	48
8.4.	Test Procedure.....	48
8.5.	Test result	49
9.	Conducted Output Power Spectral Density	54
9.1.	Test equipment	54
9.2.	Block diagram of test setup.....	54
9.3.	Limit	54
9.4.	Test Procedure.....	54
9.5.	Test result	55
10.	Antenna Requirement	60
10.1.	Standard requirement	60
10.2.	EUT Antenna.....	60
11.	Test setup photograph.....	61
11.1.	Photos of power line conducted emission test.....	61
11.2.	Photos of radiated emission test	61
12.	Photos of the EUT	63

TEST REPORT DECLARE

FCC ID	:	2AVTWZHS-32-F
Applicant	:	Huizhou Zihanxuan Household Electrical Co., Ltd.
Address	:	Yinglong Industrial park ,Tiantou Village , Yuanzhou Town, Boluo County, Huizhou City, Guangdong
Equipment under Test	:	WIFI SMART FIREPLACE
Model No	:	ZHS-XX-YY,XX" denotes01-99,YY"denoteds A-Z; ZHX-XX-YYY,XX" denotes01-99,YYY"denoteds 001-099 (All the same except model name)
Trade Mark	:	FEBO FLAME
Manufacturer	:	Huizhou Zihanxuan Household Electrical Co., Ltd.
Address	:	Yinglong Industrial park ,Tiantou Village , Yuanzhou Town, Boluo County, Huizhou City, Guangdong

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2017, ANSI C63.10:2013.

We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	NTCER2003043		
Date of Test:	2020.03.06 to 2020.03.16	Date of Report:	2020.03.17

Prepared By:

Jeffrey Zhang
Jeffrey Zhang/Engineer



Dave Gou/LAB Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

1. Summary of test results

Description of Test Item	Standard	Results
20dB Bandwidth and 99% Bandwidth	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Conducted Emission Test	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Radiated Emission Test	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Output Power	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
6 dB Bandwidth	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Conducted Spurious Emission	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Conducted Output Power Spectral Density	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Band Edges	F CC Part 15 Subpart C:2017 ANSI C63.10:2013	PASS
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS

2. General test information

Description of EUT

EUT* Name	:	WI-FI SMART FIREPLACE
Test model	:	ZHS-32-F
EUT function description	:	Please reference user manual of this device
Power supply	:	AC 110V~120V, 50/60Hz
Operation frequency:	:	2412 MHz to 2462 MHz for 802.11b/g/n(HT20)
Number of Channels:	:	11 Channels for 802.11b/g/n(HT20)
Modulation Technology:	:	802.11b: CCK/QPSK/BPSK 802.11g/n: BPSK/QPSK/16QAM/64QAM
Transmit Data Rate:	:	802.11b :1/2/5.5/11 Mbps 802.11g :6/9/12/18/24/36/48/54 Mbps 802.11n(HT20): 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps
Channel Separation:	:	5 MHz
Antenna Type	:	PCB antenna
Gain:	:	maximum 3dBi
H/W No.:	:	V1.0
S/W No.:	:	V1.0

Note: 1, EUT is the ab. of equipment under test.

Frequency list:

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Description of test modes

No.	TEST Mode DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating
Note: Transmit by 802.11b with Data rate (1/2/5.5/11) Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54) Transmit by 802.11n (20MHz) with Data rate (6.5/13/19.5/26/39/52/58.5/65) Transmit by 802.11n (40MHz) with Data rate (13.5/27/40.5/54/81/108/121.5/135)	

Note:

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle > or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

2.1. Detail models

Model	Rating	Note
ZHS-XX-YY; ZHX-XX-YYY	AC 110V~120V, 50/60Hz	ZHS-XX-YY,XX" denotes01-99,YY"denotes A-Z; ZHX-XX-YYY,XX" denotes01-99,YYY"denotes 001-099


Note: All the same except model name.

2.2. Test Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Note
1	Notebook	Lenovo	ThinkPadE450	PF-0LRXDH	--

2.3. Block diagram EUT configuration for test

For EUT Tx mode:



2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-24°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.44dB
Uncertainty for Radiation Emission test (30MHz – 1GHz)	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz – 18GHz)	4.27 dB (Polarize: V)
	4.51 dB (Polarize: H)
Bandwidth	±1.2%
Stop Transmitting Time Test	±0.5%
Uncertainty for frequency error	5.8 x 10 ⁻⁸


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESCS30	8341151006	2019-05-23	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2019-05-13	1 Year
3	Pulse Limiter	R&S	ESH3-Z2	0357-8810.54	2019-05-13	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2019-05-13	1 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

3.2. BLOCK DIAGRAM OF TEST SETUP

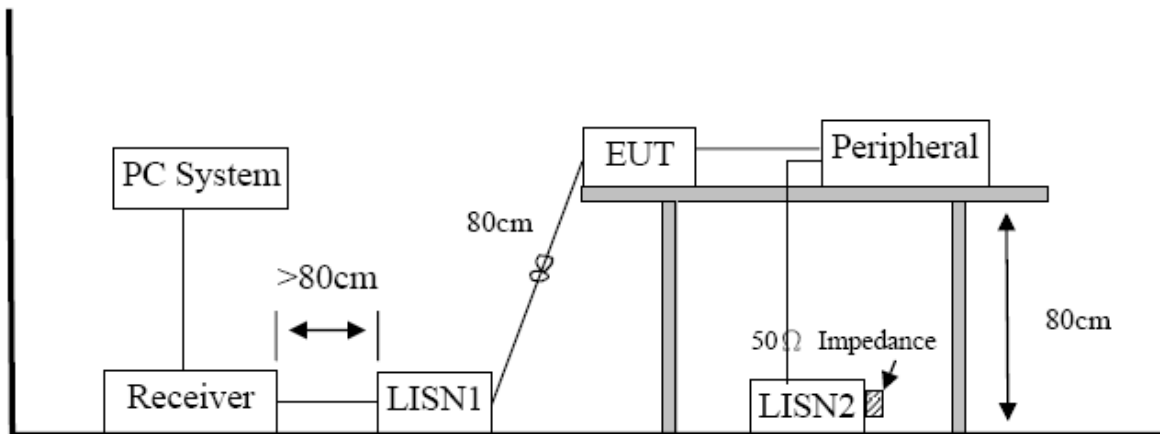

3.3. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

3.5. Test Result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" mans Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

Conducted Emission Test Result

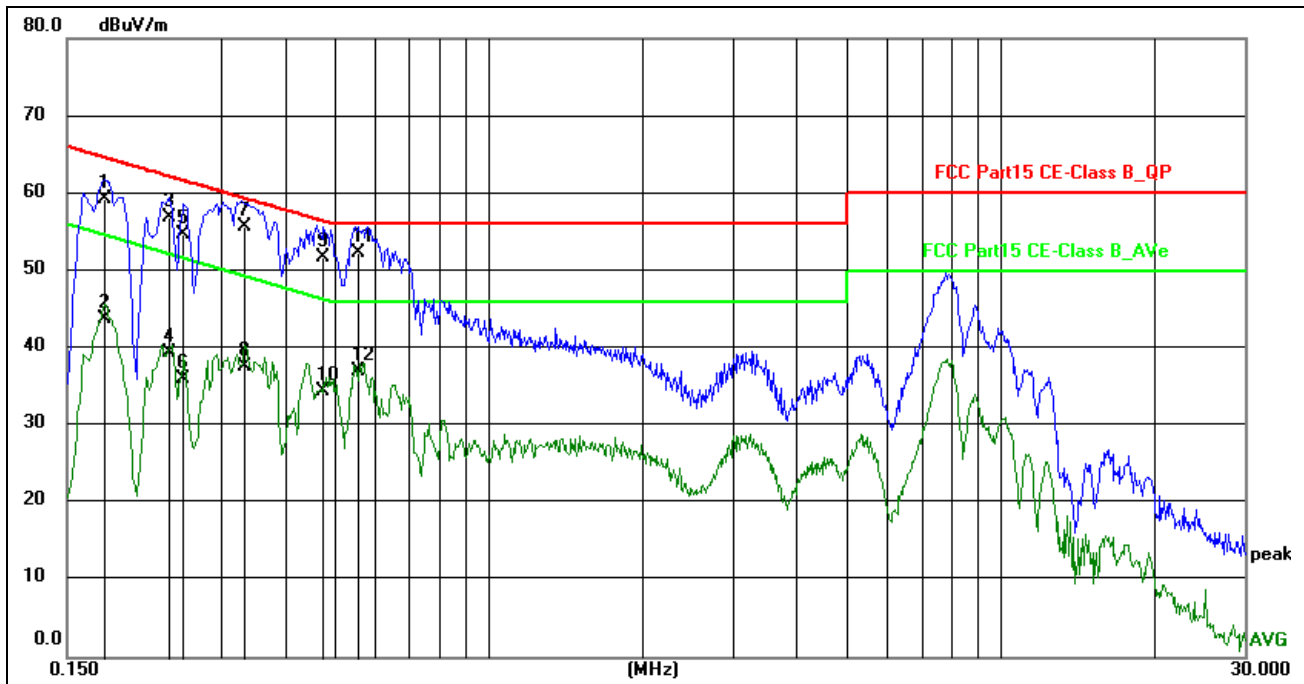

Site:	FCC Part15 CE-Class B_QP	Phase:N	Temperature(C):24(C)
Limit:	WIFI SMART FIREPLACE	Test Time:	Humidity(%):63%
EUT:	ZHS-32-F	Power Rating:	2020/3/12 9:20:24
M/N.:	Tx mode	Test Engineer:	AC120/60Hz
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1774	49.71	9.63	59.34	64.61	-5.27	QP	
2	0.1774	34.14	9.63	43.77	54.61	-10.84	AVG	
3	0.2373	47.24	9.65	56.89	62.19	-5.30	QP	
4	0.2373	29.71	9.65	39.36	52.19	-12.83	AVG	
5	0.2533	45.13	9.65	54.78	61.65	-6.87	QP	
6	0.2533	26.39	9.65	36.04	51.65	-15.61	AVG	
7 *	0.3327	46.12	9.65	55.77	59.38	-3.61	QP	
8	0.3327	27.96	9.65	37.61	49.38	-11.77	AVG	
9	0.4761	42.02	9.67	51.69	56.41	-4.72	QP	
10	0.4761	24.78	9.67	34.45	46.41	-11.96	AVG	
11	0.5563	42.66	9.68	52.34	56.00	-3.66	QP	
12	0.5563	27.30	9.68	36.98	46.00	-9.02	AVG	

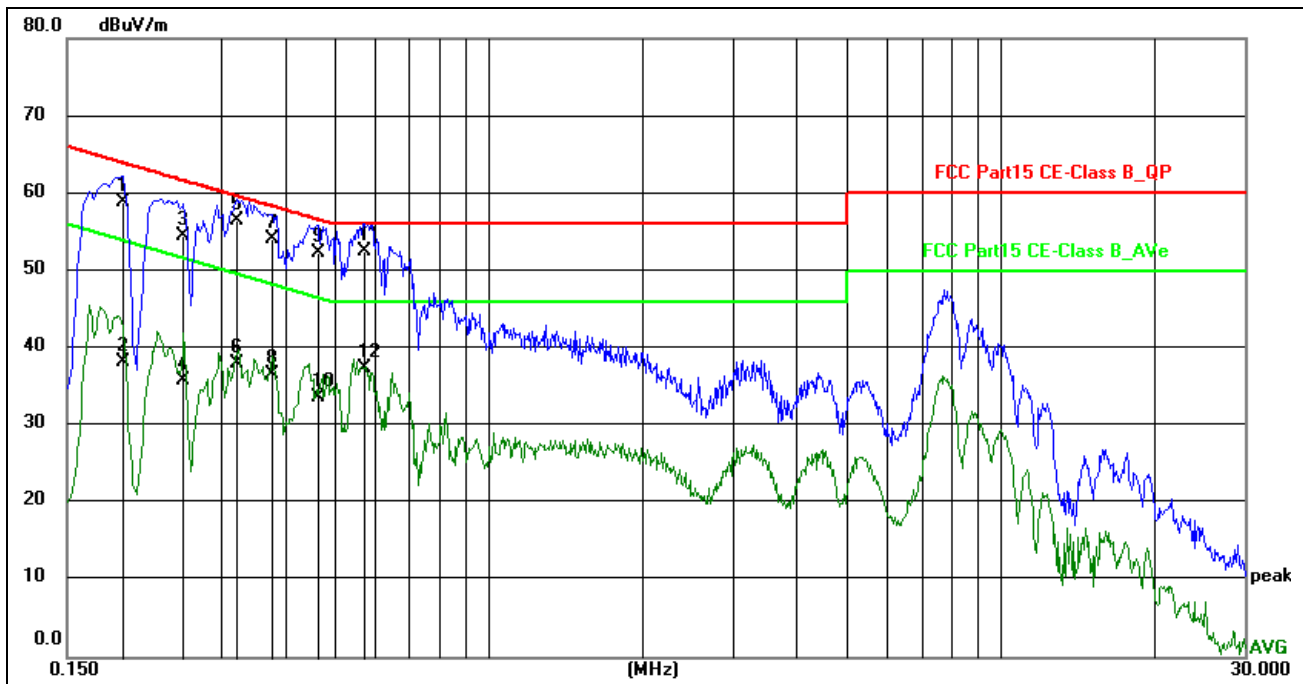

Site:		Phase: L1	Temperature(C): 24(C)
Limit:	FCC Part15 CE-Class B_QP		Humidity(%): 63%
EUT:	WIFI SMART FIREPLACE	Test Time:	2020/3/12 9:26:07
M/N.:	ZHS-32-F	Power Rating:	AC120/60Hz
Mode:	Tx mode	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1932	49.11	9.68	58.79	63.90	-5.11	QP	
2	0.1932	28.63	9.68	38.31	53.90	-15.59	AVG	
3	0.2532	44.90	9.68	54.58	61.65	-7.07	QP	
4	0.2532	26.24	9.68	35.92	51.65	-15.73	AVG	
5 *	0.3207	46.70	9.70	56.40	59.69	-3.29	QP	
6	0.3207	28.39	9.70	38.09	49.69	-11.60	AVG	
7	0.3768	44.37	9.73	54.10	58.35	-4.25	QP	
8	0.3768	26.94	9.73	36.67	48.35	-11.68	AVG	
9	0.4634	42.49	9.74	52.23	56.63	-4.40	QP	
10	0.4634	23.90	9.74	33.64	46.63	-12.99	AVG	
11	0.5710	42.76	9.76	52.52	56.00	-3.48	QP	
12	0.5710	27.61	9.76	37.37	46.00	-8.63	AVG	


4. Radiated emission test

4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR	7250-30406 7528	2019-04-30	1Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2019-06-14	2 Year
3	Pre-amplifier	R&S	8447F	3113A04553	2019-05-13	1Year
4	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2019-05-23	1Year
5	Horn antenna	Schwarzbeck	BBHA9120D	453	2019-05-23	2Year
6	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2019-05-23	1Year
7	Pre-amplifier	R&S	SCU18	105326	2019-05-23	1Year
8	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2019-05-23	2Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2019/5/14	1Year
10	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2019-05-23	1Year
11	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

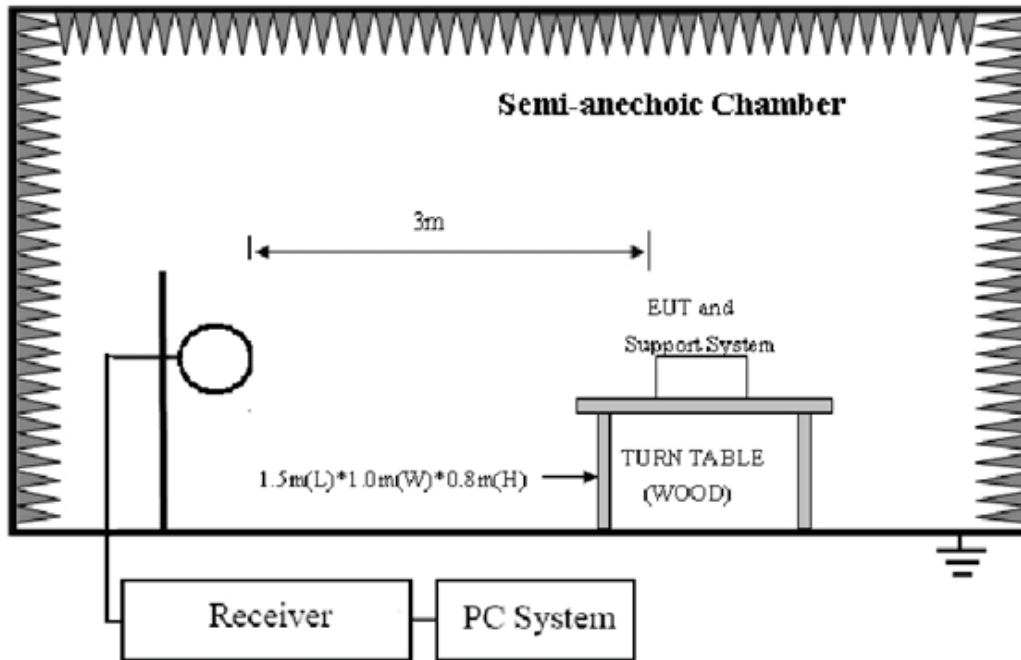

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

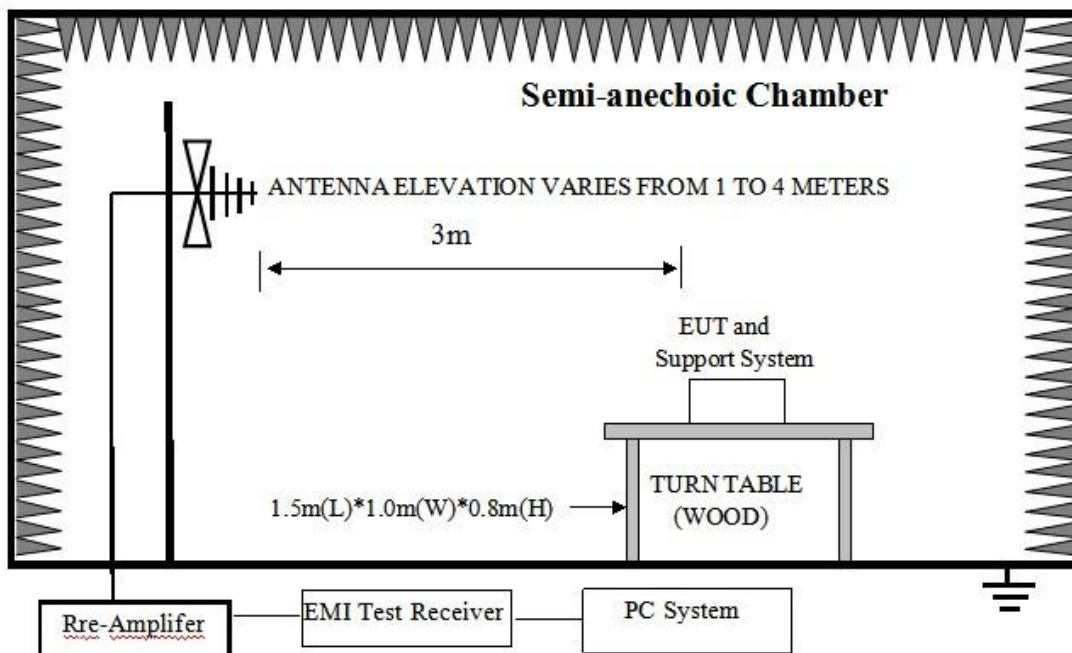

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

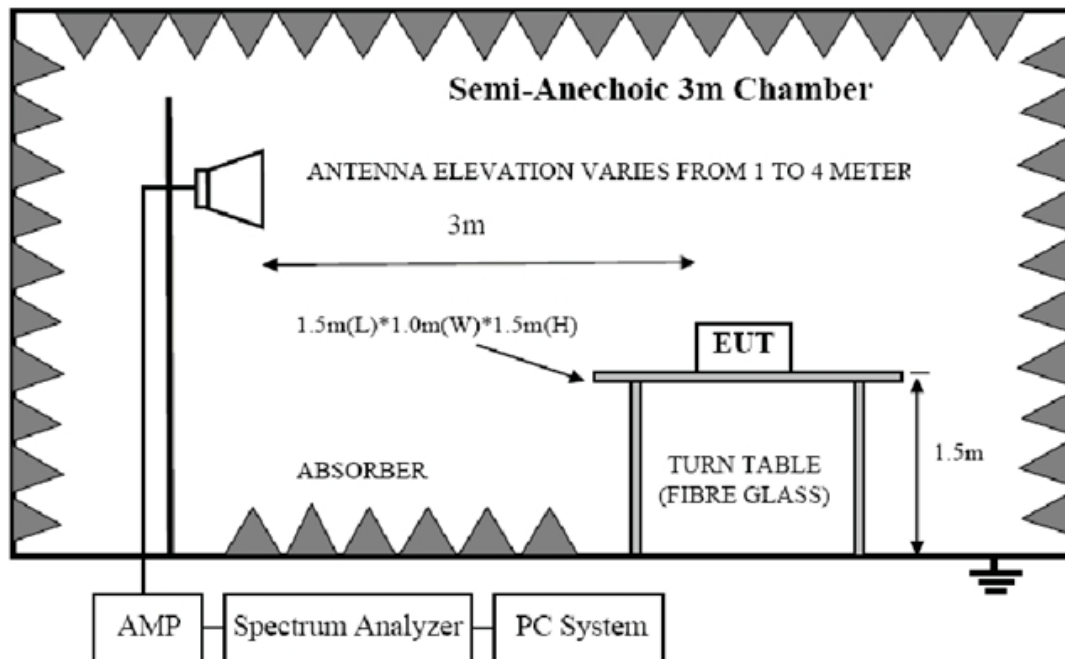

4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

FCC 15.109 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average: 54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.109, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.109 limits.

4.4. Test Procedure

Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 18GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.

4.5. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9 KHz to 40GHz were comply with FCC PART 15.109 limits limit.

Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 40GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.


Note2: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Note3: Level = Reading Level + Factor, Margin= Level-Limit

Radiated Emissions Test Data Below 30MHz:


No emission found between lowest internal used/generated frequencies to 30MHz.

Radiated Emission Test Result

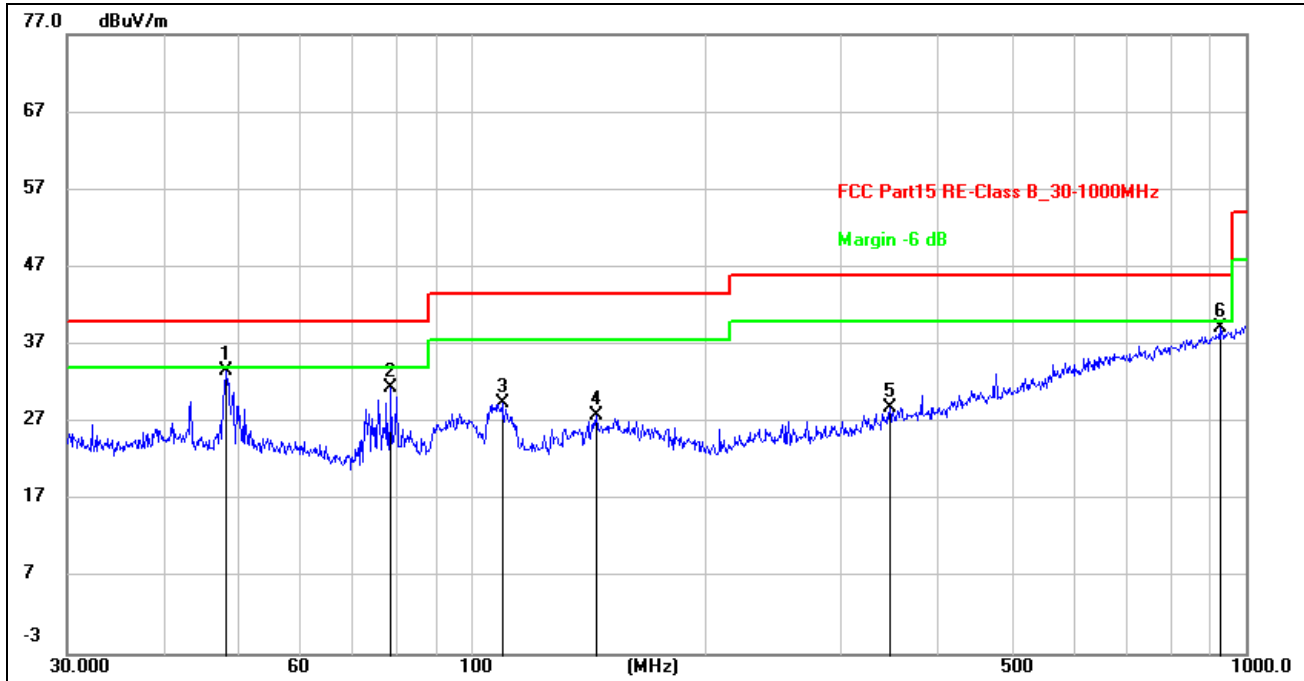

Site:		Antenna:: Horizontal	Temperature(C): 24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz		Humidity(%): 60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2020/3/12 17:42:33
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	48.1625	19.29	14.37	33.66	40.00	-6.34	peak	200	194	
2	78.6887	20.92	10.48	31.40	40.00	-8.60	peak	100	42	
3	109.4116	17.22	12.21	29.43	43.50	-14.07	peak	200	334	
4	144.8417	12.82	15.09	27.91	43.50	-15.59	peak	100	33	
5	346.8092	13.20	15.59	28.79	46.00	-17.21	peak	200	94	
6	925.7562	13.96	25.19	39.15	46.00	-6.85	peak	100	116	

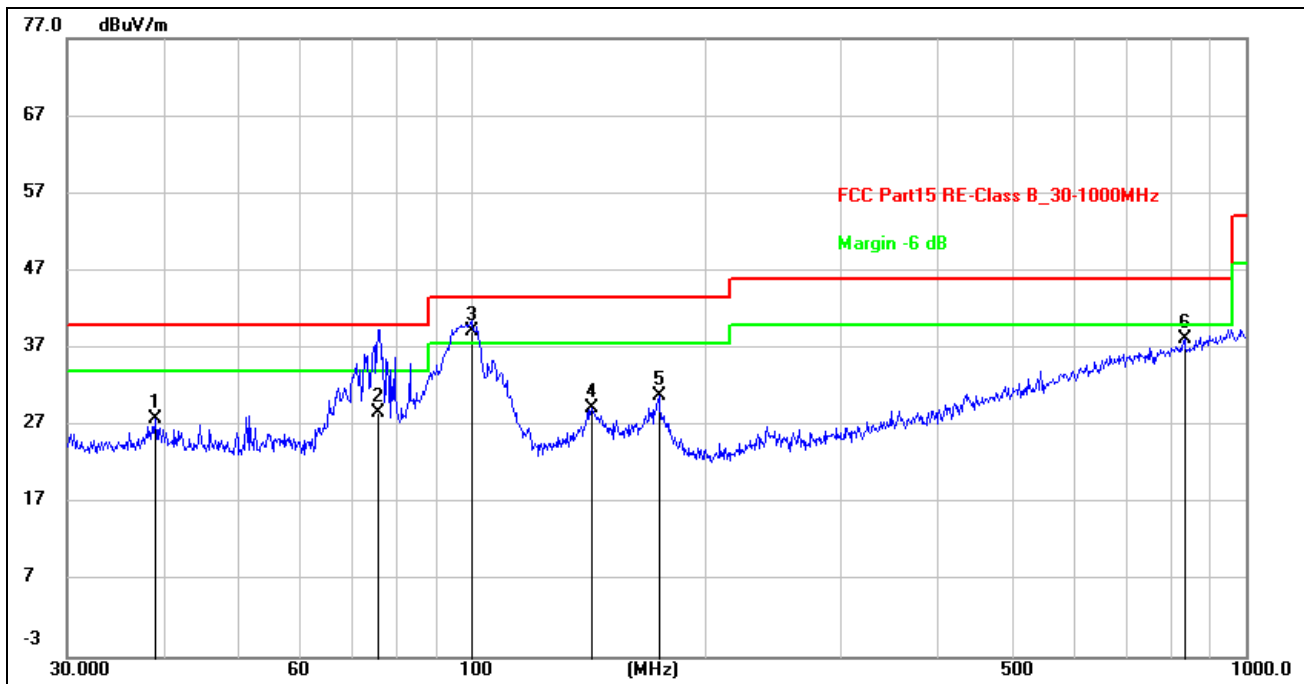

Site:		Antenna:: Vertical	Temperature(C): 24(C)
Limit:	FCC Part15 RE-Class B_30-1000MHz		Humidity(%): 60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2020/3/12 17:45:06
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	39.0244	13.26	14.70	27.96	40.00	-12.04	peak	200	112	
2	75.7113	17.67	10.92	28.59	40.00	-11.41	QP	100	95	
3 *	99.8777	28.03	11.24	39.27	43.50	-4.23	QP	100	93	
4	142.8243	14.34	14.95	29.29	43.50	-14.21	peak	100	248	
5	174.4240	17.03	13.88	30.91	43.50	-12.59	peak	100	117	
6	833.3171	14.14	23.99	38.13	46.00	-7.87	peak	200	208	

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2412MHz)	Test Engineer:	
Note:	802.11 b 11M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarizat ion
2390.00	59.33	26.33	40.23	8.46	53.89	74.00	-20.11	peak	H
2390.00	48.41	26.33	40.23	8.46	42.97	54.00	-11.03	AVG	H
2400.00	58.47	26.38	40.20	8.49	53.14	74.00	-20.86	peak	H
2400.00	51.08	26.38	40.20	8.49	45.75	54.00	-8.25	AVG	H
4824.00	63.54	26.41	40.21	8.51	58.25	74.00	-15.75	peak	H
4824.00	53.11	26.41	40.21	8.51	47.82	54.00	-6.18	AVG	H
7236.00	58.96	31.01	40.19	9.53	59.31	74.00	-14.69	peak	H
7236.00	45.24	31.01	40.19	9.53	45.59	54.00	-8.41	AVG	H
2390.00	58.63	26.33	40.23	8.46	53.19	74.00	-20.81	peak	V
2390.00	45.79	26.33	40.23	8.46	40.35	54.00	-13.65	AVG	V
2400.00	55.21	26.38	40.20	8.49	49.88	74.00	-24.12	peak	V
2400.00	47.06	26.38	40.20	8.49	41.73	54.00	-12.27	AVG	V
4824.00	54.84	26.41	40.21	8.51	49.55	74.00	-24.45	peak	V
4824.00	44.21	26.41	40.21	8.51	38.92	54.00	-15.08	AVG	V
7236.00	51.46	31.01	40.19	9.53	51.81	74.00	-22.19	peak	V
7236.00	42.24	31.01	40.19	9.53	42.59	54.00	-11.41	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: "H" means Horizontal, "V" means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2437MHz)	Test Engineer:	
Note:	802.11 b 11M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
4874.00	54.17	31.04	40.19	9.59	54.61	74.00	-19.39	peak	H
4874.00	46.28	31.04	40.19	9.59	46.72	54.00	-7.28	AVG	H
9748.00	48.62	35.25	40.47	12.22	55.62	74.00	-18.38	peak	H
9748.00	39.41	35.25	40.47	12.22	46.41	54.00	-7.59	AVG	H
4874.00	48.58	31.04	40.19	9.59	49.02	74.00	-24.98	peak	V
4874.00	39.65	31.04	40.19	9.59	40.09	54.00	-13.91	AVG	V
9748.00	47.08	35.25	40.47	12.22	54.08	74.00	-19.92	peak	V
9748.00	37.79	35.25	40.47	12.22	44.79	54.00	-9.21	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2462MHz)	Test Engineer:	
Note:	802.11 b 11M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
2483.50	42.32	26.56	40.29	8.65	37.24	74.00	-36.76	peak	H
2483.50	37.25	26.56	40.29	8.65	32.17	54.00	-21.83	AVG	H
4924.00	64.53	26.51	40.21	8.54	59.37	74.00	-14.63	peak	H
4924.00	51.38	26.51	40.21	8.54	46.22	54.00	-7.78	AVG	H
7386.00	49.94	31.04	40.19	9.62	50.41	74.00	-23.59	peak	H
7386.00	43.34	31.04	40.19	9.62	43.81	54.00	-10.19	AVG	H
2483.50	59.32	26.56	40.29	8.65	54.24	74.00	-19.76	peak	V
2483.50	50.03	26.56	40.29	8.65	44.95	54.00	-9.05	AVG	V
4924.00	65.13	26.51	40.21	8.54	59.97	74.00	-14.03	peak	V
4924.00	52.05	26.51	40.21	8.54	46.89	54.00	-7.11	AVG	V
7386.00	55.00	31.04	40.19	9.62	55.47	74.00	-18.53	peak	V
7386.00	44.85	31.04	40.19	9.62	45.32	54.00	-8.68	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2412MHz)	Test Engineer:	
Note:	802.11 g 54M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarizat ion
2390.00	62.01	26.33	40.23	8.46	56.57	74.00	-17.43	peak	H
2390.00	50.16	26.33	40.23	8.46	44.72	54.00	-9.28	AVG	H
2400.00	57.61	26.38	40.20	8.49	52.28	74.00	-21.72	peak	H
2400.00	48.40	26.38	40.20	8.49	43.07	54.00	-10.93	AVG	H
4824.00	63.89	26.41	40.21	8.51	58.60	74.00	-15.40	peak	H
4824.00	53.92	26.41	40.21	8.51	48.63	54.00	-5.37	AVG	H
7236.00	60.71	31.01	40.19	9.53	61.06	74.00	-12.94	peak	H
7236.00	42.56	31.01	40.19	9.53	42.91	54.00	-11.09	AVG	H
2390.00	55.95	26.33	40.23	8.46	50.51	74.00	-23.49	peak	V
2390.00	45.44	26.33	40.23	8.46	40.00	54.00	-14.00	AVG	V
2400.00	54.40	26.38	40.20	8.49	49.07	74.00	-24.93	peak	V
2400.00	49.74	26.38	40.20	8.49	44.41	54.00	-9.59	AVG	V
4824.00	53.09	26.41	40.21	8.51	47.80	74.00	-26.20	peak	V
4824.00	45.07	26.41	40.21	8.51	39.78	54.00	-14.22	AVG	V
7236.00	48.78	31.01	40.19	9.53	49.13	74.00	-24.87	peak	V
7236.00	41.89	31.01	40.19	9.53	42.24	54.00	-11.76	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2437MHz)	Test Engineer:	
Note:	802.11 g 54M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
4874.00	52.42	31.04	40.19	9.59	52.86	74.00	-21.14	peak	H
4874.00	45.42	31.04	40.19	9.59	45.86	54.00	-8.14	AVG	H
9748.00	51.30	35.25	40.47	12.22	58.30	74.00	-15.70	peak	H
9748.00	37.66	35.25	40.47	12.22	44.66	54.00	-9.34	AVG	H
4874.00	49.44	31.04	40.19	9.59	49.88	74.00	-24.12	peak	V
4874.00	42.33	31.04	40.19	9.59	42.77	54.00	-11.23	AVG	V
9748.00	46.73	35.25	40.47	12.22	53.73	74.00	-20.27	peak	V
9748.00	36.98	35.25	40.47	12.22	43.98	54.00	-10.02	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2462MHz)	Test Engineer:	
Note:	802.11 g 54M		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
2483.50	42.67	26.56	40.29	8.65	37.59	74.00	-36.41	peak	H
2483.50	38.06	26.56	40.29	8.65	32.98	54.00	-21.02	AVG	H
4924.00	61.85	26.51	40.21	8.54	56.69	74.00	-17.31	peak	H
4924.00	49.63	26.51	40.21	8.54	44.47	54.00	-9.53	AVG	H
7386.00	49.08	31.04	40.19	9.62	49.55	74.00	-24.45	peak	H
7386.00	46.02	31.04	40.19	9.62	46.49	54.00	-7.51	AVG	H
2483.50	59.67	26.56	40.29	8.65	54.59	74.00	-19.41	peak	V
2483.50	50.84	26.56	40.29	8.65	45.76	54.00	-8.24	AVG	V
4924.00	66.88	26.51	40.21	8.54	61.72	74.00	-12.28	peak	V
4924.00	51.37	26.51	40.21	8.54	46.21	54.00	-7.79	AVG	V
7386.00	53.25	31.04	40.19	9.62	53.72	74.00	-20.28	peak	V
7386.00	43.99	31.04	40.19	9.62	44.46	54.00	-9.54	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2412MHz)	Test Engineer:	
Note:	802.11 n20		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarizat ion
2390.00	61.66	26.33	40.23	8.46	56.22	74.00	-17.78	peak	H
2390.00	49.35	26.33	40.23	8.46	43.91	54.00	-10.09	AVG	H
2400.00	59.36	26.38	40.20	8.49	54.03	74.00	-19.97	peak	H
2400.00	49.21	26.38	40.20	8.49	43.88	54.00	-10.12	AVG	H
4824.00	64.24	26.41	40.21	8.51	58.95	74.00	-15.05	peak	H
4824.00	51.49	26.41	40.21	8.51	46.20	54.00	-7.80	AVG	H
7236.00	58.96	31.01	40.19	9.53	59.31	74.00	-14.69	peak	H
7236.00	42.91	31.01	40.19	9.53	43.26	54.00	-10.74	AVG	H
2390.00	55.14	26.33	40.23	8.46	49.70	74.00	-24.30	peak	V
2390.00	43.69	26.33	40.23	8.46	38.25	54.00	-15.75	AVG	V
2400.00	53.59	26.38	40.20	8.49	48.26	74.00	-25.74	peak	V
2400.00	49.39	26.38	40.20	8.49	44.06	54.00	-9.94	AVG	V
4824.00	52.28	26.41	40.21	8.51	46.99	74.00	-27.01	peak	V
4824.00	46.82	26.41	40.21	8.51	41.53	54.00	-12.47	AVG	V
7236.00	49.46	31.01	40.19	9.53	49.81	74.00	-24.19	peak	V
7236.00	40.14	31.01	40.19	9.53	40.49	54.00	-13.51	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2437MHz)	Test Engineer:	
Note:	802.11 n20		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
4874.00	53.23	31.04	40.19	9.59	53.67	74.00	-20.33	peak	H
4874.00	43.67	31.04	40.19	9.59	44.11	54.00	-9.89	AVG	H
9748.00	52.11	35.25	40.47	12.22	59.11	74.00	-14.89	peak	H
9748.00	38.01	35.25	40.47	12.22	45.01	54.00	-8.99	AVG	H
4874.00	48.63	31.04	40.19	9.59	49.07	74.00	-24.93	peak	V
4874.00	44.08	31.04	40.19	9.59	44.52	54.00	-9.48	AVG	V
9748.00	47.41	35.25	40.47	12.22	54.41	74.00	-19.59	peak	V
9748.00	35.23	35.25	40.47	12.22	42.23	54.00	-11.77	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966 LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.247		Humidity(%):60%
EUT:	WIFI SMART FIREPLACE	Test Time:	2019/10/18
M/N.:	ZHS-32-F	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (2462MHz)	Test Engineer:	
Note:	802.11 n20		

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-amp (dB)	Cable lost (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detect	Antenna polarization
2483.50	42.67	26.56	40.29	8.65	37.59	74.00	-36.41	peak	H
2483.50	38.06	26.56	40.29	8.65	32.98	54.00	-21.02	AVG	H
4924.00	66.28	26.51	40.21	8.54	61.12	74.00	-12.88	peak	H
4924.00	50.57	26.51	40.21	8.54	45.41	54.00	-8.59	AVG	H
7386.00	50.29	31.04	40.19	9.62	50.76	74.00	-23.24	peak	H
7386.00	44.15	31.04	40.19	9.62	44.62	54.00	-9.38	AVG	H
2483.50	57.57	26.56	40.29	8.65	52.49	74.00	-21.51	peak	V
2483.50	49.35	26.56	40.29	8.65	44.27	54.00	-9.73	AVG	V
4924.00	66.88	26.51	40.21	8.54	61.72	74.00	-12.28	peak	V
4924.00	51.19	26.51	40.21	8.54	46.03	54.00	-7.97	AVG	V
7386.00	52.32	31.04	40.19	9.62	52.79	74.00	-21.21	peak	V
7386.00	45.20	31.04	40.19	9.62	45.67	54.00	-8.33	AVG	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.


2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

5. Peak Output Power

5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY5451047 6	2019/06/21	1 Year

5.2. BLOCK DIAGRAM OF TEST SETUP

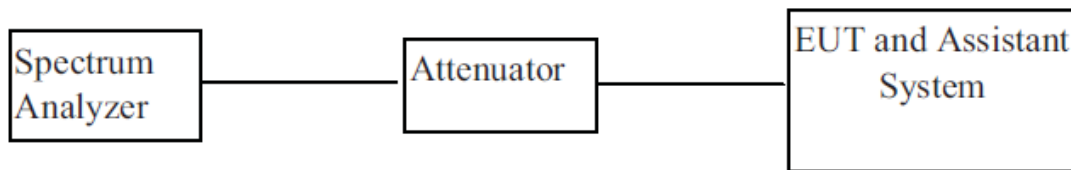

5.3. Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt (30dBm).

5.4. Test Procedure

For peak output power test:


1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note : The EUT was tested according to KDB 558074v03r04 for compliance to FCC 47CFR 15.247 requirements.


5.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b 11Mbps	2412	Ant 1	12.43	0	12.43	30	Pass
NVNT	802.11b 11Mbps	2437	Ant 1	12.656	0	12.656	30	Pass
NVNT	802.11b 11Mbps	2462	Ant 1	12.77	0	12.77	30	Pass


Power NVNT 802.11b 11Mbps 2412MHz Ant1

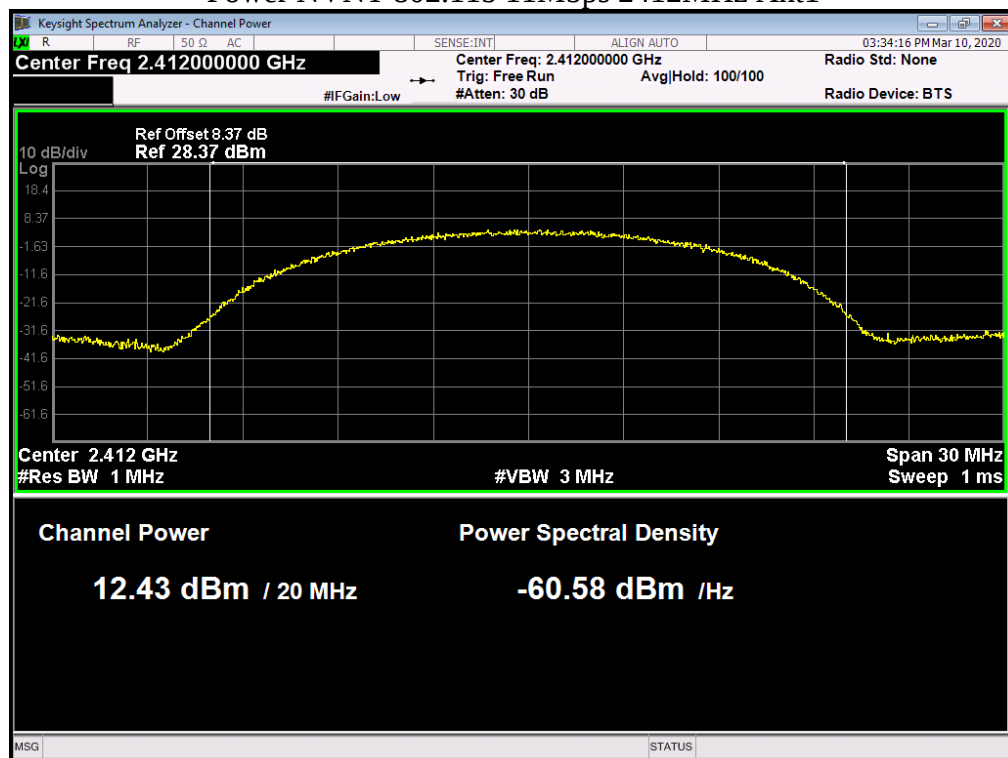

Power NVNT 802.11b 11Mbps 2437MHz Ant1

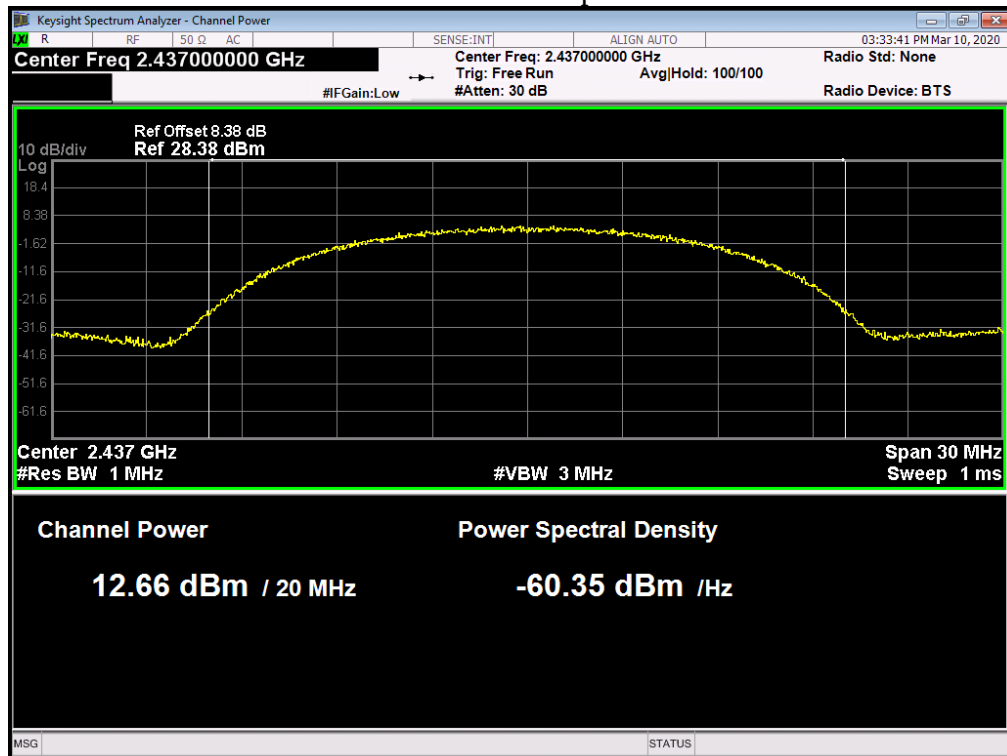


Power NVNT 802.11b 11Mbps 2462MHz Ant1

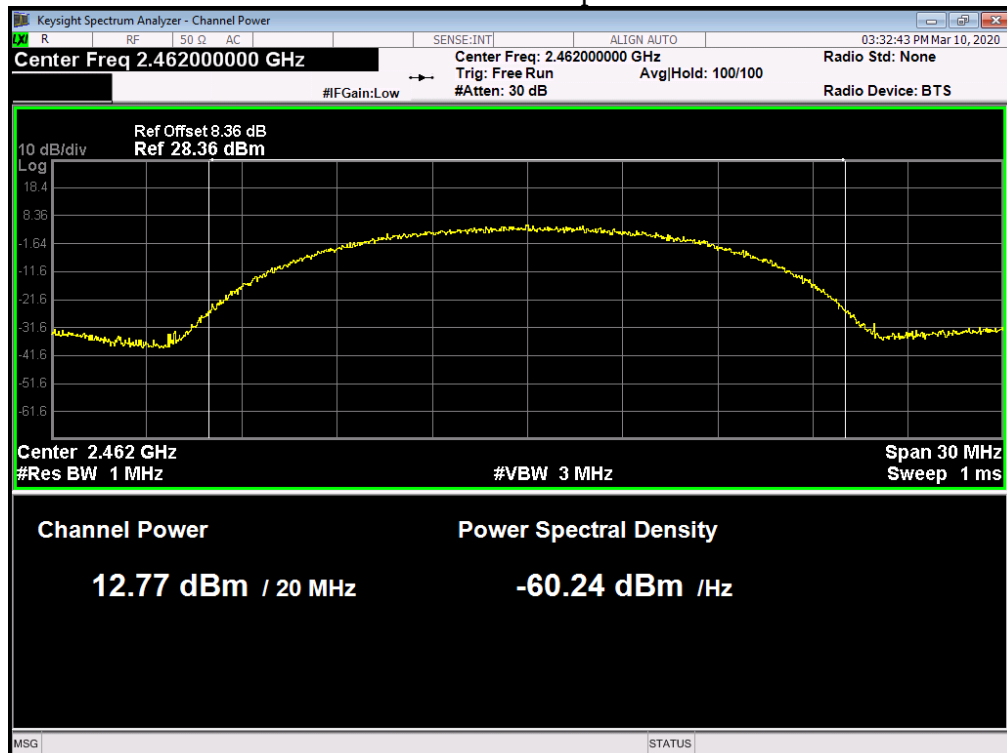


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11g 54Mbps	2412	Ant 1	11.25	0	11.25	30	Pass
NVNT	802.11g 54Mbps	2437	Ant 1	11.924	0	11.924	30	Pass
NVNT	802.11g 54Mbps	2462	Ant 1	12.107	0	12.107	30	Pass


Power NVNT 802.11g 54Mbps 2412MHz Ant1

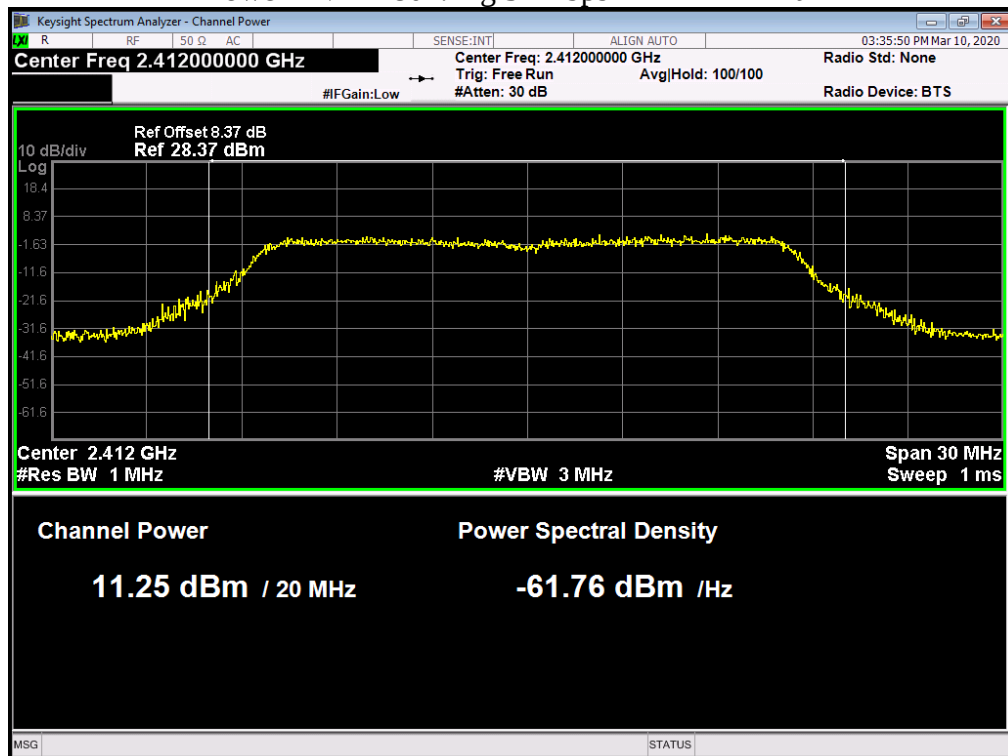

Power NVNT 802.11g 54Mbps 2437MHz Ant1

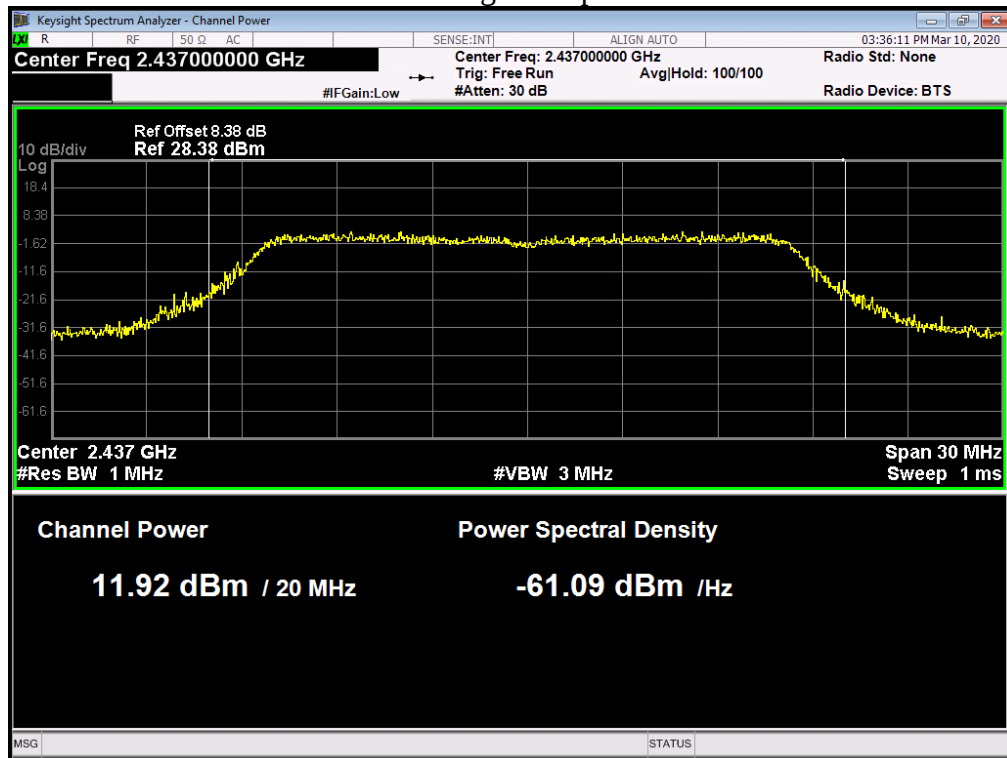


6. Power NVNT 802.11g 54Mbps 2462MHz Ant1

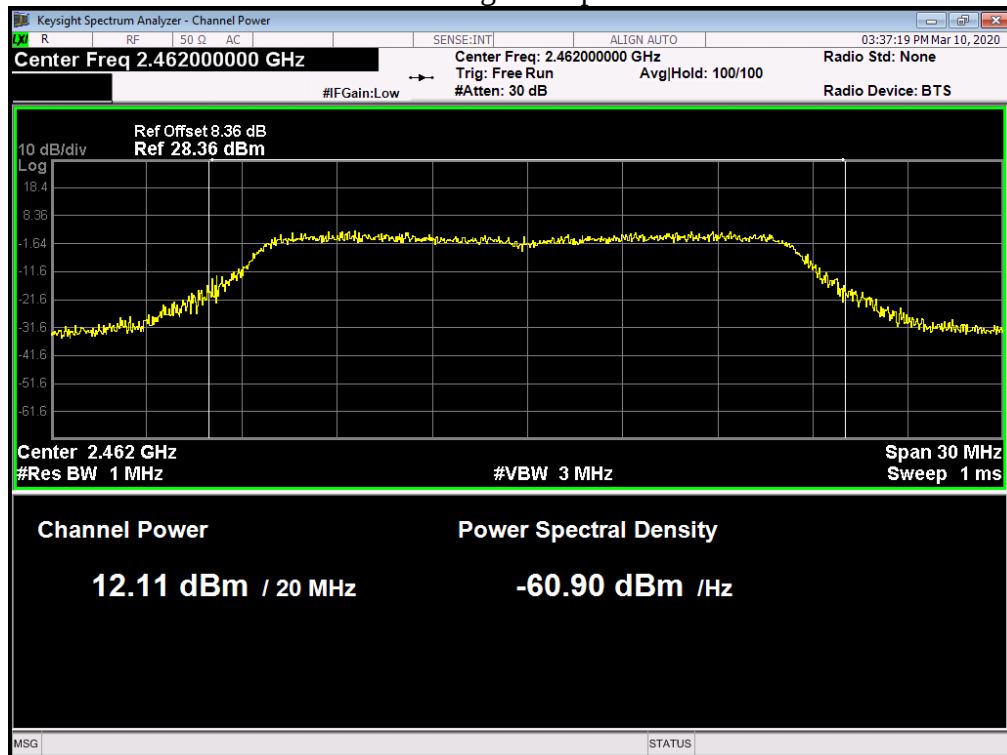


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	11.311	0	11.311	30	Pass
NVNT	802.11n(HT20)	2437	Ant 1	11.968	0	11.968	30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	12.083	0	12.083	30	Pass


Power NVNT 802.11n(HT20) 2412MHz Ant1

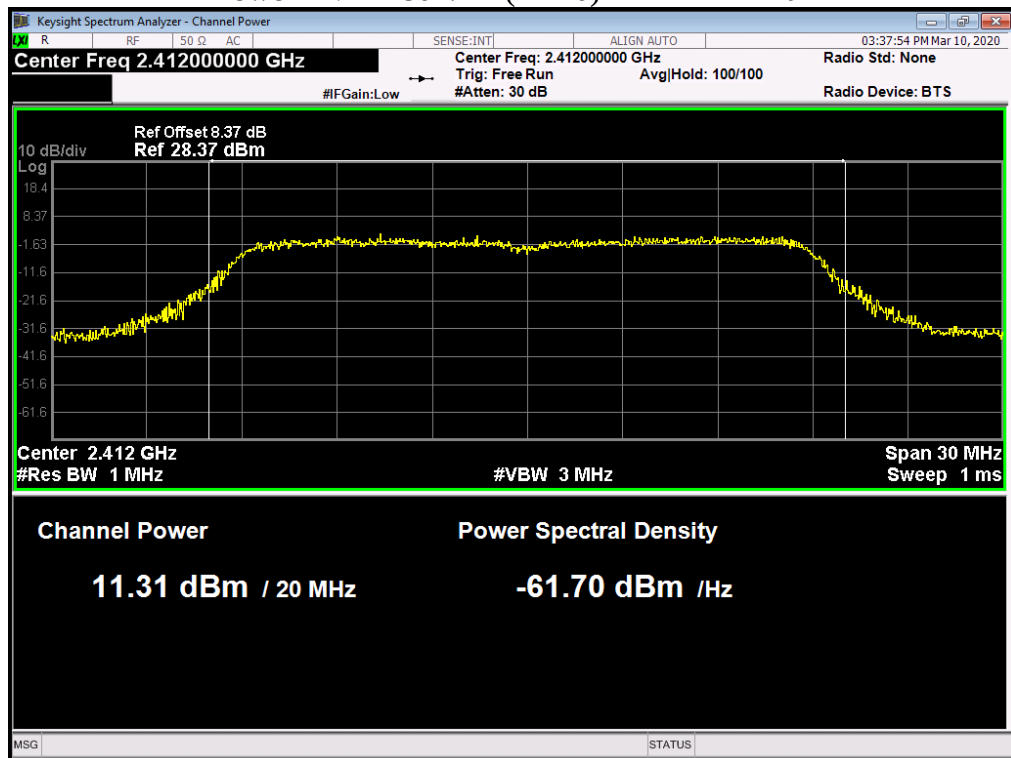

Power NVNT 802.11n(HT20) 2437MHz Ant1

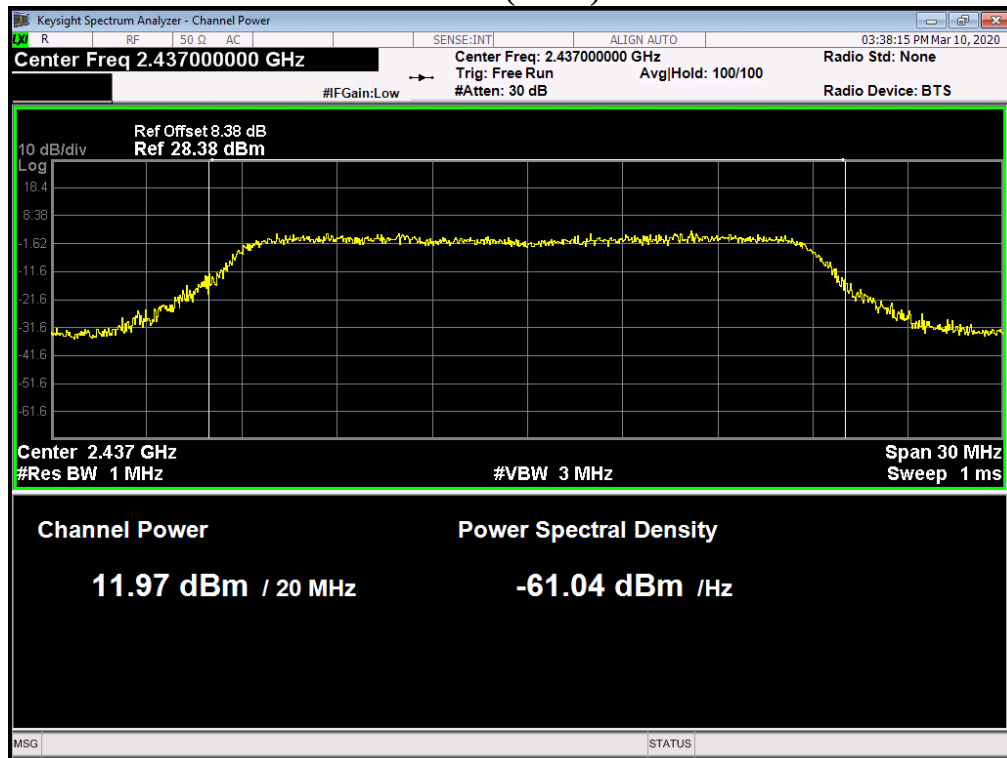

Power NVNT 802.11n(HT20) 2462MHz Ant1

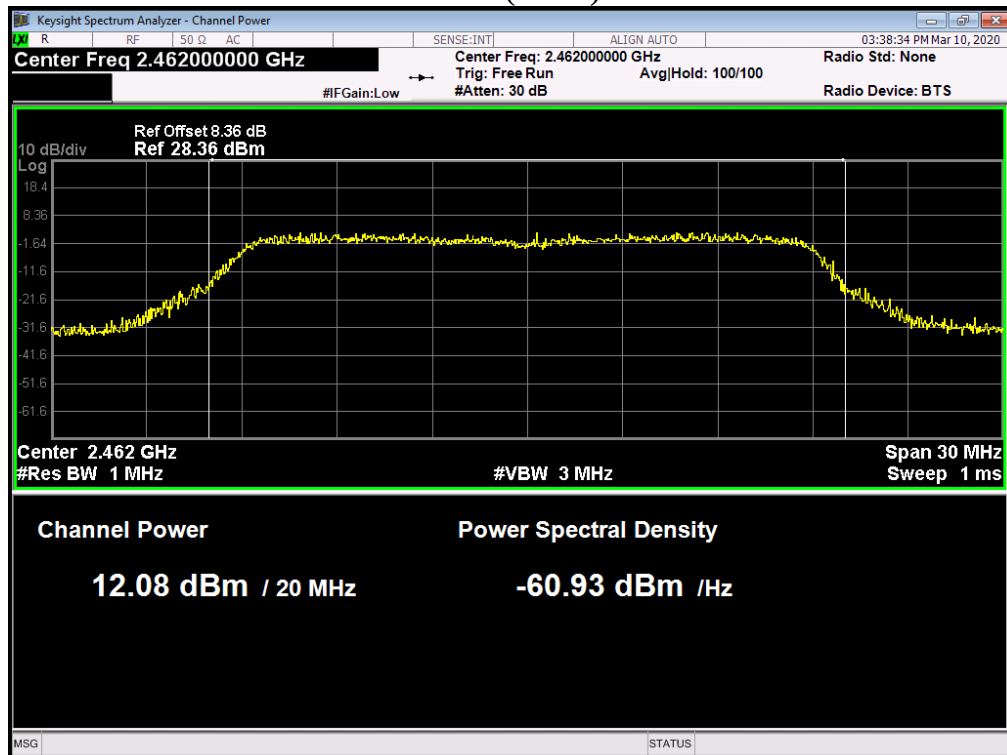


6. -6dB Bandwidth

6.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY5451047 6	2019/06/21	1 Year

6.2. BLOCK DIAGRAM OF TEST SETUP

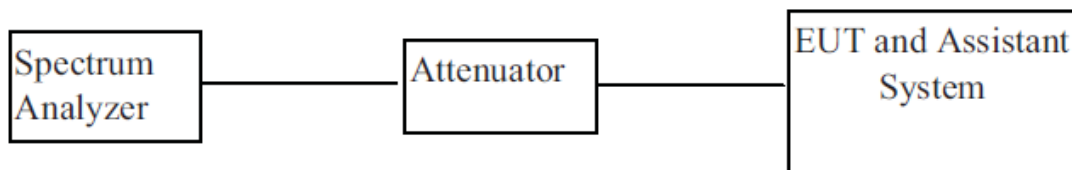

6.3. Limit

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4. Test Procedure


1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ 3 $\times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


6.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b 11Mbps	2412	Ant 1	14.9026	10.5582	0.5	Pass
NVNT	802.11b 11Mbps	2437	Ant 1	15.0683	8.9163	0.5	Pass
NVNT	802.11b 11Mbps	2462	Ant 1	15.0978	11.3786	0.5	Pass


OBW NVNT 802.11b 11Mbps 2412MHz Ant1

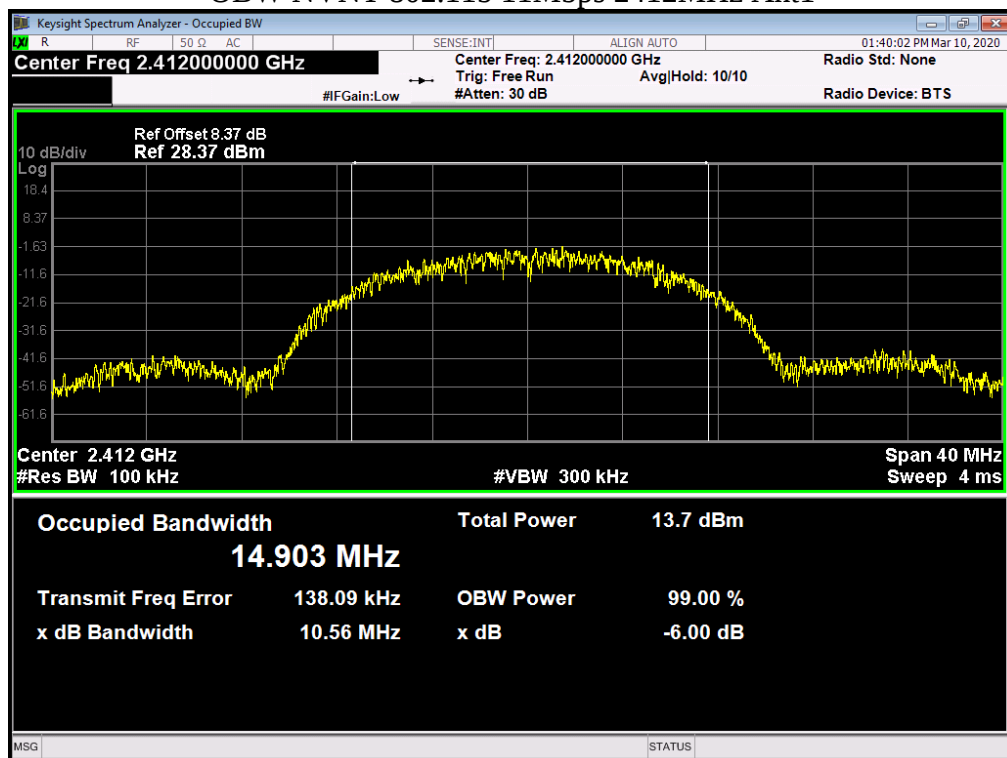

OBW NVNT 802.11b 11Mbps 2437MHz Ant1

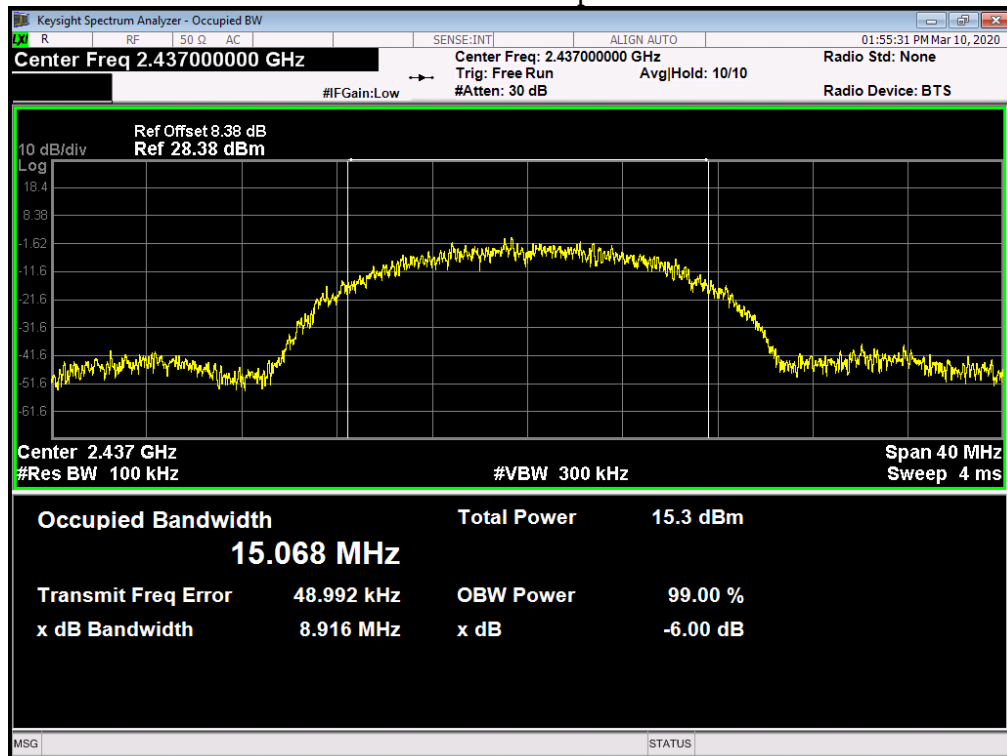


OBW NVNT 802.11b 11Mbps 2462MHz Ant1

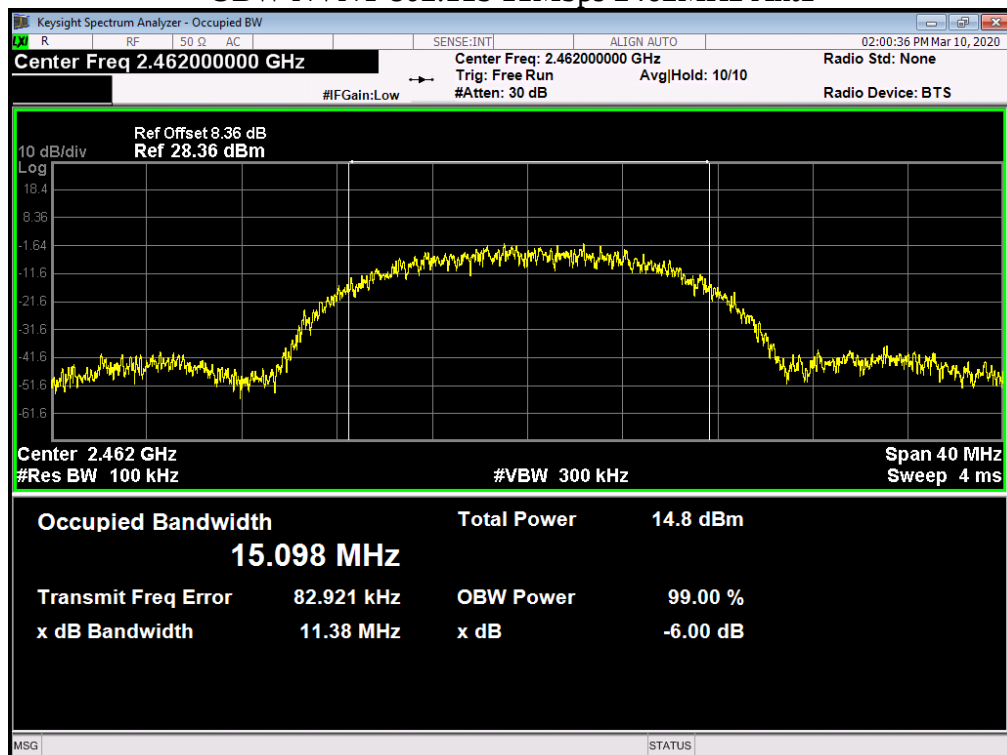


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11g 54Mbps	2412	Ant 1	16.4524	16.3833	0.5	Pass
NVNT	802.11g 54Mbps	2437	Ant 1	16.4211	15.9514	0.5	Pass
NVNT	802.11g 54Mbps	2462	Ant 1	16.4458	16.3313	0.5	Pass


OBW NVNT 802.11g 54Mbps 2412MHz Ant1

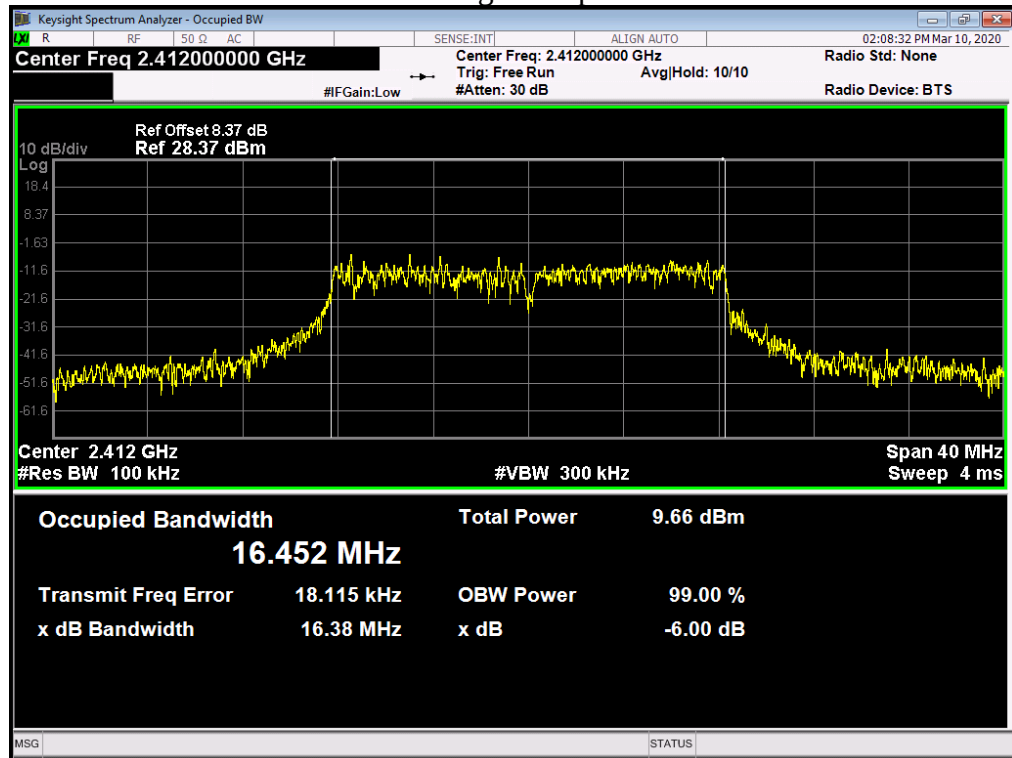

OBW NVNT 802.11g 54Mbps 2437MHz Ant1

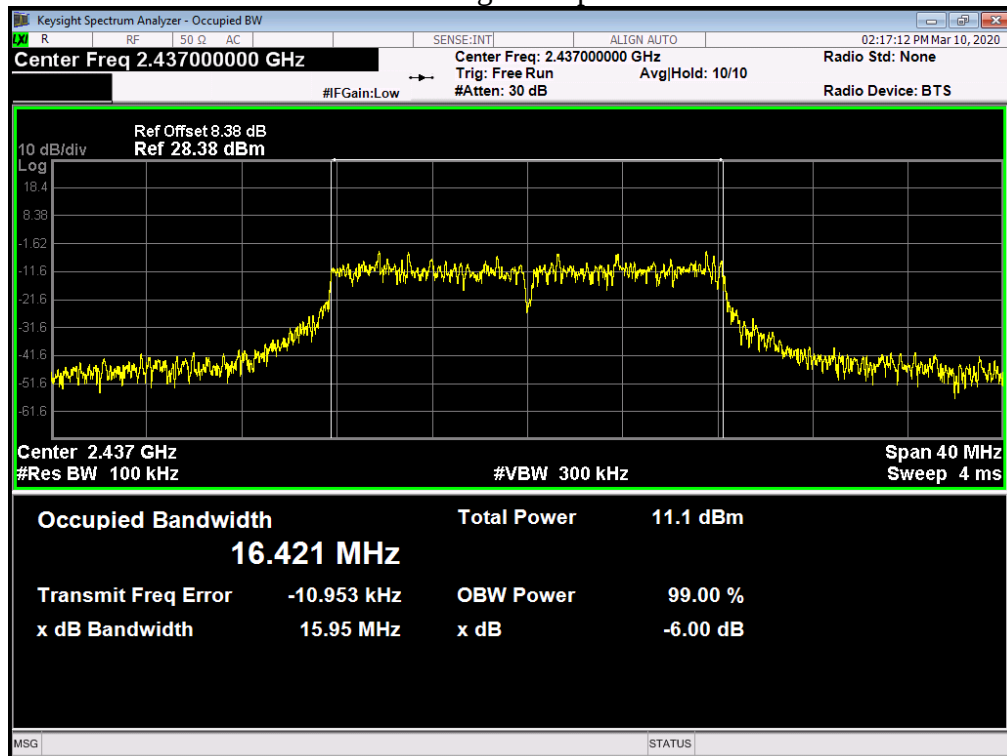


OBW NVNT 802.11g 54Mbps 2462MHz Ant1

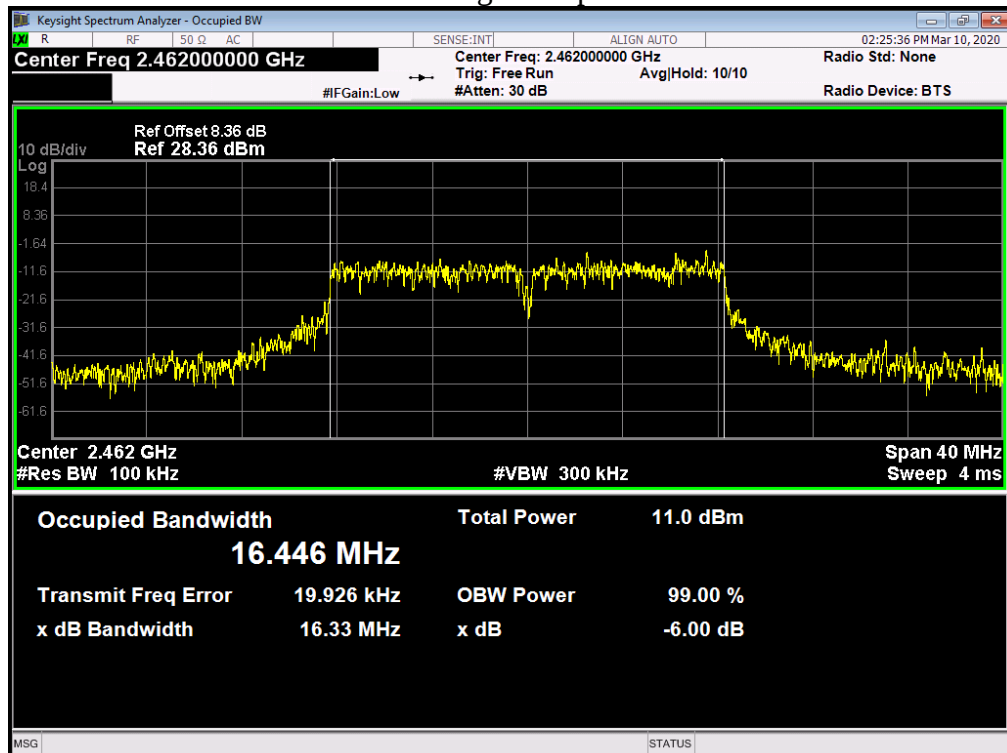


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	17.6632	17.2721	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	17.624	16.9821	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	17.576	16.5959	0.5	Pass


OBW NVNT 802.11n(HT20) 2412MHz Ant1

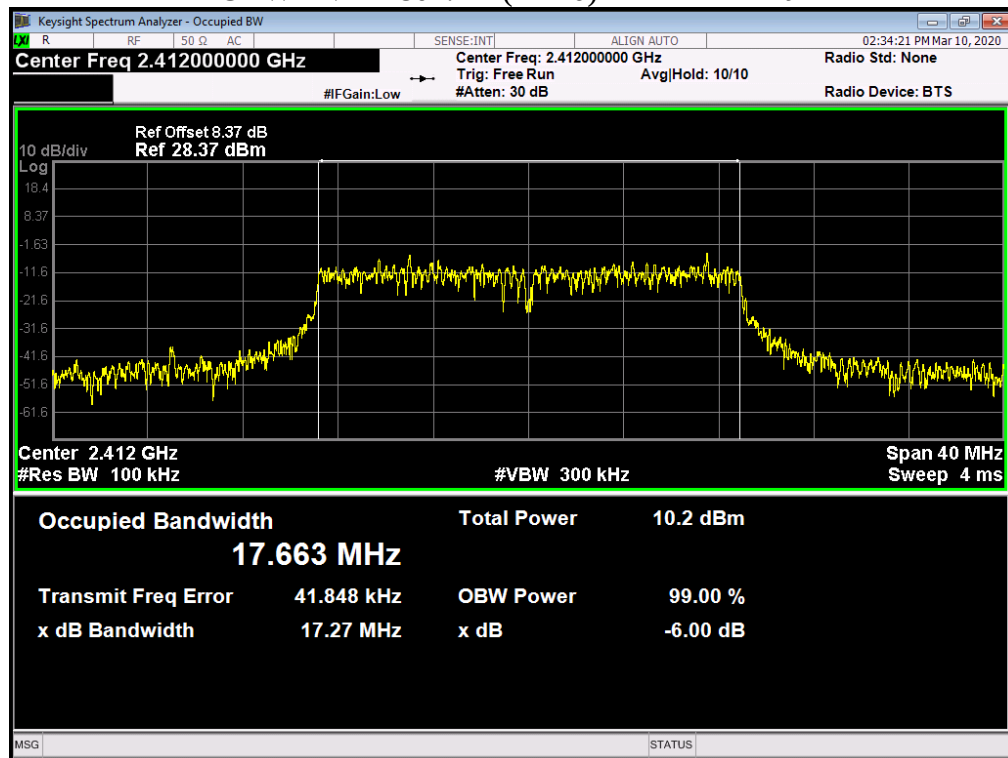

OBW NVNT 802.11n(HT20) 2437MHz Ant1

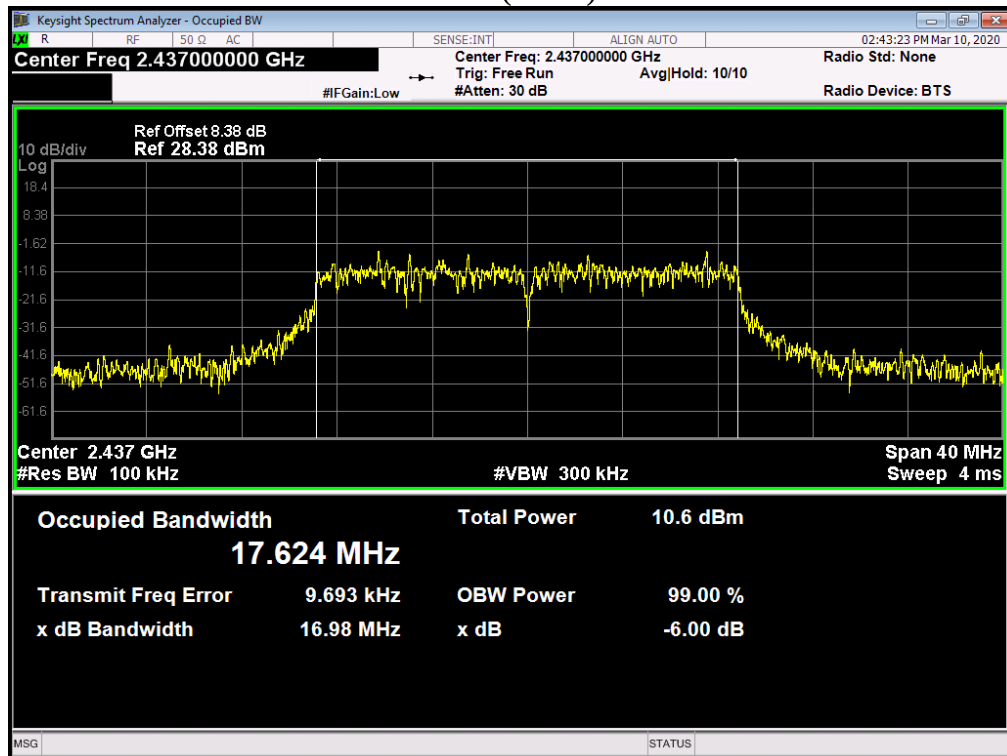

OBW NVNT 802.11n(HT20) 2462MHz Ant1

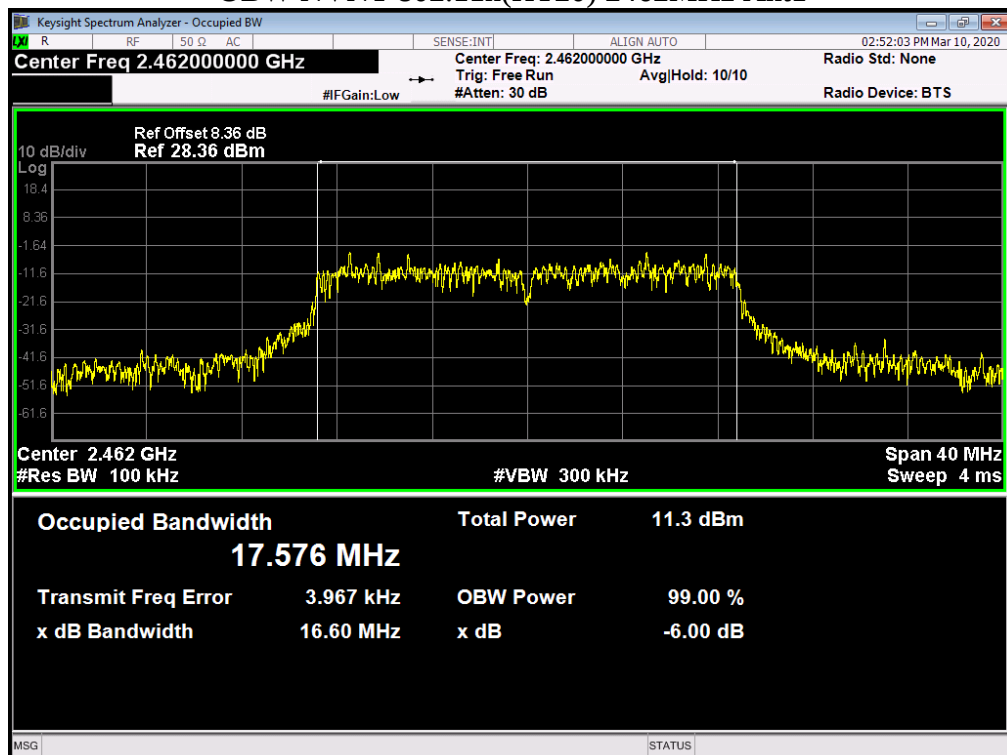


7. Band Edges Measurement

7.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY5451047 6	2019/06/21	1 Year

7.2. BLOCK DIAGRAM OF TEST SETUP

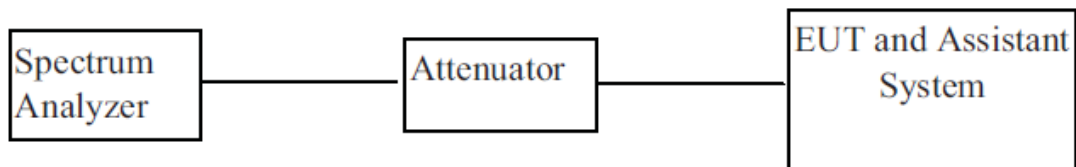

7.3. Limit

Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.4. Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable.


Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.

Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.


The band edges was measured and recorded.

7.5. Test result


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b 11Mbps	2412	Ant 1	-45.984	-30	Pass
NVNT	802.11b 11Mbps	2462	Ant 1	-46.027	-30	Pass

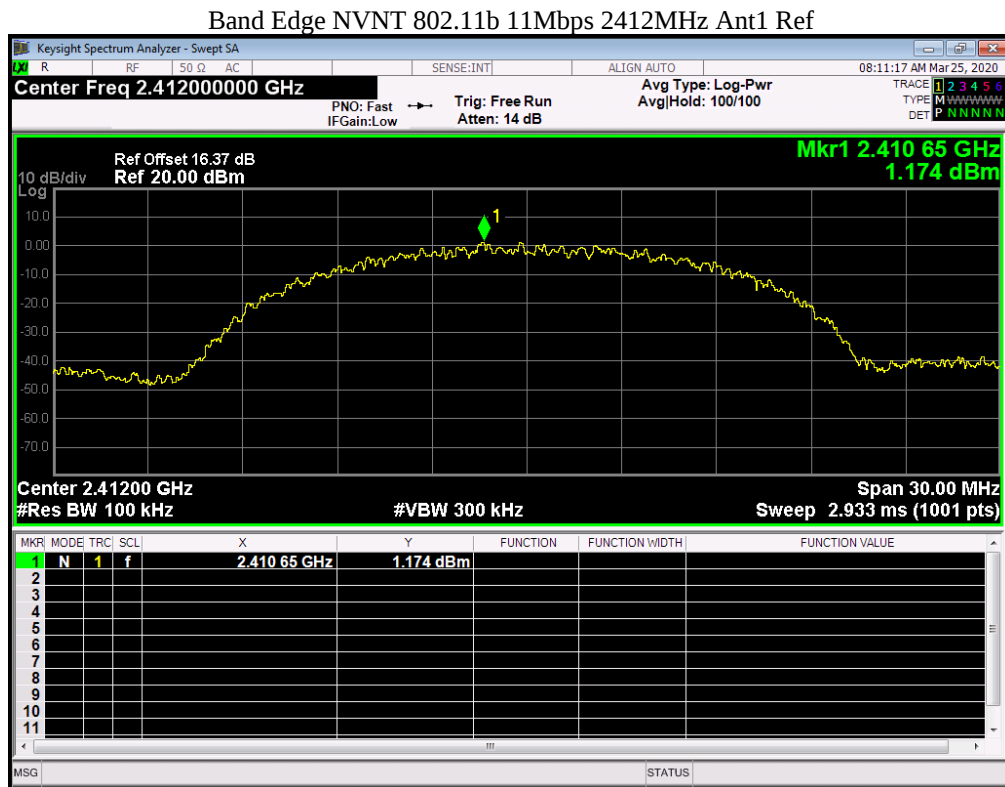

Band Edge NVNT 802.11b 11Mbps 2412MHz Ant1 Emission

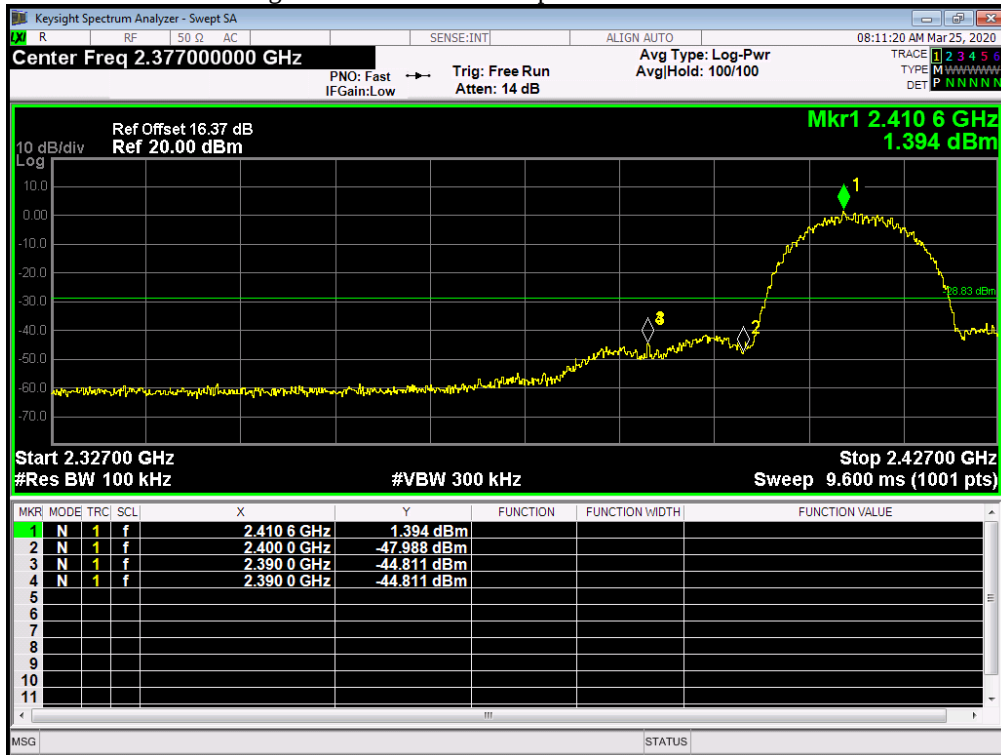


Band Edge NVNT 802.11b 11Mbps 2462MHz Ant1 Emission

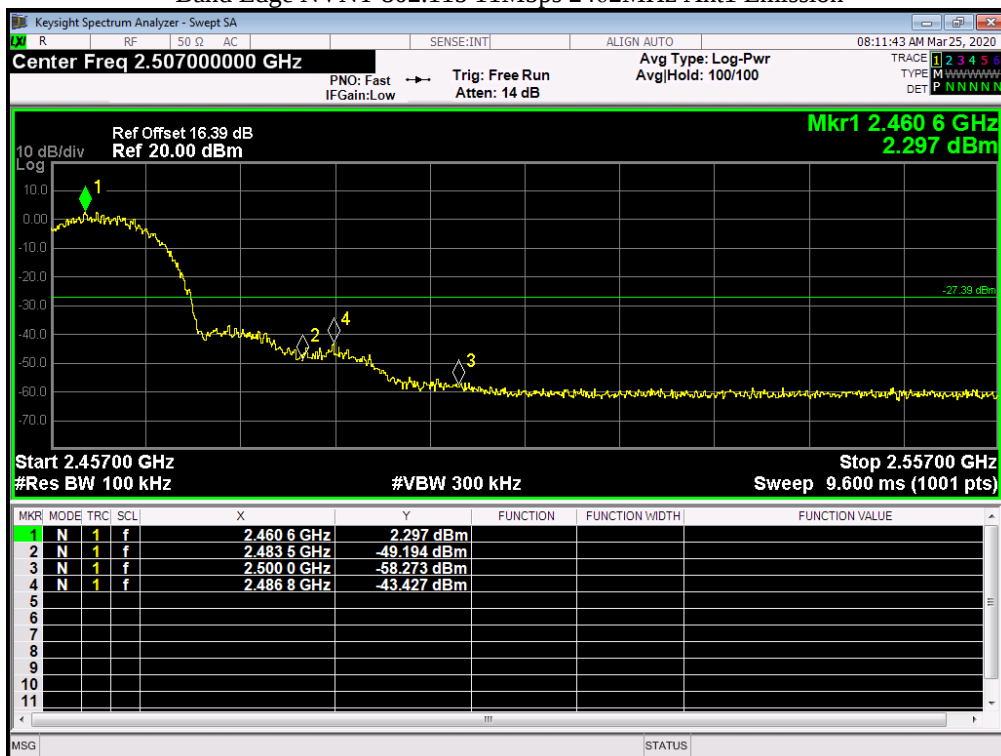


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11g 54Mbps	2412	Ant 1	-39.804	-30	Pass
NVNT	802.11g 54Mbps	2462	Ant 1	-38.566	-30	Pass


Band Edge NVNT 802.11g 54Mbps 2412MHz Ant1 Ref

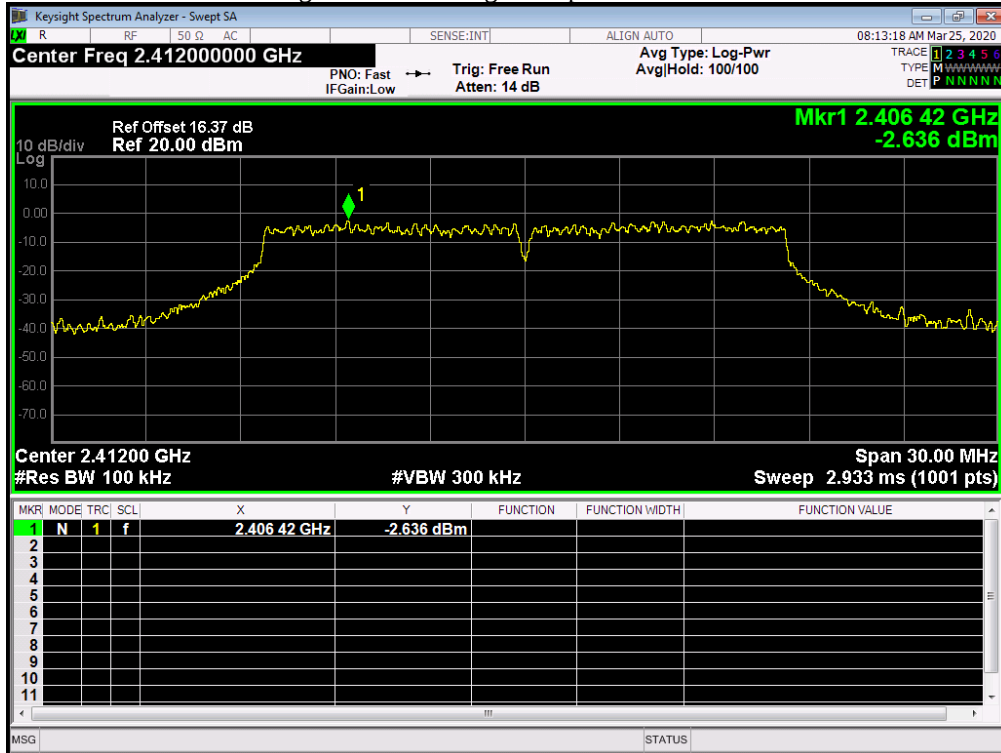

Band Edge NVNT 802.11g 54Mbps 2412MHz Ant1 Emission

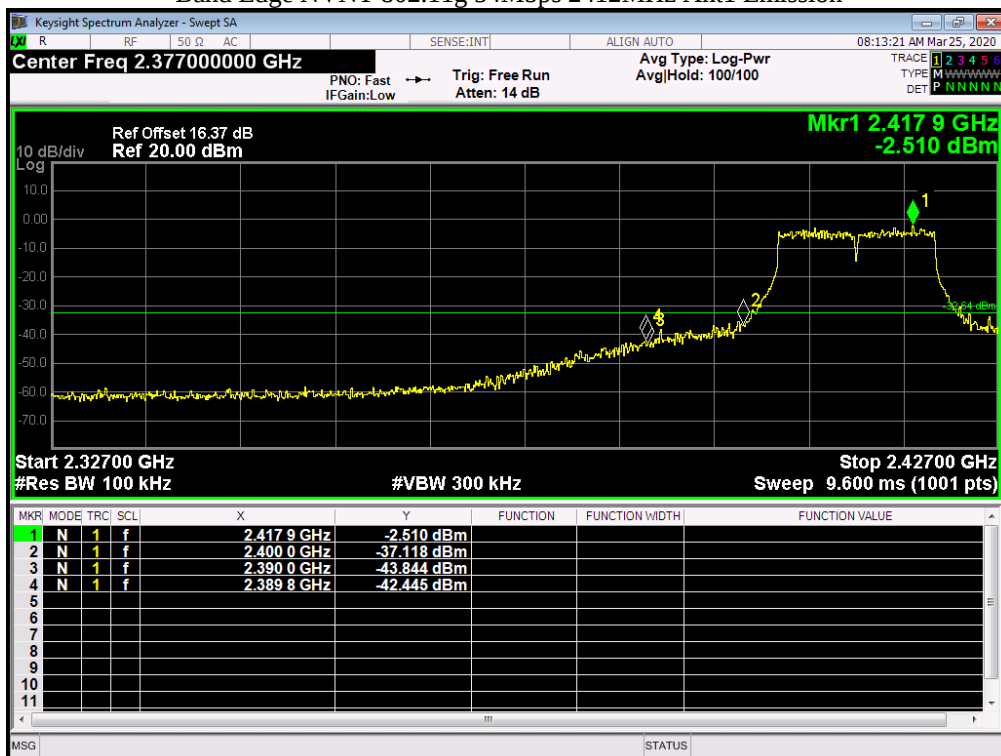


Band Edge NVNT 802.11g 54Mbps 2462MHz Ant1 Emission

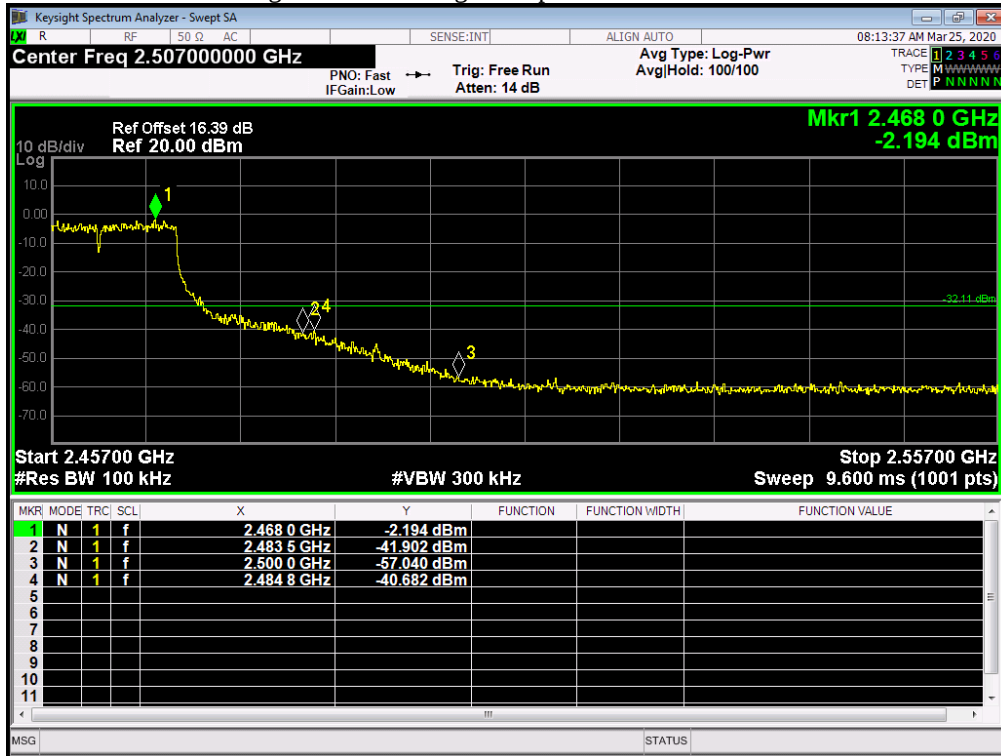


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11n(HT20)	2412	Ant 1	-37.58	-30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-37.397	-30	Pass


Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref

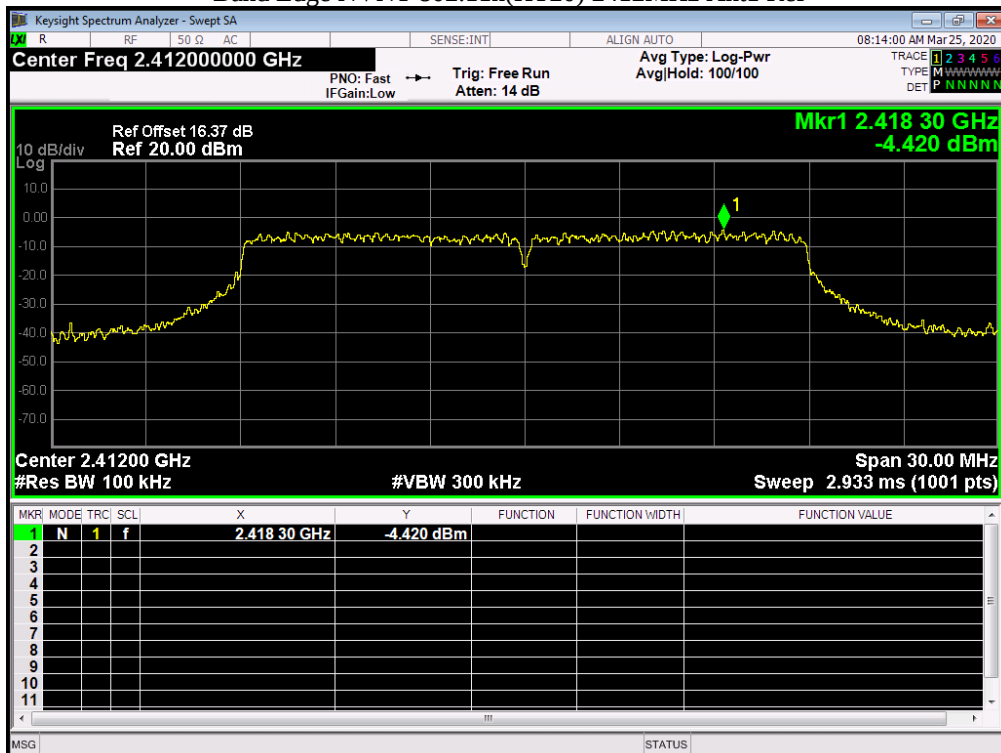

Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

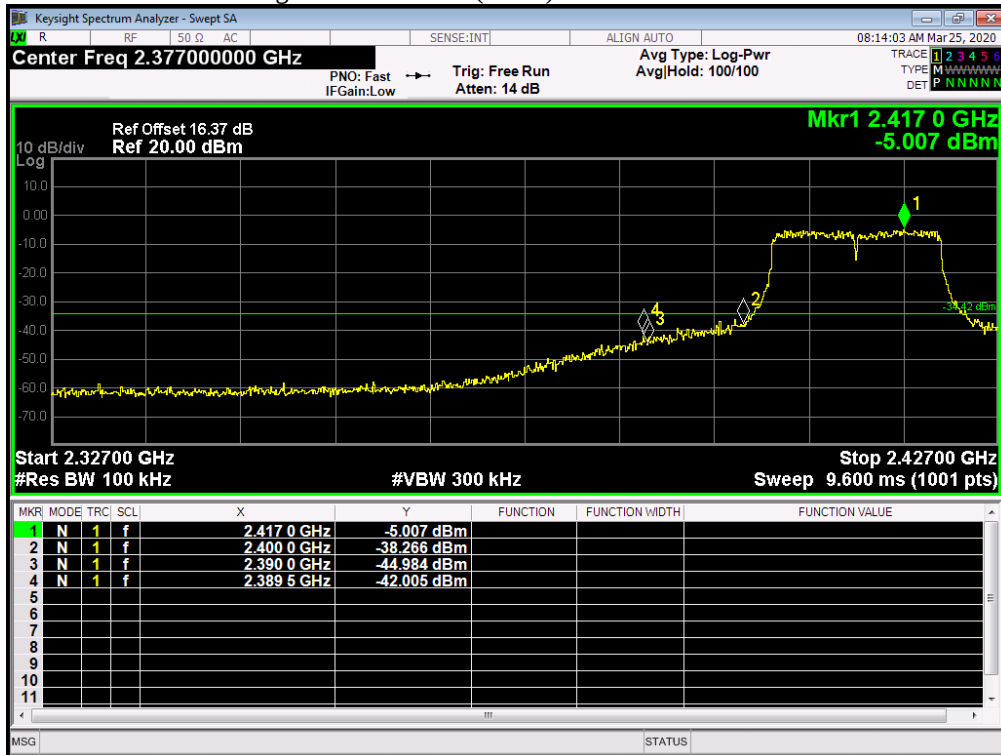

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

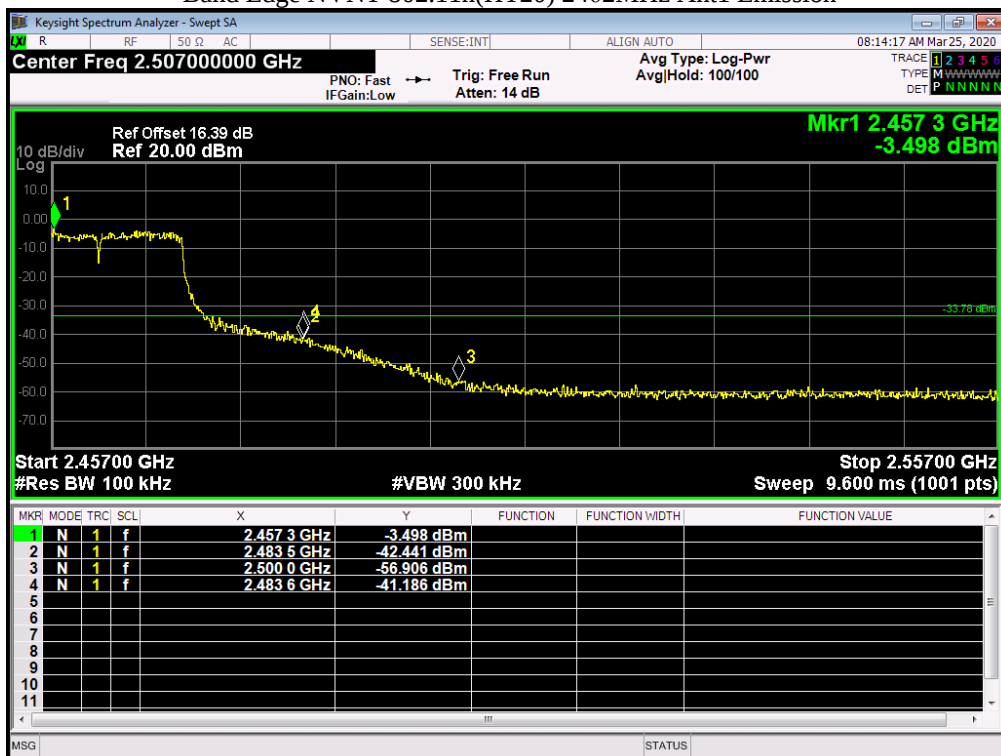


8. Conducted Spurious Emission

8.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY5451047 6	2019/06/21	1 Year

8.2. BLOCK DIAGRAM OF TEST SETUP

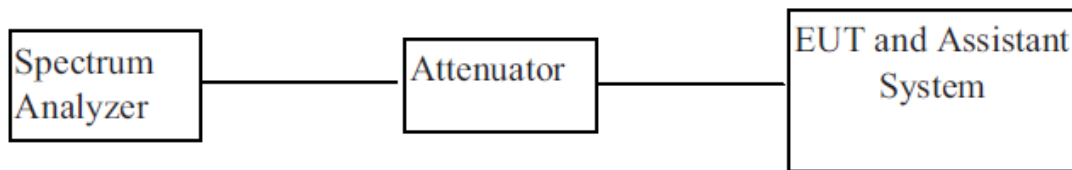

8.3. Limit

In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)


8.4. Test Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

8.5. Test result


Tx. Spurious NVNT 802.11b 11Mbps 2412MHz Ant1 Emission

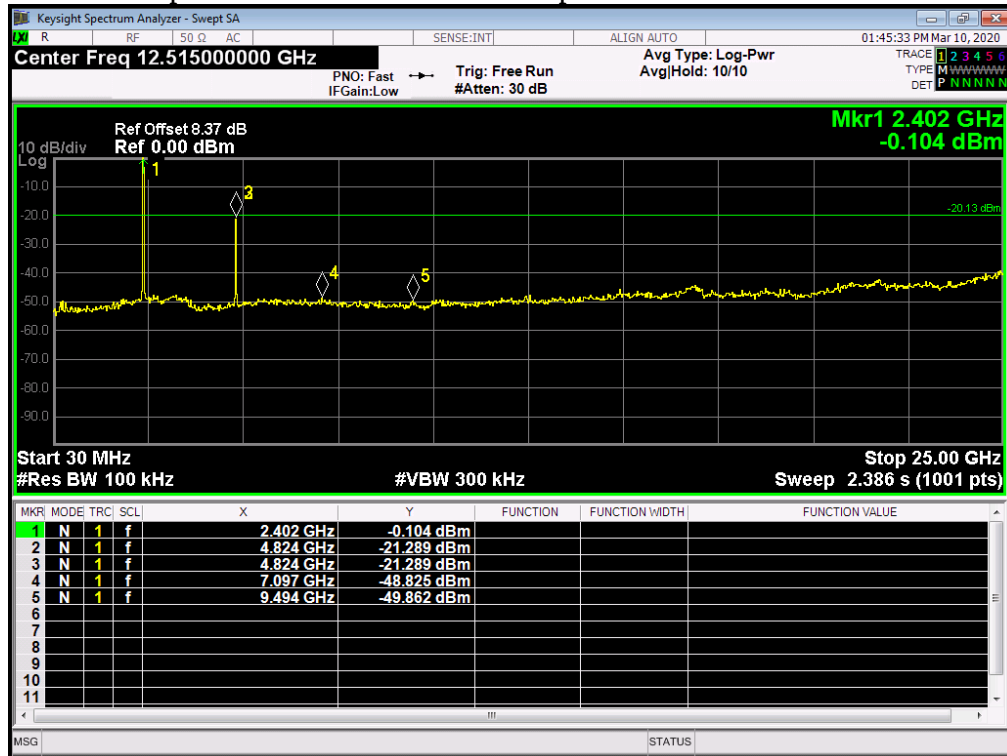


Tx. Spurious NVNT 802.11b 11Mbps 2437MHz Ant1 Emission

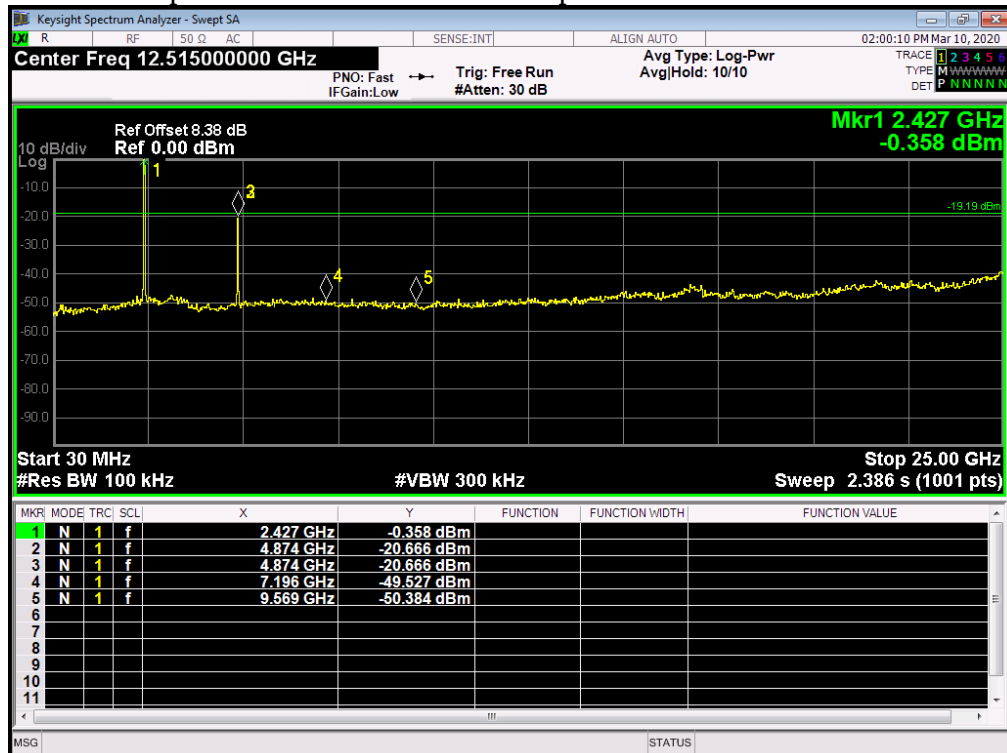


Tx. Spurious NVNT 802.11b 11Mbps 2462MHz Ant1 Emission

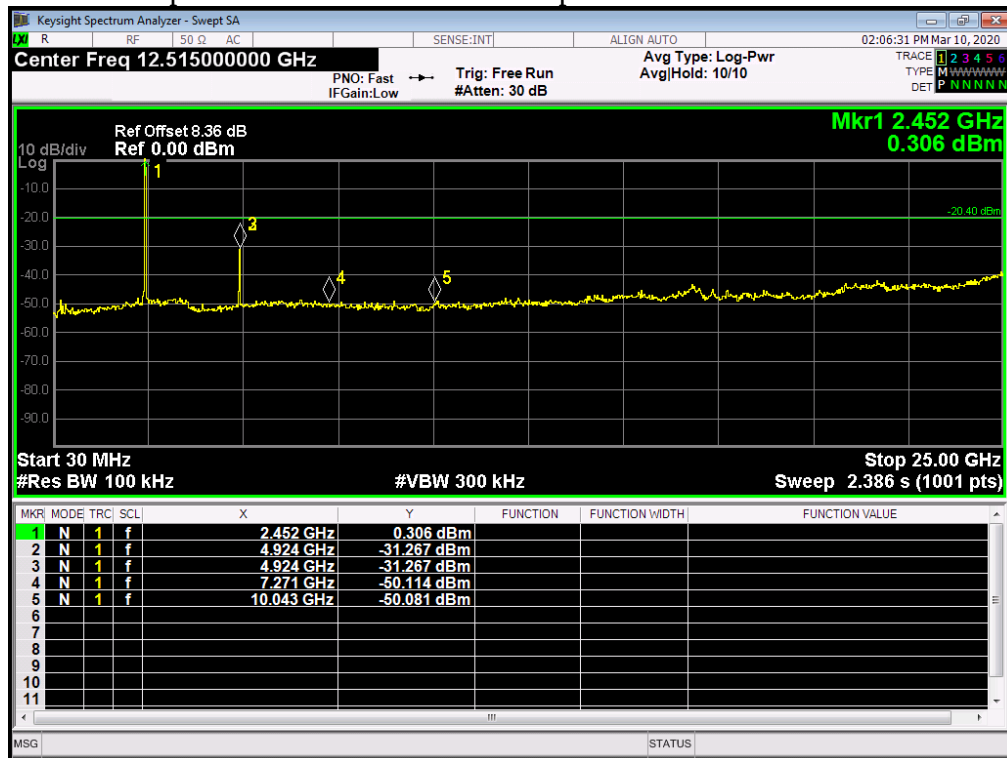


Tx. Spurious NVNT 802.11g 54Mbps 2412MHz Ant1 Emission

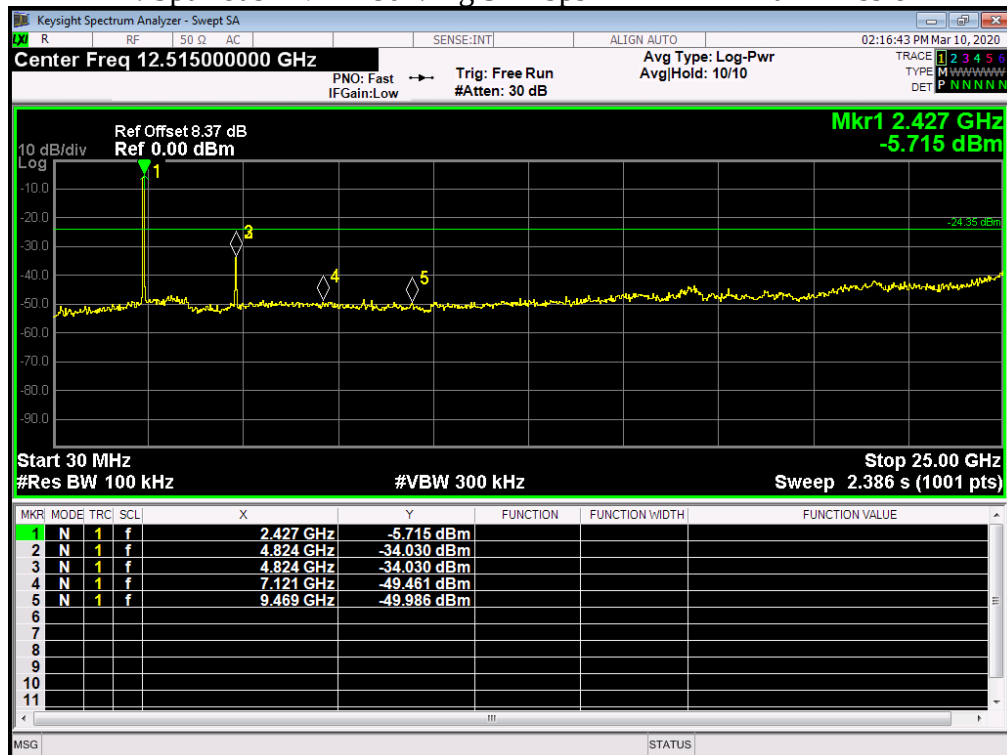


Tx. Spurious NVNT 802.11g 54Mbps 2437MHz Ant1 Emission

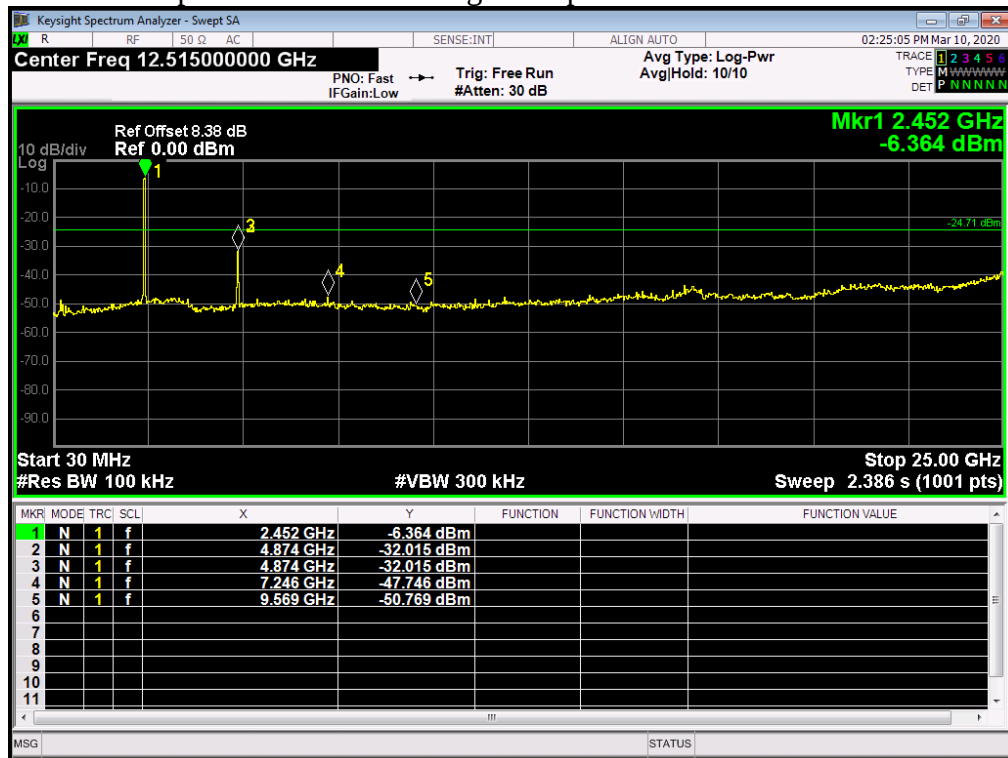


Tx. Spurious NVNT 802.11g 54Mbps 2462MHz Ant1 Emission

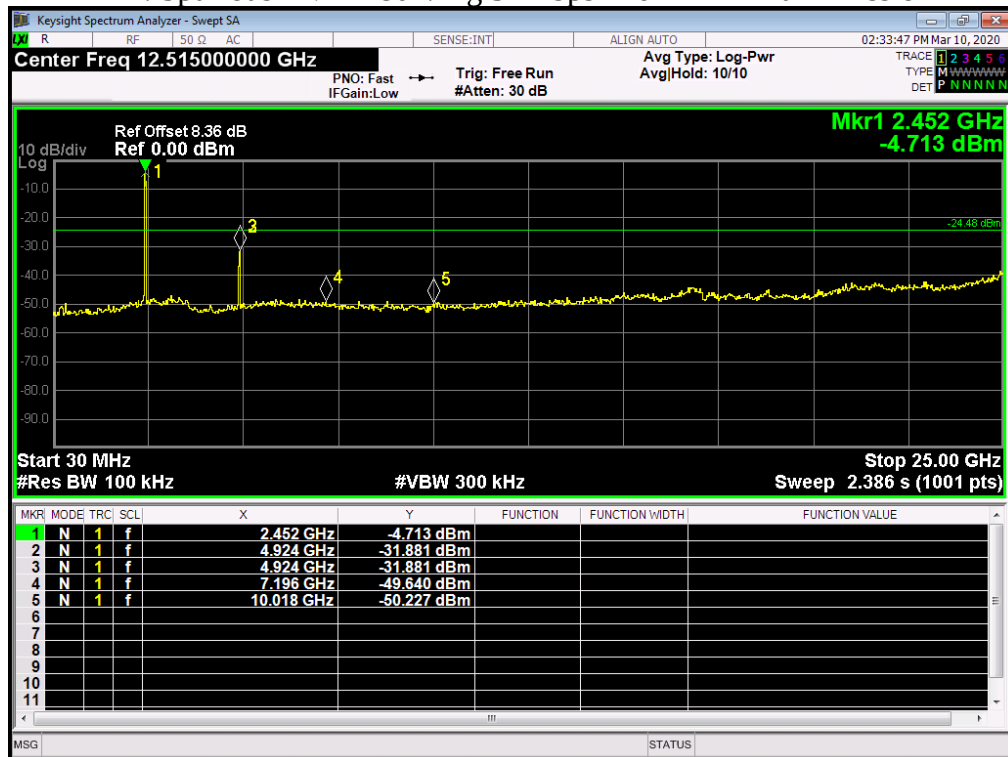


Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Emission

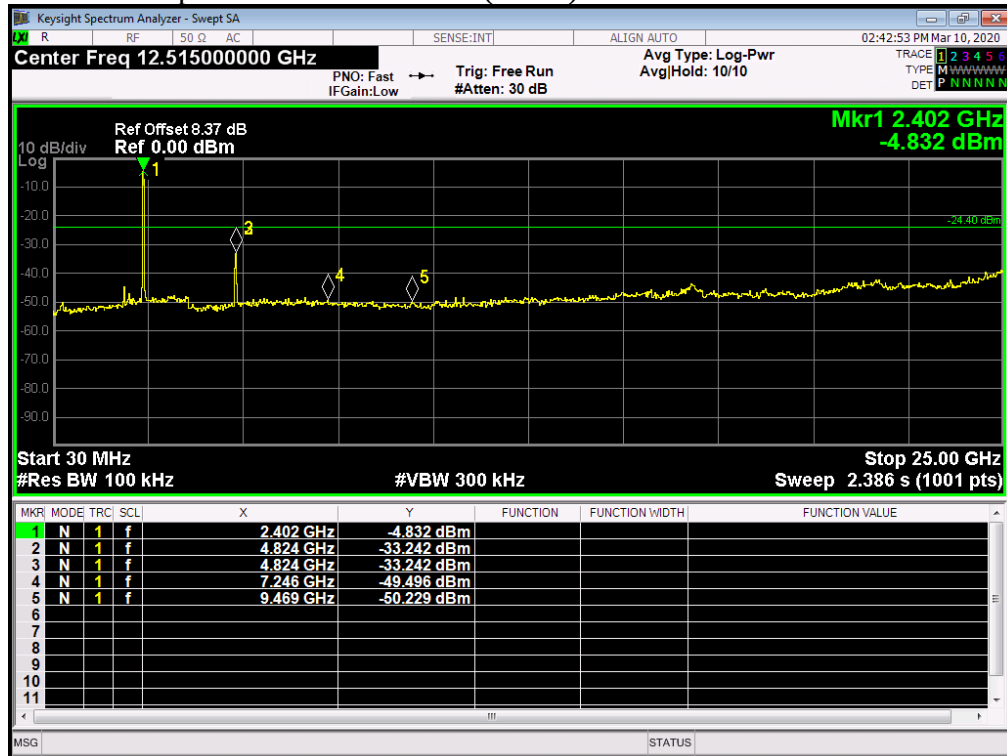

Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Emission

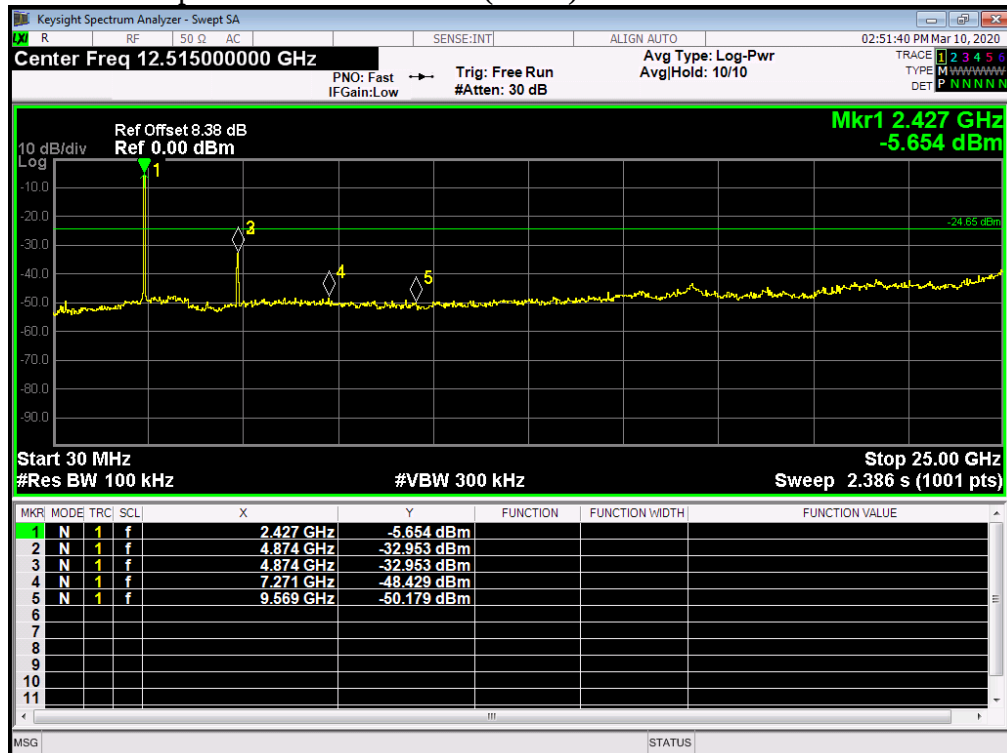

Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Emission

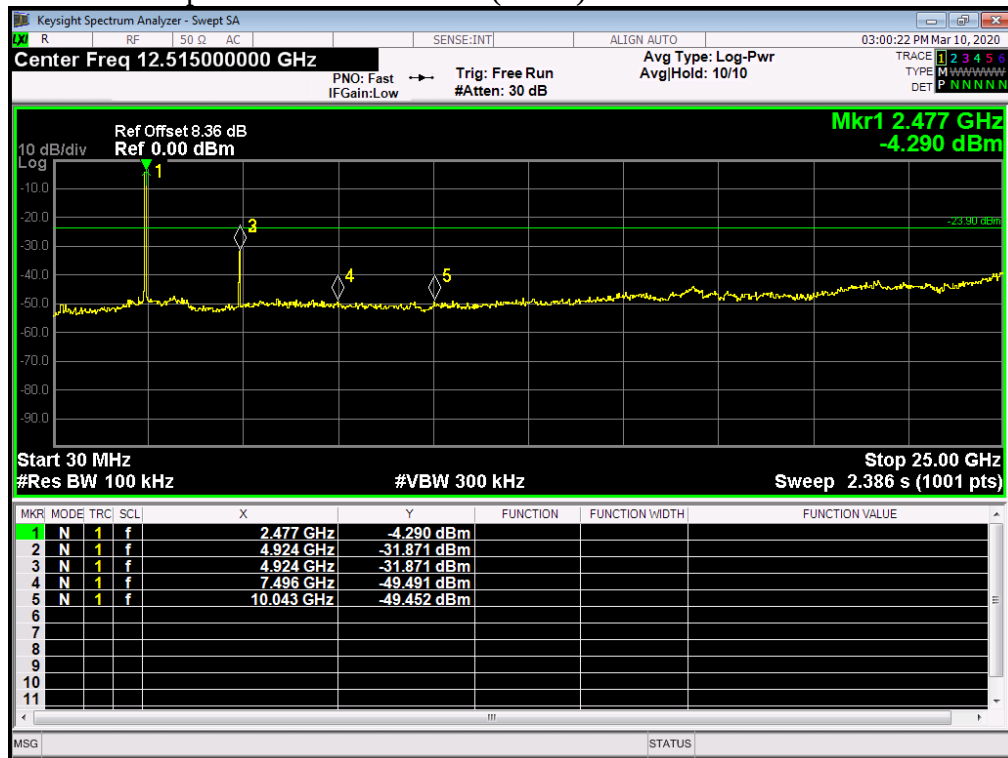


9. Conducted Output Power Spectral Density

9.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY5451047 6	2019/06/21	1 Year

9.2. Block diagram of test setup

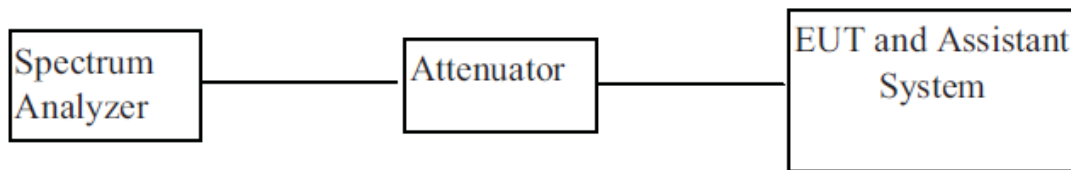

9.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.4. Test Procedure


- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.


9.5. Test result

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b 11Mbps	2412	Ant 1	-17.131	8	Pass
NVNT	802.11b 11Mbps	2437	Ant 1	-18.828	8	Pass
NVNT	802.11b 11Mbps	2462	Ant 1	-18.825	8	Pass


PSD NVNT 802.11b 11Mbps 2412MHz Ant1

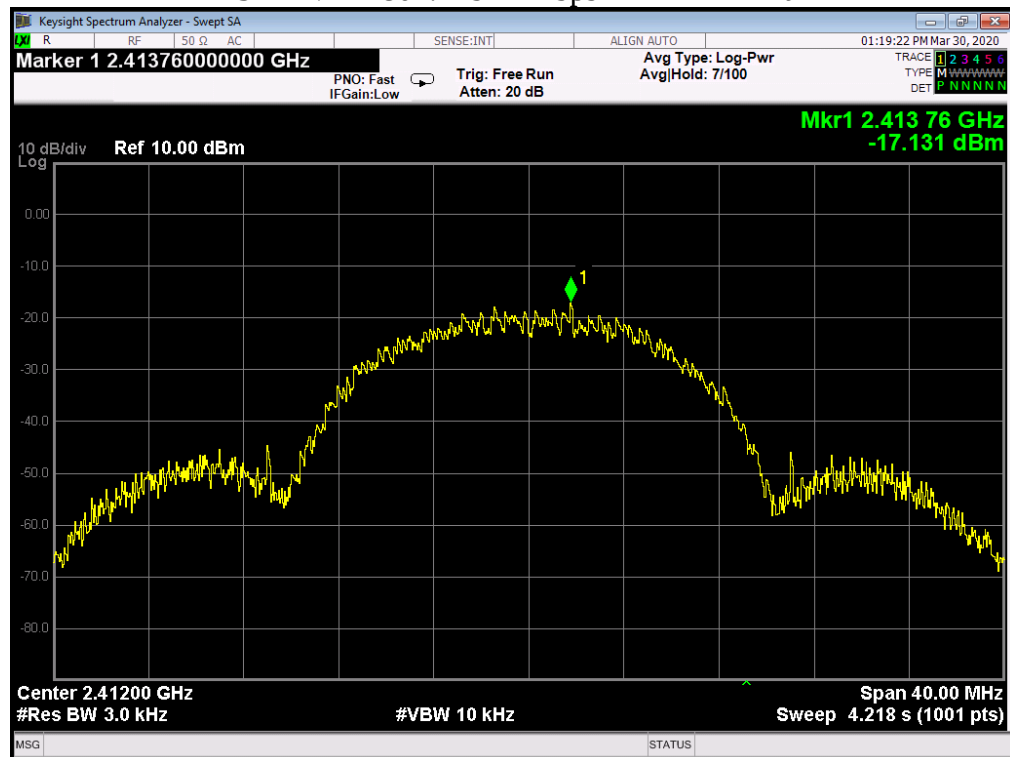

PSD NVNT 802.11b 11Mbps 2437MHz Ant1

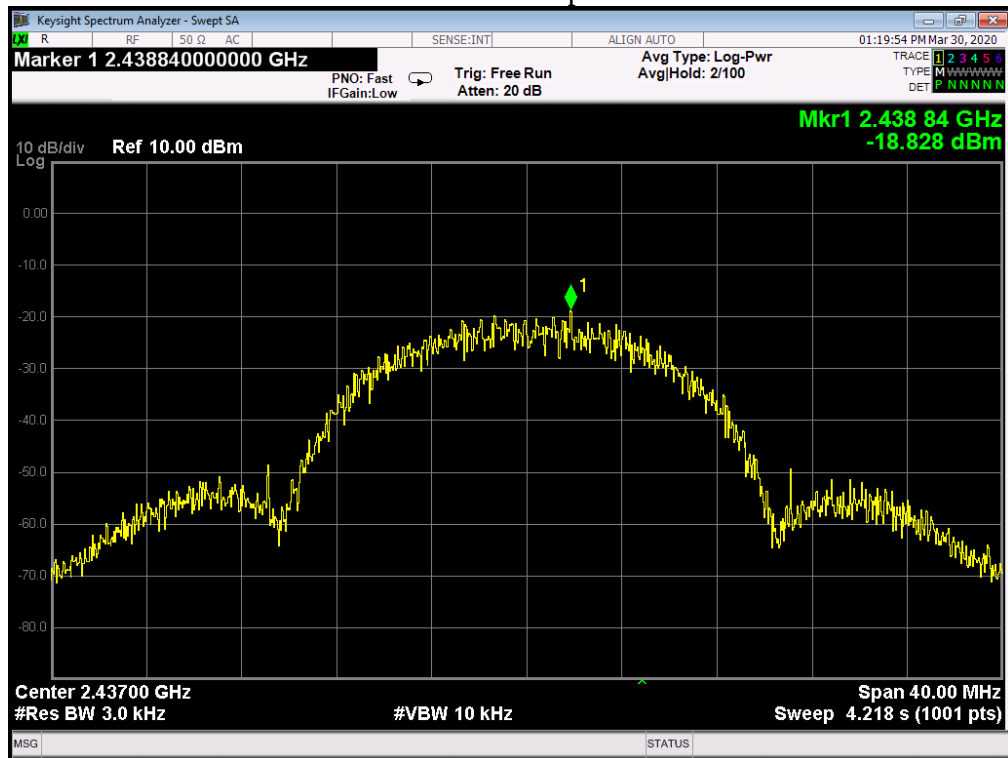


PSD NVNT 802.11b 11Mbps 2462MHz Ant1

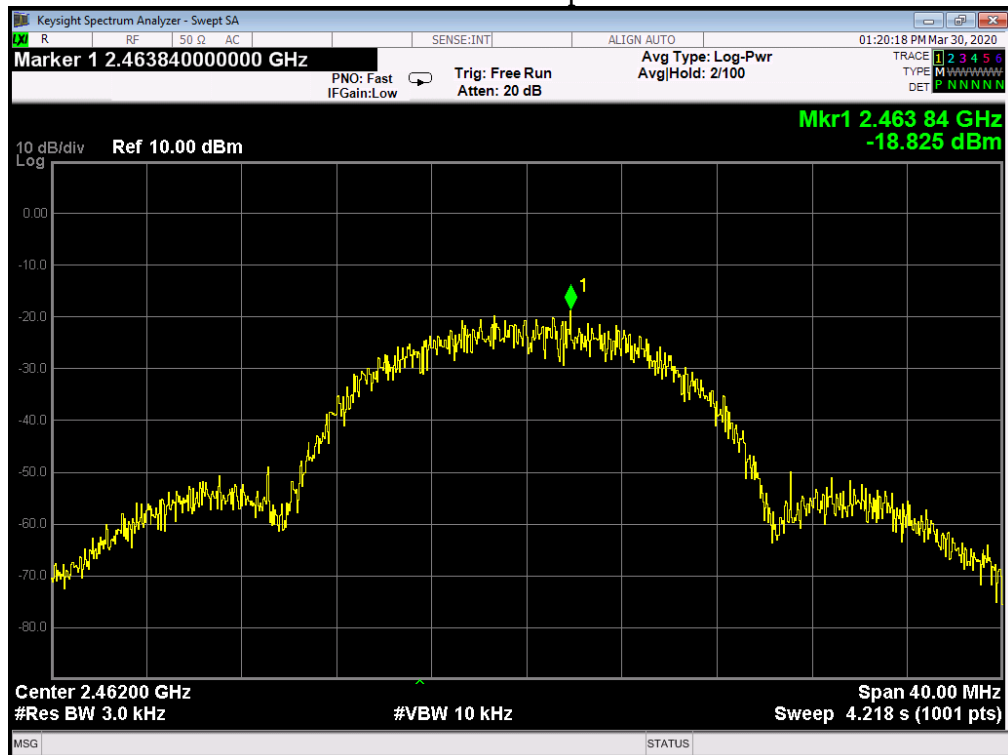


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11g 54Mbps	2412	Ant 1	-23.761	8	Pass
NVNT	802.11g 54Mbps	2437	Ant 1	-24.068	8	Pass
NVNT	802.11g 54Mbps	2462	Ant 1	-23.935	8	Pass


PSD NVNT 802.11g 54Mbps 2412MHz Ant1

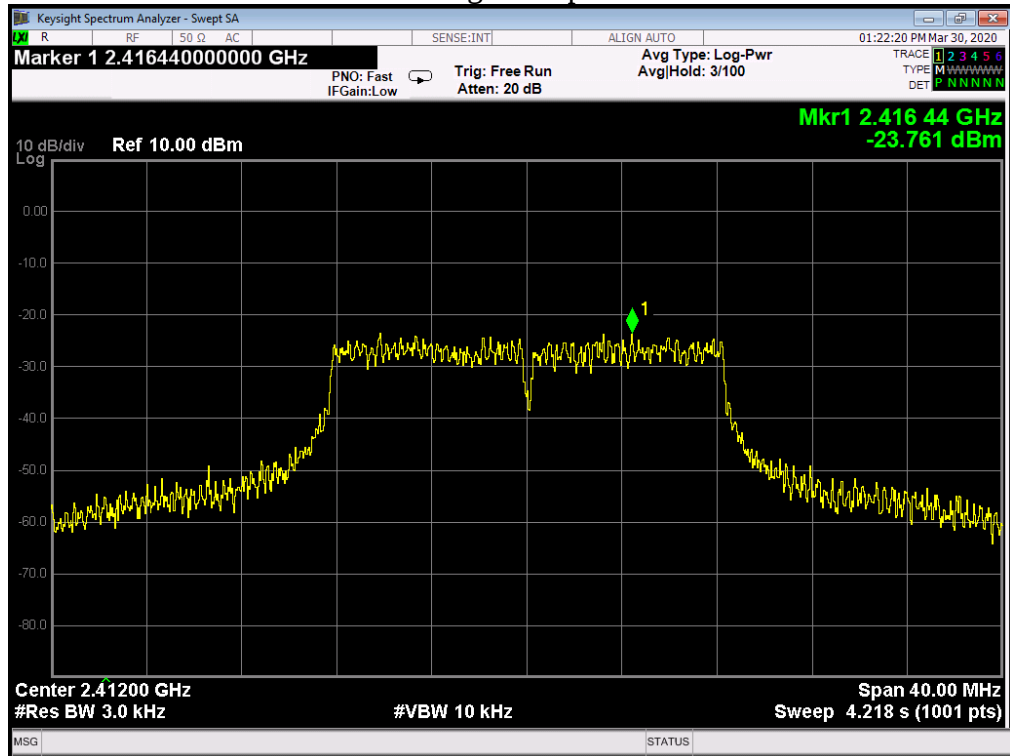

PSD NVNT 802.11g 54Mbps 2437MHz Ant1

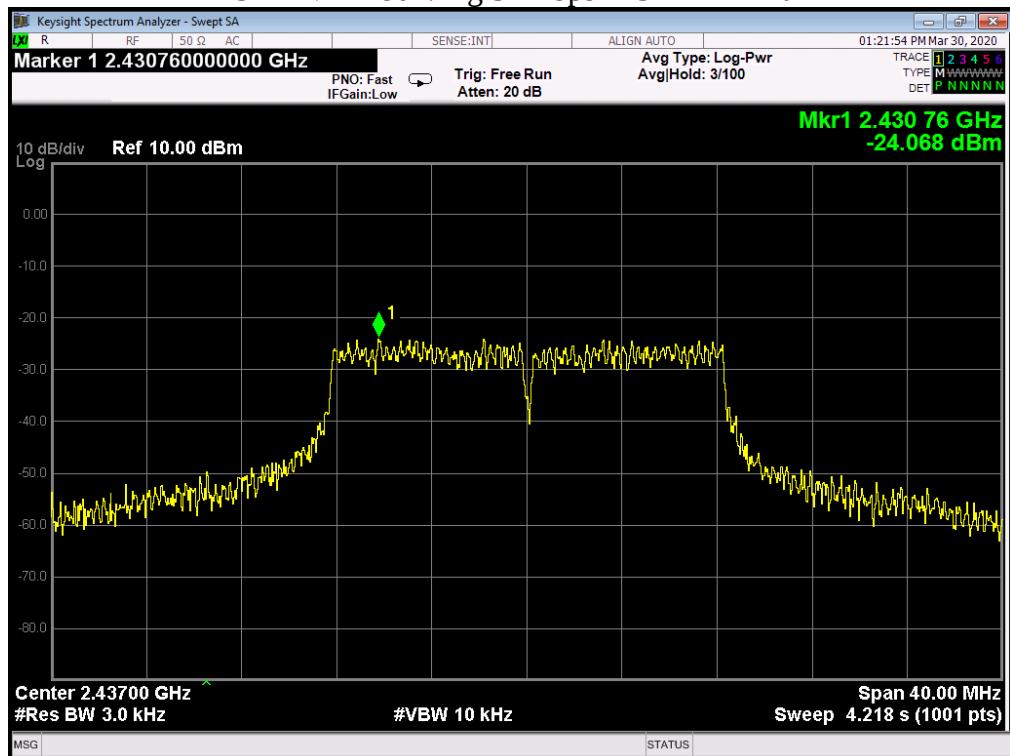


PSD NVNT 802.11g 54Mbps 2462MHz Ant1

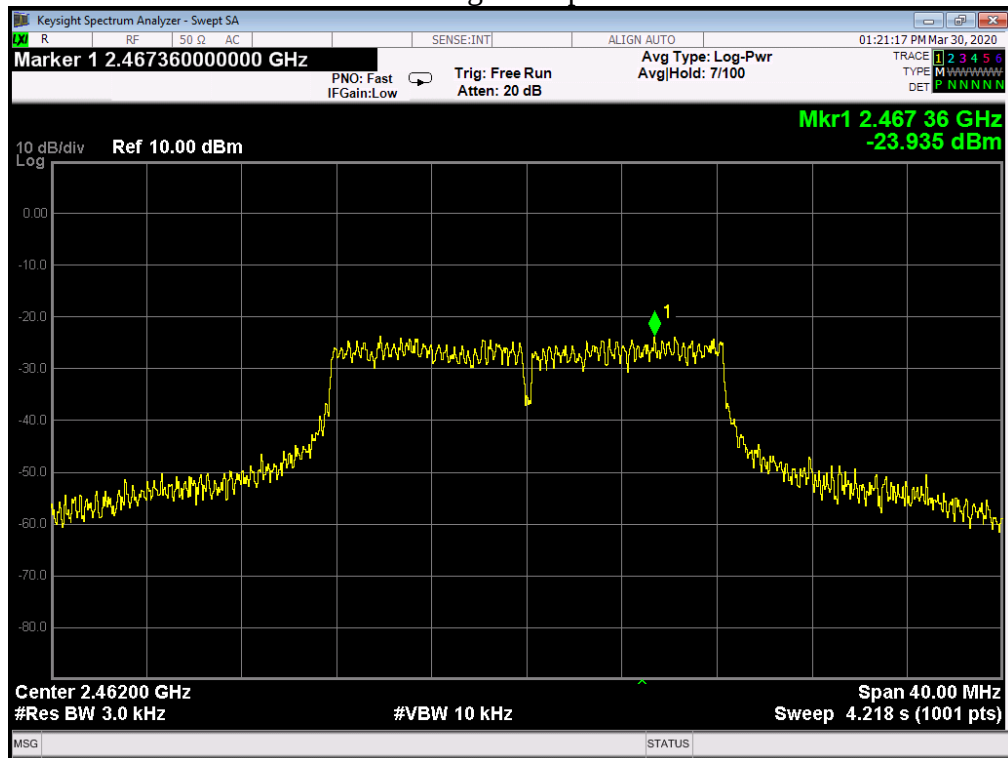


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
NVNT	802.11n(HT20)	2412	Ant 1	-24.562	8	Pass	
NVNT	802.11n(HT20)	2437	Ant 1	-24.920	8	Pass	
NVNT	802.11n(HT20)	2462	Ant 1	-25.315	8	Pass	


PSD NVNT 802.11n(HT20) 2412MHz Ant1

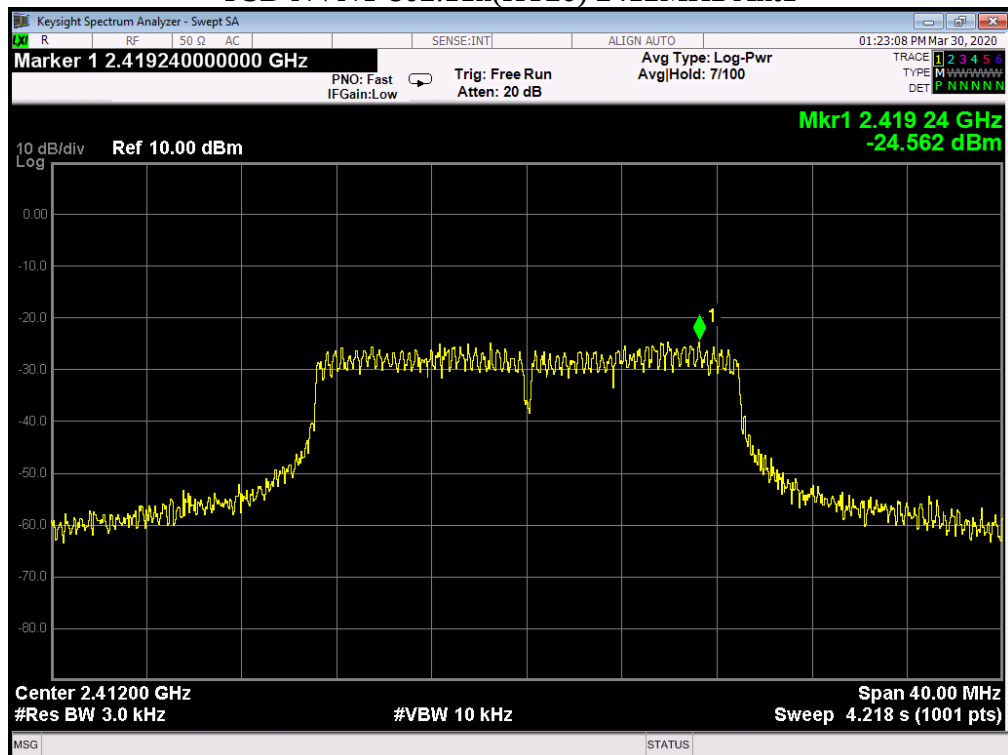

PSD NVNT 802.11n(HT20) 2437MHz Ant1

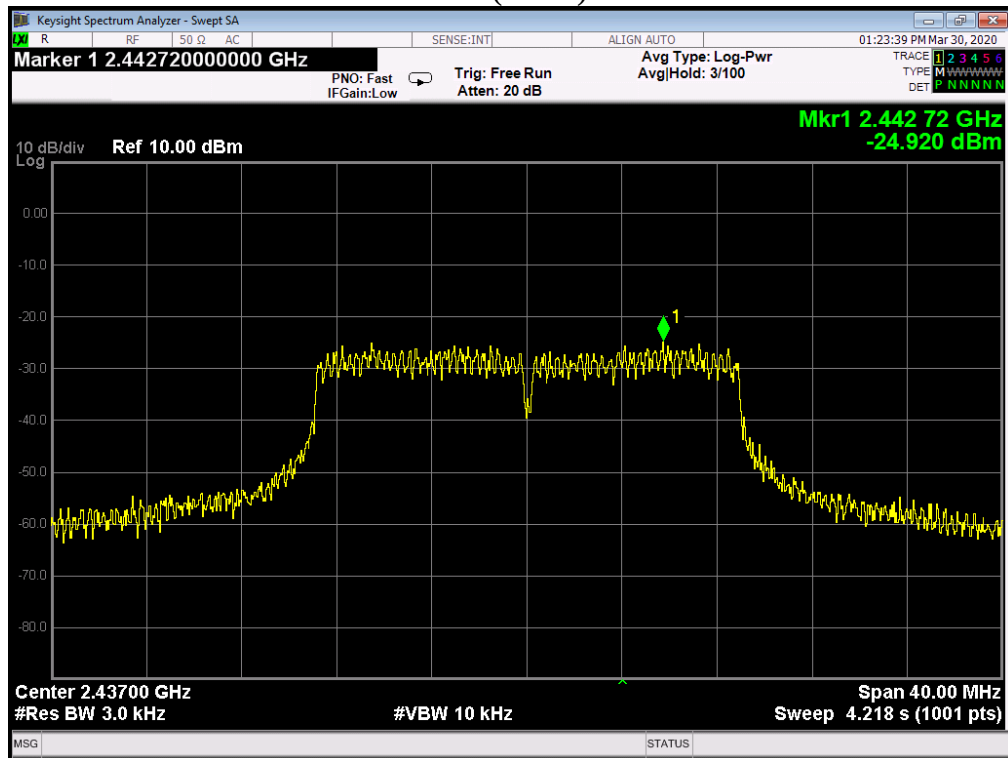

PSD NVNT 802.11n(HT20) 2462MHz Ant1

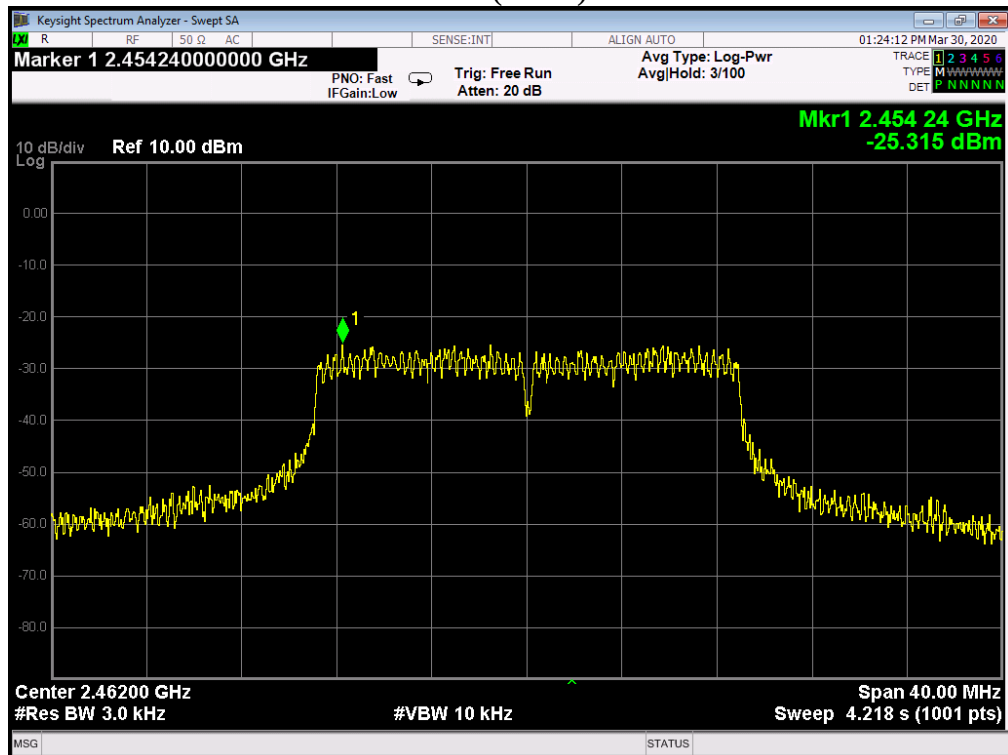

10. Antenna Requirement

10.1. Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

10.2. EUT Antenna

The antenna is Integral Antenna and no consideration of replacement. Antenna gain is Maximum 3 dBi from 2.4GHz to 2.5GHz.

11. Test setup photograph

11.1. Photos of power line conducted emission test



11.2. Photos of radiated emission test

30MHz – 1GHz





Above 1GHz







12. Photos of the EUT




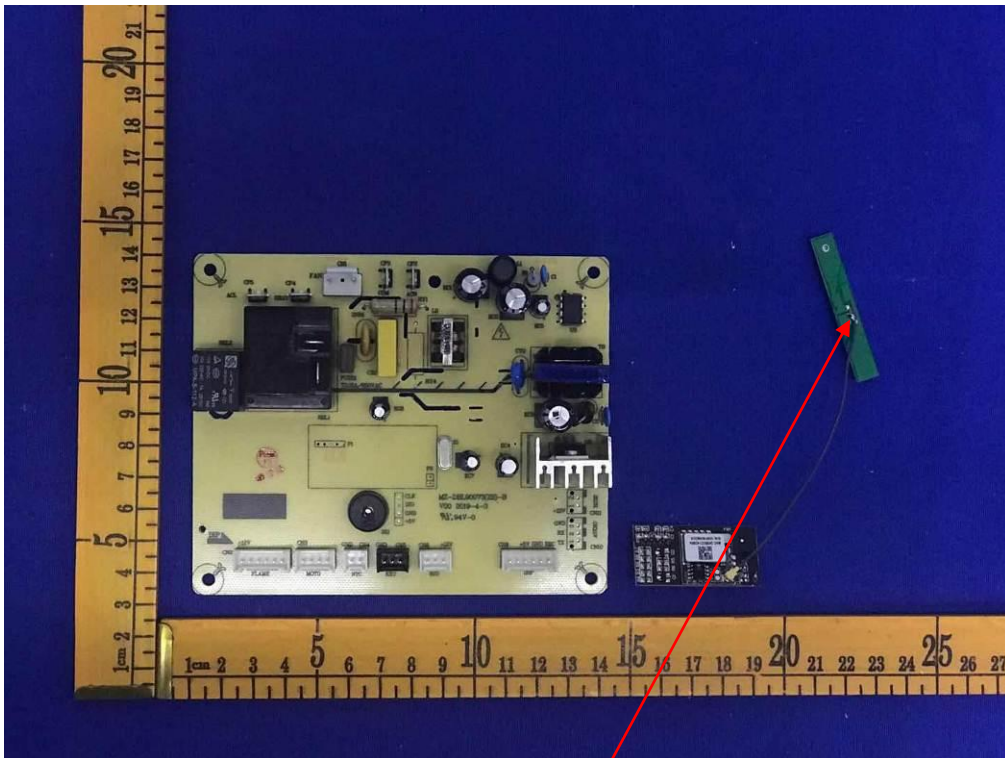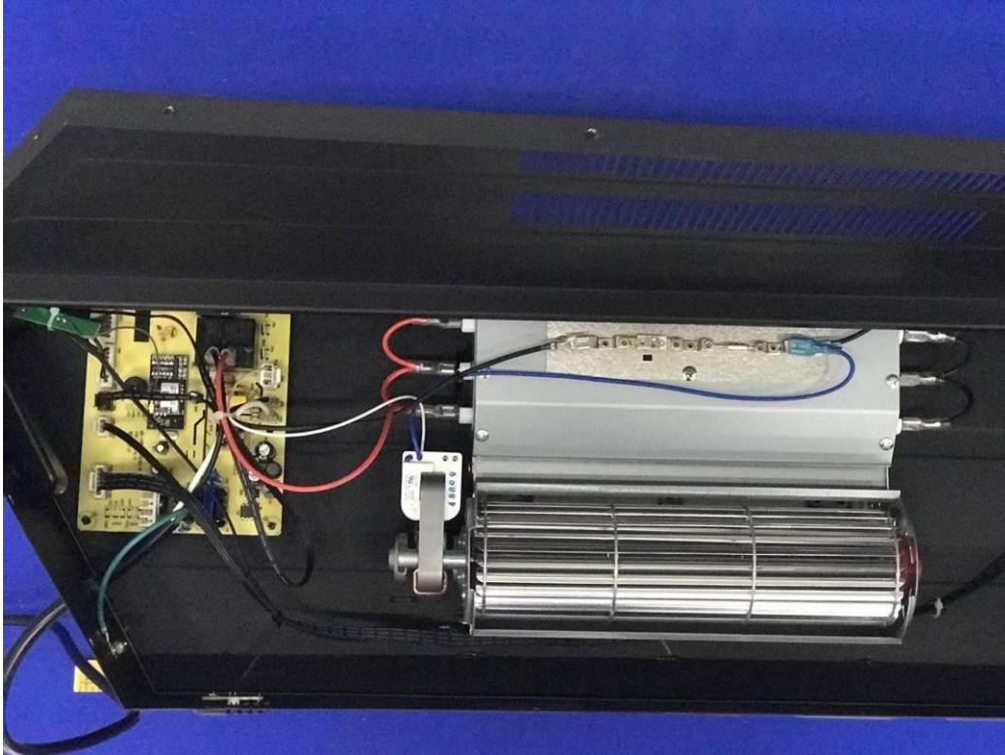

Antenna

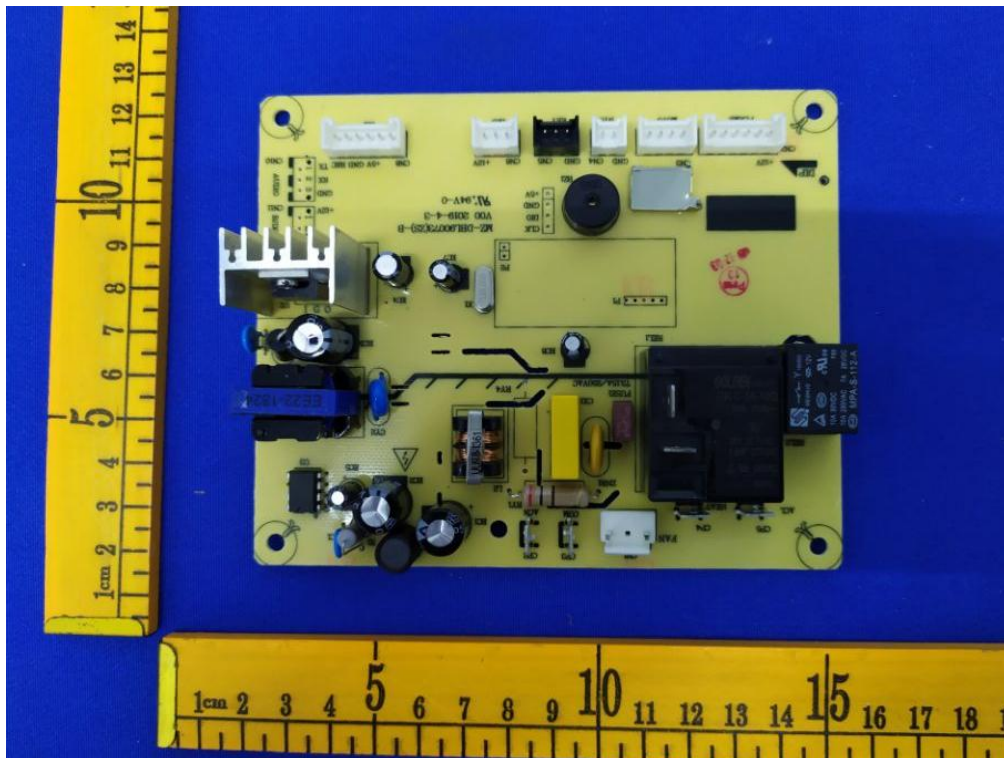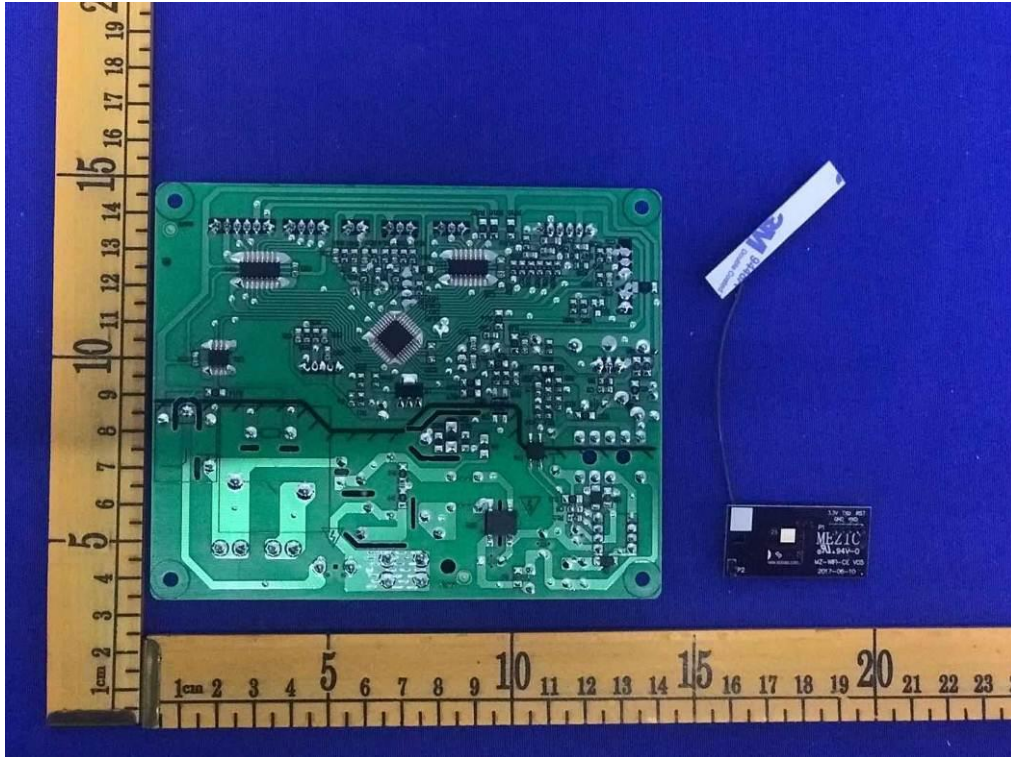

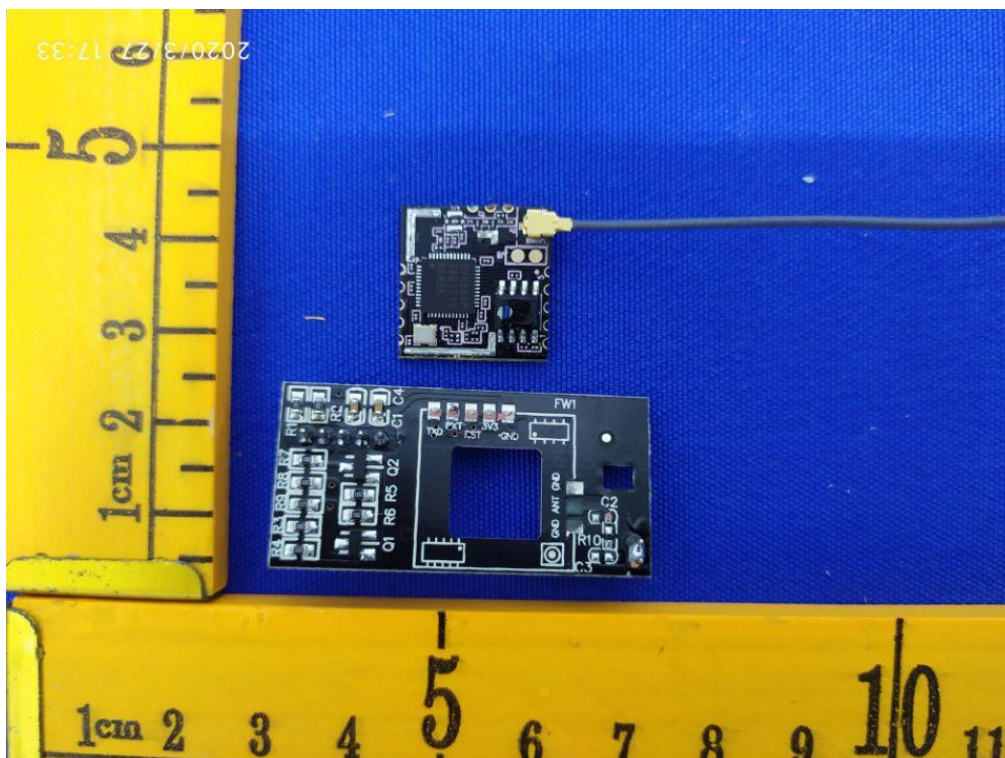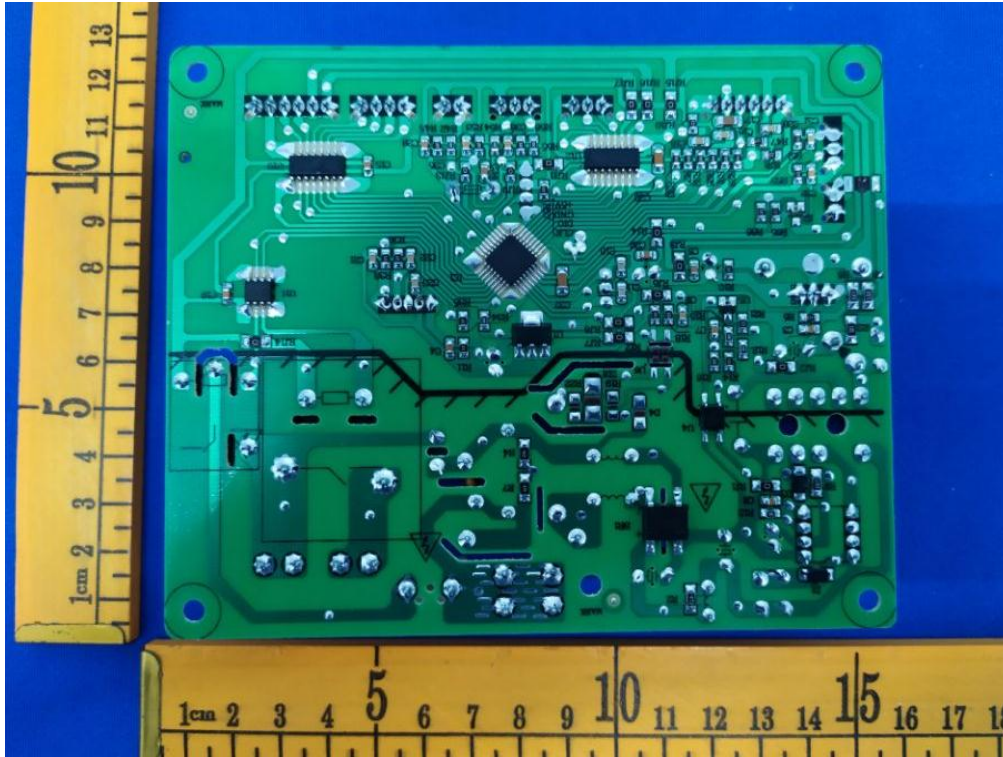

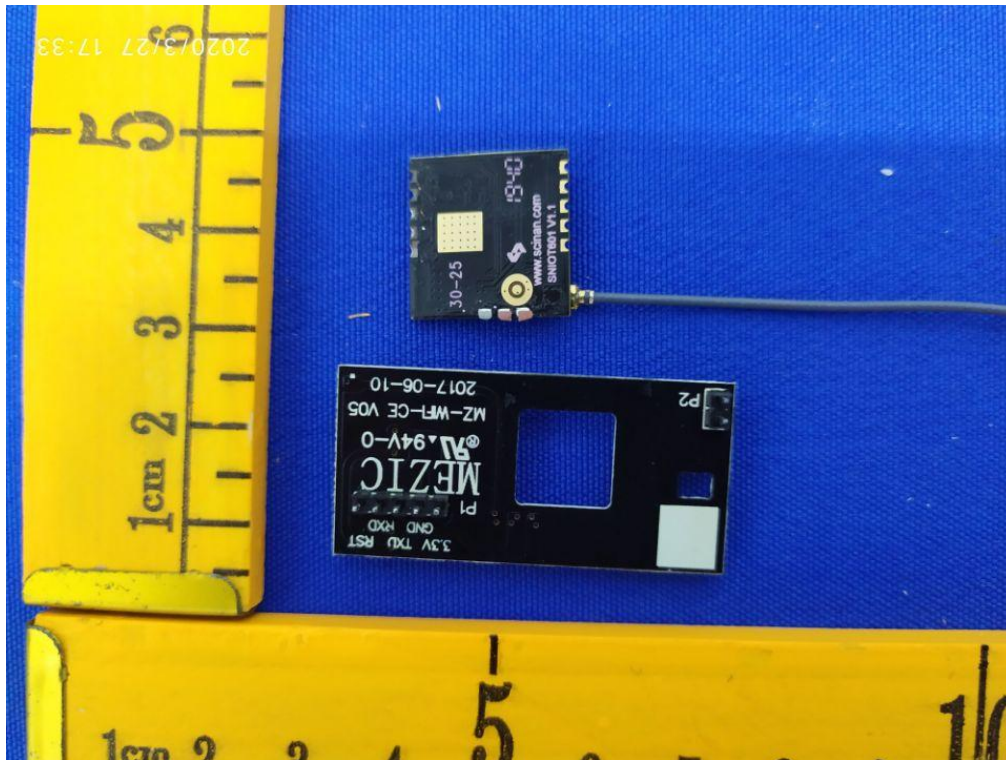

--END OF REPORT--