


2400 – 2500 & 5150 – 5875 MHz Dual Band Antenna

(802.11 a/b/g/n, includes frequencies of Bluetooth, ZigBee, and Wi-Fi products)

Part Number: 2108517-1

Product Facts

- This dual WIFI antenna
Provides available SMT method
Easy-to-use
- RoHS compliant
- Available in tape & reel

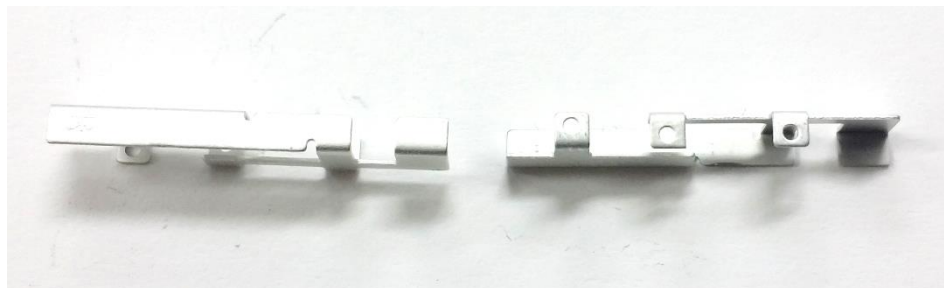

Recommendations

- Minimum matching circuits required
- This antenna provides very high performance and broad bandwidth.
- Bandwidth and performance is dependent on ground plane size.

Specifications

Frequency Range(MHz) --

2400-2500; 5150-5875

Peak Gain-- +3dBi

VSWR--<2.5:1

Azimuth Beamwidth—Omni directional

Power Handling— 10 Watt cw

Feed Point Impedance—50 ohms

Size—22.75*2.4*4.8mm


Weight— 0.33g

Mounting—Surface-mount

Keep Out Area—See diagram on page 2


Reflow Temperature : 240°C Pb free solder
process capable

Operating Temperature Limit : -40~+85°C



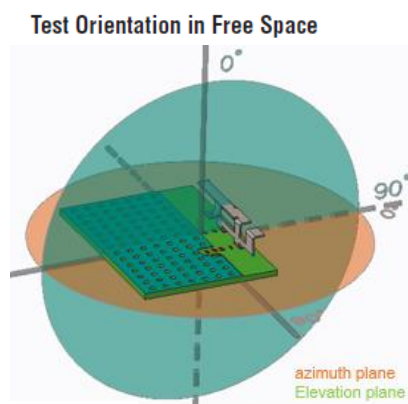


Azimuth

Elevation

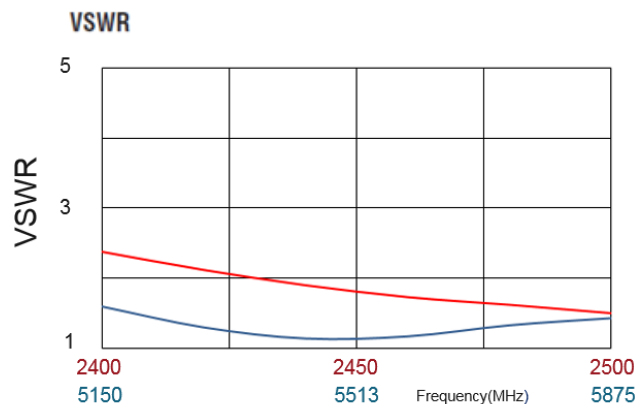

Efficiency

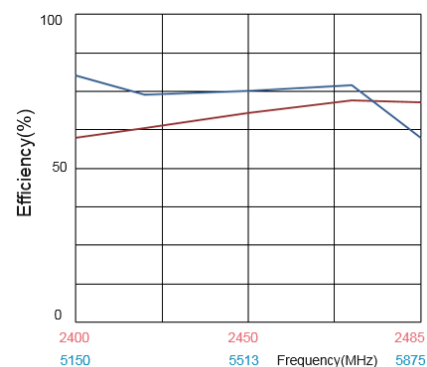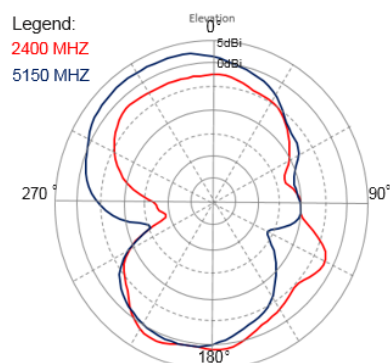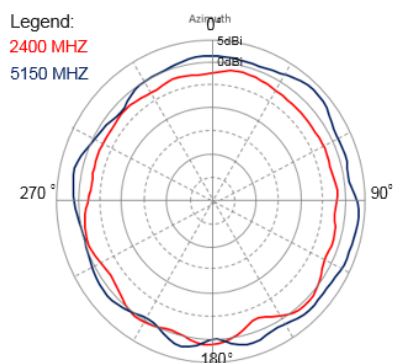


2400 – 2500 & 5150 – 5875 MHz Dual Band Antenna (802.11 a/b/g/n, includes frequencies of Bluetooth, ZigBee, and Wi-Fi products)

Part Number: 2108517-1

(Continued)


Mounting Guide

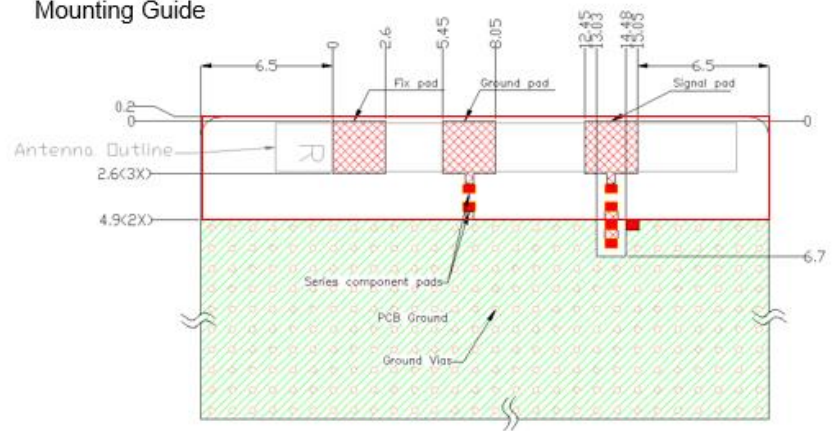

- NOTES:
1. Suggested matching component pads.
 2. Antenna must be mounted on the edge of PCB.
 3. NC = No connection (mechanical mounting pads).
 4. No copper allowed in designated area on all PCB layers.
 5. For more information please call TE.


Dimensions: mm
Diagram is not to scale

Keep Out Area

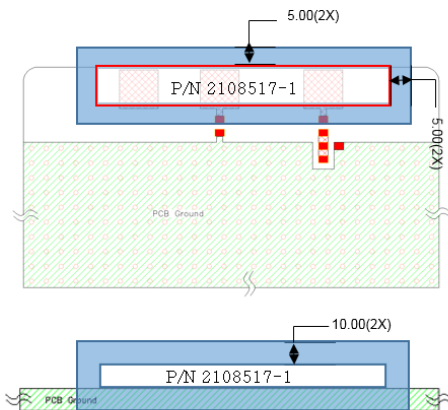

Dimensions: mm
Diagram is not to scale

Approx. Dimensions

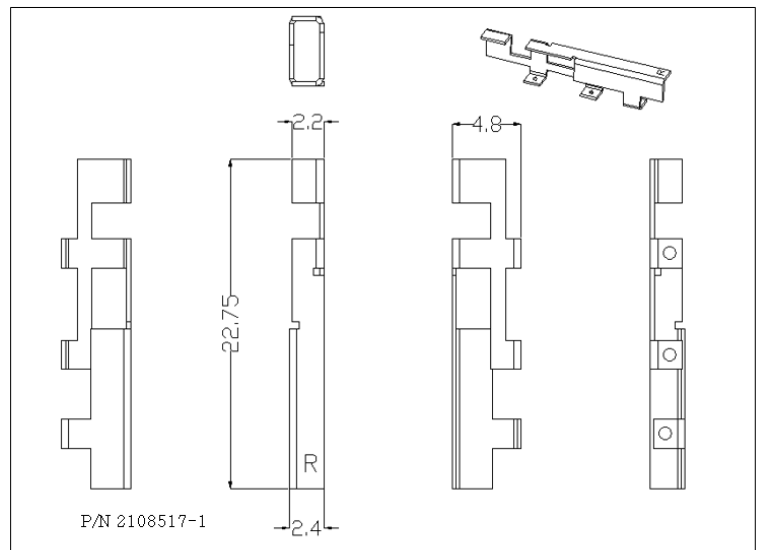

2x1 MIMO condition Architecture guide

Case#: S21 Isoation : 2G : -15dB, 5G : -13dB

