



# FCC RADIO TEST REPORT

**FCC ID** : ACJFZA3A  
**Equipment** : Tablet Computer  
**Brand Name** : Panasonic  
**Model Name** : FZ-A3  
**Marketing Name** : FZ-A3  
**Applicant** : Panasonic Corporation of North America  
Two Riverfront Plaza, 9th Floor, Newark, NJ  
07102-5490  
**Manufacturer** : Panasonic Mobile Communications Co., Ltd.  
600 Saedo-cho, Tsuzuki-ku, Yokohama City  
224-8539, Japan  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on May 19, 2020 and testing was started from May 28, 2020 and completed on Jun. 19, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
<b>3 Test Result .....</b>	<b>11</b>
3.1 Maximum Conducted Output Power Measurement .....	11
3.2 Unwanted Emissions Measurement .....	12
3.3 AC Conducted Emission Measurement.....	16
3.4 Antenna Requirements.....	18
<b>4 List of Measuring Equipment.....</b>	<b>19</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>20</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FR992410-06C	01	Initial issue of report	Jun. 17, 2020
FR992410-06C	02	Remove sample list	Jun. 18, 2020
FR992410-06C	03	Add Conducted power	Jun. 23, 2020
FR992410-06C	04	Revising antenna information.	Jun. 30, 2020

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403 (i)	6dB & 26dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.407 (a)	Maximum Conducted Output Power	Pass	-
-	15.407 (a)	Power Spectral Density	Not Required	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 10.02 dB at 5929.200 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 4.41 dB at 13.560 MHz
-	15.407 (c)	Automatically Discontinue Transmission	Not Required	-
3.4	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

**Note:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding Vehicle Dock and External Antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FR992410-01F. Based on the original report, the test cases were verified.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Celery Wei**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WLAN: <Ant. 0> Monopole Antenna <Ant. 1> Monopole Antenna Bluetooth: <Ant. 0> Monopole Antenna GNSS: Monopole Antenna NFC: Loop Antenna

Accessories Information		
AC Adapter	Brand Name	Panasonic
	Model Name	CF-AA6413A
Battery 1 (Small)	Brand Name	Panasonic
	Model Name	FZ-VZSUT10U
Battery 2 (Large)	Brand Name	Panasonic
	Model Name	FZ-VZSUT11U
USB Cable 1	Brand Name	Panasonic
	Model Name	K1HY24YY0021
USB Cable 2	Brand Name	ELECOM
	Model Name	USB3-AC10BK
Gadget 1 (2nd USB)	Brand Name	Panasonic
	Model Name	N/A
Gadget 2 (BCR)	Brand Name	Panasonic
	Model Name	N/A
Cradle	Brand Name	Panasonic
	Model Name	FZ-VEBA21U
Shoulder Strap	Brand Name	Panasonic
	Model Name	CF-VNS331U
Stylus Pen	Brand Name	Panasonic
	Model Name	CF-VNP025U
Vehicle Dock	Brand Name	Havis
	Model Name	DS-PAN-1401-2
External antenna (2.4G+5G+GNSS)	Brand Name	Airgain
	Model Name	AP-PAN-MMF WG-Q-BL

**Remark:** The WLAN external antenna can only be connected to the WLAN ant 1 external antenna port of EUT.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.3 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

<Ant. 1>

Modulation	Data Rate
802.11a	6 Mbps

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WALN (5GHz) Link + Battery 1 + Earphone + Adapter connect to Docking + MPEG4 (Color bar) + NFC On + USB 2.0 data link with USB Flash Drive (USB Flash Drive to SD Card) + WLAN External Antenna connect to Docking + GPS External Antenna connect to Docking + SD Card + Stylus Pen + Docking (USB link with USB Flash Drive (SD Card to USB Flash Drive) + RJ45 (Load)
<b>Remark:</b> For Radiated Test Cases, the tests were performed with Battery 1.	

Ch. #		Band IV : 5725-5850 MHz
		802.11a
L	Low	-
M	Middle	-
H	High	165


**Remark:**

1. For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.
2. 2X2 MIMO with 2 internal antennas documented in original report is considered as the worst case because they have higher antenna gain than the configuration of Ant0 internal antenna + Ant 1 external antenna reported in this C2PC filing. Therefore, this C2PC test was performed with SISO mode with the added external antenna against the worst case raised in original report.




## 2.3 Connection Diagram of Test System

### <AC Conducted Emission Mode>

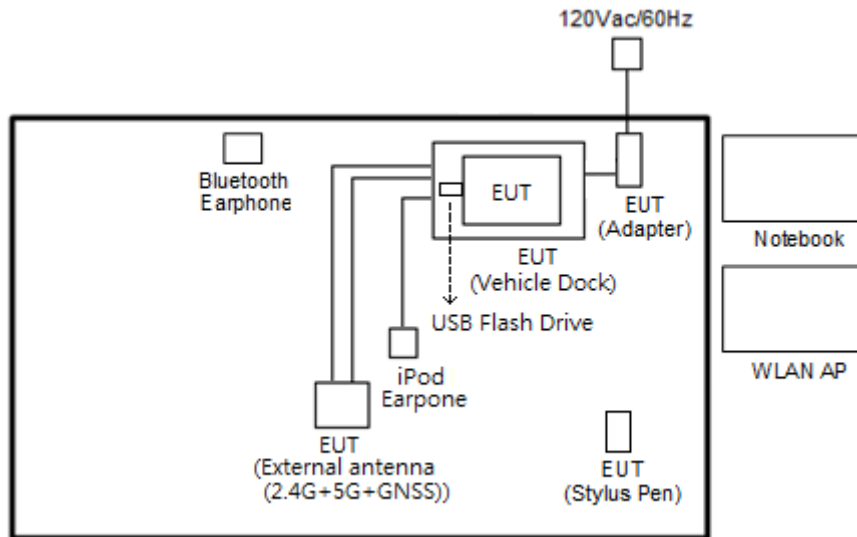

### <WLAN Tx Mode>

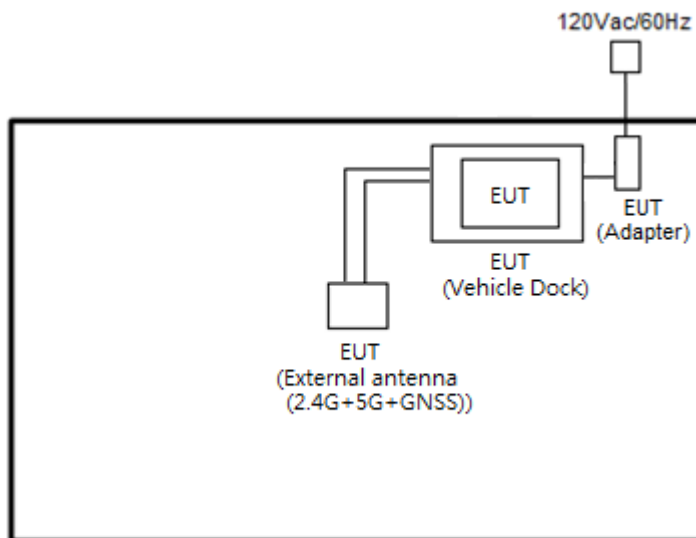

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude E5480	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	USB Flash Drive	Kingston	DTDUO3C/32G	FCC DoC	N/A	N/A
5.	USB Flash Drive	ADATA	C906	FCC DoC	N/A	N/A
6.	USB Flash Drive	Transcend	C21002	FCC DoC	N/A	N/A
7.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
8.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility "QRCT 4 v4.0-00156" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

### 3 Test Result

#### 3.1 Maximum Conducted Output Power Measurement

##### 3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


##### 3.1.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### 3.1.4 Test Setup

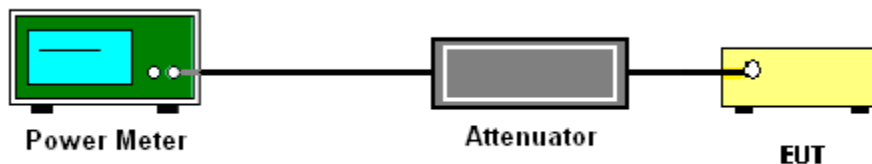

##### 3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

## 3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

### 3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(2) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.



2. The EUT was placed on a turntable with 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.2.4 Test Setup

For radiated emissions above 1GHz

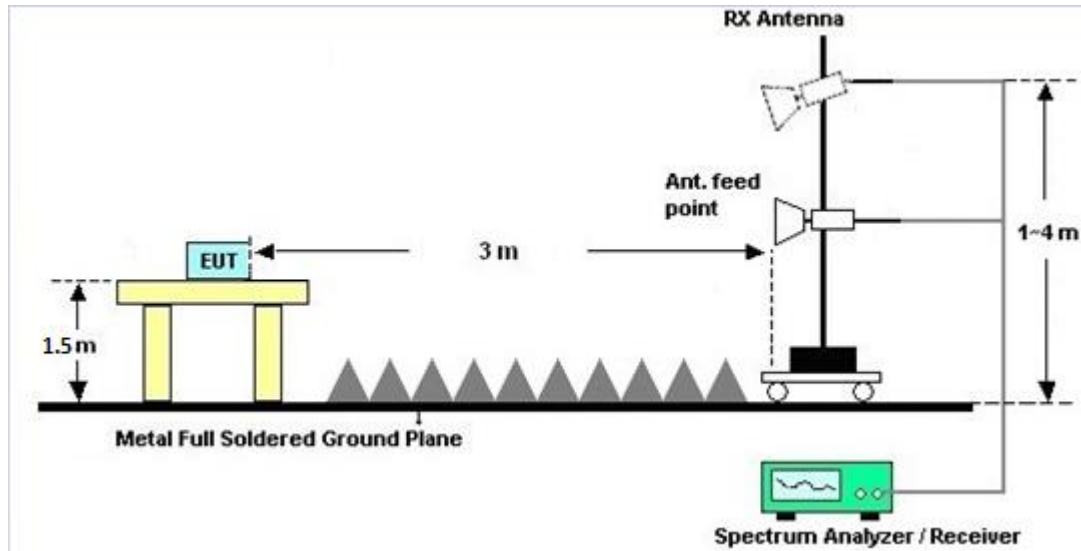

### 3.2.5 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

### 3.2.6 Duty Cycle

Please refer to Appendix E.

### 3.2.7 Test Result of Unwanted Radiated Emission

Please refer to Appendix C and D.

### 3.3 AC Conducted Emission Measurement

#### 3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.3.2 Measuring Instruments


See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



### 3.3.4 Test Setup

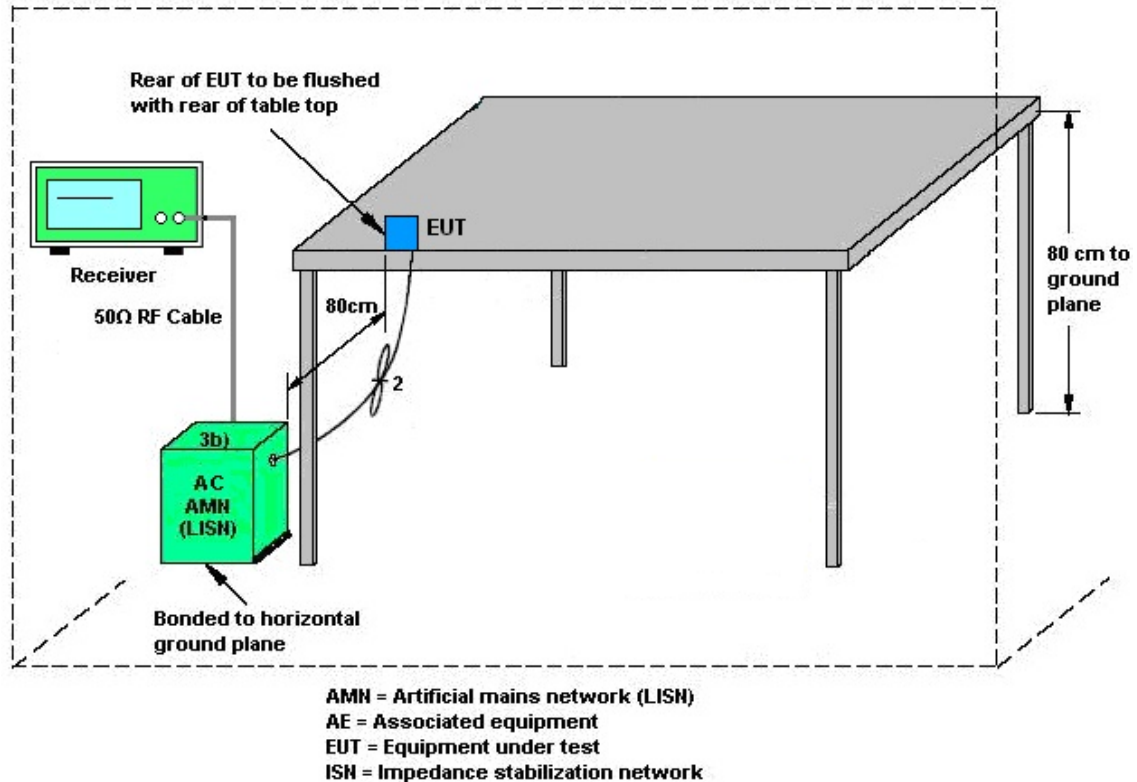

### 3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### **3.4 Antenna Requirements**

#### **3.4.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.4.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

#### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 28, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	May 28, 2020	Nov. 14, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	May 28, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 28, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	May 28, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	May 28, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Preamplifier	EMCE	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Jun. 05, 2020~ Jun. 12, 2020	Dec. 12, 2020	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 13, 2019	Jun. 05, 2020~ Jun. 12, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55 303K	171000180 0054002	1GHz~18GHz	Feb. 07, 2020	Jun. 05, 2020~ Jun. 12, 2020	Feb. 06, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz- 40GHz	May 22, 2020	Jun. 05, 2020~ Jun. 12, 2020	May 21, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Nov. 04, 2019	Jun. 05, 2020~ Jun. 12, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 28, 2019	Jun. 05, 2020~ Jun. 12, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 05, 2020~ Jun. 12, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jun. 05, 2020~ Jun. 12, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 05, 2020~ Jun. 12, 2020	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	Jun. 05, 2020~ Jun. 12, 2020	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	Jun. 05, 2020~ Jun. 12, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 12, 2020	Jun. 05, 2020~ Jun. 12, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	Jun. 05, 2020~ Jun. 12, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000 -40SS	SN3	6.75GHz High Pass Filter	Sep. 16, 2019	Jun. 05, 2020~ Jun. 12, 2020	Sep. 15, 2020	Radiation (03CH11-HY)
Hygrometer	Testo	608-H2	34893241	N/A	Mar. 02, 2020	Jun. 19, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030S NO31	10MHz~6GHz	Jan. 22, 2020	Jun. 19, 2020	Jan. 21, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Jun. 19, 2020	Jul. 14, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	Jun. 19, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Aug. 15, 2019	Jun. 19, 2020	Aug. 14, 2020	Conducted (TH05-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	5.3
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Owen Yang	Temperature:	22~25	°C
Test Date:	2020/6/19	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	165	5825	13.20	13.20	-	30.00	30.00	2.00	0.70	Pass




## **Appendix B. AC Conducted Emission Test Results**

<b>Test Engineer :</b>	Howard Huang	<b>Temperature :</b>	21~25°C
		<b>Relative Humidity :</b>	40~45%

# EUT Information

Report NO : 992410-06  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

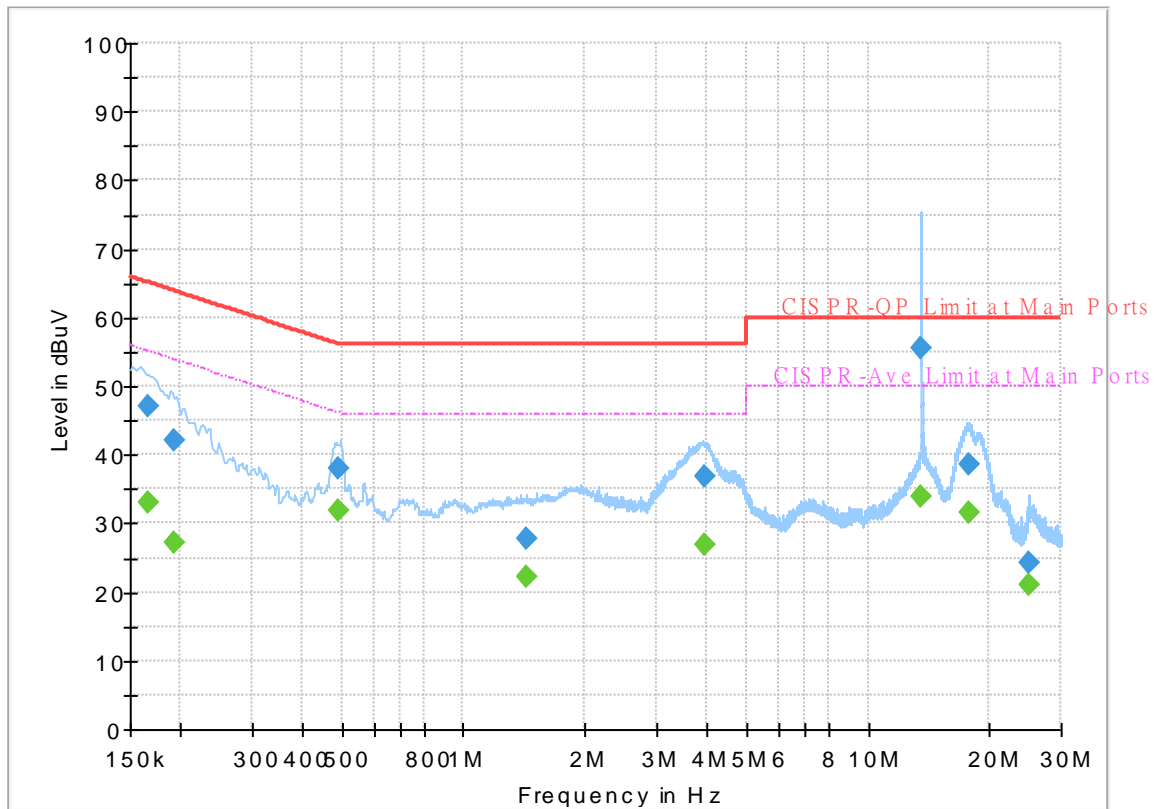

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.165750	---	33.01	55.17	22.16	L1	OFF	19.5
0.165750	46.98	---	65.17	18.19	L1	OFF	19.5
0.192750	---	27.20	53.92	26.72	L1	OFF	19.5
0.192750	42.16	---	63.92	21.76	L1	OFF	19.5
0.492000	---	31.75	46.13	14.38	L1	OFF	19.5
0.492000	38.02	---	56.13	18.11	L1	OFF	19.5
1.430250	---	22.25	46.00	23.75	L1	OFF	19.6
1.430250	27.69	---	56.00	28.31	L1	OFF	19.6
3.945750	---	26.76	46.00	19.24	L1	OFF	19.6
3.945750	36.93	---	56.00	19.07	L1	OFF	19.6
13.560000	---	33.88	50.00	16.12	L1	OFF	19.8
13.560000	55.59	---	60.00	4.41	L1	OFF	19.8
17.696400	---	31.61	50.00	18.39	L1	OFF	19.8
17.696400	38.55	---	60.00	21.45	L1	OFF	19.8
24.990720	---	21.13	50.00	28.87	L1	OFF	19.8
24.990720	24.23	---	60.00	35.77	L1	OFF	19.8



## EUT Information

Report NO : 992410-06  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

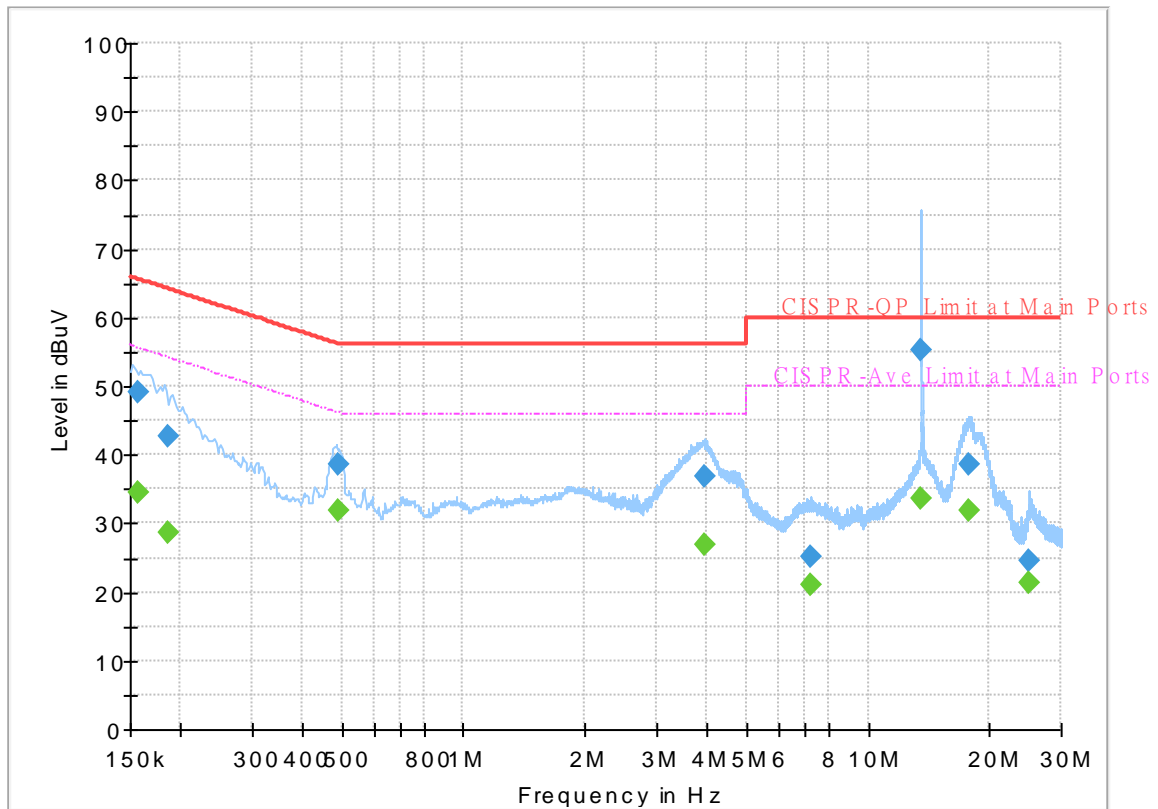

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	34.39	55.63	21.24	N	OFF	19.5
0.156750	49.07	---	65.63	16.56	N	OFF	19.5
0.186000	---	28.69	54.21	25.52	N	OFF	19.5
0.186000	42.82	---	64.21	21.39	N	OFF	19.5
0.489750	---	31.99	46.17	14.18	N	OFF	19.5
0.489750	38.46	---	56.17	17.71	N	OFF	19.5
3.930000	---	26.95	46.00	19.05	N	OFF	19.6
3.930000	36.92	---	56.00	19.08	N	OFF	19.6
7.219320	---	21.13	50.00	28.87	N	OFF	19.8
7.219320	25.22	---	60.00	34.78	N	OFF	19.8
13.560000	---	33.56	50.00	16.44	N	OFF	19.9
13.560000	55.34	---	60.00	4.66	N	OFF	19.9
17.711700	---	31.81	50.00	18.19	N	OFF	19.9
17.711700	38.66	---	60.00	21.34	N	OFF	19.9
24.987570	---	21.49	50.00	28.51	N	OFF	20.0
24.987570	24.61	---	60.00	35.39	N	OFF	20.0



## Appendix C. Radiated Spurious Emission

Test Engineer :	Cookie Ku, Fu Chen and Troye Hsieh	Temperature :	19.1~24.9°C
		Relative Humidity :	56.7~68.9%

## Band 4 - 5725~5850MHz

## WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 165 5825MHz	*	5825	117.35	-	-	106.9	32.35	10.6	32.5	198	298	P	H
	*	5825	109.95	-	-	99.5	32.35	10.6	32.5	198	298	A	H
		5850.2	72.64	-49.1	121.74	62.1	32.4	10.63	32.49	198	298	P	H
		5855.2	69.75	-40.99	110.74	59.19	32.41	10.64	32.49	198	298	P	H
		5882	66.89	-33.11	100	56.24	32.46	10.67	32.48	198	298	P	H
		5929.2	58.18	-10.02	68.2	47.29	32.62	10.74	32.47	198	298	P	H
													H
													H
	*	5825	109.55	-	-	99.1	32.35	10.6	32.5	100	346	P	V
	*	5825	101.96	-	-	91.51	32.35	10.6	32.5	100	346	A	V
		5850	64.06	-58.14	122.2	53.52	32.4	10.63	32.49	100	346	P	V
		5860.8	60.66	-48.51	109.17	50.08	32.42	10.65	32.49	100	346	P	V
		5880.2	57.33	-44.01	101.34	46.68	32.46	10.67	32.48	100	346	P	V
		5943.2	52.6	-15.6	68.2	41.64	32.67	10.76	32.47	100	346	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>802.11a CH 165 5825MHz</b>		11650	52.48	-21.52	74	57.44	39.15	18.22	62.33	100	335	P	H
		11650	42.03	-11.97	54	46.99	39.15	18.22	62.33	100	335	A	H
		17475	50.88	-17.32	68.2	44.49	41.17	23.26	58.04	100	0	P	H
													H
		11650	48.86	-25.14	74	53.82	39.15	18.22	62.33	100	0	P	V
		17475	50.74	-17.46	68.2	44.35	41.17	23.26	58.04	100	0	P	V
		11650	48.86	-25.14	74	53.82	39.15	18.22	62.33	100	0	P	V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots



<b>Test Engineer :</b>	Cookie Ku, Fu Chen and Troye Hsieh	<b>Temperature :</b>	19.1~24.9°C
		<b>Relative Humidity :</b>	56.7~68.9%

### Note symbol



-L	Low channel location
-R	High channel location



Band 4 - 5725~5850MHz  
WIFI 802.11a (Band Edge @ 3m)

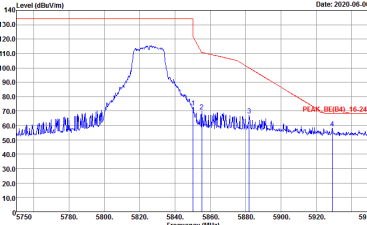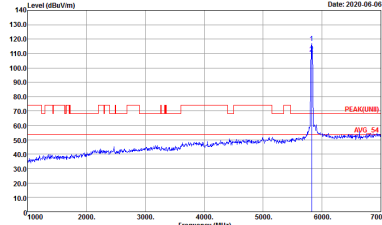WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<div><p>Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 992410-06 Setting : 17.5</p></div>	<div><p>Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 992410-06 Setting : 17.5</p></div>

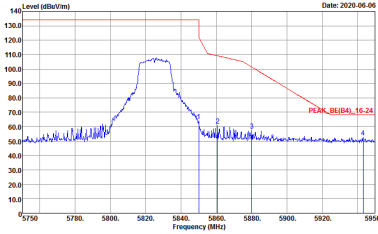
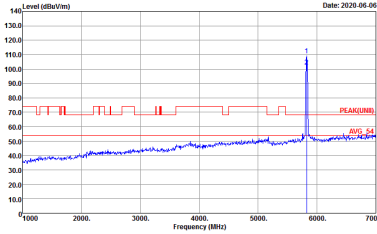


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	<div><p>Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 992410-06 Setting : 17.5</p></div>	<div><p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 992410-06 Setting : 17.5</p></div>






Band 4 - 5725~5850MHz  
WIFI 802.11a (Harmonic @ 3m)

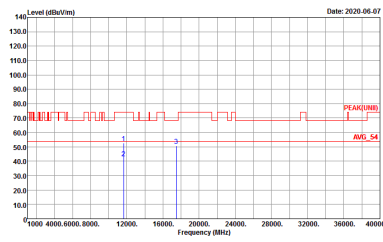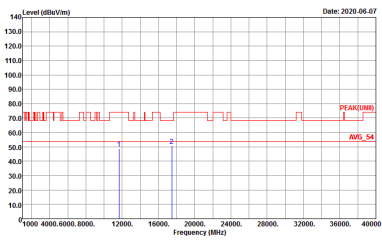WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 992410-06 Setting : 17.5</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 992410-06 Setting : 17.5</p>

## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	94.97	1926	0.52	1kHz	0.22

### 802.11a

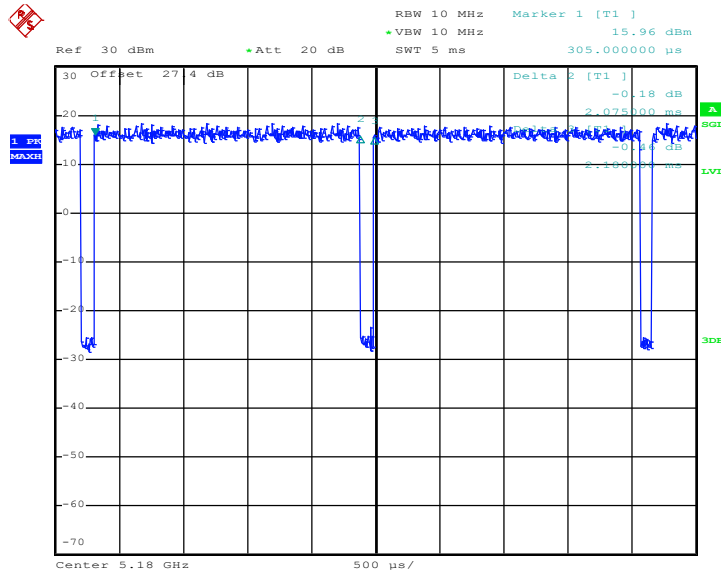

Date: 26.NOV.2019 15:30:23