


M/M: ACWF1001
FCC ID: 2ADCB-ACWF1001
IC: 6715A-ACWF1001

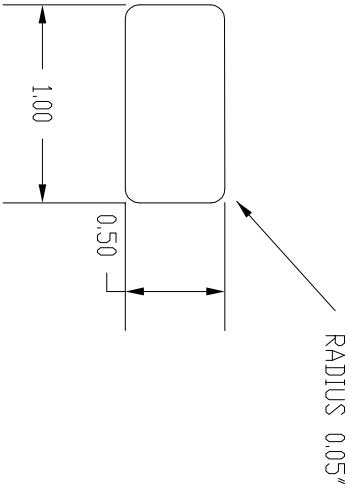

MATERIAL:

- A. ACRYLIC SILK SCREEN PRINT ON CLEANED PHOTO CONTROL BASE PLASTIC DIRECTLY
- B. SCREEN PRINTING INK #710 FROM ESAY CHEMICAL MFG. LTD.
- C. ALLOW INK TO AIR DRY SUFFICIENTLY BEFORE DISTURBING PRINTED AREA
- D. .002" THICK POLYESTER WITH 3M #400 DR #7921 ACRYLIC
- E. ADHESIVE:
 - BACKING: SILICONE RELEASE LINER
 - FACE COLOR: WHITE WITH BLACK INK
- F. ENVIRONMENTAL:
 - C. TEMPERATURE RANGE: -40°C TO +85°C
 - d. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANT TO UV DEGRADATION
 - e. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969 - OUTDOOR EXPOSURE TEST

NOTE:

- 1. MODEL NUMBER (REVERSE PRINTING) 0.200" CHARACTER HEIGHT.
- 2. VOLTAGE/FREQUENCY RATING, 0.093" CHARACTER HEIGHT.
- 3. LOAD RATING (HID) 0.093" CHARACTER HEIGHT.
- 4. ASSEMBLED IN CHINA, 0.093" CHARACTER HEIGHT.
- 5. REPLACE MM/DD/YYYY WITH DATE OF MANUFACTURE IN MONTH/DAY/YEAR FORMAT. 0.093" CHARACTER HEIGHT.

				This drawing is the property of American Electric Lighting a division of Acuity Lighting Group, Inc. Copies are issued in strict confidence and shall not be reproduced or transmitted in any form or by any means electronic, mechanical, photocopying, recording, or by any information storage and retrieval system without the prior written permission of American Electric Lighting.			
				DIMENSIONS IN INCHES THE PRECISION OF THE DIMENSIONS SHALL BE AS NOTED WITH TOLERANCES BELOW UNLESS OTHERWISE NOTED			
				FRACTION±	1/64	LABEL, SENSITIVITY MODULAR FCC	
				DECIMAL ±	.005		
				ANGLE ±	1°		
				MATERIAL, GAGES, AND DRILL SIZES EXCLUDED	RPS DRAWN	AMERICAN ELECTRIC LIGHTING An Acuity Brands Company	
RXXXXXX	6/14/16	A	RELEASE	PRW	PRW		
ER#	DATE	REL	REVISIONS	BY	APP		
						SCALE NONE	
						APPROVED	DATE
						-	-
						302-00302-001	

US Tech
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2ADCB-ACWIFI001
6715A-ACWIFI001
16-0139
September 23, 2016
Acuity Brands
ACWIFI001

LABEL LOCATION

