

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada ICES-003

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1711-7034-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Test Firm Designation Number: DE0008
IC Testing Laboratory site: 3470A-2

Applicant's name : ANDREAS STIHL AG & Co. KG

Address : Andreas-Stihl-Straße 4
71336 Waiblingen
GERMANY

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
ICES-003, Issue 6:2016
ANSI C63.4:2014

Equipment under test (EUT):

Product description STIHL Smart Connector / STIHL Part No. 0000-400-4900-A

Model No. SC

Additional Models None

Hardware version HW:00.70

Firmware / Software version SW:01.00

FCC-ID: 2ALP8SC

IC: 23431-SC

Test result Passed

Test Report No.: G0M-1711-7034-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2018-01-24

Date (s) of performance of tests: 2018-02-01


Compiled by: Matthias Handrik

Tested by (+ signature).....: Matthias Handrik

Approved by (+ signature): Jens Marquardt
Deputy Head of Lab

Date of issue: 2018-02-12

Total number of pages: 22



General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2018-02-12	Initial Release	



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Input / Output Ports	10
1.6	Operating Modes and Configurations	11
1.7	Test Equipment Used During Testing	12
1.8	Sample emission level calculation	13
2	RESULT SUMMARY	14
3	TEST CONDITIONS AND RESULTS	15
3.1	Test Conditions and Results – Radiated emissions	15

1 Equipment (Test item) Description

Description	STIHL Smart Connector / STIHL Part No. 0000-400-4900-A	
Model	SC	
Additional Models	None	
Serial number	None	
Hardware version	HW:00.70	
Software / Firmware version	SW:01.00	
FCC-ID	2ALP8SC	
Contains IC	23431-SC	
Power supply	3V DC (non rechargeable battery)	
AC/DC-Adaptor	None	
Radio module	Type	Bluetooth Low Energy
	Model	not specified
	Manufacturer	not specified
	HW Version	not specified
	SW Version	not specified
	SVN	not specified
	FCC-ID	not specified
	IC	not specified
Manufacturer	ANDREAS STIHL AG & Co. KG Andreas-Stihl-Straße 4 71336 Waiblingen GERMANY	
Highest internal frequency	Fmax [MHz] = 2400	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	


1.1 Photos – Equipment external

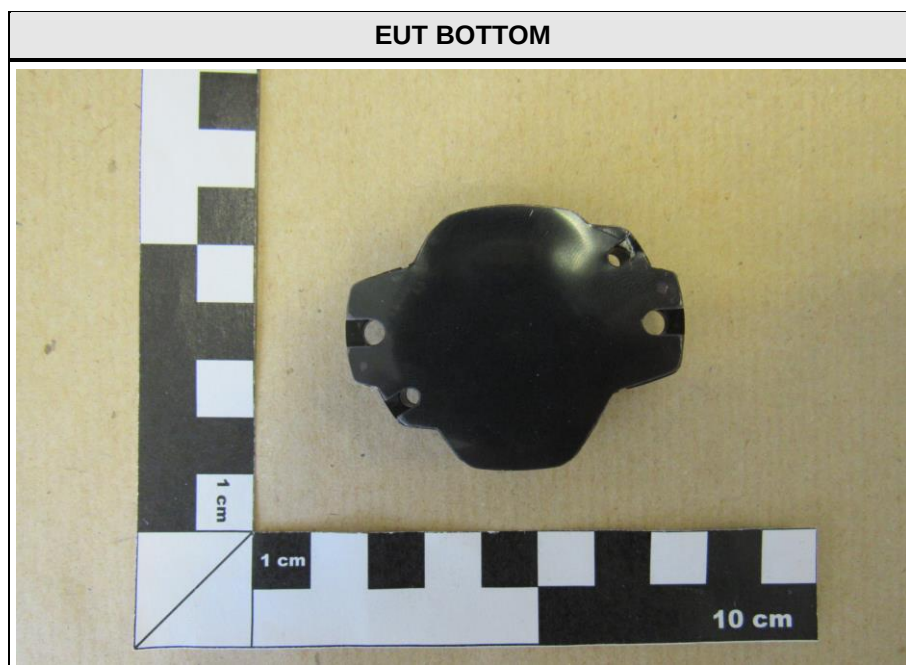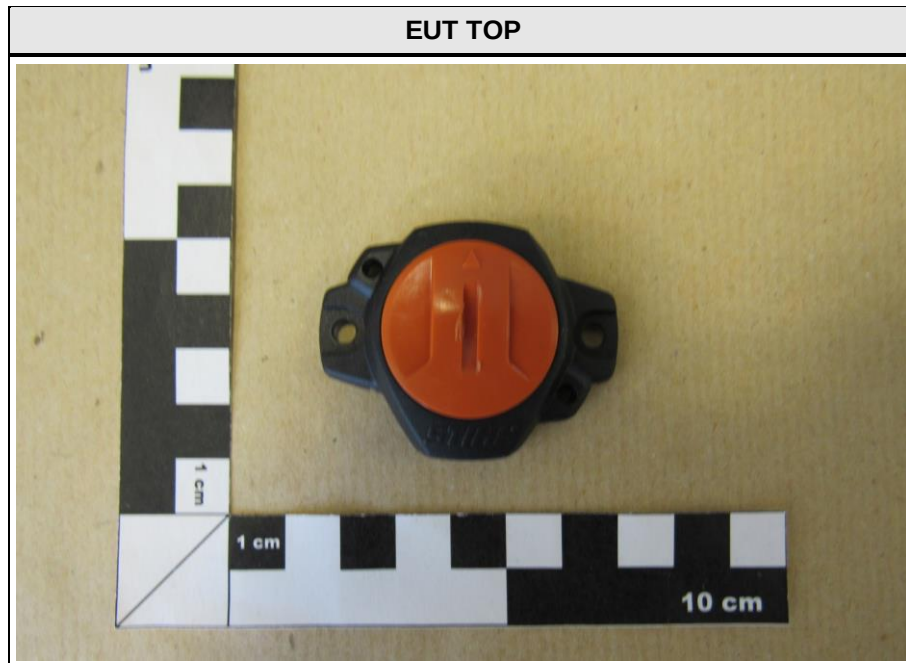


EUT label





EUT Inside I

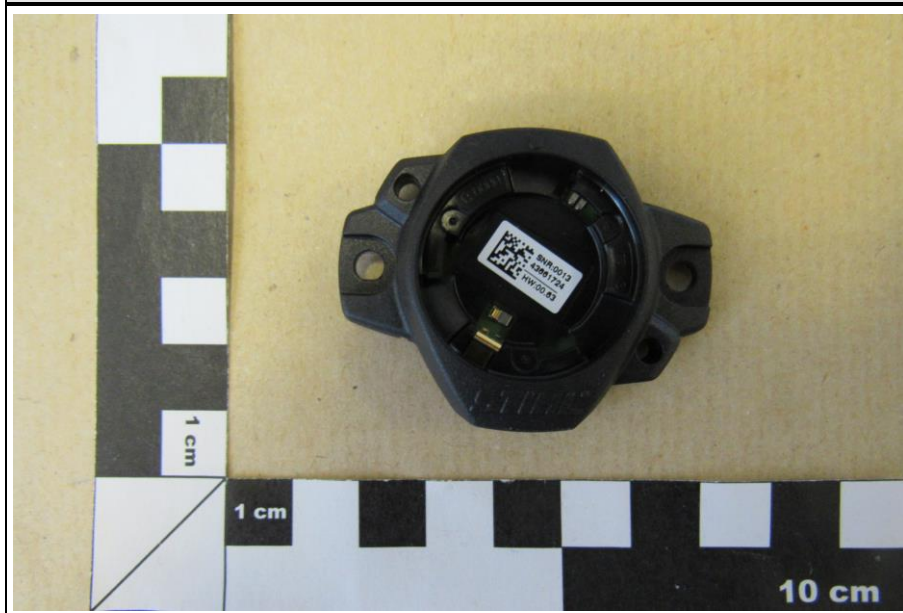

1.2 Photos – Equipment internal

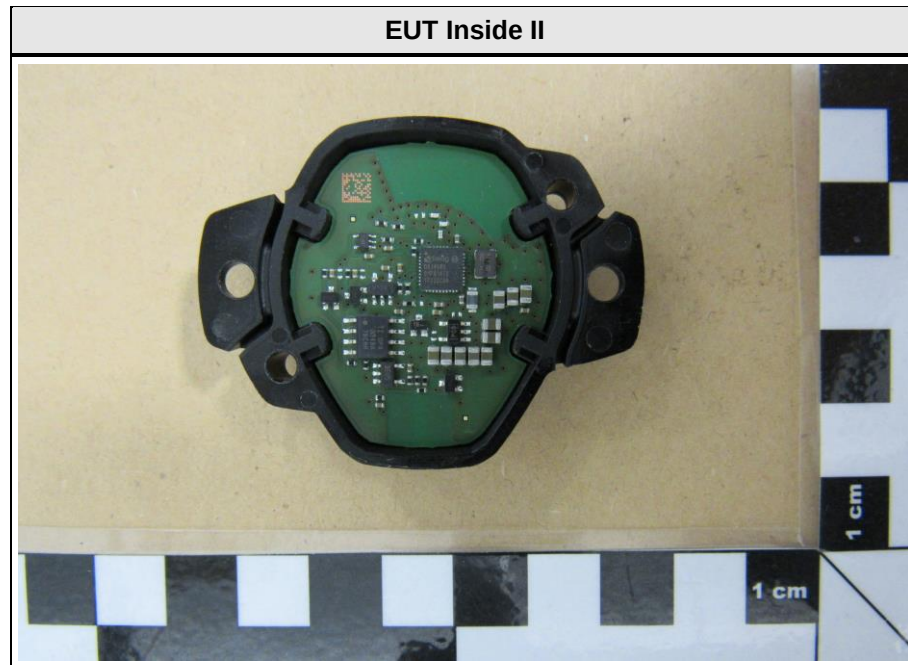

1.3 Photos – Test setup

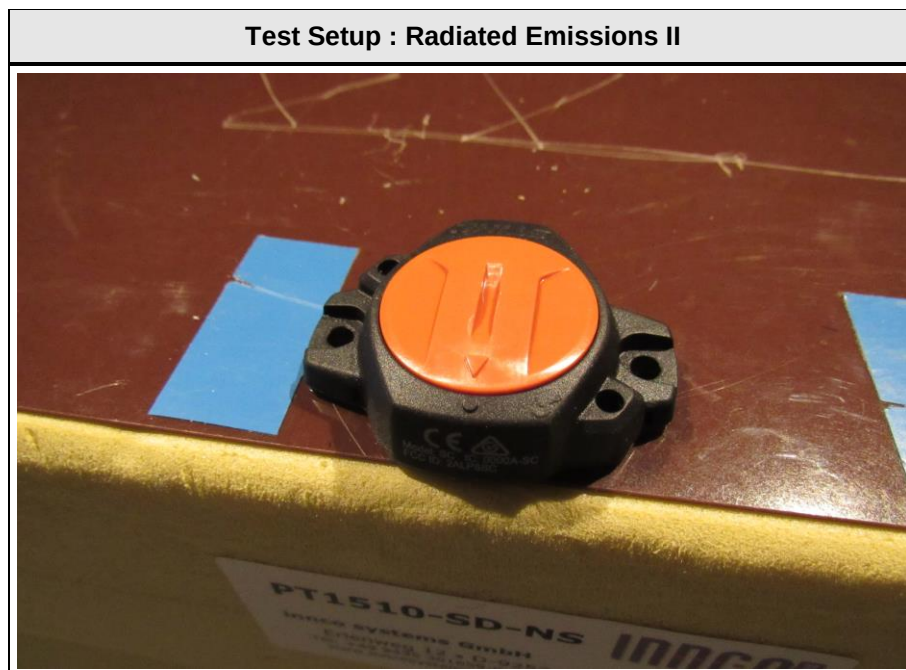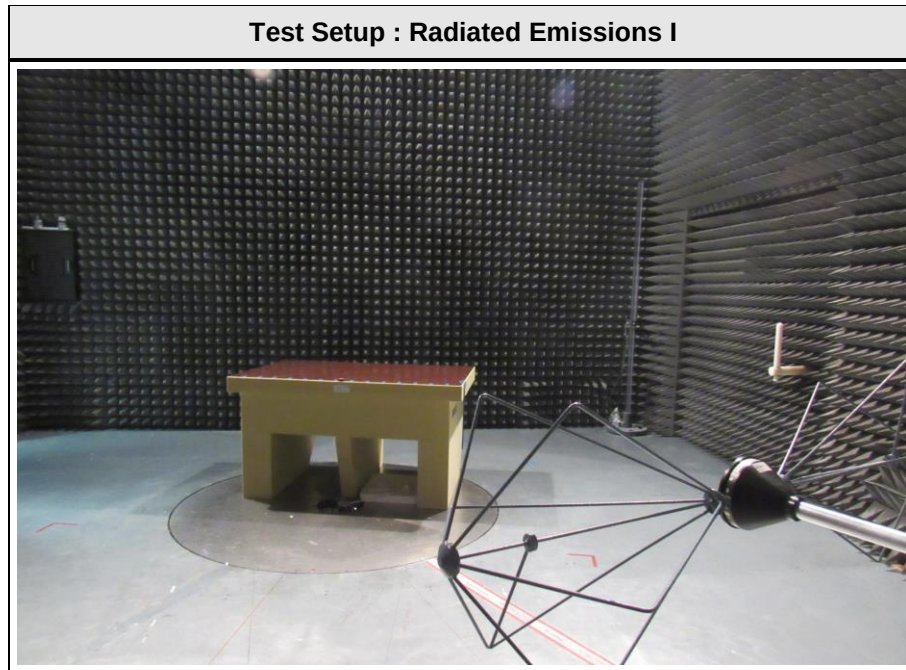

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	Smartphone	Samsung	Galaxy S4	RF8F60WT66H
AE	APP	STHIL	Stihl connect	Ver.: 3.6.8-connect Build: 600579

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	-	-	-	-	-

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	EUT powered via internal battery; Bluetooth low Energy connection to smartphone. App shows the active EUT (displayed) with green dot

Configuration #	EUT Configuration
1	EUT is placed in measurement chamber. Smartphone is placed in the corner of the measurement chamber.

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2016.1.10

Radiated emissions AC1					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical antenna	Rohde & Schwarz Vertriebs GmbH	HK116	EF00186	2016-02	2018-02
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Double-Ridged Guide Antenna	ETS-Lindgren USA	3117	EF01256	2017-07	2018-07
MXE EMI Receiver	Keysight Technologies	N9038A- 526/WXP	EF01070	2017-08	2018-08
RF Cable			-	System Cal.	System Cal
RF Cable			-	System Cal.	System Cal

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dB μ V	+	26 dB	=	47.5 dB μ V/m	:	47.5 dB μ V/m - 57.0 dB μ V/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	N/A	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		24.1°C		
Relative Humidity		-		23		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 2400				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 13 GHz				
Operating mode		1				
Configuration		1				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant:	ANDREAS STIHL AG & Co. KG
EUT Name:	STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
Model:	SC
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22.5°C, Unom: 3.0V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	Mode#1
Test Date:	2018-02-01
Note:	

Index 35

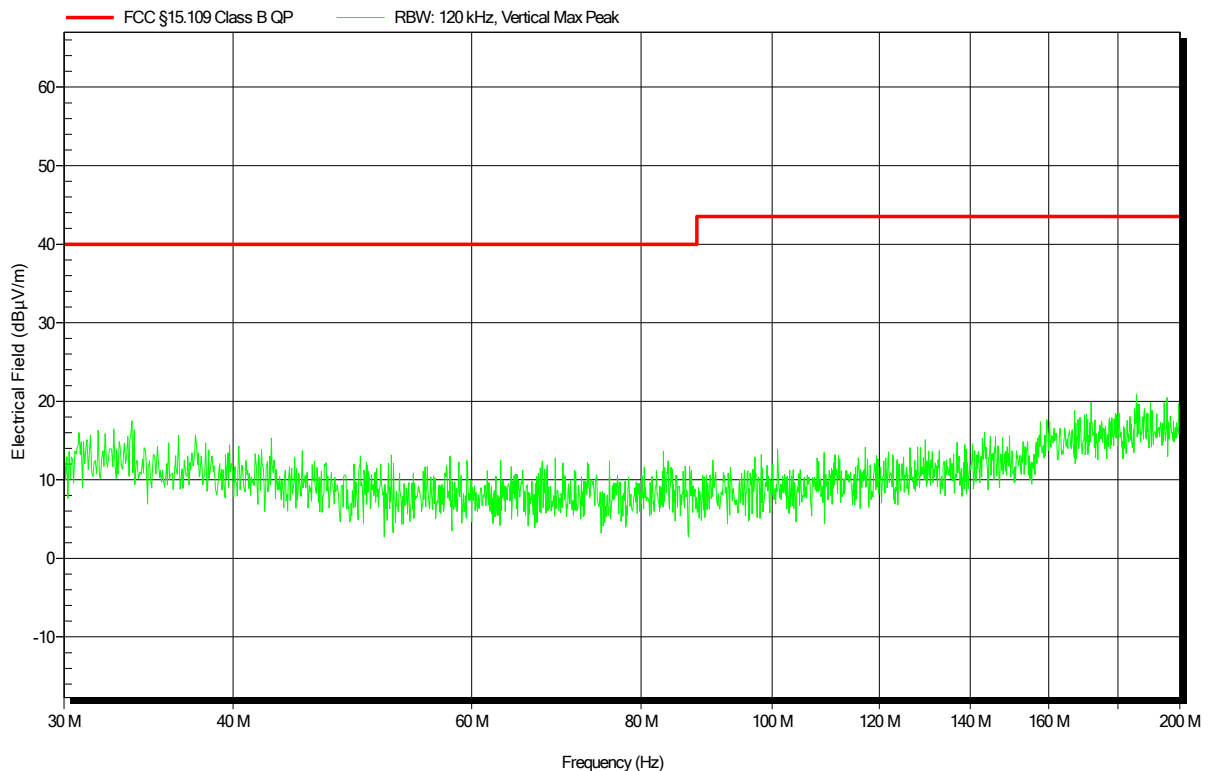

Test Report No.: G0M-1711-7034-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant:	ANDREAS STIHL AG & Co. KG
EUT Name:	STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
Model:	SC
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3.0V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	Mode#1
Test Date:	2018-02-01
Note:	

Index 36

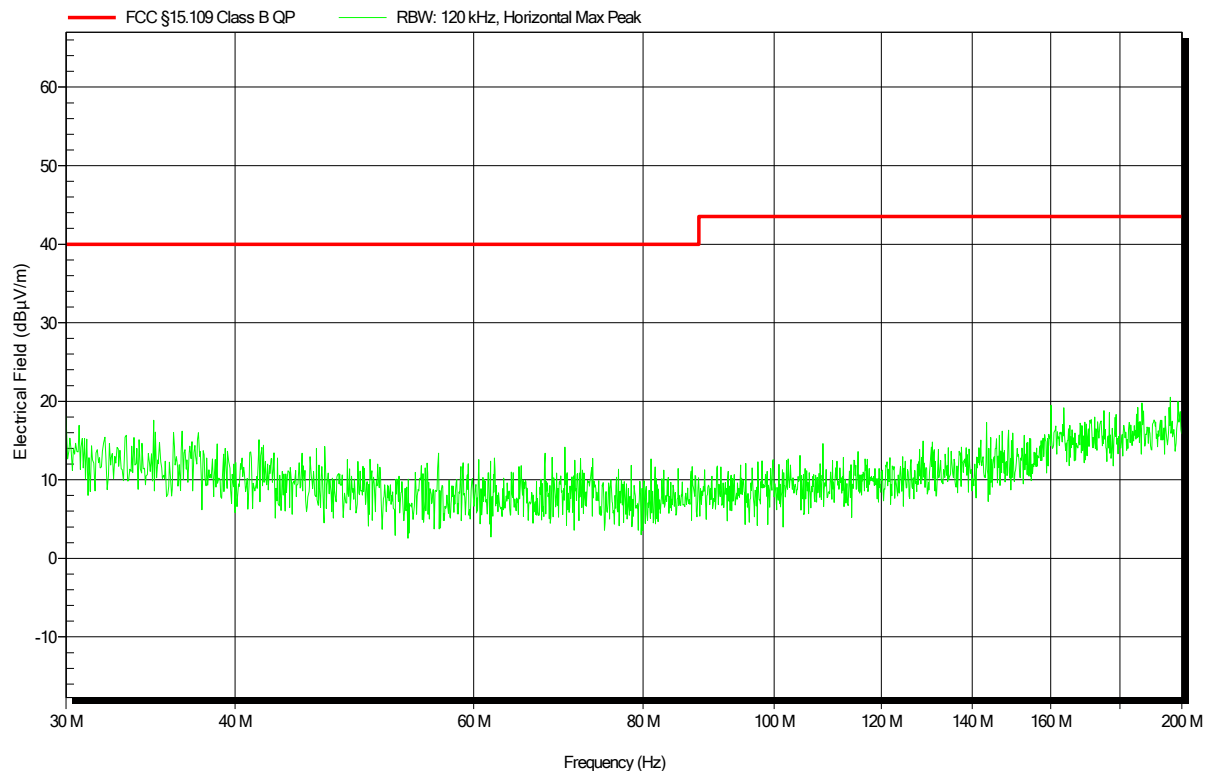

Test Report No.: G0M-1711-7034-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant:	ANDREAS STIHL AG & Co. KG
EUT Name:	STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
Model:	SC
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3.0V DC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	Mode#1
Test Date:	2018-02-01
Note:	

Index 37

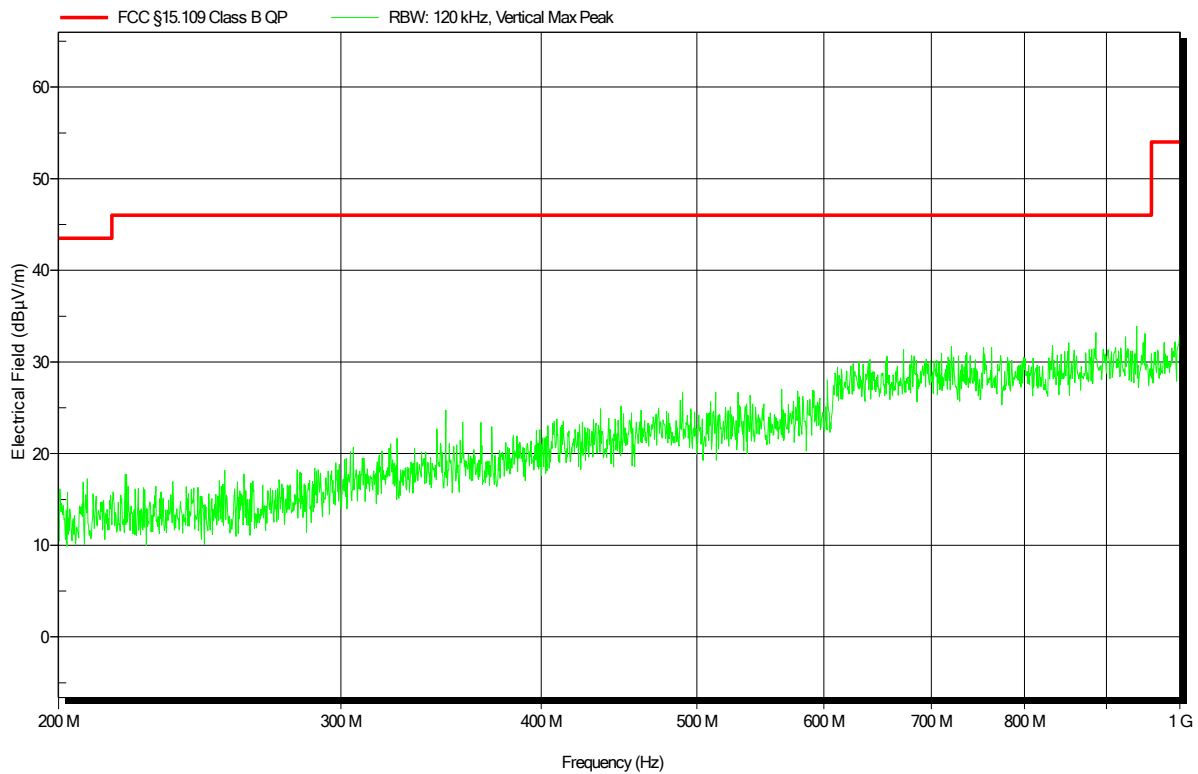


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant:	ANDREAS STIHL AG & Co. KG
EUT Name:	STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
Model:	SC
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 24°C, Unom: 3.0V DC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	Mode#1
Test Date:	2018-02-01
Note:	

Index 38

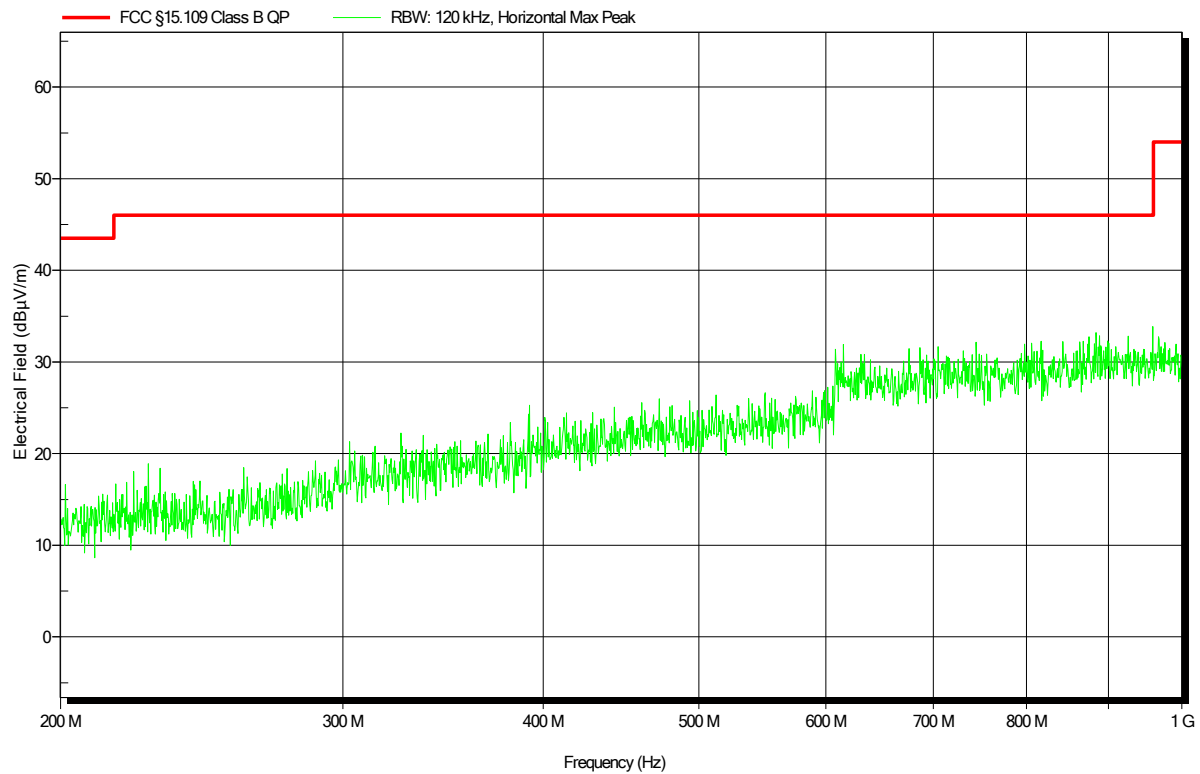


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant: ANDREAS STIHL AG & Co. KG
 EUT Name: STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
 Model: SC
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 24°C, Unom: 3.0V DC
 Antenna: ETS-Lindgren 3117, Vertical
 Measurement distance: 3m
 Mode: Mode#1
 Test Date: 2018-02-01
 Note:

Index 39

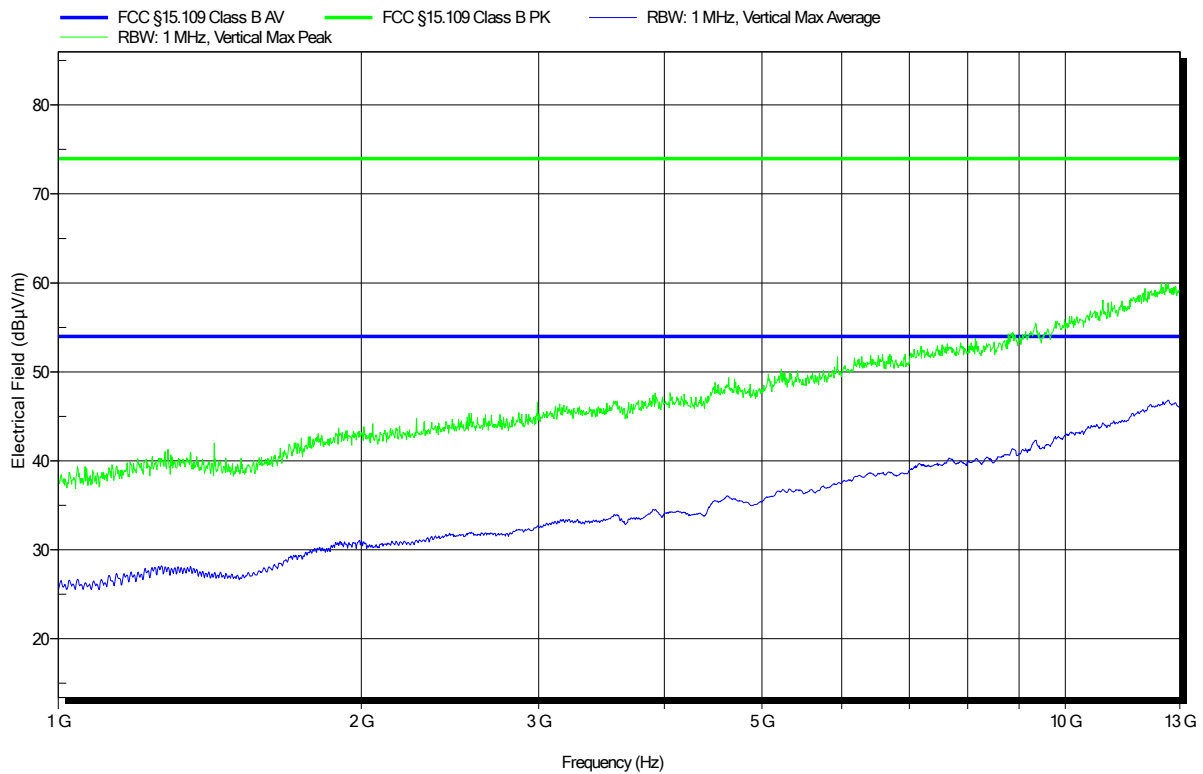

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1711-7034

Applicant: ANDREAS STIHL AG & Co. KG
 EUT Name: STIHL Smart Connector / STIHL Part No. 0000-400-4900-A
 Model: SC
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 24°C, Unom: 3.0V DC
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3m
 Mode: Mode#1
 Test Date: 2018-02-01
 Note:

Index 40

