



ANTENNA DATA SHEET

Manufacturer:	Jiangxi Jichi Technology Co., Ltd
Add:	Plant No.3,BlockB13-1-2,B14-1,Jinggangshan Economic and Development Zone,Ji'an City,Jiangxi Province,China
Model:	3U
Date:	October 11, 2024
Versions:	V1.0

Contents

1. Test equipment list	- 2 -
2. Test setup	- 3 -
3. Performance parameter	- 4 -
4. VSWR Test Data	- 4 -
5. Gain and Effi	- 5 -
6. Test Directional diagram	- 6 -

2. Test setup

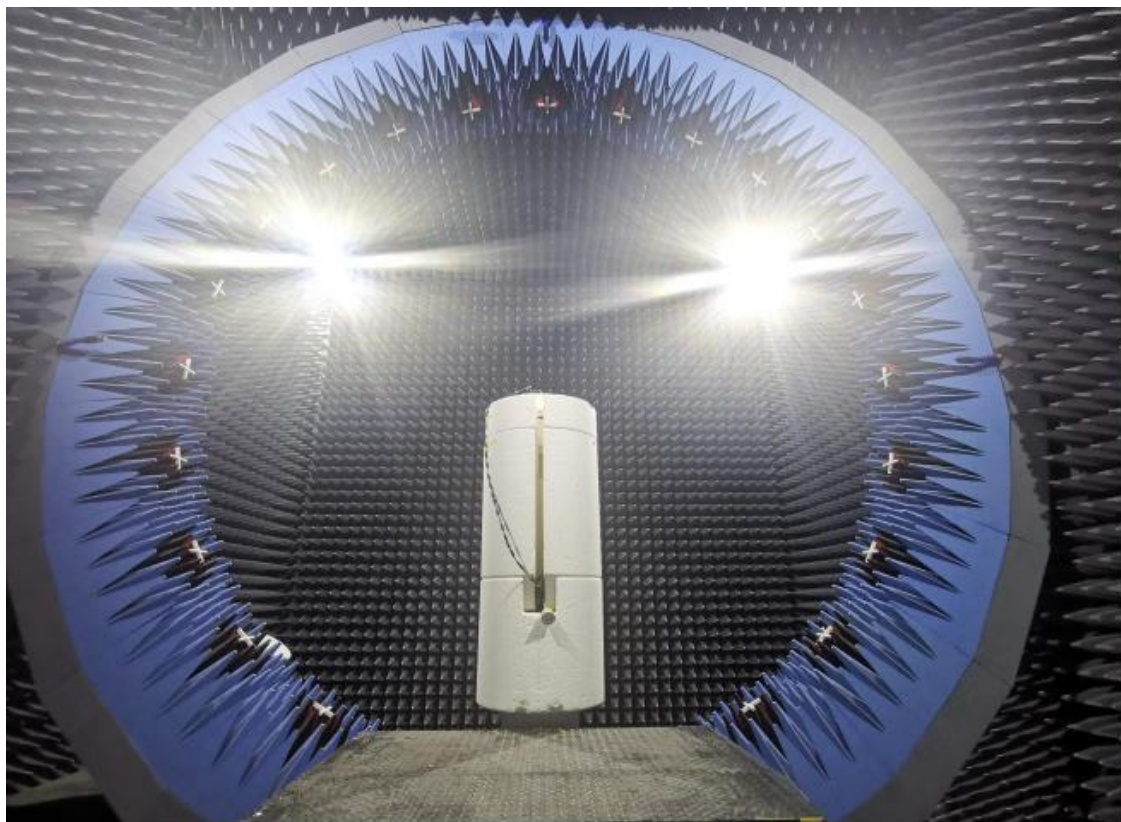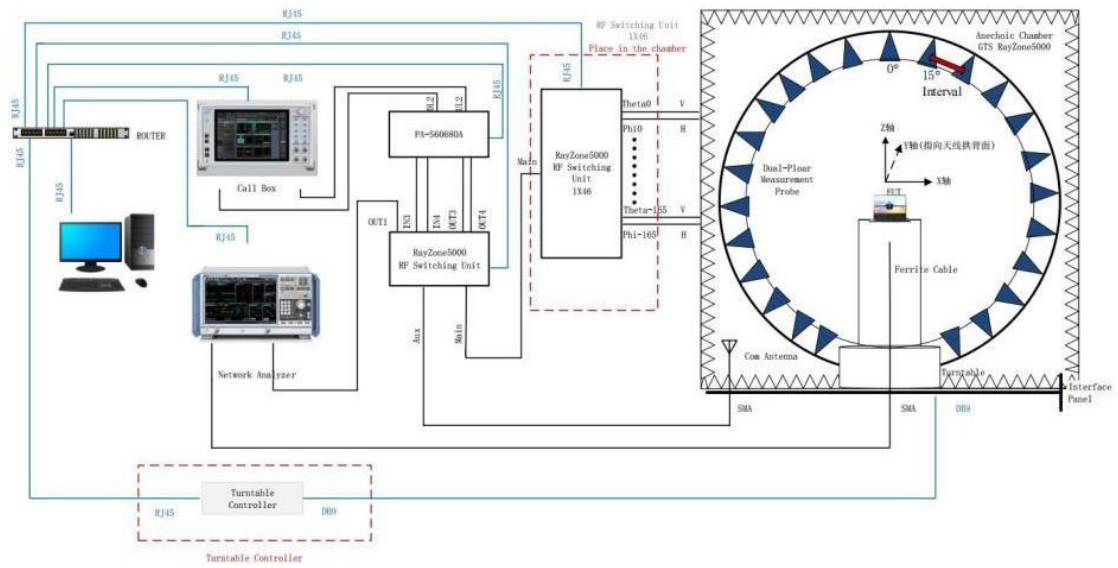


3. Performance parameter

Frequency range	2400-2500MHz
VSWR	≤ 7.0
Input impedance	50 Ω
Peak Gain(dBi)	1.64
Antenna type	PCB
Temperature	-40~80

4. VSWR Test Data


Frequency(MHz)	Return Loss	VSWR
2400	-8.17	1.16
2450	-10.79	2.15
2500	-10.31	2.75

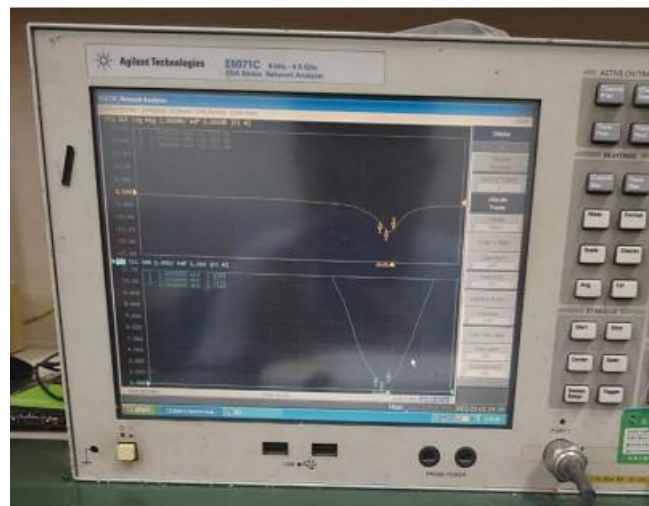


5. Gain and Effi

Frequency(MHz)	Effi	Peak Gain
2400	1.43	1.64
2410	1.32	1.28
2420	1.40	1.15
2430	1.27	1.03
2440	1.47	1.24
2450	1.67	1.19
2460	1.29	0.90
2470	1.40	0.76
2480	1.25	1.22
2490	1.34	0.80
2500	1.26	0.93


6. Test Directional diagram

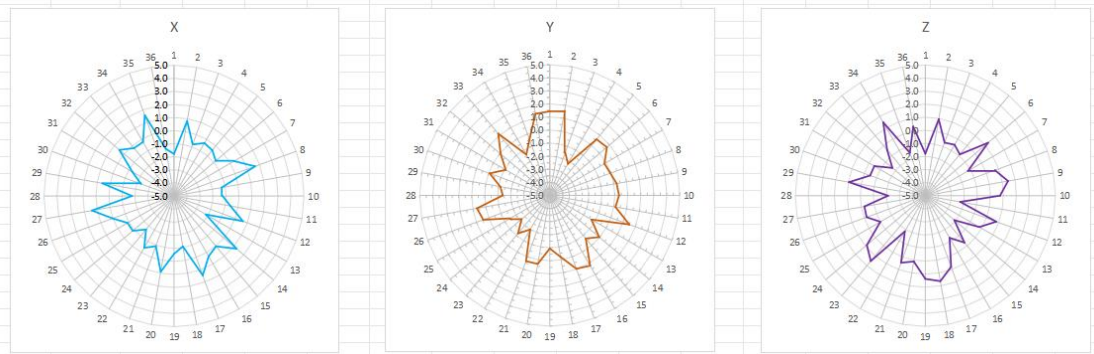

2400MHz

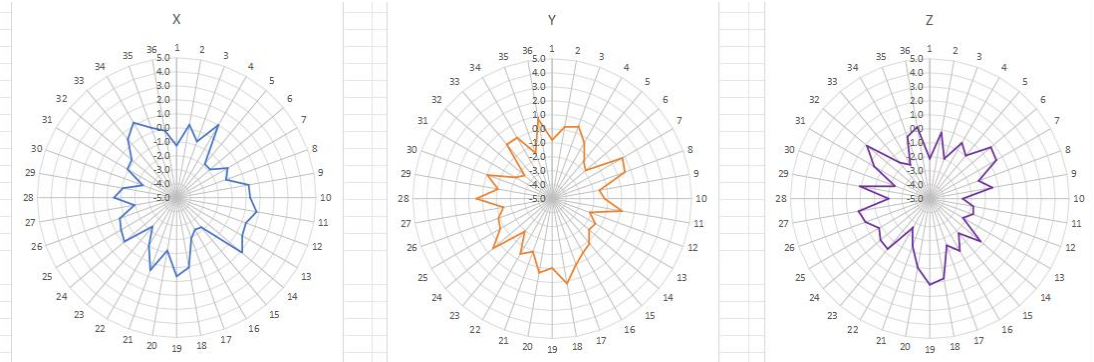

2440MHz

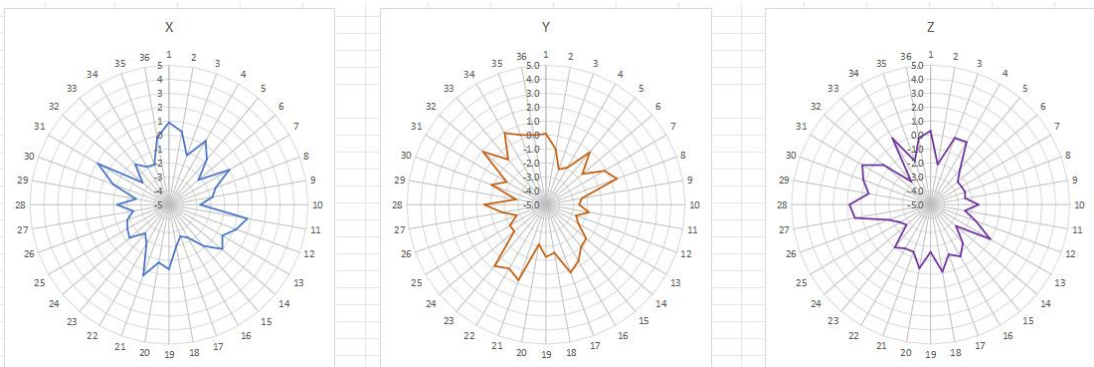

2500MHz

-----The end-----