

Page: 1 of 38

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT





Applicant: CASTLES TECHNOLOGY CO., LTD.

6F, NO. 207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT,

NEW TAIPEI CITY 231030, TAIWAN (R.O.C)

Manufacturer: CASTLES TECHNOLOGY CO., LTD.

6F, NO. 207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT,

NEW TAIPEI CITY 231030, TAIWAN (R.O.C)

Product Name: POS Terminal

Brand Name: CASTLES

S1E2-UPT

Model No.: /ISED HVIN:

ISED PMN: POS Terminal

Report Number: TERF2408002257E2

FCC ID WIYS1E2UPT001

IC: 27350-S1E2UPT001

Date of EUT Received: August 1, 2024

Date of Test: August 12, 2024 ~ August 22, 2024

Issue Date: September 5, 2024

Arno Hoio

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.225, ISED RSS-210.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测验之样只有含,同既此样只属风风风干。大规华工概太八司隶而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 2 of 38

Revision History								
Report Number	Revision	Description	Issue Date	Revised By	Remark			
TERF2408002257E2	00	Original	September 5, 2024	Susan Lin				

Note:

1 • The remark "*" indicates modification of the report upon requests from certification body.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 38

Table of Contents

1	GENERAL INFORMATION	. 4
2	SYSTEM TEST CONFIGURATION	. 6
3	SUMMARY OF TEST RESULTS	. 8
4	DESCRIPTION OF TEST MODES	. 9
5	MEASUREMENT UNCERTAINTY	10
6	MEASUREMENT EQUIPMENT USED	11
7	CONDUCTED EMISSIONS TEST	12
8	RADIATED EMISSION TEST	18
9	FREQUENCY STABILITY	30
10	EMISSION BANDWIDTH MEASUREMENT	35
11	ANTENNA REQUIREMENT	38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format This document is issued by the Company's subject to its General Conditions of Service prime developed, available of request of accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 4 of 38

1 GENERAL INFORMATION

1.1 Product Description

Product Name:	POS Terminal
Brand Name:	CASTLES TECHNOLOGY
Model No.: /ISED HVIN:	S1E2-UPT
Hardware Version:	V1F.00
Firmware Version:	N/A
EUT Series No.:	196242025226
Power Supply:	9Vdc from Adapter
Test Software (Name/Version):	Default (Engineer Mode)

1.2 RF specification

Radio Technology:	NFC
Operating Frequency	13.56MHz
Transmit Power	< 29.42dBuV/m at 30m.
Number of Channels	1
Modulation Type	ASK
Antenna Type	Loop

Note: Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 5 of 38

1.3 Test Methodology

FCC Part 15, Subpart C §15.225

RSS-Gen, Issue 5 April 2018, Amendment 2 (February 2021)

RSS-210, Issue 11 June 2024

ANSI C63.10:2013.

1.4 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
		SAC 1		
		SAC 2		
		SAC 3		
	No 124 Wu Kung Dood New Toinei	Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1	T\\/0027	
	Industrial Park, Wuku District, New Taipei City, Taiwan.	Conducted 2	TW0027	TW3702
		Conducted 3		
		Conducted 4		
		Conducted 5		
SGS Taiwan Ltd.		Conducted 6		
Central RF Lab.		Conduction C	TW0028	
(TAF code 3702)		SAC C		
		SAC D		
		SAC G		
	No 2 Koji 1et Pd. Cujeban Dietriet	Conducted A		
	No.2, Keji 1st Rd., Guishan District,	Conducted B		
	Taoyuan City, Taiwan 333	Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.5 Special Accessories

There is no other accessory attached. This is the worst case condition.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此据华结里倚影测述之缘是台香,同時件操品倚保留的形。木都华丰德木公司事而纯可,不可部份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 6 of 38

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.3.3 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此据华结里倚影测述之缘是台香,同時件操品倚保留的形。木都华丰德木公司事而纯可,不可部份推测。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.




Page: 7 of 38

2.4 Test Configuration







2.5 Control Unit(s)

AC Power-Line Conducted Emission Test Site: Conduction C							
EQUIPMENT TYPE	EQUIPMENT TYPE MFR MODEL NUMBER SERIAL NUMBER LAST CAL. CAL DUE.						
AC Adapter	AC Adapter Castles PW04-945A N/A N/A N/A						

Radiated Emission Test Site: SAC G						
EQUIPMENT TYPE MFR MODEL NUMBER SERIAL NUMBER LAST CAL. CAL DUE.						
AC Adapter	Castles	PW04-945A	N/A	N/A	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 38

3 SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description Of Test	Result
§15.207	RSS-Gen § 8.8	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	RSS210 Annex B B.6 (a)	Radiated Emission	Compliant
§15.209	RSS-Gen § 8.9	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	RSS210 Annex B B.6 (b)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	RSS-Gen § 6.7	Emission Bandwidth	Compliant
§15.203	N/A	Antenna Requirement	Compliant
§15.205	RSS-Gen § 8.10	Restricted Bands	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,许如生结里体影响对文梯只含著,同时计模只像是它的主。大都生主领太公司事而连行,太可驾设海剿。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 9 of 38

4 DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmission mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Only one configuration is supported/applicable as follows.

RADIATED EMISSION TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION				
NFC	1	1	ASK				
FREQUENCY STABILITY							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION				
NFC	1	1	ASK				
	20dB and 99% BANDWIDTH						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION				
NFC	1	1	ASK				

The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 38

MEASUREMENT UNCERTAINTY

Test Items	Unc	ertainty	1
AC Power Line Conducted Emission	+/-	1.54	dB
Frequency Stability	+/-	1.48	Hz
Emission Bandwidth	+/-	1.38	Hz
Temperature	+/-	0.6	°C
Humidity	+/-	3	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty						
	+/-	1.89	dB	9kHz~30MHz		
Polarization: Vertical	+/-	4.15	dB	30MHz - 1000MHz		
Polarization. Vertical	+/-	3.43	dB	1GHz - 18GHz		
	+/-	3.86	dB	18GHz - 40GHz		
Polarization: Horizontal	+/-	1.89	dB	9kHz~30MHz		
	+/-	4.02	dB	30MHz - 1000MHz		
Polarization. Horizontal	+/-	3.43	dB	1GHz - 18GHz		
	+/-	3.86	dB	18GHz - 40GHz		
	+/-	2	dB	33GHz-50GHz		
Dadieted Occurs	+/-	1.59	dB	50GHz-60GHz		
Radiated Spurious Emission	+/-	1.7	dB	60GHz-90GHz		
	+/-	1.64	dB	90GHz-140GHz		
	+/-	3.83	dB	140GHz-220GHz		

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. I



Page: 11 of 38

MEASUREMENT EQUIPMENT USED

6.1 **Emission from AC power line**

AC Power-Line Conducted Emission Test Site: Conduction C							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Coaxial Cable	EC Lab	RF-HY-CAB-250	RF-HY-CAB-250-01	03/27/2024	03/26/2025		
EMI Test Receiver	R&S	ESCI	101342	04/29/2024	04/28/2025		
LISN	SCHWARZBECK Mess-Elektronik	NSLK8127	973	04/22/2024	04/21/2025		
Pulse Limiter	EC Lab	VTSD 9561F-N	485	03/27/2024	03/26/2025		
Test Software	audix	е3	E3 20923 SGS Ver.9 (C)	N.C.R	N.C.R		

6.2 **Conducted Measurement**

Conducted Emission Test Sites Conducted C									
Conducted Emission Test Site: Conducted C									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
DC Power Supply	Gwinstek	SPS-3610	GEV856767	10/02/2023	10/01/2024				
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071573	05/24/2024	05/23/2025				
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/12/2024	06/11/2025				
H-Loop Near Field Antenna	LANGER EMV- Technik	LF-R 400	02-1597	N.C.R	N.C.R				

Radiated Measurement 6.3

	Radiated Emission Test Site: SAC G									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
3m Site NSA	SGS	966 chamber G	N/A	03/30/2024	03/29/2025					
Active Loop Antenna	COM-POWER	AL-130R	10160105	12/04/2023	12/03/2024					
Broadband Antenna	SCHWARZBECK	VULB 9168	1208	07/17/2024	07/16/2025					
Coaxial Cable	EMC Instruments	EMCCFD400-NM- NM-8000-5000- 2000	210216 \ 210217 \ 210218	03/13/2024	03/12/2025					
Lowpass Filter	Woken	EWT-56-0019	RF173	11/15/2023	11/14/2024					
Pre-Amplifier	EMC Instruments	EMC330N	980781	03/13/2024	03/12/2025					
Spectrum Analyzer	KEYSIGHT	N9010B	MY63440390	02/16/2024	02/15/2025					

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 12 of 38

7 CONDUCTED EMISSIONS TEST

7.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits (dBuV)				
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			


Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

7.2 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

7.3 Test SET-UP (Block Diagram of Configuration)

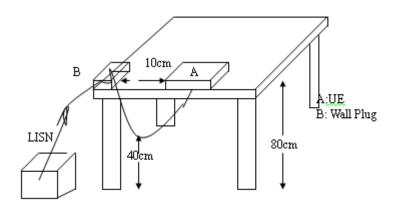

7.4 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 38

Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closest to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The defined treteril. Any folded to this document is advised tractification and the contractive treteril t prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 14 of 38

AC POWER LINE CONDUCTED EMISSION TEST DATA


Report Number :TERF2408002257E2 Test Site :Conduction C

Test Mode :NFC Test Date :2024-08-21

Power :120V/60Hz Temp./Hum. :23.0℃/52%

Probe :L1 Engineer :Jacky Chen

Note: :NFC On

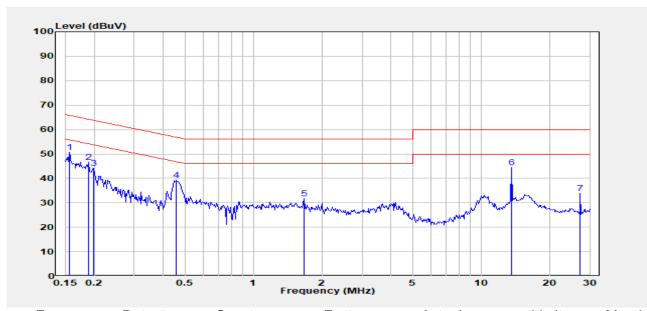

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
0.155	Peak	40.06	10.65	50.71	65.72	-15.01
0.189	Peak	35.88	10.65	46.53	64.10	-17.56
0.199	Peak	33.64	10.65	44.29	63.67	-19.39
0.460	Peak	28.57	10.62	39.18	56.69	-17.51
1.672	Peak	20.97	10.75	31.72	56.00	-24.28
13.560	Peak	33.50	11.05	44.55	-	-
27.120	Peak	22.61	11.32	33.93	60.00	-26.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。未都些主權大同事而雖可,不可如以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 38

Report Number :TERF2408002257E2 Test S

Test Mode :NFC

Power :120V/60Hz

Probe :N


Note: :NFC On

Test Site :Conduction C

Test Date :2024-08-21

Temp./Hum. :23.0°C/52%

Engineer :Jacky Chen

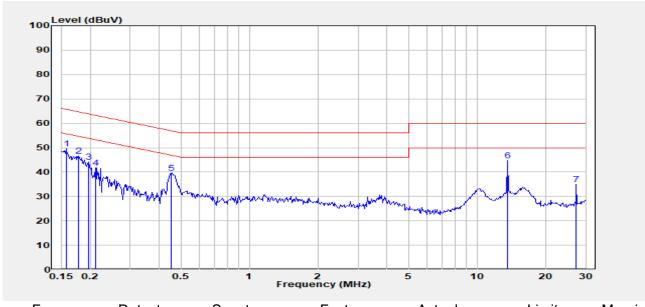

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
·	Mode	Reading Level		FS		•
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
					•	
0.157	Peak	38.97	10.66	49.63	65.65	-16.01
0.178	Peak	36.05	10.65	46.70	64.59	-17.88
0.197	Peak	33.62	10.65	44.28	63.74	-19.47
0.211	Peak	31.07	10.65	41.72	63.18	-21.46
0.452	Peak	29.06	10.61	39.67	56.83	-17.16
13.560	Peak	33.56	11.04	44.60	-	-
27.120	Peak	23.62	11.33	34.95	60.00	-25.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的证明,所谓生结里痛對测导之緣具有害,同時所撰具備保留的子。木都生主领太八司事而鲜可,不可驾份海刺。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 38


Report Number :TERF2408002257E2 Test Site

Test Mode :NFC


Power :120V/60Hz Temp./Hum. :23.0°C/52%

Probe :L1

Note: :Standby mode



Engineer :Jacky Chen

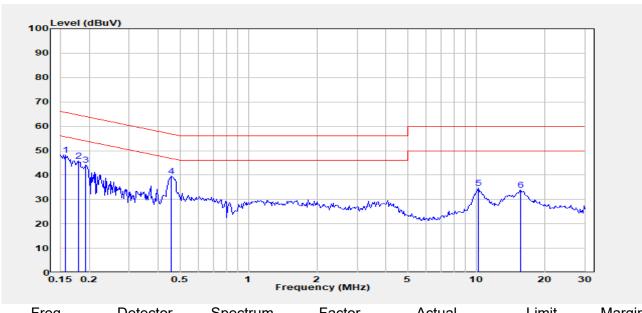

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
0.157	Peak	37.52	10.65	48.17	65.65	-17.48
0.179	Peak	35.11	10.65	45.76	64.52	-18.76
0.194	Peak	33.39	10.65	44.04	63.88	-19.84
0.456	Peak	28.84	10.62	39.46	56.76	-17.31
10.205	Peak	23.70	10.97	34.66	60.00	-25.34
15.735	Peak	22.81	11.09	33.90	60.00	-26.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 38


Report Number **Test Site** :TERF2408002257E2 :Conduction C

Test Mode :NFC **Test Date** :2024-08-21

:23.0°C/52% Power :120V/60Hz Temp./Hum.

Probe :N Engineer :Jacky Chen

:Standby mode Note:

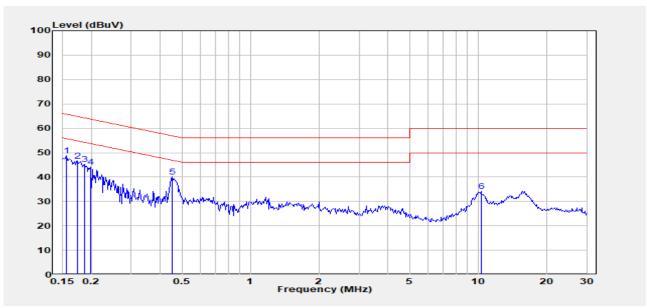

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dΒμV	dΒμV	dB
0.155	Peak	38.16	10.66	48.81	65.72	-16.90
0.175	Peak	36.08	10.65	46.73	64.73	-18.00
0.187	Peak	34.62	10.65	45.27	64.17	-18.90
0.199	Peak	33.64	10.65	44.29	63.67	-19.38
0.452	Peak	29.44	10.61	40.05	56.83	-16.78
10.292	Peak	23.12	10.96	34.08	60.00	-25.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 www.sgs.com.tw




Page: 18 of 38


RADIATED EMISSION TEST

8.1 **Test SET-UP (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

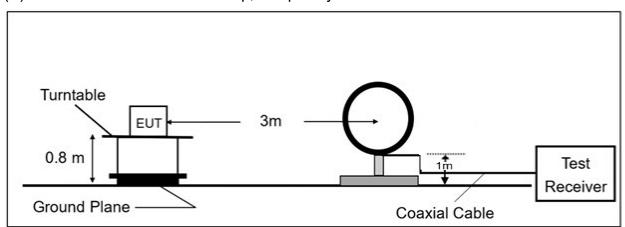

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

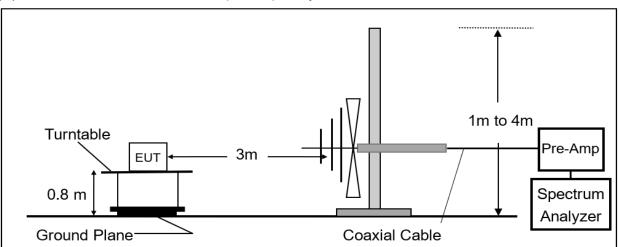

8.2 **Measurement Procedure**

- Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane and been measured in the frequency range between 0.009MHz to 30MHz and 30MHz to 1GHz.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 19 of 38

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.4 Field Strength of Fundamental Emission

8.4.1 Applicable standard

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Frequency of Emission (MHz)	Field Strength (µV/m)at 30m	Field Strength (dBµV/m)at 30m			
1.705~13.110	30	29.5			
13.110~13.410	106	40.5			
13.410~13.553	334	50.5			
13.553~13.567	15848	84			
13.567~13.710	334	50.5			
13.710~14.010	106	40.5			
14.010~30.00	30	29.5			

Radiated Mask per ISED RSS 210 Annex B B6

- (a) 15.848 millivolts/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBμV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dBµV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.
- (d) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 20 of 38

Distance Extrapolation Factor

30m to 3m

Distance extrapolation = 40 * log (30/3) = 40 dB

30m to 10m

Distance extrapolation = 40 * log (30/10) = 19.08 dB

10m to 3m

Distance extrapolation = $40 \cdot \log (10/3) = 20.92 \, dB$

Note:

- 1. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 2. The lower limit shall apply at the transition frequencies.
- 3. KDB 414788 D01 OATS and 3m semi-anechoic chamber Justification: Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OATS and 3m SAC chamber testing had been performed and 3m SAC measured test result is the worst case test result.

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB)

Below 30 MHz of Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Distance Factor (dB)

Above 30 MHz of Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amp Gain (dB)

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

www.sqs.com.tw



Page: 21 of 38

Field Strength of Fundamental Emission Measurement Result


Test Site Report Number :TERF2408002257E2 :SAC G Chamber

Test Date Operation Mode :NFC :2024-08-21

Temp./Humi. **Test Frequency** :13.56 MHz :21.5°C/66%

Antenna Pol. Test Mode :Vertical :Main

Engineer **EUT Pol** :H Plane :Jacky Chen

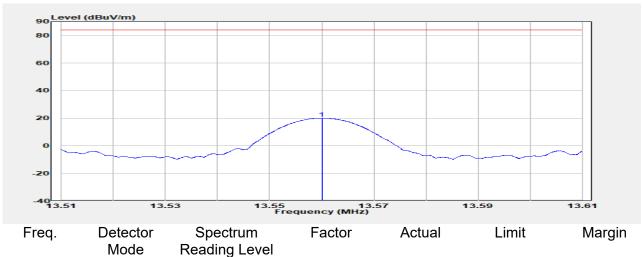

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
13.560	Peak	44.42	-24.43	19.99	84.00	-64.01

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 22 of 38


Report Number :TERF2408002257E2 Test Site :SAC G Chamber

Operation Mode :NFC Test Date :2024-08-21

Test Frequency :13.56 MHz Temp./Humi. :21.5℃/66%

Test Mode :Main Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Jacky Chen

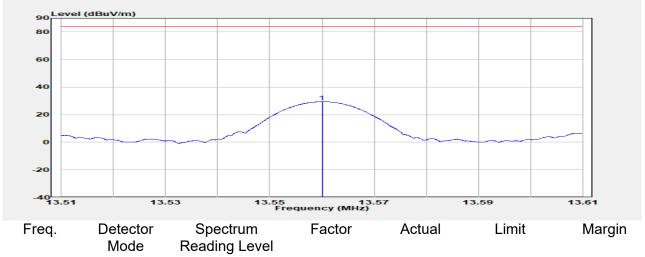

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
13 560	Peak	53.85	-24 43	29 42	84 00	-54 58

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz. Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 38


Report Number :TERF2408002257E2 Test Site :SAC G Chamber

Operation Mode :NFC Test Date :2024-08-21

Test Frequency :13.56 MHz Temp./Humi. :21.5℃/66%

Test Mode :Mask Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Jacky Chen

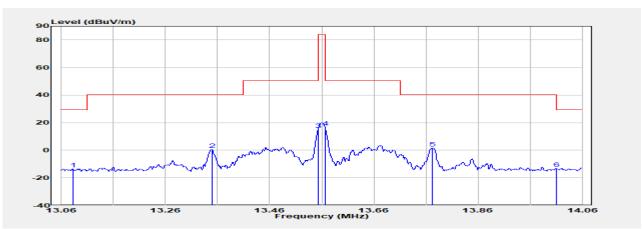

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
_	MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
	13.082	Peak	10.99	-24.43	-13.44	29.54	-42.98
	13.349	Peak	25.07	-24.43	0.64	40.50	-39.86
	13.553	Peak	39.36	-24.43	14.93	50.47	-35.54
	13.566	Peak	41.12	-24.43	16.69	84.00	-67.31
	13.773	Peak	25.93	-24.43	1.50	40.50	-39.00
	14.010	Peak	11.12	-24.43	-13.31	29.54	-42.85

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响过少样具色素,同时此样里做足列的手。木型生土硕木八司丰富纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 24 of 38


Report Number :TERF2408002257E2 Test Site :SAC G Chamber

Operation Mode :NFC Test Date :2024-08-21

Test Frequency :13.56 MHz Temp./Humi. :21.5°C/66%

Test Mode :Mask Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Jacky Chen

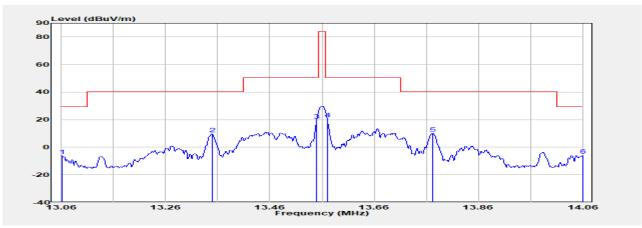

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level				
PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
Peak	18.12	-24.43	-6.31	29.54	-35.85
Peak	33.97	-24.43	9.54	40.50	-30.96
Peak	44.12	-24.43	19.69	50.47	-30.78
Peak	44.87	-24.43	20.43	50.47	-30.04
Peak	34.63	-24.43	10.20	40.50	-30.30
Peak	18.64	-24.43	-5.79	29.54	-35.33
	Mode PK/QP/AV Peak Peak Peak Peak Peak Peak Peak	Mode PK/QP/AV Reading Level dBμV Peak 18.12 Peak 33.97 Peak 44.12 Peak 44.87 Peak 34.63	Mode PK/QP/AV Reading Level dBμV dB Peak 18.12 -24.43 Peak 33.97 -24.43 Peak 44.12 -24.43 Peak 44.87 -24.43 Peak 34.63 -24.43	Mode PK/QP/AV Reading Level dBμV dB dBμV/m Peak 18.12 -24.43 -6.31 Peak 33.97 -24.43 9.54 Peak 44.12 -24.43 19.69 Peak 44.87 -24.43 20.43 Peak 34.63 -24.43 10.20	Mode PK/QP/AV Reading Level dBμV dB dBμV/m dBμV/m Peak 18.12 -24.43 -6.31 29.54 Peak 33.97 -24.43 9.54 40.50 Peak 44.12 -24.43 19.69 50.47 Peak 44.87 -24.43 20.43 50.47 Peak 34.63 -24.43 10.20 40.50

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre_Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有說明,此報生來用屬對個對文學具有書,同時此業具屬是例的主,不可與以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 38

Radiated Spurious Emission Measurement

8.5.1 Standard Applicable

The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits as below.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. Emission level in $dB\mu V/m=20 \log (\mu V/m)$
- Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. $20*\log(30uV/m) = 29.54 dBuV/m$
- The lower limit shall apply at the transition frequencies. 4.
- The measurement was undertaken in closer distance at 3m, where extrapolation 5. factor is offset to convert the limit of the measurement.
- 6. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205 and RSS-Gen §8.10.
- The general radiated emission limits in §15.209 and RSS-Gen §8.9 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 38

8.5.2 Radiated Spurious Emission Measurement Result


Report Number :TERF2408002257E2 Test Site :SAC G Chamber

 Operation Mode
 :NFC
 Test Date
 :2024-08-21

 Test Frequency
 :13.56 MHz
 Temp./Humi.
 :21.5°C/66%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Jacky Chen

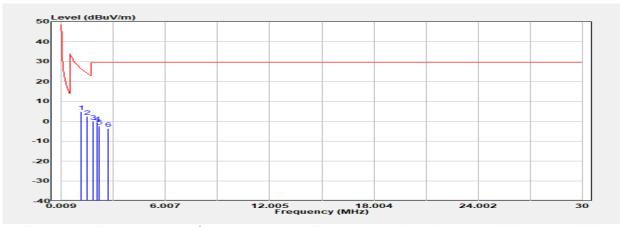

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1.119	Peak	31.26	-26.34	4.92	26.63	-21.71
1.479	Peak	28.58	-26.19	2.40	24.21	-21.81
1.838	Peak	26.11	-26.04	0.07	29.54	-29.47
2.048	Peak	25.24	-25.96	-0.72	29.54	-30.26
2.198	Peak	23.44	-25.91	-2.47	29.54	-32.01
2.678	Peak	22.04	-25.75	-3.71	29.54	-33.25

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre_Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz. Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。未都些主權大同事而雖可,不可如以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 27 of 38


Test Site Report Number :TERF2408002257E2 :SAC G Chamber

Test Date Operation Mode :NFC :2024-08-21

Temp./Humi. :21.5°C/66% **Test Frequency** :13.56 MHz

Antenna Pol. :Horizontal Test Mode :Tx

Engineer **EUT Pol** :H Plane :Jacky Chen

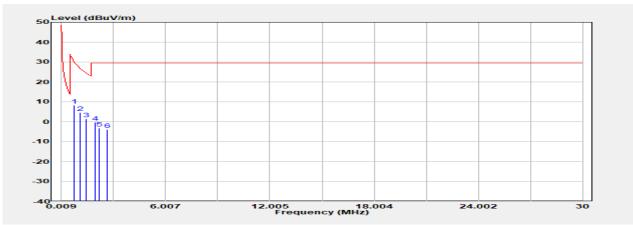

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
гтец.	Mode	Reading Level	Factor	Actual	LIIIII	iviaigiii
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
0.729	Peak	34.88	-26.54	8.34	30.35	-22.01
1.059	Peak	31.10	-26.37	4.73	27.11	-22.38
1.419	Peak	27.72	-26.21	1.51	24.57	-23.06
1.928	Peak	25.87	-26.01	-0.14	29.54	-29.68
2.198	Peak	22.86	-25.91	-3.05	29.54	-32.59
2.648	Peak	21.94	-25.76	-3.82	29.54	-33.36

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 28 of 38


Test Site Report Number :TERF2408002257E2 :SAC G Chamber

Test Date Operation Mode :NFC :2024-08-21

Temp./Humi. :21.5°C/66% **Test Frequency** :13.56 MHz

Antenna Pol. Test Mode :Vertical :Tx

Engineer **EUT Pol** :H Plane :Jacky Chen

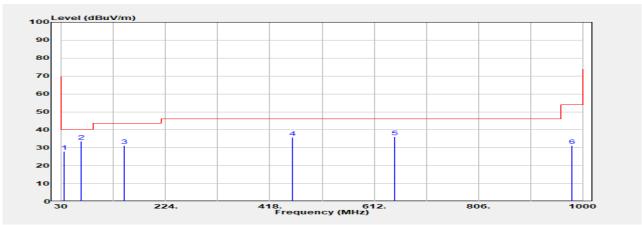

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
34.850	QP	42.10	-14.10	28.00	40.00	-12.00
65.890	QP	47.66	-14.18	33.48	40.00	-6.52
146.400	Peak	44.22	-12.95	31.27	43.50	-12.23
460.680	Peak	43.34	-7.60	35.74	46.00	-10.26
649.830	Peak	40.45	-4.50	35.95	46.00	-10.05
980.600	Peak	30.16	0.93	31.09	54.00	-22.91

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 38


Report Number :TERF2408002257E2 Test Site :SAC G Chamber

Operation Mode :NFC Test Date :2024-08-21

Test Frequency :13.56 MHz Temp./Humi. :21.5°C/66%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Jacky Chen

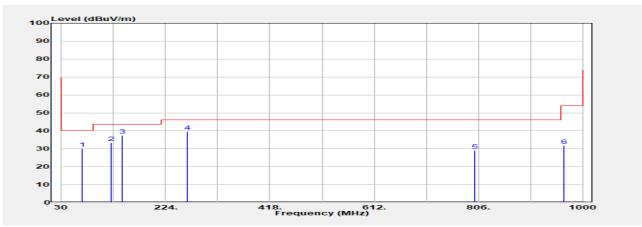

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual	Limit	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBμV/m	dB
67.830	Peak	44.11	-14.14	29.97	40.00	-10.03
122.150	Peak	48.72	-15.44	33.28	43.50	-10.22
143.490	Peak	50.56	-13.17	37.39	43.50	-6.11
263.770	Peak	53.05	-13.37	39.68	46.00	-6.32
800.180	QP	30.60	-1.52	29.08	46.00	-16.92
965.080	Peak	30.75	1.06	31.81	54.00	-22.19

Actual level = Reading level + Factor

Factor = Antenna factor + cable loss – Pre_Amplifier Gain — distance factor

Test distance= 3m

For Actual level and limit:

Field strength (dBuV/m) at 300m, within the band 9 kHz - 490 kHz.

Field strength (dBuV/m) at 30m, within the band 490 kHz - 30 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。未都些主權大同事而雖可,不可如以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 30 of 38

FREQUENCY STABILITY

9.1 **Applicable Standard**


The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Carrier frequency stability shall be maintained to ±0.01% (±100 ppm). For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F).

9.2 **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

Test SET-UP (Block Diagram of Configuration) 9.3

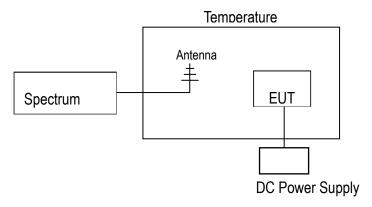

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 31 of 38

Measurement Results

Startup

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature (°C)	(MHz)	Delta (kHz)	Limit (kHz)
9	-20	13.5598	-0.20000	+/- 1.356
9	-10	13.55955	-0.45000	+/- 1.356
9	0	13.55968	-0.32000	+/- 1.356
9	10	13.5599	-0.10000	+/- 1.356
9	20	13.55985	-0.15000	+/- 1.356
9	30	13.55971	-0.29000	+/- 1.356
9	40	13.55944	-0.56000	+/- 1.356
9	50	13.55963	-0.37000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency			
Vdo	Temperature	iture Delta (k		Limit (kHz)	
Vdc	(℃)	(MHz)			
10.35	20	13.55975	-0.25000	+/- 1.356	
9	20	13.55985	-0.15000	+/- 1.356	
7.65	20	13.55969	-0.31000	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 38

2 minutes

A. Temperature Variation

7 ti Tomporataro i			1	
Power Supply	Environment	Frequency		
Vdc	Temperature	(NALI=)	Delta (kHz)	Limit (kHz)
Vuc	(℃)	(MHz)		
9	-20	13.55984	-0.16000	+/- 1.356
9	-10	13.55996	-0.04000	+/- 1.356
9	0	13.55979	-0.21000	+/- 1.356
9	10	13.55985	-0.15000	+/- 1.356
9	20	13.5599	-0.10000	+/- 1.356
9	30	13.55966	-0.34000	+/- 1.356
9	40	13.5593	-0.70000	+/- 1.356
9	50	13.55927	-0.73000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature	(MILE) Delta (kHz) L		Limit (kHz)
Vuc	(℃)	(MHz)		
10.35	20	13.55965	-0.35000	+/- 1.356
9	20	13.5599	-0.10000	+/- 1.356
7.65	20	13.55951	-0.49000	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 33 of 38

5 minutes

A. Temperature Variation

7 ti Tomporataro i				
Power Supply	Environment	Frequency		
Vdc	Temperature	(NALI=)	Delta (kHz)	Limit (kHz)
Vuc	(℃)	(MHz)		
9	-20	13.55934	-0.66000	+/- 1.356
9	-10	13.55959	-0.41000	+/- 1.356
9	0	13.55972	-0.28000	+/- 1.356
9	10	13.55961	-0.39000	+/- 1.356
9	20	13.55929	-0.71000	+/- 1.356
9	30	13.55983	-0.17000	+/- 1.356
9	40	13.55918	-0.82000	+/- 1.356
9	50	13.5592	-0.80000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency		
Vdc	Temperature	(MHz)	Delta (kHz) Limi	
Vuc	(℃)	(IVITIZ)		
10.35	20	13.55967	-0.33000	+/- 1.356
9	20	13.55929	-0.71000	+/- 1.356
7.65	20	13.55951	-0.49000	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 34 of 38

10 minutes

A. Temperature Variation

7. T. O. I. Portataro Variadori							
Power Supply	Environment	Frequency					
Vdc	Temperature	(MHz)	Delta (kHz)	Limit (kHz)			
	(℃)						
9	-20	13.55969	-0.31000	+/- 1.356			
9	-10	13.55954	-0.46000	+/- 1.356			
9	0	13.55978	-0.22000	+/- 1.356			
9	10	13.5596	-0.40000	+/- 1.356			
9	20	13.55942	-0.58000	+/- 1.356			
9	30	13.55922	-0.78000	+/- 1.356			
9	40	13.55958	-0.42000	+/- 1.356			
9	50	13.55906	-0.94000	+/- 1.356			

B. Supply Voltage Variation

Power Supply	Environment	Frequency					
Vdc	Temperature	/M∐→\	Delta (kHz)	Limit (kHz)			
	(℃)	(MHz)					
10.35	20	13.55991	-0.09000	+/- 1.356			
9	20	13.55942	-0.58000	+/- 1.356			
7.65	20	13.55916	-0.84000	+/- 1.356			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 35 of 38

10 EMISSION BANDWIDTH MEASUREMENT

Applicable Standard:

The 20 dB and 99% bandwidth shall be specified in operating frequency band.

10.2 **Test Set-up**

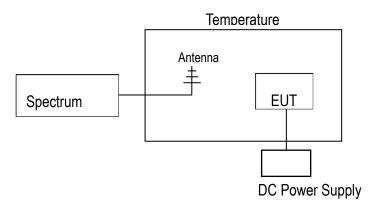

10.3 **Measurement Procedure**

- 1. Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.
- 3. Set SPA Center Frequency = fundamental frequency, RBW=1% to 5% OBW, VBW=3 x RBW, Span = large enough to capture all products of the modulation process.
- 4. Measured the spectrum width with power higher than 20dB below carrier.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 36 of 38

Measurement Result

FCC			
20dB BW (kHz)	Opration range	Frequency (MHz)	Limit (MHz)
2.733	Low	13.55865	>13.11
	High	13.56105	<14.01



Bandwidth

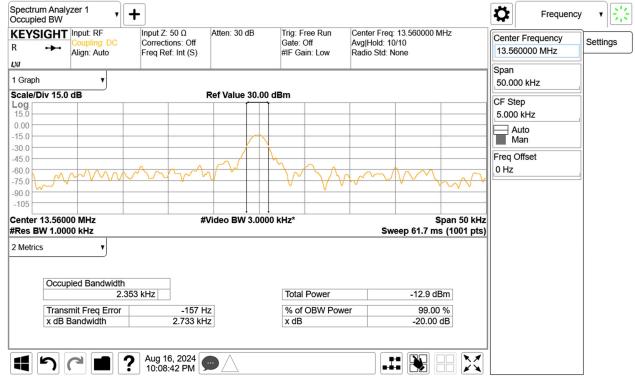

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw




Page: 37 of 38

Operation range Low

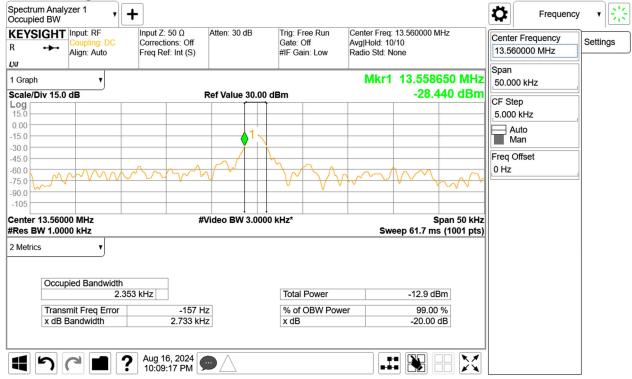

Operation range High

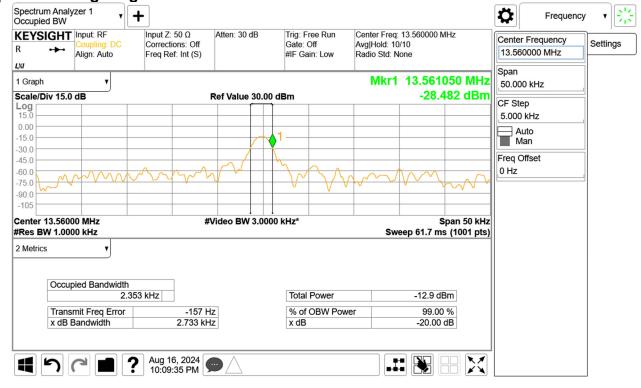

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

> SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 38 of 38

11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

11.2 Antenna Connected Construction:

The antenna complies with this requirement and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有铅明,此数些结果属聚则能之种具有多,同时此类具属聚则的主。大数型主流统大力事而实力,因而效论指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司