

Product Specification

Product Name: IoT Ceiling Edge Computing
Gateway Product Model: DSGW-230-15-US-ONITY

Revision History

Specification		Sect.	Update Description	By
Rev.	Date			
1.0	2024-11-09		New version release	WX

Approvals

Organization	Name	Title	Date



Contents

1. Product Description.....	4
1.1. Purpose and Description	4
1.2. Product Feature Summary	4
1.3. Hardware Block Diagram.....	4
2. Mechanical Requirement	5
2.1. Drawings and Dimension	5
2.2. Interface.....	5
3. Specification	6
3.1. Technical Specification	6
4. QA Requirement.....	8
5. Software	9

Model List

Model \ Feature	Wi-Fi 2.4G/5 G	Bluetooth 5.2	Zigbee 3.0	LTE Cat1	eSIM
DSGW-230-15-EU-ONITY	•	•		•	
DSGW-230-15-US-ONITY	•	•		•	

Region List

Type	Region	LTE
-EU	Europe	EG91-EX
-US	North America	EG91-NAXD

1. Product Description

1.1. Purpose and Description


The DSGW-230 is a multi-protocol IoT gateway with edge computing capabilities. This intelligent gateway can be powered via PoE (Power over Ethernet) or a USB Type-C connection. It provides reliable connectivity for a wide range of wireless IoT devices.

With its modular architecture, the DSGW-230 allows for extensive customization of its features, providing an off-the-shelf solution tailored to your needs. Connectivity options include LTE, Bluetooth, Wi-Fi, Ethernet.

1.2. Product Feature Summary


- Support IEEE802.11ac, IEEE802.11n, IEEE802.11g, IEEE 802.11b Protocol
- Support 4G LTE CAT1
- Support Bluetooth 5.2, Wi-Fi 2.4/5G
- One Gigabit WAN/LAN variable network port
- One USB 2.0

1.3. Hardware Block Diagram

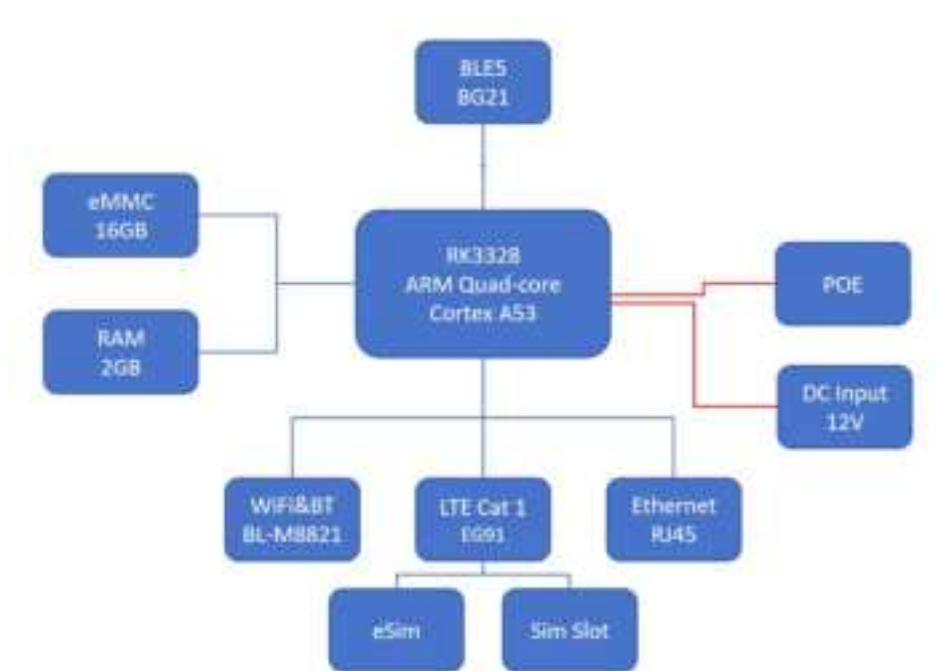

2. Mechanical Requirement

2.1. Drawings and Dimension

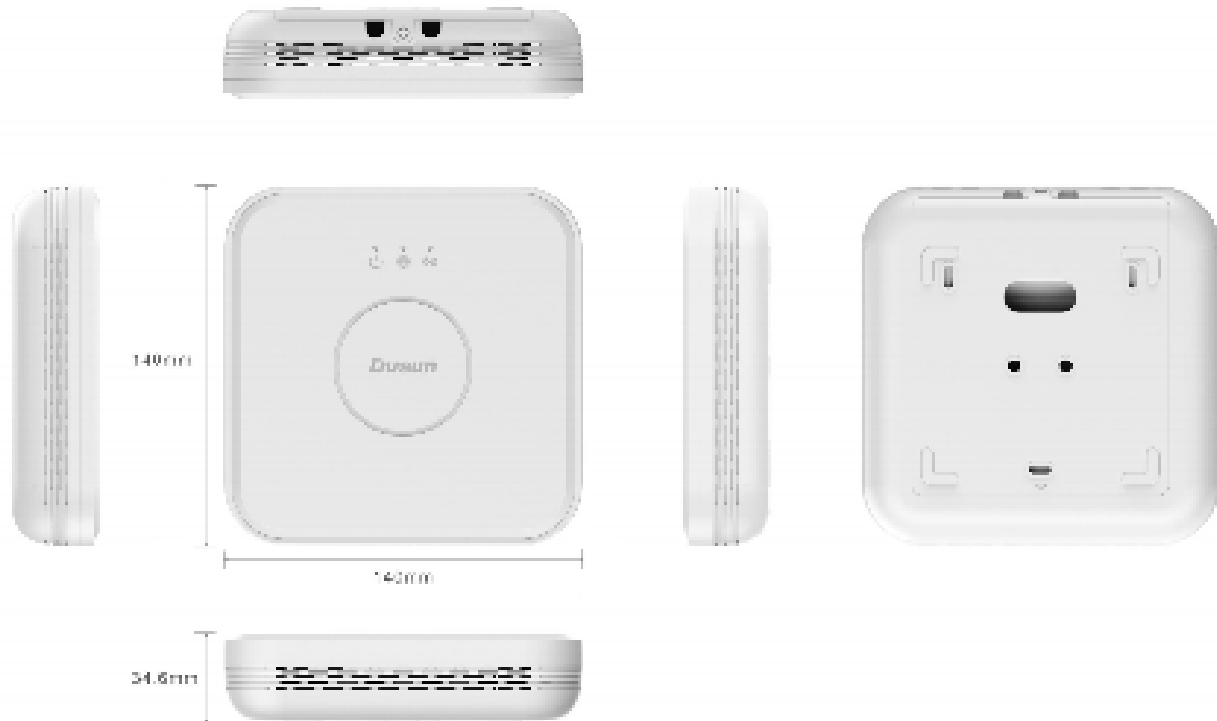

2.2. Interface



3. Specification

3.1. Technical Specification

Category	Specifications
CPU	RK3328 Quad-core Cortex A53
System	Debian 11
RAM	2GB
eMMC	16GB
SD card	Up to 128GB
Power Supply	DC 12V/1.5A
Reset	Factory reset button. To reset the Gateway to its original factory settings, press and hold it for more than 10 seconds
User-Defined button	Support
Switch	On/Off power
Network Interface	<ul style="list-style-type: none"> ● CAT-5/CAT-5e cables for data transmission and PoE Supply with a voltage range of 44 to 57V ● 1 * 1000M WAN/LAN variable port
USB	USB2.0 Type-C
SIM Card Slot	<ul style="list-style-type: none"> ● Dual Micro SIM card slots, link backup capability, Dual card with single standby mode ● Dimensions: 12mm x 15mm
eSIM	Support
TF Card Slot	1
Indicator LEDs (RGB)	1). Power LED 2). Wireless LED 3) LTE indicator
Antenna	Zigbee/BLE PCB, Z-Wave/Wi-Fi FPC Antenna
Installation method	Flat, Ceiling
RTC	Real-Time Clock operated from an onboard battery
Operating Temperature	-10°C~55°C
Storage Temperature	-40°C~65°C
Operating Humidity	10%~90%
IP Rating	IP22

Performance Requirement	
Wi-Fi Performance	<p>IEEE Wireless LAN standard: IEEE802.11ac, IEEE802.11n, IEEE802.11g, IEEE802.11b</p> <ul style="list-style-type: none"> Data Rate: IEEE 802.11b Standard Mode:1,2,5.5,11Mbps IEEE 802.11g Standard Mode:6,9,12,18,24,36,48,54 Mbps IEEE 802.11n: MCS0~MCS7 @ HT20/ 2.4GHz band MCS0~MCS7 @ HT40/ 2.4GHz band MCS0~MCS9 @ HT40/ 5GHz band IEEE 802.11ac: MCS0~MCS9 @ VHT80/ 5GHz band Sensitivity: VHT80 MCS9: -60dBm@10% PER(MCS9) /5GHz band HT40 MCS9: -63dBm@10% PER(MCS9) /5GHz band HT40 MCS7: -70dBm@10% PER(MCS7) /2.4GHz band HT20 MCS7: -71dBm@10% PER(MCS7) /2.4GHz band Transmit Power: IEEE 802.11ac: 13dBm @HT80 MCS9 /5GHz band IEEE 802.11ac: 16dBm @HT80 MCS0 /5GHz band IEEE 802.11n: 14dBm @HT20/40 MCS7 /5GHz band IEEE 802.11n: 16dBm @HT20/40 MCS0 /5GHz band IEEE 802.11n: 16dBm @HT20/40 MCS7 /2.4GHz band IEEE 802.11g: 16dBm @54MHz IEEE 802.11b: 18dBm @11MHz Wireless Security: WPA/WPA2, WEP, TKIP, and AES Working mode: Bridge, AP Client Range: 50 meters maximum, open field Transmit Power:17dBm Highest Transmission Rate: 300Mbps Frequency offset: +/- 50KHZ Frequency Range (MHz): 2412.0~2483.5 Low Frequency (MHz):2400 High Frequency (MHz):2483.5 E.i.r.p (Equivalent Isotopically Radiated power) (mW)<100mW

	<ul style="list-style-type: none"> • Bandwidth (MHz):20MHz/40MHz • Modulation: BPSK/QPSK, FHSSCCK/DSSS, 64QAM/OFDM
Bluetooth 5.2 Performance	<ul style="list-style-type: none"> • TX Power: 19.5dBm • Range: 100 meters maximum, open filed • Receiving Sensibility: -92dBm@0.1%BER, 1Mbps • Frequency offset: +/-20KHZ • Frequency Range (MHz):2401.0~2483.5 • Low Frequency (MHz):2400 • High Frequency (MHz):2483.5 • E.i.r.p (Equivalent Isotopically Radiated power) (mW)<10mW • Bandwidth (MHz):2MHz • Modulation: GFSK
LTE CAT1	<p>-US : EG91-NAXD</p> <ul style="list-style-type: none"> • LTE FDD: B2/B4/B5/B12/B13/B25/B26 • WCDMA: B2/B4/B5 • LTE FDD Data rate:10(DL)/5(DL) <p>-EU : EG91-EX</p> <ul style="list-style-type: none"> • LTE FDD: B1/B3/B7/B8/B20/B28 • WCDMA: B1/B8 • LTE FDD Data rate:10(DL)/5(DL)
WAN/LAN	1000 Mbps

4. QA Requirement

Information Description	Standard(Yes) Custom(No)
ESD Testing	Yes
RF Antenna Analysis	Yes
Environmental Testing	Yes
Reliability Testing	Yes
Certification	FCC, CE, RoHS, BQB

5. Software

	System/Driver	Support
System	Ubuntu	•
	Debian11	•
Driver	Uboot	•
	UART	•
	SPI	•
	I2C	•
	USB	•
	eMMC	•
	PCIe	•
	Ethernet	•
	SDIO	•
	SPI	•
	I2C	•
	USB	•
	BLE5.2	•
	Wi-Fi 2.4/5G	•
Application	Wi-Fi Sniffer	Demo source code
	Beacon Scanner	Demo source code
	MQTT Client	Demo source code

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the handset, including the antenna.

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the handset, including the antenna.