




Band Edge 802.11ax(HE40) 2427MHz Ref

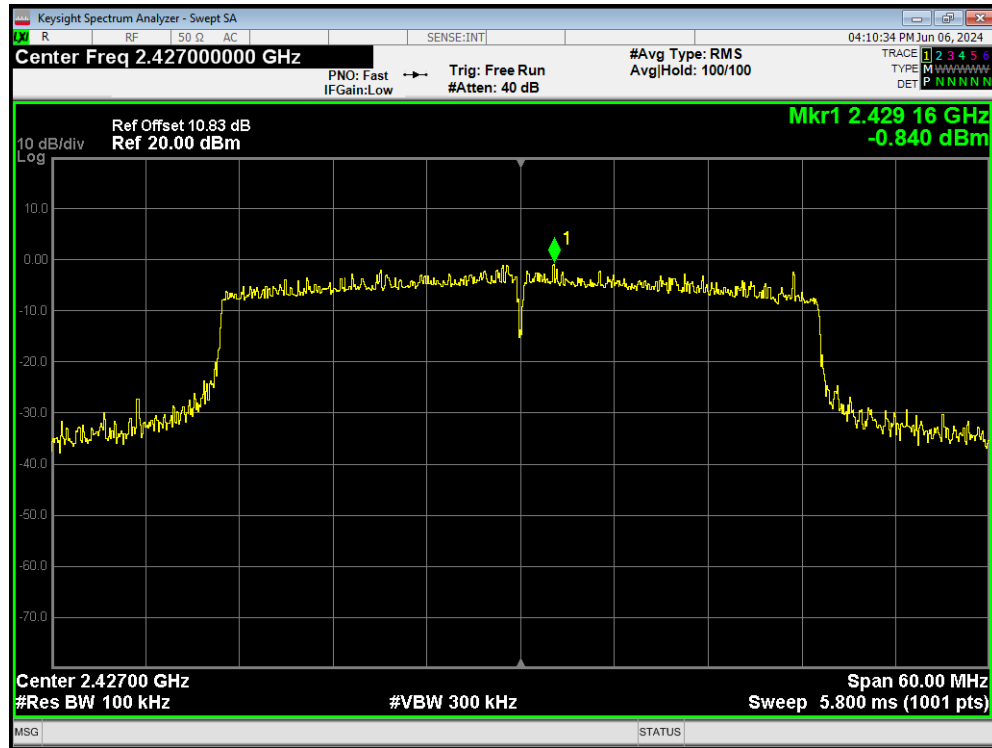


Band Edge 802.11ax(HE40) 2427MHz Emission

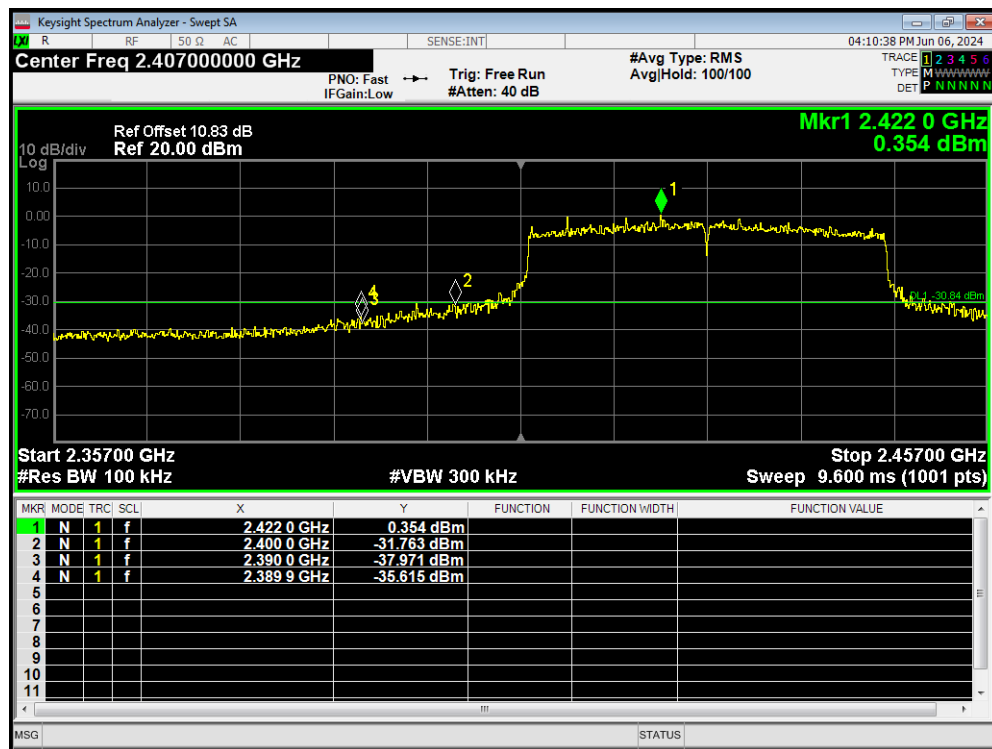


Band Edge 802.11ax(HE40) 2442MHz Ref

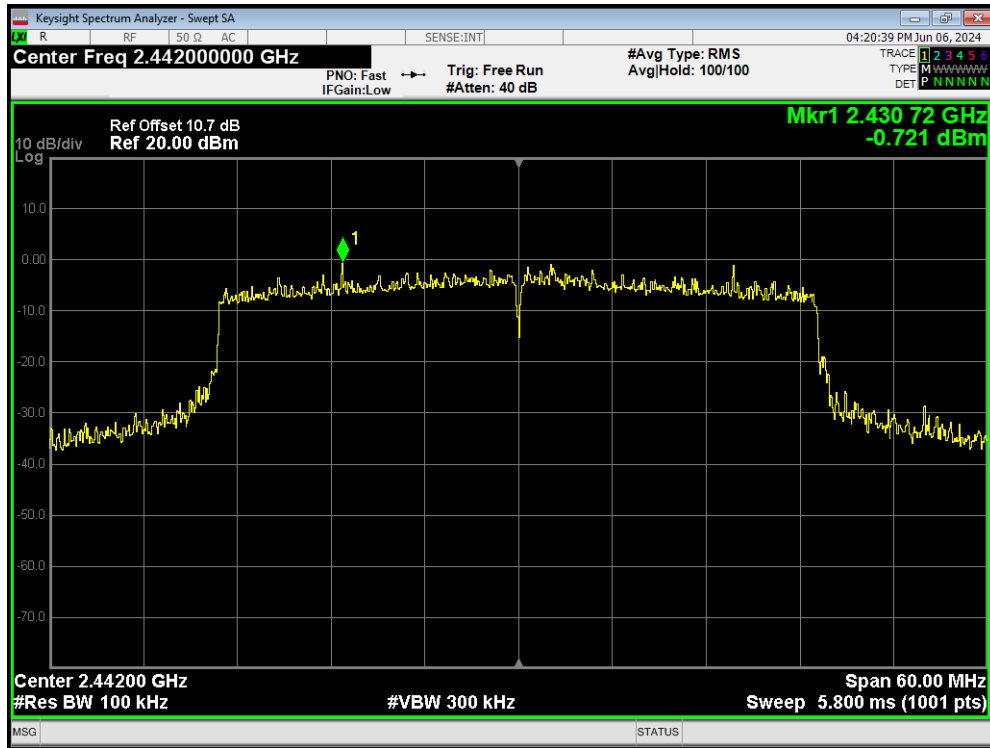


Band Edge 802.11ax(HE40) 2442MHz Emission

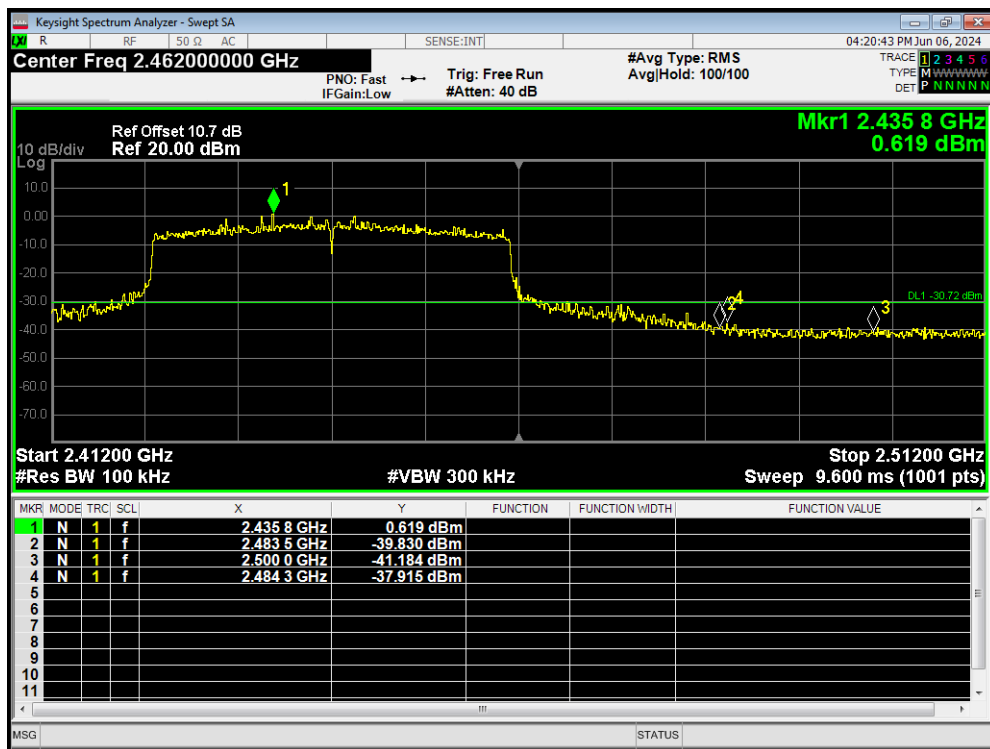


Band Edge 802.11ax(HE40) 2447MHz Ref

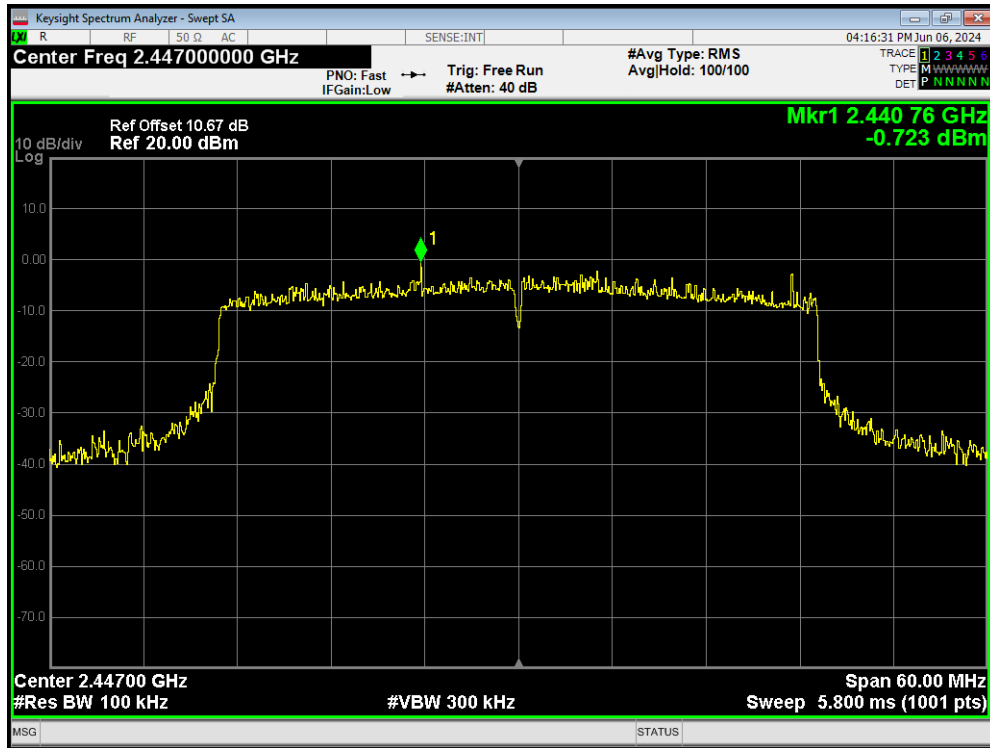


Band Edge 802.11ax(HE40) 2447MHz Emission

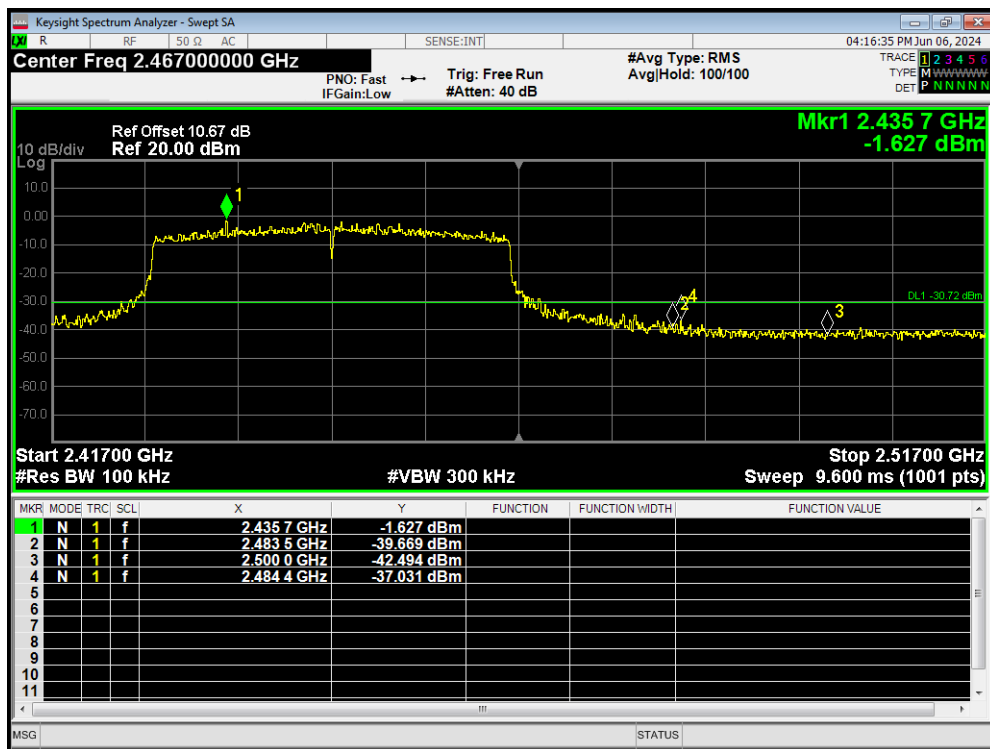


Band Edge 802.11ax(HE40) 2452MHz Ref

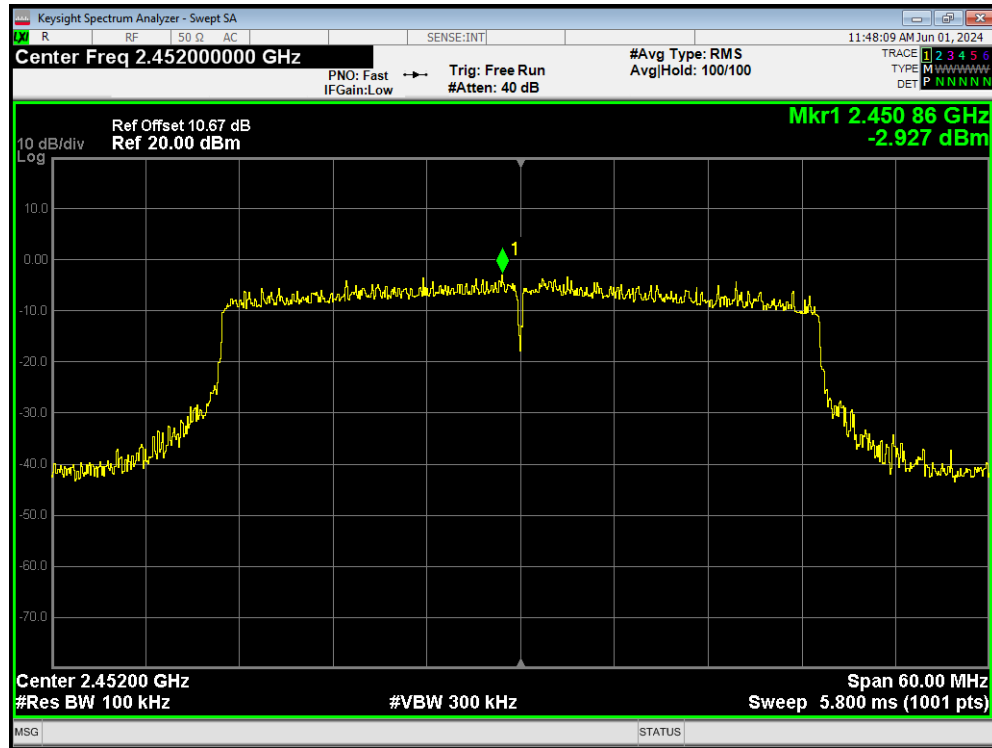


Band Edge 802.11ax(HE40) 2452MHz Emission

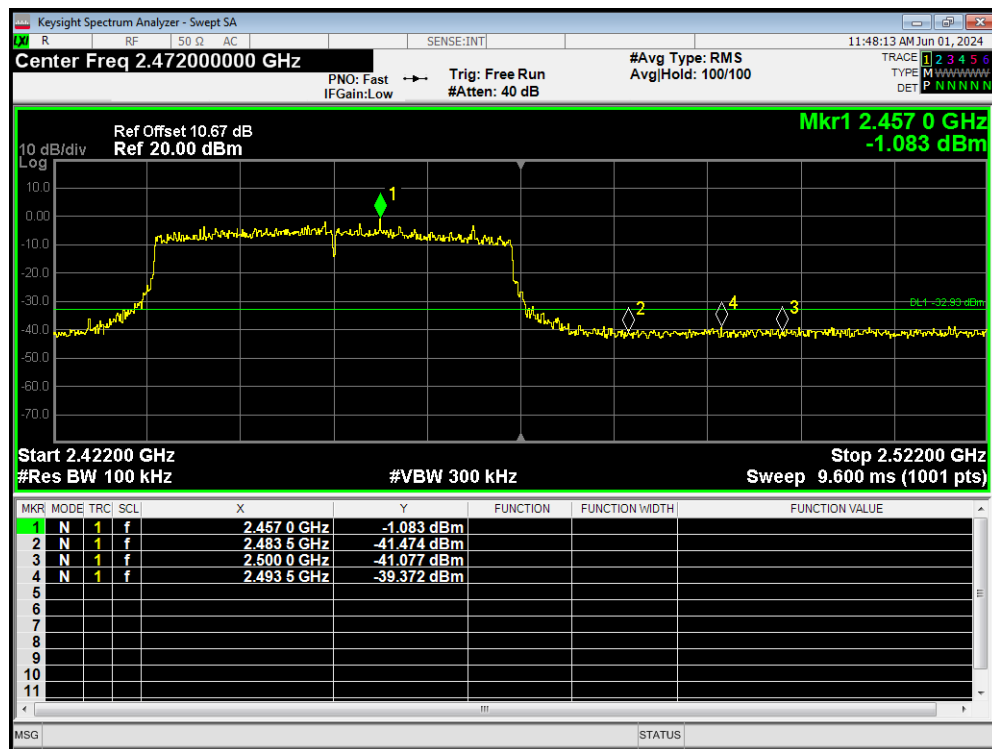


Band Edge 802.11b 2412MHz Ref

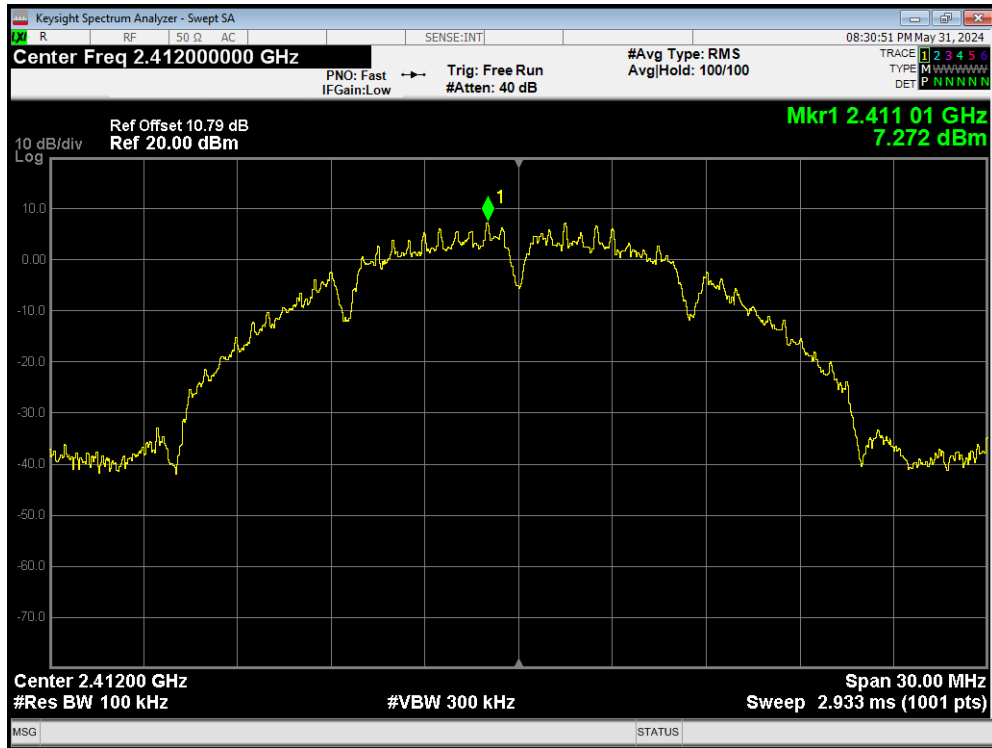


Band Edge 802.11b 2412MHz Emission

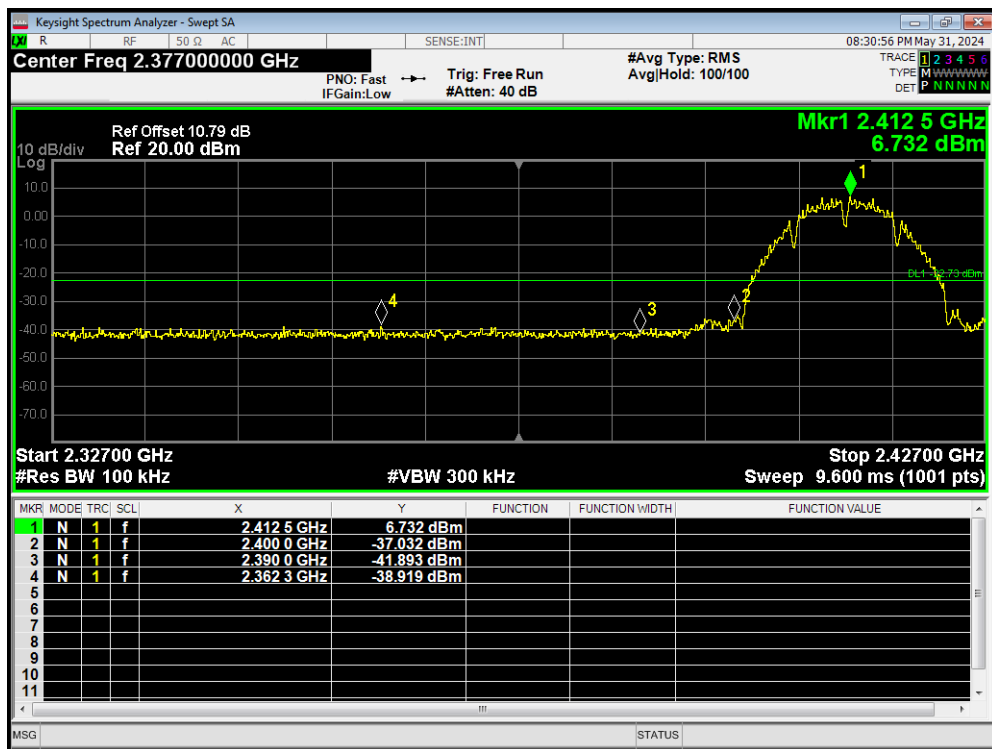


Band Edge 802.11b 2462MHz Ref

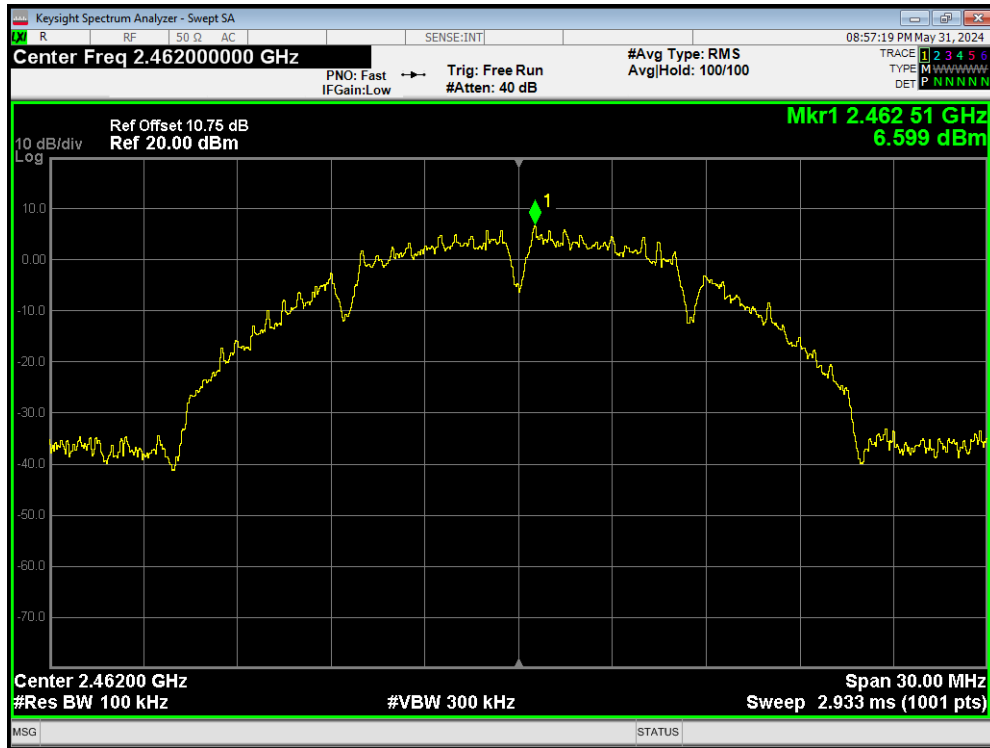


Band Edge 802.11b 2462MHz Emission

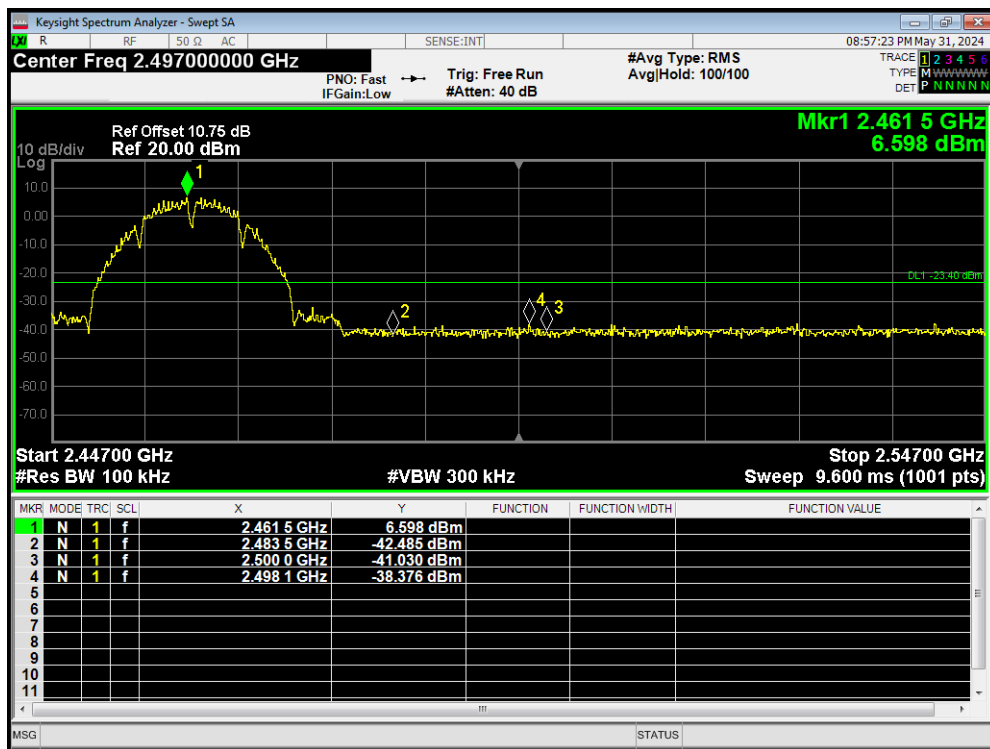


Band Edge 802.11g 2412MHz Ref

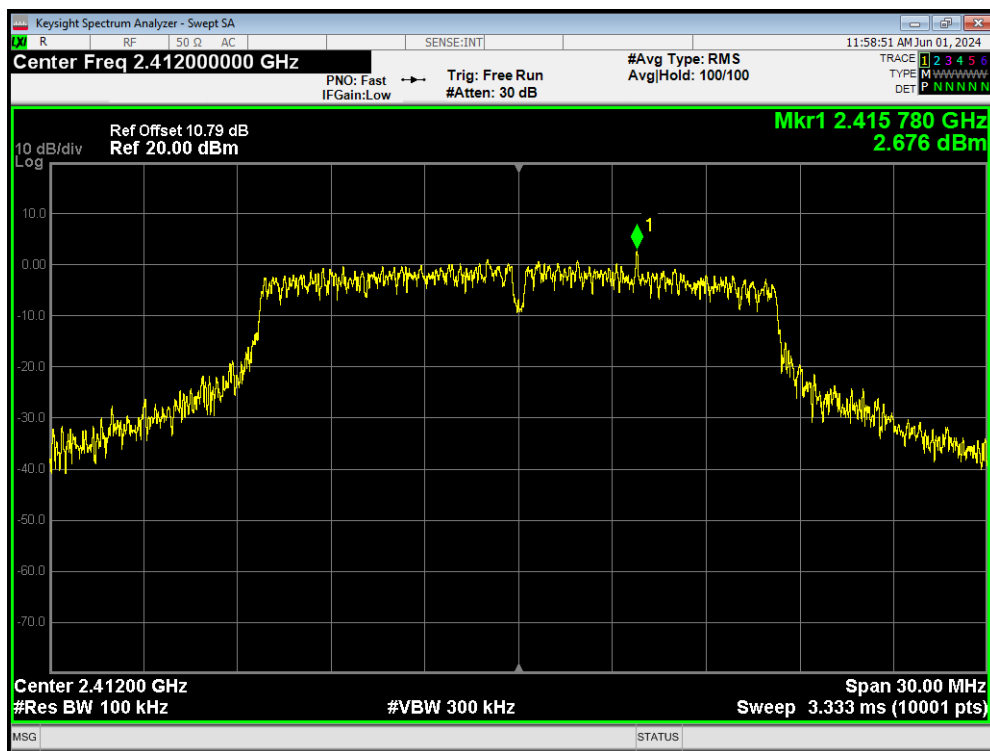


Band Edge 802.11g 2412MHz Emission

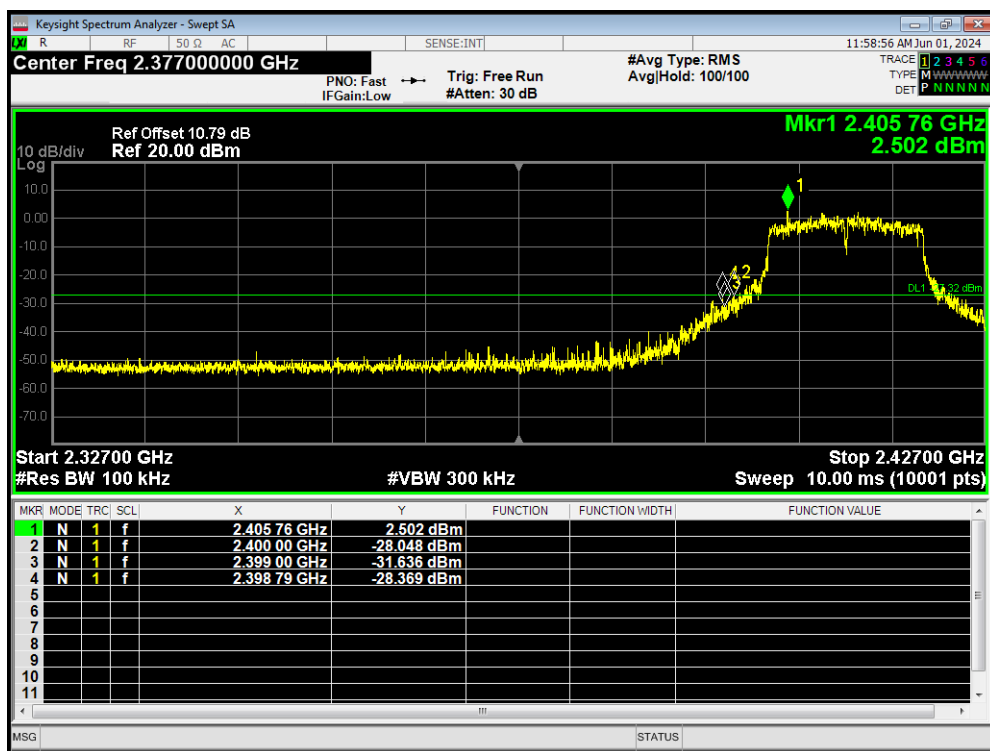


Band Edge 802.11g 2417MHz Ref

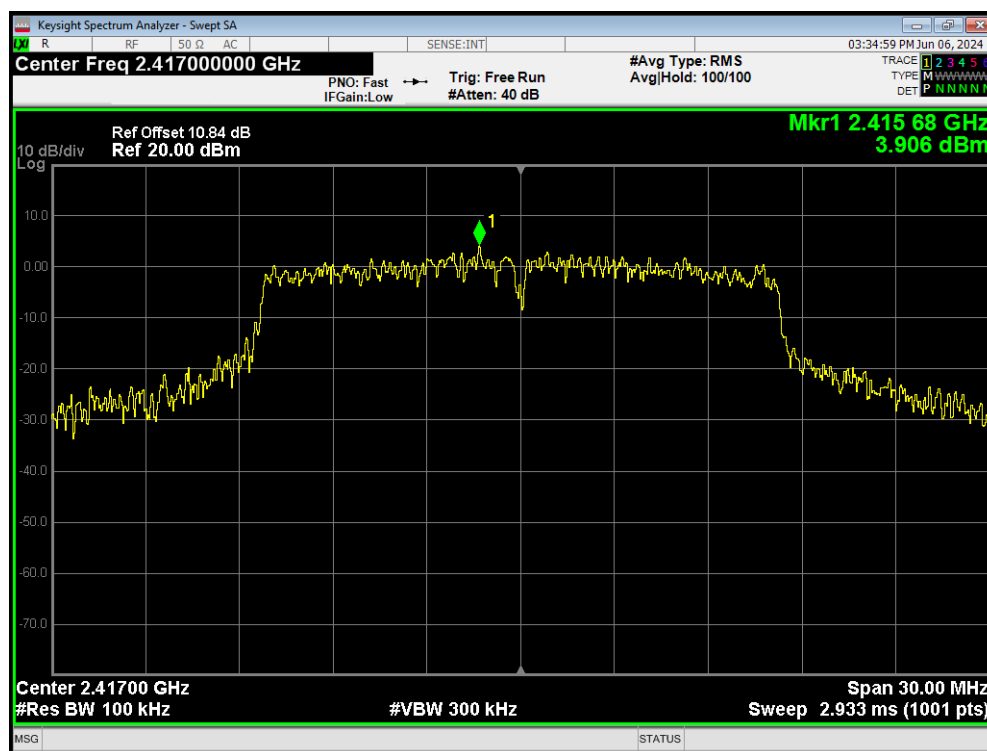


Band Edge 802.11g 2417MHz Emission

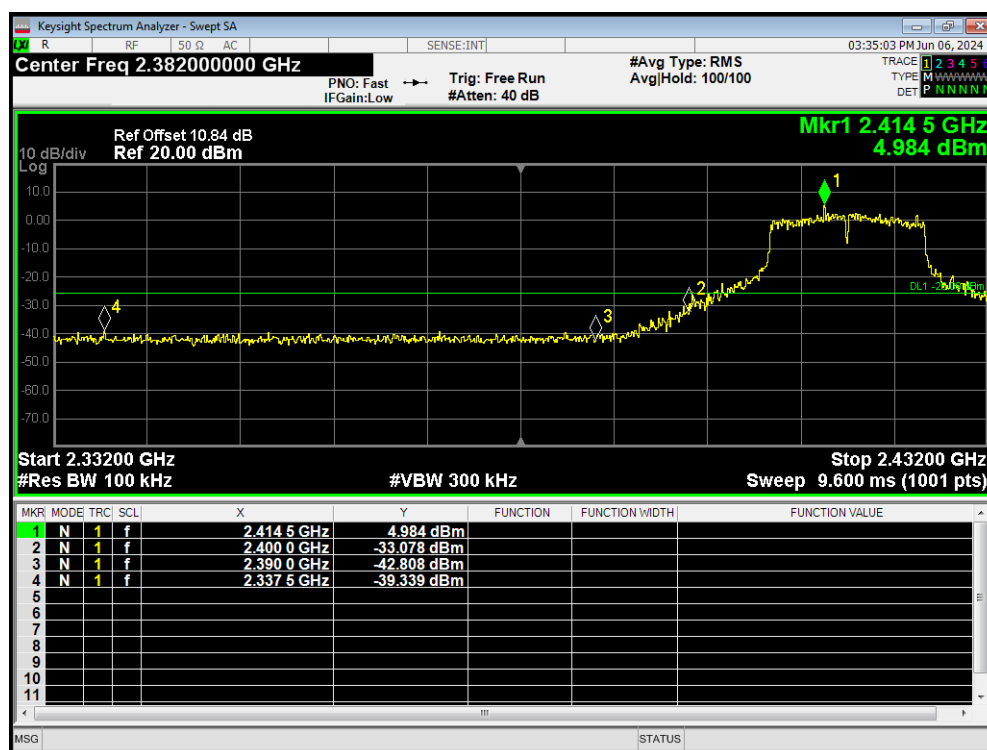


Band Edge 802.11g 2422MHz Ref

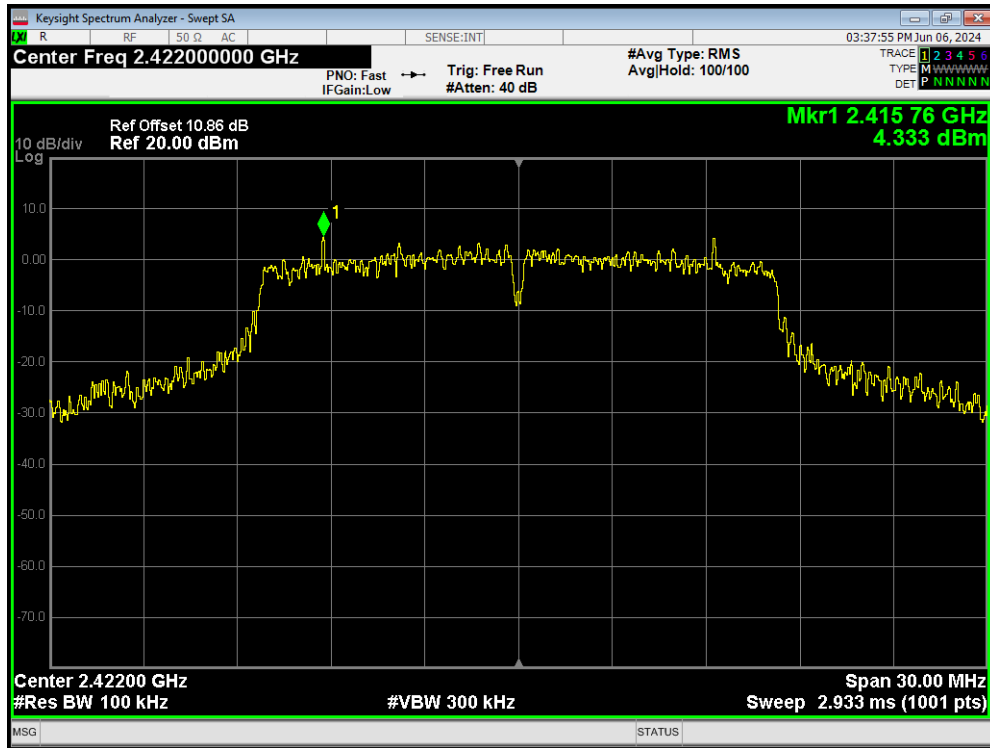


Band Edge 802.11g 2422MHz Emission

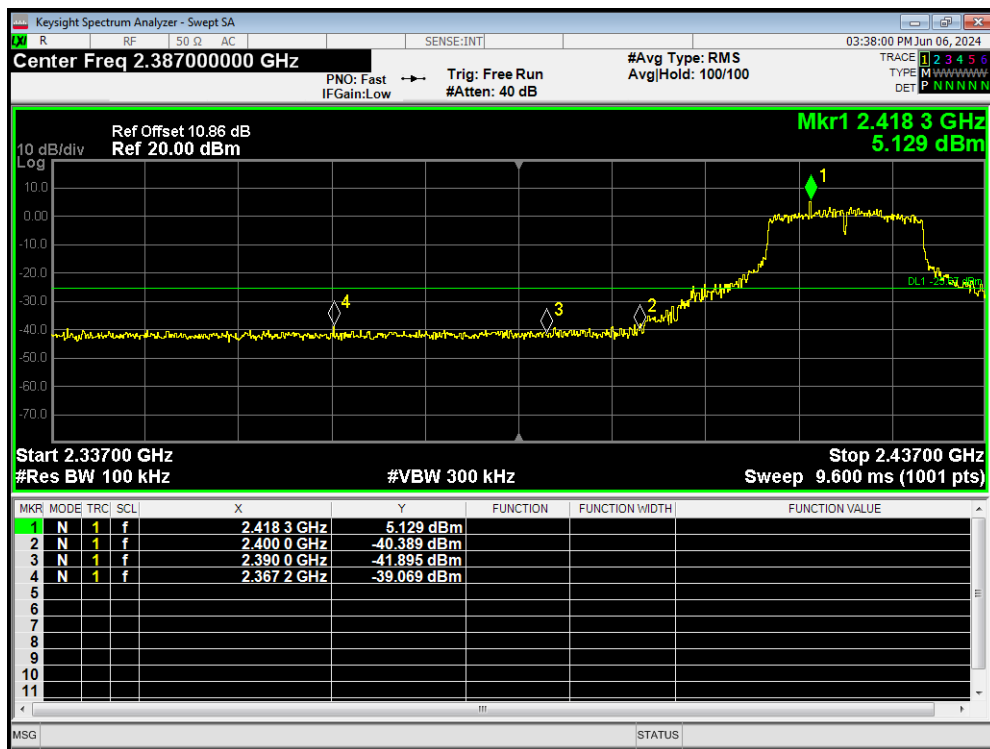


Band Edge 802.11g 2452MHz Ref

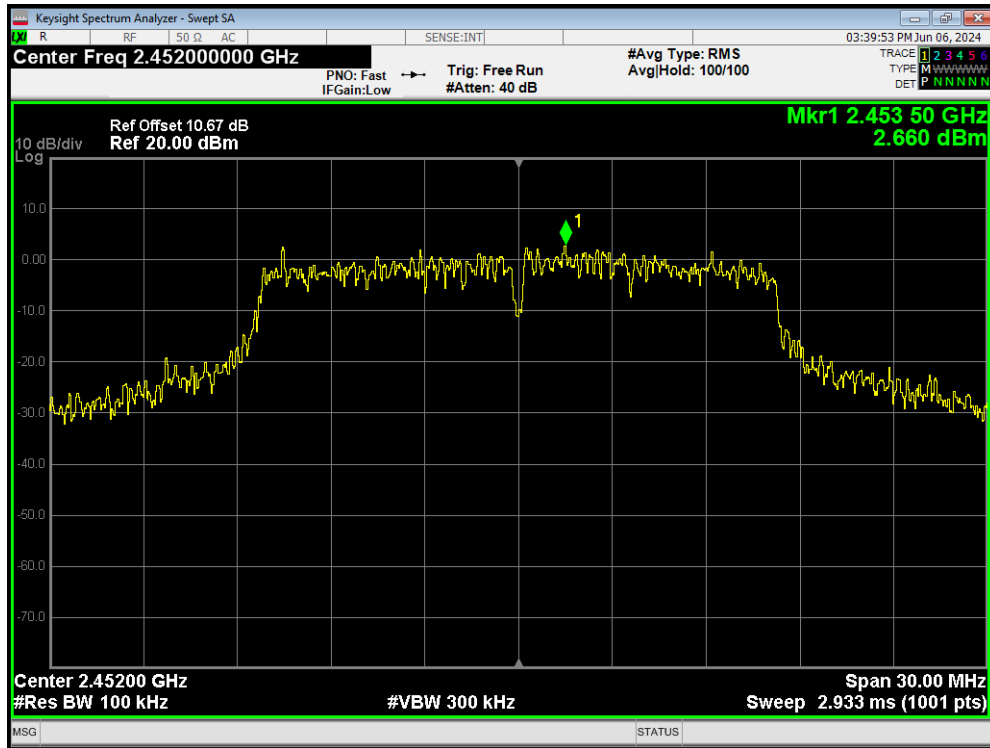


Band Edge 802.11g 2452MHz Emission

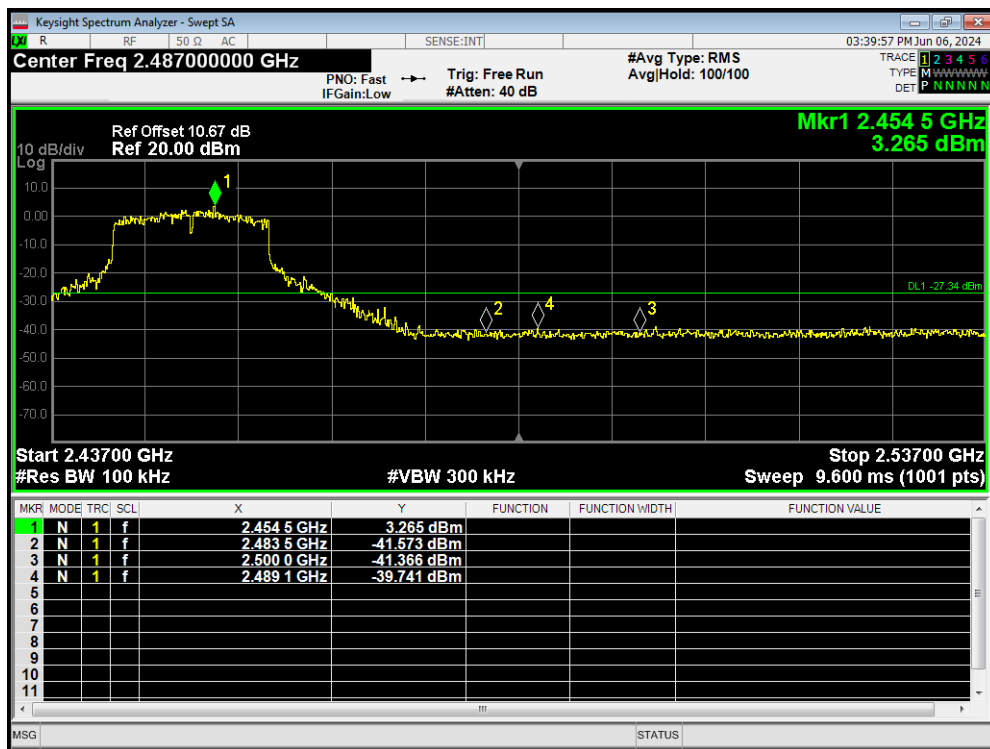


Band Edge 802.11g 2457MHz Ref

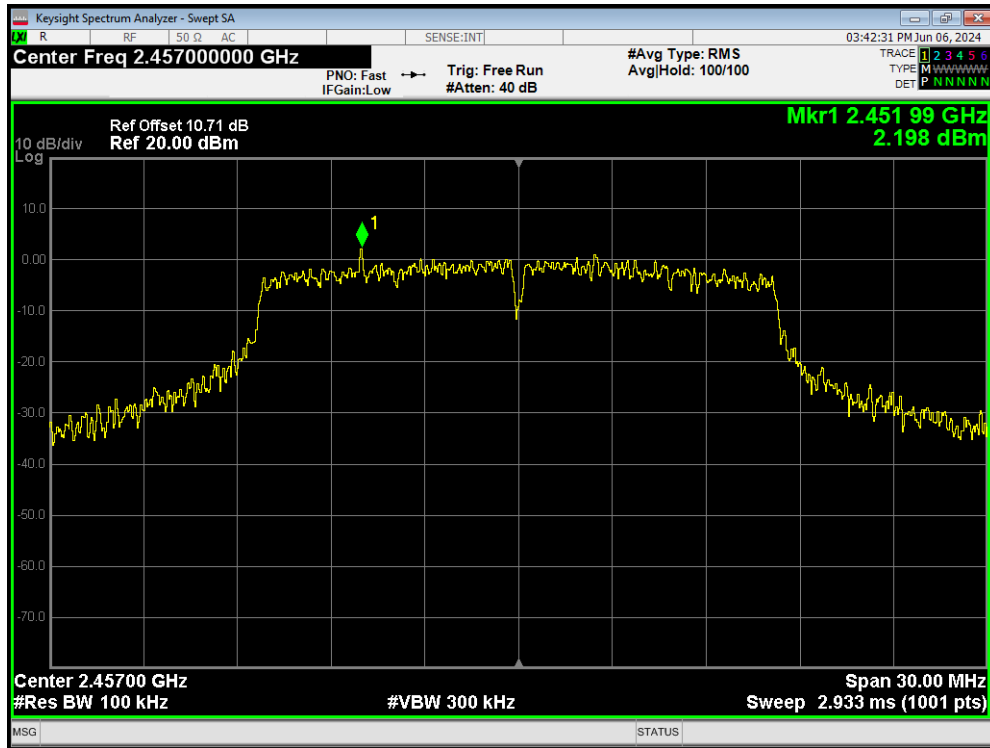


Band Edge 802.11g 2457MHz Emission

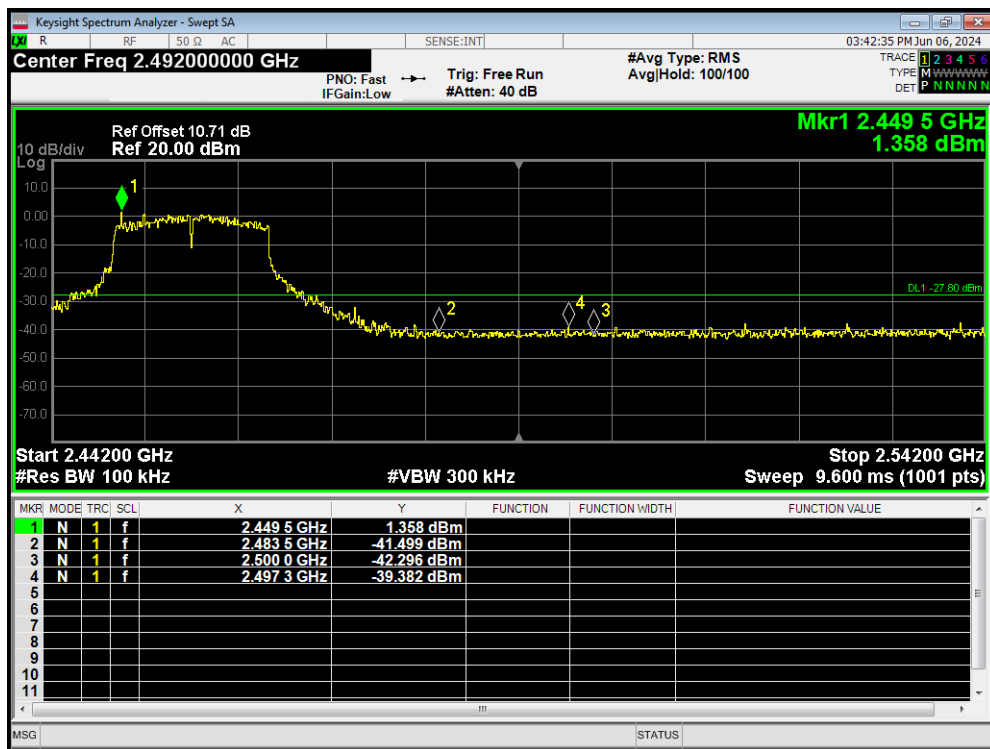


Band Edge 802.11g 2462MHz Ref

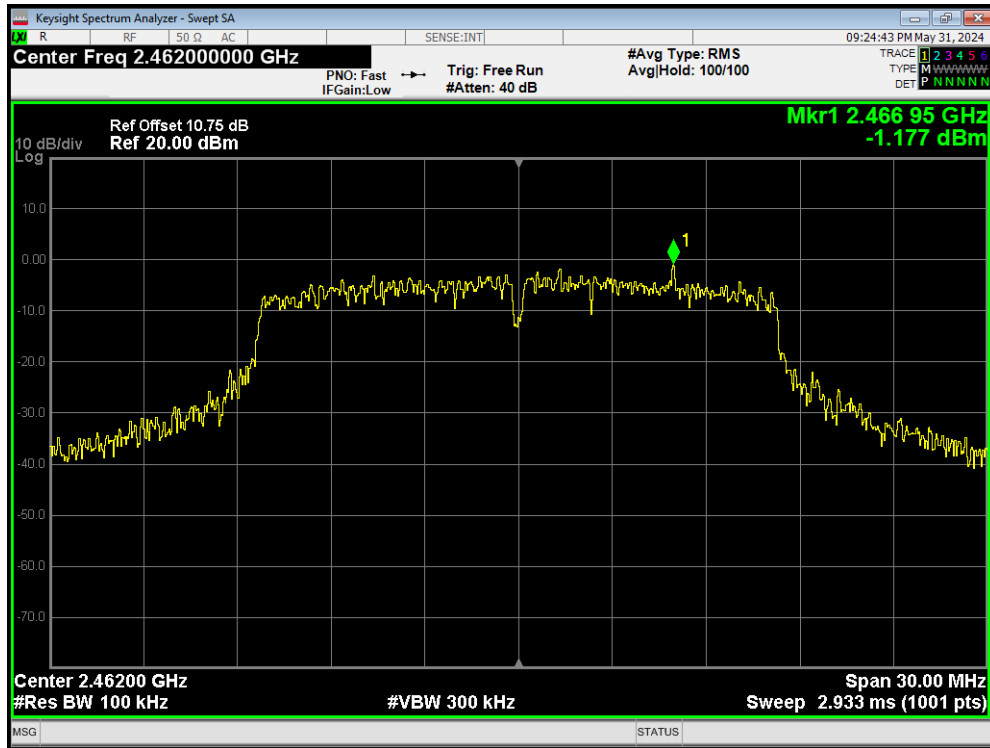


Band Edge 802.11g 2462MHz Emission

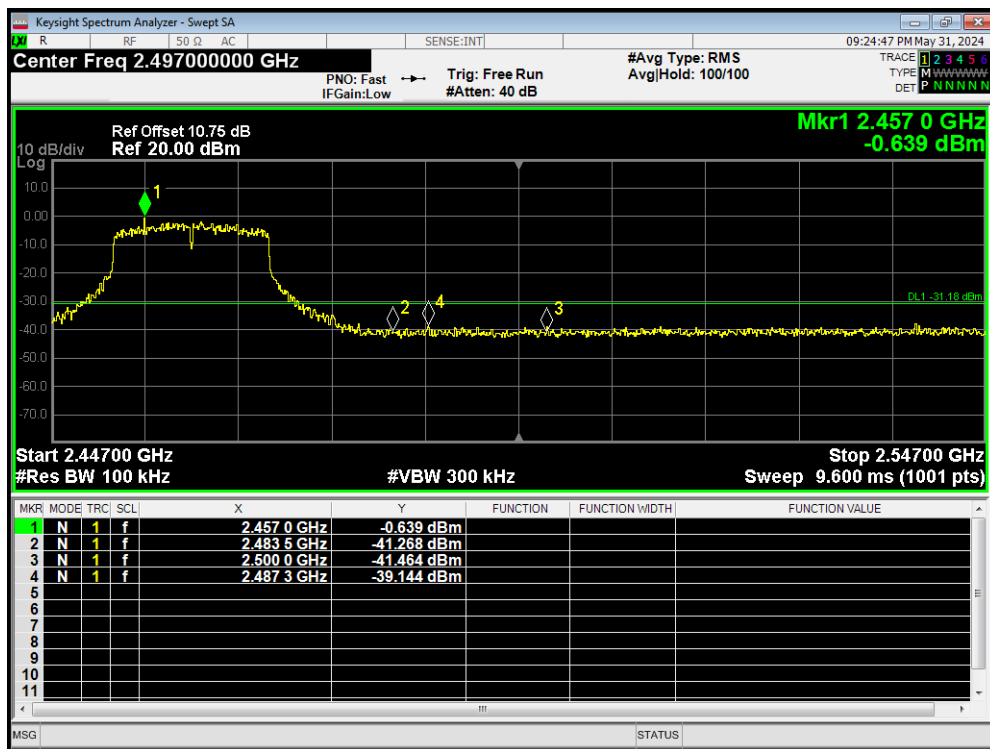


Band Edge 802.11n(HT20) 2412MHz Ref

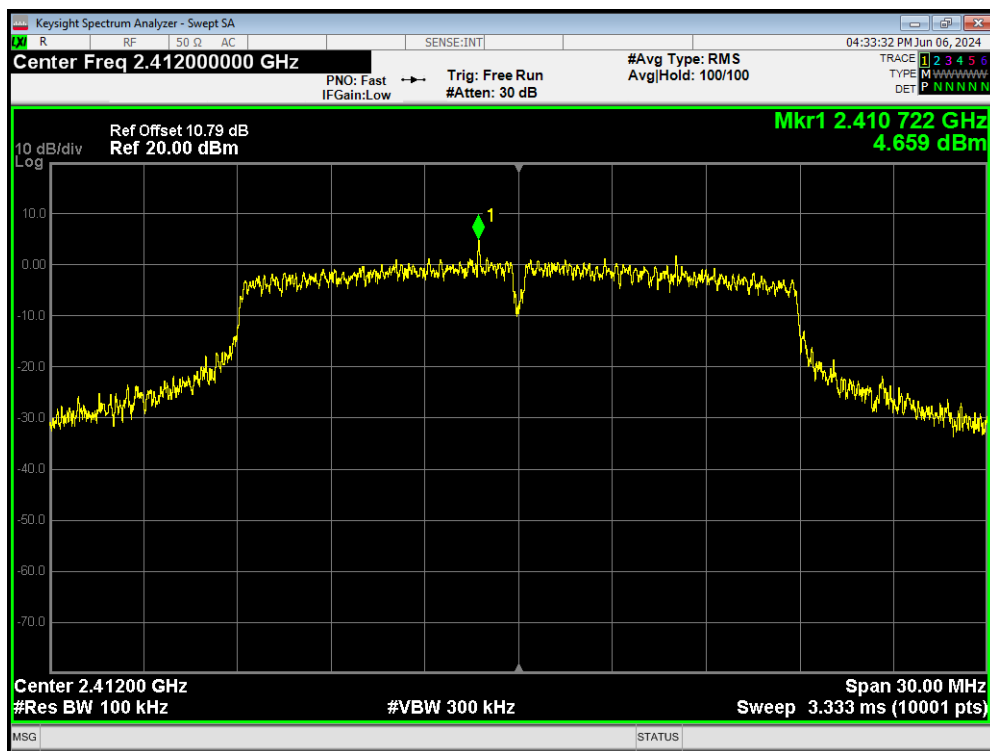


Band Edge 802.11n(HT20) 2412MHz Emission

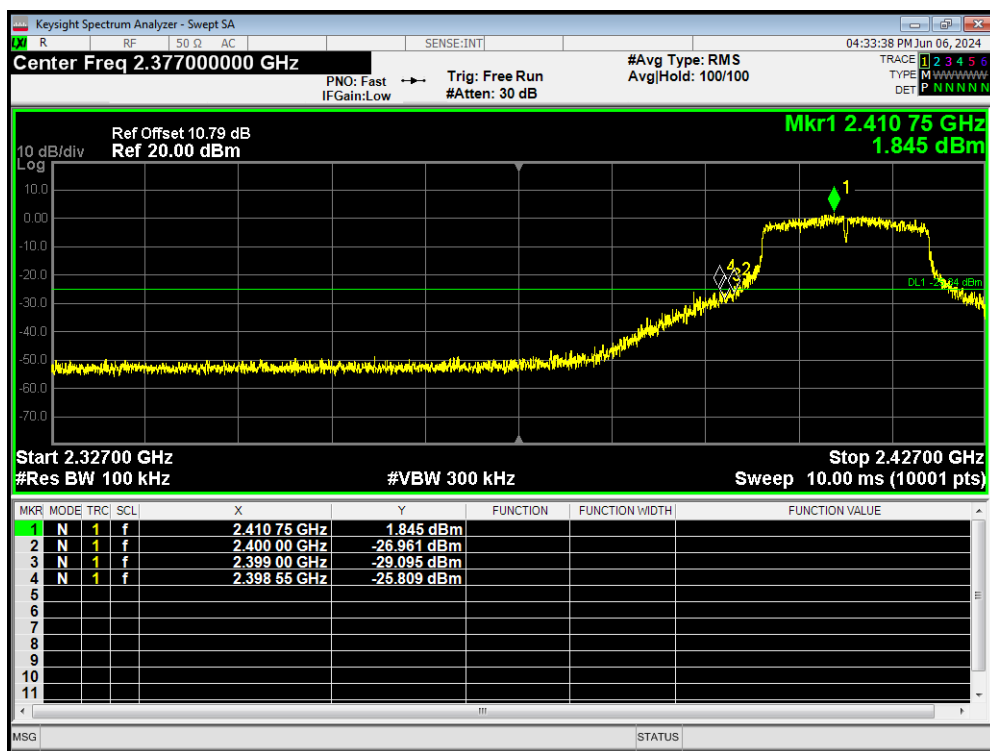


Band Edge 802.11n(HT20) 2417MHz Ref

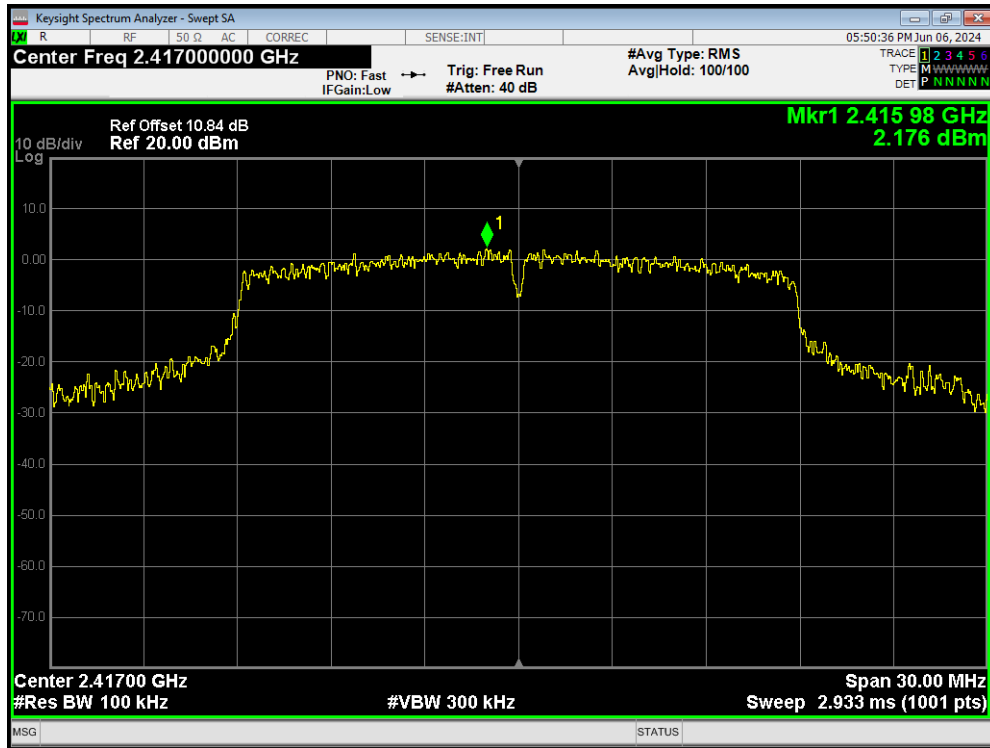


Band Edge 802.11n(HT20) 2417MHz Emission

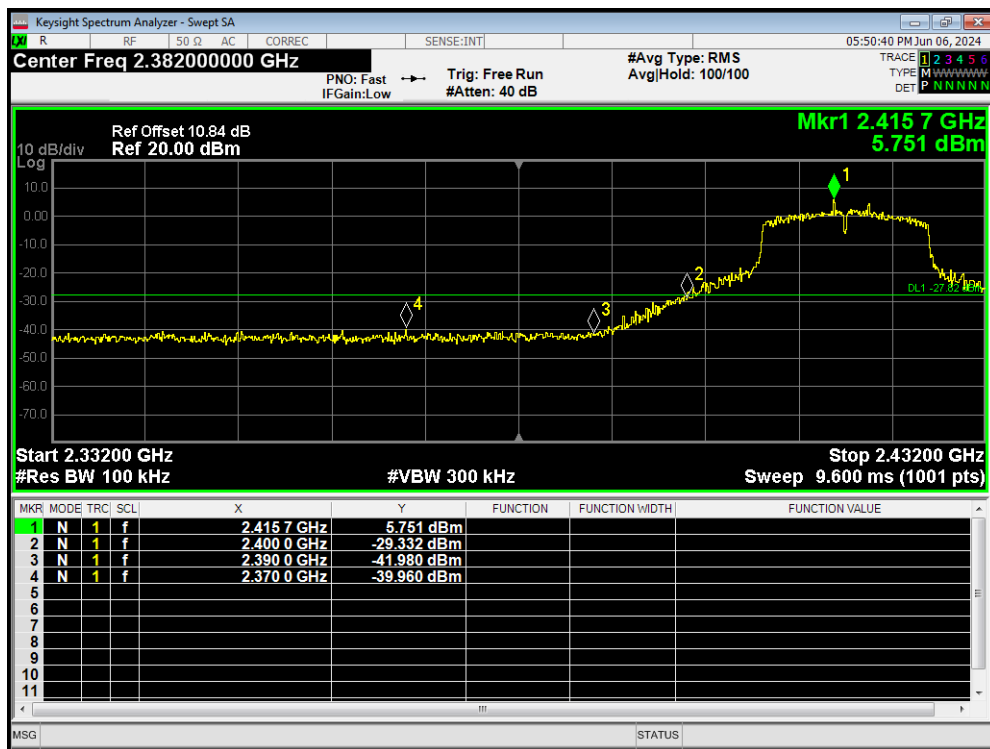


Band Edge 802.11n(HT20) 2452MHz Ref

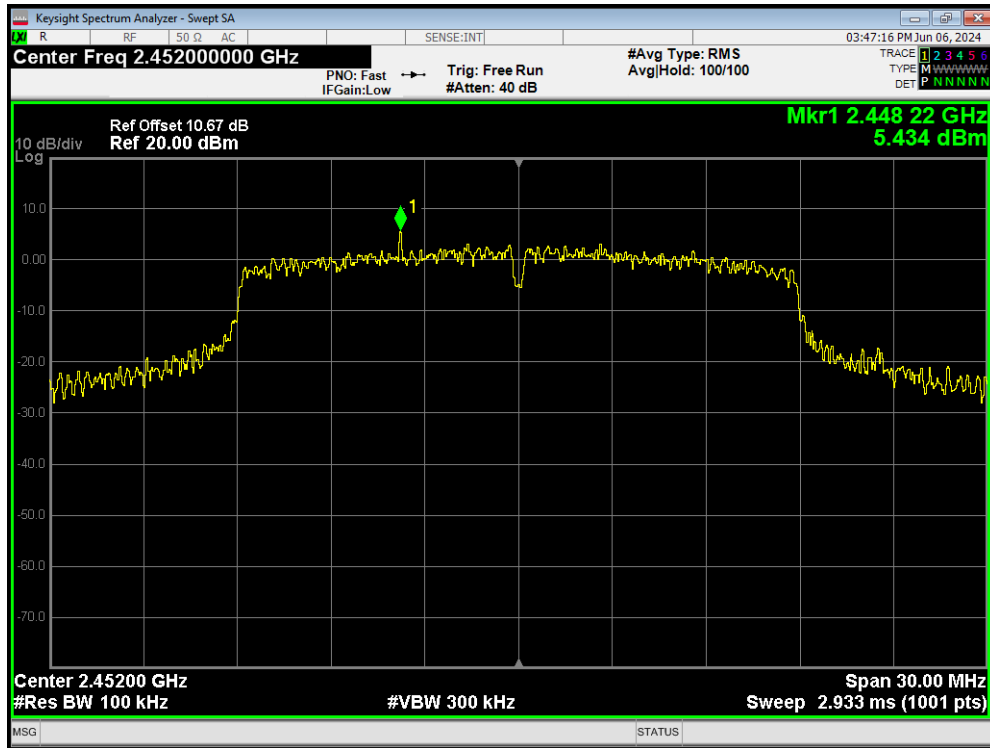


Band Edge 802.11n(HT20) 2452MHz Emission

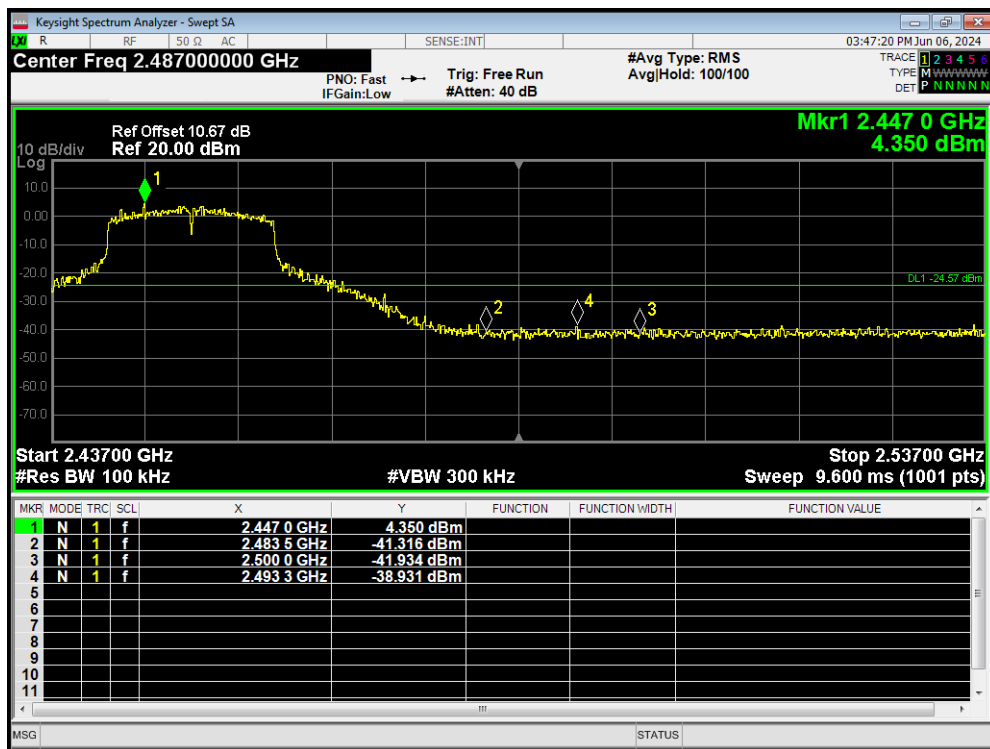


Band Edge 802.11n(HT20) 2457MHz Ref

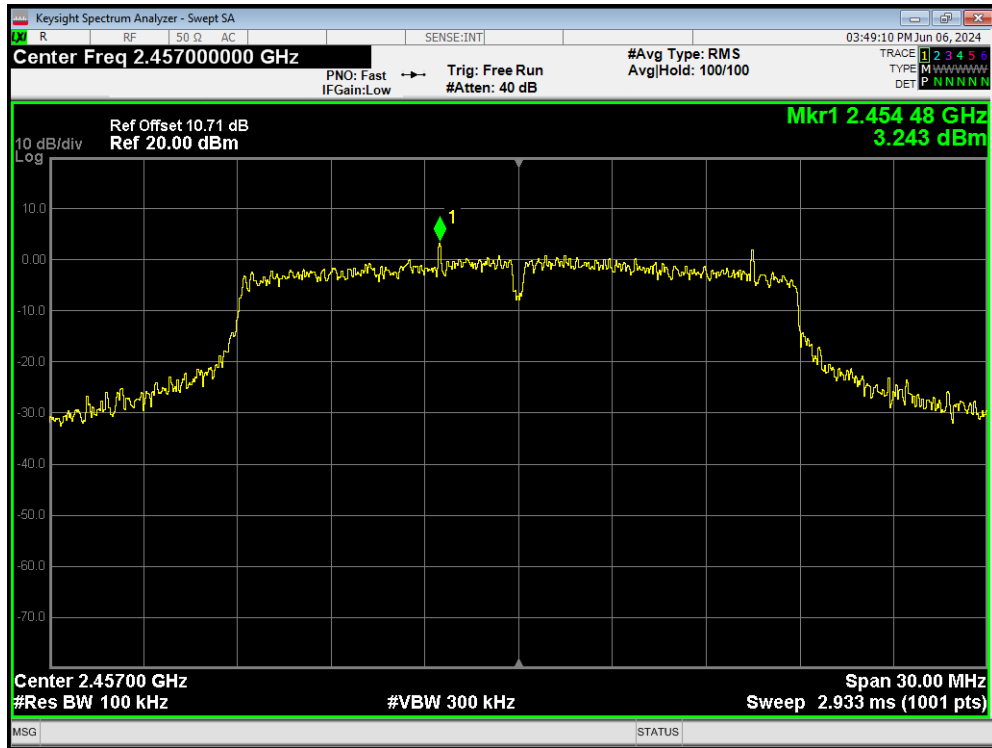


Band Edge 802.11n(HT20) 2457MHz Emission

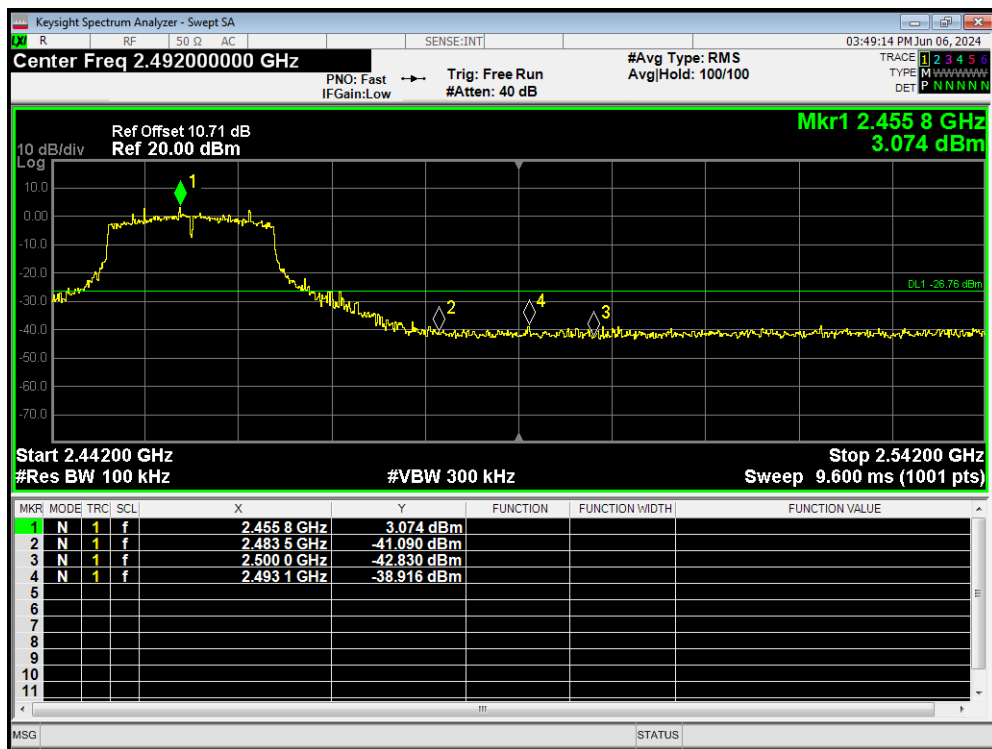


Band Edge 802.11n(HT20) 2462MHz Ref

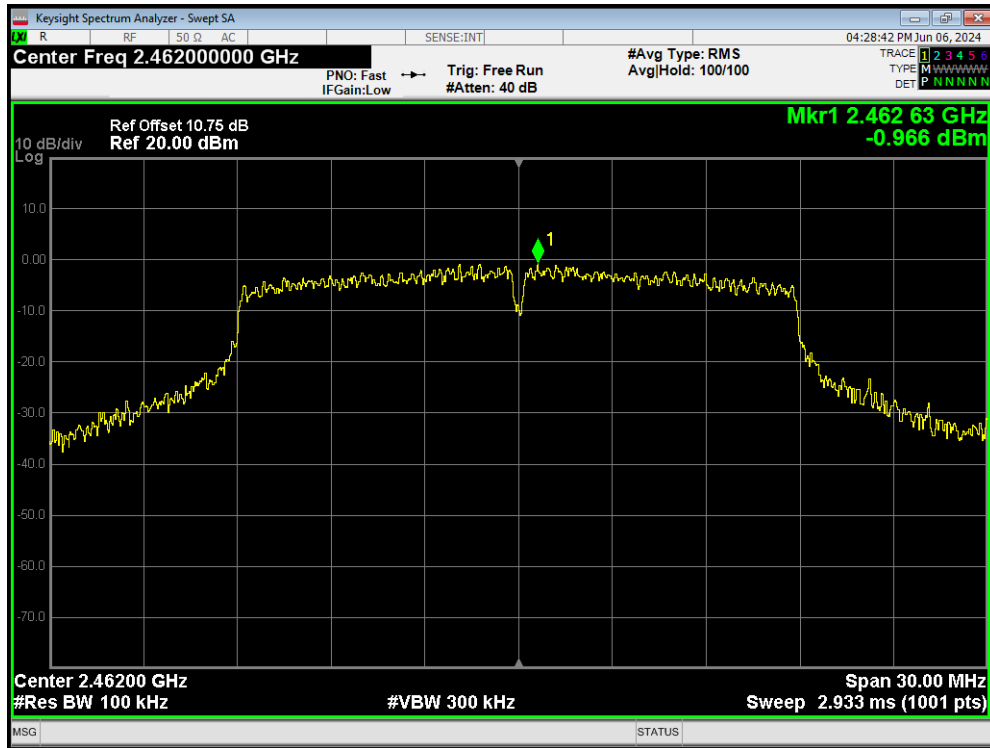


Band Edge 802.11n(HT20) 2462MHz Emission

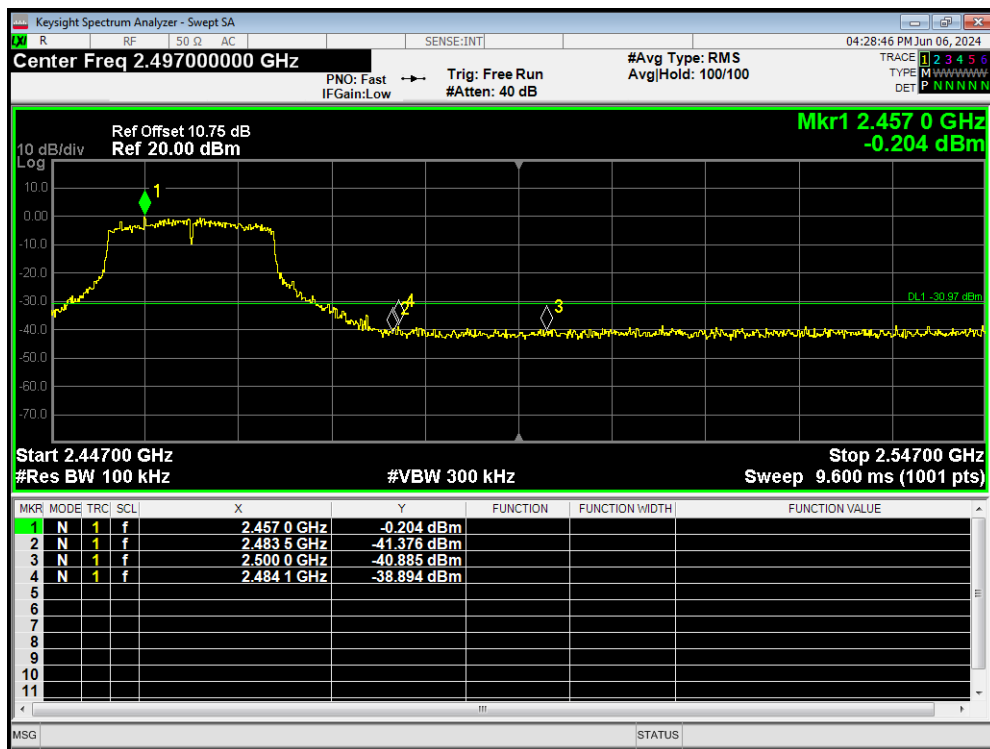


Band Edge 802.11n(HT40) 2422MHz Ref

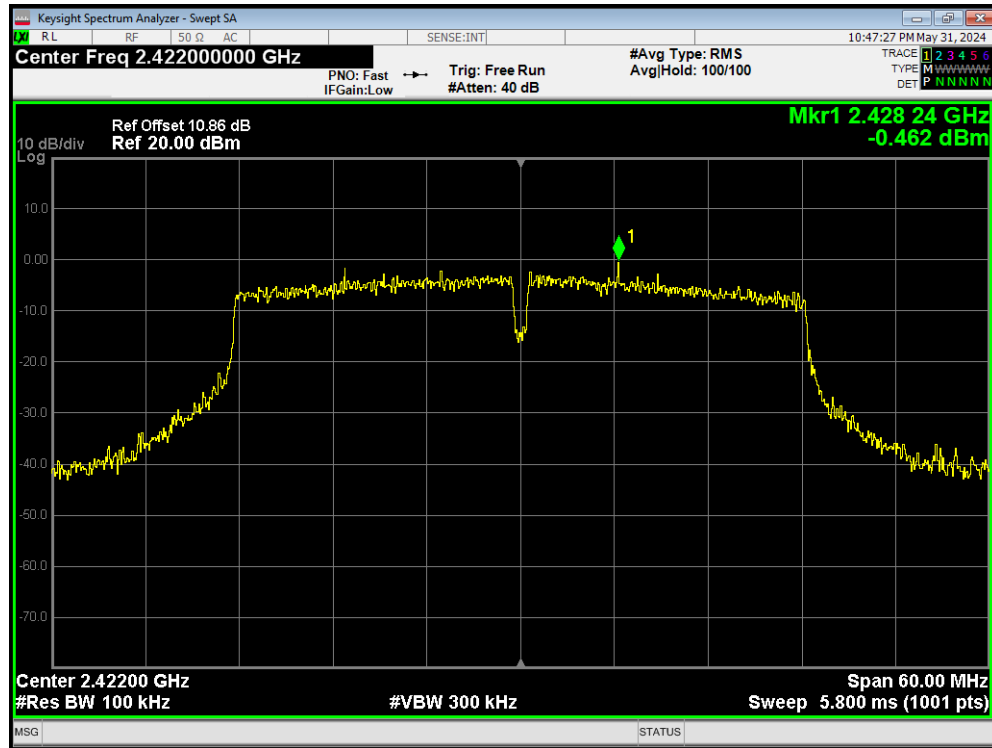


Band Edge 802.11n(HT40) 2422MHz Emission

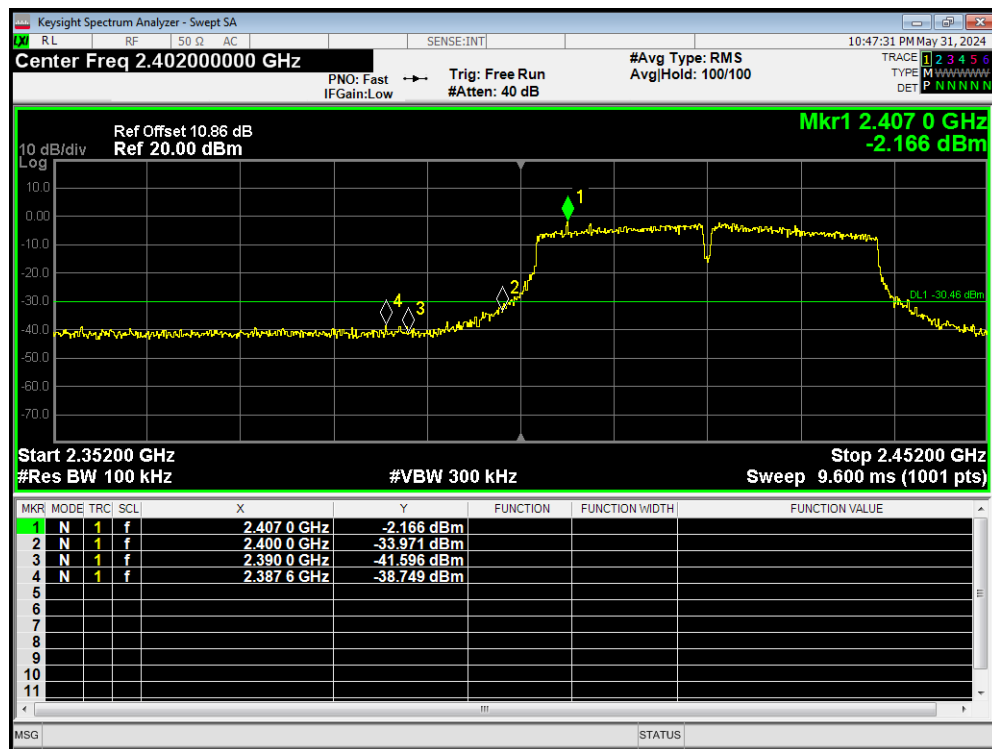


Band Edge 802.11n(HT40) 2427MHz Ref

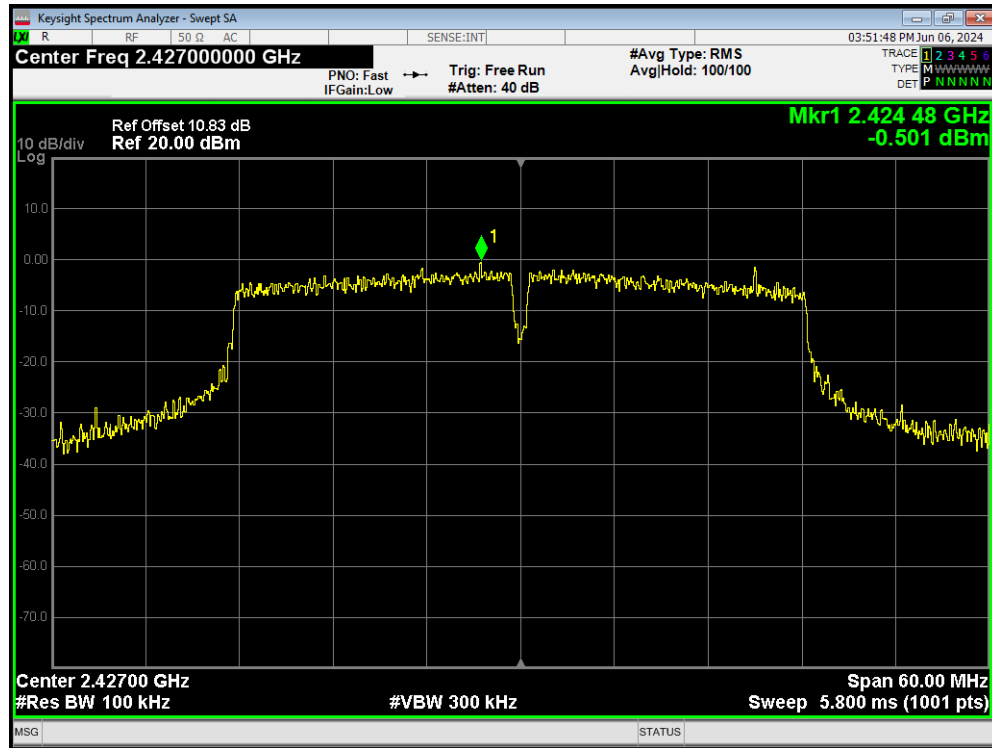


Band Edge 802.11n(HT40) 2427MHz Emission

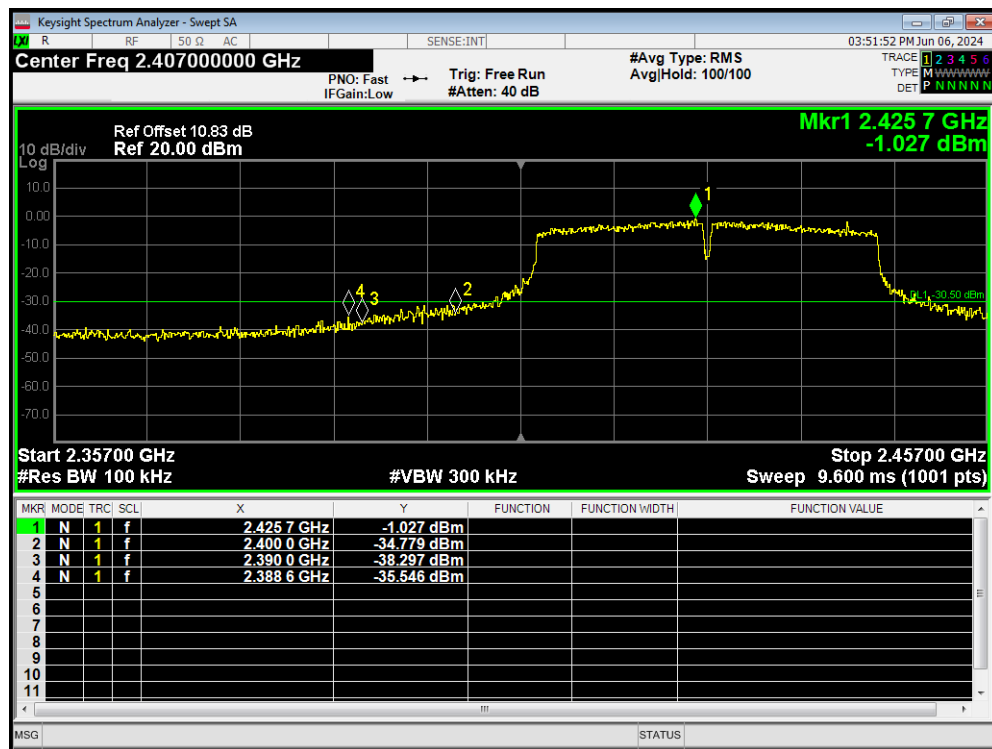


Band Edge 802.11n(HT40) 2432MHz Ref

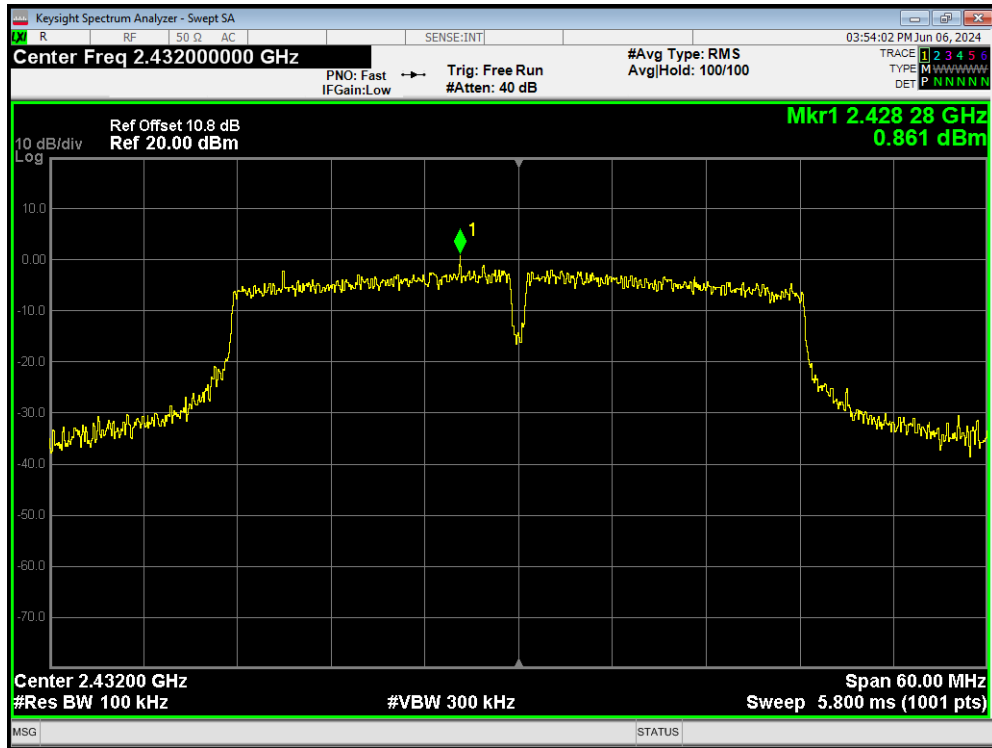


Band Edge 802.11n(HT40) 2432MHz Emission

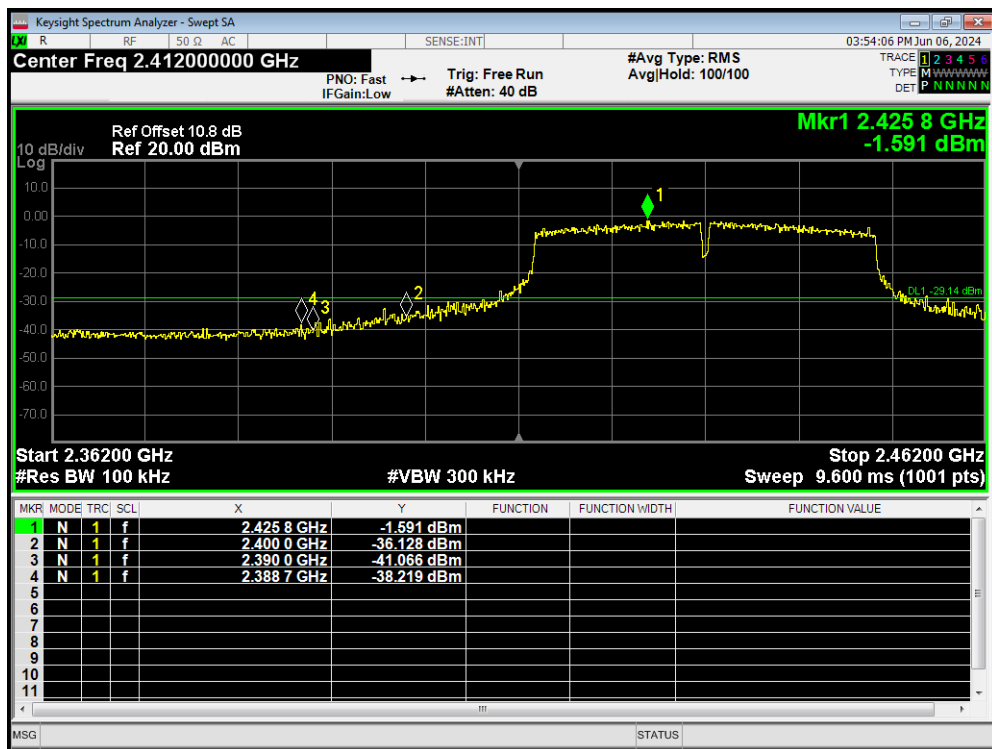


Band Edge 802.11n(HT40) 2442MHz Ref

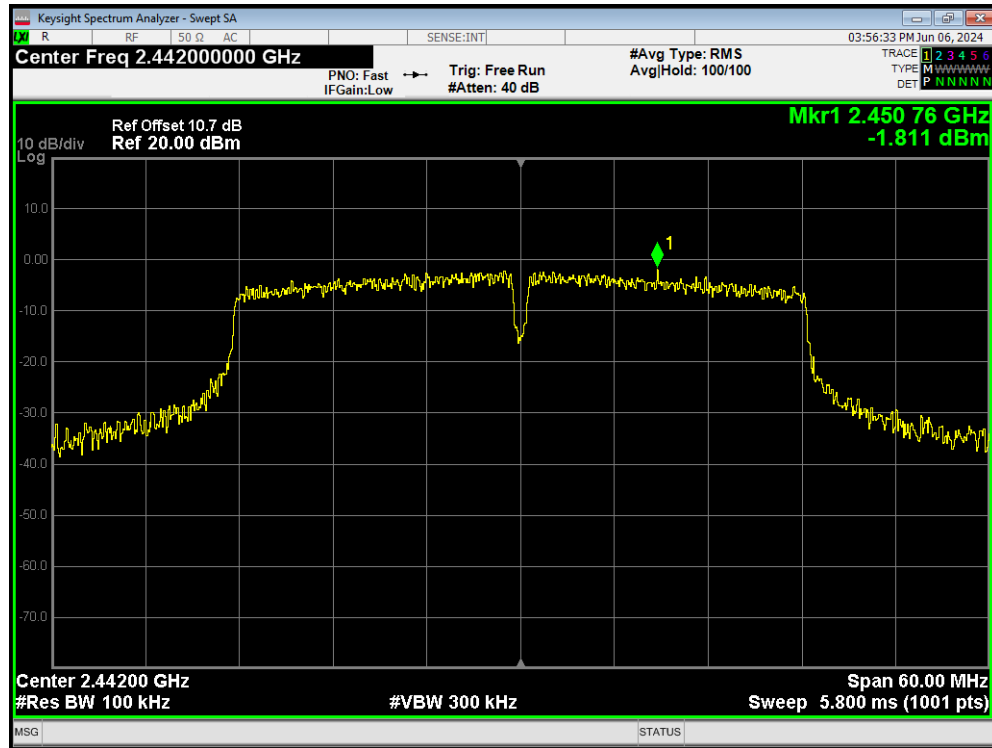


Band Edge 802.11n(HT40) 2442MHz Emission

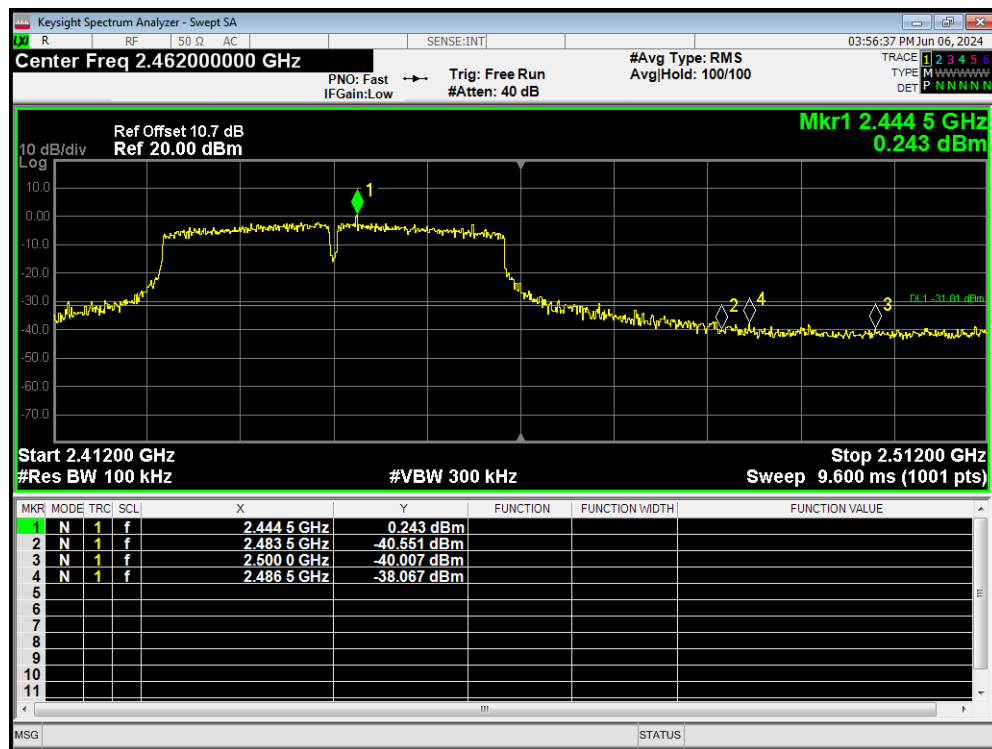


Band Edge 802.11n(HT40) 2447MHz Ref

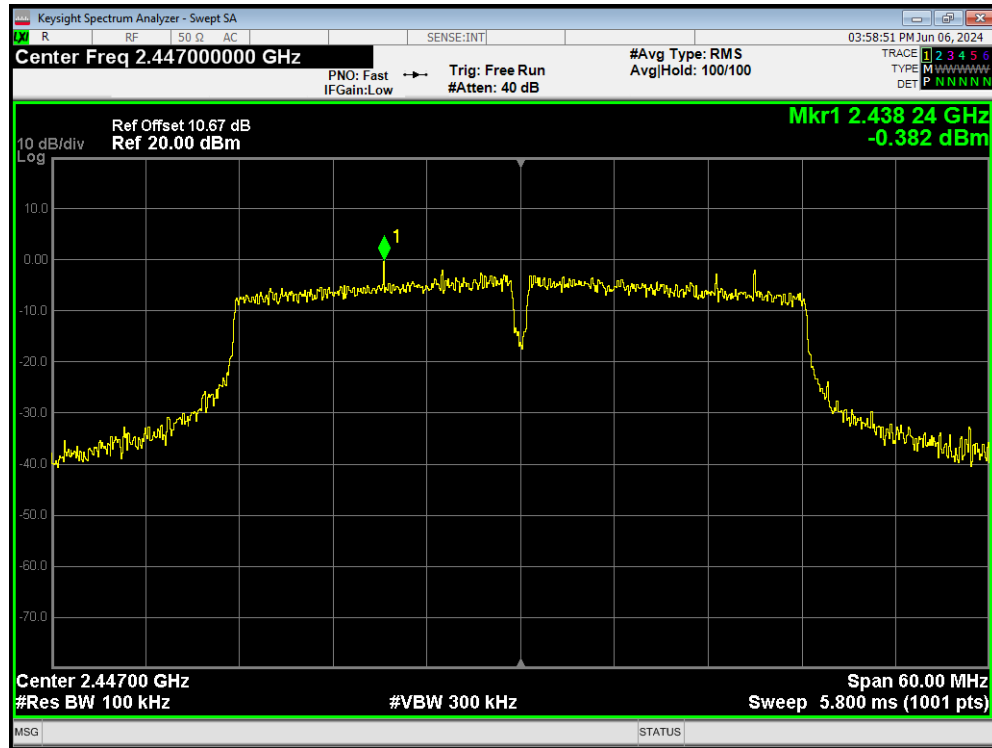


Band Edge 802.11n(HT40) 2447MHz Emission

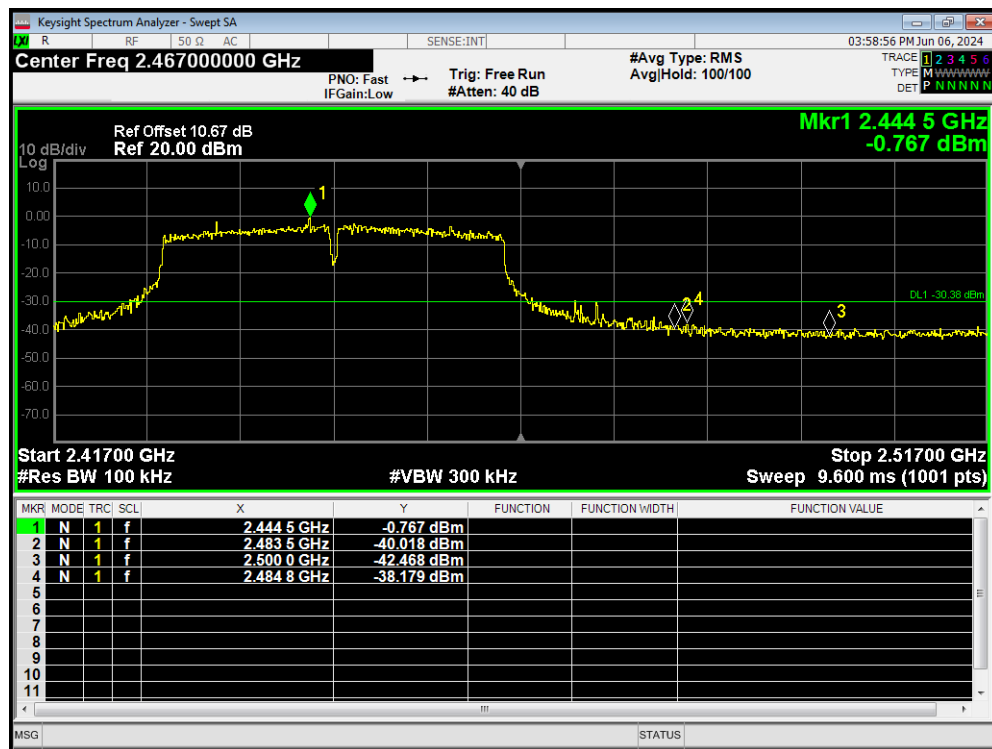


Band Edge 802.11n(HT40) 2452MHz Ref

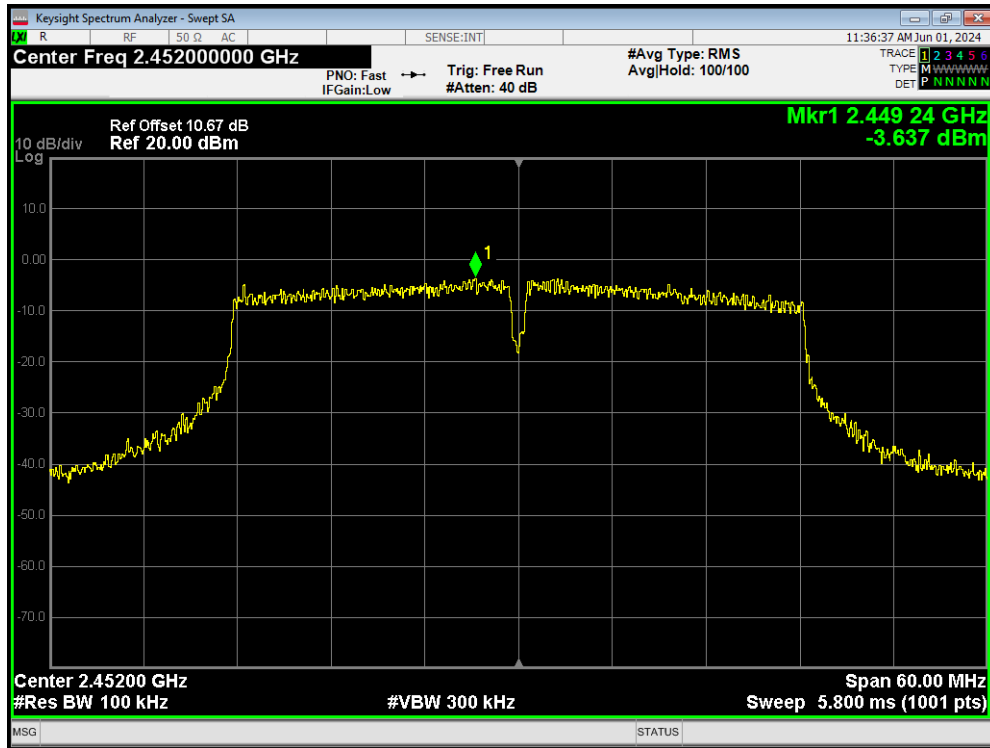


Band Edge 802.11n(HT40) 2452MHz Emission

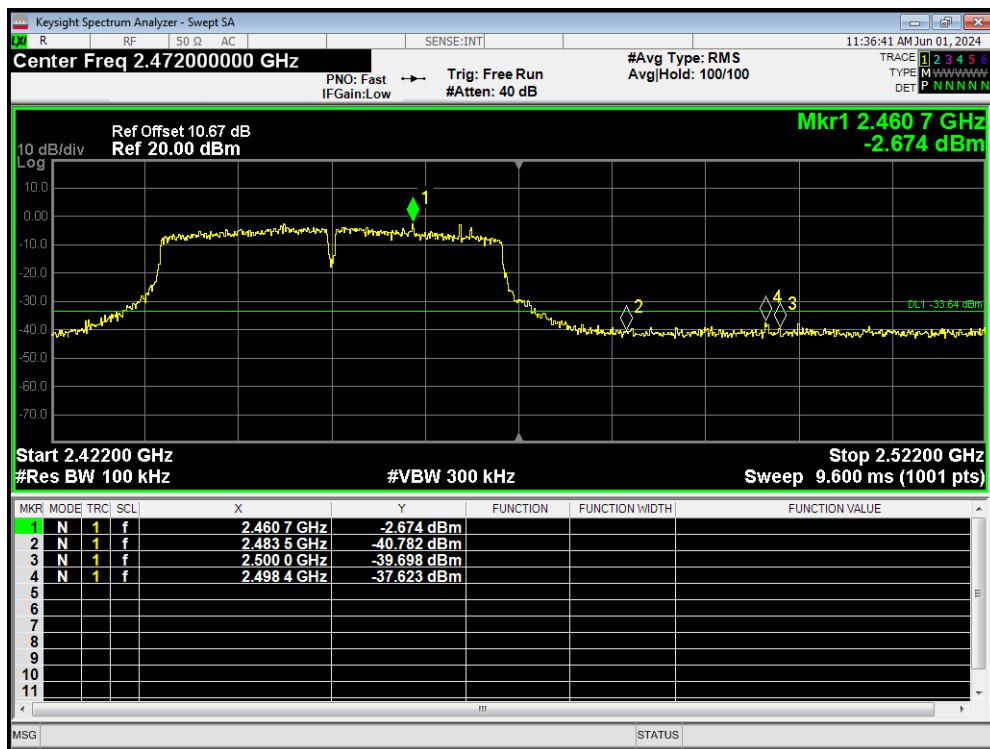


Band Edge Bluetooth LE (1M) 2402MHz Ref

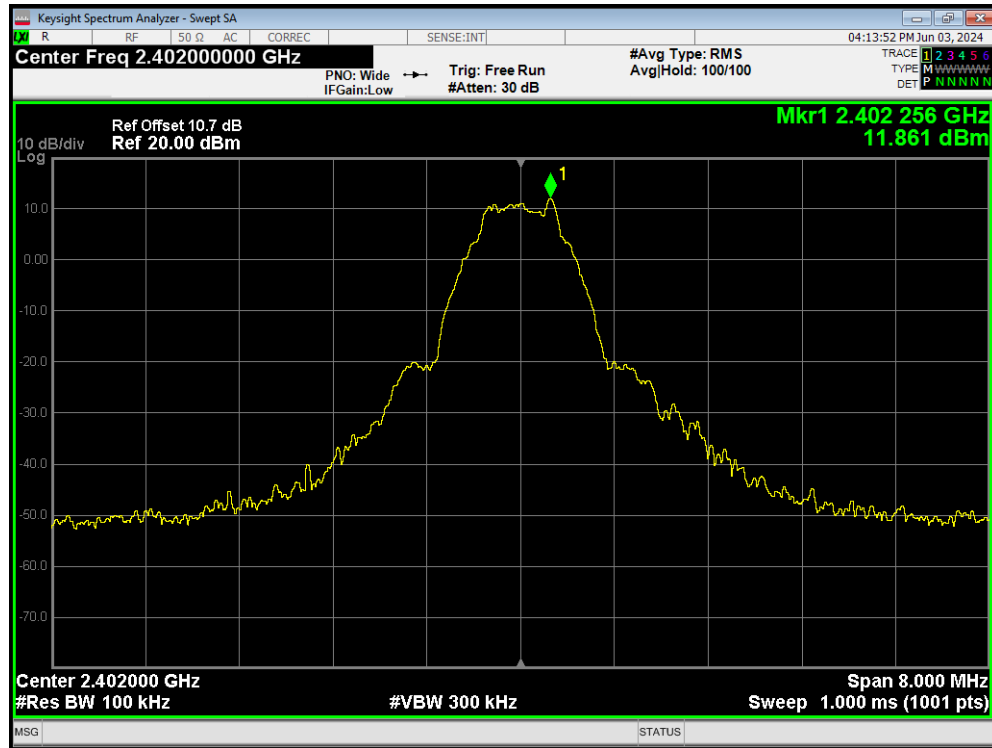


Band Edge Bluetooth LE (1M) 2402MHz Emission

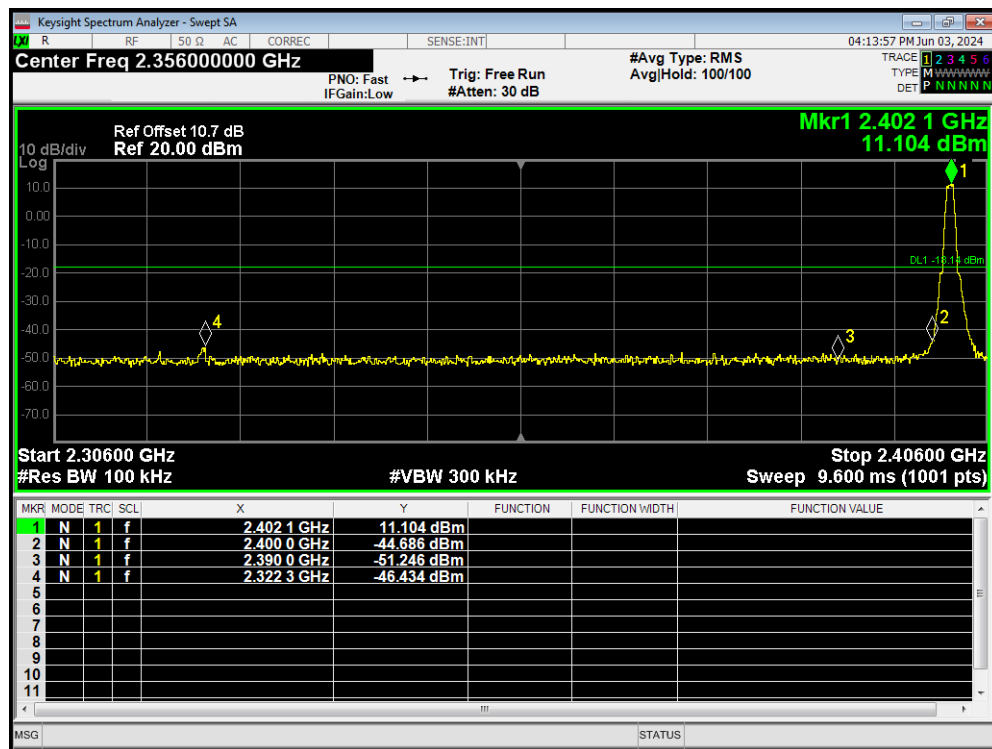


Band Edge Bluetooth LE (1M) 2480MHz Ref

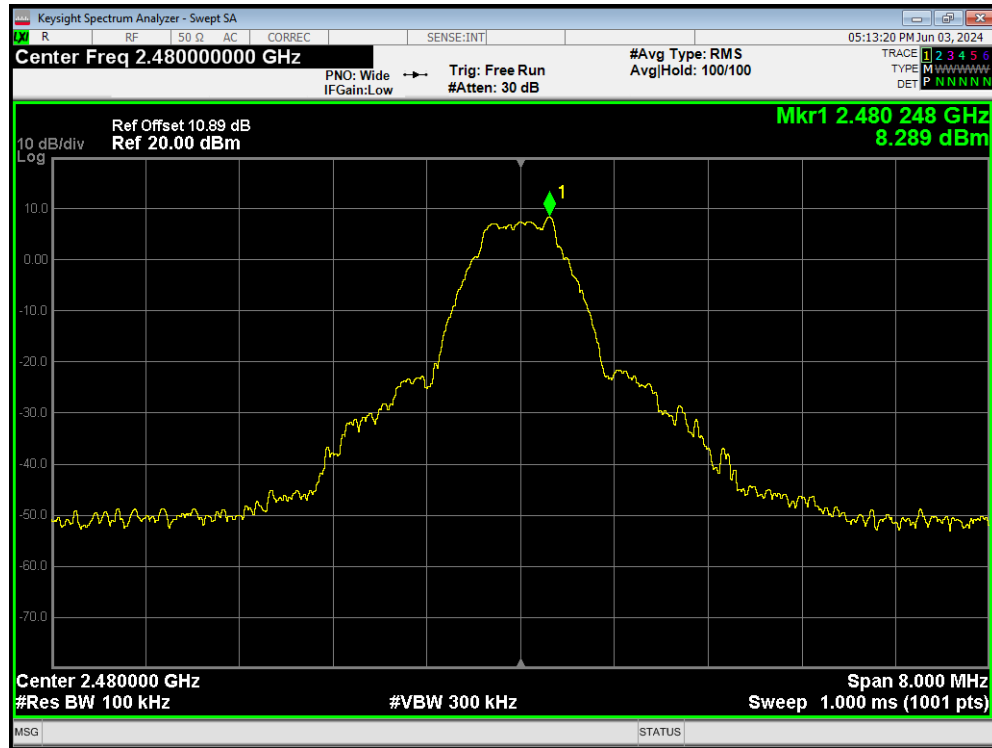


Band Edge Bluetooth LE (1M) 2480MHz Emission

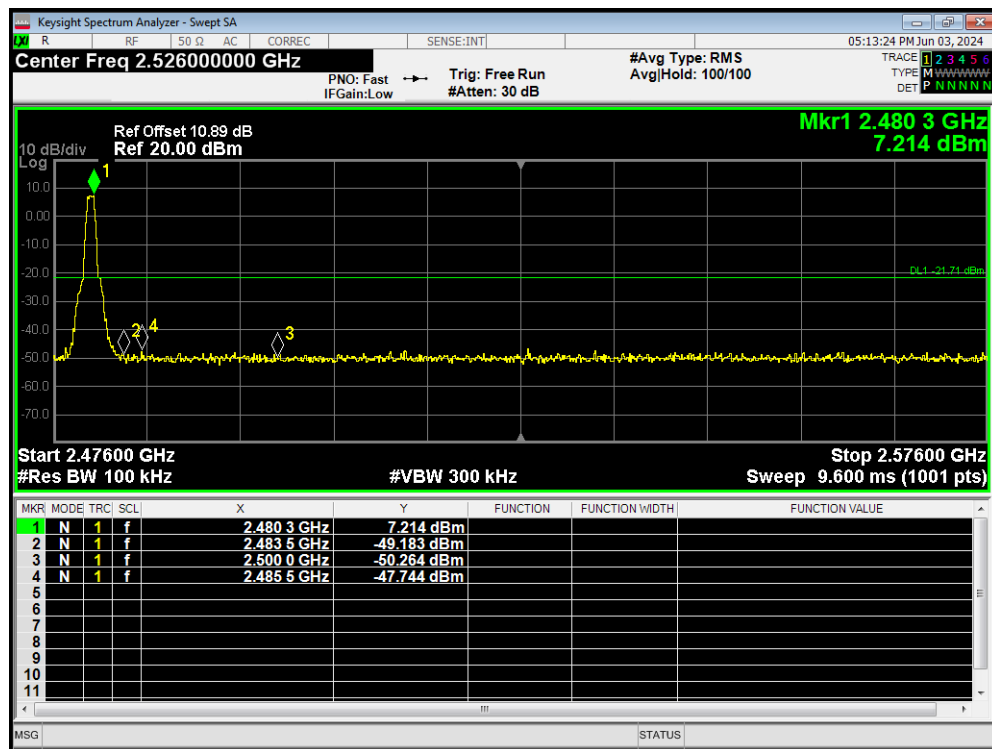


Band Edge Bluetooth LE (2M) 2402MHz Ref

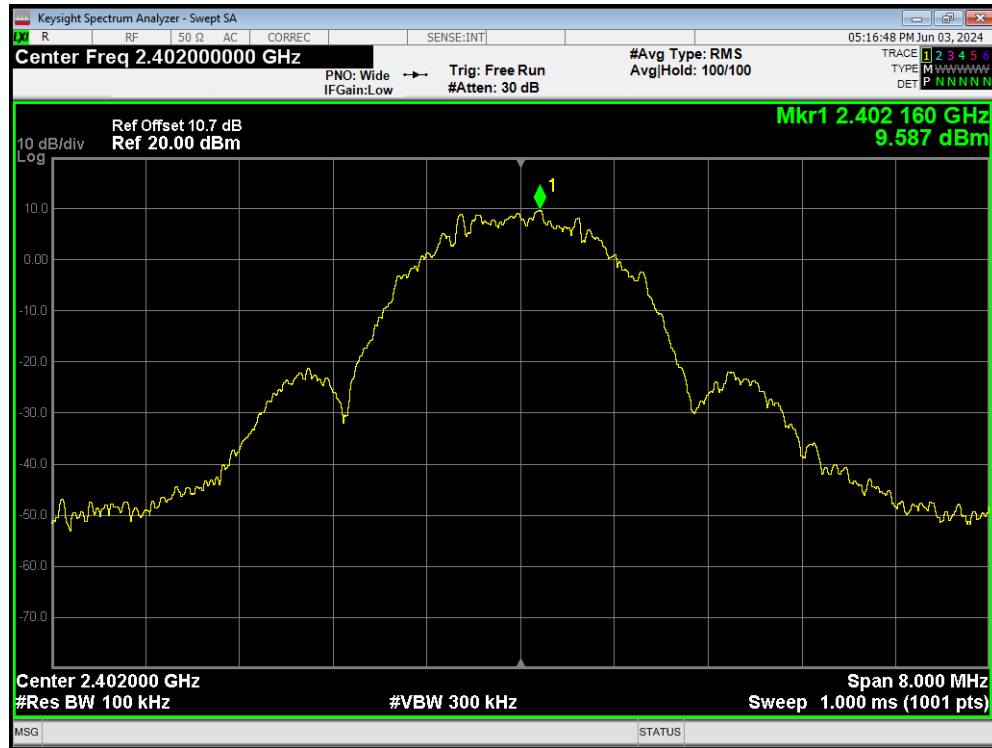


Band Edge Bluetooth LE (2M) 2402MHz Emission

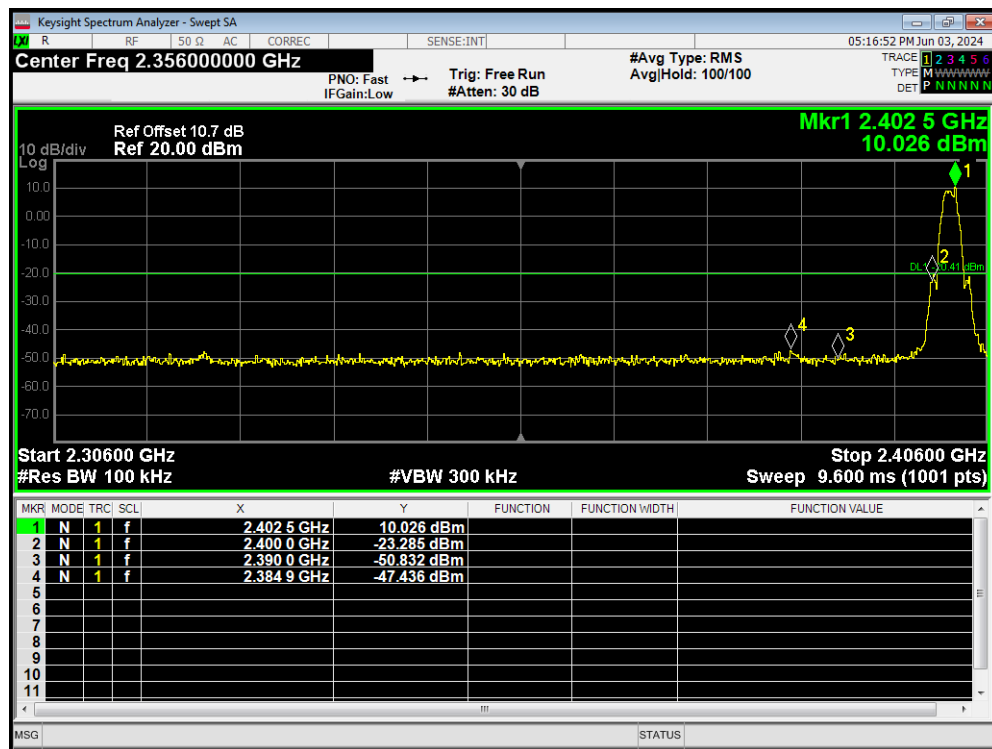


Band Edge Bluetooth LE (2M) 2480MHz Ref

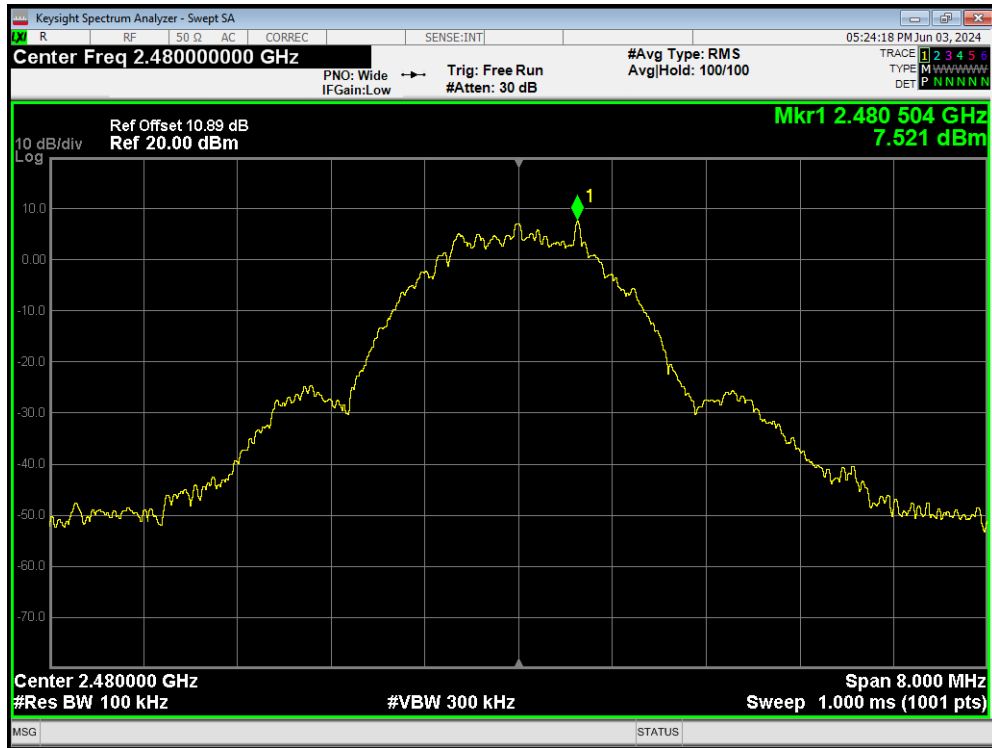


Band Edge Bluetooth LE (2M) 2480MHz Emission

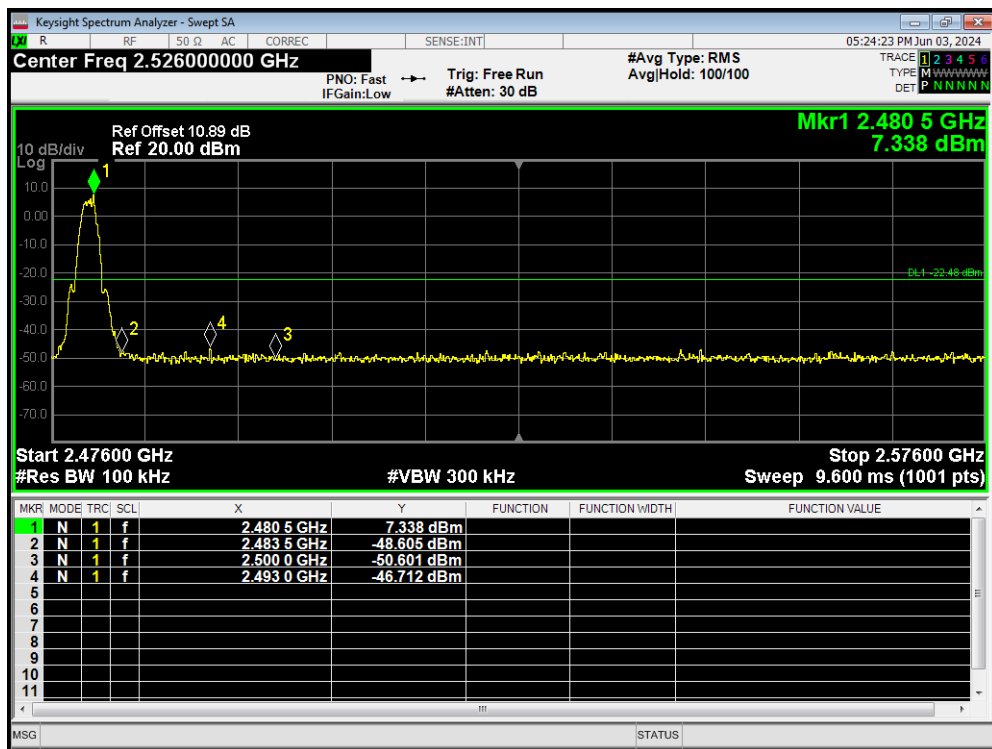


Band Edge Bluetooth LE (S=2) 2402MHz Ref

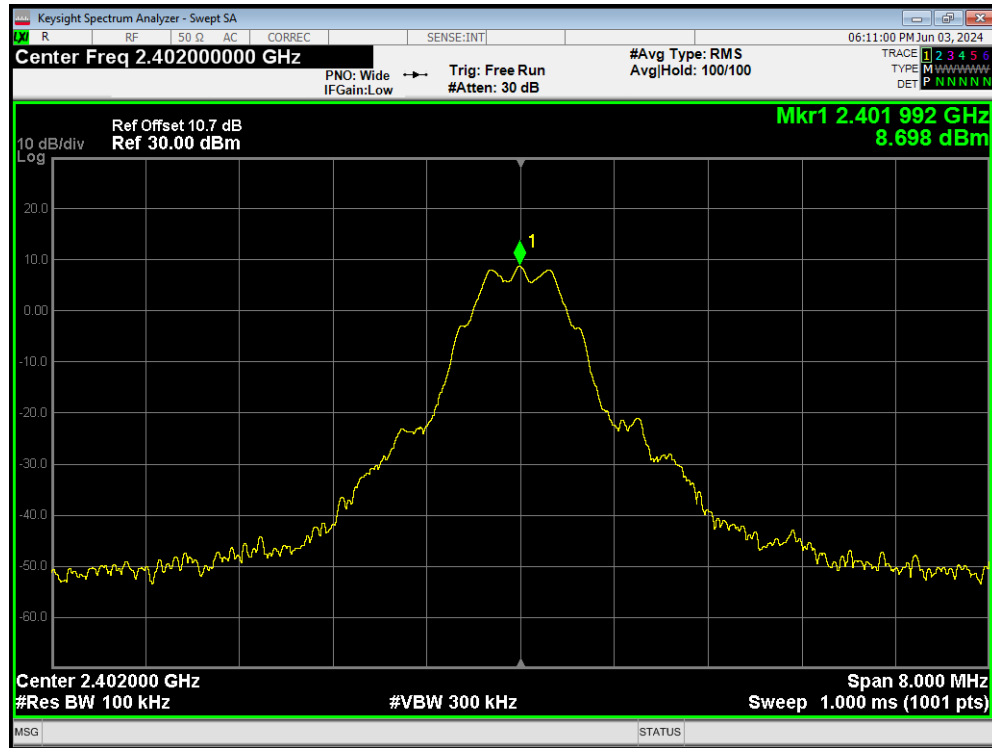


Band Edge Bluetooth LE (S=2) 2402MHz Emission

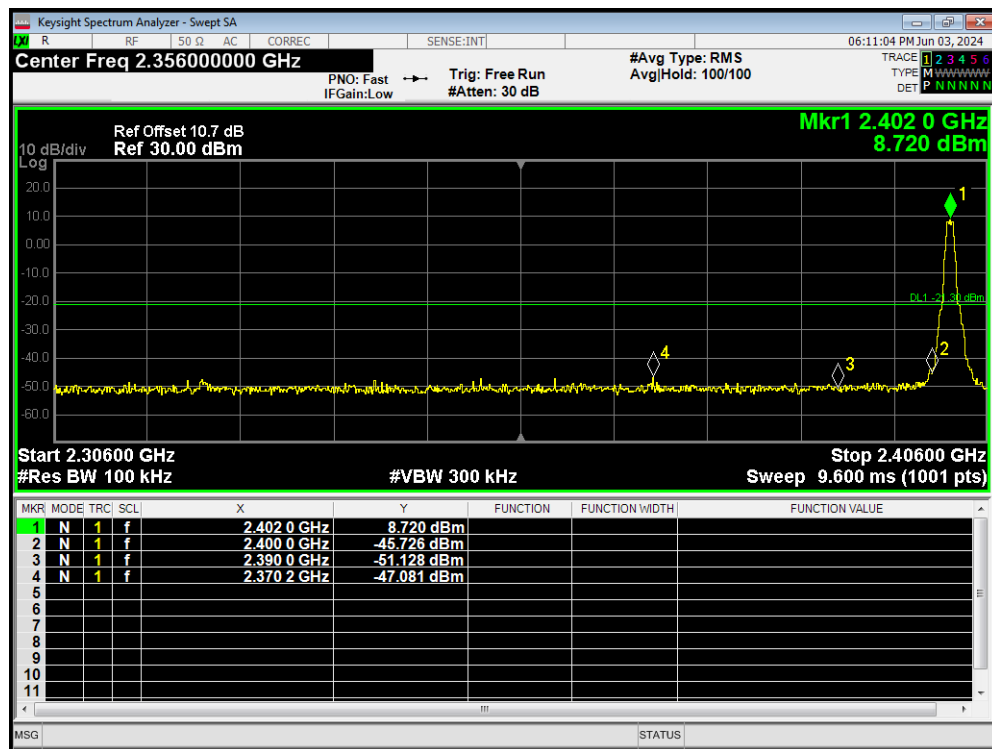


Band Edge Bluetooth LE (S=2) 2480MHz Ref

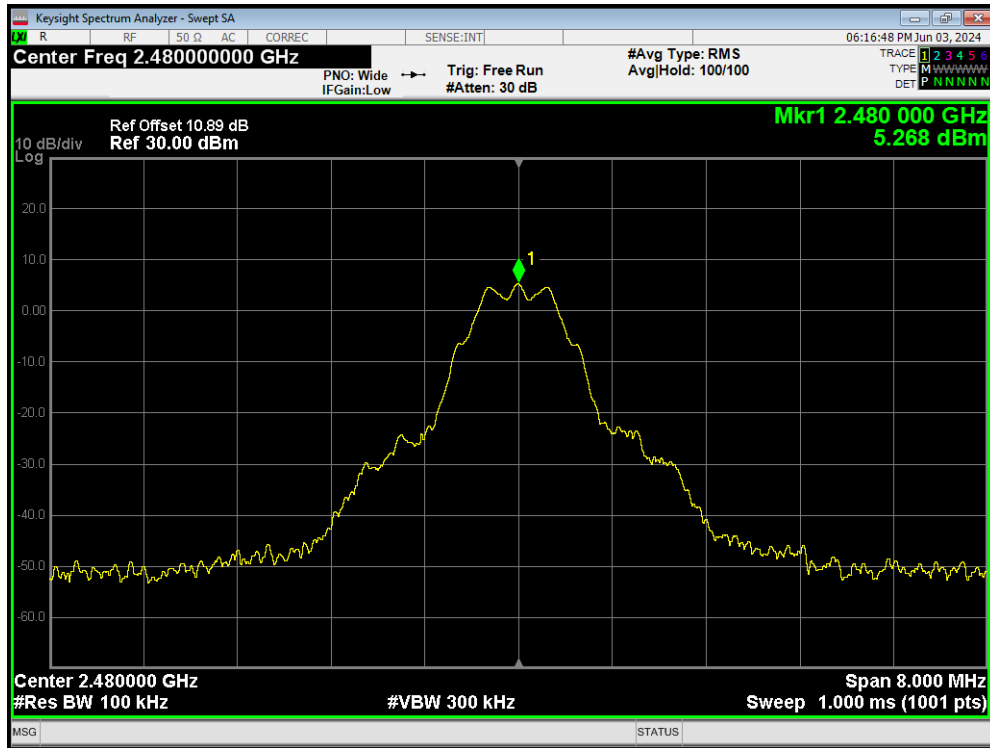


Band Edge Bluetooth LE (S=2) 2480MHz Emission

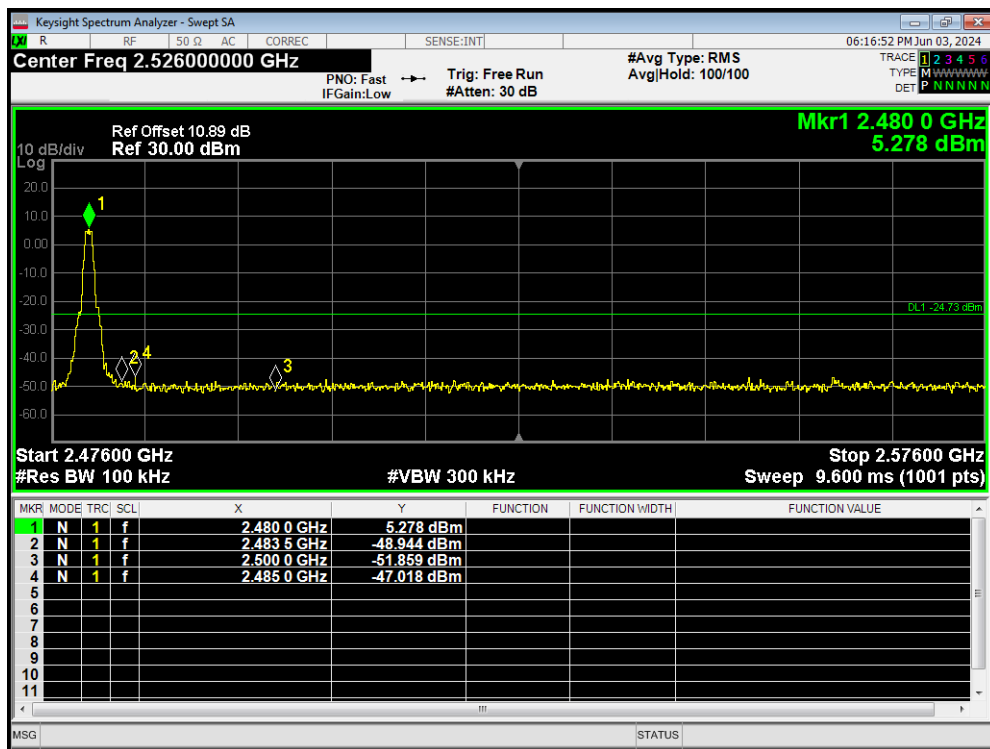


Band Edge Bluetooth LE (S=8) 2402MHz Ref

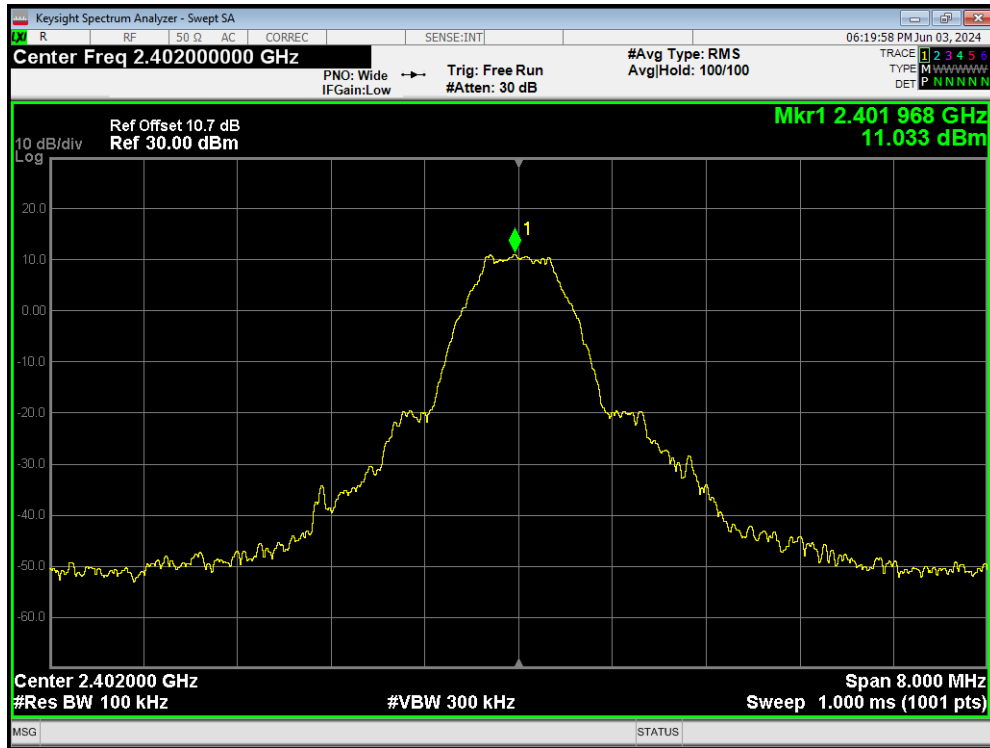


Band Edge Bluetooth LE (S=8) 2402MHz Emission

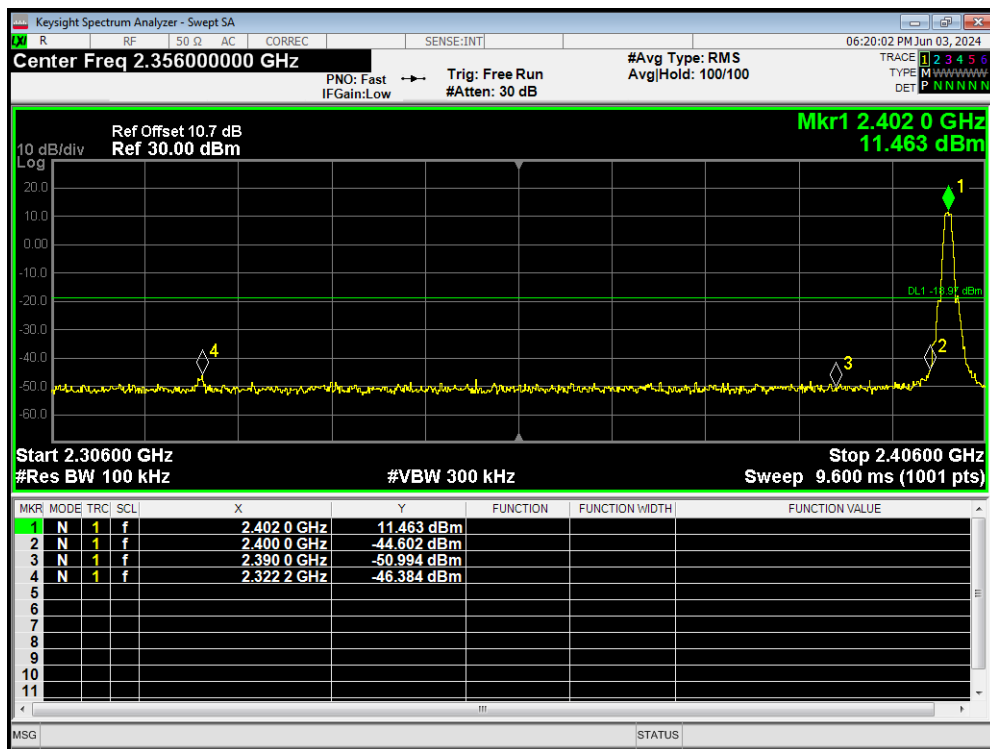

Band Edge Bluetooth LE (S=8) 2480MHz Ref

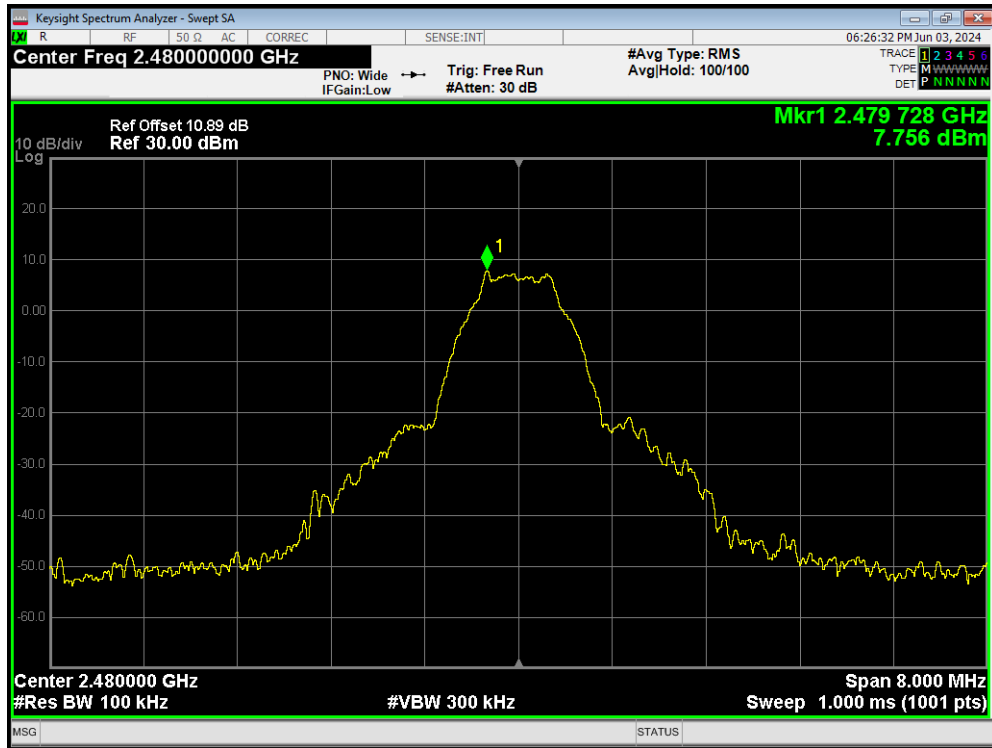

Band Edge Bluetooth LE (S=8) 2480MHz Emission

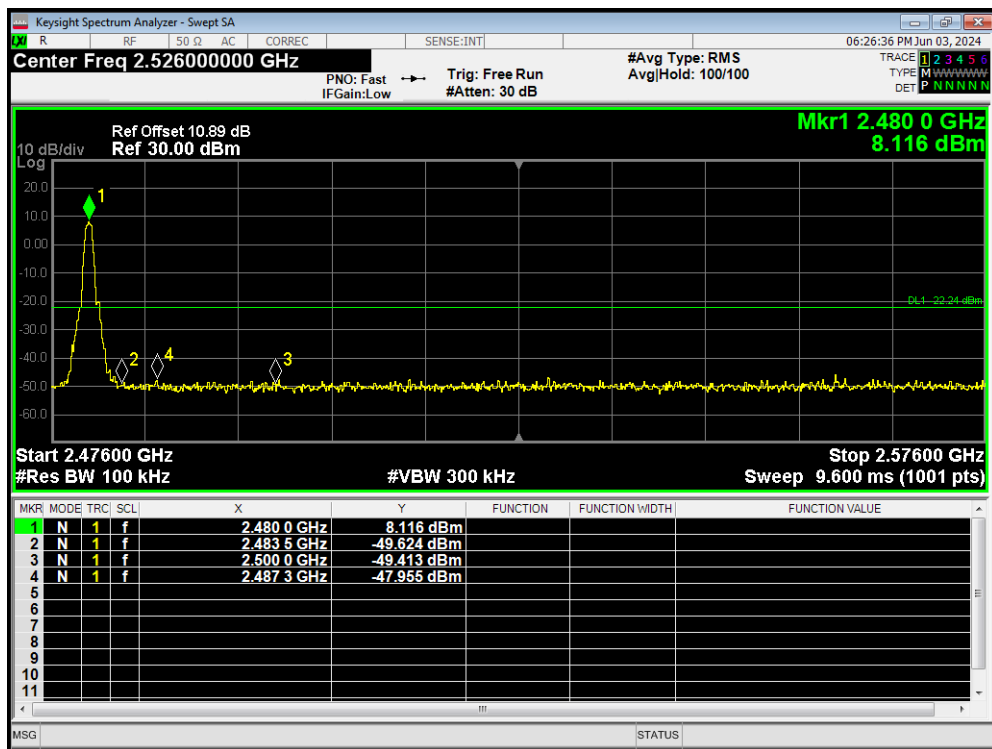

5.4. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPS-2 was used for this test.

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector = power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$
- Sweep time = auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.


Test Results:

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-8.14	-14.74	8	PASS
	2437/CH 6	-9.44	-16.04	8	PASS
	2462/CH11	-8.96	-15.56	8	PASS
802.11g	2412/CH 1	-15.57	-16.44	8	PASS
	2417/CH 2	-13.19	-14.06	8	PASS
	2422/ CH 3	-14.23	-15.10	8	PASS
	2437/CH 6	-12.92	-13.79	8	PASS
	2452/CH 9	-14.29	-15.16	8	PASS
	2457/CH 10	-16.56	-17.43	8	PASS
	2462/CH11	-17.67	-18.54	8	PASS
802.11n HT20	2412/CH 1	-12.45	-17.72	8	PASS
	2417/CH 2	-10.88	-16.15	8	PASS
	2437/CH 6	-11.11	-16.38	8	PASS
	2452/CH 9	-11.13	-16.40	8	PASS
	2457/CH 10	-12.81	-18.08	8	PASS
	2462/CH11	-14.91	-20.18	8	PASS
802.11n HT40	2422/CH3	-16.58	-21.74	8	PASS
	2427/CH4	-15.31	-20.47	8	PASS
	2432/CH5	-15.29	-20.45	8	PASS
	2437/CH6	-14.72	-19.88	8	PASS
	2442/CH7	-15.47	-20.63	8	PASS
	2447/CH8	-17.11	-22.27	8	PASS
	2452/CH9	-16.89	-22.05	8	PASS
802.11ax HE20	2412/CH 1	-15.23	-19.68	8	PASS
	2417/CH 2	-12.62	-17.07	8	PASS
	2437/CH 6	-13.95	-18.40	8	PASS
	2452/CH 9	-12.81	-17.26	8	PASS
	2457/CH 10	-15.75	-20.20	8	PASS
	2462/CH11	-15.64	-20.09	8	PASS
802.11ax HE40	2422/CH3	-18.31	-22.79	8	PASS
	2427/CH4	-17.77	-22.25	8	PASS

	2437/CH6	-16.91	-21.39	8	PASS
	2442/CH7	-17.73	-22.21	8	PASS
	2447/CH8	-18.95	-23.43	8	PASS
	2452/CH9	-19.56	-24.04	8	PASS
Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*log10(3/30)					

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy) (1M)	2402/CH0	-15.69	-14.98	8	PASS
	2440/CH19	-14.76	-14.05	8	PASS
	2480/CH39	-18.49	-17.78	8	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	-23.63	-21.17	8	PASS
	2440/CH19	-20.48	-18.02	8	PASS
	2480/CH39	-20.11	-17.65	8	PASS
Bluetooth (Low Energy) (S=2)	2402/CH0	4.78	4.89	8	PASS
	2440/CH19	3.27	3.38	8	PASS
	2480/CH39	1.15	1.26	8	PASS
Bluetooth (Low Energy) (S=8)	2402/CH0	-6.69	-6.27	8	PASS
	2440/CH19	-8.60	-8.18	8	PASS
	2480/CH39	-10.37	-9.95	8	PASS
Note: Power Spectral Density =Read Value +Duty cycle correction factor					


PSD 802.11ax(HE20) 2412MHz

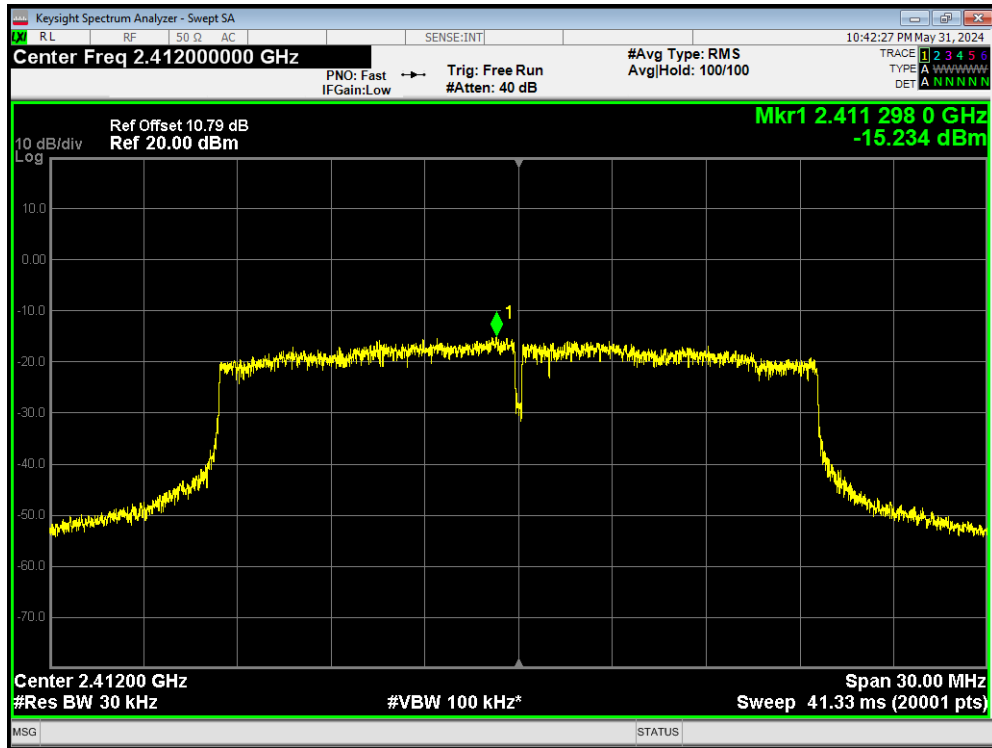


PSD 802.11ax(HE20) 2417MHz




PSD 802.11ax(HE20) 2437MHz

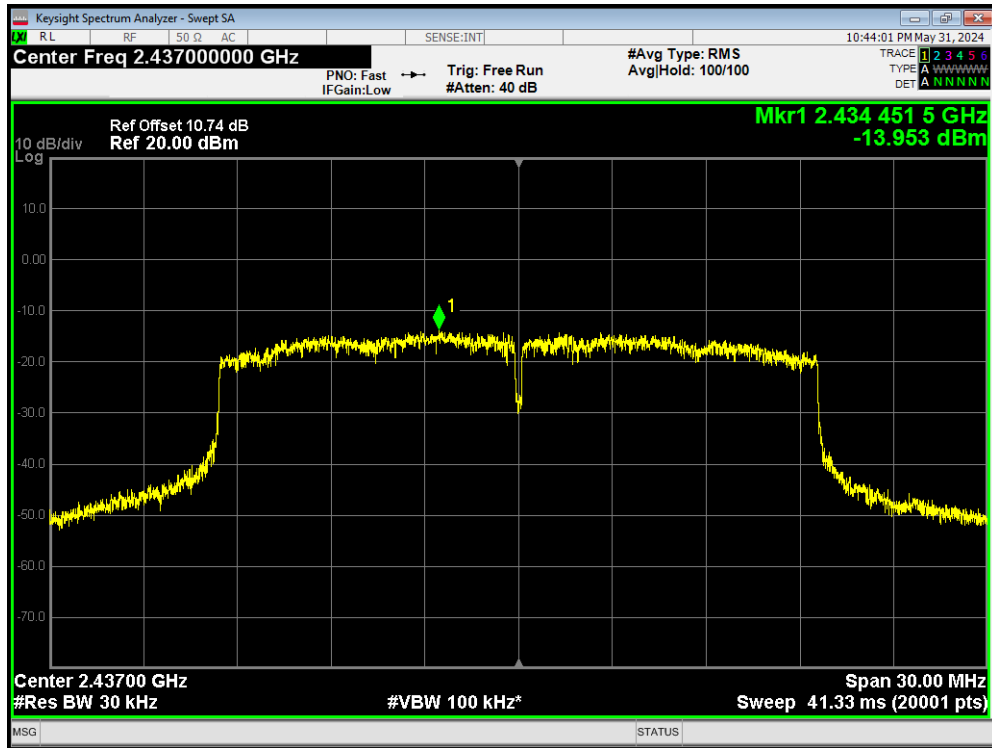


PSD 802.11ax(HE20) 2452MHz

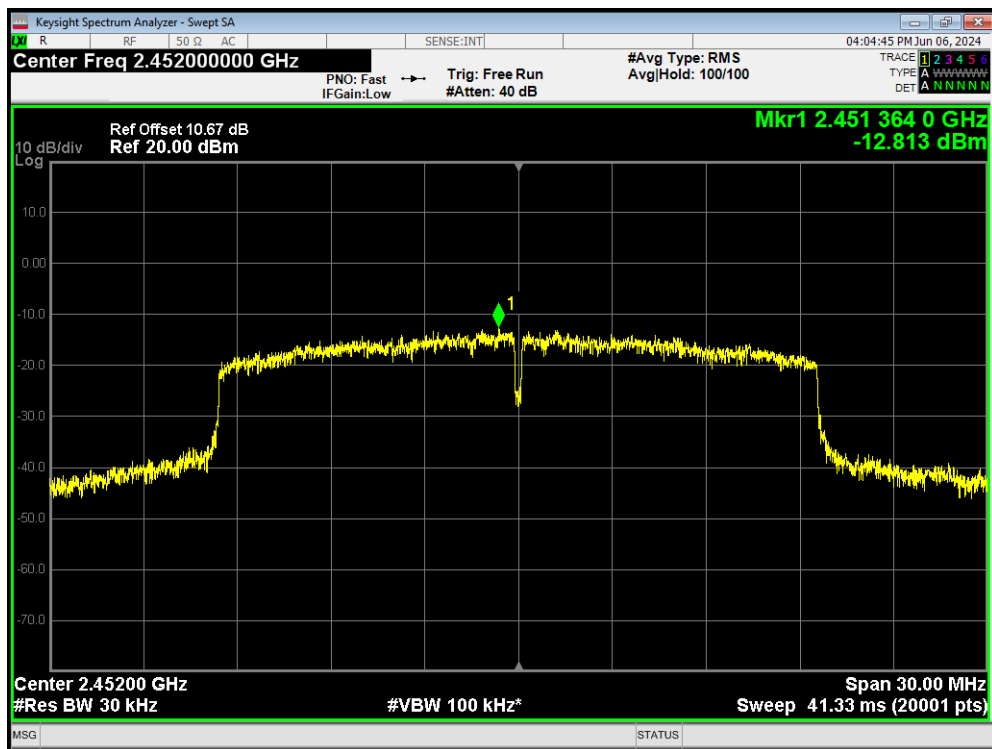


PSD 802.11ax(HE20) 2457MHz

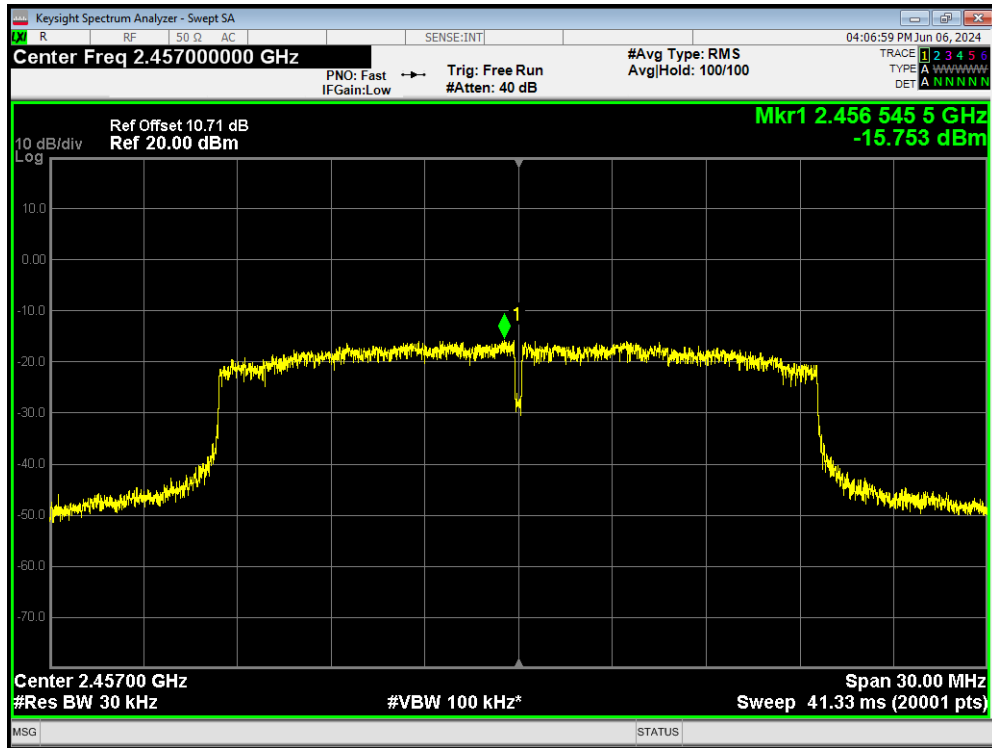


PSD 802.11ax(HE20) 2462MHz

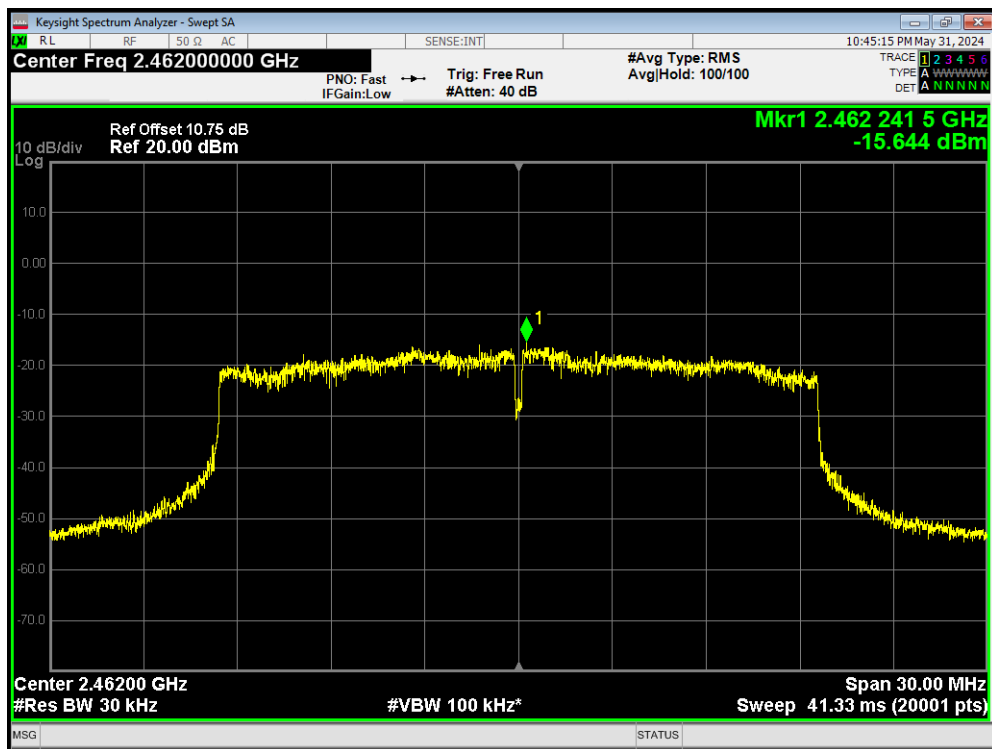


PSD 802.11ax(HE40) 2422MHz

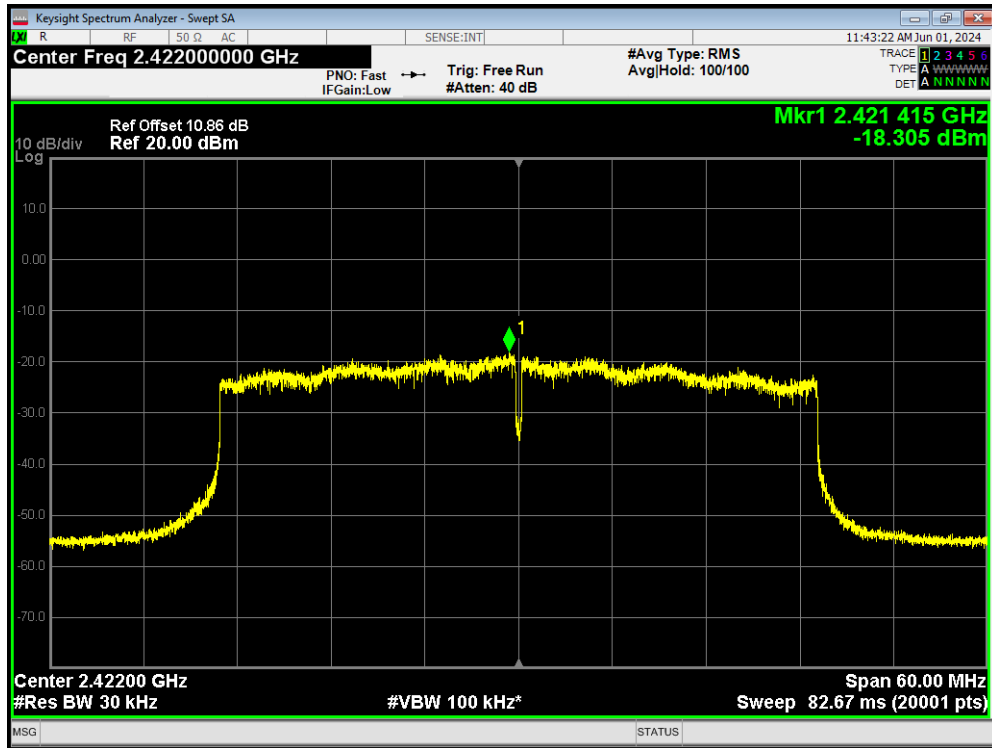


PSD 802.11ax(HE40) 2427MHz

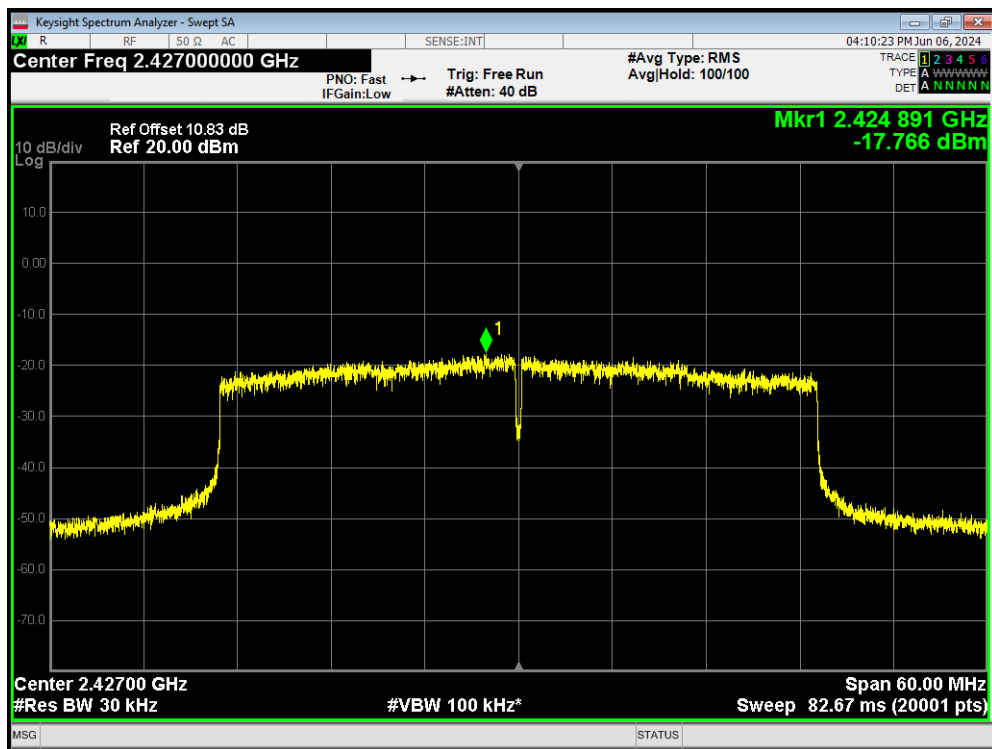


PSD 802.11ax(HE40) 2437MHz

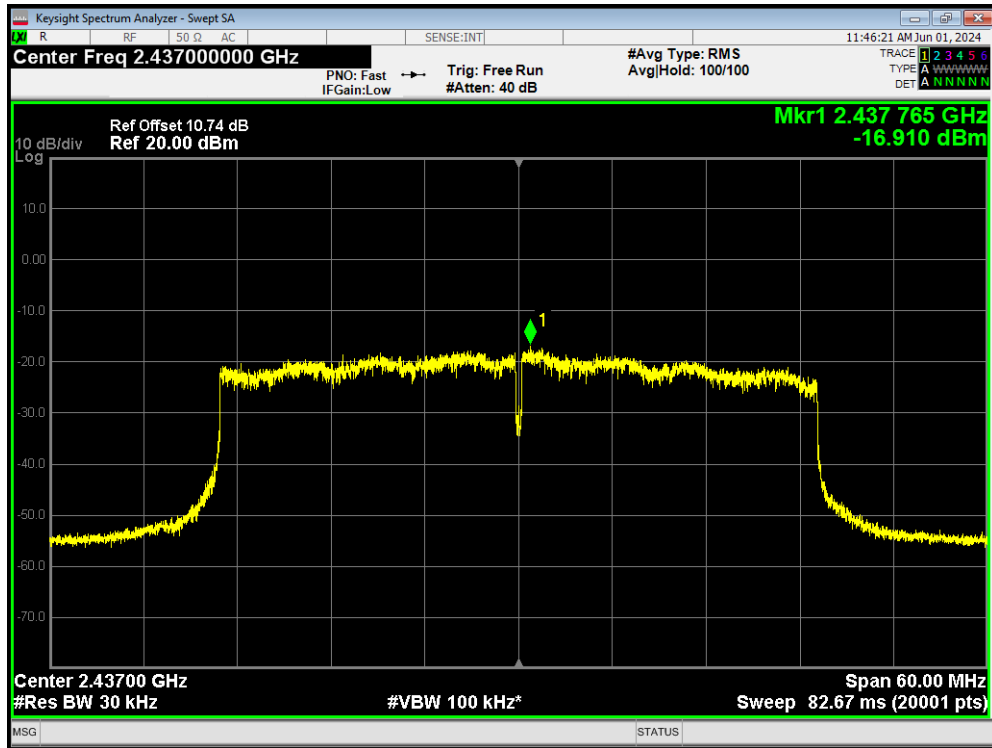


PSD 802.11ax(HE40) 2442MHz

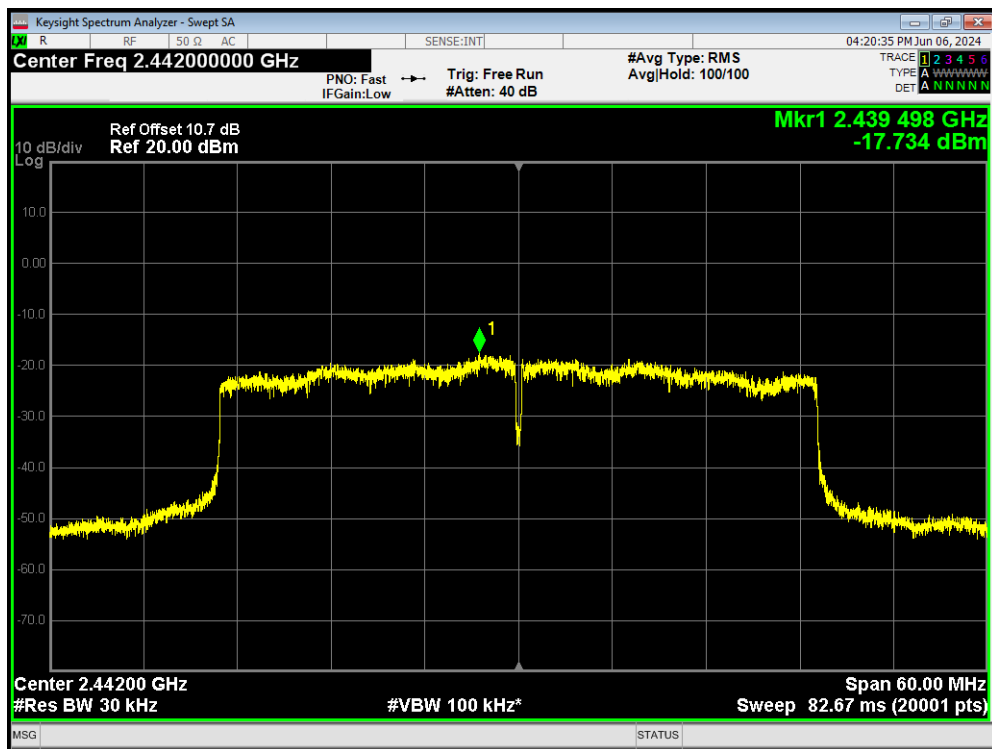


PSD 802.11ax(HE40) 2447MHz

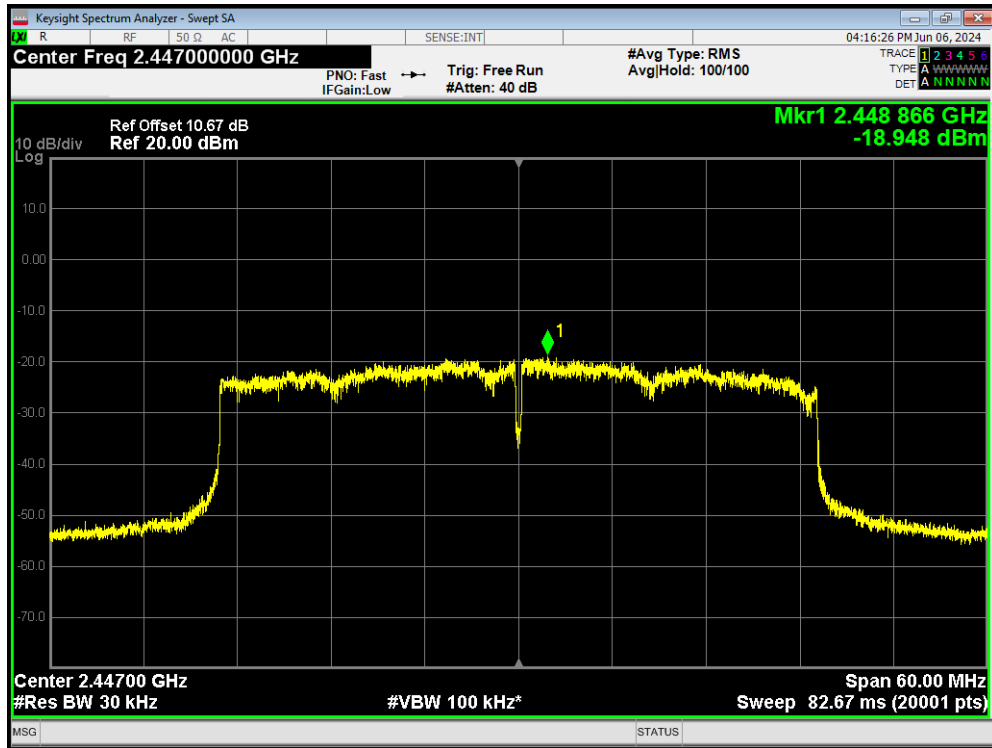


PSD 802.11ax(HE40) 2452MHz

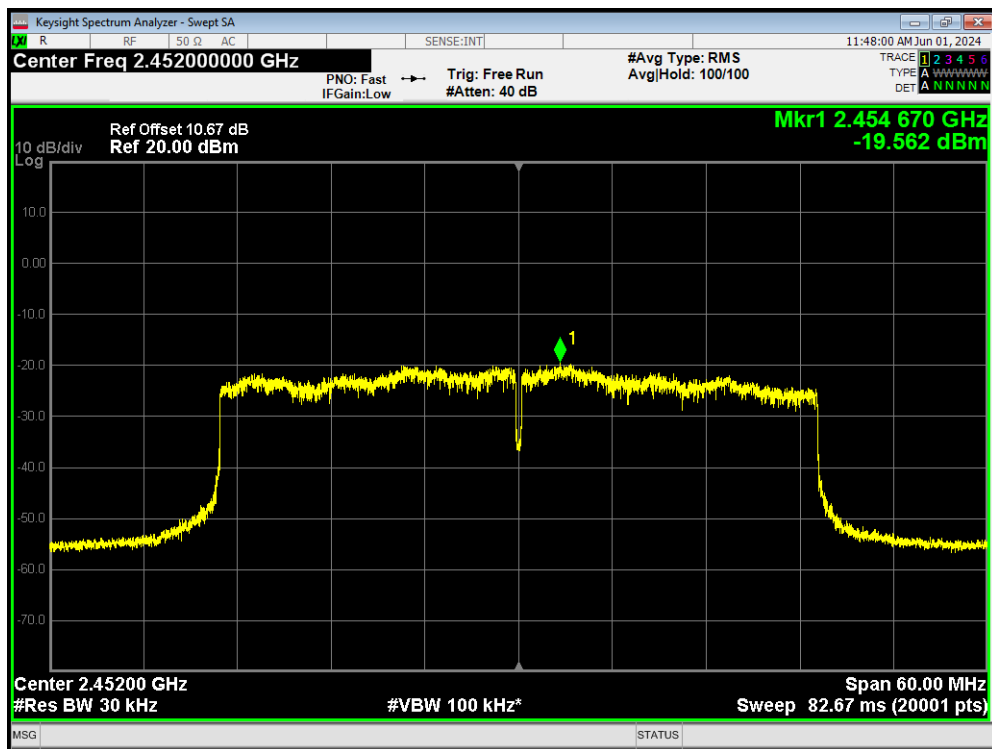


PSD 802.11b 2412MHz

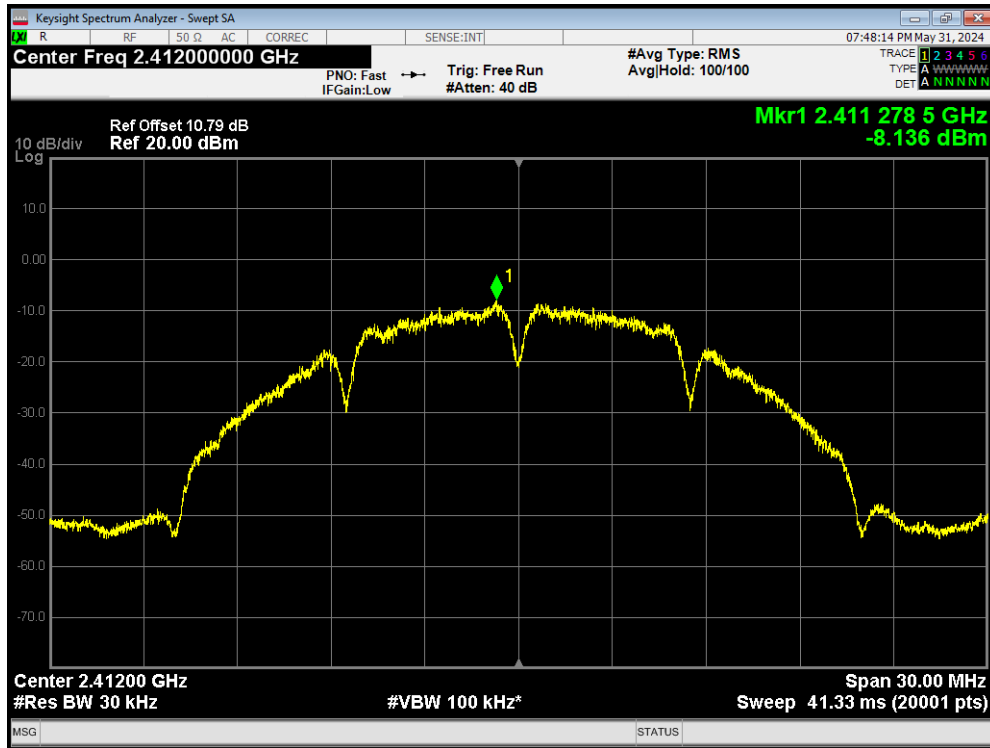


PSD 802.11b 2437MHz

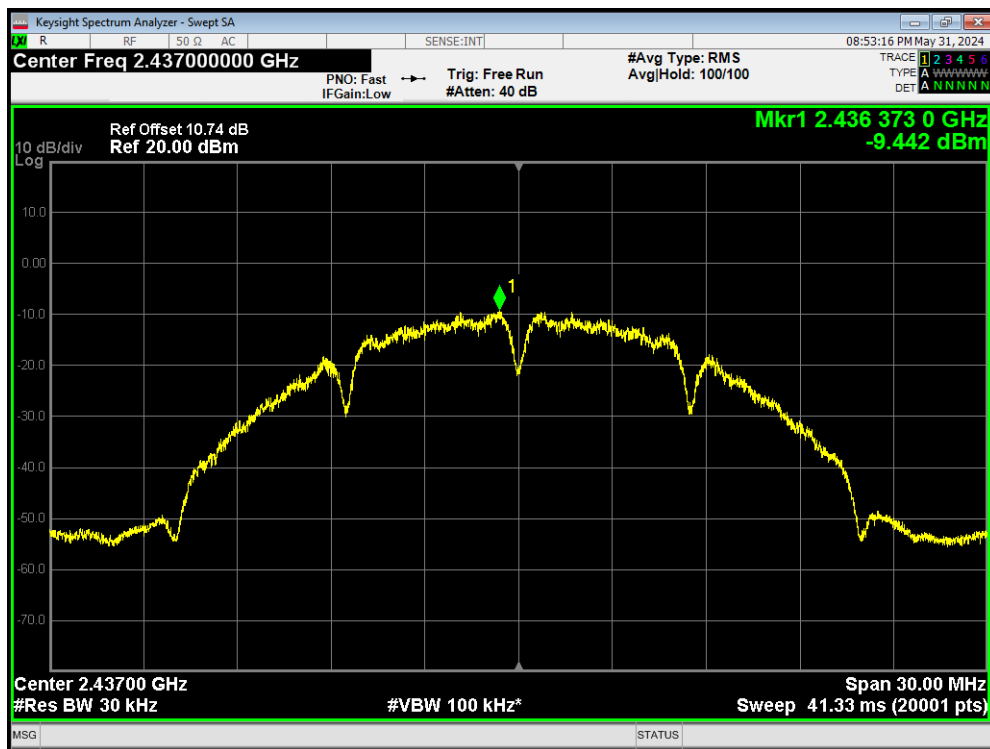


PSD 802.11b 2462MHz

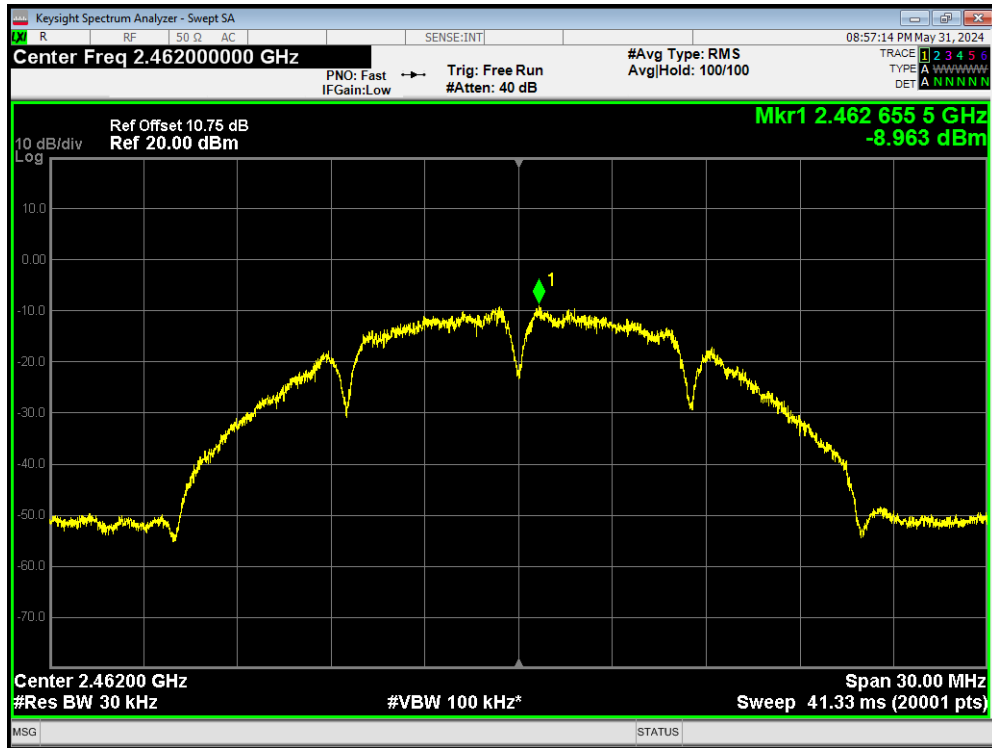


PSD 802.11g 2412MHz

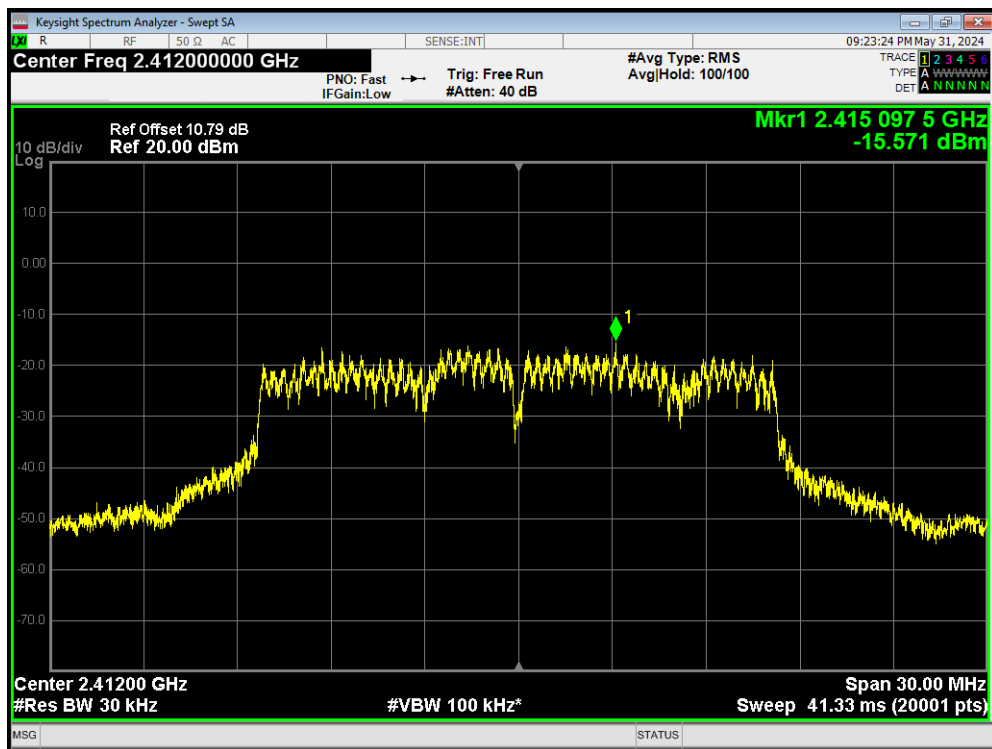


PSD 802.11g 2417MHz

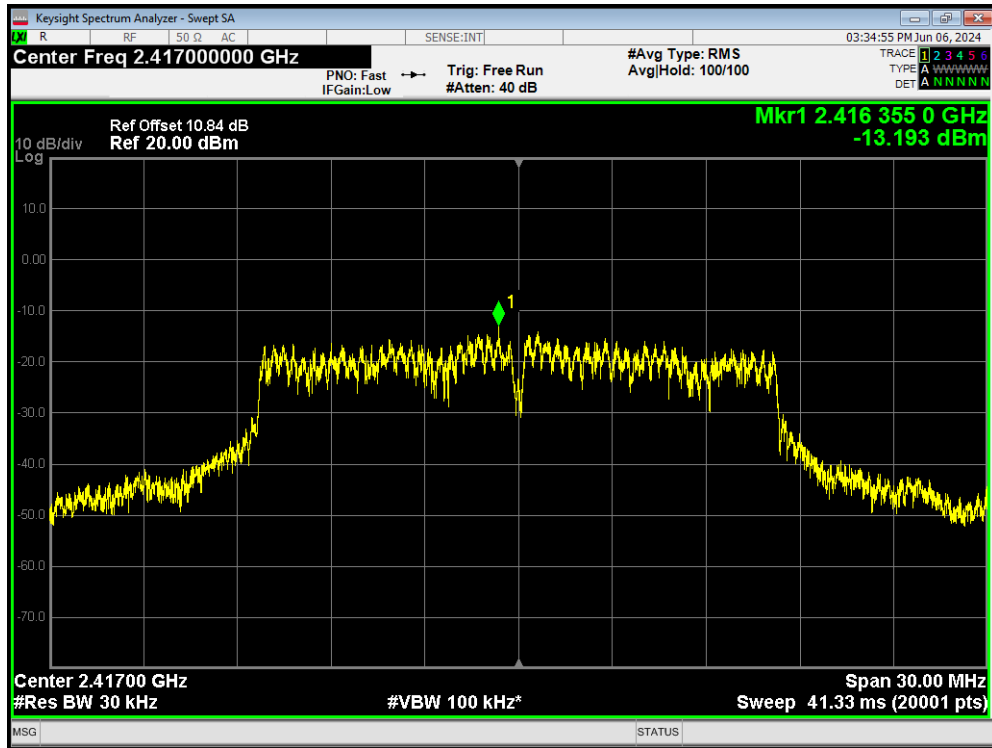


PSD 802.11g 2422MHz

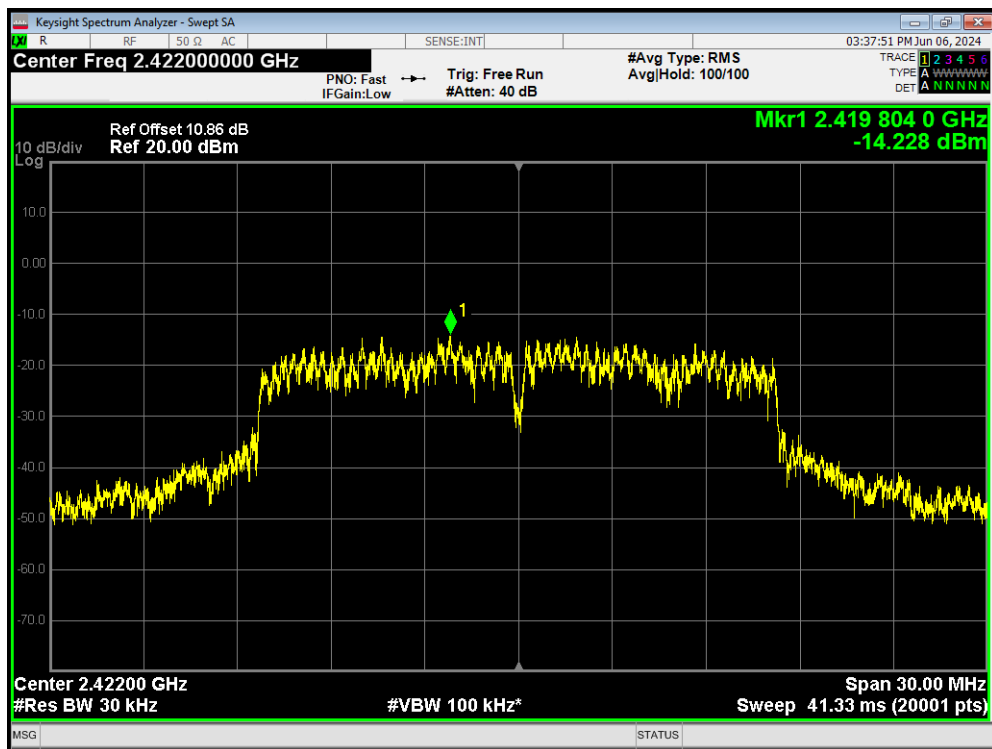


PSD 802.11g 2437MHz

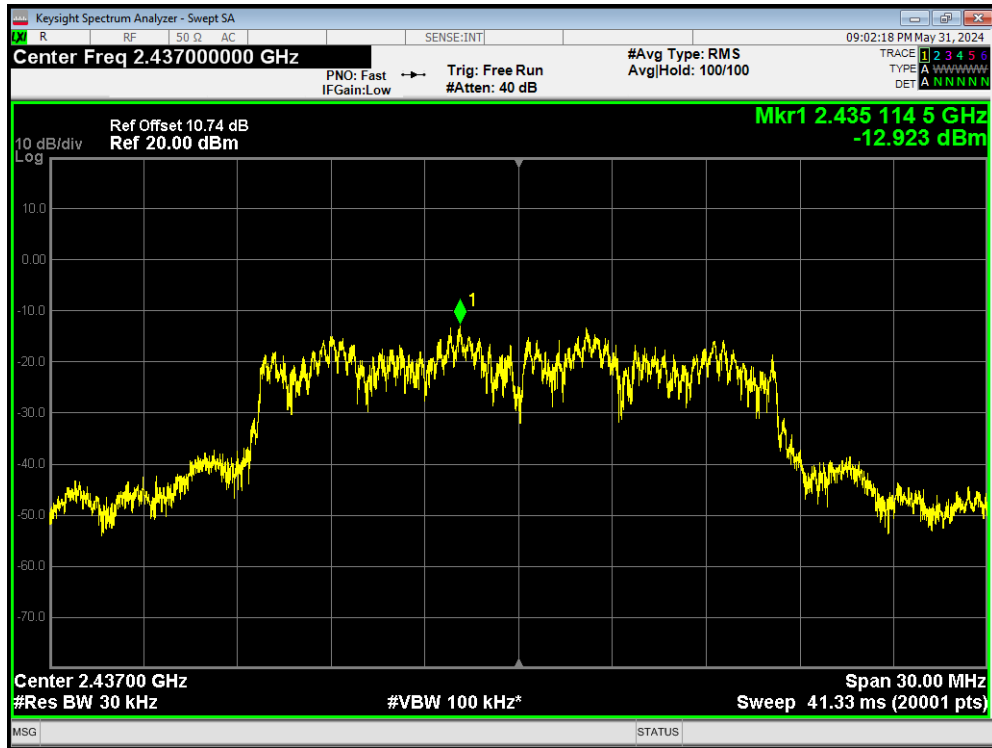


PSD 802.11g 2452MHz

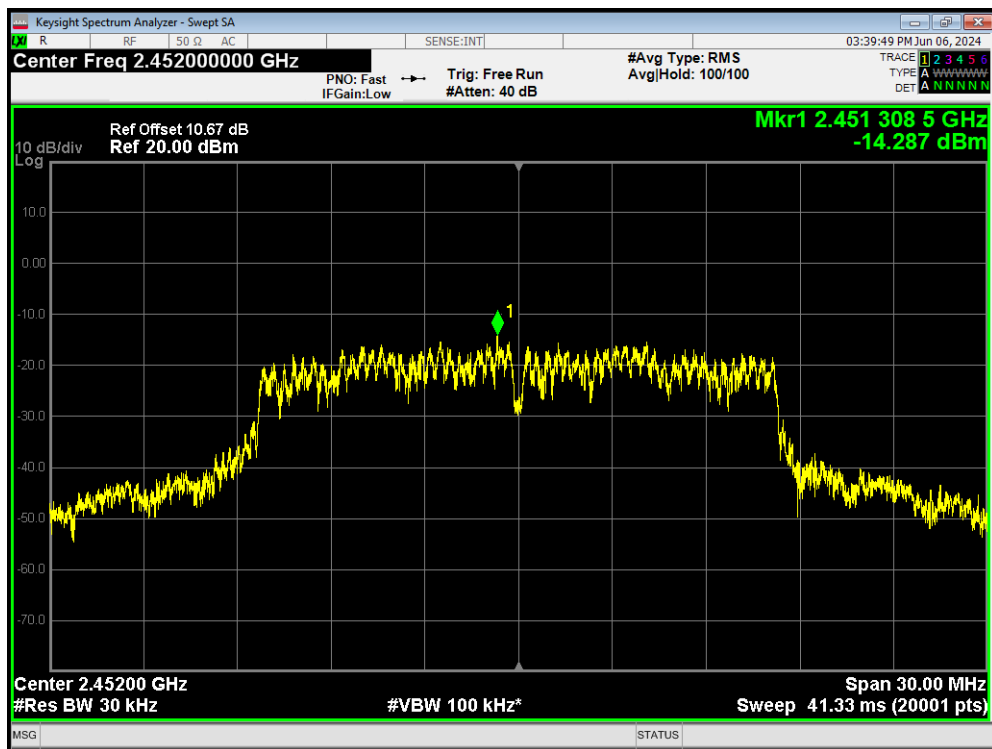


PSD 802.11g 2457MHz

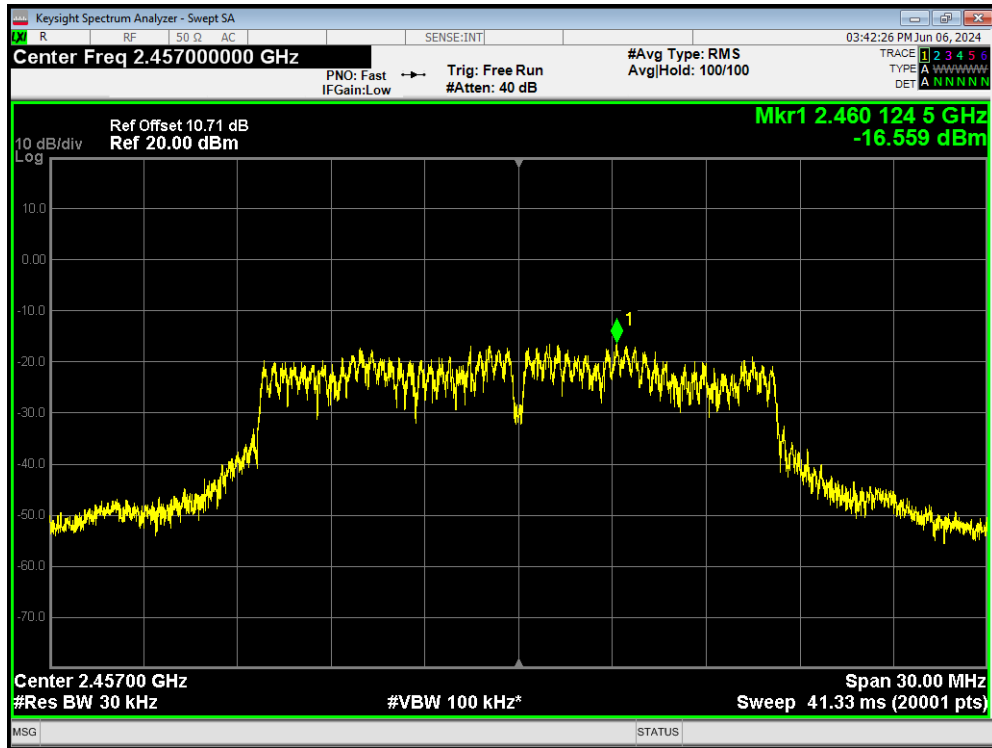


PSD 802.11g 2462MHz

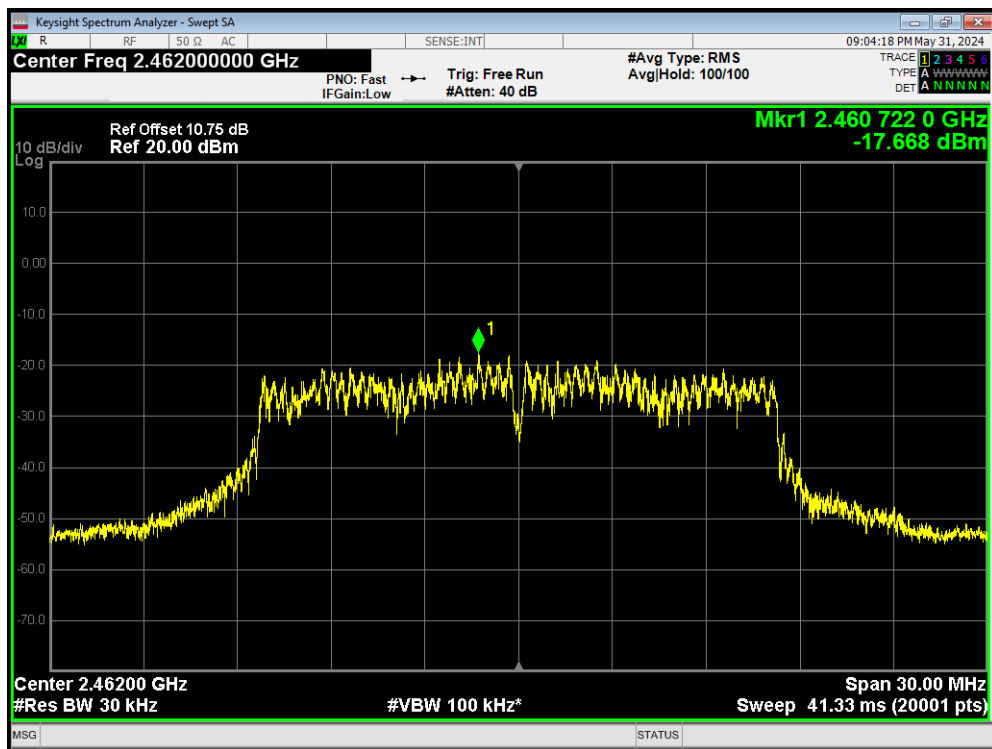


PSD 802.11n(HT20) 2412MHz

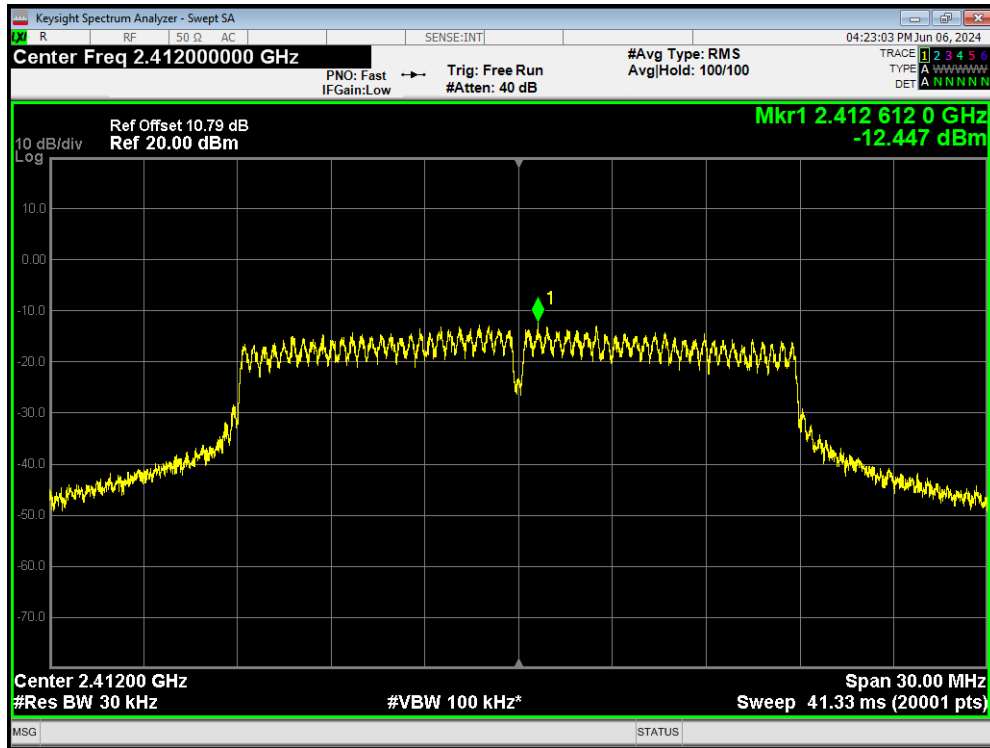


PSD 802.11n(HT20) 2417MHz

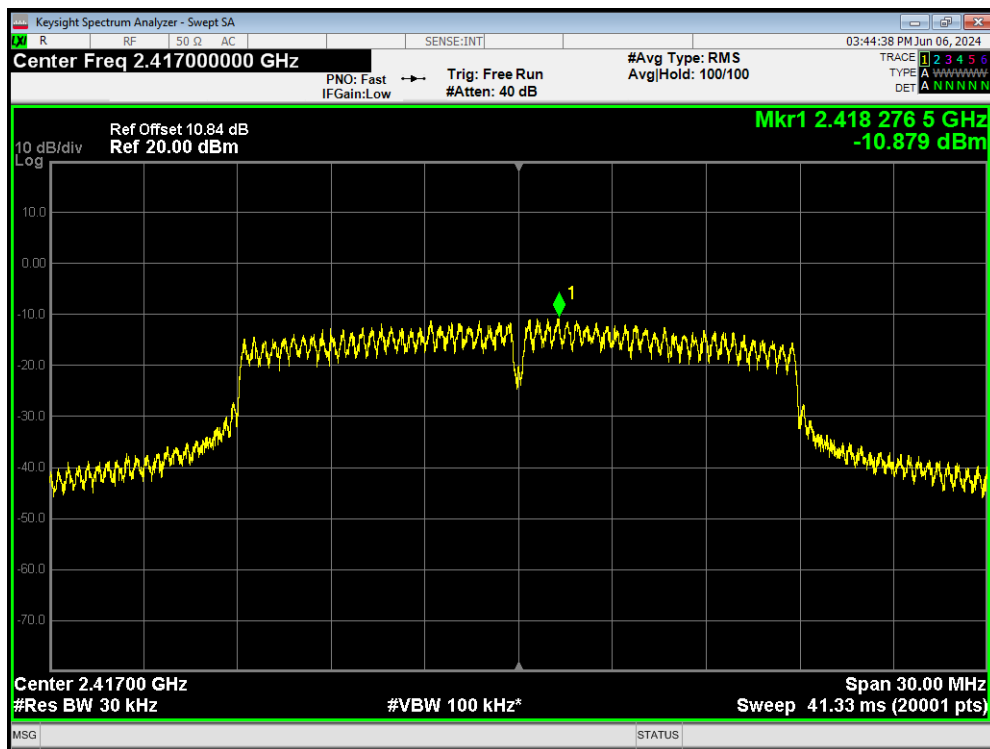


PSD 802.11n(HT20) 2437MHz

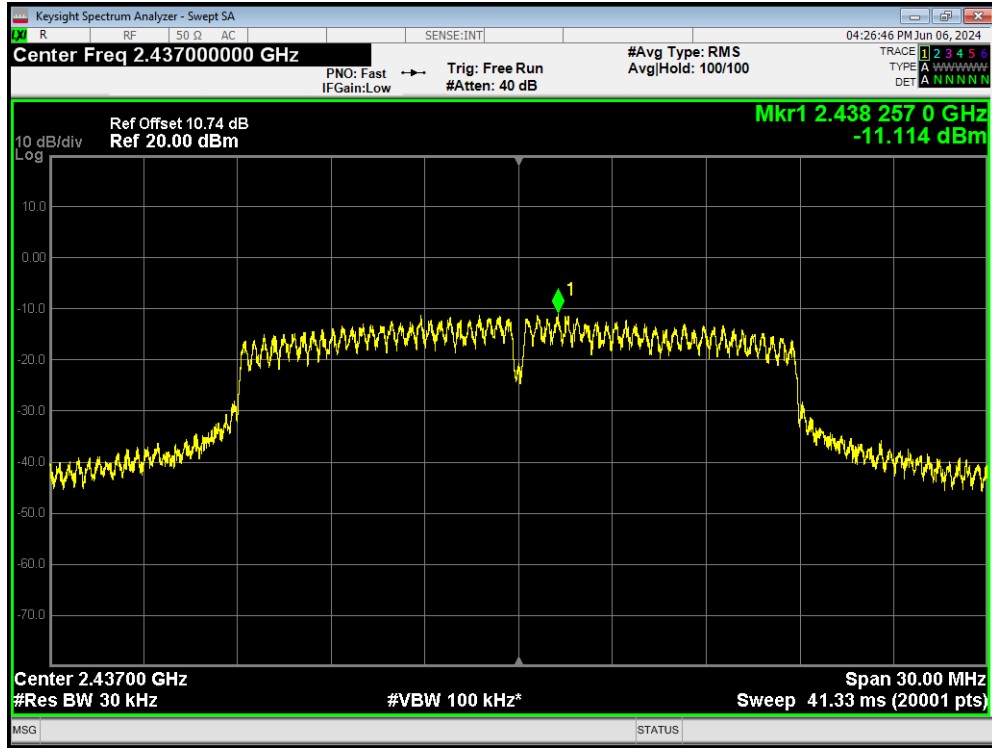


PSD 802.11n(HT20) 2452MHz

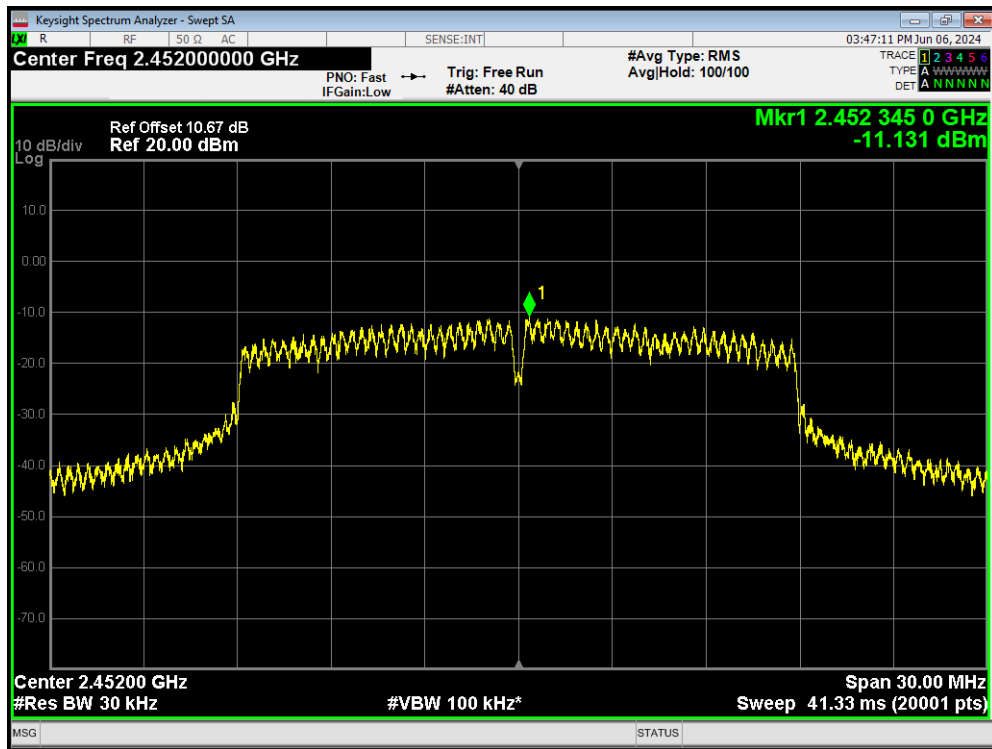


PSD 802.11n(HT20) 2457MHz

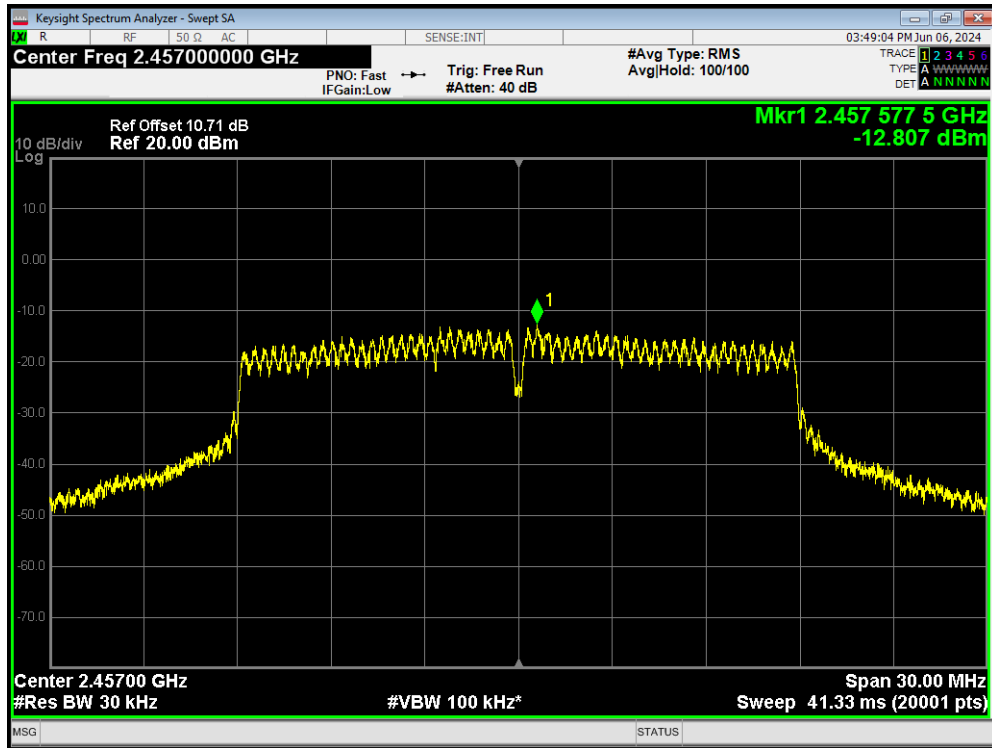


PSD 802.11n(HT20) 2462MHz

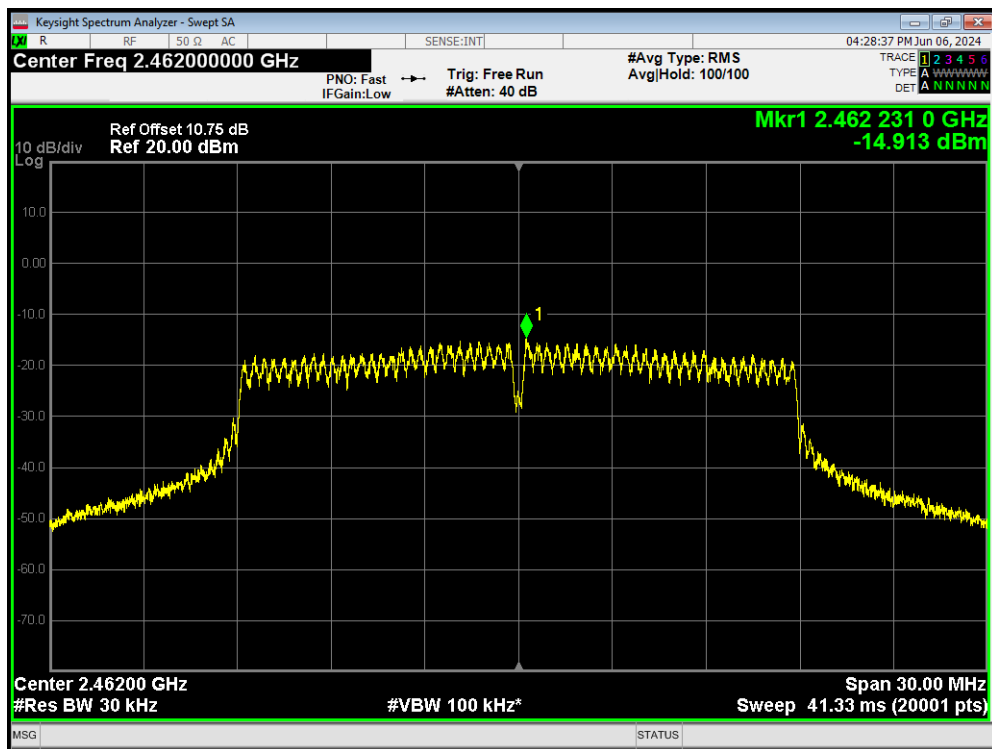


PSD 802.11n(HT40) 2422MHz

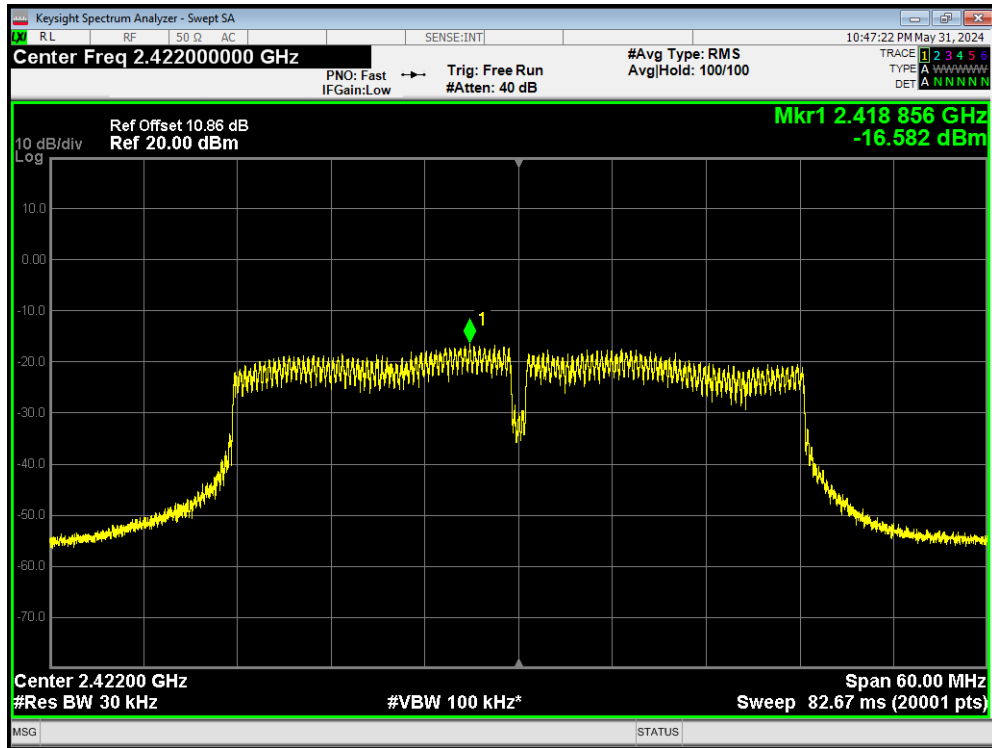


PSD 802.11n(HT40) 2427MHz

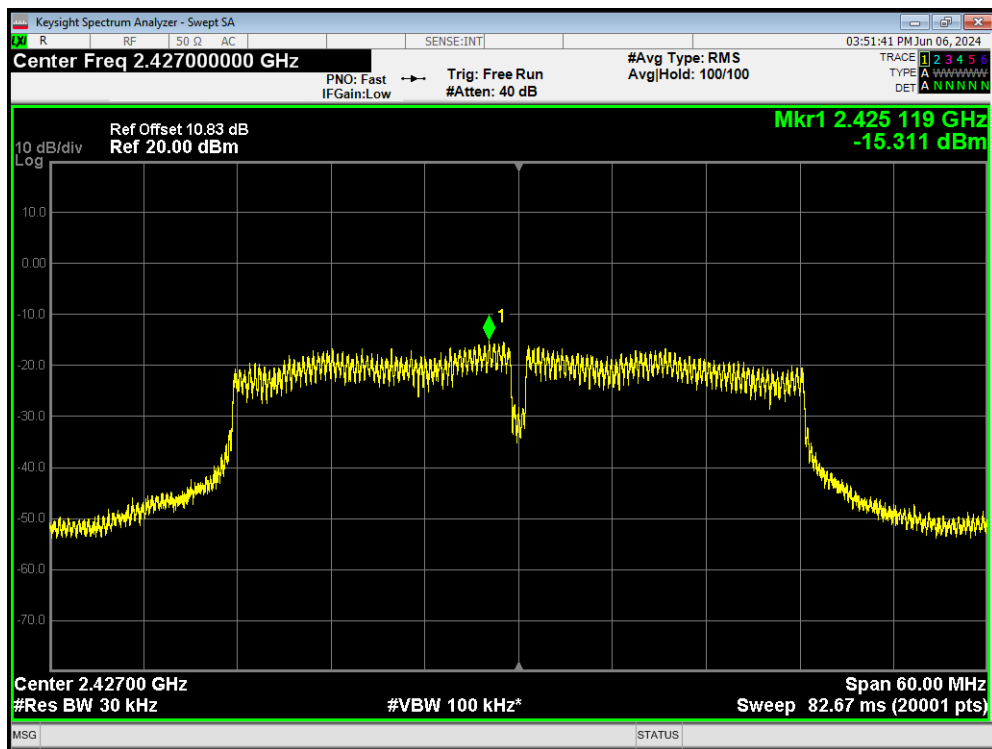


PSD 802.11n(HT40) 2432MHz

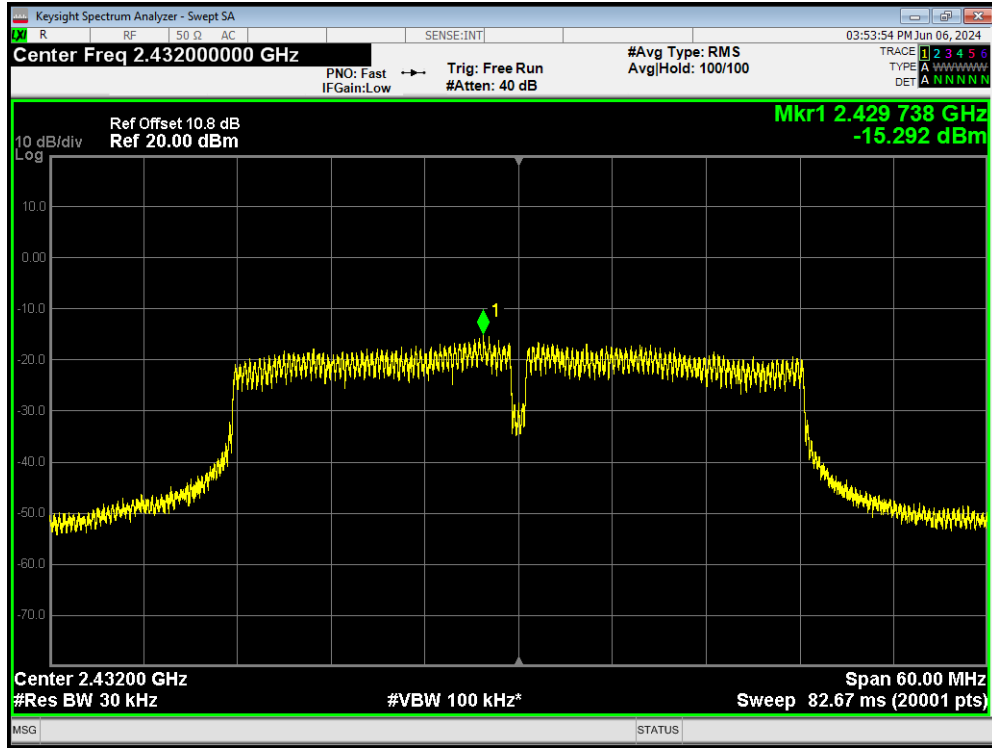


PSD 802.11n(HT40) 2437MHz

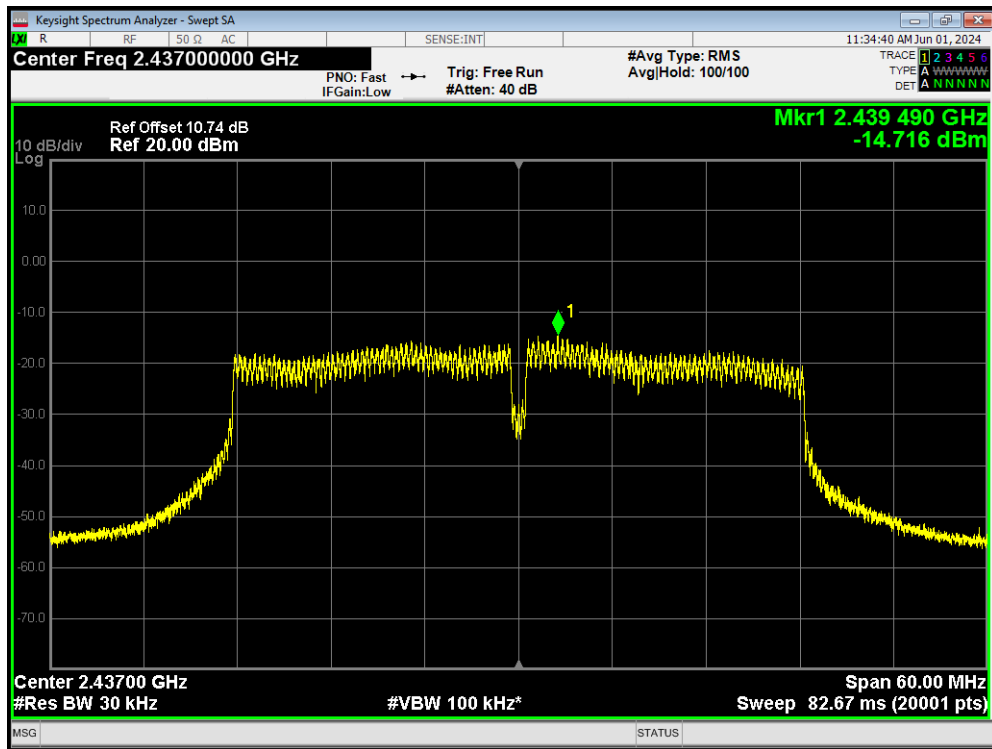


PSD 802.11n(HT40) 2442MHz

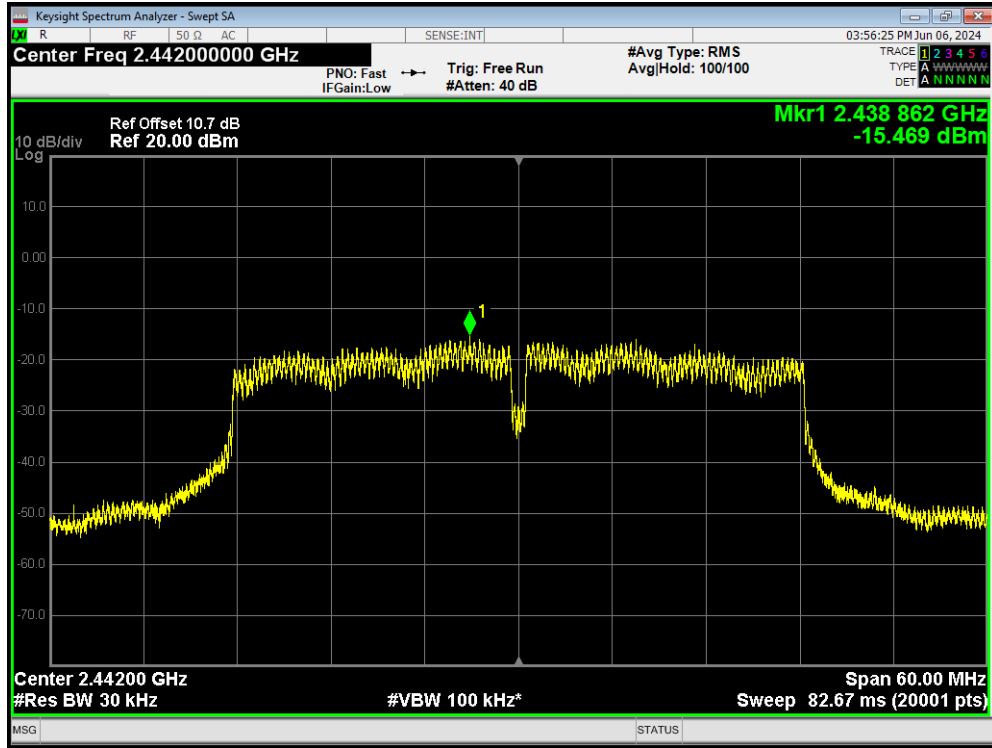


PSD 802.11n(HT40) 2447MHz

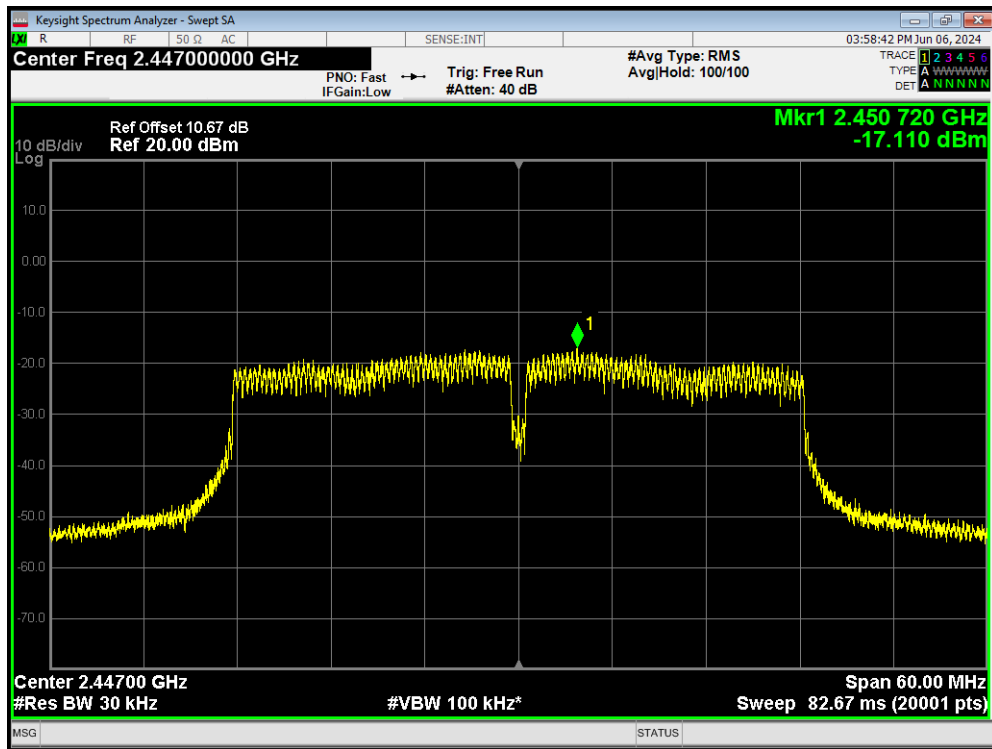


PSD 802.11n(HT40) 2452MHz

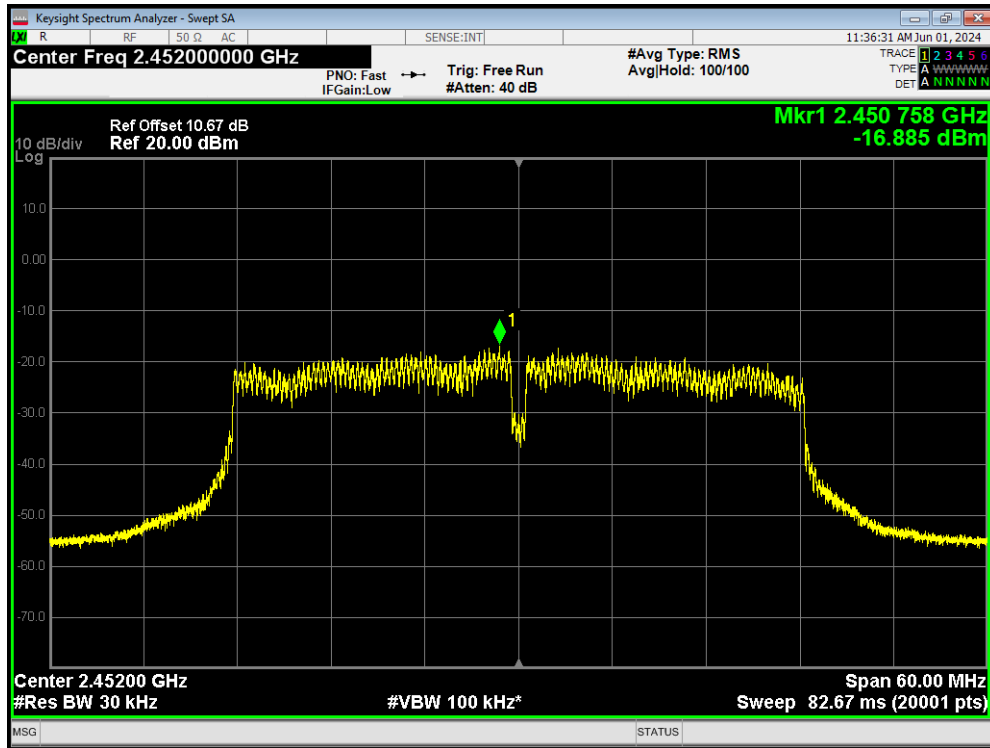


PSD Bluetooth LE (1M) 2402MHz

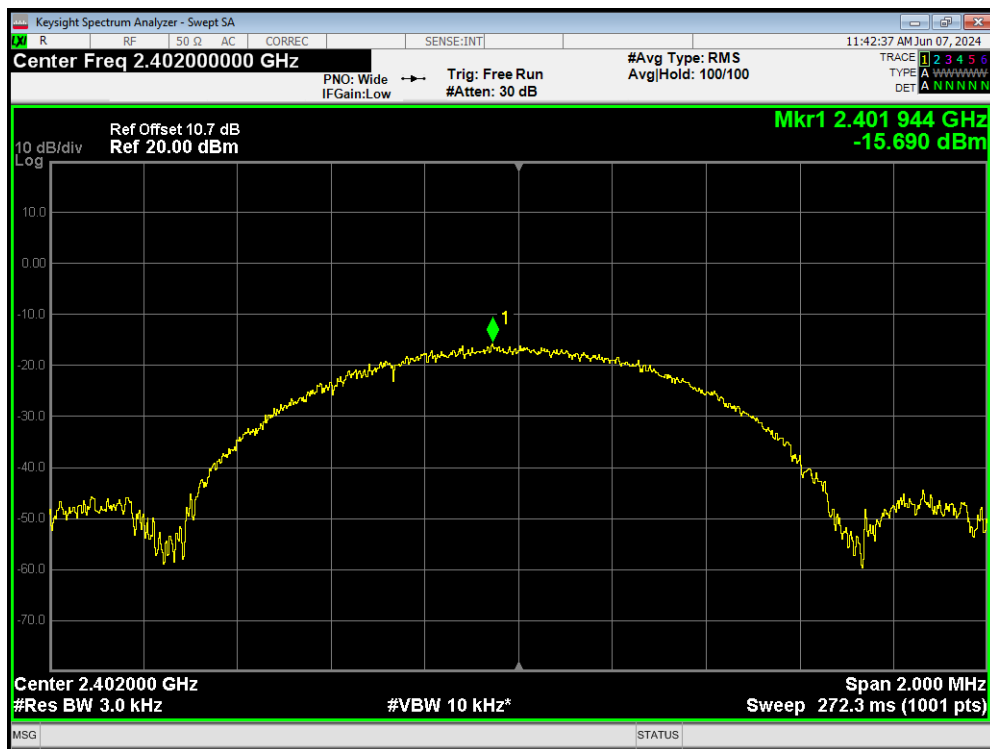


PSD Bluetooth LE (1M) 2440MHz

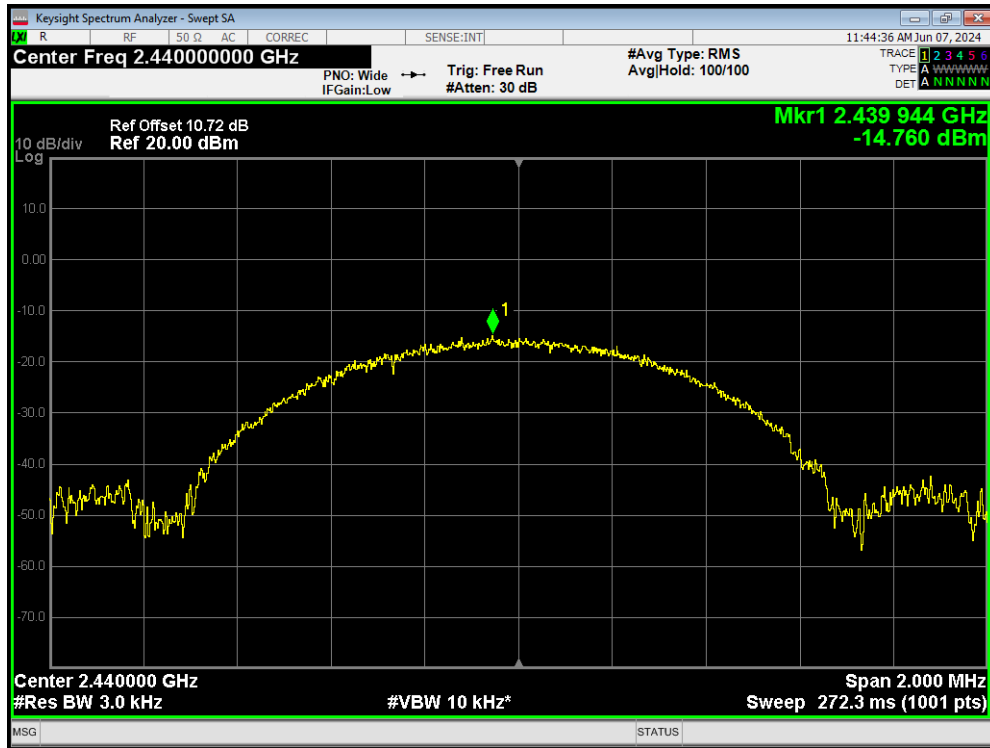


PSD Bluetooth LE (1M) 2480MHz

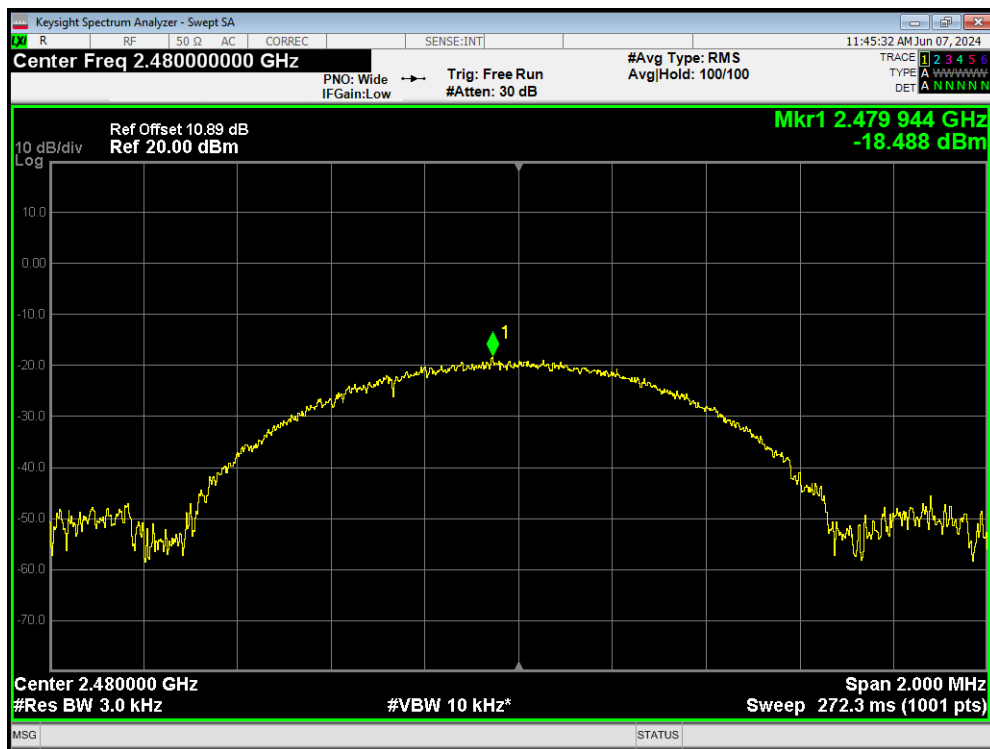


PSD Bluetooth LE (2M) 2402MHz

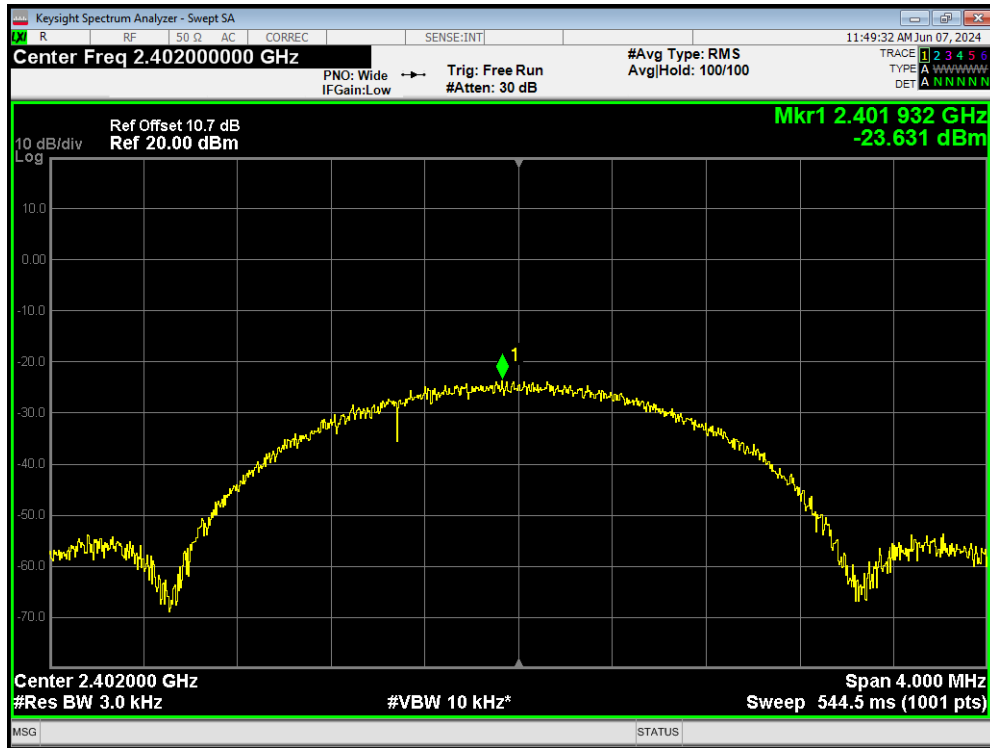


PSD Bluetooth LE (2M) 2440MHz

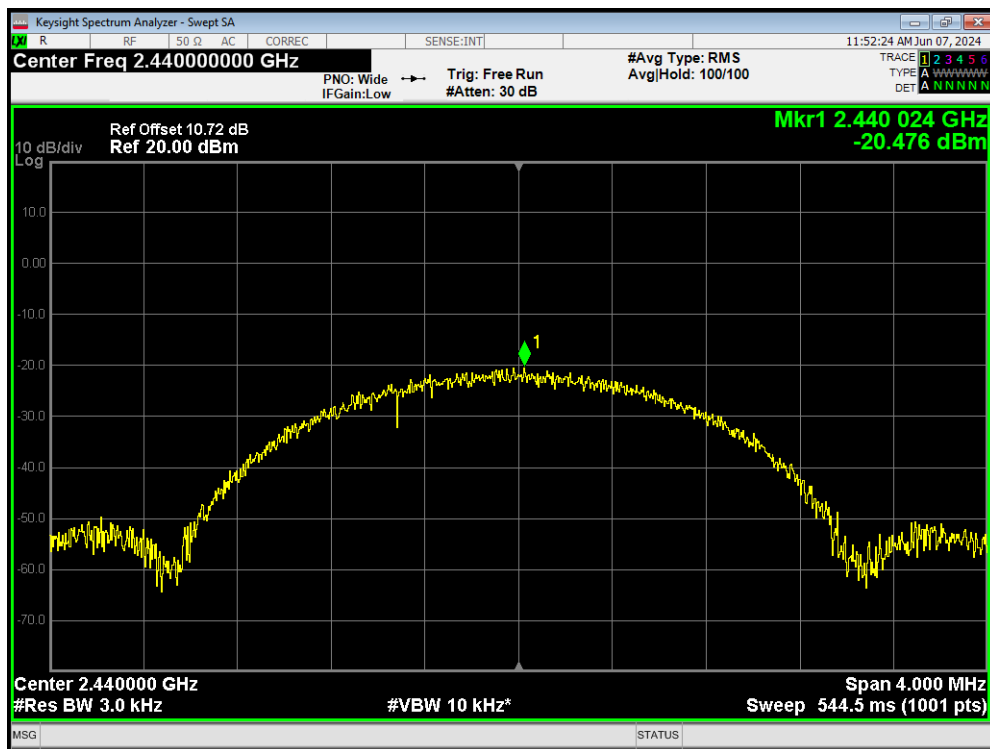


PSD Bluetooth LE (2M) 2480MHz

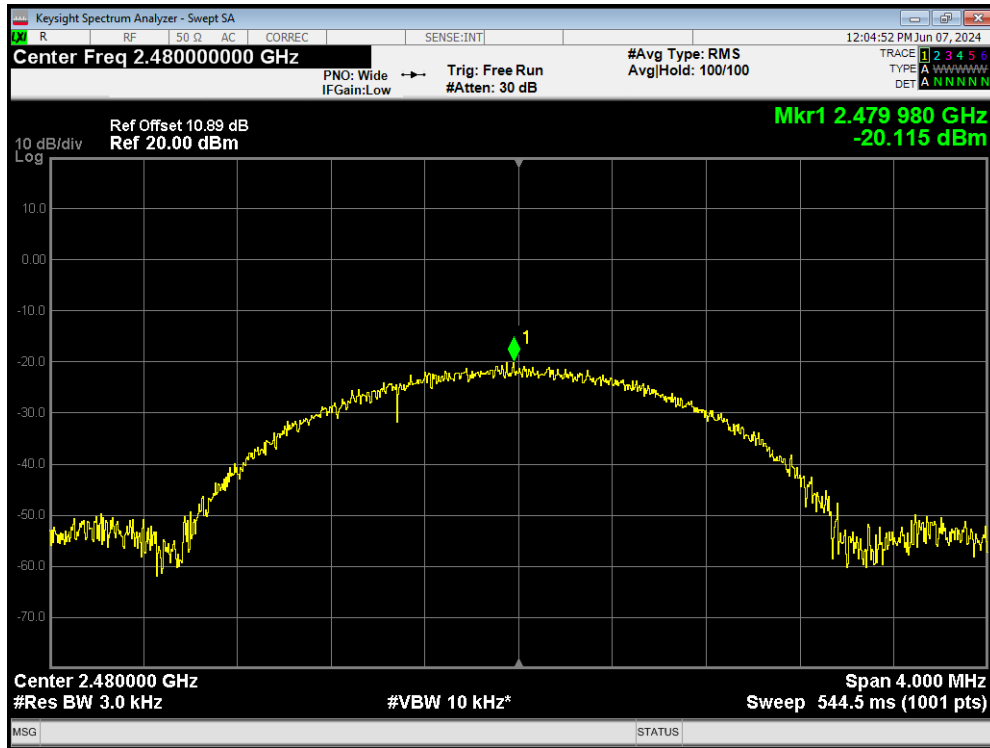


PSD Bluetooth LE (S=2) 2402MHz

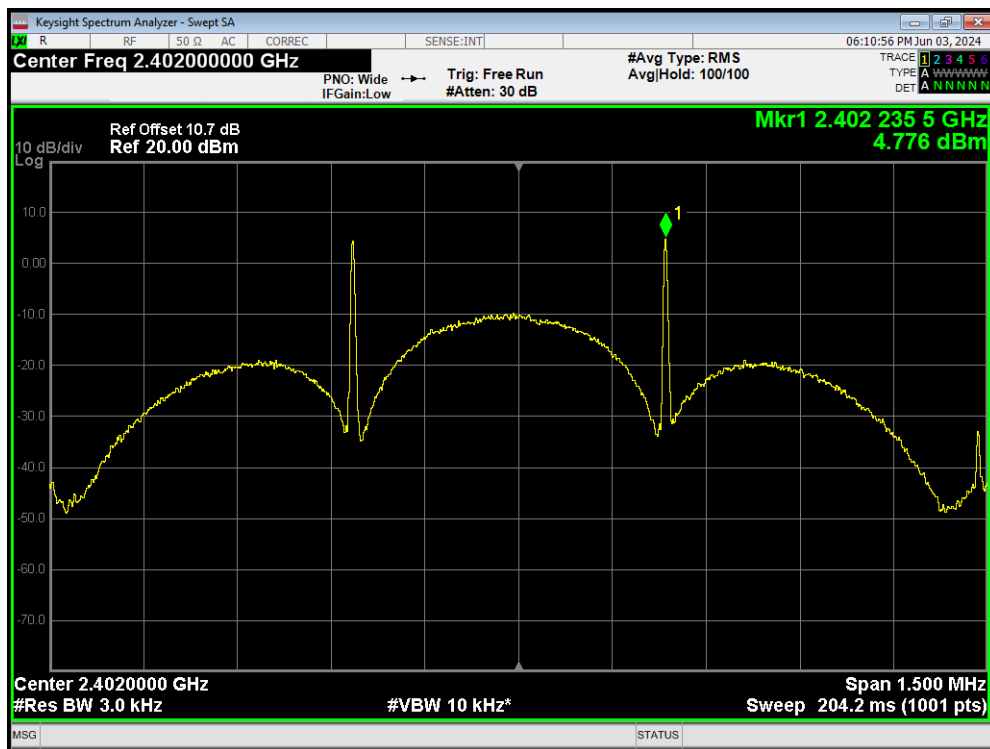


PSD Bluetooth LE (S=2) 2440MHz

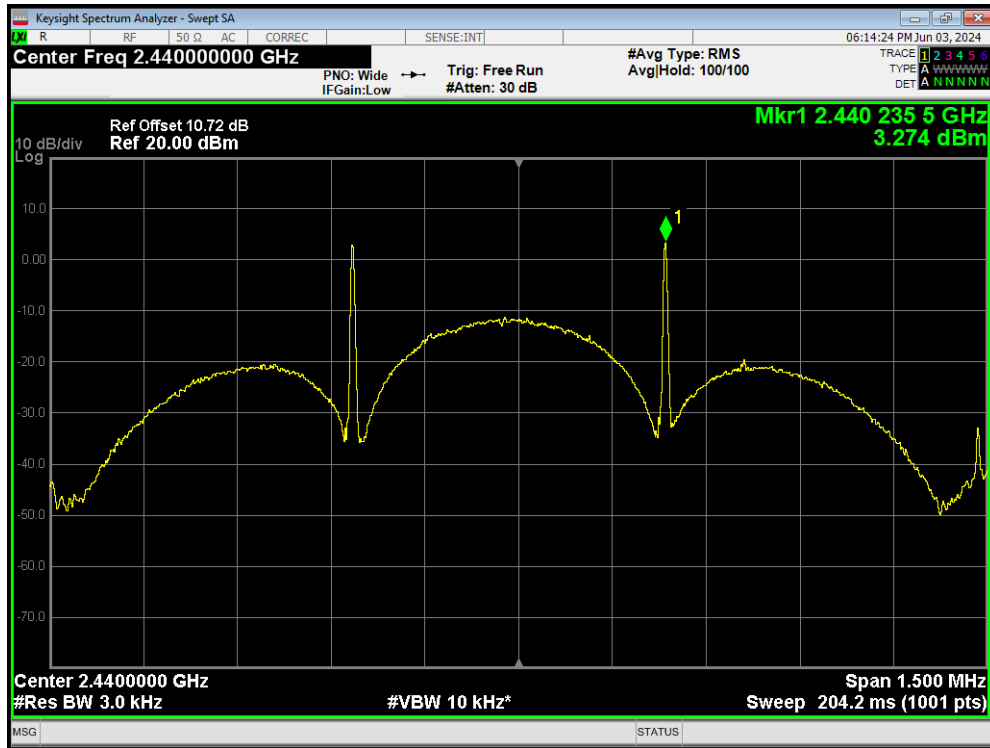


PSD Bluetooth LE (S=2) 2480MHz

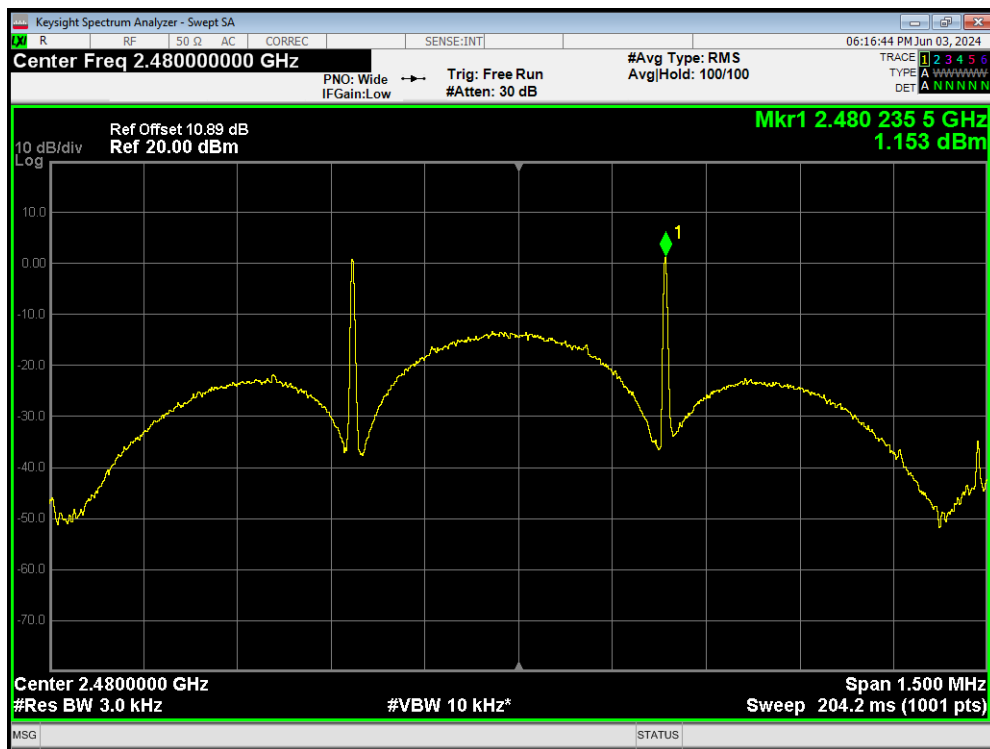


PSD Bluetooth LE (S=8) 2402MHz

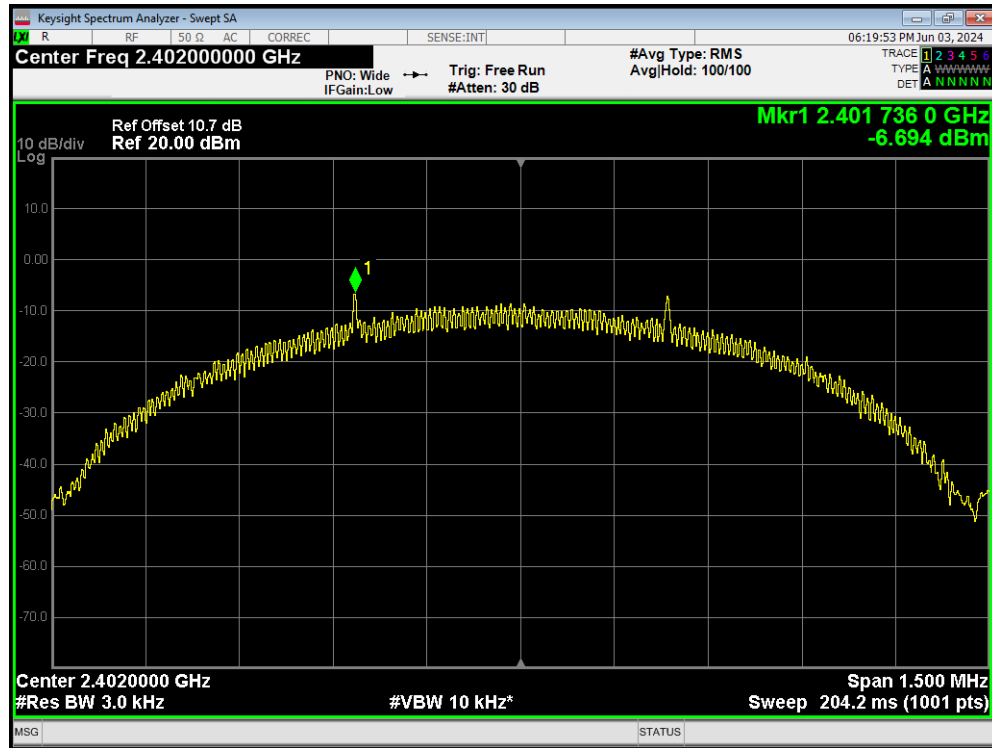

PSD Bluetooth LE (S=8) 2440MHz

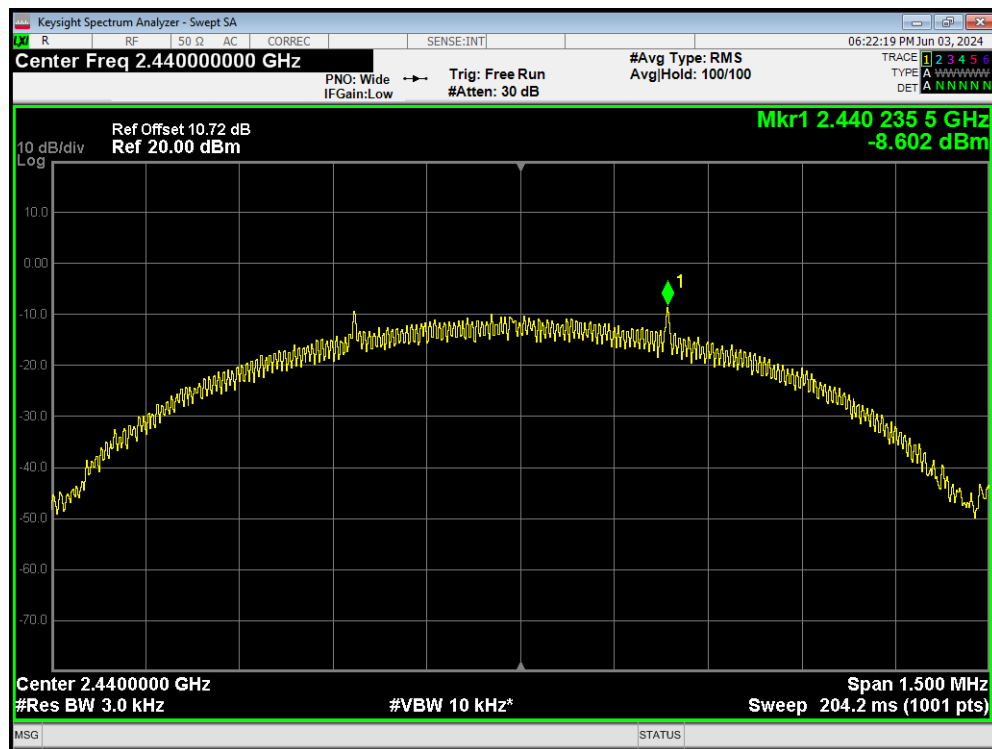

PSD Bluetooth LE (S=8) 2480MHz

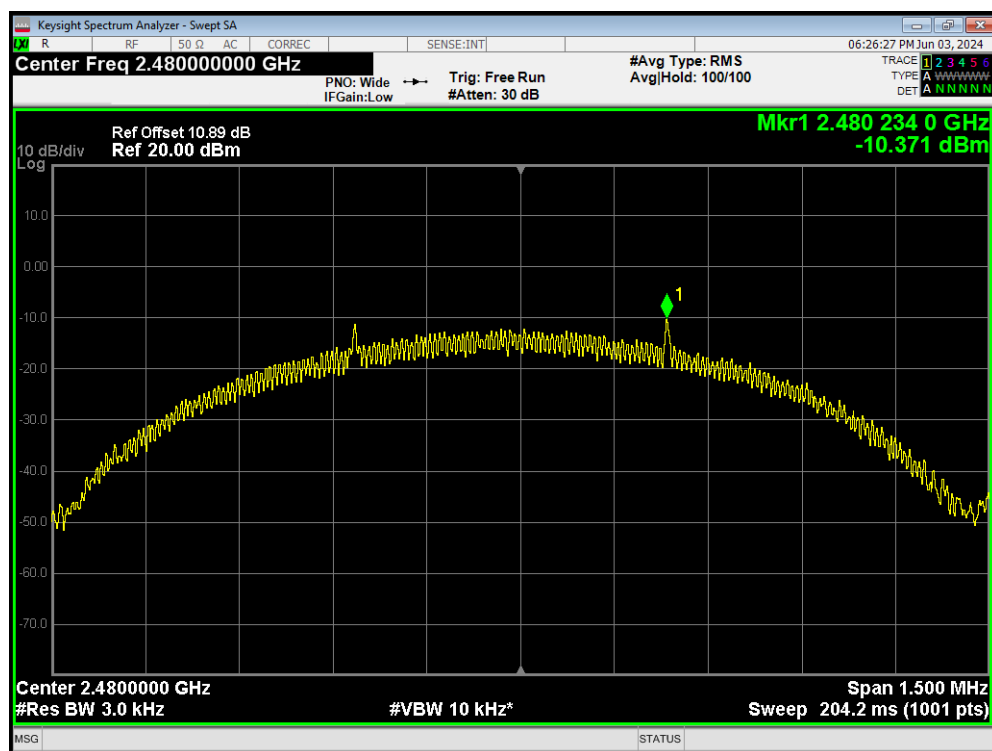

5.5. Spurious RF Conducted Emissions

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup



Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB."

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit(dBm)
802.11b	2412	7.48	-22.52
	2437	7.15	-22.85
	2462	7.02	-22.98
802.11g	2412	4.57	-25.43
	2417	2.53	-27.47
	2422	4.64	-25.36
	2437	2.71	-27.29
	2452	3.13	-26.87
	2457	0.50	-29.50
	2462	0.48	-29.52
802.11n HT20	2412	3.61	-26.39
	2417	4.43	-25.57
	2437	4.36	-25.64
	2452	3.84	-26.16
	2457	1.22	-28.78
	2462	-1.09	-31.09
802.11n HT40	2422	0.51	-29.49
	2427	0.53	-29.47
	2432	0.89	-29.11
	2437	-1.18	-31.18
	2442	-1.83	-31.83
	2447	-0.26	-30.26
	2452	-0.91	-30.91
802.11ax HE20	2412	1.69	-28.31
	2417	5.46	-24.54
	2437	4.62	-25.38
	2452	5.67	-24.33
	2457	3.88	-26.12
	2462	2.23	-27.77
802.11ax HE40	2422	-1.32	-31.32
	2427	1.01	-28.99
	2437	-0.64	-30.64
	2442	0.75	-29.25
	2447	-2.66	-32.66
	2452	-1.41	-31.41

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit(dBm)
Bluetooth (Low Energy) (1M)	2402	11.27	-18.73
	2440	9.62	-20.38
	2480	7.84	-22.16
Bluetooth (Low Energy) (2M)	2402	10.75	-19.25
	2440	9.37	-20.63
	2480	7.32	-22.68
Bluetooth (Low Energy) (S=2)	2402	8.69	-21.31
	2440	7.29	-22.71
	2480	5.28	-24.72
Bluetooth (Low Energy) (S=8)	2402	11.85	-18.15
	2440	9.95	-20.05
	2480	8.02	-21.98


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:


Tx. Spurious 802.11ax(HE20) 2412MHz Ref

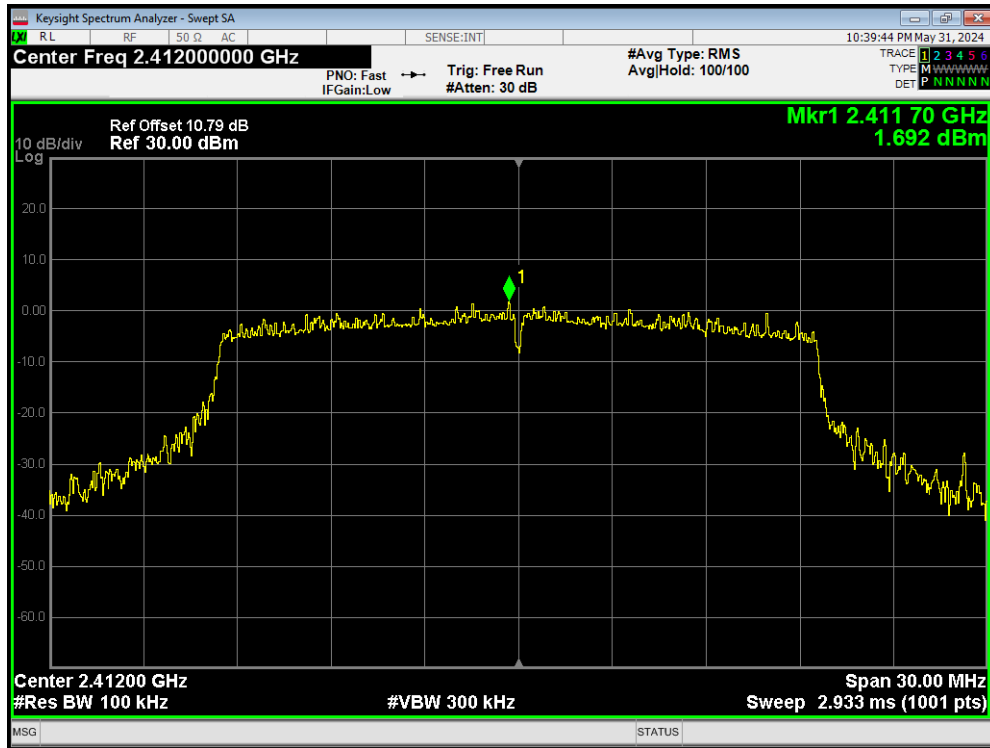


Tx. Spurious 802.11ax(HE20) 2412MHz Emission

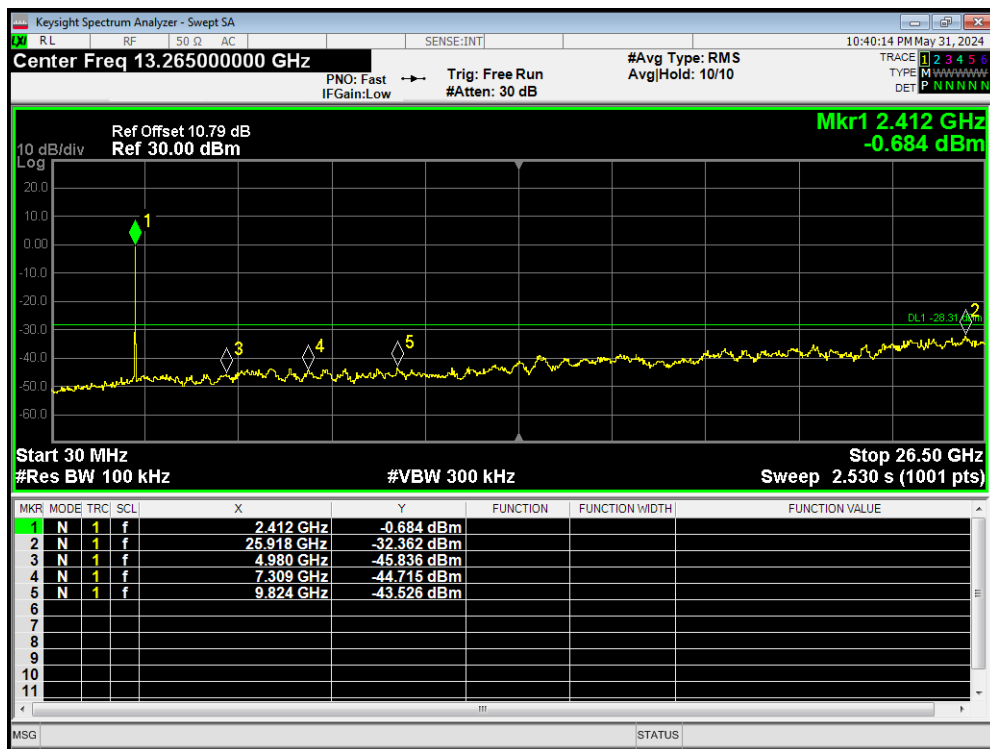


Tx. Spurious 802.11ax(HE20) 2417MHz Ref

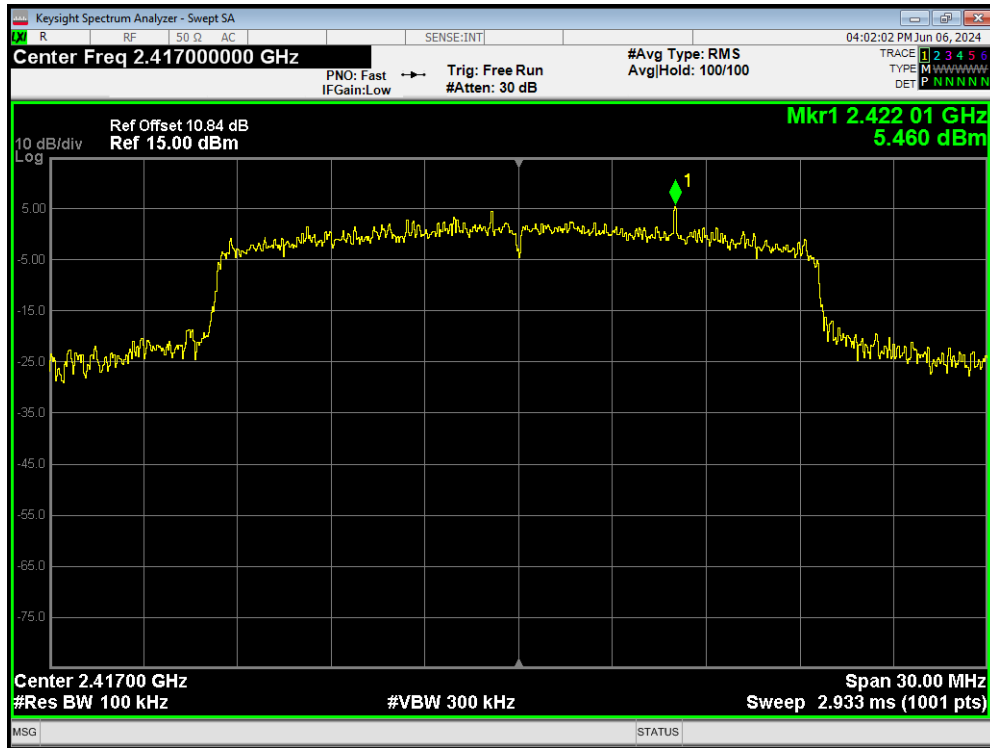


Tx. Spurious 802.11ax(HE20) 2417MHz Emission

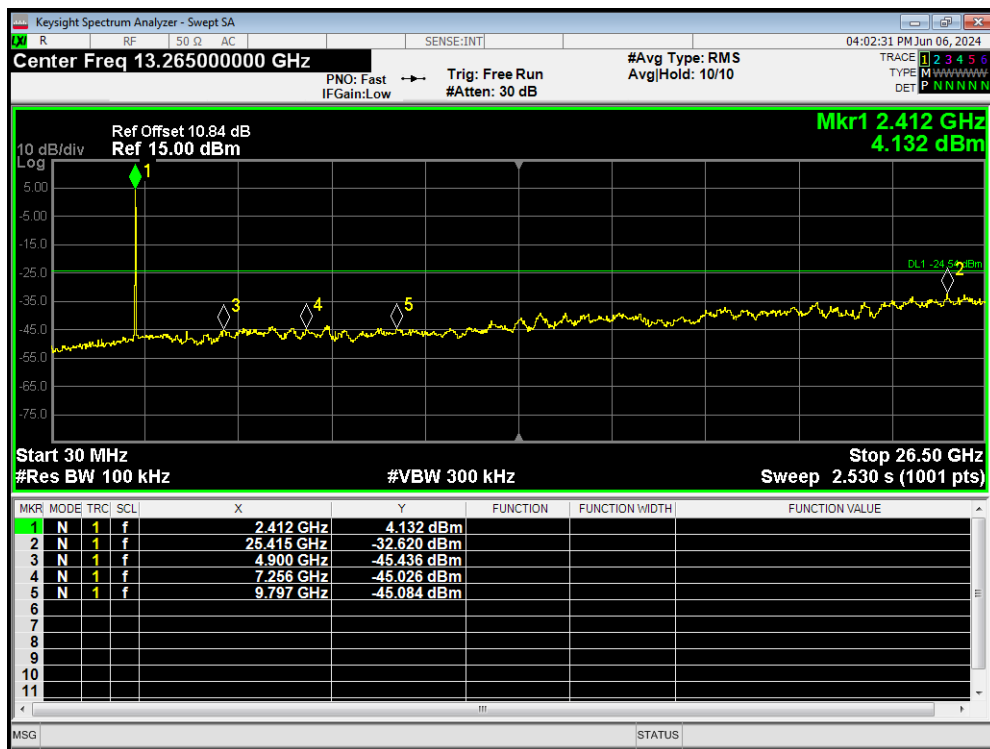


Tx. Spurious 802.11ax(HE20) 2437MHz Ref

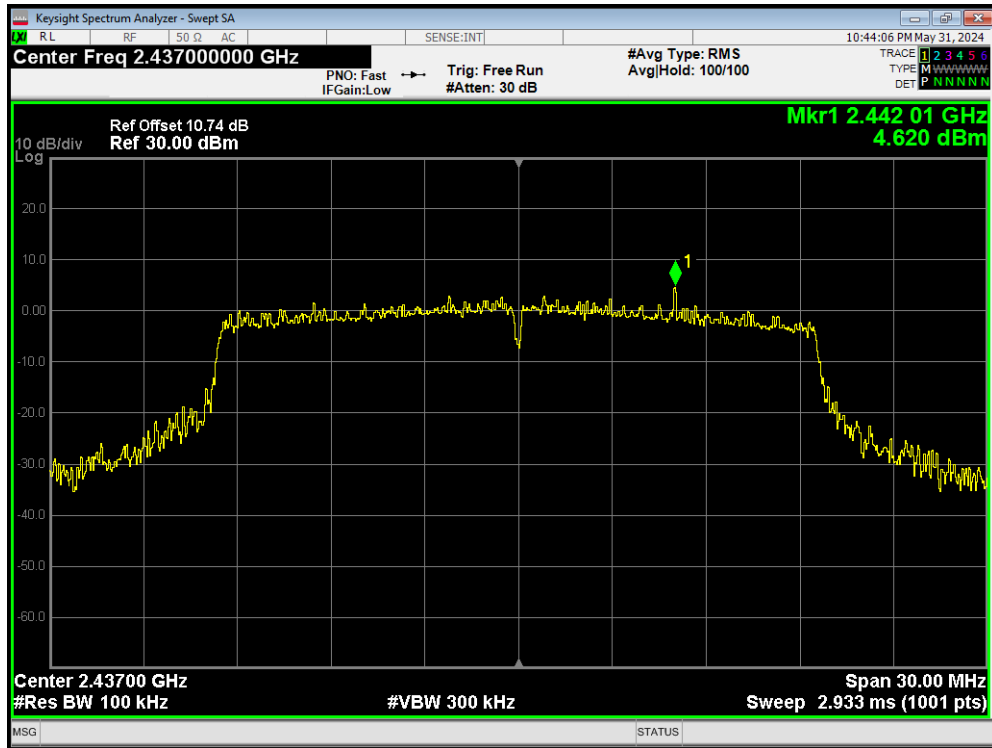


Tx. Spurious 802.11ax(HE20) 2437MHz Emission

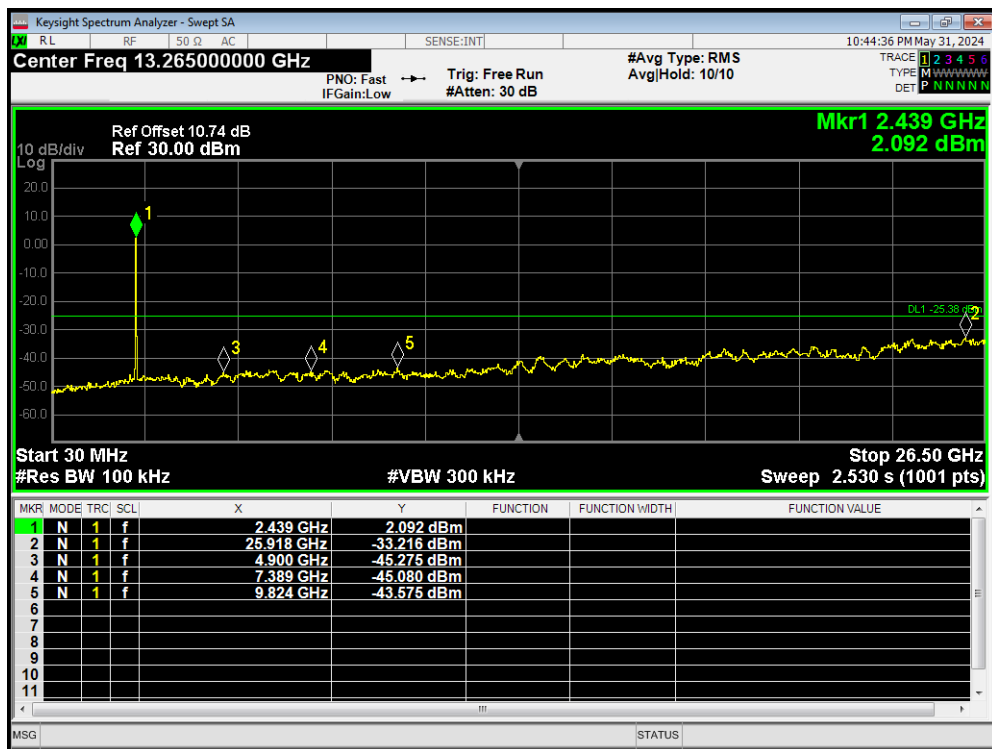


Tx. Spurious 802.11ax(HE20) 2452MHz Ref

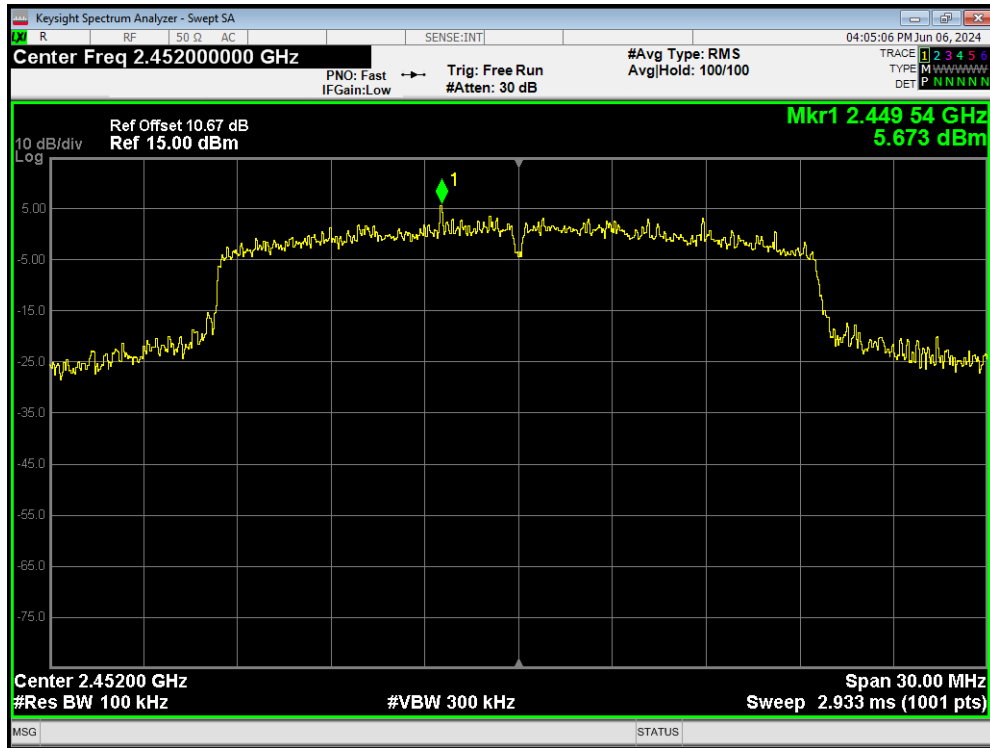


Tx. Spurious 802.11ax(HE20) 2452MHz Emission

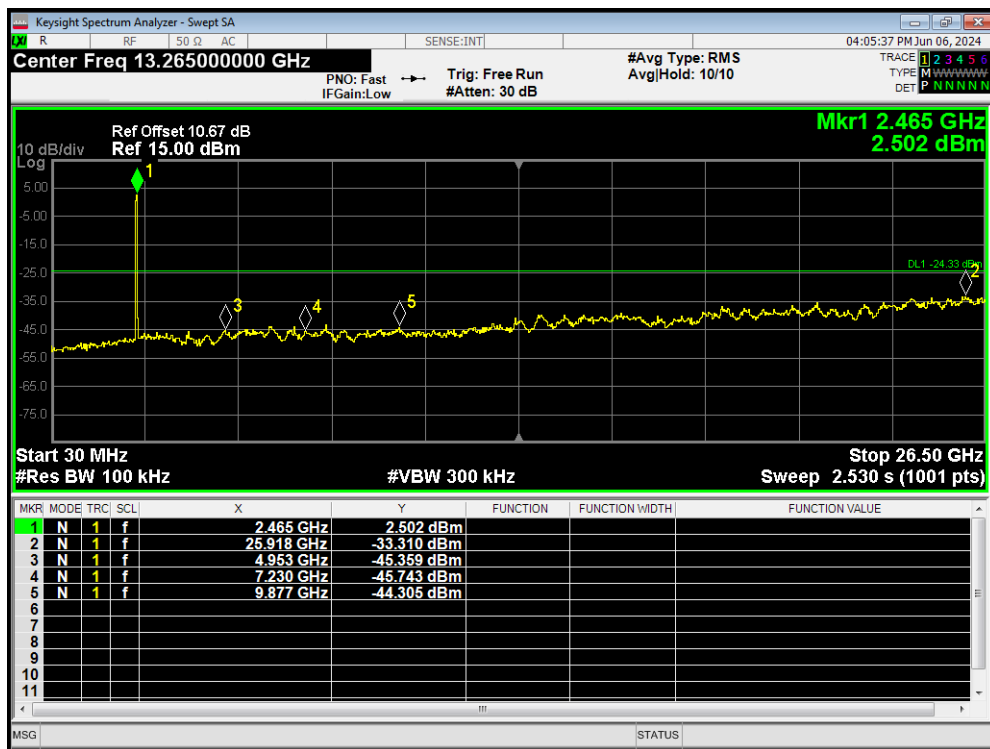


Tx. Spurious 802.11ax(HE20) 2457MHz Ref

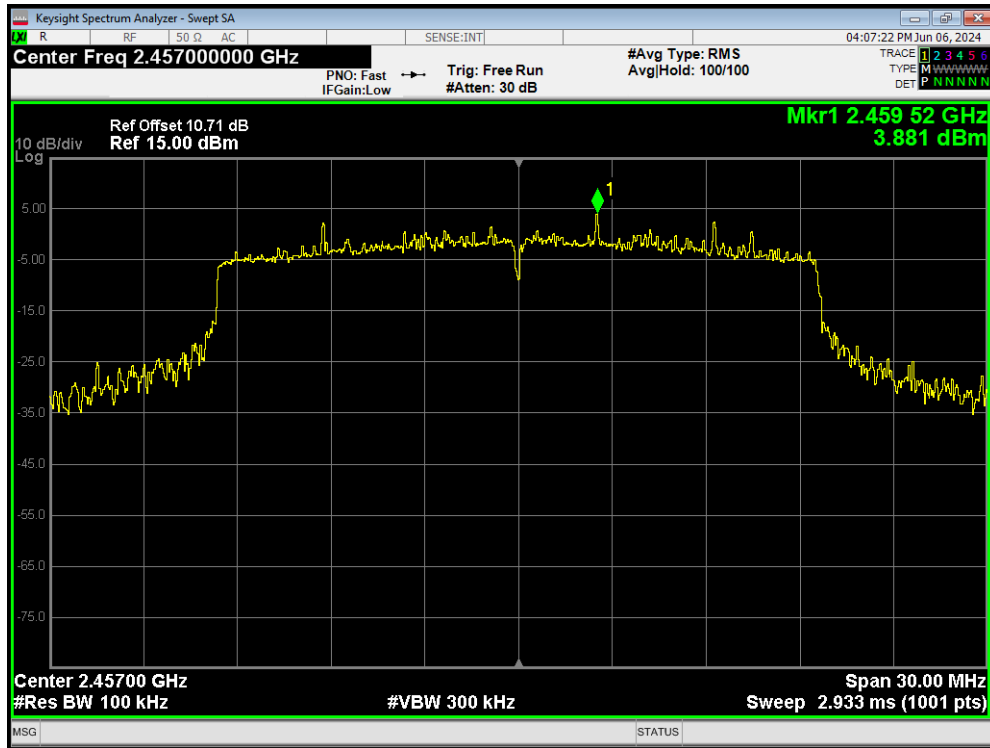


Tx. Spurious 802.11ax(HE20) 2457MHz Emission

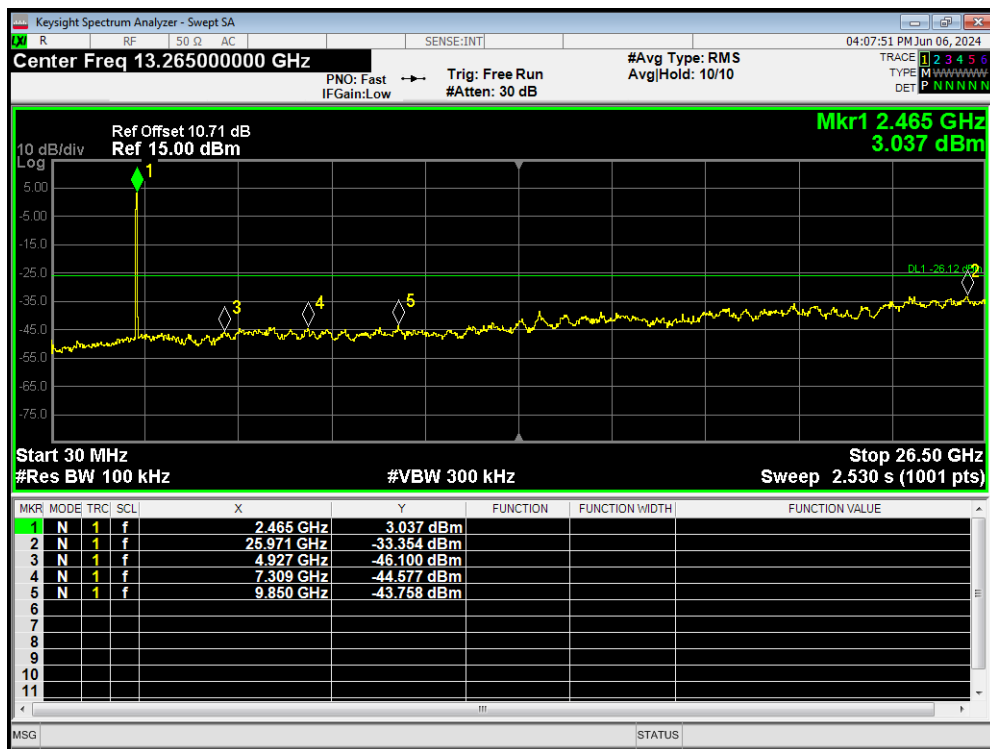


Tx. Spurious 802.11ax(HE20) 2462MHz Ref

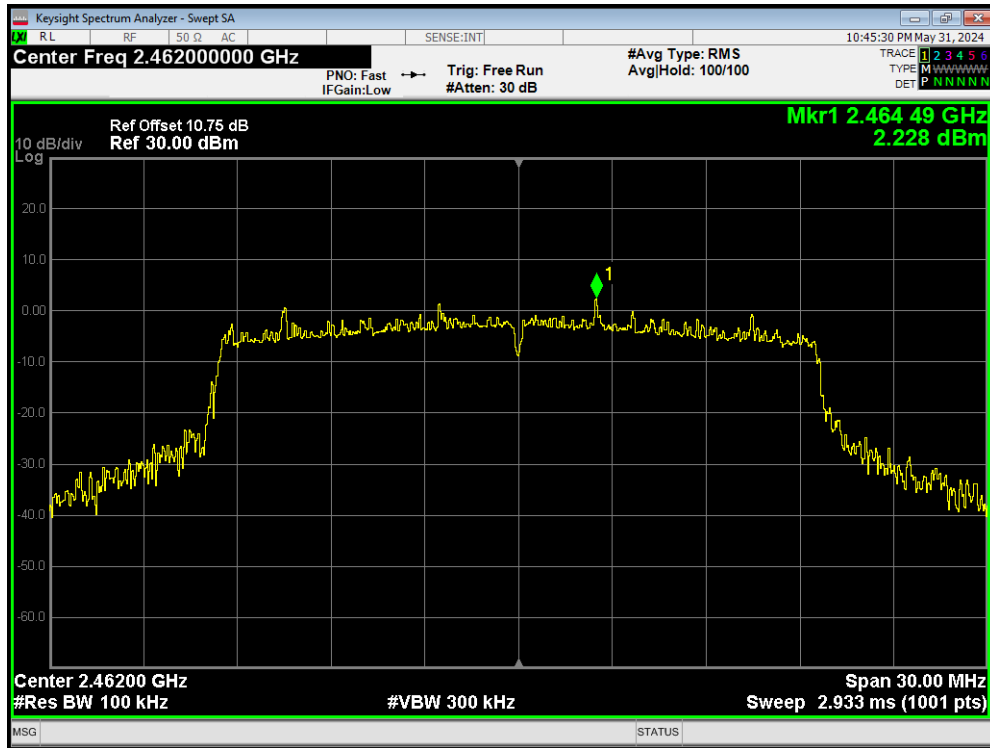


Tx. Spurious 802.11ax(HE20) 2462MHz Emission

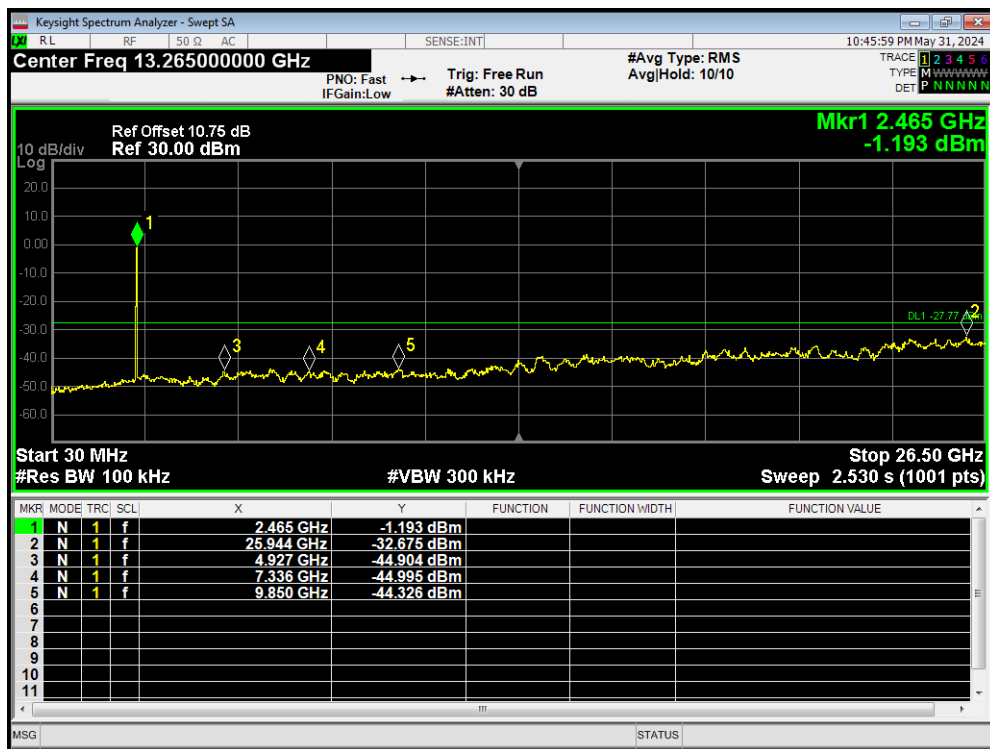


Tx. Spurious 802.11ax(HE40) 2422MHz Ref

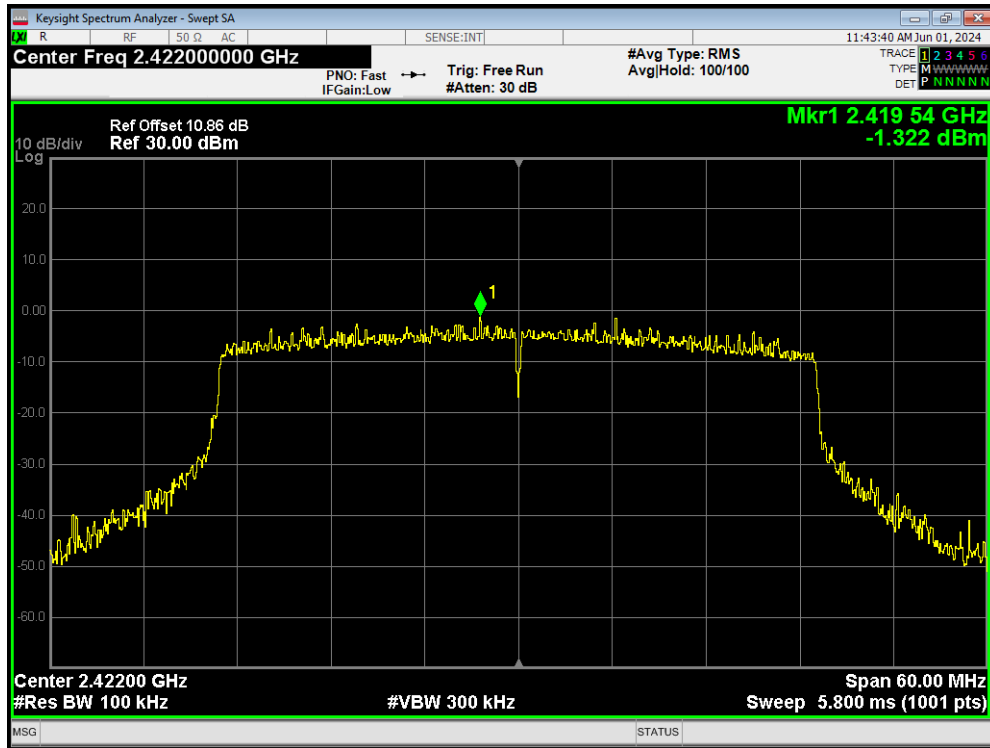

Tx. Spurious 802.11ax(HE40) 2422MHz Emission

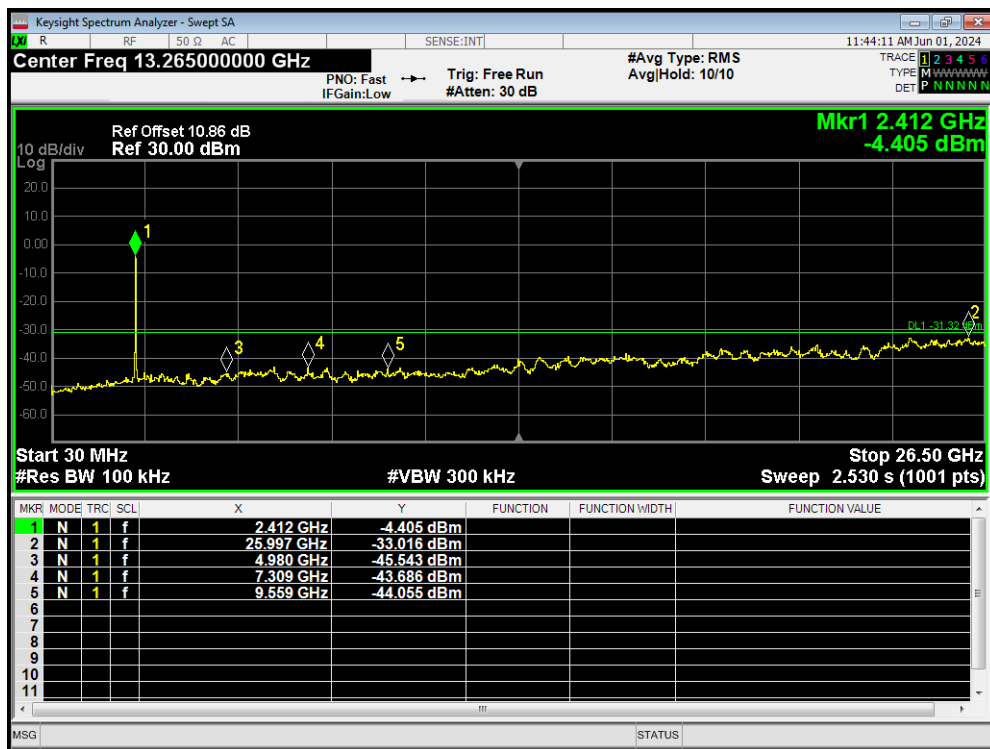

Tx. Spurious 802.11ax(HE40) 2427MHz Ref

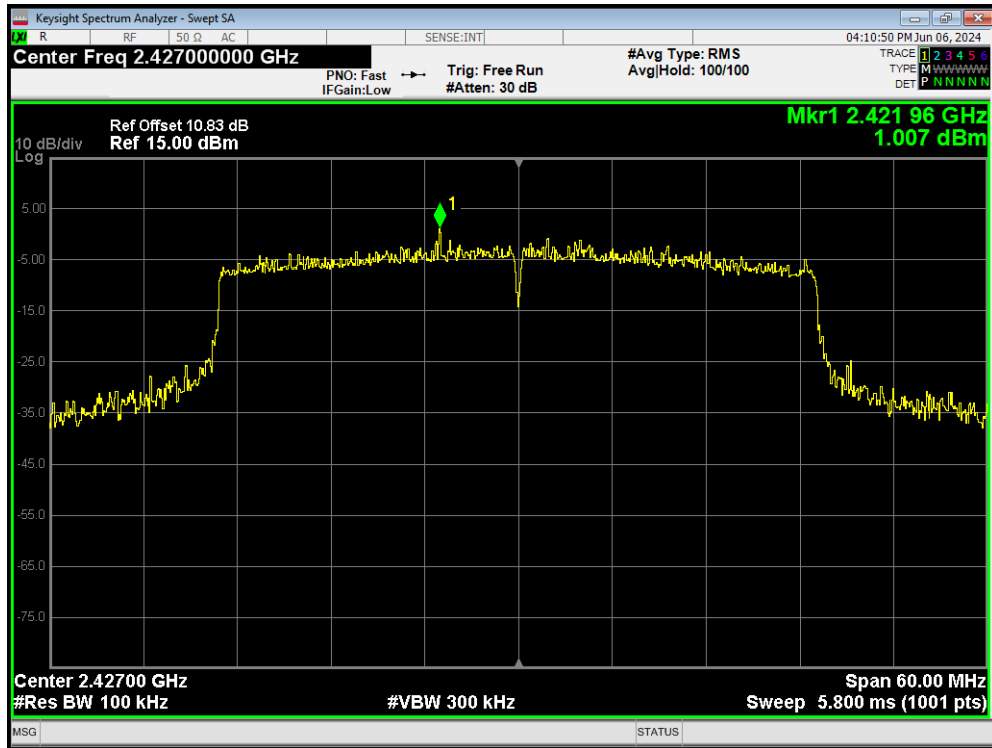

Tx. Spurious 802.11ax(HE40) 2427MHz Emission

