



Product Name: Tablet	Report No: ITEZA2-202300095RF3
Product Model: T30Pro, T30, T30S, T30SE	Security Classification: Open
Version: V1.0	Total Page: 58

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Stone Tang	Randy Lv	Daniel Chen	
Stone Tang	Randy Lv	Daniel chen	

RF TEST REPORT

FCC ID: 2AX4YT30PRO

According to

47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2013

Equipment : Tablet
Model No. : T30Pro, T30, T30S, T30SE
Trademark : DOOGEE
Applicant : Shenzhen DOOGEE Hengtong Technology CO.,LTD
B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22,
Longhua New District, Shenzhen, China

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.
- Test date: 2023/03/01~2023/03/23

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street,
Pingshan District, Shenzhen, China

TEL: +86-0755-27087573

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results -----	5
1.1. Description of Standards and Results -----	5
2. General Information -----	6
2.1. Description of Device (EUT) -----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details -----	7
2.4. Block Diagram of connection between EUT and simulators -----	7
2.5. Test Mode Description -----	8
2.6. Test Conditions -----	9
2.7. Test Facility -----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
3. Spurious Emission -----	12
3.1. Test Limits -----	12
3.2. Test Procedure -----	13
3.3. Test Setup -----	13
3.4. Test Results -----	14
4. Power line Conducted Emission -----	29
4.1. Test Limits -----	29
4.2. Test Procedure -----	29
4.3. Test Setup -----	29
4.4. Test Results -----	30
5. Conducted Maximum Output Power -----	32
5.1. Test limits -----	32
5.2. Test Procedure -----	32
5.3. Test Setup -----	32
5.4. Test Results -----	32
6. Peak Power Spectral Density -----	34
6.1. Test limits -----	34
6.2. Test Procedure -----	34
6.3. Test Setup -----	34
6.4. Test Results -----	35
7. Bandwidth -----	40
7.1. Test limits -----	40
7.2. Test Procedure -----	40
7.3. Test Setup -----	40
7.4. Test Results -----	40
8. Band Edge Check -----	50
8.1. Test limits -----	50
8.2. Test Procedure -----	50
8.3. Test Setup -----	50
8.4. Test Results -----	50
9. Antenna Requirement -----	56
9.1. Standard Requirement -----	56
9.2. Antenna Connected Construction -----	56
9.3. Results -----	56
10. Test setup photo -----	57
10.1. Photos of Radiated emission -----	57
10.2. Photos of Conducted Emission test -----	58

History of this test report

Original Report Issue Date: 2023.03.23

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 ANSI C63.10	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) ANSI C63.10	P
Output Power	FCC Part 15: 15.247(b)(3) ANSI C63.10	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10	P
Power Spectral Density	FCC PART 15:15.247(e) ANSI C63.10	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10	P
Antenna Requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name	: Tablet
Model No.	: T30Pro, T30, T30S, T30SE
DIFF.	: There is no difference except the name of the model. All tests are made with the T30Pro model.
Power supply	: DC 3.8V from battery or DC 11V from adapter

2.4G WIFI :

Operation frequency	: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20 2422MHz~2452MHz for IEEE802.11n/HT40
Channel No.	: 802.11b/802.11g /802.11n(HT20): 11CH 802.11(HT40): 7CH
Modulation type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: Internal antenna, Maximum Gain is 1.29dBi. Antenna information is provided by applicant.
Software version	: DOOGEE-T30-EEA-Android13.0-20230315
Hardware version	: M100TBR110A
Intend use environment	: Residential, commercial and light industrial environment
Note	: /


2.2. Accessories of Device (EUT)

Accessories : Adapter
 Manufacturer : /
 Model : TP303C-US
 Ratings : Input: 100~240V 50/60Hz 0.7A
 Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A, PPS 5-11V=3A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	/	/	/	/	/

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Duty cycle :100%Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		
For IEEE 802.11 n/HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street, Pingshan District, Shenzhen, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Designation Number:	CN1309
Test Firm Registration Number:	825524
Telephone:	+86-0755-27087573

2.8. Measurement Uncertainty

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (9KHz~30MHz)	±2.56dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (Above 1GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7℃
Time	±1.25%

2.9. Test Equipment List

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2023/01/05	2024/01/06
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022.12.11	2024.12.10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022.12.11	2024.12.10
Preamplifier	Emtrace	RP01A	'02017	2023/01/05	2024/01/06
Preamplifier	Schwarzbeck	BBV9744	00143	2023/01/05	2024/01/06
Loop Antenna	ZHINAN	ZN30900A	12024	2023/01/05	2024/01/06
Exposure Level Tester	narda	ELT-400	N-0925	2023/01/05	2024/01/06
Horn Antenna	Schwarzbeck	BBHA9170	00956	2023/01/05	2024/01/06
RF Cable	/	LMR400UF-NMNM-7.0M	/	2023/01/05	2024/01/06
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2023/01/05	2024/01/06
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-102611-mk	2022/11/02	2023/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102915-Bp	2022/11/02	2023/11/01
ISN	Schwarzbeck	ENY81	1309.8510.03	2023/01/05	2024/01/06
ISN	Schwarzbeck	ENY81-CAT6	1309.8526.03-101976-kh	2023/01/05	2024/01/06
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2023/01/05	2024/01/06
CMW500	ROHDE&SCHWARZ	CMW500	120434	2023/01/05	2024/01/06
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2023/01/05	2024/01/06
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2023/01/05	2024/01/06
vector Signal Generator	KEYSIGHT	N5182B	MY56200458	2023/01/05	2024/01/06
vector Signal Generator	HEWLETT PACKARD	83752A	3610A02458	2023/01/05	2024/01/06
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2023/01/05	2024/01/06

Wireless comprehensive tester	ANRISTU	MT8821C	SN6262170409	2023/01/05	2024/01/06
Wireless comprehensive tester	ANRISTU	MT8000A	SN6262166782	2023/01/05	2024/01/06

3. SPURIOUS EMISSION

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

3.2. Test Procedure


The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation. The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured


If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test setup, please see the test setup photo.


3.3. Test Setup

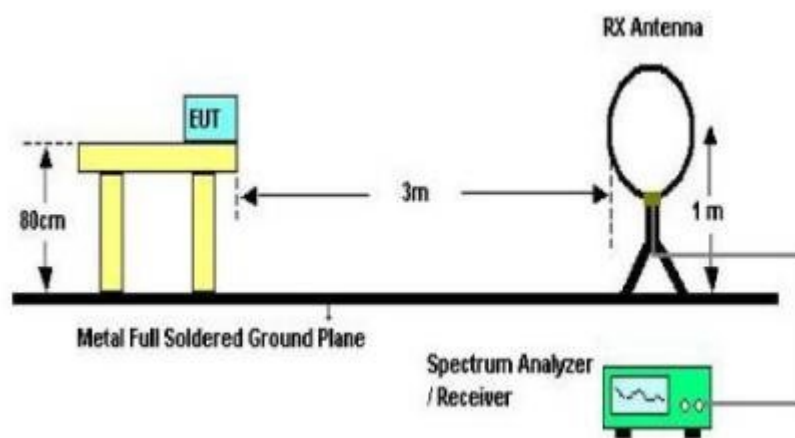

Below 30MHz Test Setup

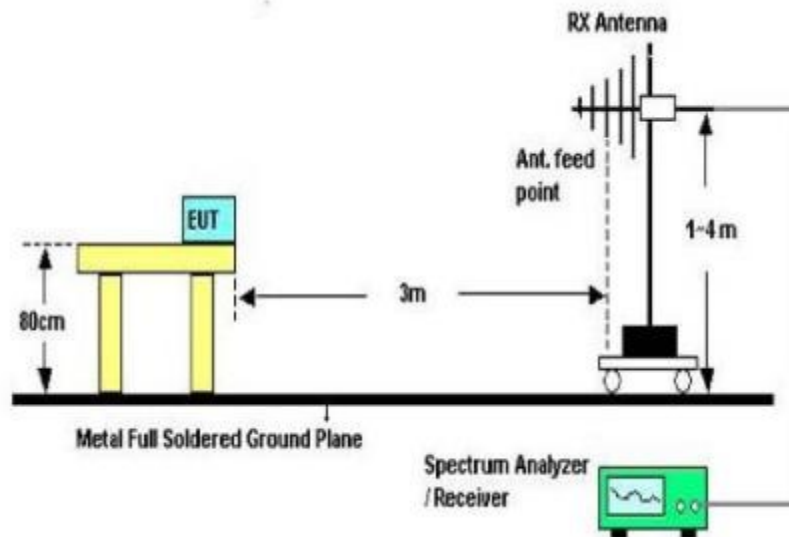

Above 30MHz Test Setup

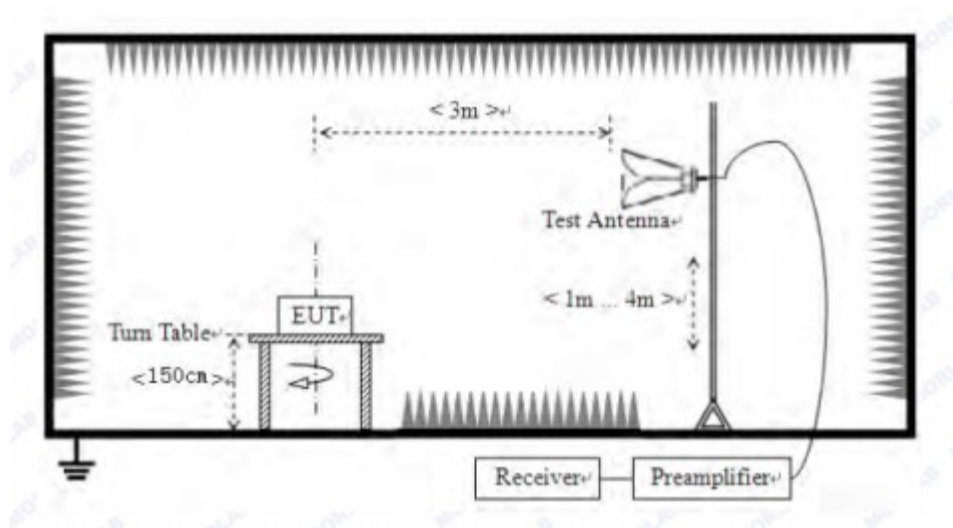

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: Pass

Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.Only show the test data of the worst Channel in this report.


From 30MHz to 1000MHz: Conclusion: Pass

Vertical:

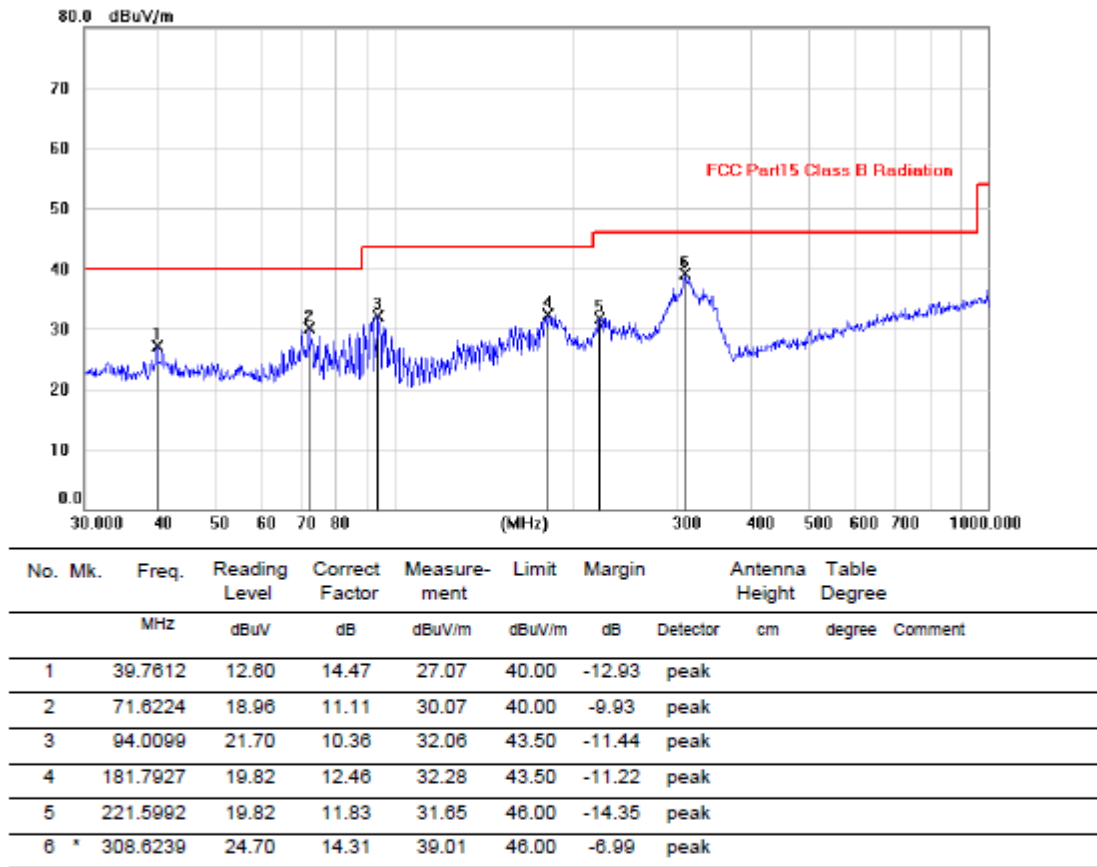

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

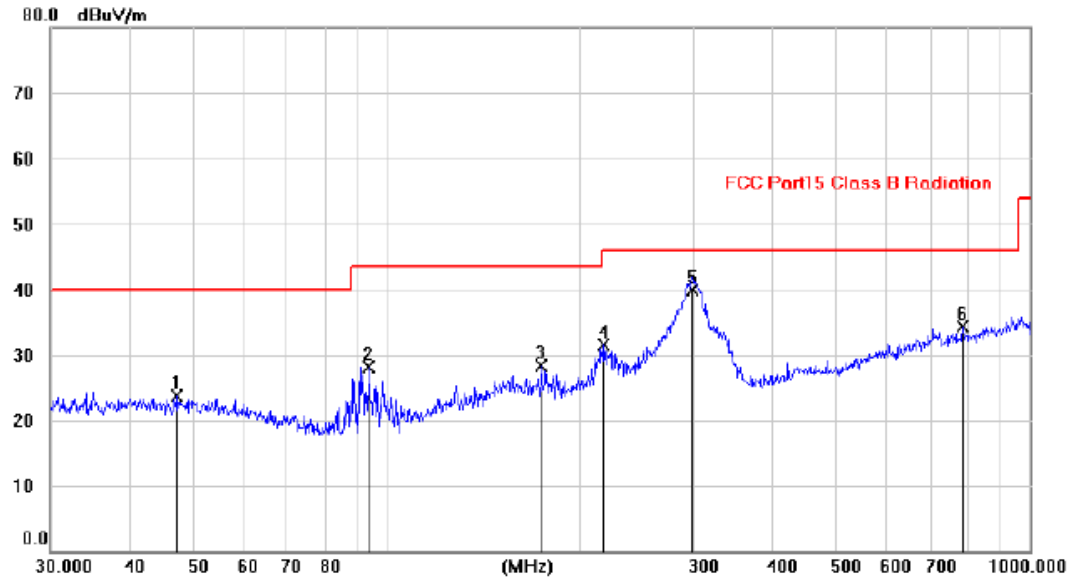Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.3144	9.66	14.07	23.73	40.00	-16.27	peak		
2		93.8781	17.77	10.36	28.13	43.50	-15.37	peak		
3		174.3833	14.81	13.46	28.27	43.50	-15.23	peak		
4		217.8751	19.81	11.60	31.41	46.00	-14.59	peak		
5	*	299.2459	25.82	14.08	39.90	46.00	-6.10	QP		
6		785.7360	11.47	22.81	34.28	46.00	-11.72	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of B mode, Channel 2412MHz was listed in this report.

From 1G-25GHz

Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	48.66	V	33.93	10.18	34.26	58.51	74	-15.49	PK
4824	36.84	V	33.93	10.18	34.26	46.69	54	-7.31	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	47.13	H	33.93	10.18	34.26	56.98	74	-17.02	PK
4824	35.01	H	33.93	10.18	34.26	44.86	54	-9.14	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	49.60	V	33.95	10.20	34.26	59.49	74	-14.51	PK
4874	35.39	V	33.95	10.20	34.26	45.28	54	-8.72	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	48.08	H	33.95	10.20	34.26	57.97	74	-16.03	PK
4874	34.99	H	33.95	10.20	34.26	44.88	54	-9.12	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	47.75	V	33.98	10.22	34.25	57.70	74	-16.30	PK
4924	33.32	V	33.98	10.22	34.25	43.27	54	-10.73	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	46.02	H	33.98	10.22	34.25	55.97	74	-18.03	PK
4924	32.85	H	33.98	10.22	34.25	42.80	54	-11.20	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Test Mode: IEEE 802.11g TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	48.71	V	33.93	10.18	34.26	58.56	74	-15.44	PK
4824	36.84	V	33.93	10.18	34.26	46.69	54	-7.31	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	47.22	H	33.93	10.18	34.26	57.07	74	-16.93	PK
4824	35.76	H	33.93	10.18	34.26	45.61	54	-8.39	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX Mid									
4874	49.44	V	33.95	10.20	34.26	59.33	74	-14.67	PK
4874	35.69	V	33.95	10.20	34.26	45.58	54	-8.42	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	48.12	H	33.95	10.20	34.26	58.01	74	-15.99	PK
4874	34.20	H	33.95	10.20	34.26	44.09	54	-9.91	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11g TX High									
4924	47.82	V	33.98	10.22	34.25	57.77	74	-16.23	PK
4924	33.03	V	33.98	10.22	34.25	42.98	54	-11.02	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	46.26	H	33.98	10.22	34.25	56.21	74	-17.79	PK
4924	32.46	H	33.98	10.22	34.25	42.41	54	-11.59	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: IEEE 802.11n HT20 TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	48.95	V	33.93	10.18	34.26	58.80	74	-15.20	PK
4824	36.32	V	33.93	10.18	34.26	46.17	54	-7.83	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	47.47	H	33.93	10.18	34.26	57.32	74	-16.68	PK
4824	35.76	H	33.93	10.18	34.26	45.61	54	-8.39	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT20 TX Mid									
4874	49.02	V	33.95	10.20	34.26	58.91	74	-15.09	PK
4874	35.14	V	33.95	10.20	34.26	45.03	54	-8.97	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	48.90	H	33.95	10.20	34.26	58.79	74	-15.21	PK
4874	34.22	H	33.95	10.20	34.26	44.11	54	-9.89	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT20 TX High									
4924	47.91	V	33.98	10.22	34.25	57.86	74	-16.14	PK
4924	33.28	V	33.98	10.22	34.25	43.23	54	-10.77	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	46.60	H	33.98	10.22	34.25	56.55	74	-17.45	PK
4924	32.15	H	33.98	10.22	34.25	42.10	54	-11.90	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Test Mode: IEEE 802.11n HT40 TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844	48.78	V	33.93	10.18	34.26	58.63	74	-15.37	PK
4844	36.56	V	33.93	10.18	34.26	46.41	54	-7.59	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
4844	47.88	H	33.93	10.18	34.26	57.73	74	-16.27	PK
4844	35.30	H	33.93	10.18	34.26	45.15	54	-8.85	AV
7266	/	/	/	/	/	/	/	/	/
9688	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX Mid									
4874	49.74	V	33.95	10.20	34.26	59.63	74	-14.37	PK
4874	35.40	V	33.95	10.20	34.26	45.29	54	-8.71	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	48.15	H	33.95	10.20	34.26	58.04	74	-15.96	PK
4874	34.66	H	33.95	10.20	34.26	44.55	54	-9.45	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11n HT40 TX High									
4904	47.35	V	33.98	10.22	34.25	57.30	74	-16.70	PK
4904	33.12	V	33.98	10.22	34.25	43.07	54	-10.93	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
4904	46.71	H	33.98	10.22	34.25	56.66	74	-17.34	PK
4904	32.05	H	33.98	10.22	34.25	42.00	54	-12.00	AV
7356	/	/	/	/	/	/	/	/	/
9808	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Conducted RF Spurious Emission


11B_Ant1_2412_30~1000

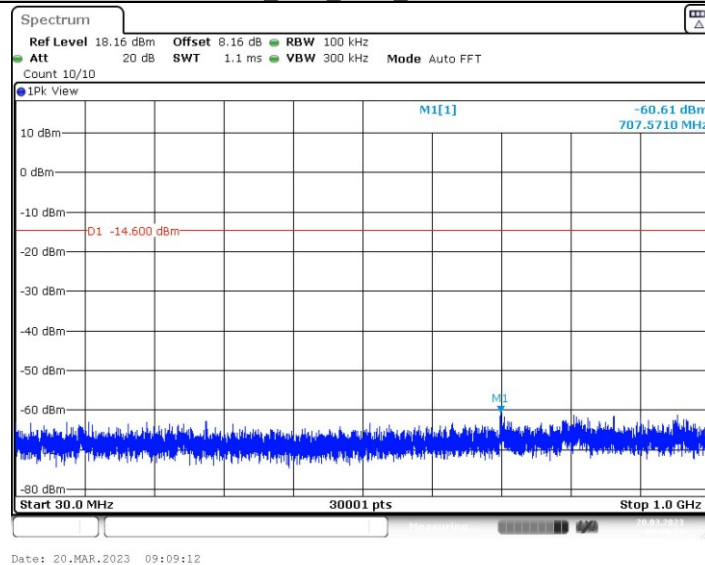



11B_Ant1_2412_1000~26500

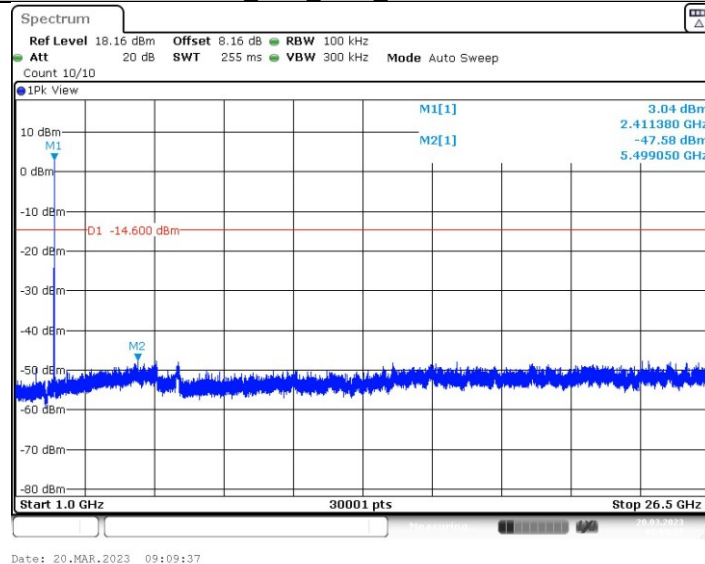



11B_Ant1_2437_30~1000

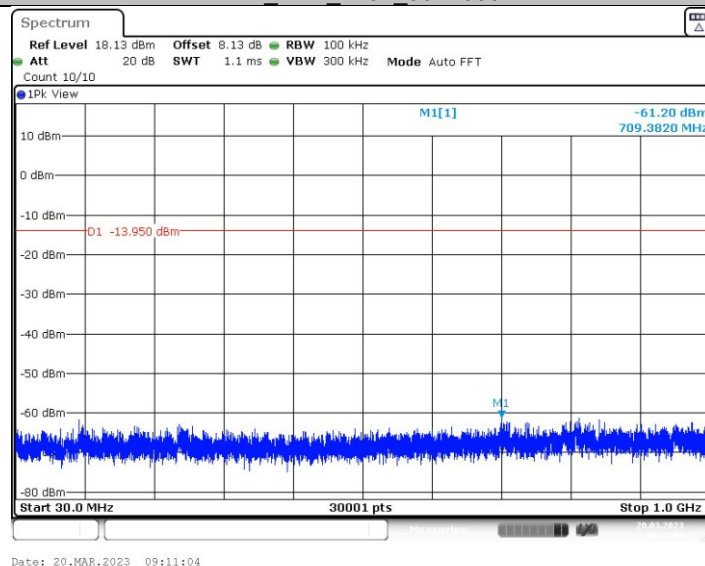


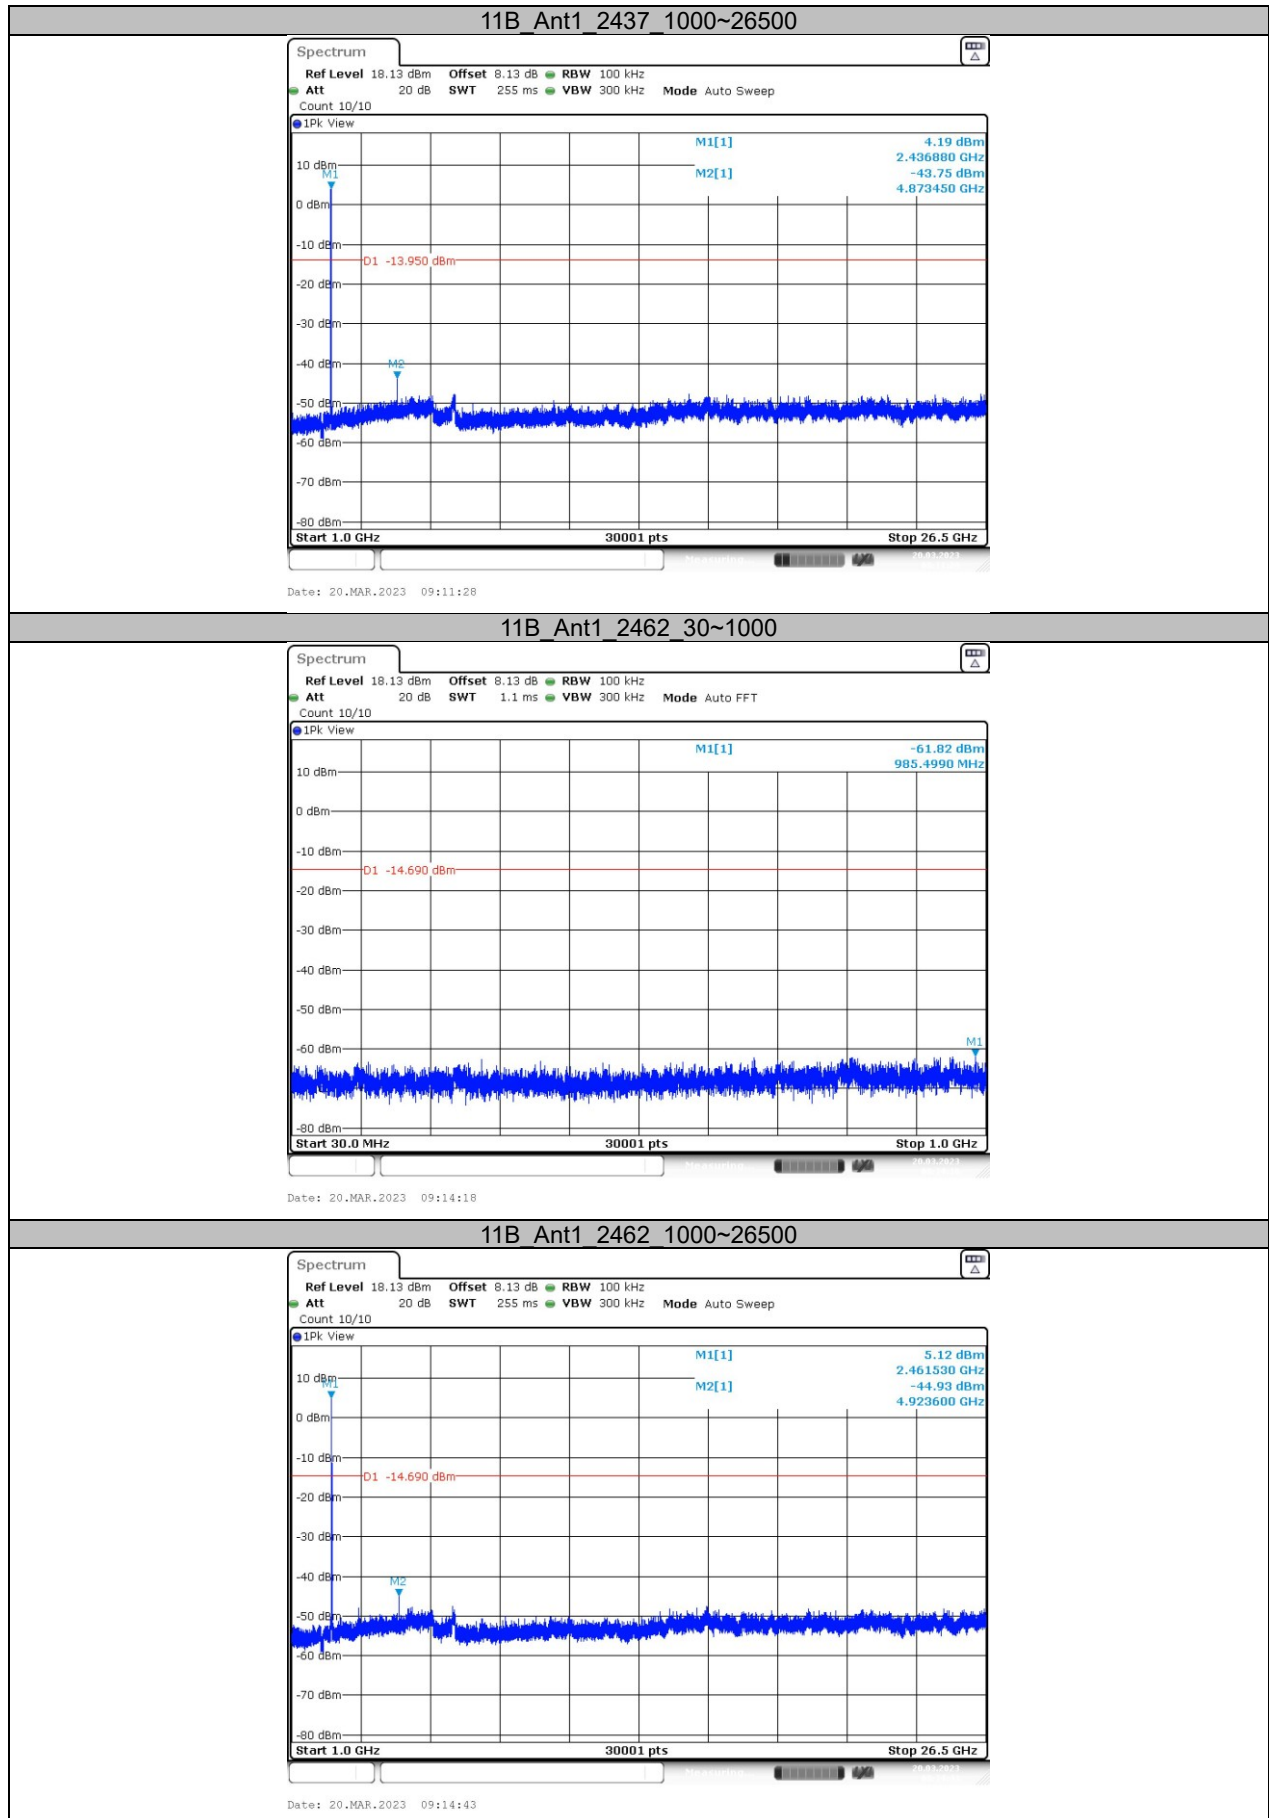


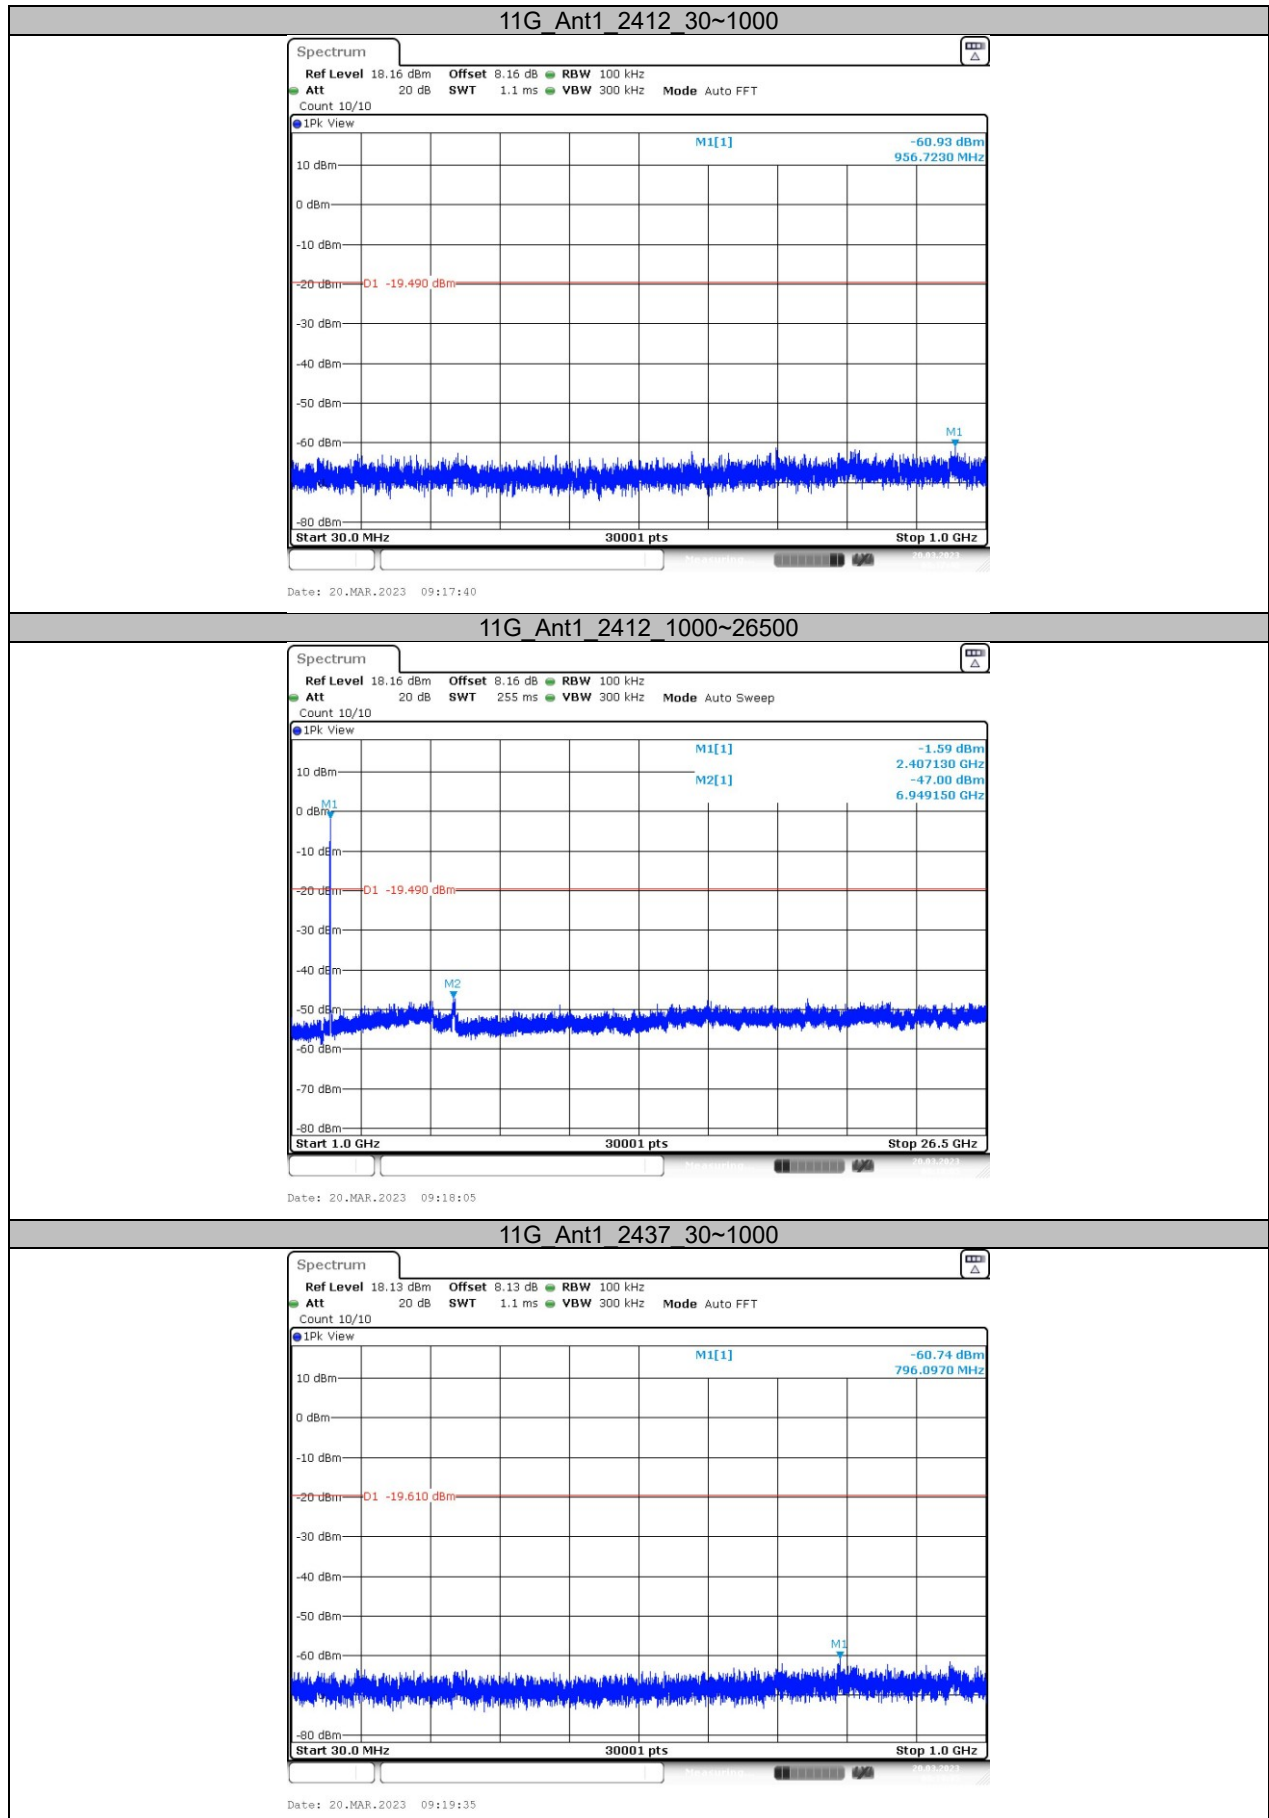


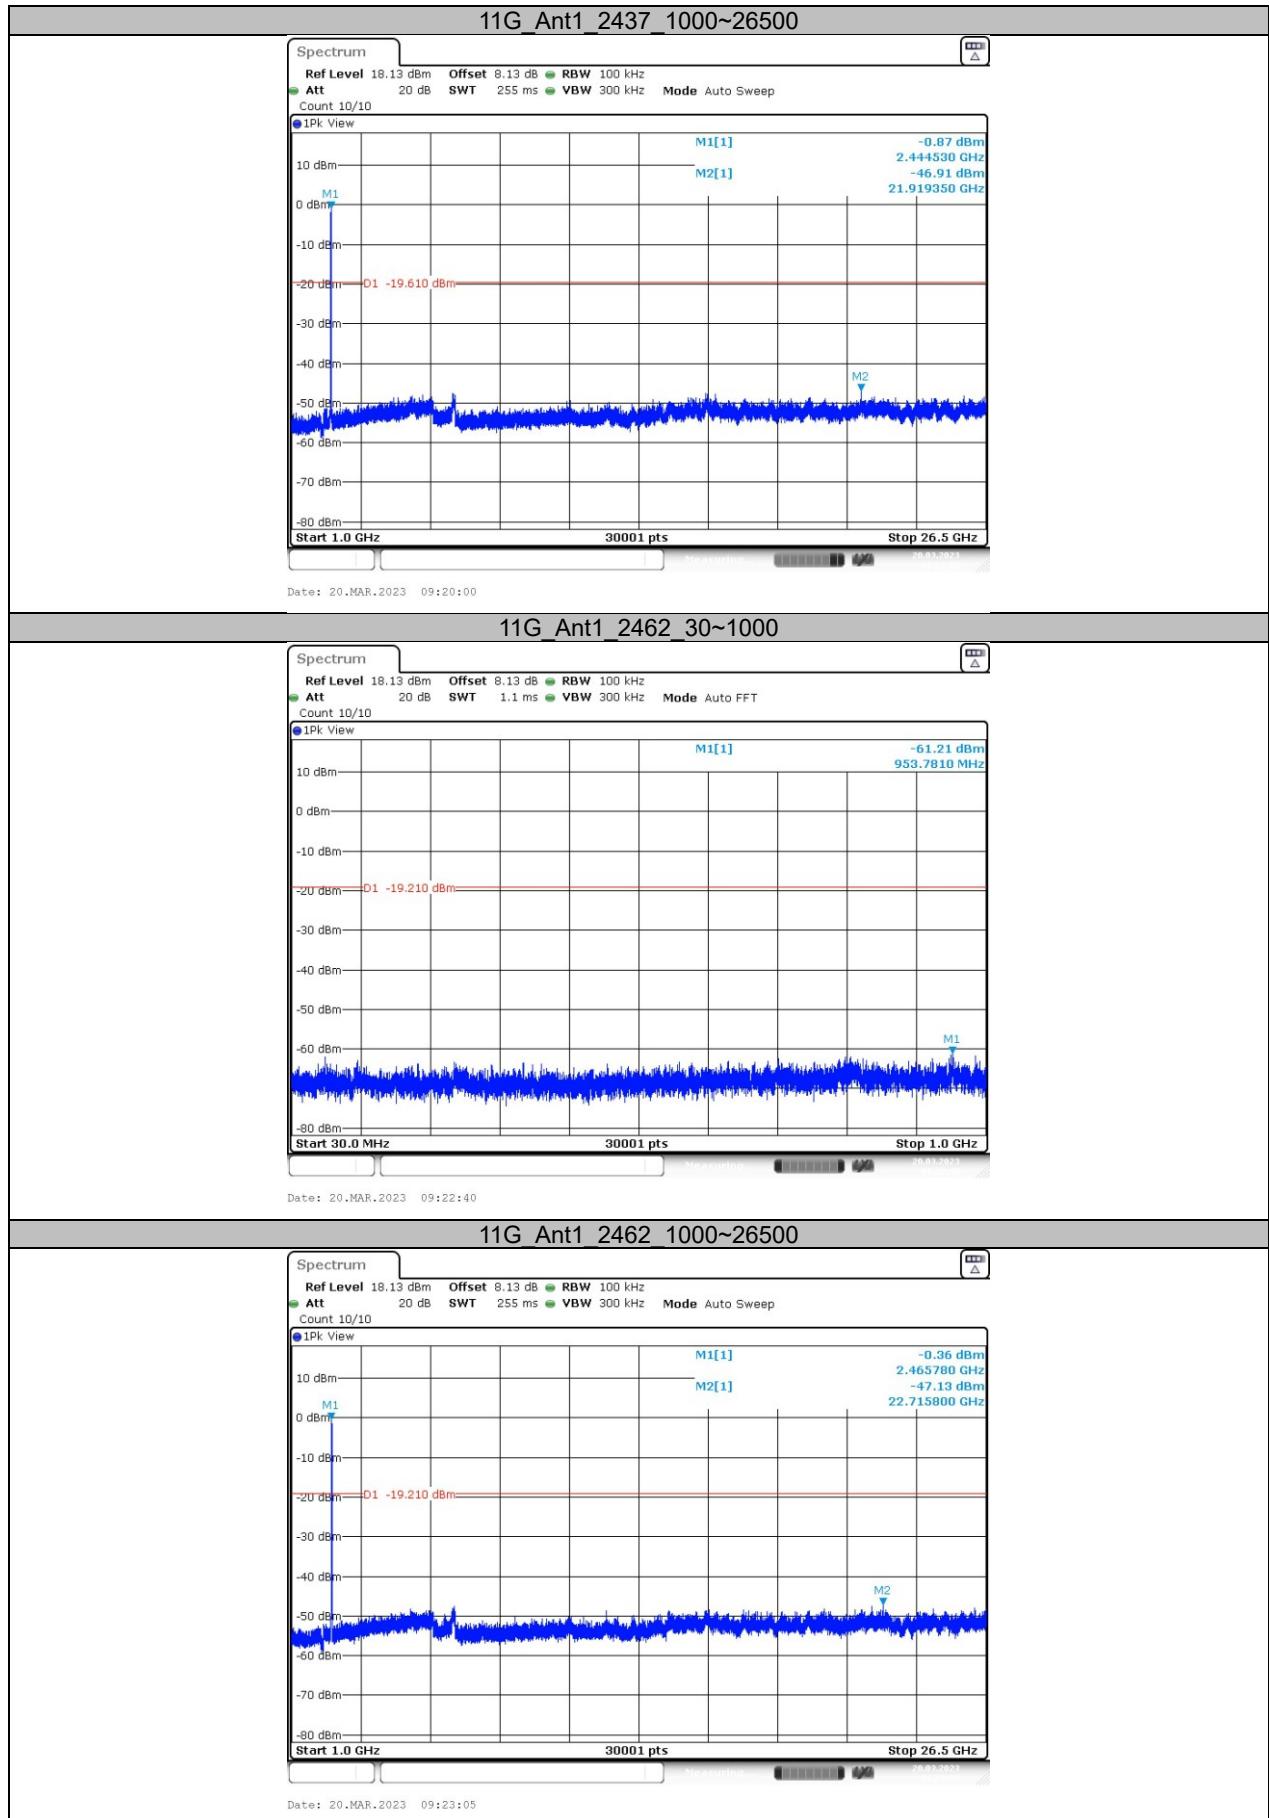

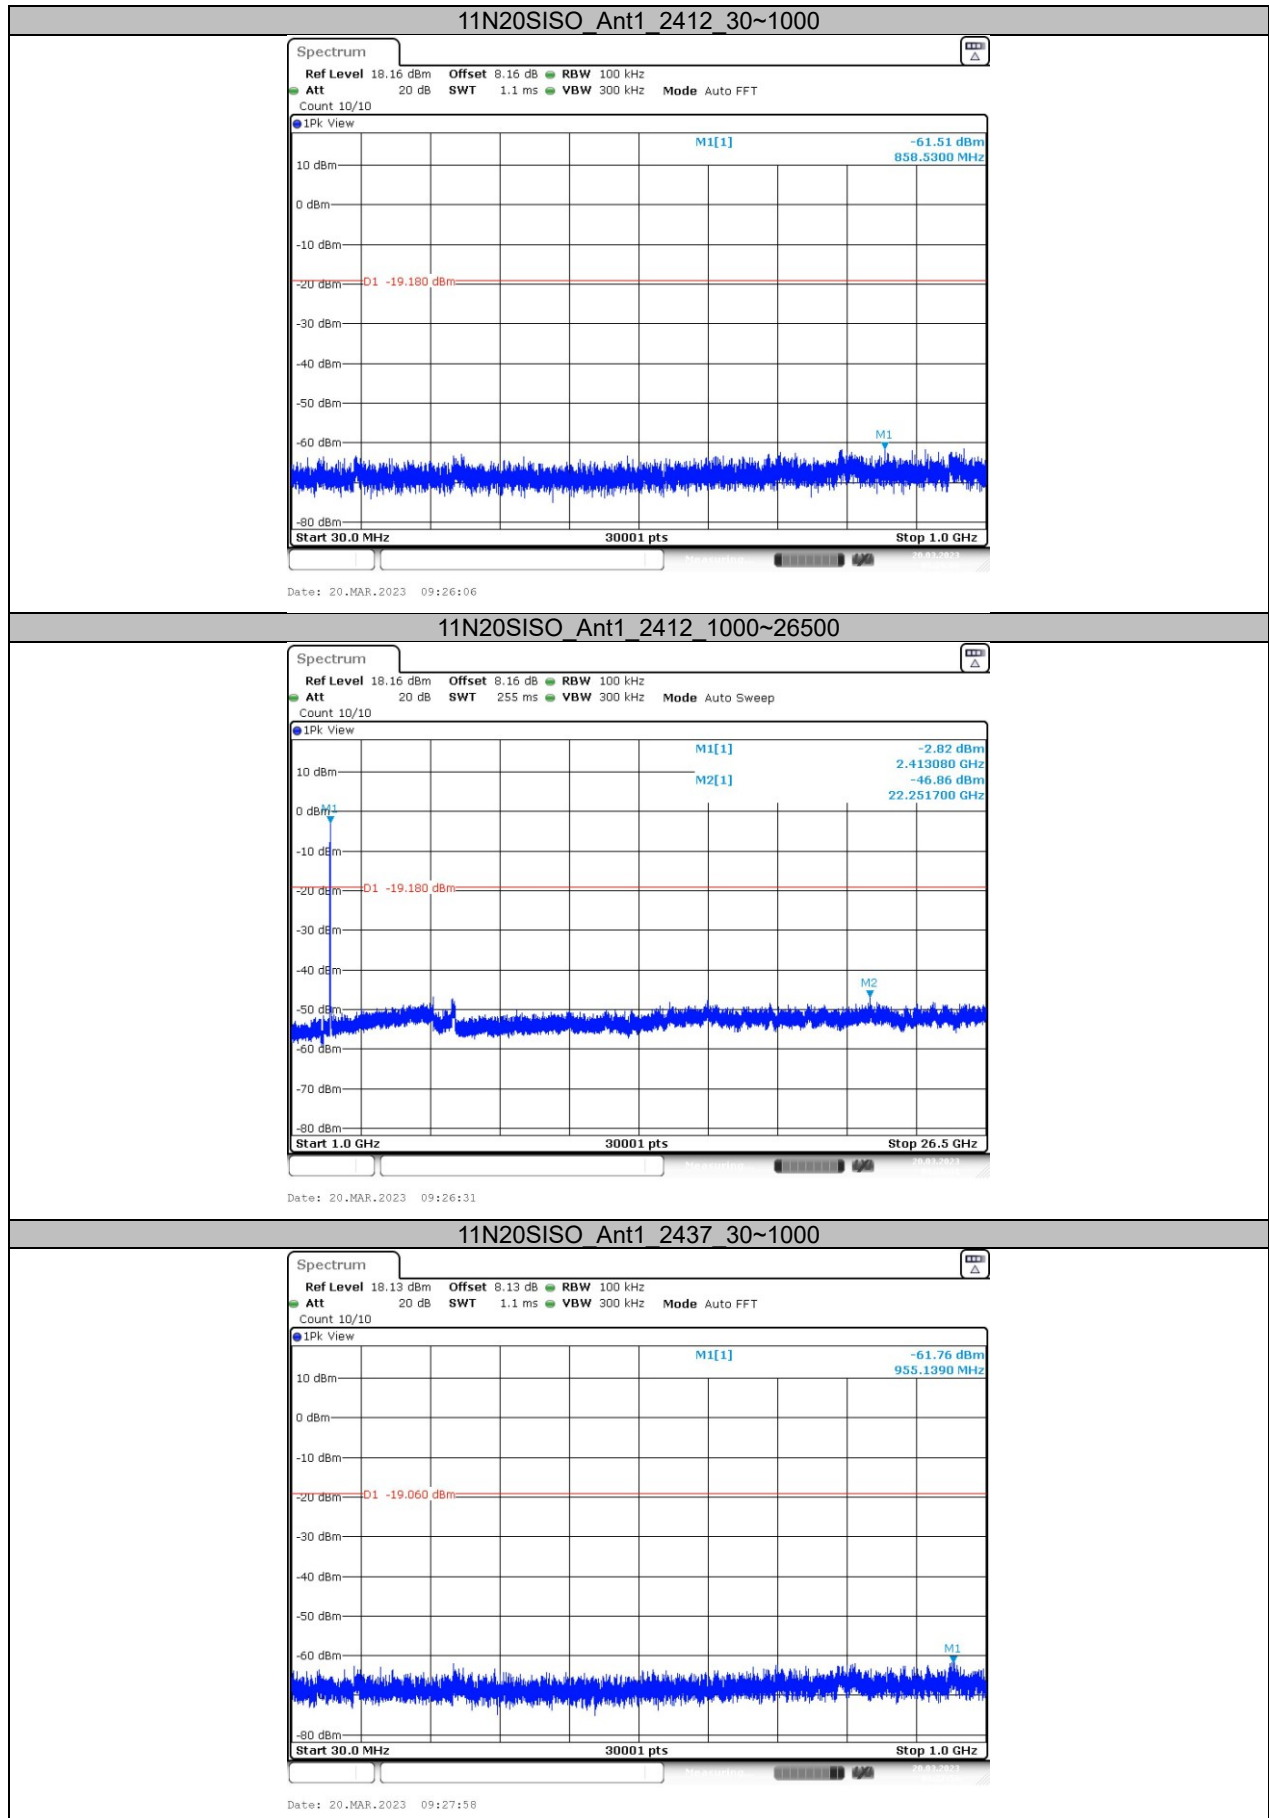

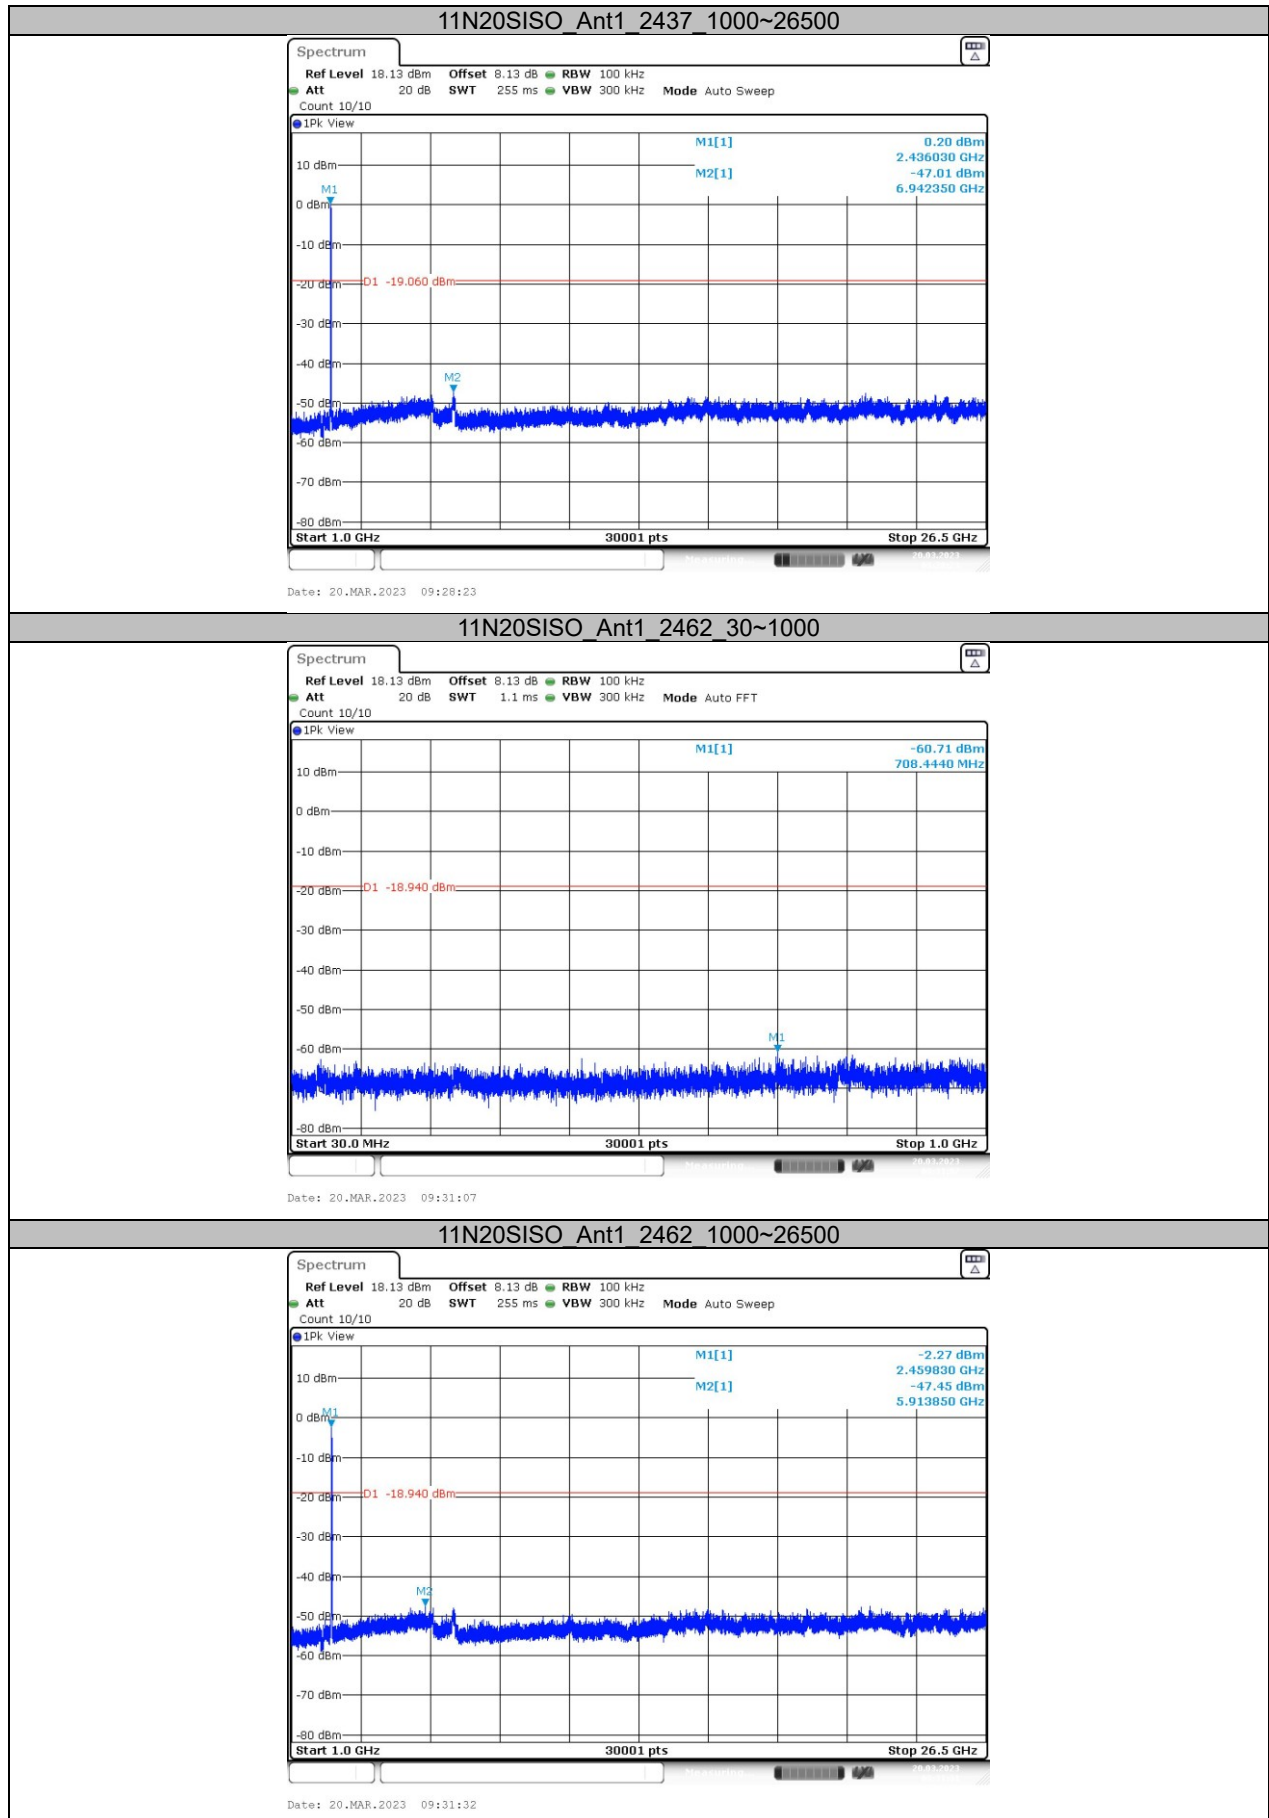

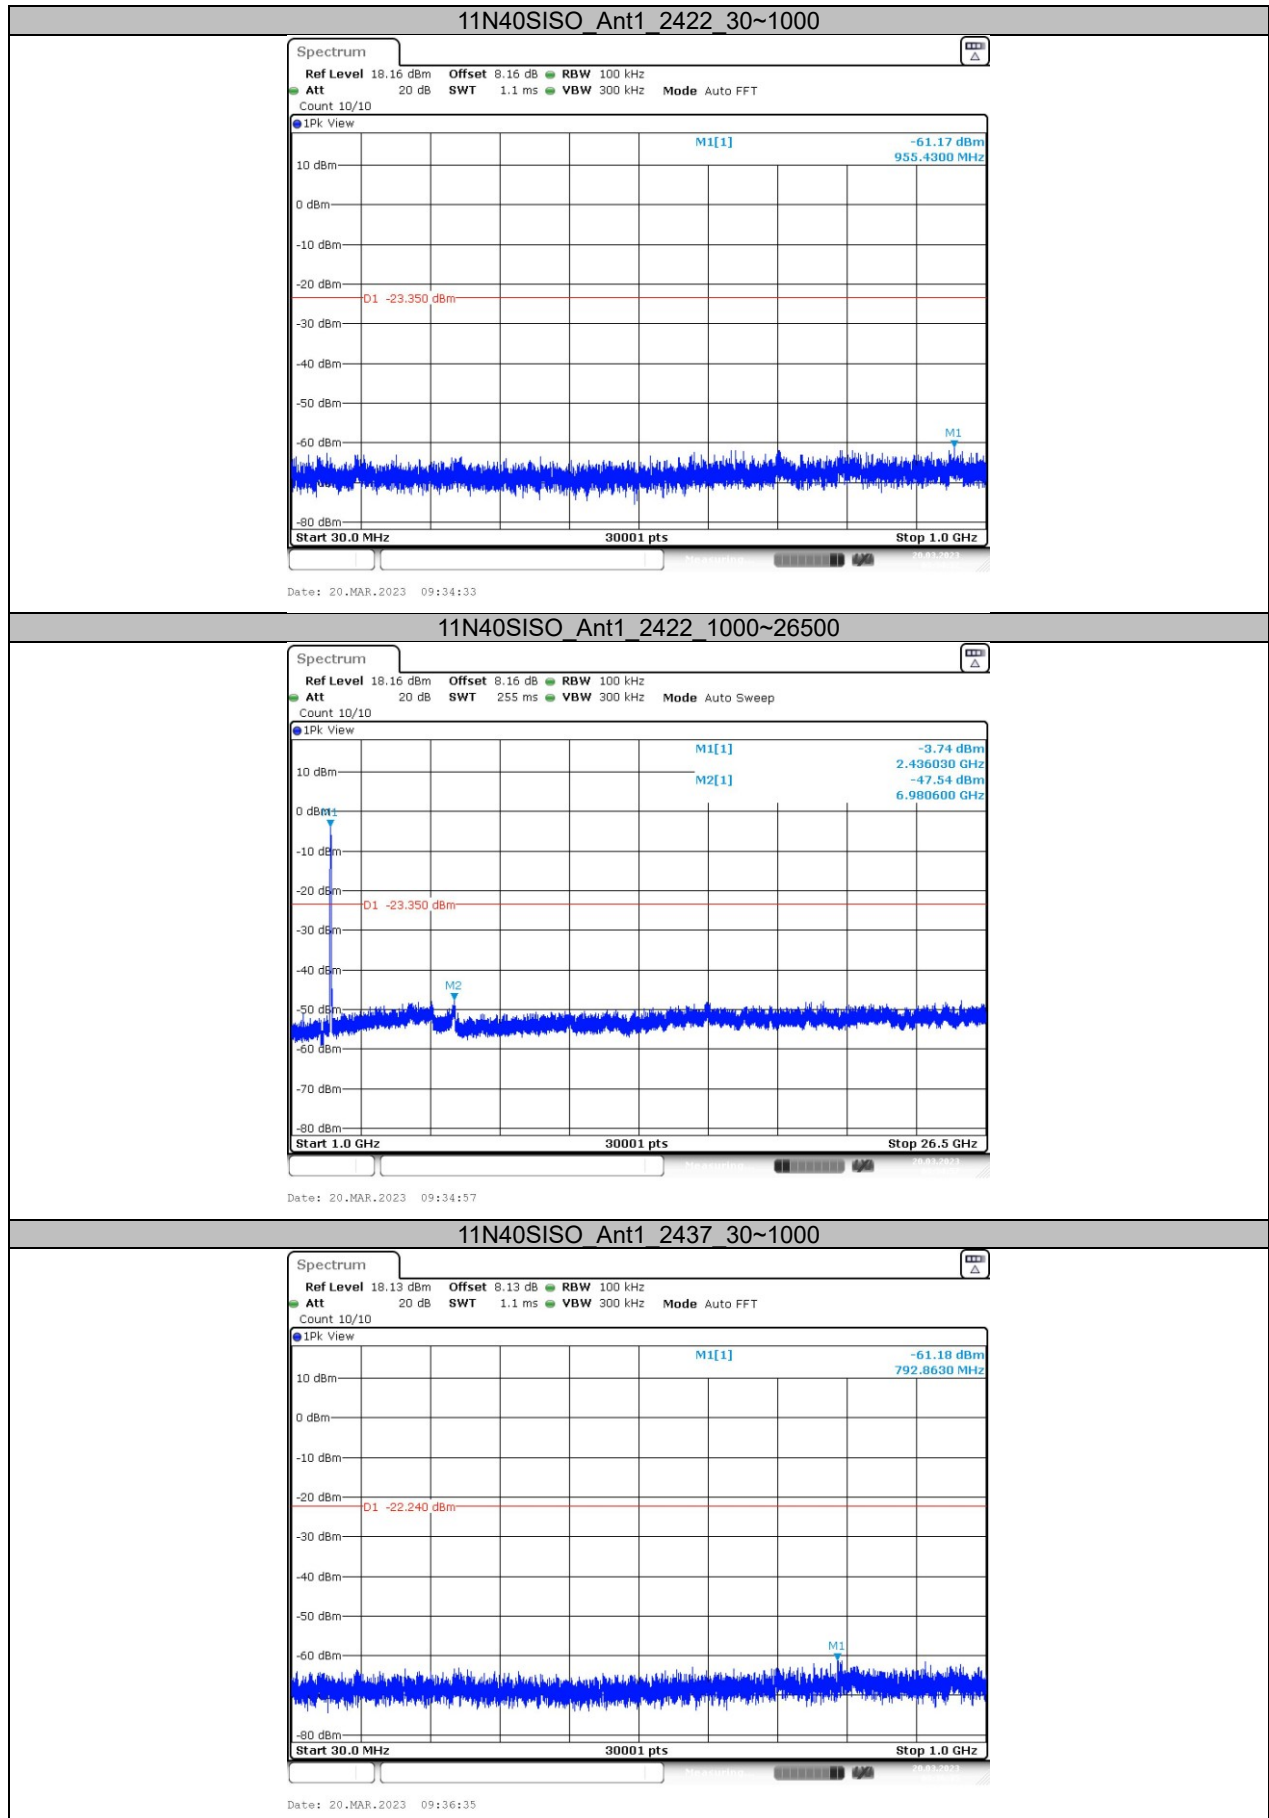

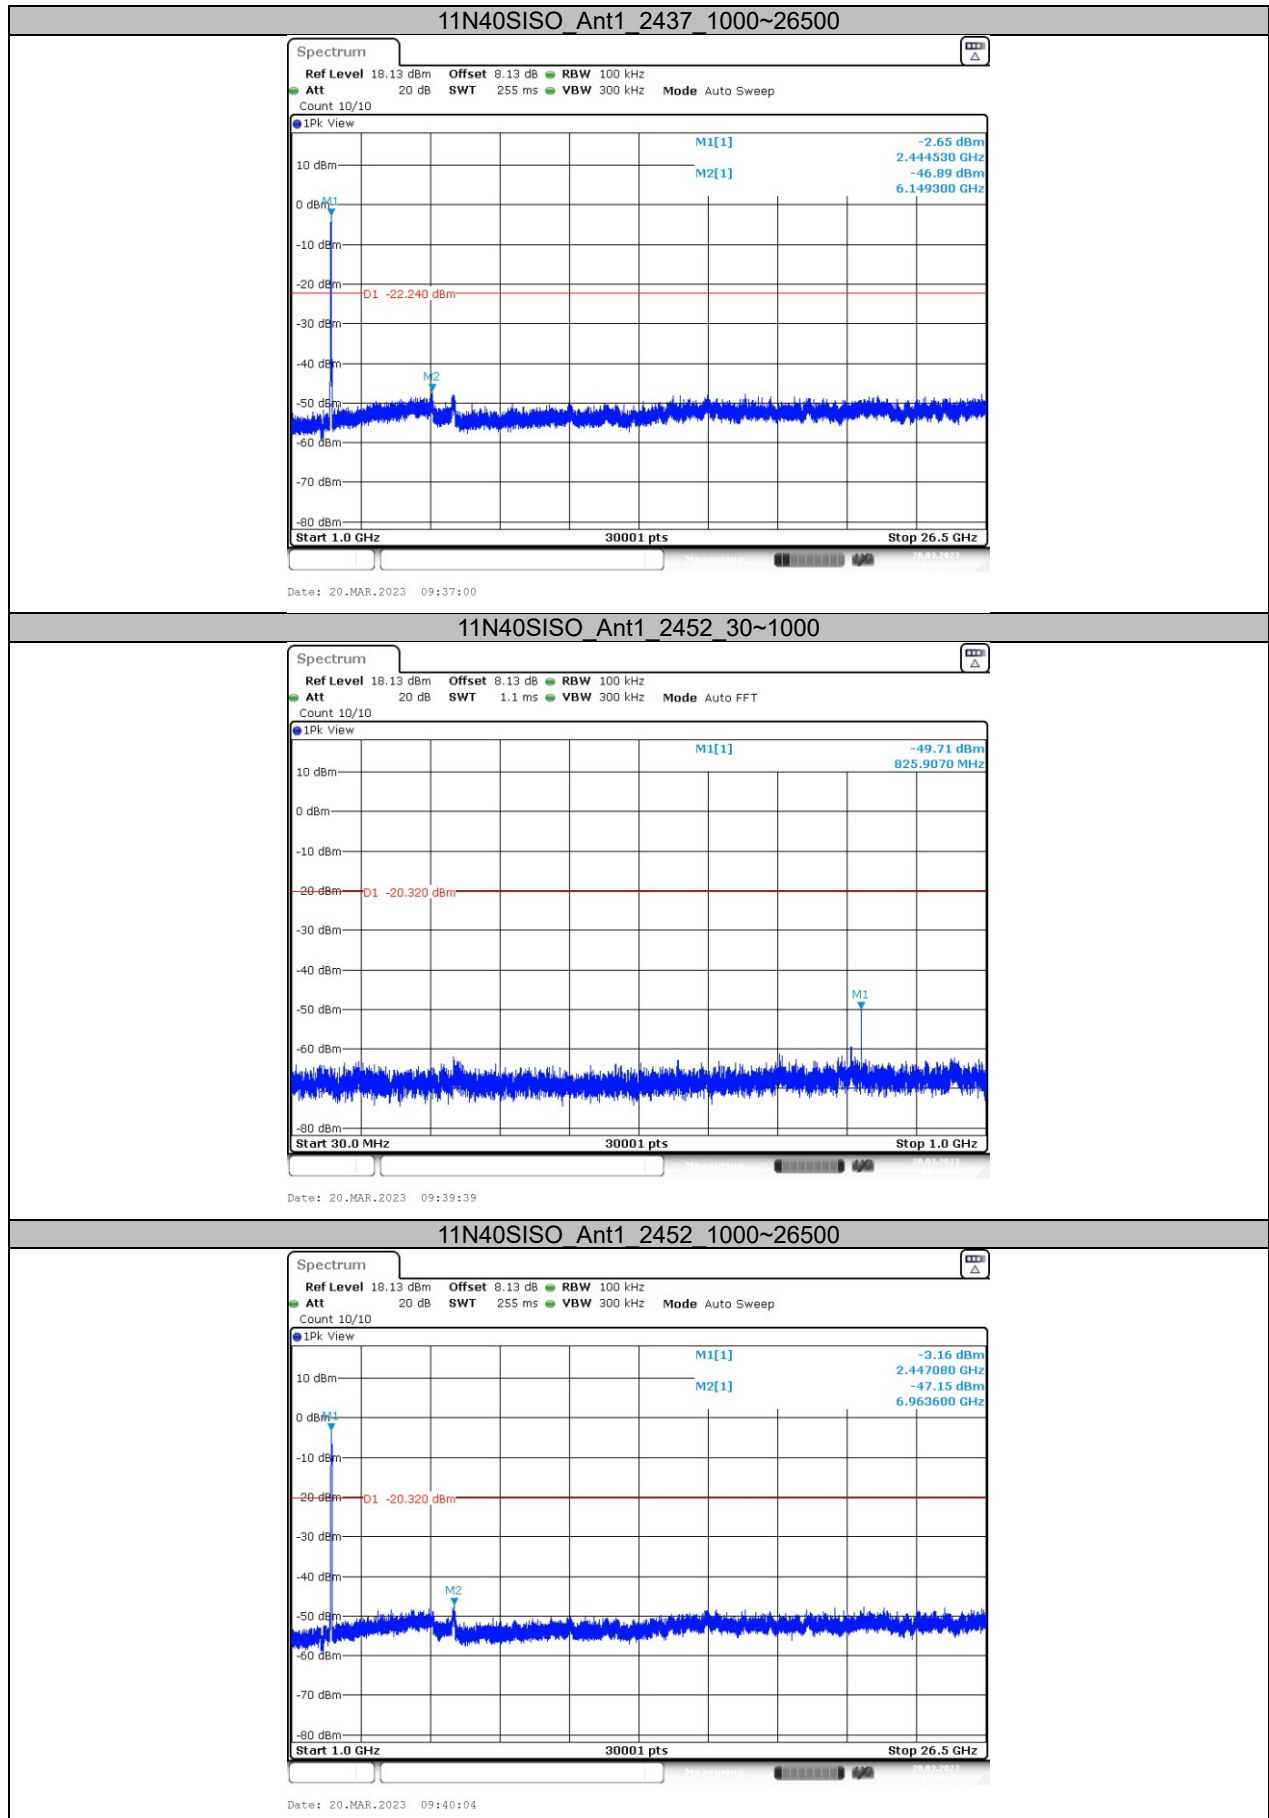

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

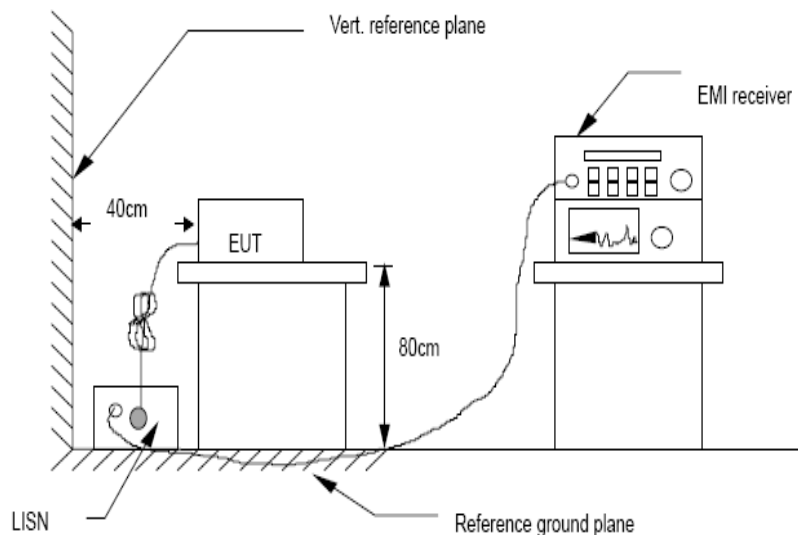

4.4. Test Results

Pas

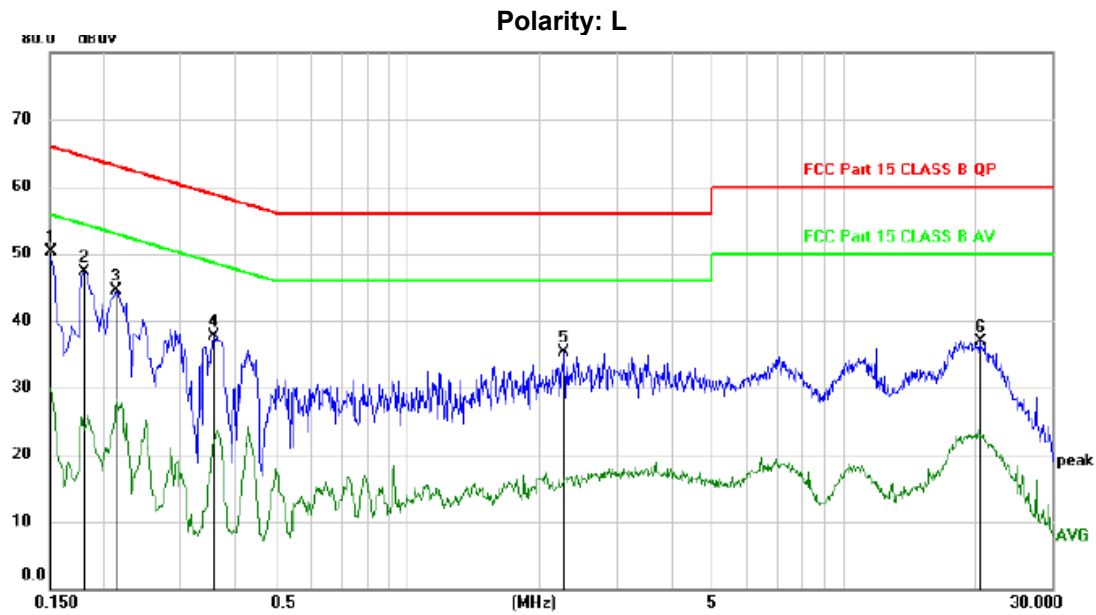


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	40.37	9.94	50.31	66.00	-15.69	peak	
2		0.1800	37.40	9.93	47.33	64.49	-17.16	peak	
3		0.2130	34.65	9.93	44.58	63.09	-18.51	peak	
4		0.3570	27.74	9.95	37.69	58.80	-21.11	peak	
5		2.2770	25.32	9.90	35.22	56.00	-20.78	peak	
6		20.5290	26.53	10.47	37.00	60.00	-23.00	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarity: N

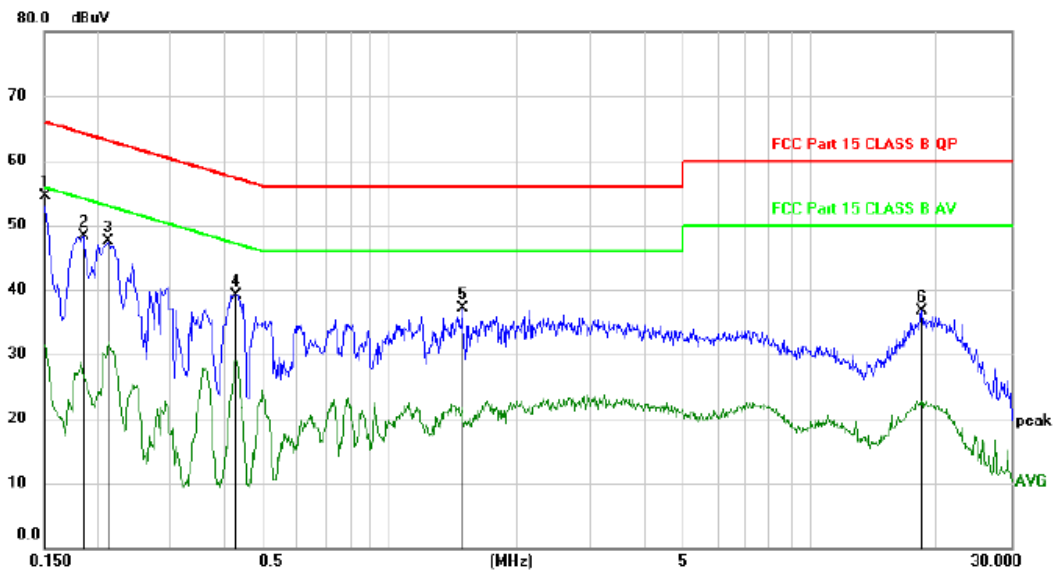

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	44.61	9.94	54.55	66.00	-11.45	peak	
2		0.1860	38.43	9.92	48.35	64.21	-15.86	peak	
3		0.2130	37.66	9.93	47.59	63.09	-15.50	peak	
4		0.4290	29.22	9.95	39.17	57.27	-18.10	peak	
5		1.4850	27.19	9.90	37.09	56.00	-18.91	peak	
6		18.3540	26.19	10.42	36.61	60.00	-23.39	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

Pass

Detailed information please see the following page.

Mode	Frequency (MHz)	PK Output power(dBm)	Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	15.74	30	Pass
	CH6: 2437	17.26	30	Pass
	CH11: 2462	16.77	30	Pass
IEEE 802.11 g	CH1: 2412	17.74	30	Pass
	CH6: 2437	19.37	30	Pass
	CH11: 2462	18.74	30	Pass
IEEE 802.11 n/HT20	CH1: 2412	17.74	30	Pass
	CH6: 2437	19.14	30	Pass
	CH11: 2462	19.06	30	Pass
IEEE 802.11 n/HT40	CH3: 2422	17.89	30	Pass
	CH6: 2437	18.61	30	Pass
	CH9: 2452	17.91	30	Pass

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer RSS-247 & FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as $RBW = 3\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$), $VBW = 10\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} \geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.


6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


6.3. Test Setup




6.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b	2412	Ant 1	-8.86	8	Pass
NVNT	802.11b	2437	Ant 1	-7.36	8	Pass
NVNT	802.11b	2462	Ant 1	-7.62	8	Pass
NVNT	802.11g	2412	Ant 1	-13.07	8	Pass
NVNT	802.11g	2437	Ant 1	-12.55	8	Pass
NVNT	802.11g	2462	Ant 1	-12.17	8	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-12.92	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-11.96	8	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-11.67	8	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-17.3	8	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-14.88	8	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-13.22	8	Pass

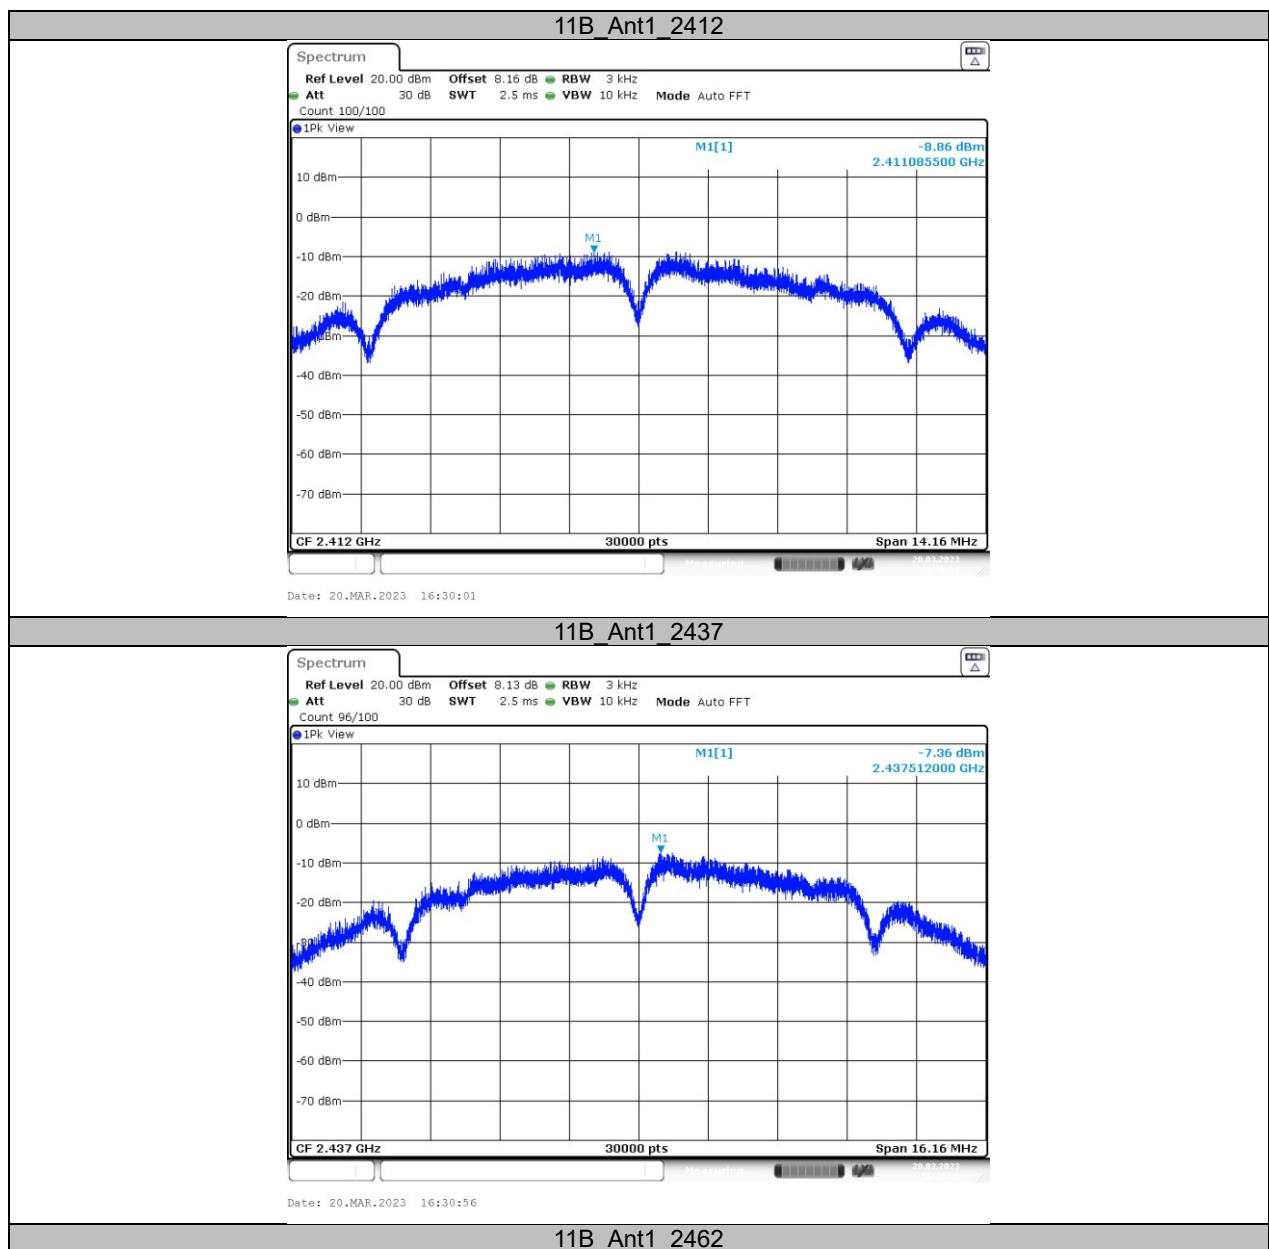


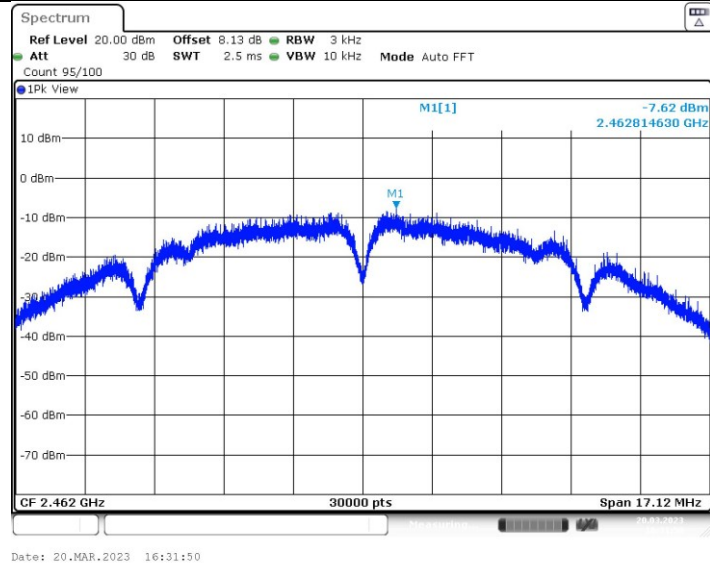


11G Ant1 2412

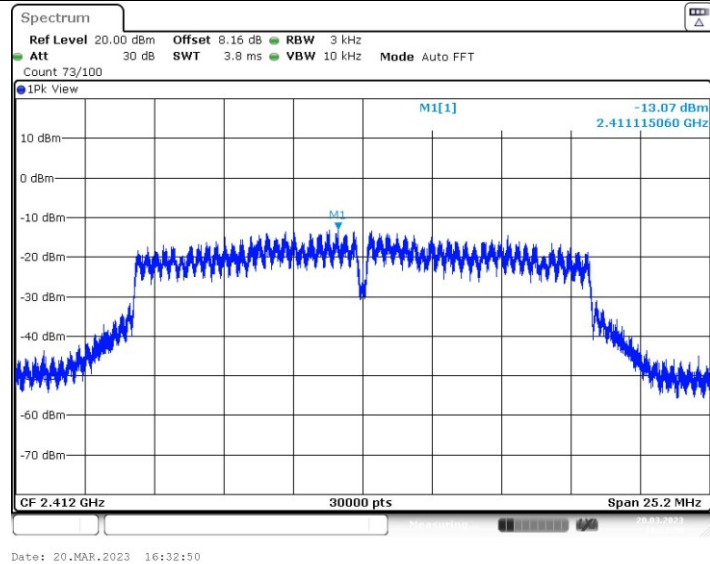


11G Ant1 2437

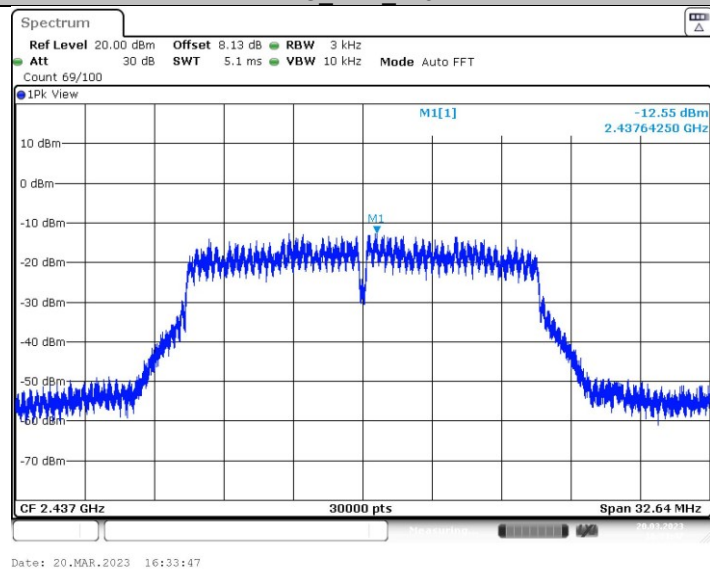


11G Ant1 2462

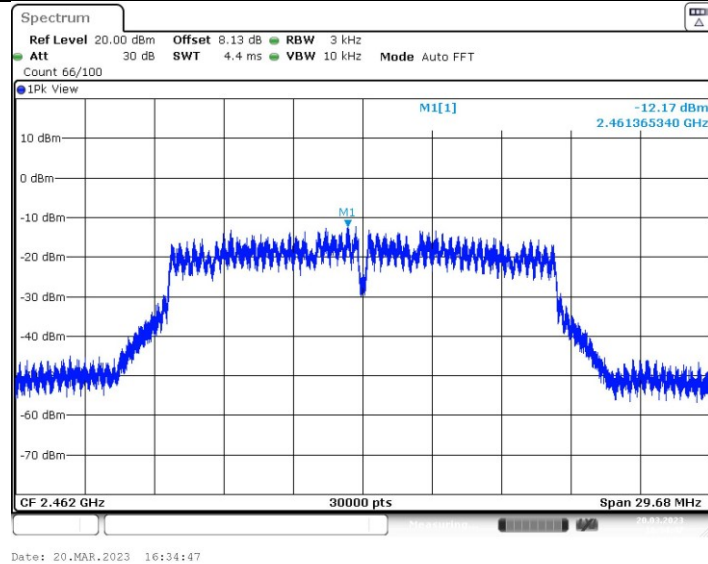


11N20SISO_Ant1_2412

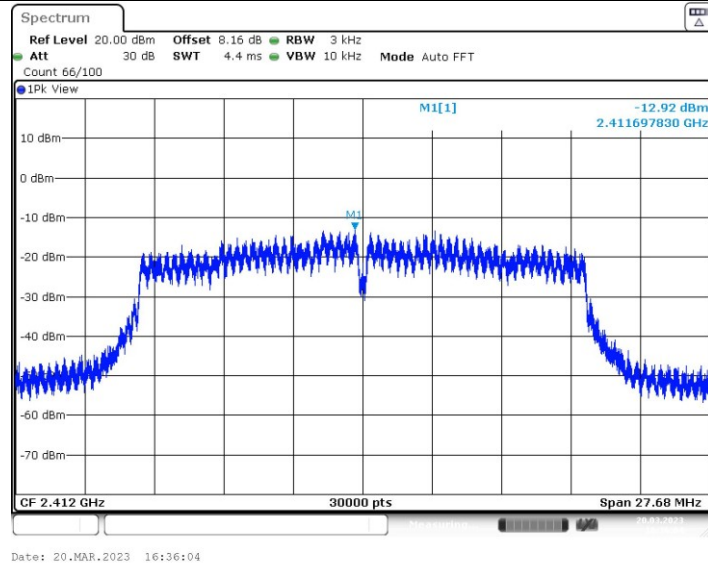


11N20SISO_Ant1_2437

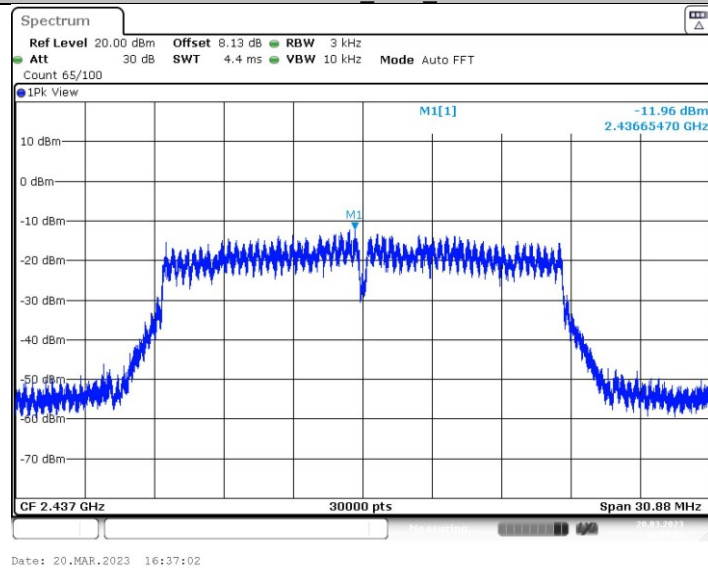


11N20SISO_Ant1_2462

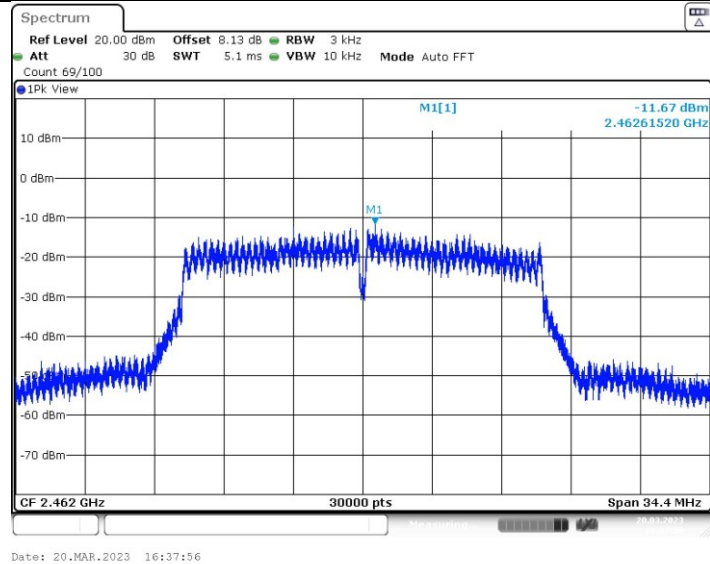


11N40SISO_Ant1_2422

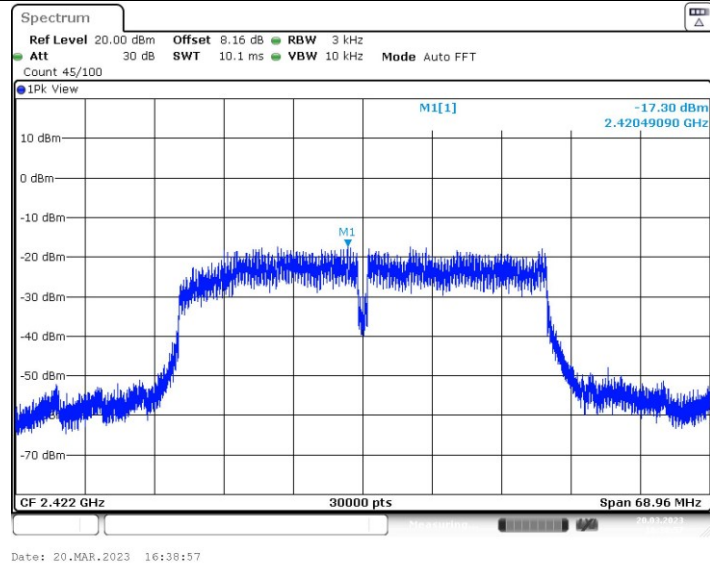

11N40SISO_Ant1_2437

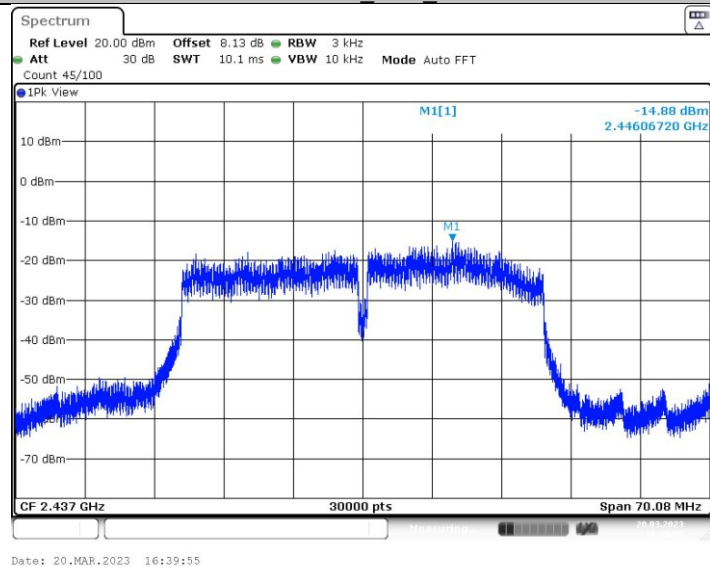

11N40SISO_Ant1_2452

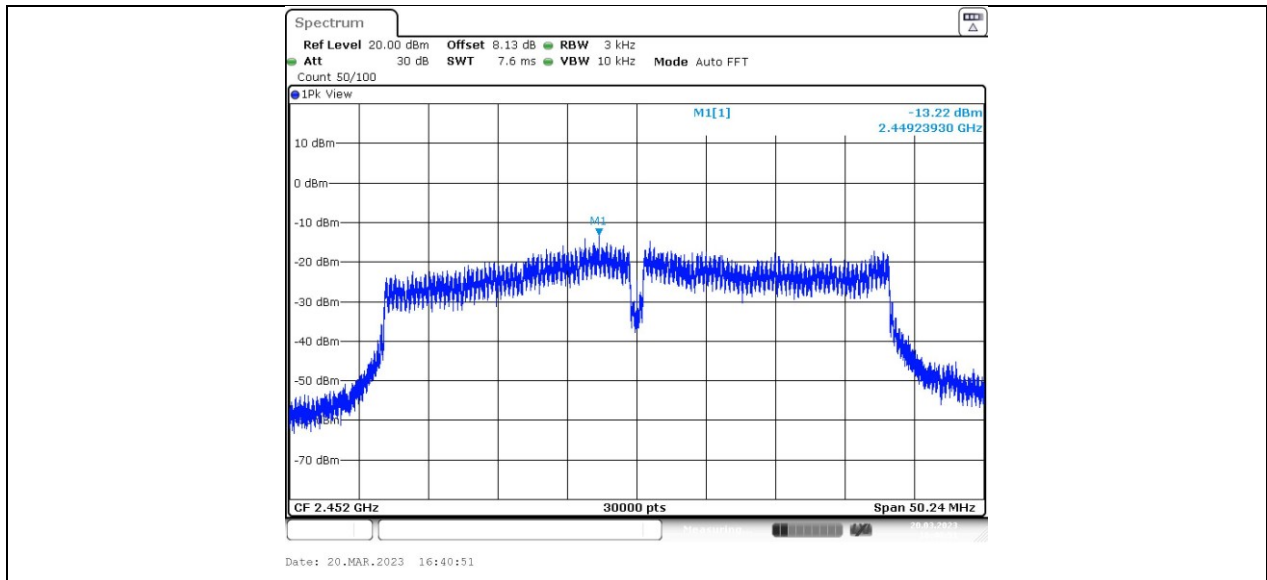

7. BANDWIDTH

7.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz,, Peak Detector, Sweep time set auto, detail see the test plot.


7.3. Test Setup




7.4. Test Results

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.08	2408.44	2415.52	0.5	PASS
		2437	8.08	2433.44	2441.52	0.5	PASS
		2462	8.56	2457.48	2466.04	0.5	PASS
11G	Ant1	2412	12.60	2405.68	2418.28	0.5	PASS
		2437	16.32	2428.84	2445.16	0.5	PASS
		2462	14.84	2454.72	2469.56	0.5	PASS
11N20SISO	Ant1	2412	13.84	2405.68	2419.52	0.5	PASS
		2437	15.44	2429.44	2444.88	0.5	PASS
		2462	17.20	2453.56	2470.76	0.5	PASS
11N40SISO	Ant1	2422	34.48	2405.68	2440.16	0.5	PASS
		2437	35.04	2419.48	2454.52	0.5	PASS
		2452	25.12	2444.40	2469.52	0.5	PASS


11B_Ant1_2412

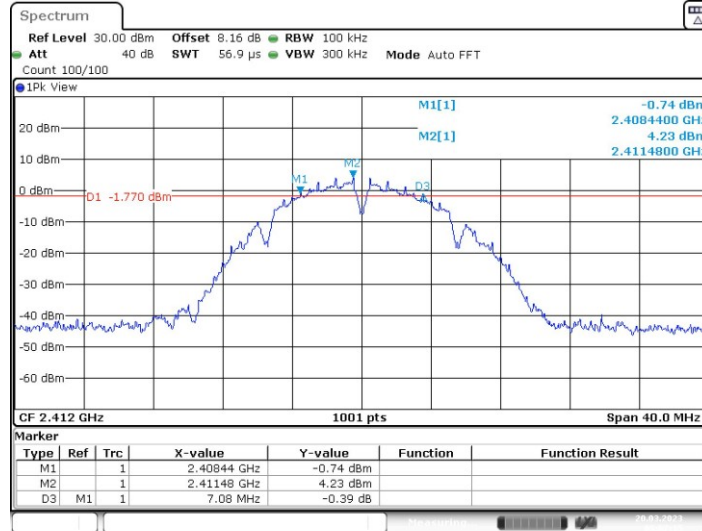


11B_Ant1_2437

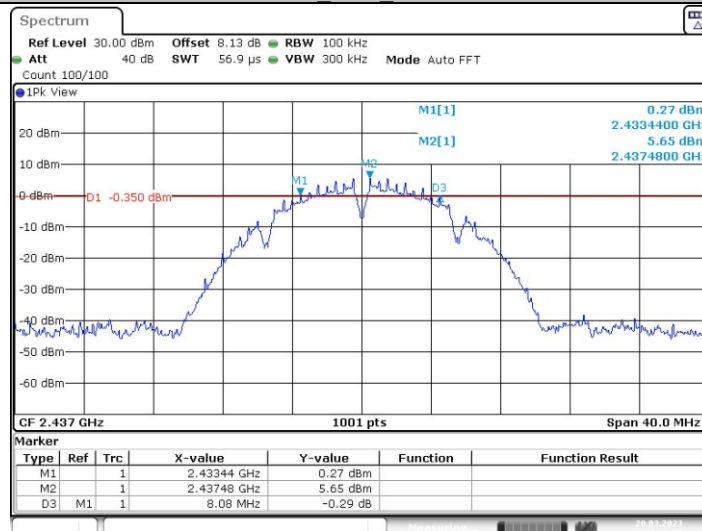

11B_Ant1_2462

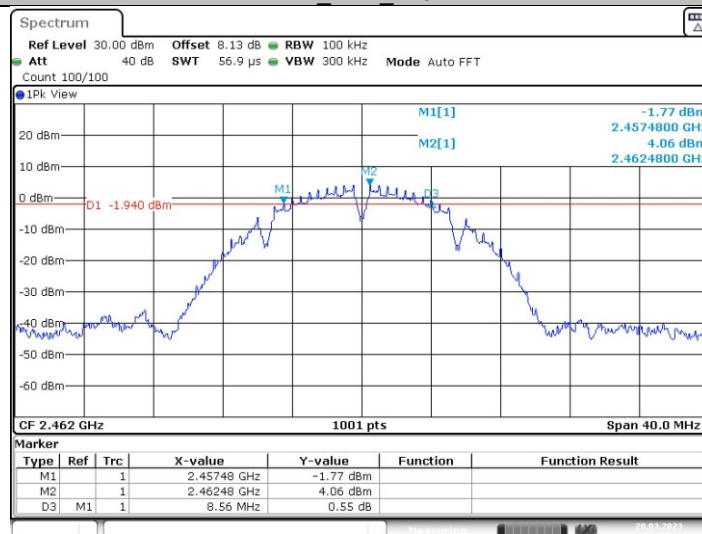


11G_Ant1_2412

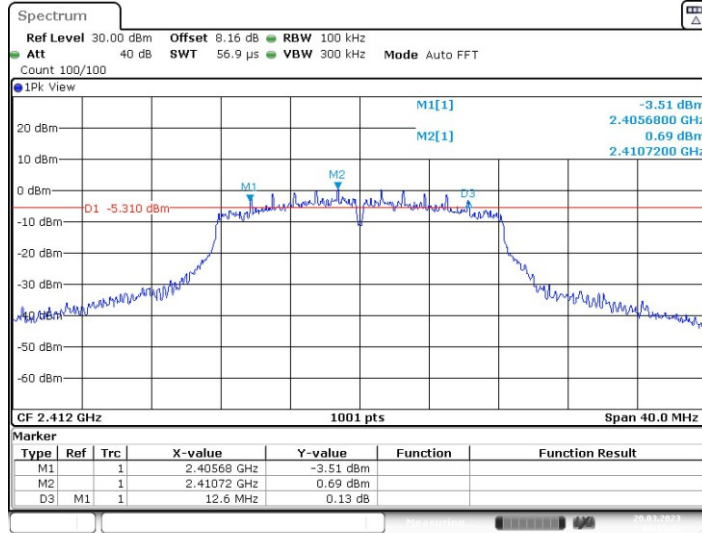


Date: 20.MAR.2023 09:15:43

11G_Ant1_2437

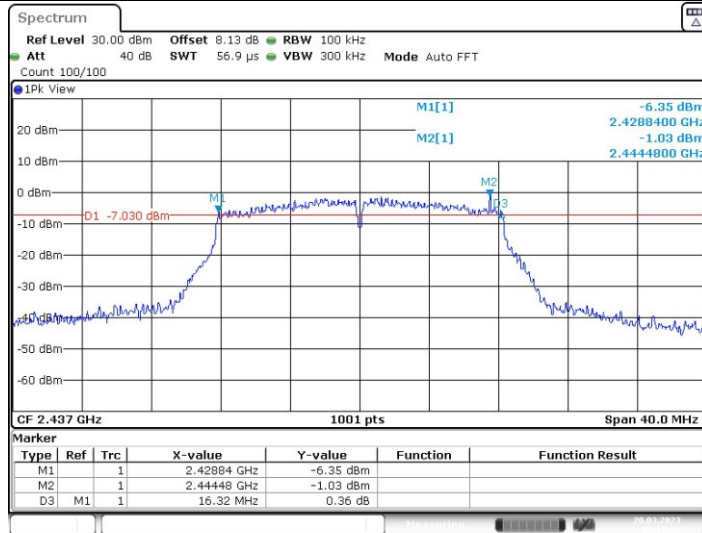

Date: 20.MAR.2023 09:18:51

11G_Ant1_2462

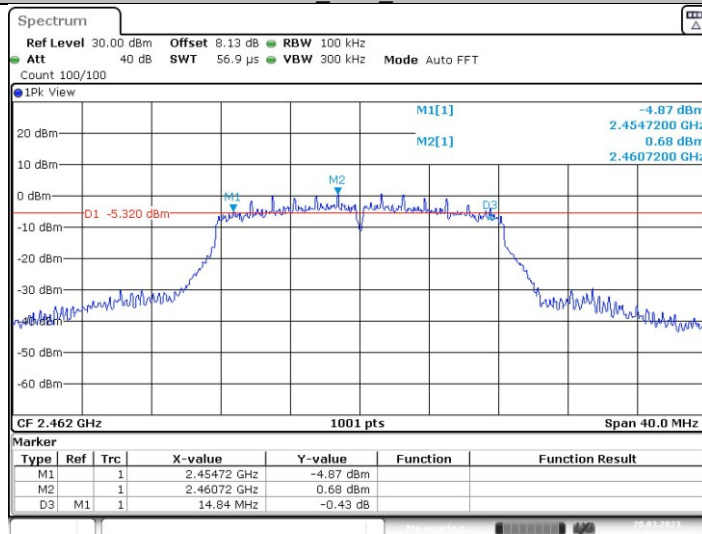

Date: 20.MAR.2023 09:20:43