

天线规格 Antenna Data Sheet

天线类型 Antenna Type: 印刷式天线 PCB Antenna


阻抗 Impedance: 50Ω

极化方式 Polarization: 线性 Linear

频率范围 Frequency Range: 2400 ~ 2483.5GHz


天线增益 Max Peak Gain: -1.26dBi


制造商 Manufacturer: Shuangjin

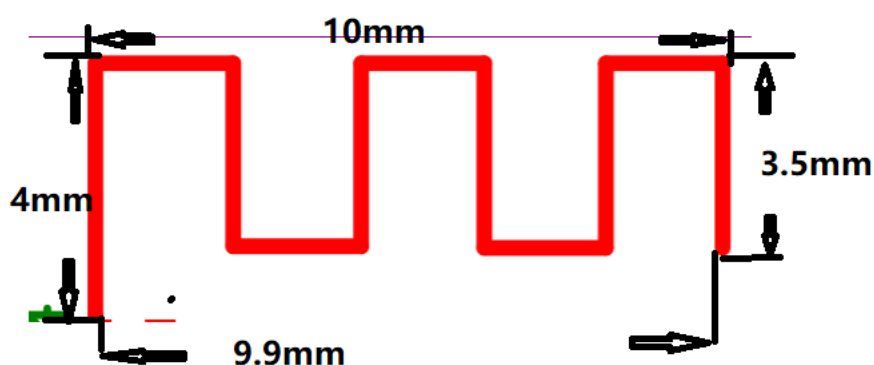




天线辐射图 Antenna Radiation Pattern

Antenna Gain X

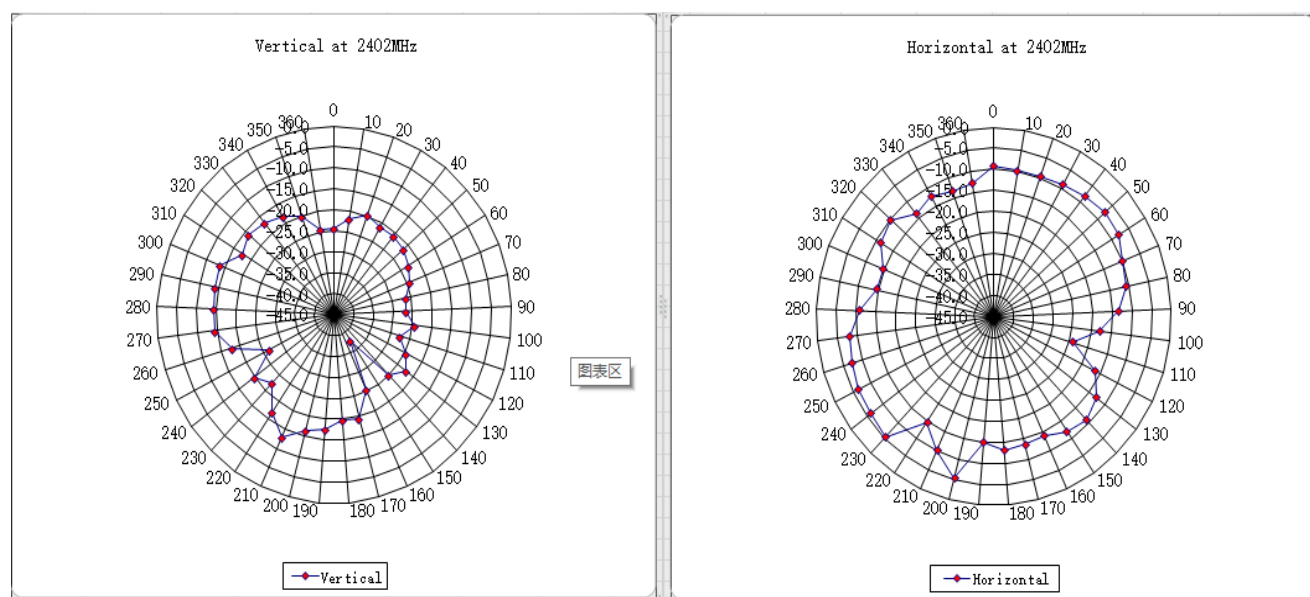

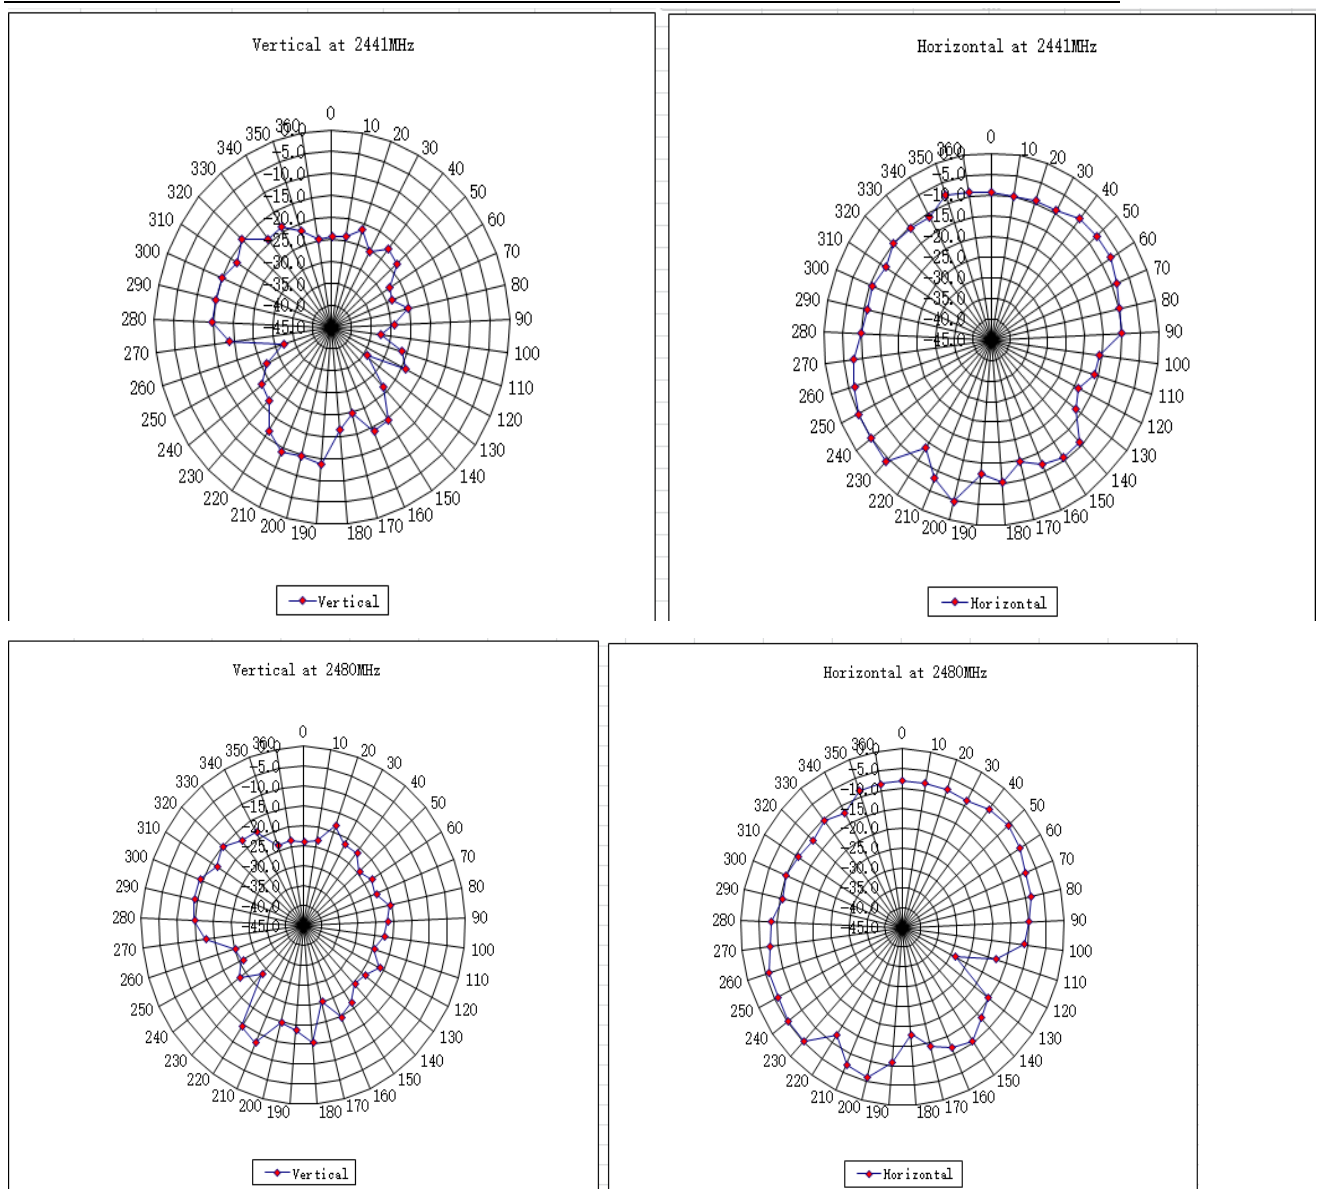


BT Antenna Gain Y

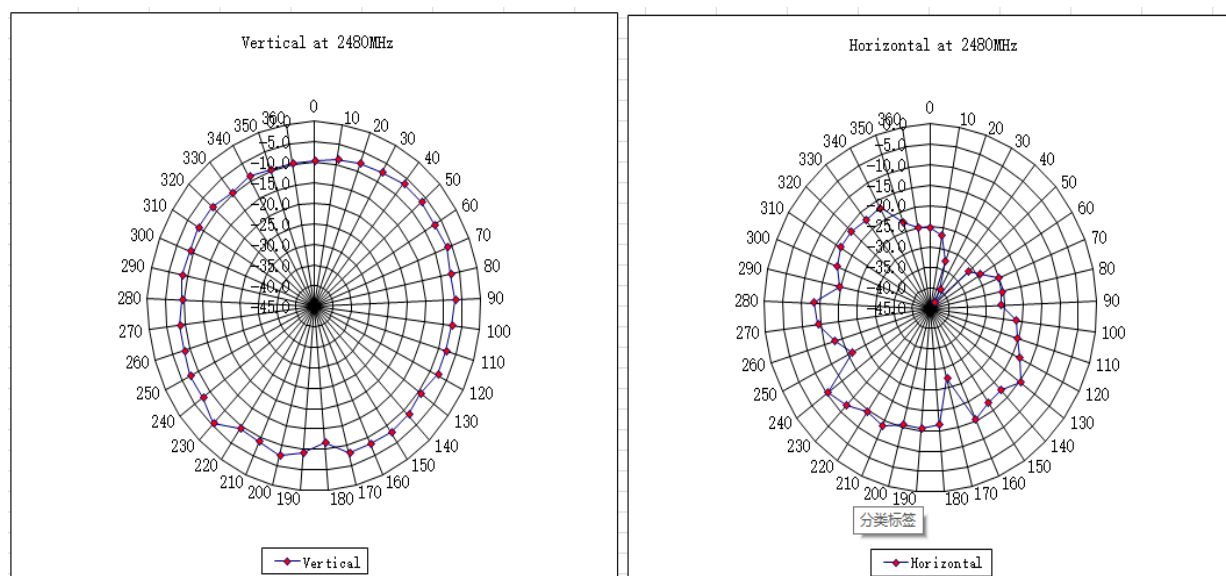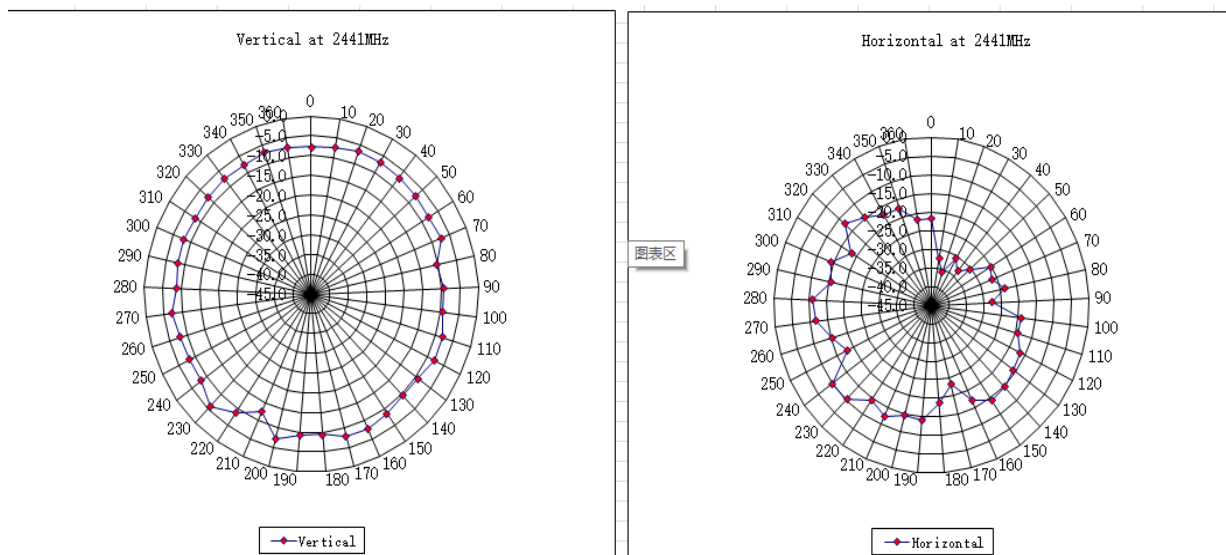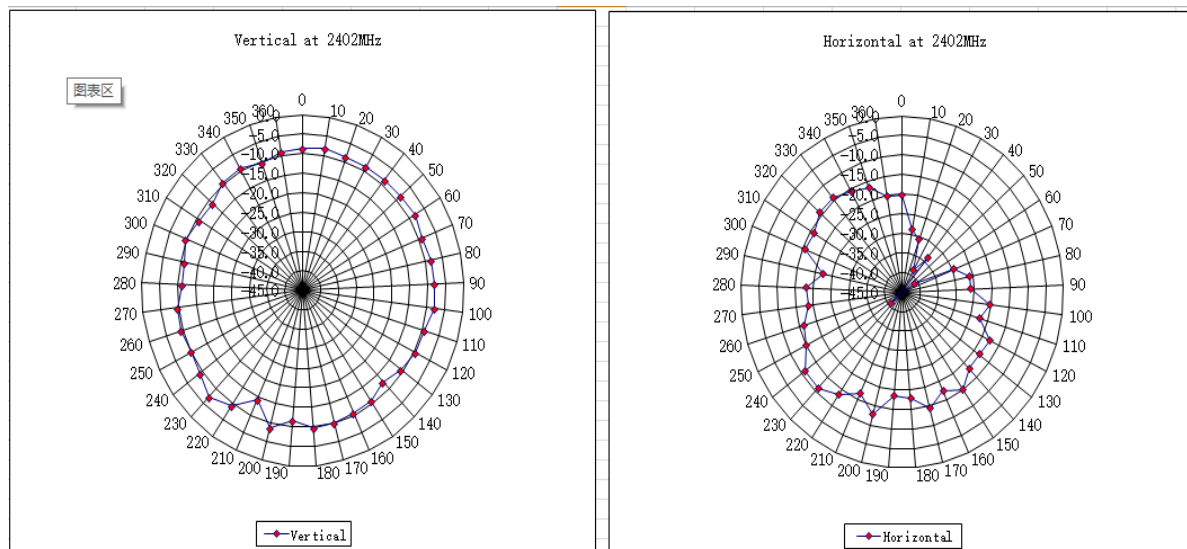


BT Antenna Gain Z

Vertical at 2402MHz

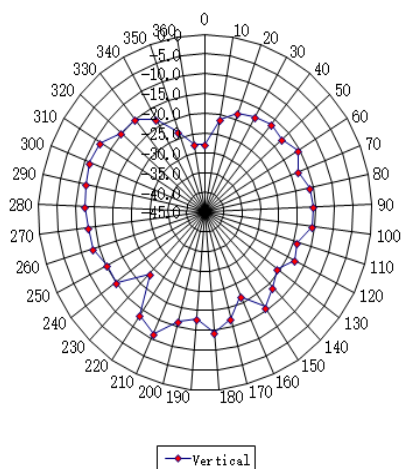


Horizontal at 2402MHz

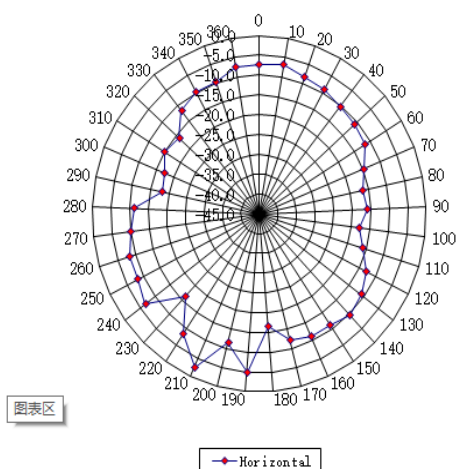


图表区

Vertical at 2441MHz

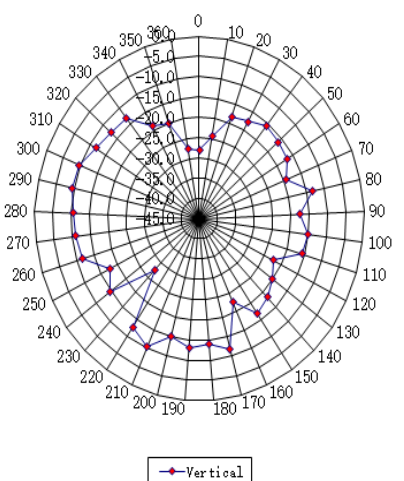


Horizontal at 2441MHz

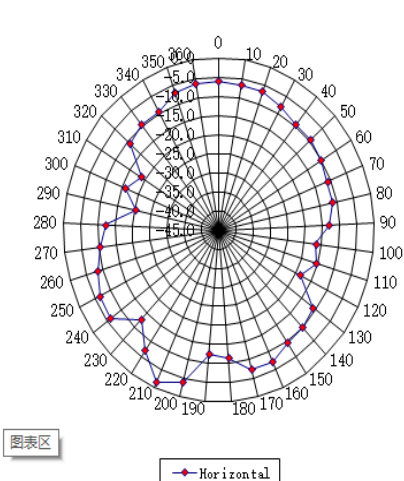


图表区

Vertical at 2480MHz

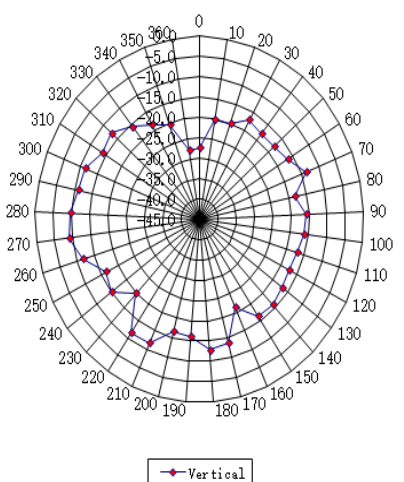

Horizontal at 2480MHz

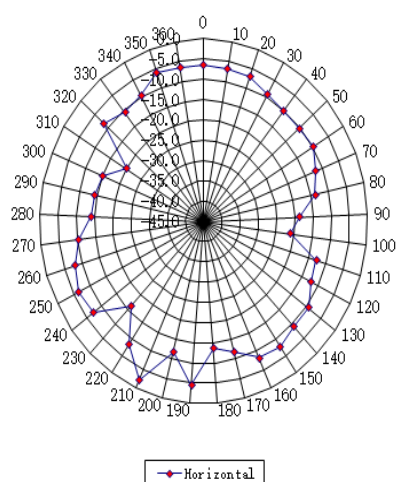

图表区

Gain X	2402MHz	2441MHz	2480MHz
Vertical	-12.68	-14.43	-12.35
Horizontal	-4.95	-3.78	-4.56
Gain Y	2402MHz	2441MHz	2480MHz
Vertical	-7.29	-4.84	-5.21
Horizontal	-10.24	-9.42	-10.02
Gain Y	2402MHz	2441MHz	2480MHz
Vertical	-10.34	-9.32	-8.37
Horizontal	-2.28	-1.26	-1.74
PEAK Gain(dBi)	-2.28	-1.26	-1.74