



Nemko Test Report: 5L0403RUS1

Applicant: Nokia, Inc.

**Equipment Under Test:
(E.U.T.)** 6155i

In Accordance With: **FCC Part 22, Subpart H**
Cellular Band Subscriber Services

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, TX
75057-3136

Authorized By:

A handwritten signature in blue ink, appearing to read 'Tom Tidwell', is written over a light blue horizontal line.

Tom Tidwell, Frontline Group Manager

Date: 29 August, 2005

NVLAP LAB CODE: 100426-0



Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS.....	3
SECTION 2.	GENERAL EQUIPMENT SPECIFICATION.....	5
SECTION 3.	OCCUPIED BANDWIDTH	7
SECTION 4.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	10
SECTION 5.	FIELD STRENGTH OF SPURIOUS	15
SECTION 6.	FREQUENCY STABILITY	18
SECTION 7.	TEST EQUIPMENT LIST	21
ANNEX A -	TEST DETAILS.....	22
ANNEX B -	TEST DIAGRAMS	28

Section 1. Summary of Test Results

Manufacturer: Nokia, Inc.

Model No.: 6155i

Type: B3.0

Serial No.: 044/13202978

General: All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

This test report relates only to the item(s) tested.

The following deviations from, additions to, or exclusions from the test specifications have been made. None.

Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
RF Power Output	2.1046	Not Tested
Audio Frequency Response	2.1047	Not Tested
Audio Low Pass Filter Response	2.1047	Not Tested
Modulation Limiting	2.1047	Not Tested
Occupied Bandwidth	2.1049	Complies
Occupied Bandwidth (WB Data & SAT)	2.1049	Complies
Occupied Bandwidth (ST)	2.1049	Complies
Occupied Bandwidth (SAT)	2.1049	Complies
Occupied Bandwidth (SAT)	2.1049	Complies
Spurious Emissions at Antenna Terminals	2.1051	Complies
Field Strength of Spurious Emissions	2.1053	Complies
Frequency Stability	2.1055	Complies

Footnotes:

Measurement uncertainty for each test configuration is expressed to 95% probability.

.

Section 2. General Equipment Specification

Frequency Range: 824.04 to 848.97 MHz

Tunable Bands: 824.04 to 849.97 MHz

Necessary Bandwidth: 1.25 MHz CDMA
40 kHz Analog

Emission Designator: 1M25F9W
40KF3E

Output Impedance: 50 ohms


Operator Selection of Frequency: Software Controlled

Power Output Adjustment Capability:	Software Controlled
-------------------------------------	---------------------

Operational Description

The phone is a dual band CDMA phone operating in the 800 MHz cellular band and 1900 PCS band. It also supports analog operation in the 800 MHz Band

System Diagram

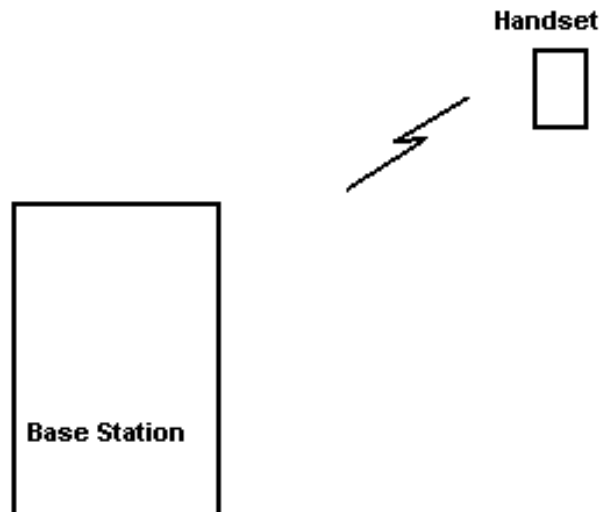

Section 3. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
TESTED BY: David Light	DATE: 7/25/2005

Test Results: [Complies.](#)

Test Data: [See attached plots](#)


Equipment Used: [1082-1472-1659-1464](#)

Measurement Uncertainty: [+/- 1.6](#) dB

Temperature: [22](#) °C


Relative Humidity: [45](#) %

Test Data – Occupied Bandwidth (Voice & SAT)

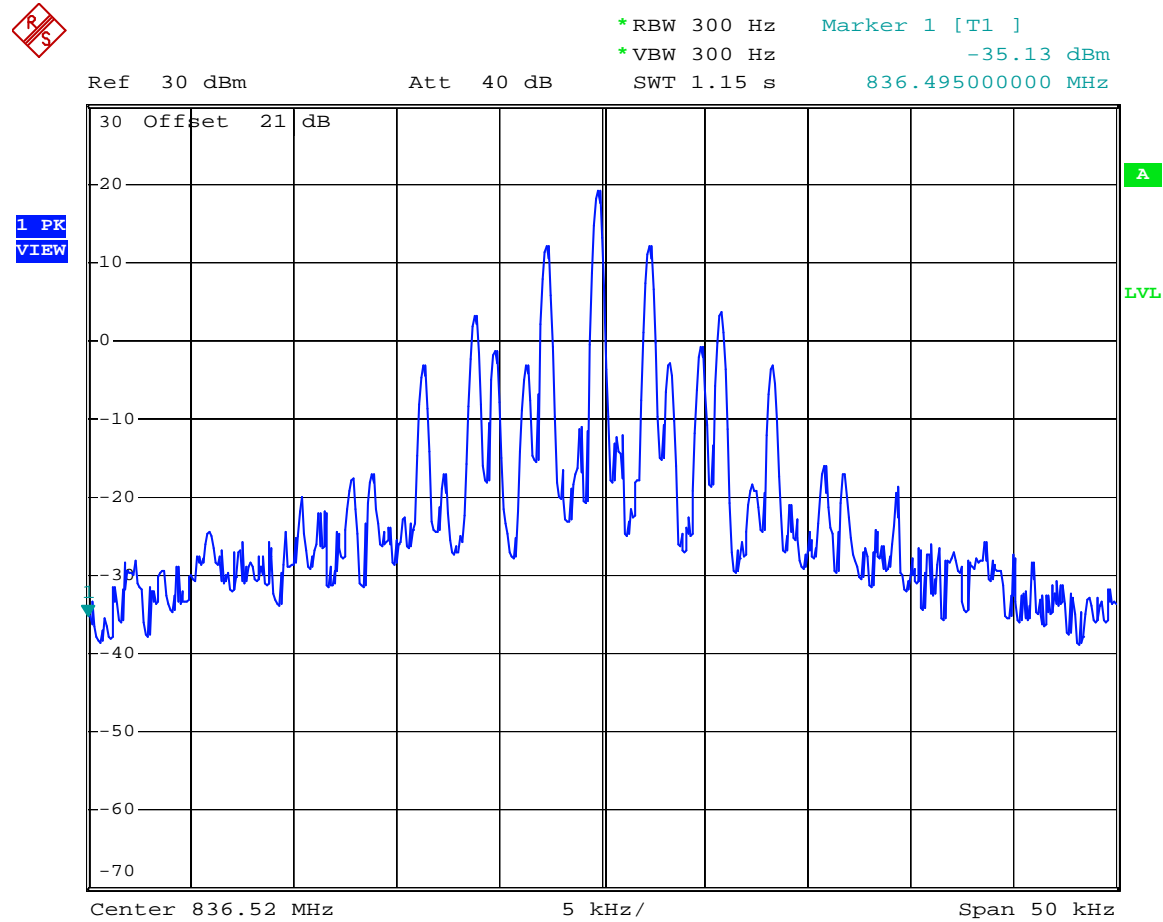

Date: 5.AUG.2005 10:56:18

Test Data – Occupied Bandwidth (CDMA)

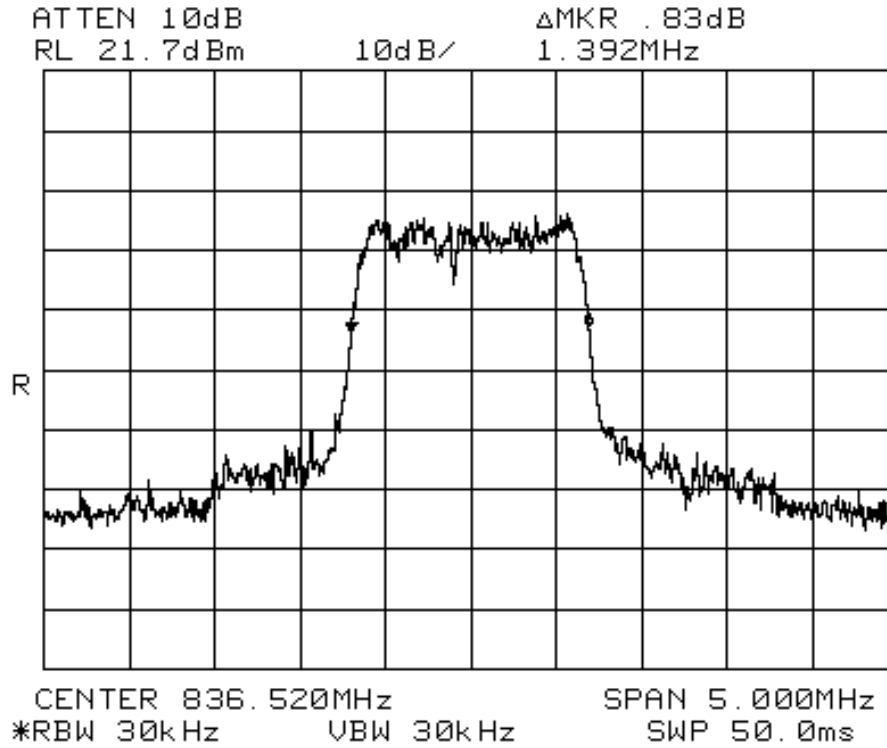

Section 4. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 8/2/2005

Test Results: [Complies.](#)

Test Data: [See attached plots](#)


Equipment Used: [1082-1472-1464-1659](#)

Measurement Uncertainty: [+/- 1.6](#) dB


Temperature: [22](#) °C

Relative Humidity: [45](#) %


Test Data – Spurious Emissions (Analog)

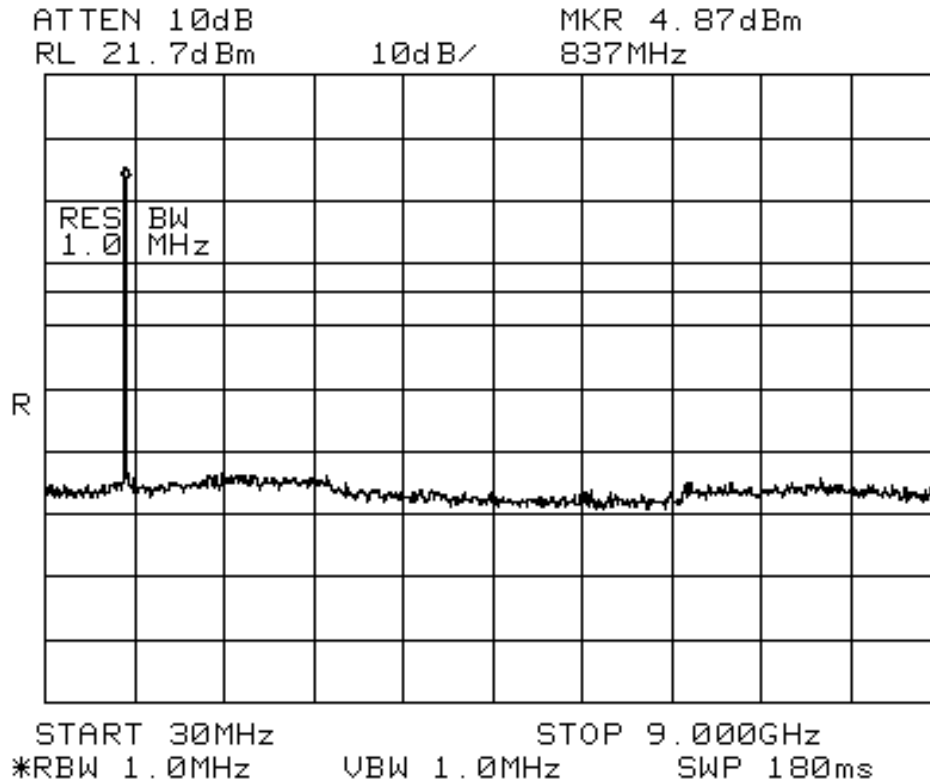

Test Data – Spurious Emissions (CDMA)

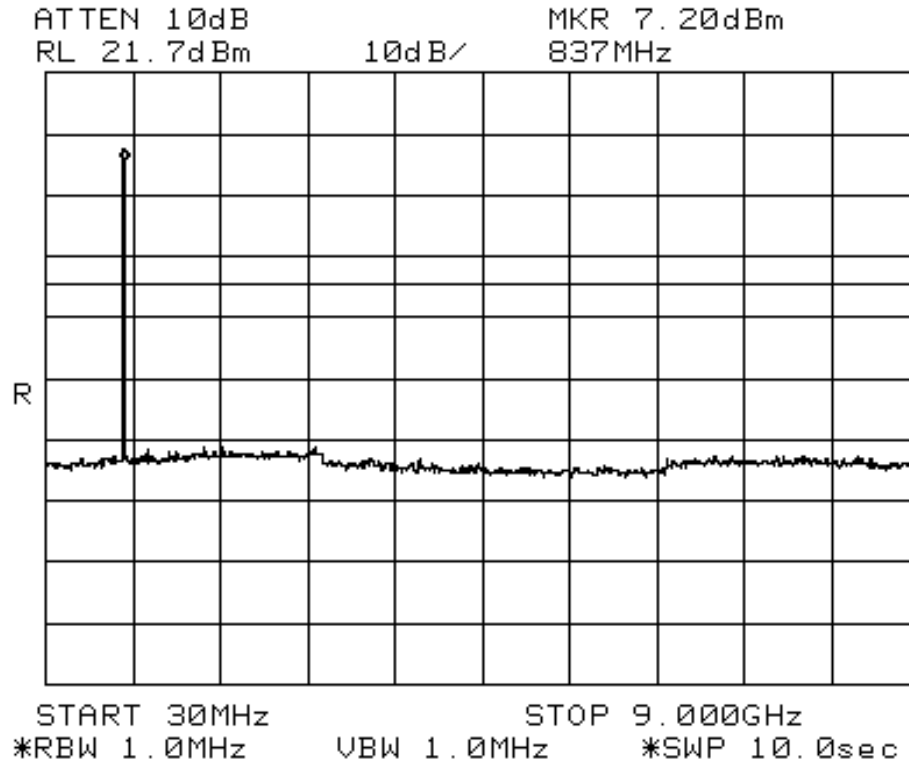


Test Data – Spurious Emissions (CDMA)

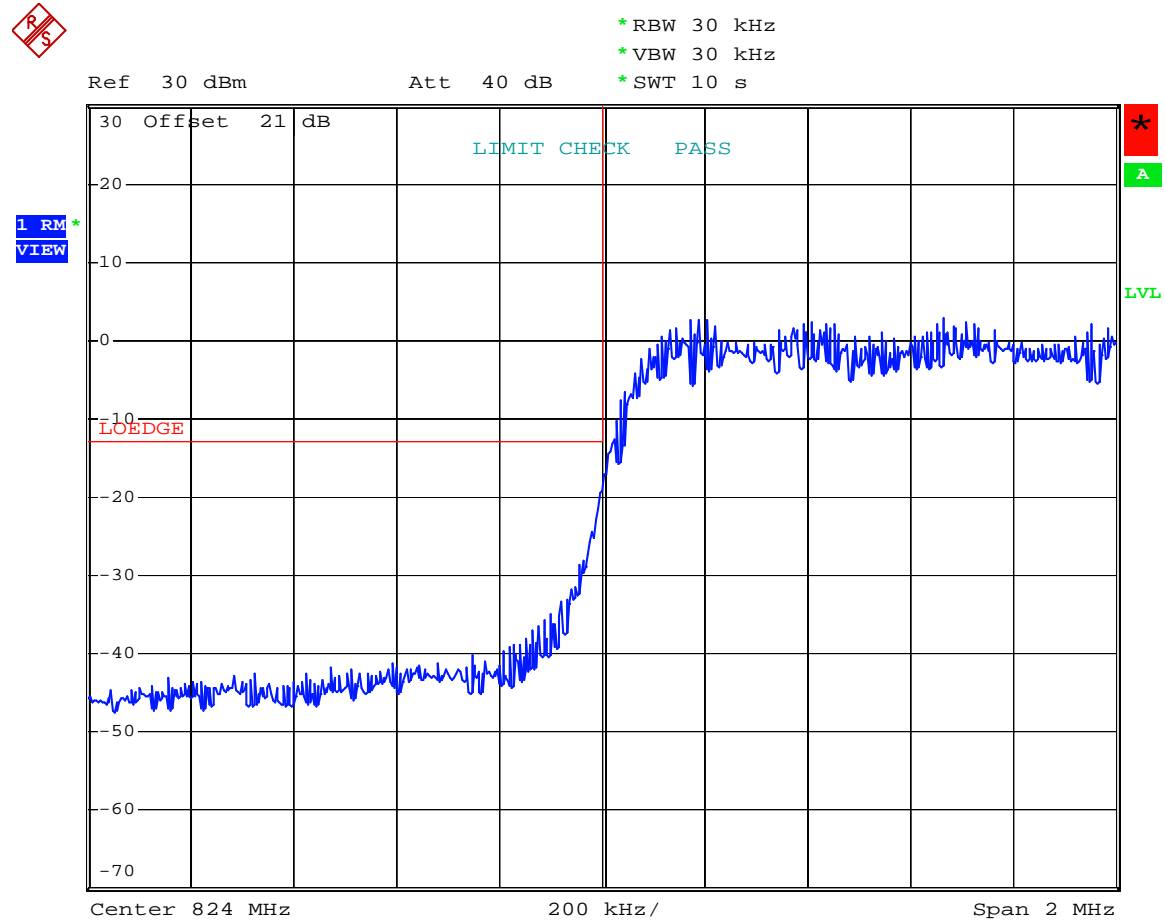

Date: 2.AUG.2005 14:45:01

Test Data – Spurious Emissions (CDMA)

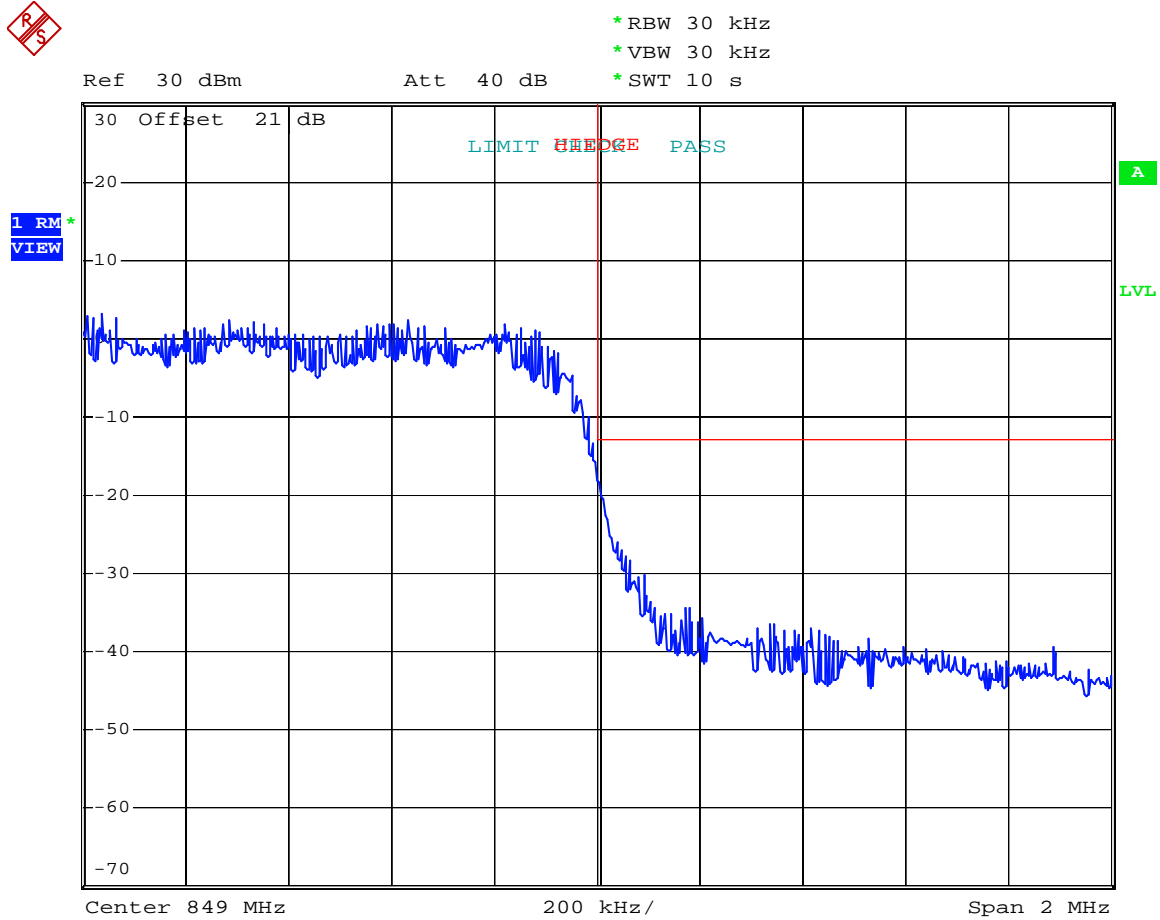

Date: 2.AUG.2005 14:49:24

Section 5. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY: David Light	DATE: 8/9/2005

Test Results: [Complies.](#)

Test Data: [See attached table.](#)

Equipment Used: [1464-1484-1485-1304-1016-1481](#)

Measurement Uncertainty: [+/- 3.6](#) dB

Temperature: [24](#) °C

Relative Humidity: [45](#) %

Test Data – Radiated Emissions

ERP										
Page <u>1</u> of <u>1</u>		Complete <u>X</u>		Preliminary _____						
Job No.: 5L0403		Date: 8/9/05								
Specification: PT22		Temperature(°C): 22								
Tested By: David Light		Relative Humidity(%) 45								
E.U.T.: Dual band/Tri mode CDMA HANDSET										
Configuration: TX										
Sample No: 1										
Location: AC 3		RBW: 1 MHz		Measurement Distance: 3 m						
Detector Type: Peak		VBW: 1 MHz								
Test Equipment Used										
Antenna: 1304		Directional Coupler: _____								
Pre-Amp: 1016		Cable #1: 1484								
Filter: 1481		Cable #2: 1485								
Receiver: 1464		Cable #3: _____								
Attenuator #1: _____		Cable #4: _____								
Attenuator #2: _____		Mixer: _____								
Additional equipment used: _____										
Measurement Uncertainty: +/-1.7 dB										
Frequency (MHz)	Meter Reading (dBm)	Correction Factor (dB)		Pre-Amp Gain (dB)	Substitution Antenna Gain (dBd)	Limit (dBm)	ERP (dBm)	ERP (mW)	Polarity	Comments
										Tx 836.52 MHz
										Upright position
										(Worst case)
										cdma
1673.04	-65.0	32.7		0	6.4		-26.0	0.0025	H	Noise floor
1673.04	-65.2	29.9		0	6.4		-29.0	0.0013	V	Noise floor
3346.08	-63.0	37.1		32.6	8.1		-50.4	0.0000	V	Noise floor
Notes: Searched spectrum from 30 MHz to 9 GHz. All emissions and noise floor readings within 20dB of spec limit are reported.										

Test Setup Photo



Section 6. Frequency Stability

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
TESTED BY: David Light	DATE: 8/3/2005

Test Results: [Complies.](#)

Test Data: [See attached table.](#)

Equipment Used: [HP8924C-1082-283-619](#)

Measurement Uncertainty: [+/- 1 x 10⁻⁷](#) ppm

Temperature: [22](#) °C

Relative Humidity: [45](#) %

Test Data – Frequency Stability Analog

<u>Frequency Stability</u>							
Page <u>1</u> of <u>1</u>							
Job No.: 5L0403		Date: 8/3/2005					
Specification: PT22		Temperature(°C): 22					
Tested By: David Light		Relative Humidity(%) 45					
E.U.T.: 6155i							
Configuration:		Tx - Linked to base station - Analog mode					
Sample Number: 1							
<u>Test Equipment Used</u>							
Antenna:		Directional Coupler:					
Pre-Amp:		Cable #1:					
Filter:		Cable #2:					
Receiver: HP8924C							
Attenuator #1: 1082							
Attenuator #2:							
<div style="border: 1px solid black; width: 80px; height: 20px; margin: 0 auto;"></div>							
Measurement Uncertainty: 1×10^{-17} ppm		Standard Test Frequency 836.520000 MHz					
Temp (°C)	Measured Frequency (MHz)	Rho	Test Voltage	Frequency Error (Hz)	Limit (+/-Hz)	Error (ppm)	Comment
20	836.520130		3.7	130	836.5	0.2	
20	836.520130		4.3	130	836.5	0.2	
20	836.520129		2.9	129	836.5	0.2	
50	836.520200		3.7	200	836.5	0.2	
40	836.520185		3.7	185	836.5	0.2	
30	836.520200		3.7	200	836.5	0.2	
10	836.520212		3.7	212	836.5	0.3	
0	836.520205		3.7	205	836.5	0.2	
-10	836.520200		3.7	200	836.5	0.2	
-20	836.520215		3.7	215	836.5	0.3	
-30					836.5		
Notes: The handset ceased operation at -20 degrees C.							

Test Data – Frequency Stability CDMA

<u>Frequency Stability</u>							
Page <u>1</u> of <u>1</u>							
Job No.: 5L0403		Date: 8/3/2005					
Specification: PT22		Temperature(°C): 22					
Tested By: David Light		Relative Humidity(%) 45					
E.U.T.: 6155i							
Configuration:		Tx - Linked to base station - CDMA mode					
Sample Number: 1							
<u>Test Equipment Used</u>							
Antenna:		Directional Coupler:					
Pre-Amp:		Cable #1:					
Filter:		Cable #2:					
Receiver: HP8924C							
Attenuator #1: 1082							
Attenuator #2:							
<div style="border: 1px solid black; width: 80px; height: 20px; margin: 0 auto;"></div>							
Measurement Uncertainty: 1×10^{-17} ppm		Standard Test Frequency 836.520000 MHz					
Temp (°C)	Measured Frequency (MHz)	Rho	Test Voltage	Frequency Error (Hz)	Limit (+/-Hz)	Error (ppm)	Comment
20	836.520002	0.994	3.7	2	836.5	0.0	
20	836.520002	0.990	4.3	2	836.5	0.0	
20	836.520002	0.995	2.9	2	836.5	0.0	Battery end point
50	836.520003	0.995	3.7	3	836.5	0.0	
40	836.520002	0.995	3.7	2	836.5	0.0	
30	836.520002	0.992	3.7	2	836.5	0.0	
10	836.520004	0.994	3.7	4	836.5	0.0	
0	836.520003	0.996	3.7	3	836.5	0.0	
-10	836.520004	0.996	3.7	4	836.5	0.0	
-20	836.520002	0.995	3.7	2	836.5	0.0	
-30					836.5		
Notes: The handset ceased operation at -20 degrees C.							

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	11/12/04	11/12/05
1482	Band Pass Filter	K & L 11SH10-4000/T12000-0/0	2	Cal B4 Use	N/A
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/14/05	01/15/07
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	08/02/04	08/02/05
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1472	20db Attenuator DC 18 Ghz	Omni Spectra 20600-20db	NONE	CBU	N/A
Nokia	Cell Site Simulator	HP 8924C	US38283285	07/18/05	07/18/07
283	Environmental Chamber with controller # 1189006	ENVIROTRONICS SH27 & 2030-22844	129010083	09/16/04	09/16/05
619	THERMOMETER	FLUKE 51	4520028	09/16/04	09/16/05

ANNEX A - TEST DETAILS

NAME OF TEST: Occupied Bandwidth (Voice & SAT)	PARA. NO.: 2.1049
--	-------------------

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (i) On any frequency removed from the carrier frequency by more than 12 kHz but not more than 20 kHz:

at least $117 \log (f_d/12)$

- (ii) On any frequency removed from the carrier frequency by more than 20 kHz, up to the first multiple of the carrier frequency:

at least $100 \log (f_d/11)$ dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: \geq RBW

Span: 100 kHz

Sweep: Auto

Input Signal Characteristics (F3E/F3D):

RF level: Maximum recommended by manufacturer

AF1 frequency: 6 kHz

AF1 level: sufficient to produce 2 kHz deviation

AF2 frequency: 2.5 kHz

AF2 level: sufficient to produce 12 kHz deviation.

NAME OF TEST: Occupied Bandwidth (Digital Modulation)	PARA. NO.: 2.1049
--	--------------------------

Minimum Standard: Not defined by FCC. Input vs. Output.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: CDMA (30 kHz), GSM (30 kHz), NADC (1 kHz) and CDPD (1 kHz)

VBW: \geq RBW

Span: As required

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.1051
--	-------------------

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 30 kHz (AMPS). As required for digital modulations.

VBW: \geq RBW

Start Frequency: 0 MHz

Stop Frequency: 10 GHz

Sweep: Auto

NAME OF TEST: Field Strength of Spurious Radiation

PARA. NO.: 2.1053

Minimum Standard:

Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Test Method:

The maximum field strength of the spurious emission is measured at a distance of 3 meters. The device under test is then replaced with a substitution antenna of known gain with respect to a $\frac{1}{4}$ wave dipole antenna. A calibrated signal source is used to feed the substitution antenna. The rf level to the substitution antenna is adjusted to repeat the previously measured field strength. The rf input level to the substitution antenna is the effective radiated power of the spurious emission after any correction for substitution antenna gain against a $\frac{1}{4}$ wave dipole.

The spectrum is searched to 10 GHz.

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Table C-1

Freq. Range (MHz)	Base, fixed	Mobile > 3 W	Mobile \leq 3 W
821 to 896	1.5	2.5	2.5

Method Of Measurement:Frequency Stability With Voltage Variation:


The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:


The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

ANNEX B - TEST DIAGRAMS


Para. No. 2.1049 - Occupied Bandwidth

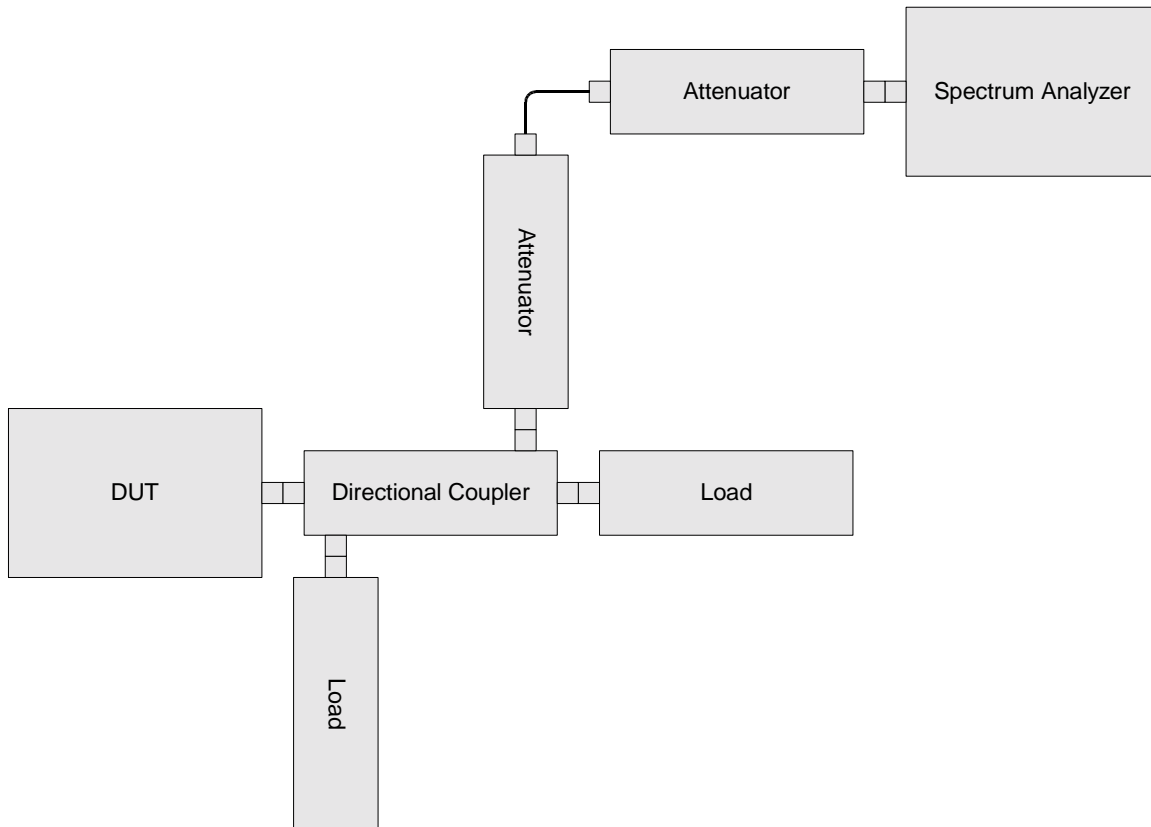


Para. No. 2.1051 Spurious Emissions at Antenna Terminals

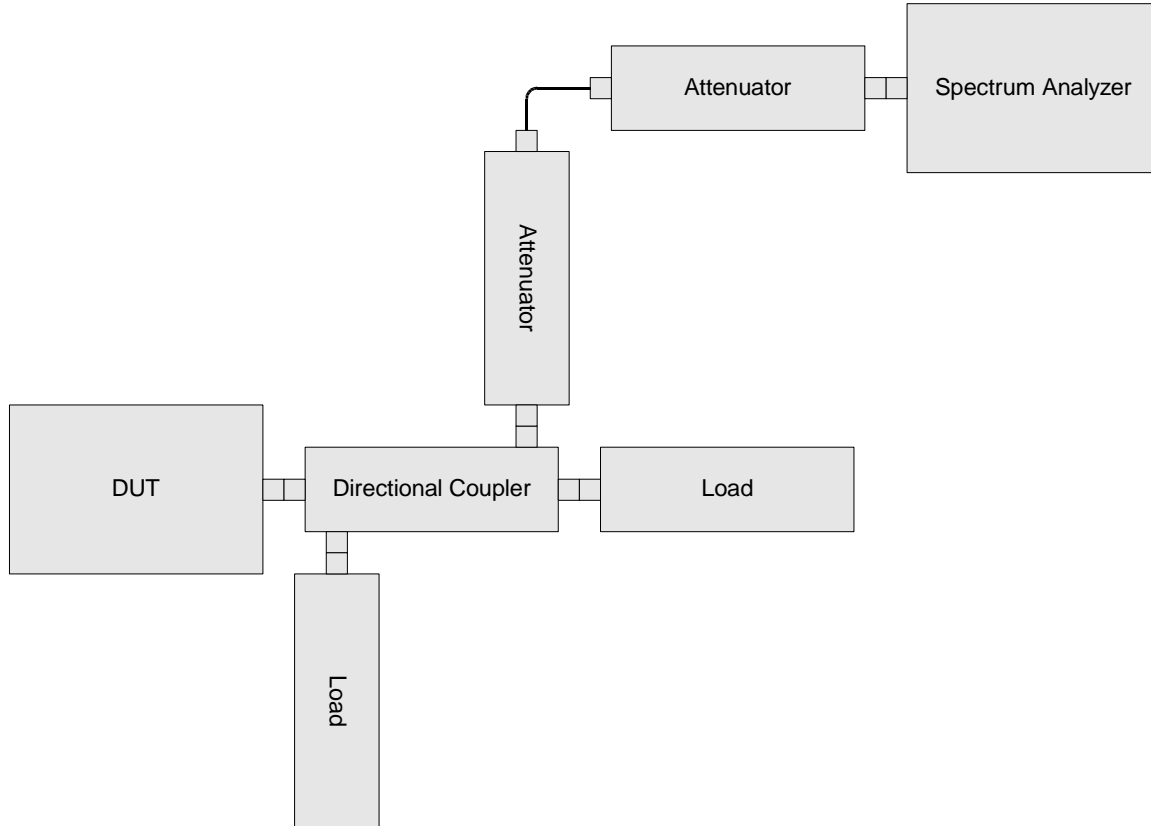

Para. No. 2.1053 - Field Strength of Spurious Radiation

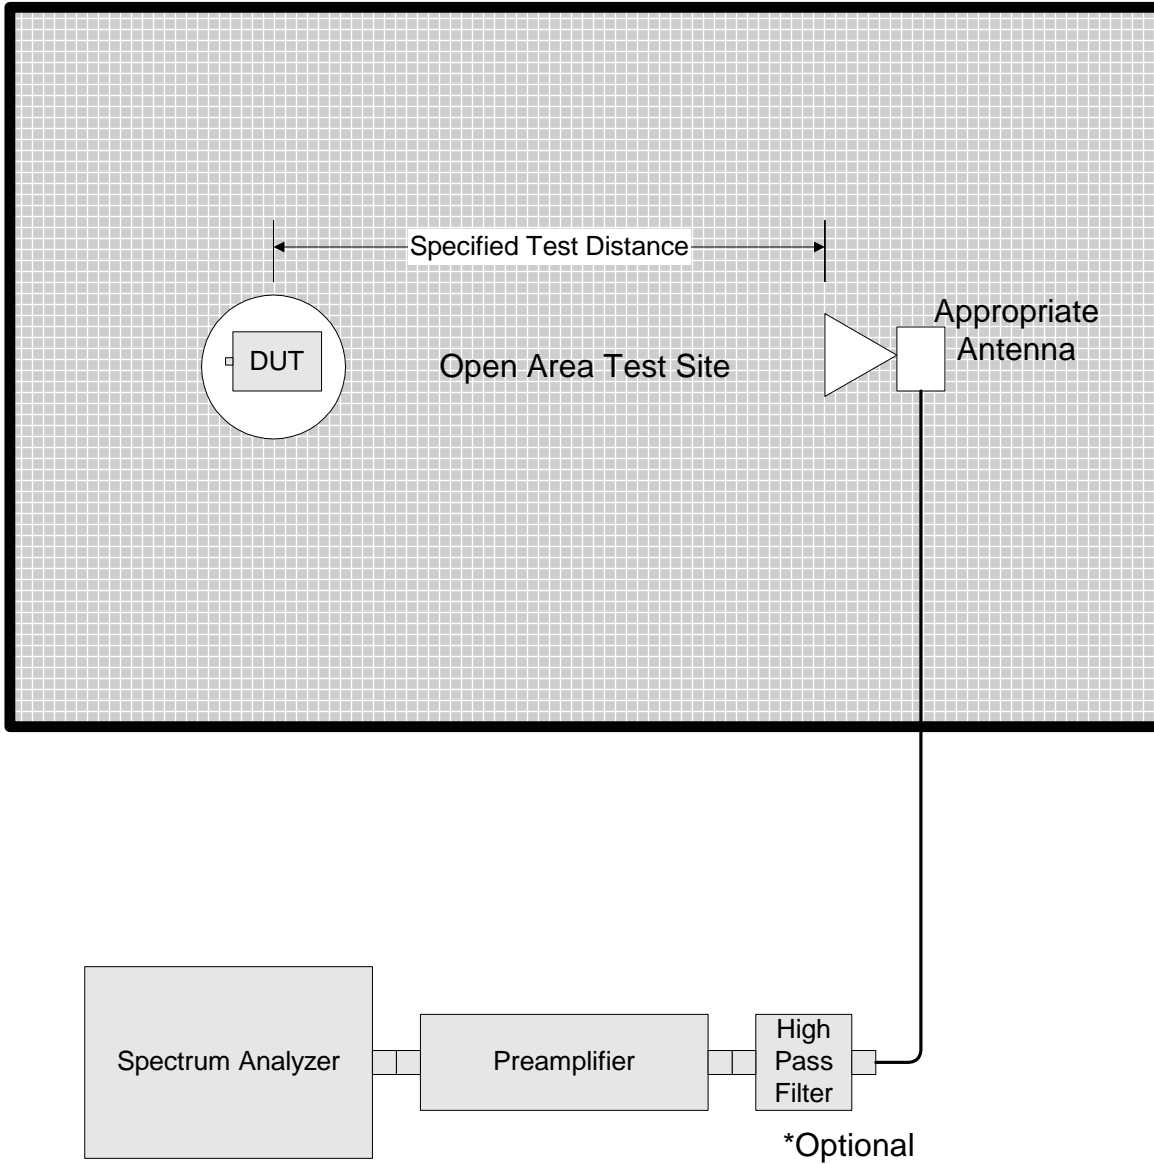

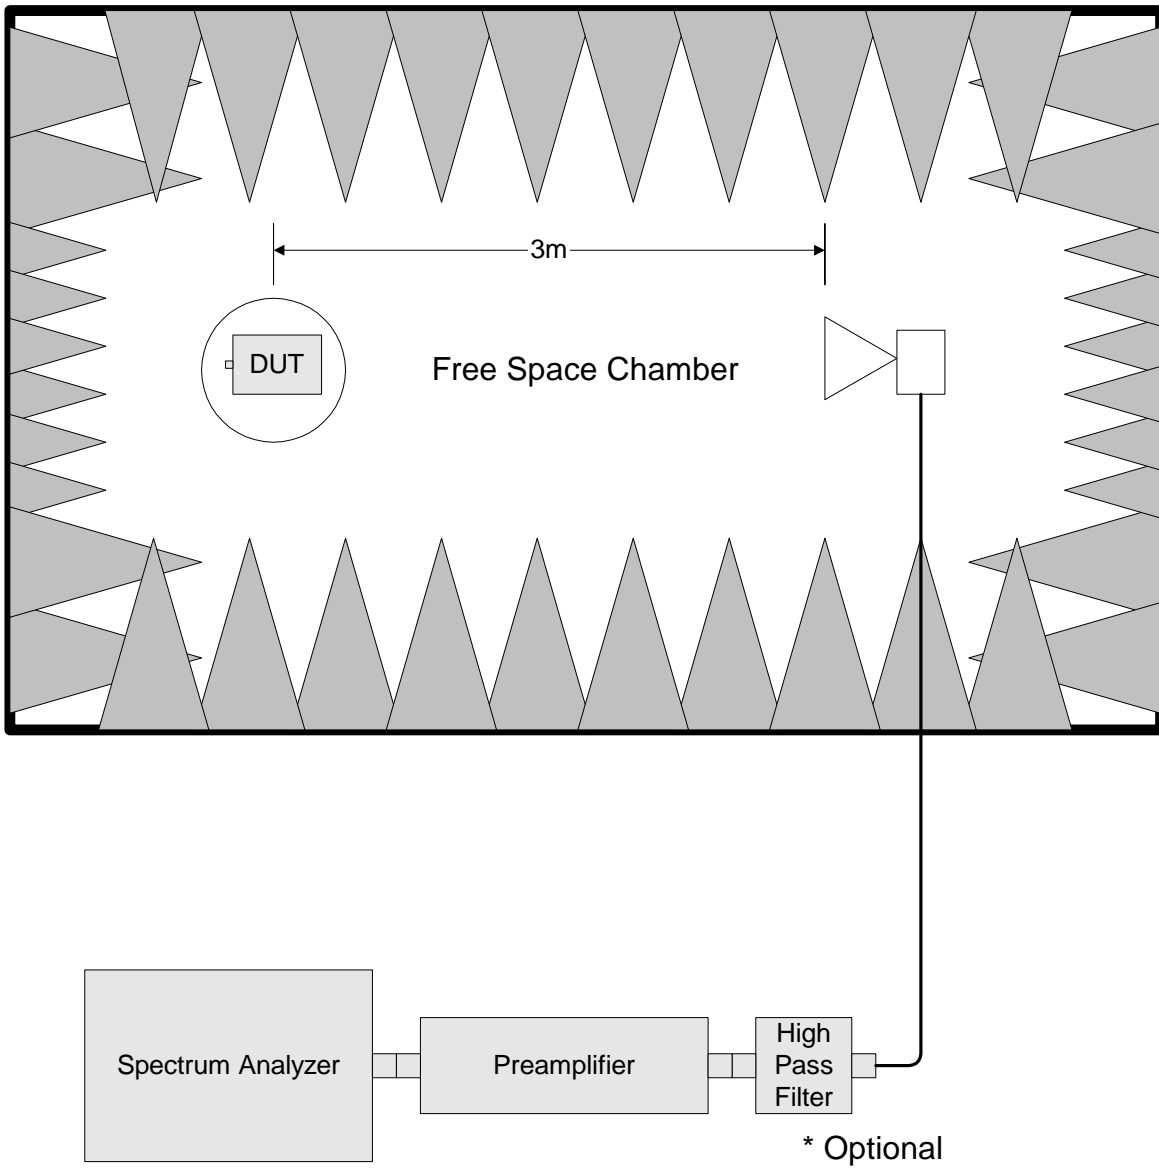

Para. No. 2.1055 - Frequency Stability

