

Page 1 of 18

Applicant (JPP001):

J P PRODUCTS CO., LTD.

RM.504-5 CHINA CHEM GOLDEN PLAZA 77 MODY

ROAD, TST, KLN, HK

Manufacturer:

Dongguan Meili Electronic Ltd.

Description of Sample(s):

Submitted samples(s) said to be

Product:

WALKIE TALKIE

Brand Name:

N/A

Model Number:

SVDJP-1352009

FCC ID:

SVDJP-1352009

Date Sample(s) Received:

2014-04-02

**Date Tested:** 

2014-04-06

**Investigation Requested:** 

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 and ANSI C63.4: 2009 for FCC

Certification.

Conclusion(s):

The submitted product <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remark(s):

---

Dr. LEE Kam Chuen,
Authorized Signatory

ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Page 2 of 18

## CONTENT:

	Cover Content	Page 1 of 18 Page 2 of 18
<u>1.0</u>	General Details	
1.1	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 18
1.2	Date of Order	Page 3 of 18
1.3	Submitted Sample(s)	Page 3 of 18
1.4	Test Duration	Page 3 of 18
1.5	Country of Origin	Page 3 of 18
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 4 of 18
2.2	Test Standards and Results Summary	Page 4 of 18
<u>3.0</u>	Test Results	
3.1	Emission	Page 5-11 of 18
3.2	Bandwidth Measurement	Page 12-14 of 18
	Appendix A	
	List of Measurement Equipment	Page 15 of 18
	Appendix B	
	Photographs	Page 16-18 of 18



Page 3 of 18

## 1.0 General Details

1.1 Equipment Under Test [EUT]
Description of Sample(s)

Product:

WALKIE TALKIE

Manufacturer:

Dongguan Meili Electronic Ltd.

Brand Name:

N/A

Model Number:

SVDJP-1352009

Input Voltage:

9Vd.c("6F22" size battery x 1)

#### 1.1.1 Description of EUT Operation

The Equipment Under Test (EUT) is a J P PRODUCTS CO., LTD., WALKIE TALKIE. The EUT is a transmitter of radio control toy. The transmitter was operating with 1 button; the EUT continues to transmit while the button is pressed, It is audio transmitter, Modulation by IC, and type is AM modulation.

## 1.2 Date of Order

2014-04-02

#### 1.3 Submitted Sample(s):

1 Sample

#### 1.4 Test Duration

2014-04-06

## 1.5 Country of Origin

China

For Conditions of Issuance of this test report, please refer to the overleaf and Website.



Page 4 of 18

## 2.0 Technical Details

# 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2013 and ANSI C63.4:2009 for FCC Certification.

## 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary					
Test Condition Test Requirement Test Method Class / Test Result Severity Pass Faile					
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2009	N/A		
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2009	N/A		

Note: N/A - Not Applicable



Page 5 of 18

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement:

FCC 47CFR 15.235

Test Method:

ANSI C63.4:2009

Test Date:

2014-04-06

Mode of Operation:


Tx mode

#### Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the G/F of "The Hong Kong Standards and Testing Centre Ltd." with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

#### **Test Setup:**

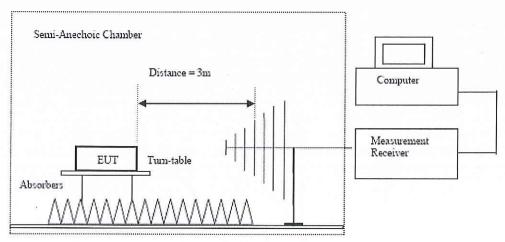

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antenna, above 1000MHz hom antenna is used.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong



Page 6 of 18

# Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[µV/m]	[μV/m]
49.82-49.90	100,000	10,000

Results of Tx mode: PASS

	·	Field Strengt	h of Fundame	ntal Emission	IS .	
			Peak Value	9		0
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength		Polarity
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	(.5)
49.875	37.8	9.7	47.5	237.1	100,000	Vertical

		Field Str	ength of Fun		nissions		
Average  Frequency Measured Adjusted by Correction Field Field Limit @3m E-Field							E-Field
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity
MHz	dΒμV	dB	dB/m	dBμV/m	μV/m	μV/m	1.5
49.875	37.5	Nil	9.7	47.2	229.1	10,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.



Page 7 of 18

## Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Tx mode (9kHz-30MHz): PASS

Emissions detected are more than 20 dB below the limit line(s).

Results of Tx mode: PASS

		R	adiated Emiss	ions		
			Quasi-Peak			
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength		Polarity
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	
99.75	16.9	9.7	26.6	21.4	150	Vertical
149.60	17.2	9.9	27.1	22.6	150	Vertical
199.50	17.1	10.8	27.9	24.8	150	Vertical
299.25	17.1	13.2	30.3	32.7	200	Horizonta



Page 8 of 18


## Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Rx mode: PASS

#### Horizontal

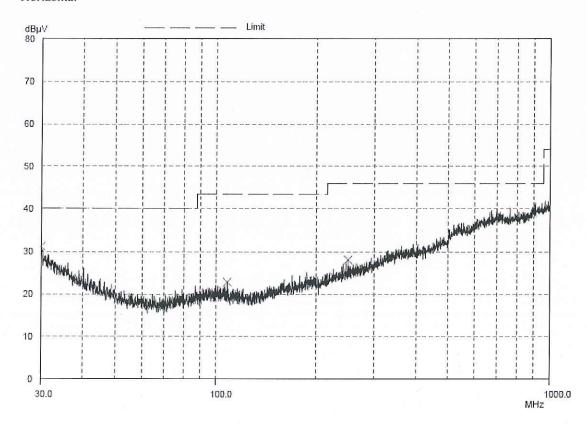



Page 9 of 18

Results of Rx mode: PASS

Radiated Emissions Quasi-Peak							
Emission Frequency MHz	E-Field Polarity	Level @3m dBµV/m	Limit @3m dBµV/m	Level @3m µV/m	Limit @3m µV/m		
30.0	Horizontal	30.1	40.0	32.0	100		
108.4	Horizontal	22.7	43.5	13.6	150		
249.6	Horizontal	28.1	46.0	25.4	200		



Page 10 of 18


## Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Rx mode: PASS

#### Vertical

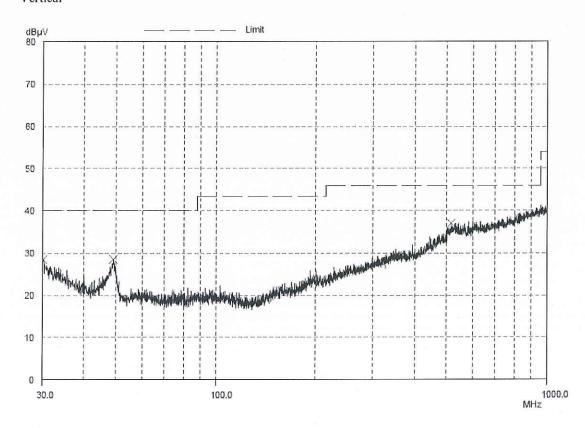



Page 11 of 18

Results of Rx mode: PASS

Radiated Emissions Quasi-Peak						
Emission Frequency MHz	E-Field Polarity	Level @3m dBµV/m	Limit @3m dBµV/m	Level @3m µV/m	Limit @3m µV/m	
30.2	Vertical	28.4	40.0	26.3	100	
49.2	Vertical	28.5	40.0	26.6	100	
514.3	Vertical	35.9	46.0	62.4	200	

#### Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty (30MHz - 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Page 12 of 18

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement:

FCC 47 CFR 15.235

Test Method:

ANSI C63.4:2009 (Section 13.1.7)

Test Date:

2014-04-06

Mode of Operation:

Tx mode

#### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

## **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Page 13 of 18

#### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
49.86	16.00	within 49.82-49.90


## 20dB Bandwidth of Fundamental Emission

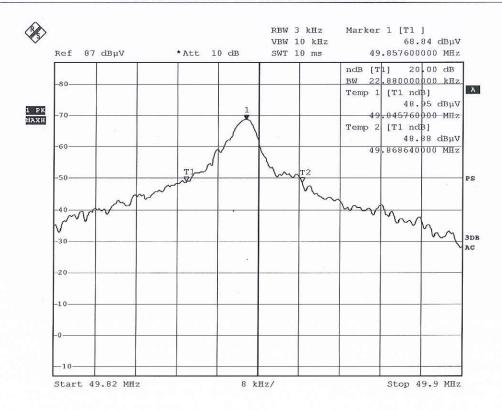



Page 14 of 18

# 26 dB Level Reduction at Band Edge

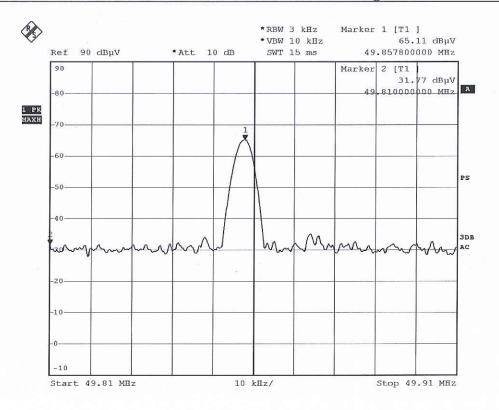



Page 15 of 18

## Appendix A

## List of Measurement Equipment

#### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	(a=)	2013/10/02	2014/10/02
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2012/05/31	2014/05/31
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2013/05/07	2014/05/07
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2013/09/14	2014/09/14

#### Remarks:-

CM Corrective Maintenance

N/A Not Applicable


TBD To Be Determined



Page 16 of 18

Appendix B


Photographs of EUT






Rear View of the product

Inner Circuit Top View

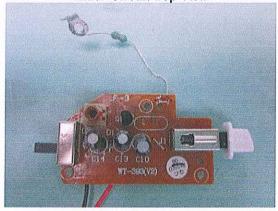


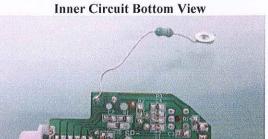



Page 17 of 18


## Photographs of EUT

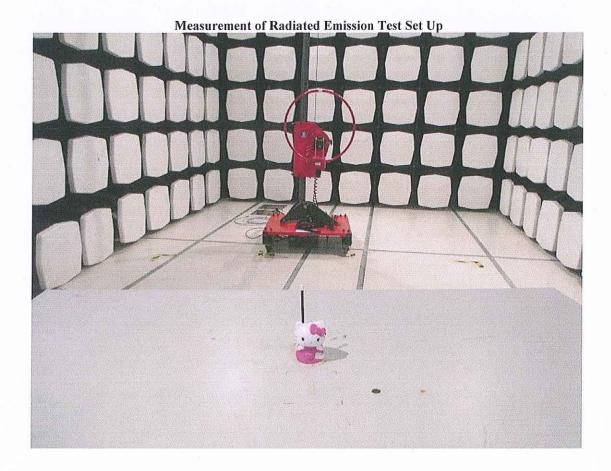



Page 18 of 18

Photographs of EUT

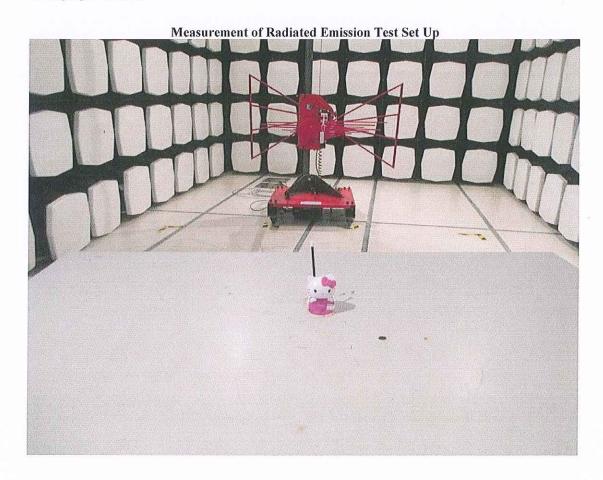

\*\*\*\*\* End of Test Report \*\*\*\*\*