

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
48	16QAM	10 MHz	50	0	55290	3555.0	22.2
					55990	3526.0	22.1
					56690	3695.0	22.3
			25	12	55290	3555.0	22.3
					55990	3526.0	22.2
					56690	3695.0	22.4
			1	0	55290	3555.0	23.3
					55990	3526.0	23.2
					56690	3695.0	23.2
			1	24	55290	3555.0	23.3
					55990	3526.0	23.1
					56690	3695.0	23.2
		15 MHz	75	0	55315	3557.5	22.1
					55990	3626.0	22.0
					56665	3692.5	22.1
			36	19	55315	3557.5	22.3
					55990	3626.0	22.3
					56665	3692.5	22.2
			1	0	55315	3557.5	23.2
					55990	3626.0	23.3
					56665	3692.5	23.3
			1	74	55315	3557.5	23.1
					55990	3626.0	23.0
					56665	3692.5	23.2
		20 MHz	100	0	55340	3560.0	22.2
					55990	3526.0	22.1
					56640	3690.0	22.3
			50	25	55340	3560.0	22.1
					55990	3526.0	22.0
					56640	3690.0	22.2
			1	0	55340	3560.0	23.3
					55990	3526.0	23.4
					56640	3690.0	23.2
			1	99	55340	3560.0	23.1
					55990	3526.0	23.2
					56640	3690.0	23.2

Table 10.5.2 Test Reduction Table – LTE

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 2 1850-1910 MHz	A	18700	20 MHz	QPSK	50	0	Tested
		18900					Tested
		19100					Tested
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Tested
		18700			1	49	Tested
		18900					Tested
		19100					Tested
		18700				99	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				99	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵
	B	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	49	Reduced ²
		18900					Tested
		19100					Reduced ²
		18700				99	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				99	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 2 1850-1910 MHz	C	18700	20 MHz	QPSK	50	25	Reduced ⁶	
		18900					Tested	
		19100					Reduced ⁶	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	49	Tested	
		18900					Tested	
		19100					Tested	
		18700				99	Reduced ²	
		18900					Reduced ²	
		19100					Reduced ²	
		18700		16QAM	50	25	Reduced ³	
		18900					Reduced ³	
		19100					Reduced ³	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	49	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		18700				99	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						
	D	18700	20 MHz	QPSK	50	25	Reduced ⁶	
		18900					Tested	
		19100					Reduced ⁶	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	49	Reduced ⁶	
		18900					Tested	
		19100					Reduced ⁶	
		18700				99	Reduced ²	
		18900					Reduced ²	
		19100					Reduced ²	
		18700		16QAM	50	25	Reduced ³	
		18900					Reduced ³	
		19100					Reduced ³	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	49	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		18700				99	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 2 1850-1910 MHz	E	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	49	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700				99	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				99	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$\{[(3.0)/(\sqrt{1.91}) * 50 \text{ mm}]\} + \{[97 - 50 \text{ mm}] * 10\} = 578 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced		
Band 25 1850-1915 MHz	A	26140	20 MHz	QPSK	50	0	Tested		
		26365					Tested		
		26590					Tested		
		26140			100	0	Tested		
		26365					Reduced ¹		
		26590					Reduced ¹		
		26140			1	49	Tested		
		26365					Tested		
		26590					Tested		
		26140				99	Reduced ²		
		26365					Reduced ²		
		26590					Reduced ²		
		26140		16QAM	50	25	Reduced ³		
		26365					Reduced ³		
		26590					Reduced ³		
		26140			100	0	Reduced ¹		
		26365					Reduced ¹		
		26590					Reduced ¹		
		26140			1	49	Reduced ⁴		
		26365					Reduced ⁴		
		26590					Reduced ⁴		
		26140				99	Reduced ⁴		
		26365					Reduced ⁴		
		26590					Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵	
		B		26140	20 MHz	QPSK	50	25	Reduced ⁶
	26365		Tested						
	26590		Reduced ⁶						
	26140		100	0			Reduced ¹		
	26365						Reduced ¹		
	26590						Reduced ¹		
	26140		1	49			Reduced ²		
	26365						Tested		
	26590						Reduced ²		
	26140			99			Reduced ²		
	26365						Reduced ²		
	26590						Reduced ²		
	26140		16QAM	50		25	Reduced ³		
	26365						Reduced ³		
	26590						Reduced ³		
	26140			100		0	Reduced ¹		
	26365						Reduced ¹		
	26590						Reduced ¹		
	26140			1		49	Reduced ⁴		
	26365						Reduced ⁴		
	26590						Reduced ⁴		
	26140					99	Reduced ⁴		
	26365						Reduced ⁴		
	26590						Reduced ⁴		
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵		

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced		
Band 25 1850-1915 MHz	C	26140	20 MHz	QPSK	50	25	Reduced ⁶		
		26365					Tested		
		26590					Reduced ⁶		
		26140			100	0	Tested		
		26365					Reduced ¹		
		26590					Reduced ¹		
		26140			1	49	Tested		
		26365					Tested		
		26590				99	Tested		
		26140					Reduced ²		
		26365					Reduced ²		
		26590					Reduced ²		
		26140		16QAM	50	25	Reduced ³		
		26365					Reduced ³		
		26590					Reduced ³		
		26140			100	0	Reduced ¹		
		26365					Reduced ¹		
		26590					Reduced ¹		
		26140			1	49	Reduced ⁴		
		26365					Reduced ⁴		
		26590				99	Reduced ⁴		
		26140					Reduced ⁴		
		26365					Reduced ⁴		
		26590					Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵	
		D		26140	20 MHz	QPSK	50	25	Reduced ⁶
	26365		Tested						
	26590		Reduced ⁶						
	26140		100	0			Reduced ¹		
	26365						Reduced ¹		
	26590						Reduced ¹		
	26140		1	49			Reduced ⁶		
	26365						Tested		
	26590			99			Reduced ⁶		
	26140						Reduced ²		
	26365						Reduced ²		
	26590						Reduced ²		
	26140		16QAM	50		25	Reduced ³		
	26365						Reduced ³		
	26590						Reduced ³		
	26140			100		0	Reduced ¹		
	26365						Reduced ¹		
	26590						Reduced ¹		
	26140			1		49	Reduced ⁴		
	26365						Reduced ⁴		
	26590					99	Reduced ⁴		
	26140						Reduced ⁴		
	26365						Reduced ⁴		
	26590						Reduced ⁴		
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵		

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 25 1850-1915 MHz	E	26140	20 MHz	QPSK	50	25	Reduced ⁶
		26365					Tested
		26590					Reduced ⁶
		26140			100	0	Reduced ¹
		26365					Reduced ¹
		26590					Reduced ¹
		26140			1	49	Reduced ⁶
		26365					Tested
		26590					Reduced ⁶
		26140				99	Reduced ²
		26365					Reduced ²
		26590					Reduced ²
		26140		16QAM	50	25	Reduced ³
		26365					Reduced ³
		26590					Reduced ³
		26140			100	0	Reduced ¹
		26365					Reduced ¹
		26590					Reduced ¹
		26140			1	49	Reduced ⁴
		26365					Reduced ⁴
		26590					Reduced ⁴
		26140				99	Reduced ⁴
		26365					Reduced ⁴
		26590					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$\{[(3.0)/(\sqrt{1.915})]*50 \text{ mm}\} + \{[97-50 \text{ mm}]*10\} = 578 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 66 1710-1780 MHz	A	132072	20 MHz	QPSK	50	25	Tested
		132322					Tested
		132572					Tested
		132072			100	0	Tested
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Tested
		132322					Tested
		132572					Tested
		132072				99	Reduced ²
		132322					Reduced ²
		132572					Reduced ²
		132072		16QAM	50	25	Reduced ³
		132322					Reduced ³
		132572					Reduced ³
		132072			100	0	Reduced ¹
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		132072				99	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵
	B	132072	20 MHz	QPSK	50	25	Reduced ⁶
		132322					Tested
		132572					Reduced ⁶
		132072			100	0	Reduced ¹
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Reduced ⁶
		132322					Tested
		132572					Reduced ⁶
		132072				99	Reduced ²
		132322					Reduced ²
		132572					Reduced ²
		132072		16QAM	50	25	Reduced ³
		132322					Reduced ³
		132572					Reduced ³
		132072			100	0	Reduced ¹
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		132072				99	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴ – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ – If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ – If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 66 1710-1780 MHz	C	132072	20 MHz	QPSK	50	25	Reduced ⁶	
		132322					Tested	
		132572			100	0	Reduced ⁶	
		132072					Reduced ¹	
		132322					Reduced ¹	
		132572			1	49	Reduced ¹	
		132072					Reduced ⁶	
		132322				99	Tested	
		132572					Reduced ⁶	
		132072				99	Reduced ²	
		132322					Reduced ²	
		132572		16QAM	50	25	Reduced ²	
		132072					Reduced ³	
		132322			100	0	Reduced ³	
		132572					Reduced ³	
		132072			1	49	Reduced ¹	
		132322					Reduced ¹	
		132572				99	Reduced ¹	
		132072					Reduced ⁴	
		132322				99	Reduced ⁴	
		132572					Reduced ⁴	
		132072				99	Reduced ⁴	
		132322					Reduced ⁴	
		132572				Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						
	D	132072	20 MHz	QPSK	50	25	Reduced ⁶	
		132322					Tested	
		132572			100	0	Reduced ⁶	
		132072					Reduced ¹	
		132322					Reduced ¹	
		132572			1	49	Reduced ¹	
		132072					Reduced ⁶	
		132322				99	Tested	
		132572					Reduced ⁶	
		132072				99	Reduced ²	
		132322					Reduced ²	
		132572		16QAM	50	25	Reduced ²	
		132072					Reduced ³	
		132322			100	0	Reduced ³	
		132572					Reduced ³	
		132072			1	49	Reduced ¹	
		132322					Reduced ¹	
		132572				99	Reduced ¹	
		132072					Reduced ⁴	
		132322				99	Reduced ⁴	
		132572					Reduced ⁴	
		132072				99	Reduced ⁴	
		132322					Reduced ⁴	
		132572				Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴ – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ – If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ – If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 66 1710-1780 MHz	E	132072	20 MHz	QPSK	50	25	Reduced ⁶
		132322					Tested
		132572					Reduced ⁶
		132072			100	0	Reduced ¹
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Tested
		132322					Tested
		132572					Tested
		132072				99	Reduced ²
		132322					Reduced ²
		132572					Reduced ²
		132072		16QAM	50	25	Reduced ³
		132322					Reduced ³
		132572					Reduced ³
		132072			100	0	Reduced ¹
		132322					Reduced ¹
		132572					Reduced ¹
		132072			1	49	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		132072				99	Reduced ⁴
		132322					Reduced ⁴
		132572					Reduced ⁴
		132072					Reduced ⁴
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{1.755})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 583 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 5 824-849 MHz	A	20450	10 MHz	QPSK	25	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Tested
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Tested
		20525					Tested
		20600					Tested
		20450				49	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	12	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				49	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450					Reduced ⁴
		20525					Reduced ⁴
	20600	Reduced ⁴					
	All lower bandwidths (5 MHz)						Reduced ⁵
	B	20450	10 MHz	QPSK	25	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450				49	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	12	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				49	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
20450		Reduced ⁴					
20525		Reduced ⁴					
20600	Reduced ⁴						
All lower bandwidths (5 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 5 824-849 MHz	C	20450	10 MHz	QPSK	25	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450				49	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	12	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				49	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450					Reduced ⁴
		20525					Reduced ⁴
	20600	Reduced ⁴					
	All lower bandwidths (5 MHz)						Reduced ⁵
	D	20450	10 MHz	QPSK	25	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450				24	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	12	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				49	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
20450		Reduced ⁴					
20525		Reduced ⁴					
20600	Reduced ⁴						
All lower bandwidths (5 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 5 824-849 MHz	E	20450	10 MHz	QPSK	25	12	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	12	Reduced ⁶
		20525					Tested
		20600				24	Reduced ⁶
		20450					Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	12	Reduced ³
		20525					Reduced ³
		20600			50	0	Reduced ³
		20450					Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	24	Reduced ⁴
		20525					Reduced ⁴
		20600				49	Reduced ⁴
		20450					Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
20450	Reduced ⁴						
All lower bandwidths (5 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{0.849})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 632 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 26 814-849 MHz	A	26740	15 MHz	QPSK	36	19	Reduced ⁶	
		26865					Tested	
		26990					Reduced ⁶	
		26740			75	0	Reduced ¹	
		26865					Reduced ¹	
		26990					Reduced ¹	
		26740			1	37	Reduced ⁶	
		26865					Tested	
		26990					Reduced ⁶	
		26740				74	Reduced ²	
		26865					Reduced ²	
		26990					Reduced ²	
		26740		16QAM	36	19	Reduced ³	
		26865					Reduced ³	
		26990					Reduced ³	
		26740			75	0	Reduced ¹	
		26865					Reduced ¹	
		26990					Reduced ¹	
		26740			1	37	Reduced ⁴	
		26865					Reduced ⁴	
		26990					Reduced ⁴	
		26740				74	Reduced ⁴	
		26865					Reduced ⁴	
		26990					Reduced ⁴	
		All lower bandwidths (5 MHz)						
	B	26740	15 MHz	QPSK	36	19	Reduced ⁶	
		26865					Tested	
		26990					Reduced ⁶	
		26740			75	0	Reduced ¹	
		26865					Reduced ¹	
		26990					Reduced ¹	
		26740			1	37	Reduced ⁶	
		26865					Tested	
		26990					Reduced ⁶	
		26740				74	Reduced ²	
		26865					Reduced ²	
		26990					Reduced ²	
		26740		16QAM	36	19	Reduced ³	
		26865					Reduced ³	
		26990					Reduced ³	
		26740			75	0	Reduced ¹	
		26865					Reduced ¹	
		26990					Reduced ¹	
		26740			1	37	Reduced ⁴	
		26865					Reduced ⁴	
		26990					Reduced ⁴	
		26740				74	Reduced ⁴	
		26865					Reduced ⁴	
		26990					Reduced ⁴	
		All lower bandwidths (5 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced		
Band 26 814-849 MHz	C	26740	15 MHz	QPSK	36	19	Reduced ⁶		
		26865					Tested		
		26990			75	0	Reduced ⁶		
		26740					Reduced ¹		
		26865					Reduced ¹		
		26990					Reduced ¹		
		26740					1	37	Reduced ⁶
		26865							Tested
		26990			74	Reduced ⁶			
		26740				Reduced ²			
		26865			Reduced ²				
		26990			Reduced ²				
		26740		16QAM	36	19	Reduced ³		
		26865					Reduced ³		
		26990			75	0	Reduced ³		
		26740					Reduced ¹		
		26865					Reduced ¹		
		26990					Reduced ¹		
		26740					1	37	Reduced ⁴
		26865							Reduced ⁴
		26990			74	Reduced ⁴			
		26740				Reduced ⁴			
		26865			Reduced ⁴				
		26990			Reduced ⁴				
	All lower bandwidths (5 MHz)							Reduced ⁵	
	D	15 MHz	26740	QPSK	36	19	Reduced ⁶		
			26865				Tested		
			26990		75	0	Reduced ⁶		
			26740				Reduced ¹		
			26865				Reduced ¹		
			26990				Reduced ¹		
			26740				1	37	Reduced ⁶
			26865						Tested
			26990		74	Reduced ⁶			
			26740			Reduced ²			
			26865		Reduced ²				
			26990		Reduced ²				
			26740	16QAM	36	19	Reduced ³		
			26865				Reduced ³		
			26990		75	0	Reduced ³		
			26740				Reduced ¹		
			26865				Reduced ¹		
			26990				Reduced ¹		
			26740				1	37	Reduced ⁴
			26865						Reduced ⁴
			26990		74	Reduced ⁴			
			26740			Reduced ⁴			
			26865		Reduced ⁴				
			26990		Reduced ⁴				
	All lower bandwidths (5 MHz)							Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced				
Band 26 814-849 MHz	E	26740	15 MHz	QPSK	36	19	Reduced ⁶				
		26865					Tested				
		26990					Reduced ⁶				
		26740			75	0	Reduced ¹				
		26865					Reduced ¹				
		26990					Reduced ¹				
		26740			1	37	Reduced ⁶				
		26865					Tested				
		26990					Reduced ⁶				
		26740				74	Reduced ²				
		26865					Reduced ²				
		26990					Reduced ²				
		26740		16QAM	36	19	Reduced ³				
		26865					Reduced ³				
		26990					Reduced ³				
		26740			75	0	Reduced ¹				
		26865					Reduced ¹				
		26990					Reduced ¹				
		26740			1	37	Reduced ⁴				
		26865					Reduced ⁴				
		26990					Reduced ⁴				
		26740				74	Reduced ⁴				
		26865					Reduced ⁴				
		26990					Reduced ⁴				
		All lower bandwidths (5 MHz)									
							Reduced ⁵				

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{0.849})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 632 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 7 2500-2570 MHz	A	20850	20 MHz	QPSK	50	25	Tested	
		21100					Tested	
		21350			100	0	Tested	
		20850					Reduced ¹	
		21100			1	49	Tested	
		21350					Reduced ¹	
		20850				99	Tested	
		21100					Reduced ¹	
		21350				99	Reduced ¹	
		20850					Reduced ³	
		21100		50	25	Reduced ³		
		21350				Reduced ³		
		20850		100	0	Reduced ¹		
		21100				Reduced ¹		
		21350		1	49	Reduced ¹		
		20850				Reduced ⁴		
		21100			99	Reduced ⁴		
		21350				Reduced ⁴		
		20850			99	Reduced ⁴		
		21100				Reduced ⁴		
		21350			Reduced ⁴			
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz)						
	C	20850	20 MHz	QPSK	50	25	Reduced ⁶	
		21100					Tested	
		21350			100	0	Reduced ⁶	
		20850					Reduced ¹	
		21100			1	49	Reduced ¹	
		21350					Reduced ²	
		20850				99	Reduced ²	
		21100					Reduced ⁶	
		21350				99	Tested	
		20850					Reduced ⁶	
		21100		16QAM	50	25	Reduced ³	
		21350					Reduced ³	
		20850			100	0	Reduced ¹	
		21100					Reduced ¹	
		21350			1	49	Reduced ¹	
		20850					Reduced ⁴	
		21100				99	Reduced ⁴	
		21350					Reduced ⁴	
		20850				99	Reduced ⁴	
		21100					Reduced ⁴	
		21350				Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 7 2500-2570 MHz	D	20850	20 MHz	QPSK	50	25	Reduced ⁶
		21100					Tested
		21350					Reduced ⁶
		20850			100	0	Reduced ¹
		21100					Reduced ¹
		21350					Reduced ¹
		20850			1	49	Reduced ²
		21100					Reduced ²
		21350					Reduced ²
		20850				99	Tested
		21100					Tested
		21350					Tested
		20850		16QAM	50	25	Reduced ³
		21100					Reduced ³
		21350					Reduced ³
		20850			100	0	Reduced ¹
		21100					Reduced ¹
		21350					Reduced ¹
		20850			1	49	Reduced ⁴
		21100					Reduced ⁴
		21350					Reduced ⁴
		20850				99	Reduced ⁴
		21100					Reduced ⁴
		21350					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Sides B & F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 199.5 mW
Closest Distance to Side B: 75 mm
Closest Distance to Side F: 71 mm

Side F is the closest; therefore, if Side F is excluded side B would also be excluded.

$(((3.0)/(\sqrt{2.70})) * 50 \text{ mm}) + ((71 - 50 \text{ mm}) * 10) = 301 \text{ mW}$ which is greater than 223.9 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 30 2305-2315 MHz	A	27710	10 MHz	QPSK	25	12	Tested
		27710			50	0	Reduced ¹
		27710			1	24	Tested
		27710				49	Reduced ²
		27710		16QAM	25	12	Reduced ³
		27710			50	0	Reduced ¹
		27710			1	24	Reduced ⁴
		27710				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵
	C	27710	10 MHz	QPSK	25	12	Tested
		27710			50	0	Reduced ¹
		27710			1	24	Tested
		27710				49	Reduced ²
		27710		16QAM	25	12	Reduced ³
		27710			50	0	Reduced ¹
		27710			1	24	Reduced ⁴
		27710				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 30 2305-2315 MHz	D	27710	10 MHz	QPSK	25	12	Tested
		27710			50	0	Reduced ¹
		27710			1	24	Tested
		27710		16QAM		49	Reduced ²
		27710			25	12	Reduced ³
		27710			50	0	Reduced ¹
		27710			1	24	Reduced ⁴
		27710			49	Reduced ⁴	
		All lower bandwidths (5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(\{(3.0)/(\sqrt{2.315})\} * 50 \text{ mm})] + \{[97 - 50 \text{ mm}] * 10\} = 578 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 40 2300-2400 MHz	A	38750	20 MHz	QPSK	50	25	Reduced ⁶
		39150					Tested
		39550			100	0	Reduced ⁶
		38750					Reduced ¹
		39150					Reduced ¹
		39550			1	49	Tested
		38750					Tested
		39150					Tested
		39550				99	Reduced ¹
		38750					Reduced ¹
		39150					Reduced ¹
		39550		16QAM	50	25	Reduced ³
		38750					Reduced ³
		39150			100	0	Reduced ³
		39550					Reduced ¹
		38750			1	49	Reduced ¹
		39150					Reduced ¹
		39550					Reduced ⁴
		38750				99	Reduced ⁴
		39150					Reduced ⁴
		39550					Reduced ⁴
		38750					Reduced ⁴
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz)						Reduced ⁵
	C	20850	20 MHz	QPSK	50	25	Reduced ⁶
		38750					Tested
		39150			100	0	Reduced ⁶
		39550					Reduced ¹
		38750			1	49	Reduced ¹
		39150					Reduced ¹
		39550				99	Reduced ⁶
		38750					Tested
		39150					Reduced ⁶
		39550					Reduced ²
		38750				99	Reduced ²
		39150					Reduced ²
		39550		16QAM	50	25	Reduced ³
		38750					Reduced ³
		39150			100	0	Reduced ³
		39550					Reduced ¹
		38750			1	49	Reduced ¹
		39150					Reduced ¹
		39550				99	Reduced ⁴
		38750					Reduced ⁴
		39150					Reduced ⁴
		39550					Reduced ⁴
38750		99				Reduced ⁴	
39150	Reduced ⁴						
39550						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 40 2300-2400 MHz	D	38750	20 MHz	QPSK	50	25	Reduced ⁶
		39150					Tested
		39550					Reduced ⁶
		38750			100	0	Reduced ¹
		39150					Reduced ¹
		39550					Reduced ¹
		38750			1	49	Reduced ⁶
		39150					Tested
		39550					Reduced ⁶
		38750				99	Reduced ²
		39150					Reduced ²
		39550					Reduced ²
		38750		16QAM	50	25	Reduced ³
		39150					Reduced ³
		39550					Reduced ³
		38750			100	0	Reduced ¹
		39150					Reduced ¹
		39550					Reduced ¹
		38750			1	49	Reduced ⁴
		39150					Reduced ⁴
		39550					Reduced ⁴
		38750				99	Reduced ⁴
		39150					Reduced ⁴
		39550					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Sides B & F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 199.5 mW
Closest Distance to Side B: 75 mm
Closest Distance to Side F: 71 mm

Side F is the closest; therefore, if Side F is excluded side B would also be excluded.

$$[[(3.0)/(\sqrt{2.40})] \cdot 50 \text{ mm}] + [(71 - 50 \text{ mm}) \cdot 10] = 306 \text{ mW}$$
 which is greater than 223.9 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 12 699-716 MHz	A	23060	10 MHz	QPSK	25	12	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060				49	Reduced ²	
		23095					Reduced ²	
		23129					Reduced ²	
		23060		16QAM	25	12	Reduced ³	
		23095					Reduced ³	
		23129					Reduced ³	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		23060				49	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		All lower bandwidths (5 MHz)						
	B	23060	10 MHz	QPSK	25	12	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060				49	Reduced ²	
		23095					Reduced ²	
		23129					Reduced ²	
		23060		16QAM	25	12	Reduced ³	
		23095					Reduced ³	
		23129					Reduced ³	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		23060				49	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		All lower bandwidths (5 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 12 699-716 MHz	C	23060	10 MHz	QPSK	25	12	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060				49	Reduced ²	
		23095					Reduced ²	
		23129					Reduced ²	
		23060		16QAM	25	12	Reduced ³	
		23095					Reduced ³	
		23129					Reduced ³	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		23060				49	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		All lower bandwidths (5 MHz)						
	D	23060	10 MHz	QPSK	25	12	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	12	Reduced ⁶	
		23095					Tested	
		23129					Reduced ⁶	
		23060				24	Reduced ²	
		23095					Reduced ²	
		23129					Reduced ²	
		23060		16QAM	25	12	Reduced ³	
		23095					Reduced ³	
		23129					Reduced ³	
		23060			50	0	Reduced ¹	
		23095					Reduced ¹	
		23129					Reduced ¹	
		23060			1	24	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		23060				49	Reduced ⁴	
		23095					Reduced ⁴	
		23129					Reduced ⁴	
		All lower bandwidths (5 MHz)						

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 12 699-716 MHz	E	23060	10 MHz	QPSK	25	12	Reduced ⁶
		23095					Tested
		23129					Reduced ⁶
		23060			50	0	Reduced ¹
		23095					Reduced ¹
		23129					Reduced ¹
		23060			1	12	Reduced ⁶
		23095					Tested
		23129					Reduced ⁶
		23060				24	Reduced ²
		23095					Reduced ²
		23129					Reduced ²
		23060		16QAM	25	12	Reduced ³
		23095					Reduced ³
		23129					Reduced ³
		23060			50	0	Reduced ¹
		23095					Reduced ¹
		23129					Reduced ¹
		23060			1	24	Reduced ⁴
		23095					Reduced ⁴
		23129					Reduced ⁴
		23060				49	Reduced ⁴
		23095					Reduced ⁴
		23129					Reduced ⁴
		All lower bandwidths (5 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{0.716})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 632 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 17 704-716 MHz	A	23780	10 MHz	QPSK	25	12	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	24	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780				49	Reduced ²
		23790					Reduced ²
		23800					Reduced ²
		23780		16QAM	25	12	Reduced ³
		23790					Reduced ³
		23800					Reduced ³
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	24	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23780				49	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23780					Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵
	B	23780	10 MHz	QPSK	25	12	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	24	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780				49	Reduced ²
		23790					Reduced ²
		23800					Reduced ²
		23780		16QAM	25	12	Reduced ³
		23790					Reduced ³
		23800					Reduced ³
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	24	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23780				49	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23780					Reduced ⁴
All lower bandwidths (5 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced			
Band 17 704-716 MHz	C	23780	10 MHz	QPSK	25	12	Reduced ⁶			
		23790					Tested			
		23800					Reduced ⁶			
		23780			50	0	Reduced ¹			
		23790					Reduced ¹			
		23800					Reduced ¹			
		23780			1	24	Reduced ⁶			
		23790					Tested			
		23800					Reduced ⁶			
		23780				49	Reduced ²			
		23790					Reduced ²			
		23800					Reduced ²			
		23780		16QAM	25	12	Reduced ³			
		23790					Reduced ³			
		23800					Reduced ³			
		23780			50	0	Reduced ¹			
		23790					Reduced ¹			
		23800					Reduced ¹			
		23780			1	24	Reduced ⁴			
		23790					Reduced ⁴			
		23800					Reduced ⁴			
		23780				49	Reduced ⁴			
		23790					Reduced ⁴			
		23800					Reduced ⁴			
		All lower bandwidths (5 MHz)							Reduced ⁵	
	D	23780	10 MHz	QPSK	25	12	Reduced ⁶			
		23790					Tested			
		23800					Reduced ⁶			
		23780			50	0	Reduced ¹			
		23790					Reduced ¹			
		23800					Reduced ¹			
		23780			1	12	Reduced ⁶			
		23790					Tested			
		23800					Reduced ⁶			
		23780				24	Reduced ²			
		23790					Reduced ²			
		23800					Reduced ²			
		23780		16QAM	25	12	Reduced ³			
		23790					Reduced ³			
		23800					Reduced ³			
		23780			50	0	Reduced ¹			
		23790					Reduced ¹			
		23800					Reduced ¹			
		23780			1	24	Reduced ⁴			
		23790					Reduced ⁴			
		23800					Reduced ⁴			
		23780				49	Reduced ⁴			
		23790					Reduced ⁴			
		23800					Reduced ⁴			
		All lower bandwidths (5 MHz)							Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 17 704-716 MHz	E	23780	10 MHz	QPSK	25	12	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	12	Reduced ⁶
		23790					Tested
		23800					Reduced ⁶
		23780				24	Reduced ²
		23790					Reduced ²
		23800					Reduced ²
		23780		16QAM	25	12	Reduced ³
		23790					Reduced ³
		23800					Reduced ³
		23780			50	0	Reduced ¹
		23790					Reduced ¹
		23800					Reduced ¹
		23780			1	24	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23780				49	Reduced ⁴
		23790					Reduced ⁴
		23800					Reduced ⁴
		23800					Reduced ⁴
All lower bandwidths (5 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵ - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{0.716})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 632 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 13 777-787 MHz	A	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Tested
		23230			1	24	Tested
		23230				49	Reduced ²
		23230		16QAM	25	12	Reduced ³
		23230			50	0	Reduced ¹
		23230			1	24	Reduced ⁴
		23230				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵
	B	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Reduced ¹
		23230			1	24	Tested
		23230				49	Reduced ²
		23230		16QAM	25	12	Reduced ³
		23230			50	0	Reduced ¹
		23230			1	24	Reduced ⁴
		23230				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 13 777-787 MHz	C	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Reduced ¹
		23230			1	24	Tested
		23230				49	Reduced ²
		23230		16QAM	25	12	Reduced ³
		23230			50	0	Reduced ¹
		23230			1	24	Reduced ⁴
		23230				49	Reduced ⁴
		All lower bandwidths (5 MHz)					
	D	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Reduced ¹
		23230			1	24	Tested
		23230				49	Reduced ²
		23230		16QAM	25	12	Reduced ³
		23230			50	0	Reduced ¹
		23230			1	24	Reduced ⁴
		23230				49	Reduced ⁴
		All lower bandwidths (5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 13 777-787 MHz	E	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Reduced ¹
		23230			1	24	Tested
		23230		16QAM		49	Reduced ²
		23230			25	12	Reduced ³
		23230			50	0	Reduced ¹
		23230			1	24	Reduced ⁴
		23230				49	Reduced ⁴
		All lower bandwidths (5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ - If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0/(\sqrt{0.782})) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 639 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 14 788-798 MHz	A	23330	10 MHz	QPSK	25	12	Tested
		23330			50	0	Reduced ¹
		23330			1	24	Tested
		23330				49	Reduced ²
		23330		16QAM	25	12	Reduced ³
		23330			50	0	Reduced ¹
		23330			1	24	Reduced ⁴
		23330				49	Reduced ⁴
		All lower bandwidths (5 MHz)					
	B	23330	10 MHz	QPSK	25	12	Tested
		23330			50	0	Reduced ¹
		23330			1	24	Tested
		23330				49	Reduced ²
		23330		16QAM	25	12	Reduced ³
		23330			50	0	Reduced ¹
		23330			1	24	Reduced ⁴
		23330				49	Reduced ⁴
		All lower bandwidths (5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 14 788-798 MHz	C	23330	10 MHz	QPSK	25	12	Tested
		23330			50	0	Reduced ¹
		23330			1	24	Tested
		23330				49	Reduced ²
		23330		16QAM	25	12	Reduced ³
		23330			50	0	Reduced ¹
		23330			1	24	Reduced ⁴
		23330				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵
	D	23330	10 MHz	QPSK	25	12	Tested
		23330			50	0	Reduced ¹
		23330			1	24	Tested
		23330				49	Reduced ²
		23330		16QAM	25	12	Reduced ³
		23330			50	0	Reduced ¹
		23330			1	24	Reduced ⁴
		23330				49	Reduced ⁴
	All lower bandwidths (5 MHz)						Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 14 788-798 MHz	E	23330	10 MHz	QPSK	25	12	Tested
		23330			50	0	Reduced ¹
		23330			1	24	Tested
		23330		16QAM		49	Reduced ²
		23330			25	12	Reduced ³
		23330			50	0	Reduced ¹
		23330			1	24	Reduced ⁴
		23330				49	Reduced ⁴
		All lower bandwidths (5 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ - If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Side F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side F: 97 mm

$[(3.0)/(\sqrt{0.787}) * 50 \text{ mm}] + [(97 - 50 \text{ mm}) * 10] = 639 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 41 2496-2690 MHz	A	39750	20 MHz	QPSK	50	25	Tested
		40135					Tested
		40620					Tested
		41105					Tested
		41490					Tested
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Tested
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Tested
		40135					Tested
		40620					Tested
		41105					Tested
		41490					Tested
		39750				99	Reduced ²
		40135					Reduced ²
		40620					Reduced ²
		41105					Reduced ²
		41490					Reduced ²
		39750		16QAM	50	25	Reduced ³
		40135					Reduced ³
		40620					Reduced ³
		41105					Reduced ³
		41490					Reduced ³
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Reduced ¹
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
		39750				99	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 41 2496-2690 MHz	C	39750	20 MHz	QPSK	50	25	Reduced ⁶
		40135					Reduced ⁶
		40620					Tested
		41105					Reduced ⁶
		41490					Reduced ⁶
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Reduced ¹
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Reduced ⁶
		40135					Reduced ⁶
		40620					Tested
		41105					Reduced ⁶
		41490					Reduced ⁶
		39750				99	Reduced ²
		40135					Reduced ²
		40620					Reduced ²
		41105					Reduced ²
		41490					Reduced ²
		39750		16QAM	50	25	Reduced ³
		40135					Reduced ³
		40620					Reduced ³
		41105					Reduced ³
		41490					Reduced ³
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Reduced ¹
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
		39750				99	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 41 2496-2690 MHz	D	39750	20 MHz	QPSK	50	25	Tested
		40135					Tested
		40620					Tested
		41105					Tested
		41490					Tested
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Tested
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Tested
		40135					Tested
		40620					Tested
		41105					Tested
		41490					Tested
		39750				99	Reduced ²
		40135					Reduced ²
		40620					Reduced ²
		41105					Reduced ²
		41490					Reduced ²
		39750		16QAM	50	25	Reduced ³
		40135					Reduced ³
		40620					Reduced ³
		41105					Reduced ³
		41490					Reduced ³
		39750			100	0	Reduced ¹
		40135					Reduced ¹
		40620					Reduced ¹
		41105					Reduced ¹
		41490					Reduced ¹
		39750			1	49	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
		39750				99	Reduced ⁴
		40135					Reduced ⁴
		40620					Reduced ⁴
		41105					Reduced ⁴
		41490					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Sides B & F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side B: 78 mm

Closest Distance to Side F: 97 mm

Side B is the closest; therefore, if Side B is excluded side F would also be excluded.

$(((3.0)/(\sqrt{2.69})) * 50 \text{ mm})) + ((78 - 50 \text{ mm}) * 10) = 301 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 42 3400-3600 MHz	A	41690	20 MHz	QPSK	50	25	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690				99	Reduced ²
		42140					Reduced ²
		42590					Reduced ²
		43040					Reduced ²
		43490					Reduced ²
		41690		16QAM	50	25	Reduced ³
		42140					Reduced ³
		42590					Reduced ³
		43040					Reduced ³
		43490					Reduced ³
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		41690				99	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 42 3400-3600 MHz	C	41690	20 MHz	QPSK	50	25	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690				99	Reduced ²
		42140					Reduced ²
		42590					Reduced ²
		43040					Reduced ²
		43490					Reduced ²
		41690		16QAM	50	25	Reduced ³
		42140					Reduced ³
		42590					Reduced ³
		43040					Reduced ³
		43490					Reduced ³
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		41690				99	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 42 3400-3600 MHz	D	41690	20 MHz	QPSK	50	25	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690				99	Reduced ²
		42140					Reduced ²
		42590					Reduced ²
		43040					Reduced ²
		43490					Reduced ²
		41690		16QAM	50	25	Reduced ³
		42140					Reduced ³
		42590					Reduced ³
		43040					Reduced ³
		43490					Reduced ³
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		41690				99	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 42 3400-3600 MHz	E	41690	20 MHz	QPSK	50	25	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁶
		42140					Reduced ⁶
		42590					Tested
		43040					Reduced ⁶
		43490					Reduced ⁶
		41690				99	Reduced ²
		42140					Reduced ²
		42590					Reduced ²
		43040					Reduced ²
		43490					Reduced ²
		41690		16QAM	50	25	Reduced ³
		42140					Reduced ³
		42590					Reduced ³
		43040					Reduced ³
		43490					Reduced ³
		41690			100	0	Reduced ¹
		42140					Reduced ¹
		42590					Reduced ¹
		43040					Reduced ¹
		43490					Reduced ¹
		41690			1	49	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		41690				99	Reduced ⁴
		42140					Reduced ⁴
		42590					Reduced ⁴
		43040					Reduced ⁴
		43490					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)
A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)
B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05
4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)
B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per
KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the
remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Sides B & F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW
Closest Distance to Side B: 78 mm
Closest Distance to Side F: 97 mm

Side B is the closest; therefore, if Side B is excluded side F would also be excluded.

$(((3.0)/(\sqrt{3.60})) * 50 \text{ mm})) + ((78 - 50 \text{ mm}) * 10) = 359 \text{ mW}$ which is greater than 251.2 mW

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 48 3550-3700 MHz	A	55340	20 MHz	QPSK	50	25	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340				99	Reduced ²
		55665					Reduced ²
		55990					Reduced ²
		56315					Reduced ²
		56640			Reduced ²		
		55340		16QAM	50	25	Reduced ³
		55665					Reduced ³
		55990					Reduced ³
		56315					Reduced ³
		56640					Reduced ³
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		55340				99	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640			Reduced ⁴		
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 48 3550-3700 MHz	C	55340	20 MHz	QPSK	50	25	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340				99	Reduced ²
		55665					Reduced ²
		55990					Reduced ²
		56315					Reduced ²
		56640					Reduced ²
		55340		16QAM	50	25	Reduced ³
		55665					Reduced ³
		55990					Reduced ³
		56315					Reduced ³
		56640					Reduced ³
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		55340				99	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 48 3550-3700 MHz	D	55340	20 MHz	QPSK	50	25	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340				99	Reduced ²
		55665					Reduced ²
		55990					Reduced ²
		56315					Reduced ²
		56640					Reduced ²
		55340		16QAM	50	25	Reduced ³
		55665					Reduced ³
		55990					Reduced ³
		56315					Reduced ³
		56640					Reduced ³
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		55340				99	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 48 3550-3700 MHz	E	55340	20 MHz	QPSK	50	25	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁶
		55665					Reduced ⁶
		55990					Tested
		56315					Reduced ⁶
		56640					Reduced ⁶
		55340				99	Reduced ²
		55665					Reduced ²
		55990					Reduced ²
		56315					Reduced ²
		56640					Reduced ²
		55340		16QAM	50	25	Reduced ³
		55665					Reduced ³
		55990					Reduced ³
		56315					Reduced ³
		56640					Reduced ³
		55340			100	0	Reduced ¹
		55665					Reduced ¹
		55990					Reduced ¹
		56315					Reduced ¹
		56640					Reduced ¹
		55340			1	49	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		55340				99	Reduced ⁴
		55665					Reduced ⁴
		55990					Reduced ⁴
		56315					Reduced ⁴
		56640					Reduced ⁴
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ±0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Sides B & F Reduced based on distance in KDB 447498 D01 v06 (See below calculations).

Maximum power: 251.2 mW

Closest Distance to Side B: 78 mm

Closest Distance to Side F: 97 mm

Side B is the closest; therefore, if Side B is excluded side F would also be excluded.

$(((3.0)/(\sqrt{3.70})) * 50 \text{ mm})) + ((78 - 50 \text{ mm}) * 10) = 357 \text{ mW}$ which is greater than 251.2 mW

SAR Data Summary – 750 MHz Body – LTE Band 12

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	1	Side A	707.5	23095	10 MHz/QPSK	1	24	0	23.00	0.620	0.78
	-----		707.5	23095	10 MHz/QPSK	25	12	1	22.23	0.507	0.61
	-----	Side B	707.5	23095	10 MHz/QPSK	1	24	0	23.00	0.271	0.34
	-----		707.5	23095	10 MHz/QPSK	25	12	1	22.23	0.219	0.26
	-----	Side C	707.5	23095	10 MHz/QPSK	1	24	0	23.00	0.607	0.76
	-----		707.5	23095	10 MHz/QPSK	25	12	1	22.23	0.490	0.59
	-----	Side D	707.5	23095	10 MHz/QPSK	1	24	0	23.00	0.131	0.17
	-----		707.5	23095	10 MHz/QPSK	25	12	1	22.23	0.108	0.13
	-----	Side E	707.5	23095	10 MHz/QPSK	1	24	0	23.00	0.0768	0.10
	-----		707.5	23095	10 MHz/QPSK	25	12	1	22.23	0.0623	0.07
							Body 1.6 W/kg (mW/g) averaged over 1 gram				

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 750 MHz Body – LTE Band 17

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	2	Side A	710.0	23780	10 MHz/QPSK	1	24	0	23.09	0.645	0.80
	-----		710.0	23780	10 MHz/QPSK	25	12	1	22.13	0.548	0.67
	-----	Side B	710.0	23780	10 MHz/QPSK	1	24	0	23.09	0.306	0.38
	-----		710.0	23780	10 MHz/QPSK	25	12	1	22.13	0.247	0.30
	-----	Side C	710.0	23780	10 MHz/QPSK	1	24	0	23.09	0.540	0.67
	-----		710.0	23780	10 MHz/QPSK	25	12	1	22.13	0.442	0.54
	-----	Side D	710.0	23780	10 MHz/QPSK	1	24	0	23.09	0.151	0.19
	-----		710.0	23780	10 MHz/QPSK	25	12	1	22.13	0.118	0.14
	-----	Side E	710.0	23780	10 MHz/QPSK	1	24	0	23.09	0.0799	0.10
	-----		710.0	23780	10 MHz/QPSK	25	12	1	22.13	0.0667	0.08
							Body 1.6 W/kg (mW/g) averaged over 1 gram				

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 750 MHz Body – LTE Band 13

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	3	Side A	782.0	23230	10 MHz/QPSK	1	24	0	23.48	1.00	1.13
	-----		782.0	23230	10 MHz/QPSK	25	12	1	23.51	0.824	0.92
	-----		782.0	23230	10 MHz/QPSK	50	0	1	23.26	0.721	0.86
	-----	Side B	782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.602	0.68
	-----		782.0	23230	10 MHz/QPSK	25	12	1	23.51	0.492	0.55
	-----		782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.775	0.87
	-----	Side C	782.0	23230	10 MHz/QPSK	25	12	1	23.51	0.606	0.68
	-----		782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.284	0.32
	-----		782.0	23230	10 MHz/QPSK	25	12	1	23.51	0.231	0.26
	-----	Side D	782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.0911	0.10
	-----		782.0	23230	10 MHz/QPSK	25	12	1	23.51	0.0731	0.08
	-----		782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.987	1.11
	-----	Repeat	782.0	23230	10 MHz/QPSK	1	24	0	23.48	0.987	1.11
Body 1.6 W/kg (mW/g) averaged over 1 gram											

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 750 MHz Body – LTE Band 14

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	4	Side A	793	23330	10 MHz/QPSK	1	24	0	23.45	0.757	0.86
	-----		793	23330	10 MHz/QPSK	25	12	1	23.54	0.513	0.57
	-----		793	23330	10 MHz/QPSK	50	0	1	23.37	0.436	0.50
	-----	Side B	793	23330	10 MHz/QPSK	1	24	0	23.45	0.366	0.42
	-----		793	23330	10 MHz/QPSK	25	12	1	23.54	0.329	0.37
	-----	Side C	793	23330	10 MHz/QPSK	1	24	0	23.45	0.464	0.53
	-----		793	23330	10 MHz/QPSK	25	12	1	23.54	0.435	0.48
	-----	Side D	793	23330	10 MHz/QPSK	1	24	0	23.45	0.133	0.15
	-----		793	23330	10 MHz/QPSK	25	12	1	23.54	0.134	0.15
	-----	Side E	793	23330	10 MHz/QPSK	1	24	0	23.45	0.102	0.12
	-----		793	23330	10 MHz/QPSK	25	12	1	23.54	0.0786	0.19
	-----	Repeat	793	23330	10 MHz/QPSK	1	24	0	23.45	0.734	0.83
										Body 1.6 W/kg (mW/g) averaged over 1 gram	

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body - WCDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
10 mm	----	836.6	4183	WCDMA	Side A	23.13	12.2 kbps	Test Loop 1	0.552	0.67
	----	836.6	4183	WCDMA	Side B	23.13	12.2 kbps	Test Loop 1	0.163	0.20
	5	836.6	4183	WCDMA	Side C	23.13	12.2 kbps	Test Loop 1	0.589	0.72
	----	836.6	4183	WCDMA	Side D	23.13	12.2 kbps	Test Loop 1	0.117	0.14
	----	836.6	4183	WCDMA	Side E	23.13	12.2 kbps	Test Loop 1	0.130	0.16

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body – LTE Band 5

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	6	Side A	829.0	20450	10 MHz/QPSK	1	24	0	23.9	0.975	1.00
	-----		836.5	20525	10 MHz/QPSK	1	24	0	24.0	0.954	0.95
	-----		844.0	20599	10 MHz/QPSK	1	24	0	24.0	0.937	0.94
	-----		836.5	20525	10 MHz/QPSK	25	12	1	22.9	0.782	0.80
	-----		836.5	20525	10 MHz/QPSK	50	0	1	22.9	0.698	0.71
	-----	Side B	836.5	20525	10 MHz/QPSK	1	24	0	24.0	0.400	0.40
	-----		836.5	20525	10 MHz/QPSK	25	12	1	22.9	0.326	0.33
	-----	Side C	836.5	20525	10 MHz/QPSK	1	24	0	24.0	0.790	0.79
	-----		836.5	20525	10 MHz/QPSK	25	12	1	22.9	0.647	0.66
	-----	Side D	836.5	20525	10 MHz/QPSK	1	24	0	24.0	0.233	0.23
	-----		836.5	20525	10 MHz/QPSK	25	12	1	22.9	0.191	0.20
	-----	Side E	836.5	20525	10 MHz/QPSK	1	24	0	24.0	0.0973	0.10
	-----		836.5	20525	10 MHz/QPSK	25	12	1	22.9	0.0769	0.08
	-----	Repeat	836.5	20525	10 MHz/QPSK	1	24	0	23.9	0.956	0.98
Body 1.6 W/kg (mW/g) averaged over 1 gram											

1. Battery is fully charged for all tests.

Power Measured ☒ Conducted ☐ ERP ☐ EIRP

2. SAR Measurement

Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head

SAR Configuration ☐ Head ☒ Body

3. Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator

4. Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body – LTE Band 26

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	Side A	831.5	26865	15 MHz/QPSK	1	37	0	23.43	0.535	0.61
	-----		831.5	26865	15 MHz/QPSK	36	19	1	22.20	0.512	0.62
	-----	Side B	831.5	26865	15 MHz/QPSK	1	37	0	23.43	0.337	0.38
	-----		831.5	26865	15 MHz/QPSK	36	19	1	22.20	0.274	0.33
	7	Side C	831.5	26865	15 MHz/QPSK	1	37	0	23.43	0.689	0.79
	-----		831.5	26865	15 MHz/QPSK	36	19	1	22.20	0.560	0.67
	-----	Side D	831.5	26865	15 MHz/QPSK	1	37	0	23.43	0.195	0.22
	-----		831.5	26865	15 MHz/QPSK	36	19	1	22.20	0.155	0.19
	-----	Side E	831.5	26865	15 MHz/QPSK	1	37	0	23.43	0.0949	0.11
	-----		831.5	26865	15 MHz/QPSK	36	19	1	22.20	0.0751	0.09
							Body 1.6 W/kg (mW/g) averaged over 1 gram				

- Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

- SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

- Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

- Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1750 MHz Body - WCDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
10 mm	8	1712.4	1312	WCDMA	Side A	22.56	12.2 kbps	Test Loop 1	0.945	1.32
	----	1732.6	1413	WCDMA		22.77	12.2 kbps	Test Loop 1	0.902	1.20
	----	1752.6	1513	WCDMA		23.32	12.2 kbps	Test Loop 1	0.961	1.12
	----	1732.6	1413	WCDMA	Side B	22.77	12.2 kbps	Test Loop 1	0.595	0.79
	----	1712.4	1312	WCDMA	Side C	22.56	12.2 kbps	Test Loop 1	0.586	0.82
	----	1732.6	1413	WCDMA		22.77	12.2 kbps	Test Loop 1	0.644	0.86
	----	1752.6	1513	WCDMA		23.32	12.2 kbps	Test Loop 1	0.604	0.71
	----	1732.6	1413	WCDMA	Side D	22.77	12.2 kbps	Test Loop 1	0.139	0.19
	----	1732.6	1413	WCDMA	Side E	22.77	12.2 kbps	Test Loop 1	0.540	0.72
	----	1712.4	1312	WCDMA	Repeat	22.56	12.2 kbps	Test Loop 1	0.973	1.36

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1750 MHz Body – LTE Band 66

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	9	Side A	1720.0	132072	20 MHz/QPSK	1	49	0	23.9	1.28	1.31
	-----		1745.0	132322	20 MHz/QPSK	1	49	0	24.0	1.10	1.10
	-----		1780.0	132572	20 MHz/QPSK	1	49	0	24.0	0.96	0.96
	-----		1720.0	132072	20 MHz/QPSK	50	24	1	22.9	1.23	1.26
	-----		1745.0	132322	20 MHz/QPSK	50	24	1	23.0	0.893	0.89
	-----		1780.0	132572	20 MHz/QPSK	50	24	1	23.0	0.786	0.79
	-----	Side B	1720.0	132072	20 MHz/QPSK	100	0	1	23.0	0.721	0.72
	-----		1745.0	132322	20 MHz/QPSK	1	49	0	24.0	0.408	0.41
	-----	Side C	1745.0	132322	20 MHz/QPSK	50	24	1	23.0	0.341	0.34
	-----		1745.0	132322	20 MHz/QPSK	1	49	0	24.0	0.773	0.77
	-----	Side D	1745.0	132322	20 MHz/QPSK	50	24	1	23.0	0.640	0.64
	-----		1745.0	132322	20 MHz/QPSK	1	49	0	24.0	0.196	0.20
	-----	Side E	1745.0	132322	20 MHz/QPSK	50	24	1	23.0	0.165	0.17
	-----		1720.0	132072	20 MHz/QPSK	1	49	0	23.9	1.21	1.24
	-----		1745.0	132322	20 MHz/QPSK	1	49	0	24.0	0.916	0.92
	-----		1780.0	132572	20 MHz/QPSK	1	49	0	24.0	0.509	0.51
	-----	Repeat	1745.0	132322	20 MHz/QPSK	50	24	1	23.0	0.666	0.67
	-----		1720.0	132072	20 MHz/QPSK	1	49	0	23.9	1.26	1.29

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1900 MHz Body - WCDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
10 mm	10	1852.4	9262	WCDMA	Side A	23.67	12.2 kbps	Test Loop 1	1.11	1.20
	----	1880.0	9400	WCDMA		23.89	12.2 kbps	Test Loop 1	1.08	1.11
	----	1907.6	9538	WCDMA		23.71	12.2 kbps	Test Loop 1	0.968	1.04
	----	1852.4	9262	WCDMA	Side B	23.89	12.2 kbps	Test Loop 1	0.220	0.23
	----	1852.4	9262	WCDMA	Side C	23.67	12.2 kbps	Test Loop 1	0.851	0.92
	----	1880.0	9400	WCDMA		23.89	12.2 kbps	Test Loop 1	0.821	0.84
	----	1907.6	9538	WCDMA		23.71	12.2 kbps	Test Loop 1	0.732	0.78
	----	1852.4	9262	WCDMA	Side D	23.89	12.2 kbps	Test Loop 1	0.237	0.24
	----	1852.4	9262	WCDMA	Side E	23.89	12.2 kbps	Test Loop 1	0.229	0.23
	----	1907.6	9538	WCDMA	Repeat	23.67	12.2 kbps	Test Loop 1	1.09	1.18

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- Battery is fully charged for all tests.
 Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary – 1900 MHz Body – LTE Band 2

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	-----	Side A	1860.0	18700	20 MHz/QPSK	1	49	0	24.0	0.838	0.84
	-----		1880.0	18900	20 MHz/QPSK	1	49	0	24.0	0.940	0.94
	11		1900.0	19100	20 MHz/QPSK	1	49	0	24.0	0.948	0.95
	-----		1860.0	18700	20 MHz/QPSK	50	24	1	23.0	0.796	0.80
	-----		1880.0	18900	20 MHz/QPSK	50	24	1	23.0	0.878	0.88
	-----		1900.0	19100	20 MHz/QPSK	50	24	1	23.0	0.846	0.85
	-----	Side B	1900.0	19100	20 MHz/QPSK	100	0	1	23.0	0.732	0.73
	-----		1880.0	18900	20 MHz/QPSK	1	49	0	24.0	0.244	0.24
	-----	Side C	1880.0	18900	20 MHz/QPSK	50	24	1	23.0	0.202	0.20
	-----		1860.0	18700	20 MHz/QPSK	1	49	0	24.0	0.831	0.83
	-----	Side D	1880.0	18900	20 MHz/QPSK	1	49	0	24.0	0.797	0.80
	-----		1900.0	19100	20 MHz/QPSK	1	49	0	24.0	0.799	0.80
	-----	Side E	1880.0	18900	20 MHz/QPSK	50	24	1	23.0	0.622	0.62
	-----		1880.0	18900	20 MHz/QPSK	1	49	0	24.0	0.183	0.18
	-----	Repeat	1880.0	18900	20 MHz/QPSK	50	24	1	23.0	0.156	0.16
	-----		1880.0	18900	20 MHz/QPSK	1	49	0	24.0	0.186	0.19
	-----		1880.0	18900	20 MHz/QPSK	50	24	1	23.0	0.153	0.15
	-----		1860.0	18700	20 MHz/QPSK	1	49	0	24.0	0.922	0.92

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1900 MHz Body – LTE Band 25

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	12	Side A	1860.0	26140	20 MHz/QPSK	1	49	0	23.46	1.18	1.34
	-----		1882.5	26365	20 MHz/QPSK	1	49	0	22.70	0.992	1.34
	-----		1905.0	26590	20 MHz/QPSK	1	49	0	23.20	1.02	1.23
	-----		1860.0	26140	20 MHz/QPSK	50	24	1	22.60	0.956	1.05
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	21.95	0.831	1.06
	-----		1905.0	26590	20 MHz/QPSK	50	24	1	22.29	0.914	1.08
	-----	Side B	1860.0	26140	20 MHz/QPSK	100	0	1	22.66	0.972	1.05
	-----		1882.5	26365	20 MHz/QPSK	1	49	0	22.70	0.369	0.50
	-----	Side C	1882.5	26365	20 MHz/QPSK	50	24	1	21.95	0.320	0.41
	-----		1860.0	26140	20 MHz/QPSK	1	49	0	23.46	0.955	1.08
	-----	Side C	1882.5	26365	20 MHz/QPSK	1	49	0	22.70	0.827	1.12
	-----		1905.0	26590	20 MHz/QPSK	1	49	0	23.20	0.834	1.00
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	21.95	0.676	0.86
	-----	Side D	1882.5	26365	20 MHz/QPSK	1	49	0	22.70	0.139	0.19
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	21.95	0.111	0.14
	-----	Side E	1882.5	26365	20 MHz/QPSK	1	49	0	22.70	0.245	0.33
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	21.95	0.199	0.25
	-----	Repeat	1860.0	26140	20 MHz/QPSK	1	49	0	23.46	1.23	1.39
Body 1.6 W/kg (mW/g) averaged over 1 gram											

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 2300 MHz Body – LTE Band 30

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	13	Side A	2310.0	27710	10 MHz/QPSK	1	24	0	23.46	0.742	0.84
	-----		2310.0	27710	10 MHz/QPSK	25	12	1	22.42	0.660	0.75
	-----		2310.0	27710	10 MHz/QPSK	50	0	1	22.75	0.562	0.60
	-----	Side C	2310.0	27710	10 MHz/QPSK	1	24	0	23.46	0.369	0.42
	-----		2310.0	27710	10 MHz/QPSK	25	12	1	22.42	0.242	0.28
	-----	Side D	2310.0	27710	10 MHz/QPSK	1	24	0	23.46	0.664	0.75
	-----		2310.0	27710	10 MHz/QPSK	25	12	1	22.42	0.543	0.62
	-----	Repeat	2310.0	27710	10 MHz/QPSK	1	24	0	23.46	0.721	0.82
Body 1.6 W/kg (mW/g) averaged over 1 gram											

- Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

- SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

- Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

- Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 2300 MHz Body – LTE Band 40

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	-----	Side A	2310.0	38750	20 MHz/QPSK	1	49	0	23.42	0.923	1.06
	-----		2350.0	39150	20 MHz/QPSK	1	49	0	23.44	0.836	0.95
	14		2390.0	39550	20 MHz/QPSK	1	49	0	23.61	1.07	1.17
	-----		2350.0	39150	20 MHz/QPSK	50	24	1	22.75	0.758	0.80
	-----		2390.0	39550	20 MHz/QPSK	100	0	1	22.72	0.658	0.70
	-----	Side C	2350.0	39150	20 MHz/QPSK	1	49	0	23.44	0.359	0.41
	-----		2350.0	39150	20 MHz/QPSK	50	24	1	22.75	0.282	0.30
	-----	Side D	2350.0	39150	20 MHz/QPSK	1	49	0	23.44	0.569	0.65
	-----		2350.0	39150	20 MHz/QPSK	50	24	1	22.75	0.470	0.50
	-----	Repeat	2390.0	39550	20 MHz/QPSK	1	49	0	23.61	1.05	1.15
Body 1.6 W/kg (mW/g) averaged over 1 gram											

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 1 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 40.

SAR Data Summary – 2550 MHz Body – LTE Band 7

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	-----	Side A	2507.5	20850	20 MHz/QPSK	1	49	0	22.4	1.10	1.26
	15		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	1.31	1.44
	-----		2562.5	21350	20 MHz/QPSK	1	49	0	22.2	1.18	1.42
	-----		2507.5	20850	20 MHz/QPSK	50	24	1	21.1	0.973	1.20
	-----		2535.0	21100	20 MHz/QPSK	50	24	1	21.1	1.03	1.27
	-----		2562.5	21350	20 MHz/QPSK	50	24	1	21.3	1.02	1.20
	-----	Side B	2535.0	21100	20 MHz/QPSK	100	0	1	21.2	1.01	1.21
	-----		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	0.152	0.17
	-----	Side C	2535.0	21100	20 MHz/QPSK	50	24	1	21.1	0.106	0.13
	-----		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	0.681	0.75
	-----	Side D	2535.0	21100	20 MHz/QPSK	50	24	1	21.1	0.692	0.85
	-----		2507.5	20850	20 MHz/QPSK	1	49	0	22.4	0.801	0.92
	-----		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	0.921	1.01
	-----		2562.5	21350	20 MHz/QPSK	1	49	0	22.2	0.832	1.00
	-----	Side E	2535.0	21100	20 MHz/QPSK	50	24	1	21.1	0.760	0.94
	-----		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	0.129	0.14
	-----	Repeat	2535.0	21100	20 MHz/QPSK	50	24	1	21.1	0.0987	0.12
	-----		2535.0	21100	20 MHz/QPSK	1	49	0	22.6	1.29	1.41

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 2500 MHz Body – LTE Band 41

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
10 mm	-----	Side A	2506.0	39750	20 MHz/QPSK	1	49	0	24.58	1.03	1.14
	-----		2544.5	40135	20 MHz/QPSK	1	49	0	24.37	1.04	1.20
	16		2593.0	40620	20 MHz/QPSK	1	49	0	24.42	1.20	1.37
	-----		2641.5	41105	20 MHz/QPSK	1	49	0	24.01	1.07	1.34
	-----		2680.0	41490	20 MHz/QPSK	1	49	0	23.40	0.929	1.34
	-----		2506.0	39750	20 MHz/QPSK	50	24	1	23.80	0.859	0.90
	-----		2544.5	40135	20 MHz/QPSK	50	24	1	23.86	0.970	1.00
	-----		2593.0	40620	20 MHz/QPSK	50	24	1	23.59	0.982	1.08
	-----		2641.5	41105	20 MHz/QPSK	50	24	1	23.33	0.965	1.13
	-----		2680.0	41490	20 MHz/QPSK	50	24	1	23.77	1.01	1.07
	-----	Side C	2593.0	40620	20 MHz/QPSK	100	0	1	23.73	0.785	0.84
	-----		2593.0	40620	20 MHz/QPSK	1	49	0	24.42	0.641	0.73
	-----	Side D	2593.0	40620	20 MHz/QPSK	50	24	1	23.59	0.541	0.59
	-----		2506.0	39750	20 MHz/QPSK	1	49	0	24.58	0.757	0.83
	-----		2544.5	40135	20 MHz/QPSK	1	49	0	24.37	0.773	0.89
	-----		2593.0	40620	20 MHz/QPSK	1	49	0	24.42	0.753	0.86
	-----		2641.5	41105	20 MHz/QPSK	1	49	0	24.01	0.697	0.88
	-----		2680.0	41490	20 MHz/QPSK	1	49	0	23.40	0.638	0.92
	-----		2506.0	39750	20 MHz/QPSK	50	24	1	23.80	0.823	0.86
	-----		2544.5	40135	20 MHz/QPSK	50	24	1	23.86	0.854	0.88
	-----		2593.0	40620	20 MHz/QPSK	50	24	1	23.59	0.814	0.89
	-----		2641.5	41105	20 MHz/QPSK	50	24	1	23.33	0.766	0.89
	-----		2680.0	41490	20 MHz/QPSK	50	24	1	23.77	0.755	0.80
	-----	Repeat	2593.0	40620	20 MHz/QPSK	1	49	0	24.42	1.25	1.43
Body 1.6 W/kg (mW/g) averaged over 1 gram											

- Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

- SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

- Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

- Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 1 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 41.

SAR Data Summary – 3500 MHz Body – LTE Band 42

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	17	Side A	3500.0	42590	20 MHz/QPSK	1	49	0	22.96	0.331	0.42
	-----		3500.0	42590	20 MHz/QPSK	50	24	1	22.42	0.270	0.31
	-----	Side C	3500.0	42590	20 MHz/QPSK	1	49	0	22.96	0.264	0.34
	-----		3500.0	42590	20 MHz/QPSK	50	24	1	22.42	0.218	0.25
	-----	Side D	3500.0	42590	20 MHz/QPSK	1	49	0	22.96	0.0894	0.11
	-----		3500.0	42590	20 MHz/QPSK	50	24	1	22.42	0.0784	0.09
	-----	Side E	3500.0	42590	20 MHz/QPSK	1	49	0	22.96	0.0723	0.09
	-----		3500.0	42590	20 MHz/QPSK	50	24	1	22.42	0.0590	0.07
						Body 1.6 W/kg (mW/g) averaged over 1 gram					

- Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

- SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

- Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

- Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 1 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 42.

SAR Data Summary – 3600 MHz Body – LTE Band 48

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	18	Side A	3625	55990	20 MHz/QPSK	1	49	0	23.6	0.319	0.35
	-----		3625	55990	20 MHz/QPSK	50	24	1	23.1	0.285	0.35
	-----	Side C	3625	55990	20 MHz/QPSK	1	49	0	23.6	0.269	0.30
	-----		3625	55990	20 MHz/QPSK	50	24	1	23.1	0.224	0.28
	-----	Side D	3625	55990	20 MHz/QPSK	1	49	0	23.6	0.112	0.12
	-----		3625	55990	20 MHz/QPSK	50	24	1	23.1	0.0897	0.11
	-----	Side E	3625	55990	20 MHz/QPSK	1	49	0	23.6	0.104	0.11
	-----		3625	55990	20 MHz/QPSK	50	24	1	23.1	0.0856	0.11
						Body 1.6 W/kg (mW/g) averaged over 1 gram					

6. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

7. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

8. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

9. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

10. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05 v02r05 clause 5.4. TDD is tested at the highest duty factor using UL-DL configuration 1 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4. A duty cycle of 1:1.58 is the highest duty cycle achievable which was used for testing Band 48.

SAR Data Summary – 2450 MHz Body 802.11b

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
10 mm	-----	Side A	2437	6	DSSS	Tx0	17.7	0.148	0.16
	-----	Side B	2437	6	DSSS		17.7	0.148	0.16
	-----	Side C	2437	6	DSSS		17.7	0.126	0.14
	-----	Side F	2437	6	DSSS		17.7	0.0471	0.05
	19	Side A	2437	6	DSSS	Tx1	17.1	0.257	0.32
	-----	Side C	2437	6	DSSS		17.1	0.168	0.21
	-----	Side D	2437	6	DSSS		17.1	0.169	0.21
	-----	Side F	2437	6	DSSS		17.1	0.0555	0.07
						Body 1.6 W/kg (mW/g) averaged over 1 gram			

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 5200 MHz Body 802.11a

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
10 mm	-----	Side A	5220	44	OFDM	Tx0	11.0	0.150	0.19
	20	Side B	5200	40	OFDM		11.1	0.547	0.67
	-----		5220	44	OFDM		11.0	0.479	0.60
	-----	Side C	5220	44	OFDM		11.0	0.092	0.12
	-----	Side F	5220	44	OFDM		11.0	0.00933	0.01
	-----	Side A	5220	44	OFDM	Tx1	11.0	0.0716	0.09
	-----	Side C	5220	44	OFDM		11.0	0.0489	0.06
	-----	Side D	5220	44	OFDM		11.0	0.236	0.30
	-----	Side F	5220	44	OFDM		11.0	0.00575	0.01

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☒ Test Code ☐ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 5800 MHz Body 802.11a

MEASUREMENT RESULTS

Gap	Plot	Position	Frequency		Modulation	Antenna	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.			(dBm)		
10 mm	-----	Side A	5785	157	OFDM	Tx0	19.8	0.926	0.97
	-----		5825	165	OFDM		19.9	0.838	0.86
	-----	Side B	5745	149	OFDM		19.9	1.15	1.18
	21		5785	157	OFDM		19.8	1.36	1.42
	-----	Side C	5825	165	OFDM		19.9	1.25	1.28
	-----		5785	157	OFDM		19.8	0.546	0.57
	-----	Side D	5825	165	OFDM		19.9	0.519	0.53
	-----		5785	157	OFDM		19.8	0.137	0.14
	-----	Side E	5785	157	OFDM		19.8	0.116	0.12
	-----	Side F	5785	157	OFDM		19.8	0.147	0.15
	-----	Side A	5785	157	OFDM	Tx1	17.6	0.695	0.76
	-----		5825	165	OFDM		17.8	0.635	0.66
	-----	Side B	5785	157	OFDM		17.6	0.102	0.11
	-----	Side C	5785	157	OFDM		17.6	0.300	0.33
	-----	Side D	5745	149	OFDM		17.7	1.12	1.20
	-----		5785	157	OFDM		17.6	1.29	1.41
	-----	Side E	5825	165	OFDM		17.8	1.26	1.32
	-----		5785	157	OFDM		17.6	0.0687	0.08
	-----	Side F	5785	157	OFDM		17.6	0.0559	0.06
	-----	Repeat	5785	157	OFDM	Tx0	19.8	1.34	1.40

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured ☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration ☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration ☐ Head

☒ Body

3. Test Signal Call Mode

☒ Test Code

☐ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – Simultaneous Transmit (Worst Case) Ant 0 – WiFi

MEASUREMENT RESULTS								
Side	Frequency (WLAN)		Frequency (WWAN)		WWAN Technology	SAR (W/kg) WLAN	SAR (W/kg) WWAN	Total SAR (W/kg)
	MHz	Ch.	MHz	Ch.				
A	5785	157	1882.5	26365	LTE Band 25	0.97	1.34	2.31
B	5785	157	1732.6	1413	WCDMA Band 4	1.41	0.79	2.20
C	5785	157	1882.5	26365	LTE Band 25	0.57	1.12	1.69
D	5785	157	782.0	23230	LTE Band 13	1.41	0.32	1.73
E	5785	157	1720.0	132072	LTE Band 66	0.12	1.24	1.36
F	5785	157	Estimated			0.15	0.48	0.63
					Body 1.6 W/kg (mW/g) averaged over 1 gram			

The worst case condition is Side A. The WWAN and WLAN antennas are a minimum of 80 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 \text{ rounded to two digits}$$

$$(0.97 + 1.34)^{1.5}/80 = 0.04$$

SAR Data Summary – Simultaneous Transmit (Worst Case) Ant 2 – WiFi

MEASUREMENT RESULTS								
Side	Frequency (WLAN)		Frequency (WWAN)		WWAN Technology	SAR (W/kg) WLAN	SAR (W/kg) WWAN	Total SAR (W/kg)
	MHz	Ch.	MHz	Ch.				
A	5785	157	2535.0	21100	LTE Band 7	0.97	1.44	2.41
B	5785	157	2535.0	21100	LTE Band 7	1.41	0.17	1.58
C	5785	157	2535.0	21100	LTE Band 7	0.57	0.85	1.42
D	5785	157	2535.0	21100	LTE Band 7	1.41	1.01	2.42
E	5785	157	2535.0	21100	LTE Band 7	0.12	0.14	0.26
F	5785	157	Estimated			0.15	0.40	0.55
					Body 1.6 W/kg (mW/g) averaged over 1 gram			

The worst case condition is Side A. The WWAN and WLAN antennas are a minimum of 85 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 \text{ rounded to two digits}$$

$$(0.97 + 1.44)^{1.5}/85 = 0.04$$

SAR Data Summary – Simultaneous Transmit (Worst Case) Ant 4 – WiFi

MEASUREMENT RESULTS								
Side	Frequency (WLAN)		Frequency (WWAN)		WWAN Technology	SAR (W/kg) WLAN	SAR (W/kg) WWAN	Total SAR (W/kg)
	MHz	Ch.	MHz	Ch.				
A	5785	157	3500.0	42590	LTE Band 42	0.97	0.42	1.39
B	5785	157	Estimated			1.41	0.40	1.81
C	5785	157	3500.0	42590	LTE Band 42	0.57	0.34	0.91
D	5785	157	3625.0	55990	LTE Band 48	1.41	0.12	1.53
E	5785	157	3625.0	55990	LTE Band 48	0.12	0.11	0.23
F	5785	157	Estimated			0.15	0.40	0.55
					Body 1.6 W/kg (mW/g) averaged over 1 gram			

The worst case condition is Side B. The WWAN and WLAN antennas are a minimum of 76 mm apart. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.03 which meets the requirements of KDB 447498 section 4.3.2.3 on page 13. The calculation is shown below.

Simultaneous Separation Ratio Calculation

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 \text{ rounded to two digits}$$

$$(1.41 + 0.40)^{1.5}/76 = 0.03$$

SAR Data Summary – Simultaneous Transmit (Uplink CA)

The volume scan was conducted for the two highest channels for all the uplink configurations on Side A of the device. The worst case SAR combined value for the Uplink CA is 1.46 W/kg. See plots 13 and 14 in Appendix B for the data sheets.

1st Band	2nd Band	1st Band Conducted Power	2nd Band Conducted Power	1st Band Channel	2nd Band Channel	SAR Volume Scan Sum	Scaled SAR
B2	B13	23.1 dBm	23.6 dBm	19100	23230	1.18	1.45
B66	B13	22.9 dBm	23.6 dBm	132072	23230	1.13	1.46

11. Test Equipment List

Table 11.1 Equipment Specifications

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI5 Flat Phantom	N/A	N/A	2037
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	01/10/2019	01/10/2018	1321
Data Acquisition Electronics 4	01/10/2020	01/10/2019	1321
SPEAG E-Field Probe EX3DV4	08/18/2018	08/18/2017	3693
SPEAG E-Field Probe EX3DV4	04/20/2019	04/20/2018	3662
Speag Validation Dipole D750V2	08/10/2018	08/10/2015	1053
Speag Validation Dipole D750V2	07/13/2019	07/13/2018	1016
Speag Validation Dipole D835V2	08/10/2018	08/10/2015	4d131
Speag Validation Dipole D835V2	07/13/2019	07/13/2018	4d089
Speag Validation Dipole D1750V2	08/13/2018	08/13/2015	1061
Speag Validation Dipole D1750V2	07/20/2019	07/20/2018	1018
Speag Validation Dipole D1900V2	08/13/2019	08/13/2015	5d147
Speag Validation Dipole D1900V2	07/13/2018	07/13/2018	5d116
Speag Validation Dipole D2300V2	08/20/2019	08/20/2018	1060
Speag Validation Dipole D2450V2	08/10/2016	08/10/2015	881
Speag Validation Dipole D2550V2	08/10/2018	08/10/2015	1003
Speag Validation Dipole D2550V2	07/12/2019	07/12/2018	1003
Speag Validation Dipole D3500V2	04/13/2019	04/13/2018	1061
Speag Validation Dipole D3700V2	04/13/2019	04/13/2018	1024
Speag Validation Dipole D5GHzV2	08/11/2018	08/11/2015	1119
Agilent N1911A Power Meter	05/20/2019	03/20/2017	GB45100254
Agilent N1922A Power Sensor	06/21/2019	06/21/2017	MY45240464
Advantest R3261A Spectrum Analyzer	03/26/2019	03/20/2017	31720068
Agilent (HP) 8350B Signal Generator	03/26/2019	03/20/2017	2749A10226
Agilent (HP) 83525A RF Plug-In	03/26/2019	03/20/2017	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/26/2019	03/20/2017	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/26/2019	03/20/2017	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/30/2019	03/30/2017	MY48360364
Anritsu MT8820C	07/27/2019	07/27/2017	6201176199
Agilent 778D Dual Directional Coupler	N/A	N/A	MY48220184
MiniCircuits BW-N20W5+ Fixed 20 dB Attenuator	N/A	N/A	N/A
MiniCircuits SPL-10.7+ Low Pass Filter	N/A	N/A	R8979513746
Apriel Dielectric Probe Assembly	N/A	N/A	0011
Body Equivalent Matter (750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (835 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2450 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2550 MHz)	N/A	N/A	N/A
Body Equivalent Matter (3-5 GHz)	N/A	N/A	N/A

12. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

13. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 2002.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Wed 06/Jun/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	55.72	0.97
0.7100	55.69	0.96	55.69	0.98
0.7200	55.65	0.96	55.66	0.98
0.7300	55.61	0.96	55.63	0.98
0.7400	55.57	0.96	55.60	0.99
0.7500	55.53	0.96	55.57	0.99
0.7600	55.49	0.96	55.54	0.99
0.7700	55.45	0.96	55.50	1.00
0.7800	55.41	0.97	55.46	1.00
0.7820	55.404	0.97	55.452	1.00*
0.7900	55.38	0.97	55.42	1.00
0.7930	55.368	0.97	55.408	1.003*
0.8000	55.34	0.97	55.38	1.01

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 26/Jul/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	55.59	0.95
0.7100	55.69	0.96	55.55	0.96
0.7200	55.65	0.96	55.51	0.96
0.7300	55.61	0.96	55.46	0.97
0.7400	55.57	0.96	55.42	0.97
0.7500	55.53	0.96	55.38	0.98
0.7600	55.49	0.96	55.33	0.98
0.7700	55.45	0.96	55.29	0.99
0.7800	55.41	0.97	55.25	0.99
0.7820	55.404	0.97	55.24	0.992*
0.7900	55.38	0.97	55.20	1.00
0.8000	55.34	0.97	55.16	1.00

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 19/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	55.53	0.97
0.7040	55.714	0.96	55.518	0.974*
0.7075	55.70	0.96	55.508	0.978*
0.7100	55.69	0.96	55.50	0.98
0.7110	55.686	0.96	55.497	0.98*
0.7200	55.65	0.96	55.47	0.98
0.7300	55.61	0.96	55.44	0.98
0.7400	55.57	0.96	55.41	0.99
0.7500	55.53	0.96	55.38	0.99
0.7600	55.49	0.96	55.35	0.99
0.7700	55.45	0.96	55.31	1.00
0.7800	55.41	0.97	55.37	1.00
0.7900	55.38	0.97	55.33	1.00
0.8000	55.34	0.97	55.29	1.01

* value interpolated

Test Result for UIM Dielectric Parameter

Fri 01/Jun/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	56.05	0.96
0.8150	55.28	0.97	56.00	0.98
0.8250	55.24	0.97	55.95	0.98
0.8264	55.234	0.97	55.944	0.981*
0.8290	55.24	0.97	55.934	0.984*
0.8350	55.20	0.97	55.91	0.99
0.8355	55.199	0.971	55.908	0.99*
0.8366	55.195	0.972	55.902	0.99*
0.8440	55.173	0.979	55.865	0.99*
0.8450	55.17	0.98	55.86	0.99
0.8466	55.165	0.982	55.857	0.992*
0.8550	55.14	0.99	55.84	1.00
0.8650	55.11	1.01	55.80	1.01
0.8750	55.08	1.02	55.78	1.03
0.8850	55.05	1.03	55.73	1.03
0.8950	55.02	1.04	55.70	1.04

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 18/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	54.87	0.98
0.8150	55.28	0.97	54.82	0.98
0.8215	55.254	0.97	54.788	0.987*
0.8250	55.24	0.97	54.77	0.99
0.8315	55.214	0.97	54.744	0.99*
0.8350	55.20	0.97	54.73	0.99
0.8415	55.181	0.977	54.707	0.993*
0.8550	55.14	0.99	54.66	1.00
0.8650	55.11	1.01	54.62	1.01
0.8750	55.08	1.02	54.60	1.02
0.8850	55.05	1.03	54.55	1.03
0.8950	55.02	1.04	54.52	1.05

* value interpolated

Test Result for UIM Dielectric Parameter

Tue 05/Jun/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.7100	53.53	1.47	53.55	1.48
1.7200	53.51	1.47	53.52	1.49
1.7300	53.48	1.48	53.38	1.50
1.7400	53.46	1.48	53.36	1.51
1.7450	53.445	1.485	53.34	1.515*
1.7500	53.43	1.49	53.32	1.52
1.7600	53.41	1.49	53.30	1.53
1.7700	53.38	1.50	53.27	1.55
1.7800	53.35	1.51	53.23	1.55

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 26/Jul/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.7100	53.53	1.47	53.39	1.47
1.7200	53.51	1.47	53.36	1.48
1.7300	53.48	1.48	53.32	1.49
1.7400	53.46	1.48	53.29	1.50
1.7450	53.445	1.485	53.28	1.505*
1.7500	53.43	1.49	53.27	1.51
1.7600	53.41	1.49	53.25	1.52
1.7700	53.38	1.50	53.22	1.53
1.7800	53.35	1.51	53.20	1.54

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 21/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.7100	53.53	1.47	52.81	1.49
1.7124	53.525	1.47	52.803	1.492*
1.7200	53.51	1.47	52.78	1.50
1.7300	53.48	1.48	52.74	1.51
1.7326	53.475	1.48	52.735	1.513*
1.7400	53.46	1.48	52.72	1.52
1.7500	53.43	1.49	52.68	1.53
1.7526	53.425	1.49	52.675	1.533*
1.7600	53.41	1.49	52.66	1.54
1.7700	53.38	1.50	52.63	1.55
1.7800	53.35	1.51	52.59	1.56

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 31/May/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8400	53.30	1.52	52.04	1.43
1.8500	53.30	1.52	52.03	1.44
1.8524	53.30	1.52	52.03	1.44*
1.8600	53.30	1.52	52.03	1.44
1.8700	53.30	1.52	52.14	1.45
1.8800	53.30	1.52	52.10	1.45
1.8900	53.30	1.52	52.17	1.46
1.9000	53.30	1.52	52.07	1.47
1.9076	53.30	1.52	52.108	1.493*
1.9100	53.30	1.52	52.12	1.50
1.9200	53.30	1.52	52.00	1.50

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 26/Jul/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8500	53.30	1.52	53.27	1.49
1.8600	53.30	1.52	53.25	1.50
1.8700	53.30	1.52	53.23	1.51
1.8800	53.30	1.52	53.21	1.52
1.8900	53.30	1.52	53.19	1.53
1.9000	53.30	1.52	53.17	1.54
1.9100	53.30	1.52	53.15	1.55
1.9200	53.30	1.52	53.14	1.57
1.9300	53.30	1.52	53.12	1.58

* value interpolated

Test Result for UIM Dielectric Parameter

Wed 27/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8400	53.30	1.52	52.42	1.53
1.8500	53.30	1.52	52.41	1.54
1.8600	53.30	1.52	52.40	1.54
1.8700	53.30	1.52	52.38	1.55
1.8800	53.30	1.52	52.36	1.55
1.8825	53.30	1.52	52.355	1.553*
1.8900	53.30	1.52	52.34	1.56
1.9000	53.30	1.52	52.31	1.56
1.9050	53.30	1.52	52.30	1.565*
1.9100	53.30	1.52	52.29	1.57
1.9200	53.30	1.52	52.27	1.57

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 14/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.2900	52.91	1.80	52.65	1.83
2.3000	52.90	1.81	52.63	1.84
2.3100	52.89	1.82	52.61	1.85
2.3200	52.87	1.83	52.59	1.86
2.3300	52.86	1.84	52.58	1.87
2.3400	52.85	1.84	52.56	1.88
2.3500	52.83	1.85	52.54	1.89
2.3600	52.82	1.86	52.52	1.89
2.3700	52.81	1.87	52.50	1.90
2.3800	52.79	1.88	52.48	1.91
2.3900	52.78	1.88	52.47	1.92
2.4000	52.77	1.89	52.45	1.93

Test Result for UIM Dielectric Parameter

Mon 02/Jul/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4100	52.75	1.91	52.85	1.88
2.4120	52.748	1.912	52.846	1.882*
2.4200	52.74	1.92	52.83	1.89
2.4300	52.73	1.93	52.81	1.90
2.4370	52.716	1.937	52.796	1.907*
2.4400	52.71	1.94	52.79	1.91
2.4500	52.70	1.95	52.77	1.92
2.4600	52.69	1.96	52.75	1.93
2.4620	52.686	1.964	52.746	1.932*
2.4700	52.67	1.98	52.73	1.94
2.4800	52.66	1.99	52.71	1.95

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 09/Jul/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4900	52.65	2.01	52.60	2.02
2.5000	52.64	2.02	52.58	2.03
2.5100	52.62	2.04	52.55	2.05
2.5200	52.61	2.05	52.52	2.07
2.5300	52.60	2.06	52.50	2.09
2.5350	52.595	2.07	52.495	2.10*
2.5400	52.59	2.08	52.49	2.11
2.5500	52.57	2.09	52.47	2.12
2.5600	52.56	2.11	52.45	2.14
2.5700	52.55	2.12	52.43	2.16
2.5800	52.53	2.13	52.42	2.17
2.5900	52.52	2.15	52.39	2.19
2.6000	52.51	2.16	52.38	2.21

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 25/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4900	52.65	2.01	52.31	2.01
2.5000	52.64	2.02	52.29	2.02
2.5060	52.628	2.032	52.272	2.032*
2.5100	52.62	2.04	52.26	2.04
2.5200	52.61	2.05	52.23	2.06
2.5300	52.60	2.06	52.21	2.08
2.5400	52.59	2.08	52.20	2.10
2.5445	52.581	2.085	52.191	2.105*
2.5500	52.57	2.09	52.18	2.11
2.5600	52.56	2.11	52.16	2.13
2.5700	52.55	2.12	52.14	2.15
2.5800	52.53	2.13	52.13	2.16
2.5900	52.52	2.15	52.10	2.18
2.5930	52.517	2.153	52.097	2.186*
2.6000	52.51	2.16	52.09	2.20
2.6100	52.50	2.18	52.06	2.21
2.6200	52.48	2.19	52.04	2.22
2.6300	52.47	2.21	52.03	2.24
2.6400	52.46	2.22	52.01	2.25
2.6415	52.459	2.222	52.009	2.252*
2.6500	52.45	2.23	52.00	2.26
2.6600	52.43	2.25	51.98	2.27
2.6700	52.42	2.26	51.96	2.28
2.6800	52.41	2.28	51.94	2.30
2.6900	52.39	2.29	51.91	2.31
2.7000	52.38	2.30	51.90	2.32
2.8000	52.37	2.31	51.88	2.33

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 11/Jun/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
3.4900	51.33	3.31	51.24	3.34
3.5000	51.32	3.32	51.23	3.35
3.5100	51.31	3.33	51.23	3.36
3.5200	51.29	3.34	51.22	3.37
3.5300	51.28	3.35	51.20	3.38
3.5400	51.27	3.36	51.19	3.39
3.5500	51.25	3.37	51.17	3.40
3.5600	51.24	3.38	51.15	3.41
3.5700	51.23	3.40	51.14	3.42
3.5800	51.21	3.41	51.12	3.43
3.5900	51.20	3.42	51.10	3.44
3.5925	51.198	3.423	51.098	3.445*
3.6000	51.19	3.43	51.09	3.46
3.6100	51.17	3.44	51.07	3.47
3.6200	51.16	3.45	51.05	3.48
3.6250	51.155	3.46	51.045	3.485*
3.6300	51.15	3.47	51.04	3.49
3.6400	51.13	3.48	51.02	3.50
3.6500	51.12	3.49	51.00	3.52
3.6575	51.105	3.498	50.993	3.528*
3.6600	51.10	3.50	50.99	3.53
3.6700	51.09	3.51	50.97	3.54
3.6800	51.08	3.52	50.96	3.55
3.6900	51.06	3.54	50.94	3.56
3.7000	51.05	3.55	50.92	3.57
3.7100	51.04	3.56	50.91	3.58

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 25/Feb/2019

Freq Frequency(GHz)

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
3.3900	51.47	3.20	51.25	3.23
3.4000	51.45	3.21	51.23	3.24
3.4100	51.44	3.23	51.22	3.25
3.4200	51.43	3.24	51.21	3.26
3.4300	51.41	3.25	51.19	3.27
3.4400	51.40	3.26	51.18	3.28
3.4550	51.385	3.275	51.165	3.295*
3.4500	51.39	3.27	51.17	3.29
3.4600	51.37	3.28	51.16	3.30
3.4700	51.36	3.29	51.15	3.31
3.4800	51.35	3.30	51.13	3.32
3.4900	51.33	3.31	51.12	3.33
3.5000	51.32	3.32	51.11	3.34
3.5100	51.31	3.33	51.11	3.35
3.5200	51.29	3.34	51.10	3.36
3.5300	51.28	3.35	51.08	3.37
3.5400	51.27	3.36	51.07	3.38
3.5450	51.26	3.365	51.06	3.385*
3.5500	51.25	3.37	51.05	3.39
3.5600	51.24	3.38	51.03	3.40
3.5700	51.23	3.40	51.02	3.41
3.5800	51.21	3.41	51.00	3.42
3.5900	51.20	3.42	50.98	3.43
3.6000	51.19	3.43	50.97	3.44
3.6100	51.17	3.44	50.95	3.45

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 28/Jun/2018

Freq Frequency(GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.1000	49.15	5.18	49.22	5.10
5.1200	49.12	5.21	49.19	5.12
5.1400	49.10	5.23	49.16	5.14
5.1600	49.07	5.25	49.13	5.16
5.1800	49.04	5.28	49.10	5.19
5.2000	49.01	5.30	49.07	5.21
5.2100	49.00	5.31	49.055	5.22*
5.2200	48.99	5.32	49.04	5.23
5.2400	48.96	5.35	49.01	5.25
5.2600	48.93	5.37	48.98	5.28
5.2800	48.91	5.39	48.95	5.31
5.2900	48.895	5.405	48.935	5.32*
5.3000	48.88	5.42	48.92	5.33
5.3200	48.85	5.44	48.89	5.36
5.3400	48.82	5.46	48.86	5.38
5.3600	48.80	5.49	48.83	5.40
5.3800	48.77	5.51	48.80	5.43
5.4000	48.74	5.53	48.77	5.46
5.4200	48.72	5.56	48.74	5.49
5.4400	48.69	5.58	48.71	5.51
5.4600	48.66	5.60	48.68	5.53
5.4800	48.63	5.63	48.65	5.55
5.5000	48.61	5.65	48.62	5.58
5.5200	48.58	5.67	48.59	5.61
5.5400	48.55	5.70	48.56	5.64
5.5600	48.53	5.72	48.53	5.67
5.5800	48.50	5.74	48.50	5.70
5.6000	48.47	5.77	48.47	5.73
5.6200	48.44	5.79	48.44	5.75
5.6400	48.42	5.81	48.41	5.78
5.6600	48.39	5.84	48.38	5.81
5.6800	48.36	5.86	48.35	5.84
5.7000	48.34	5.88	48.32	5.86
5.7200	48.31	5.91	48.29	5.89
5.7400	48.28	5.93	48.26	5.91
5.7450	48.273	5.935	48.253	5.918*
5.7600	48.25	5.95	48.23	5.94
5.7750	48.235	5.973	48.208	5.963*
5.7800	48.23	5.98	48.20	5.97
5.7850	48.223	5.985	48.193	5.975*
5.8000	48.20	6.00	48.17	5.99
5.8200	48.17	6.02	48.14	6.02
5.8250	48.165	6.028	48.133	6.025*
5.8400	48.15	6.05	48.11	6.04

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1053

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/6/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.62, 9.62, 9.62); Calibrated: 4/20/2018;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1321; Calibrated: 1/10/2018

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.227 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.569 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

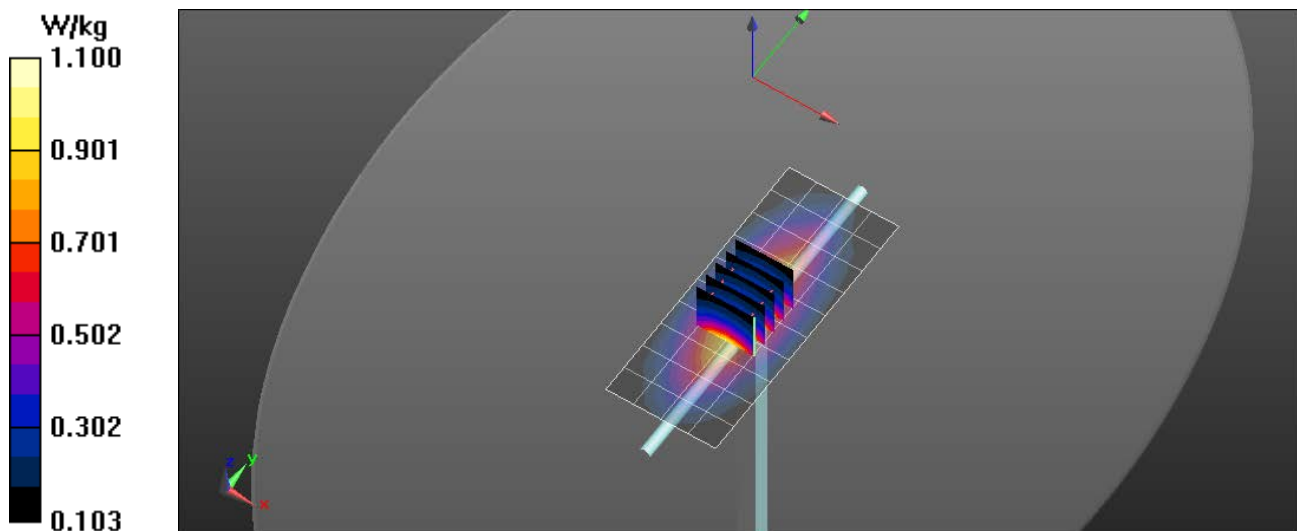

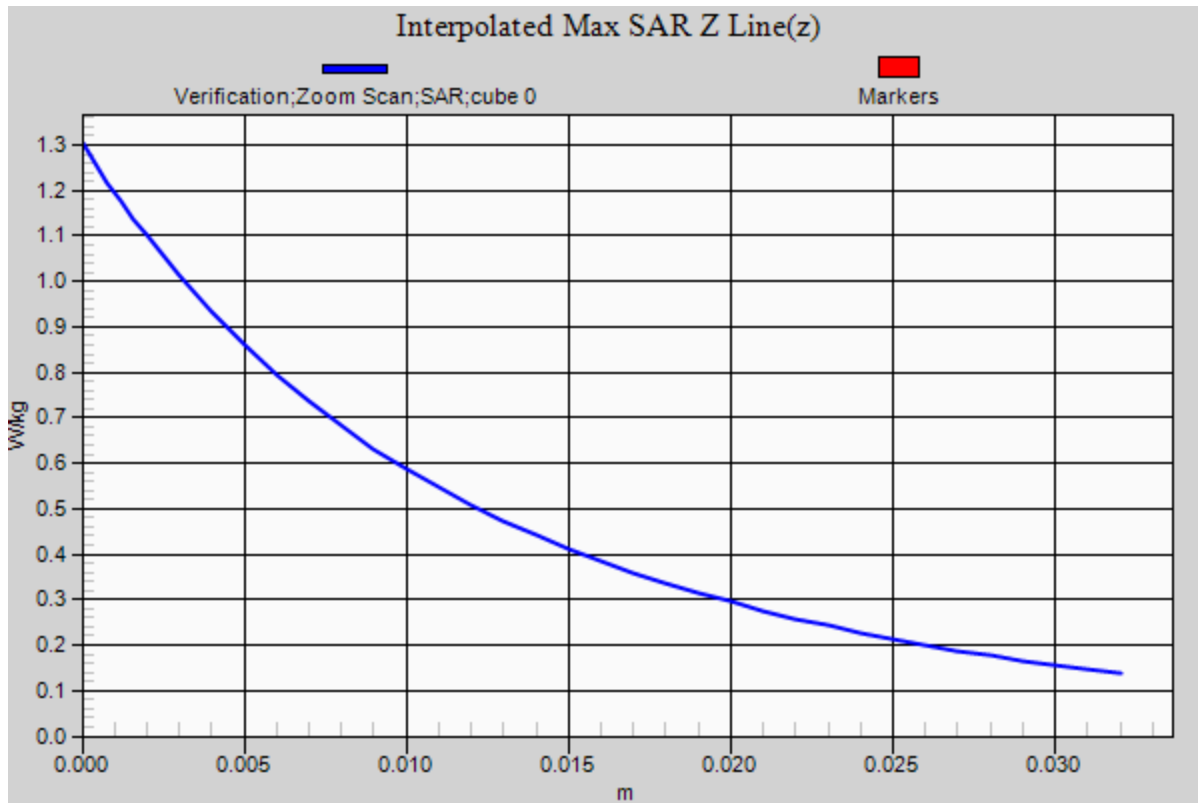

RF Exposure Lab

Plot 2

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1053

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 55.38$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: Date: 7/26/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(9.35, 9.35, 9.35); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.09 W/kg

750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 31.143 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.31 W/kg
 $P_{in} = 100 \text{ mW}$
SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.551 W/kg
Maximum value of SAR (measured) = 1.10 W/kg

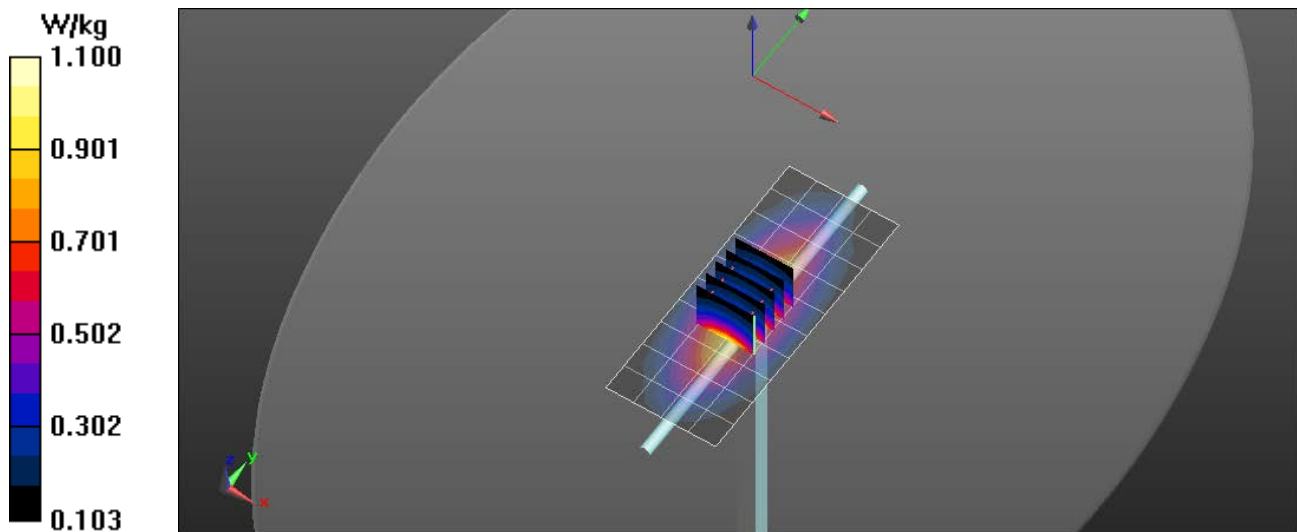

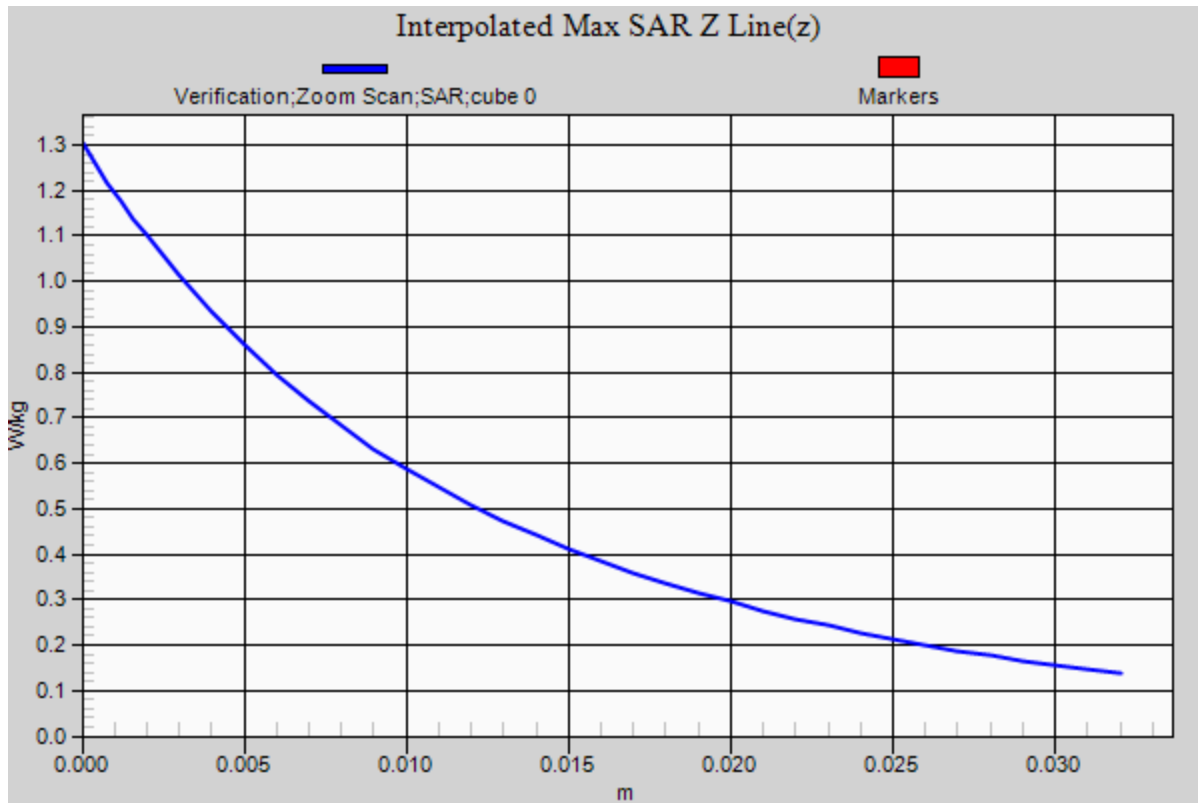

RF Exposure Lab

Plot 3

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1016

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.38$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3662; ConvF(9.62, 9.62, 9.62); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 W/kg

750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.897 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.564 W/kg
Maximum value of SAR (measured) = 1.09 W/kg

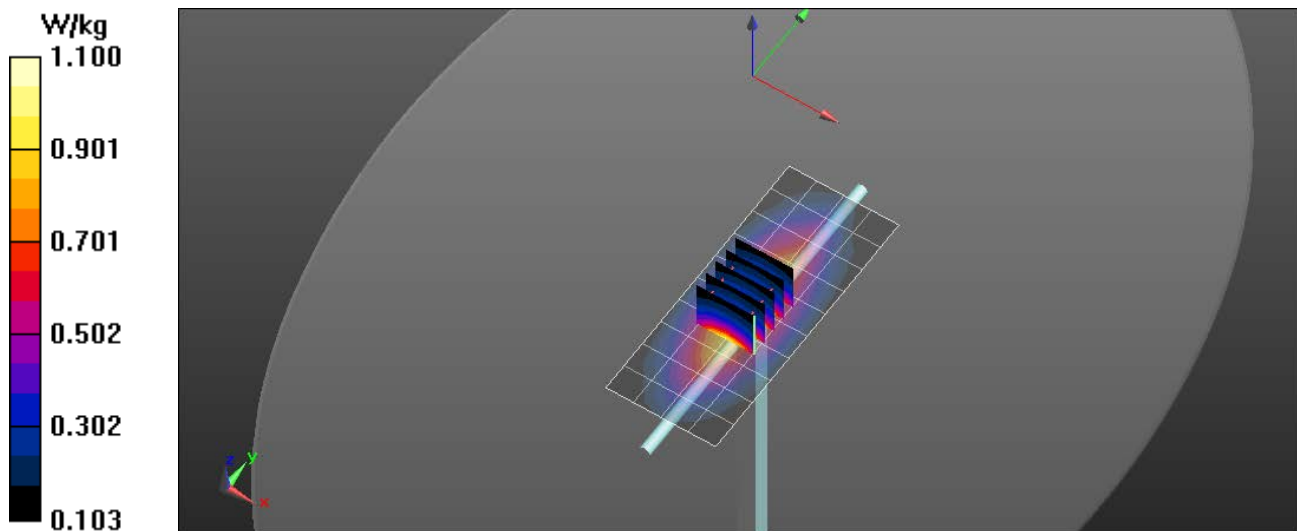

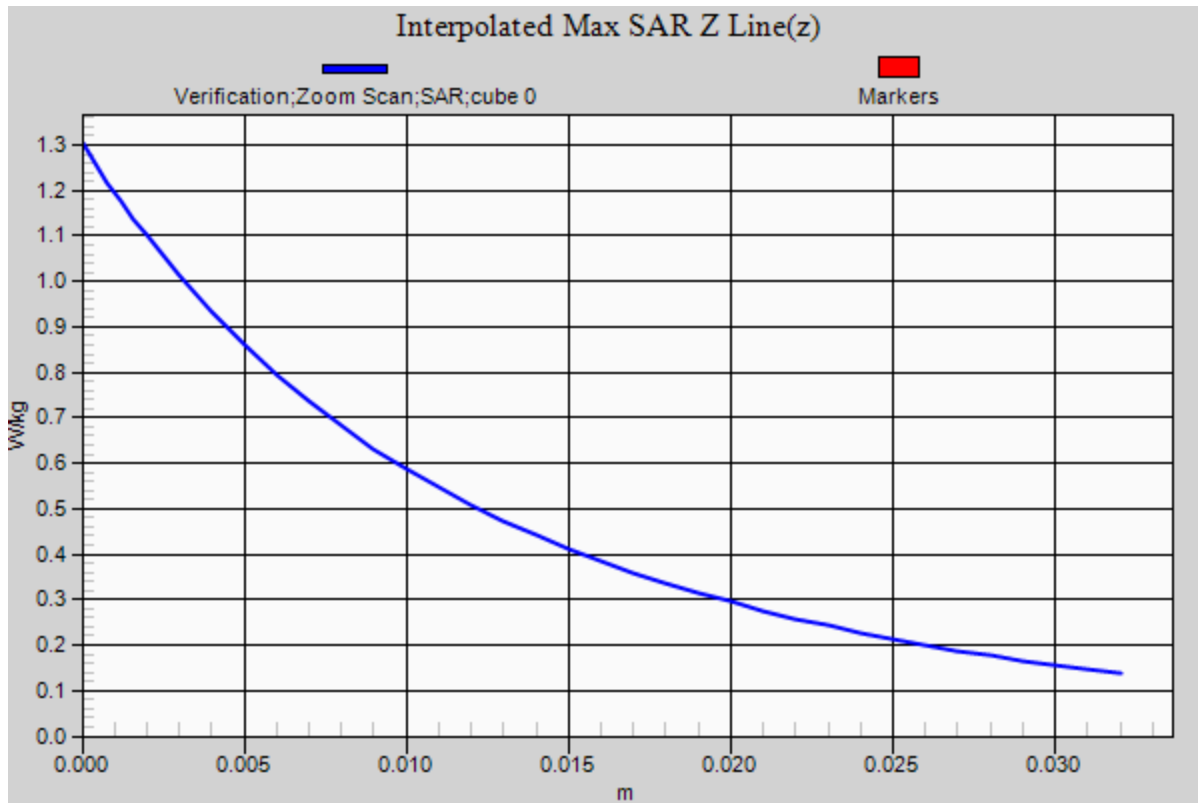

RF Exposure Lab

Plot 4

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d131

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.91$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: Date: 6/1/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.21, 9.21, 9.21); Calibrated: 4/20/2018;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1321; Calibrated: 1/10/2018

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz Body/Verification/Area Scan (81x161x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.29 W/kg


835 MHz Body/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 52.612 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.632 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

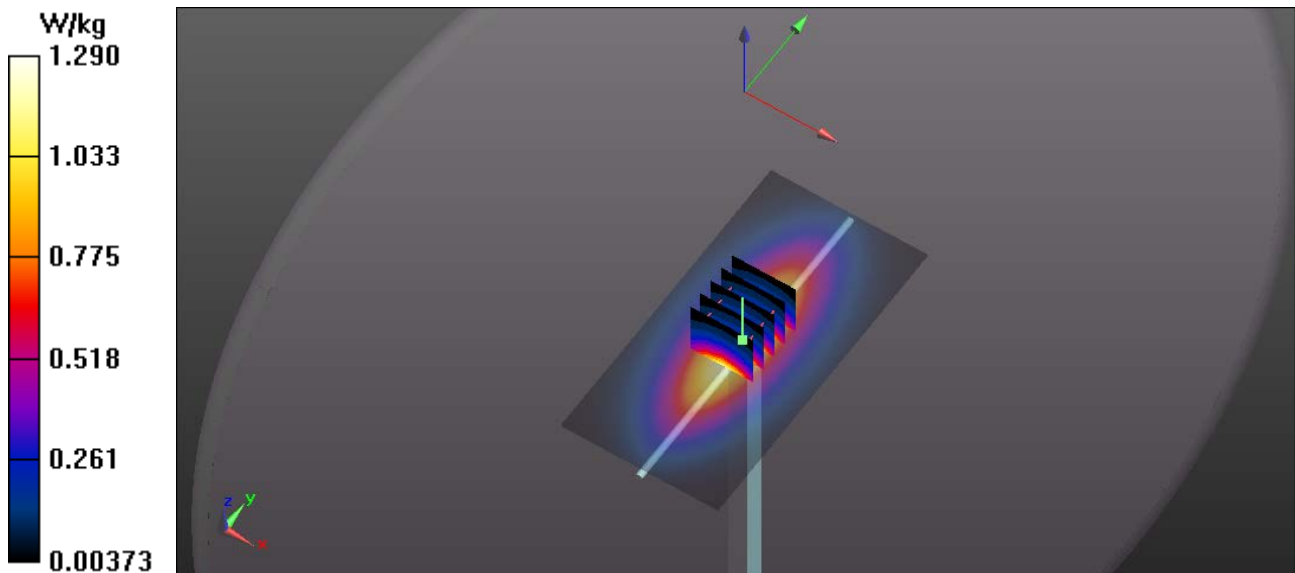

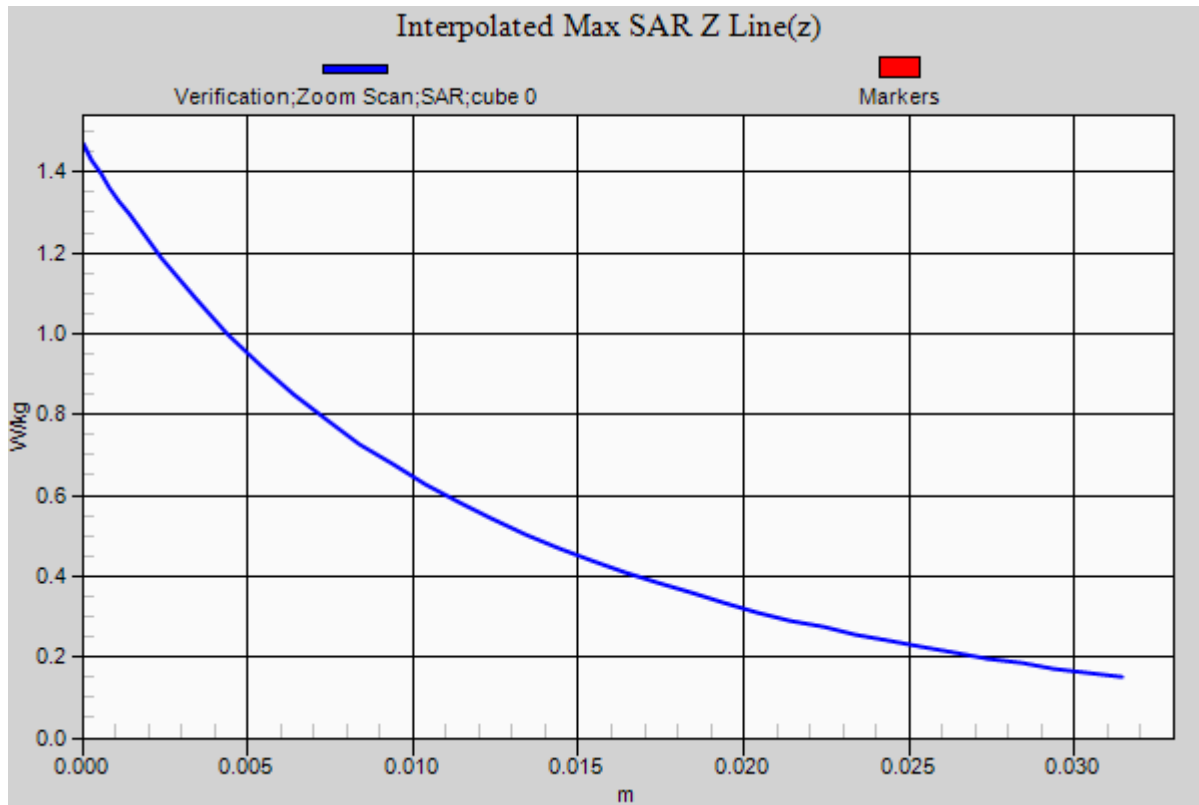

RF Exposure Lab

Plot 5

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d089


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.73$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: Date: 2/18/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(9.21, 9.21, 9.21); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

835 MHz Body/Verification/Area Scan (81x161x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.34 W/kg

835 MHz Body/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.568 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.49 W/kg
SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.637 W/kg
Maximum value of SAR (measured) = 1.30 W/kg

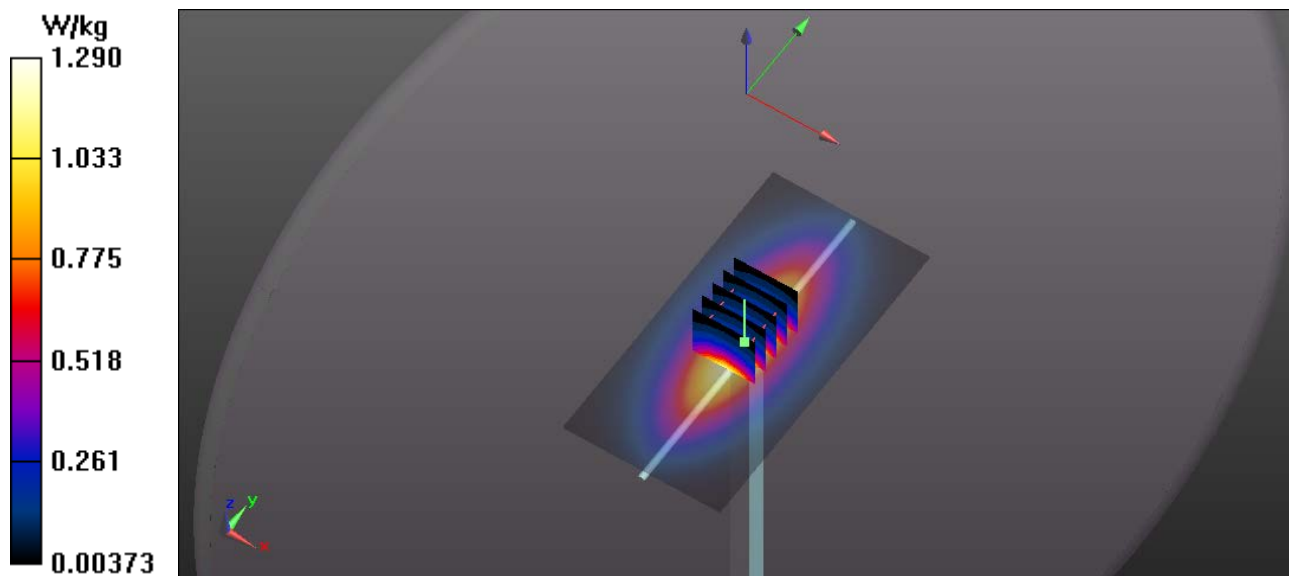

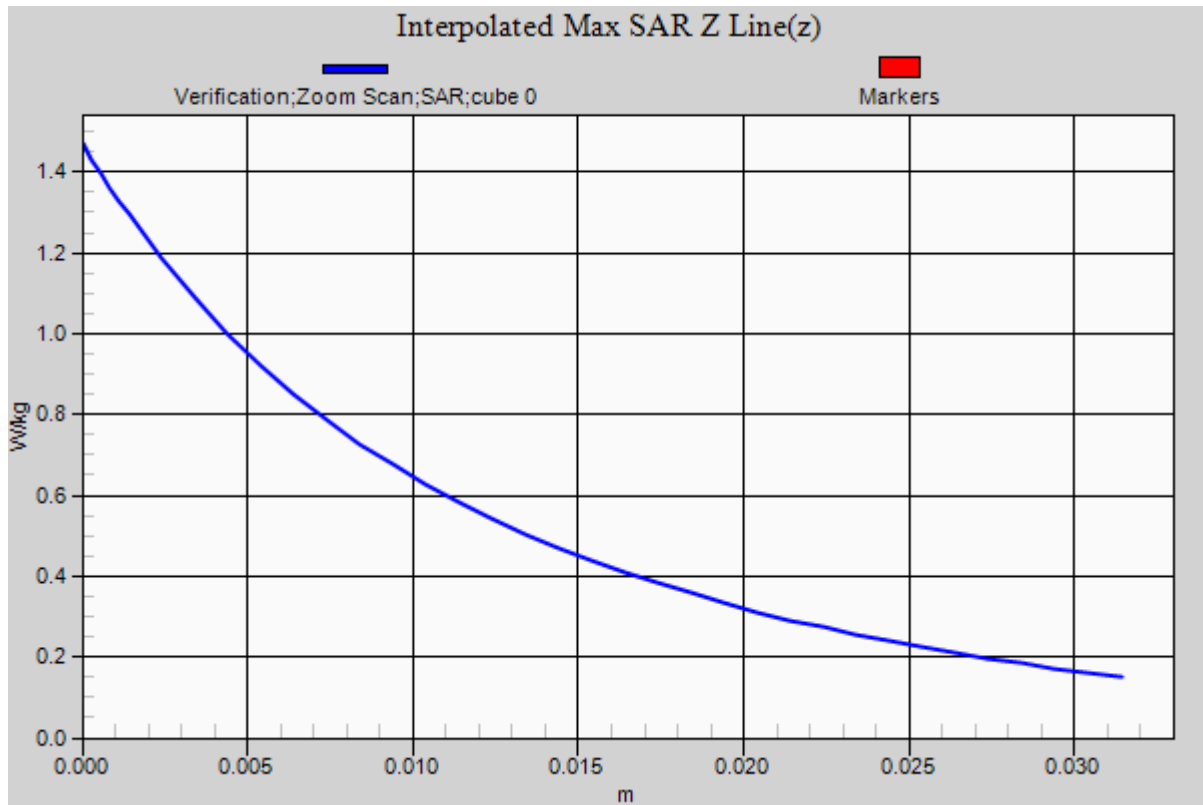

RF Exposure Lab

Plot 6

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 53.32$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 6/5/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.96, 7.96, 7.96); Calibrated: 4/20/2018;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1321; Calibrated: 1/10/2018

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.33 W/kg


1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.227 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.03 W/kg

Maximum value of SAR (measured) = 5.49 W/kg

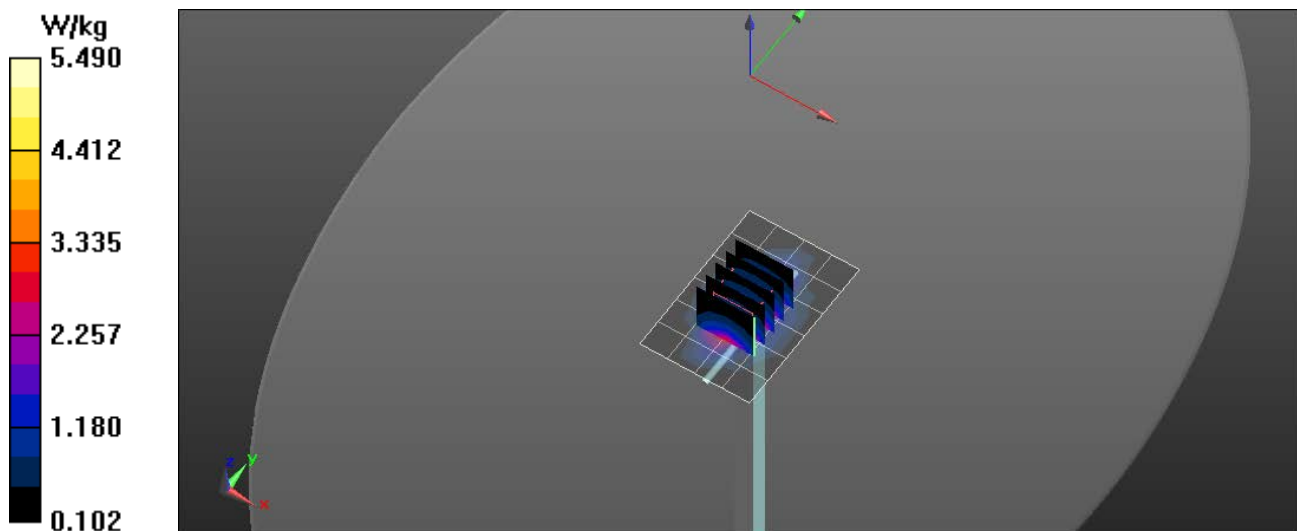

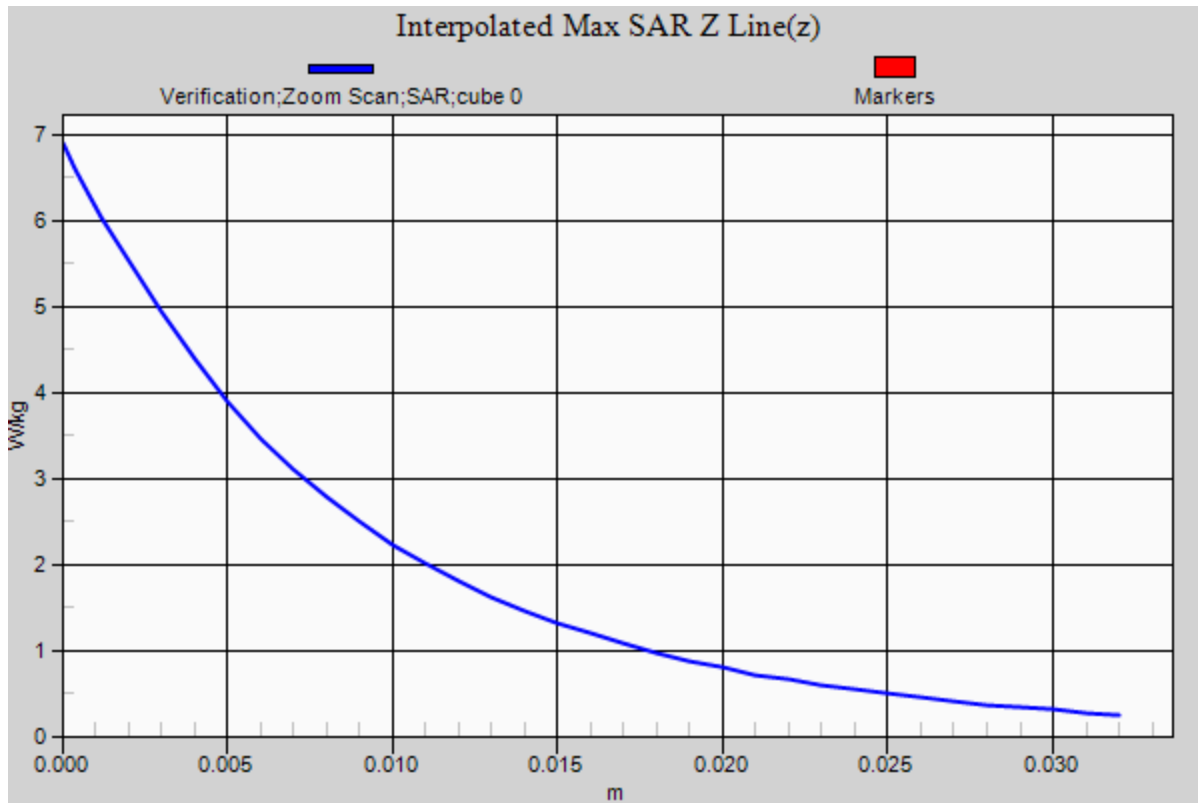

RF Exposure Lab

Plot 7

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 53.27$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/26/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(7.77, 7.77, 7.77); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.31 W/kg

1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.489 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 6.92 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 3.81 W/kg; SAR(10 g) = 2 W/kg
Maximum value of SAR (measured) = 5.47 W/kg

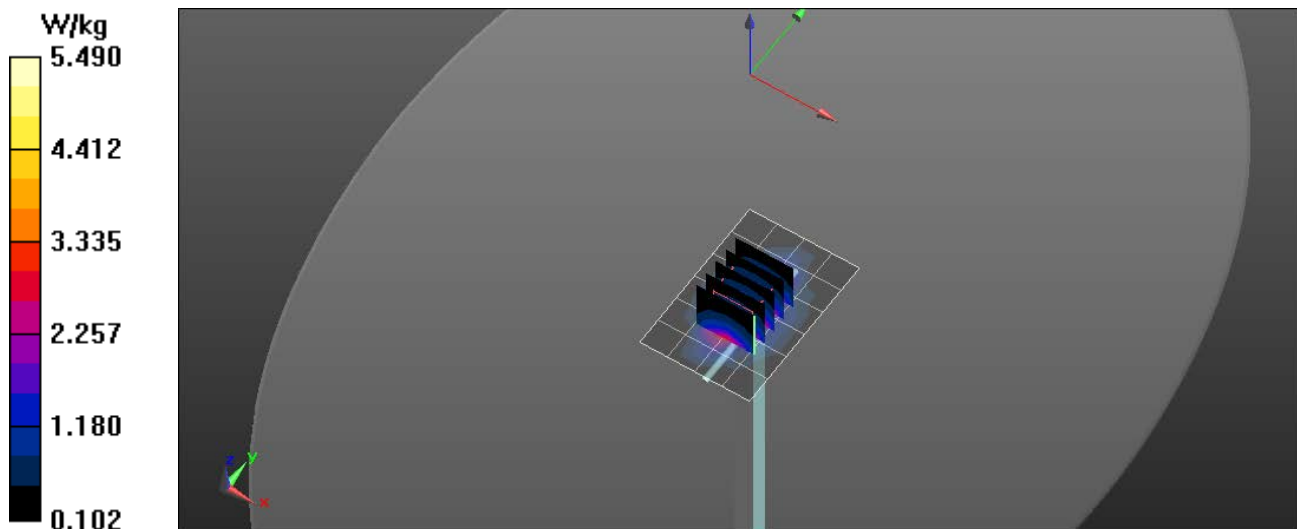

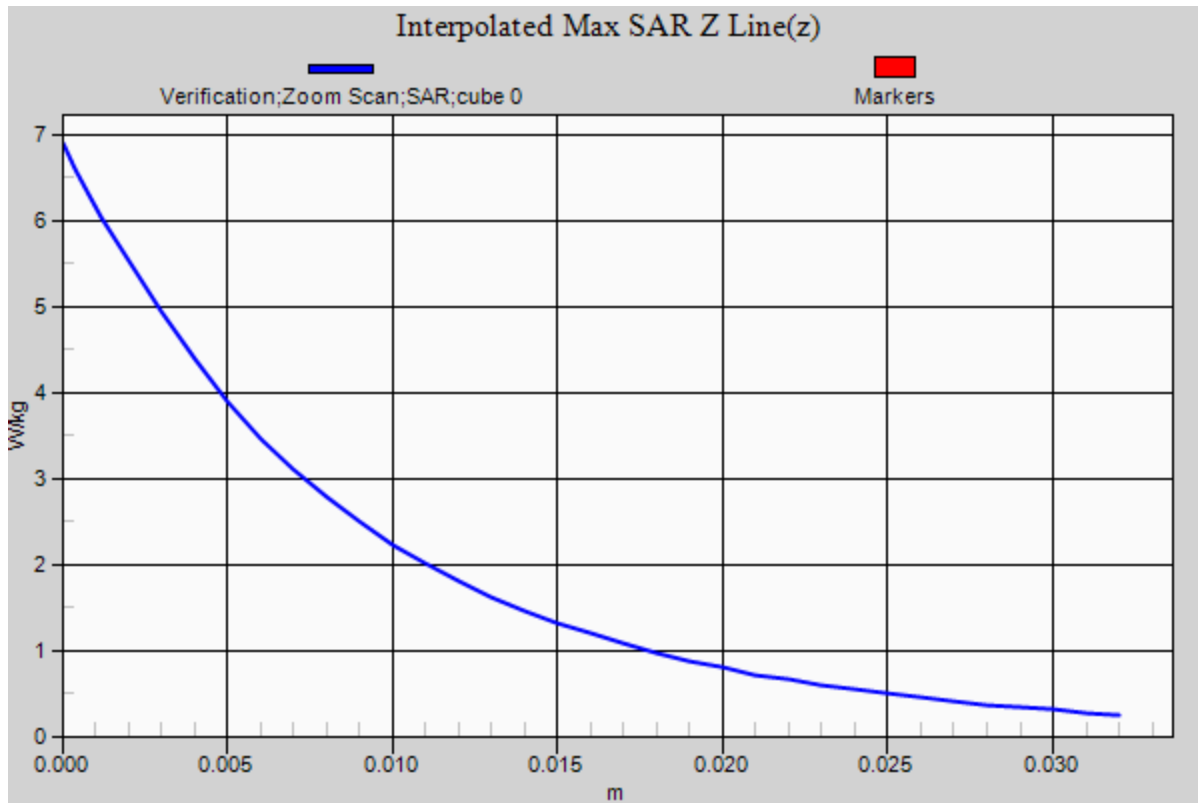

RF Exposure Lab

Plot 8

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1018

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/6/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3662; ConvF(7.96, 7.96, 7.96); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.25 W/kg

1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.236 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 6.86 W/kg
SAR(1 g) = 3.69 W/kg; SAR(10 g) = 1.95 W/kg
Maximum value of SAR (measured) = 5.47 W/kg

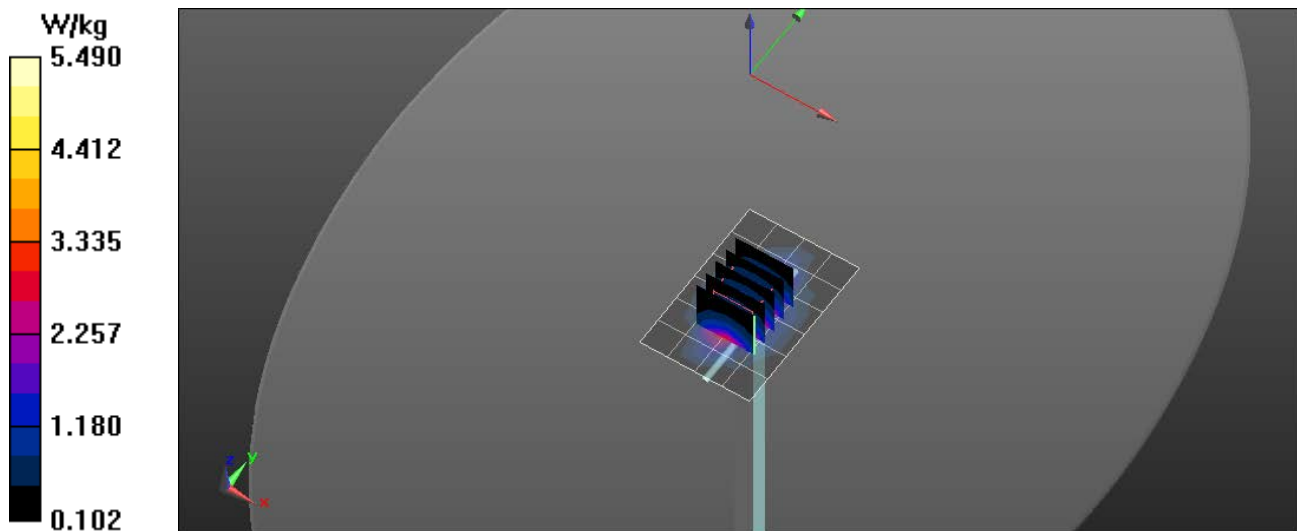

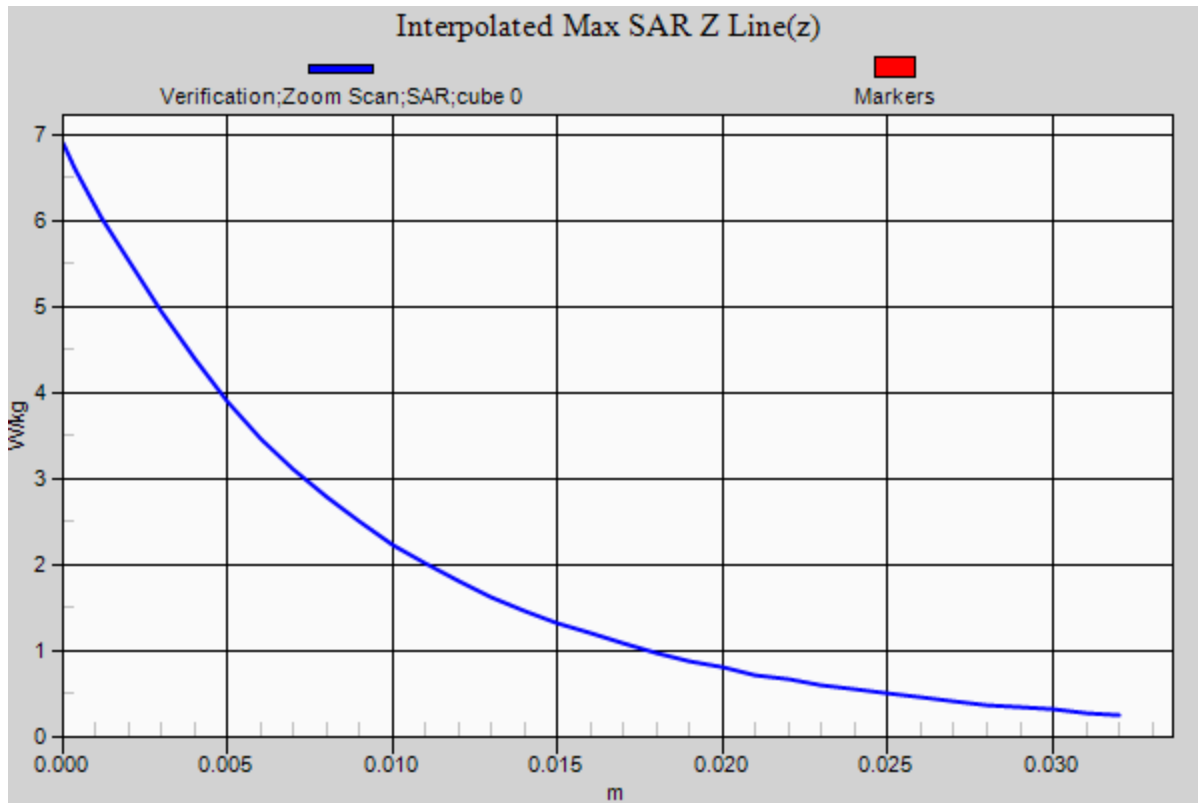

RF Exposure Lab

Plot 9

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 52.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 5/31/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.54, 7.54, 7.54); Calibrated: 8/18/2017;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1321; Calibrated: 1/10/2018

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.63 W/kg


1900 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 52.612 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 6.68 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.92 W/kg

Maximum value of SAR (measured) = 5.63 W/kg

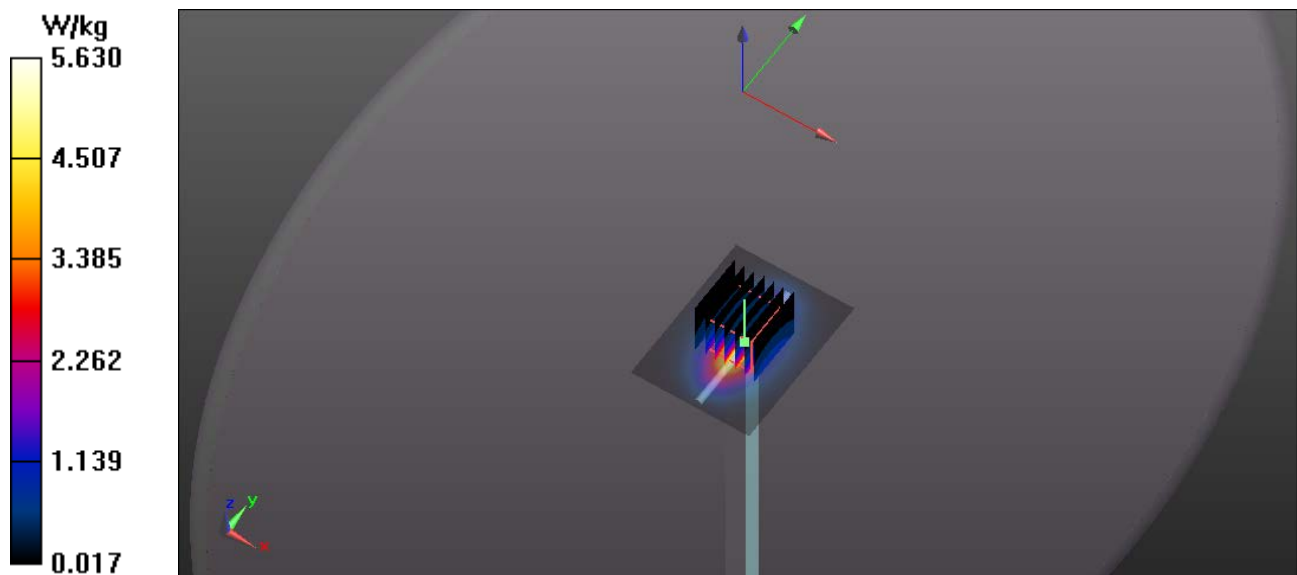

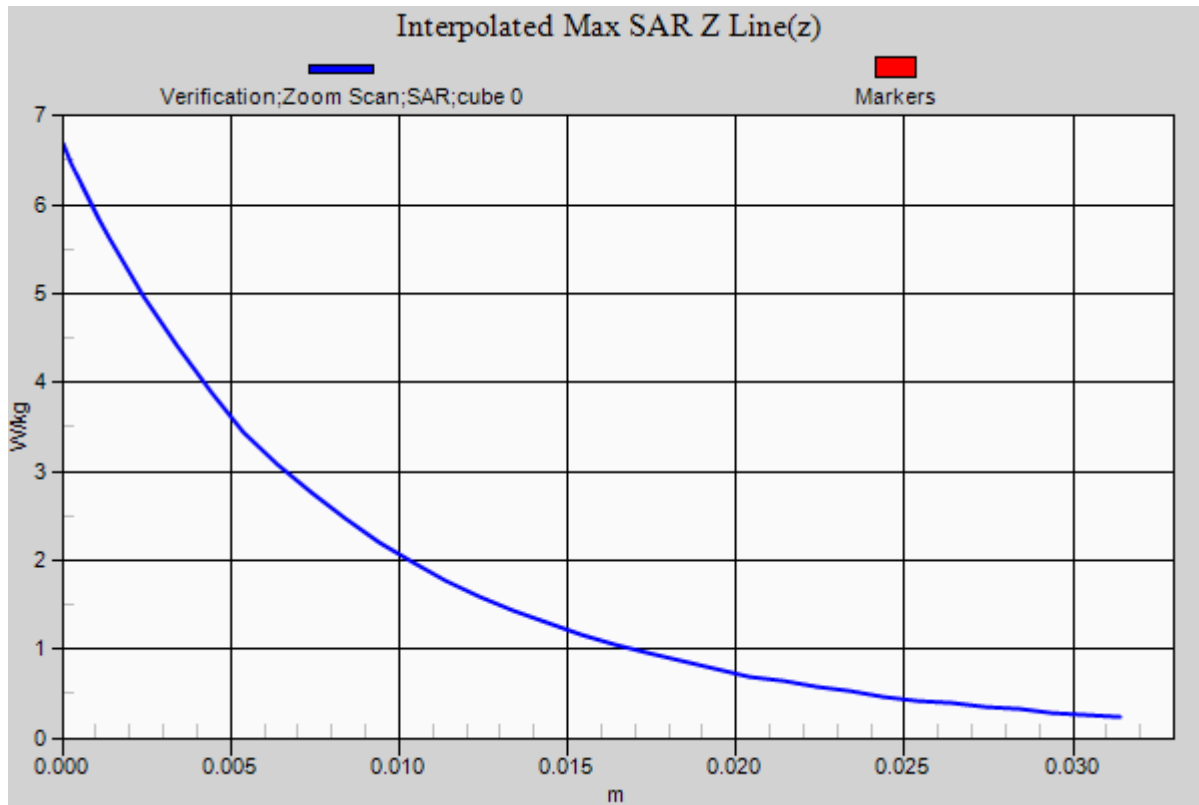

RF Exposure Lab

Plot 10

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 7/26/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.54, 7.54, 7.54); Calibrated: 8/18/2017;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/21/2017

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.44 W/kg


1900 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.227 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 7.22 W/kg

SAR(1 g) = 4.02 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 5.77 W/kg

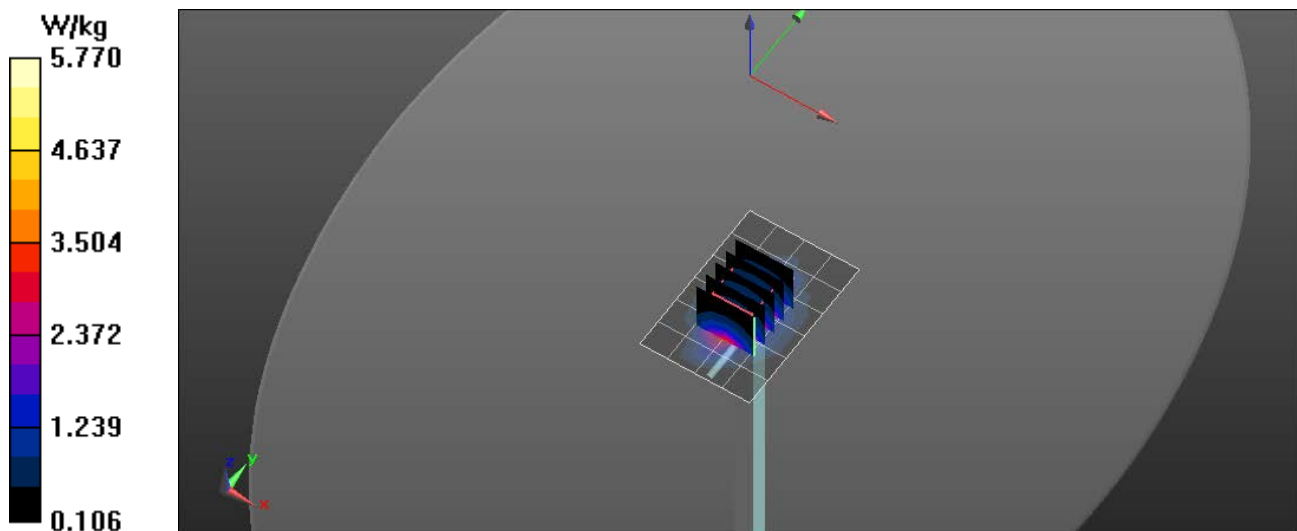

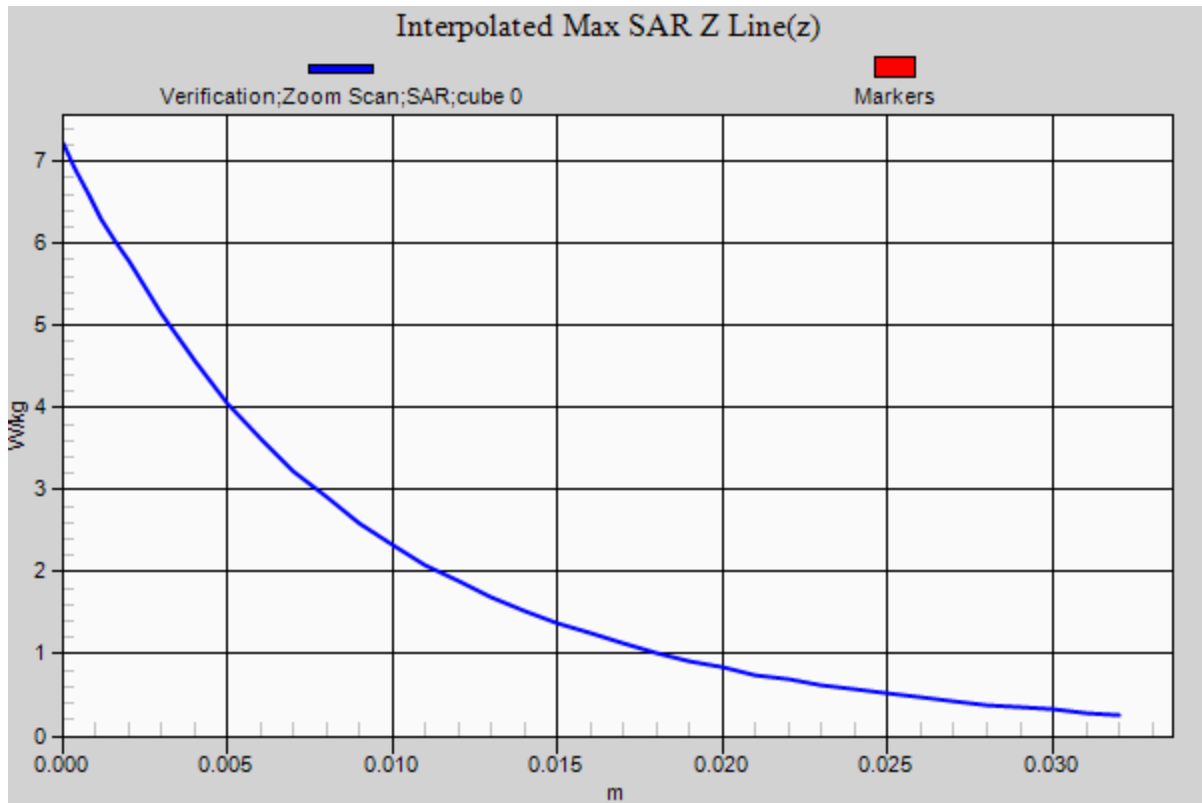

RF Exposure Lab

Plot 11

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d116


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 52.31$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/27/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7.61, 7.61, 7.61); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

1900 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 5.69 W/kg

1900 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52.975 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 6.65 W/kg
SAR(1 g) = 4.06 W/kg; SAR(10 g) = 1.97 W/kg
Maximum value of SAR (measured) = 5.62 W/kg

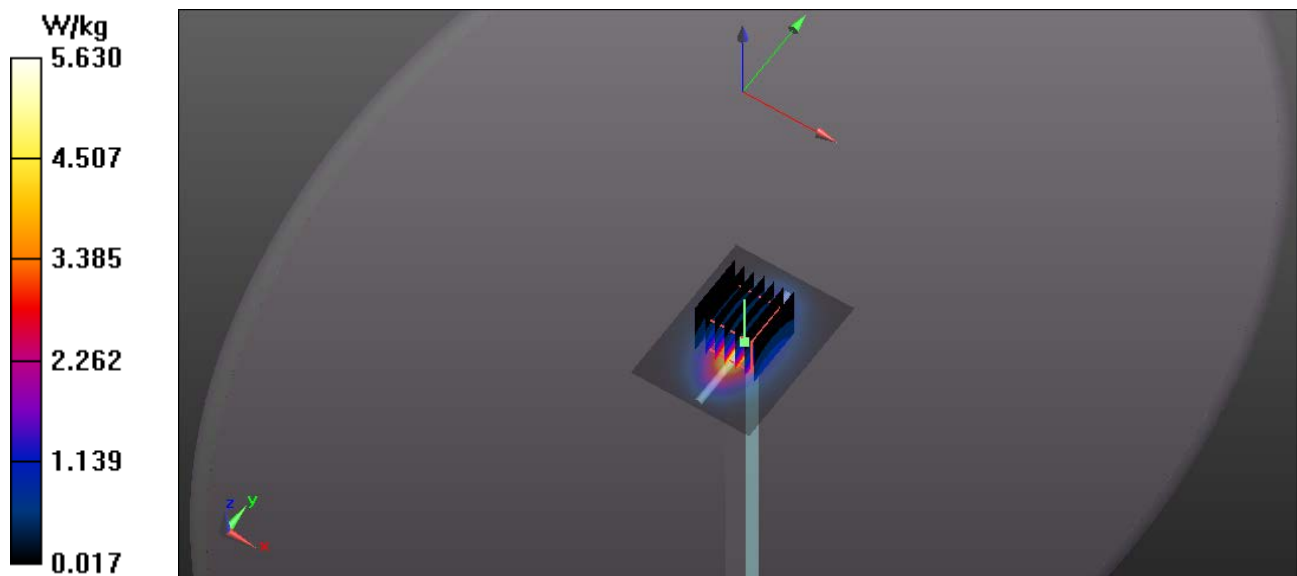

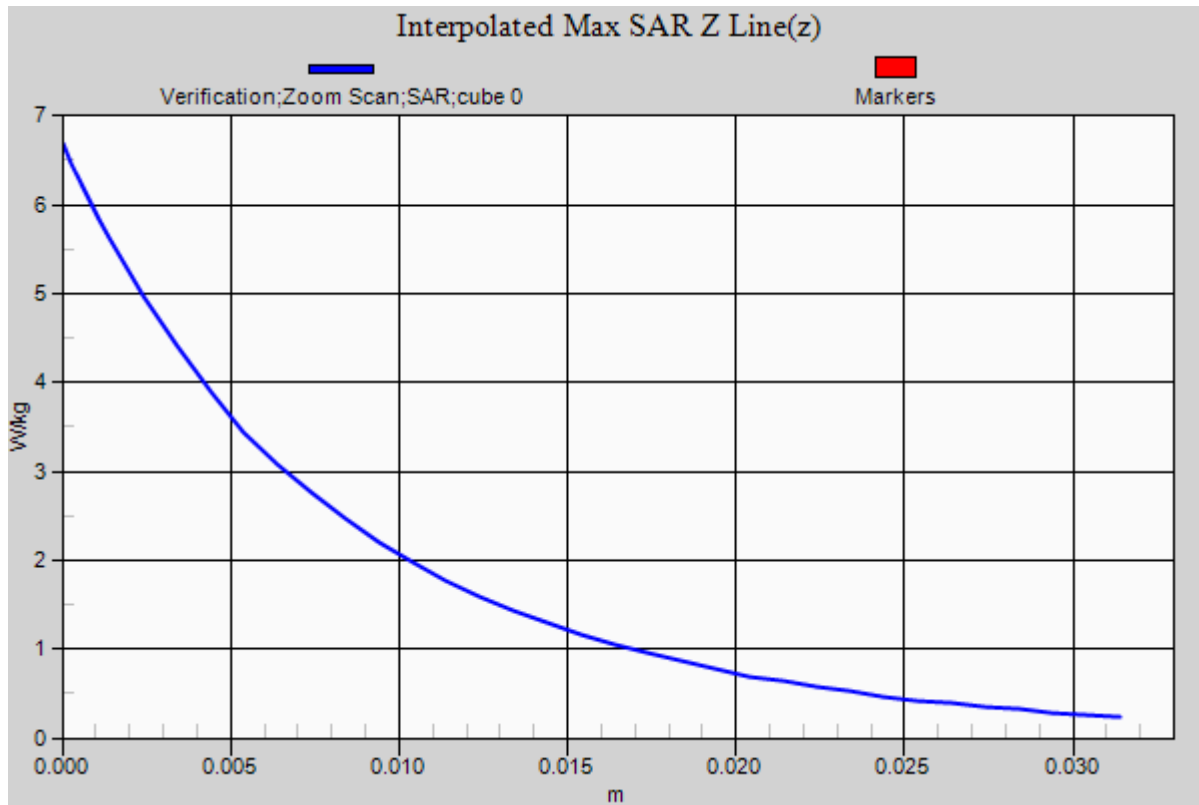

RF Exposure Lab

Plot 12

DUT: Dipole 2300 MHz D2300V2; Type: D2300V2; Serial: D2300V2 - SN:1060


Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1
Medium: MSL2300; Medium parameters used: $f = 2300$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 52.63$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/14/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7.33, 7.33, 7.33); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/2300 MHz/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 8.95 W/kg

Body Verification/2300 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 53.597 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 11.18 W/kg
 $P_{in} = 100$ mW
SAR(1 g) = 4.82 W/kg; SAR(10 g) = 2.2 W/kg
Maximum value of SAR (measured) = 8.71 W/kg

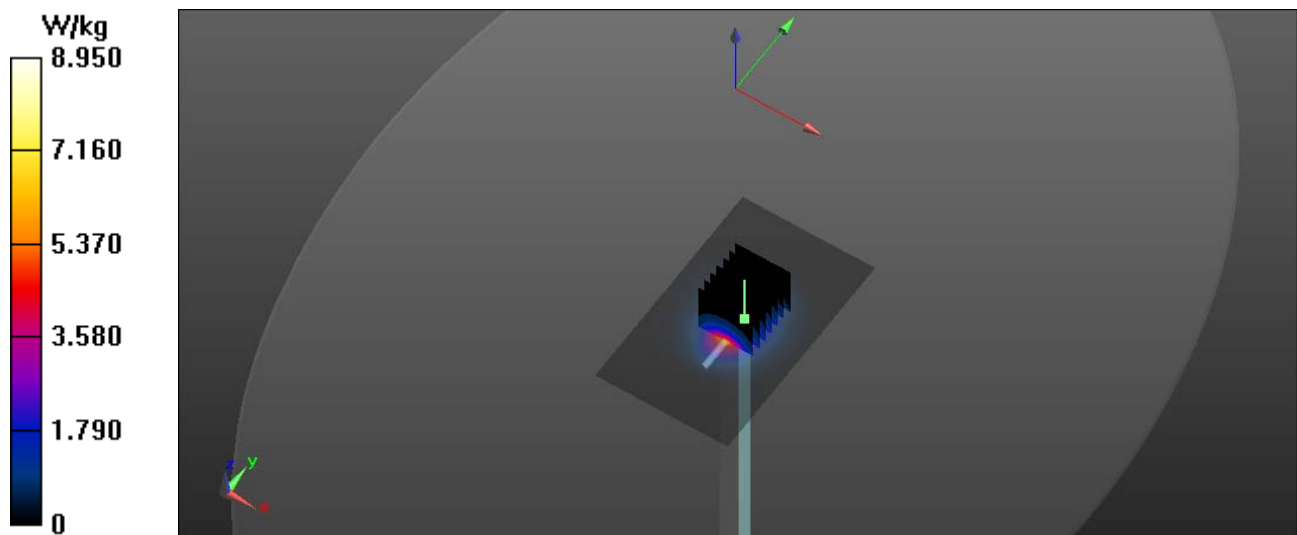

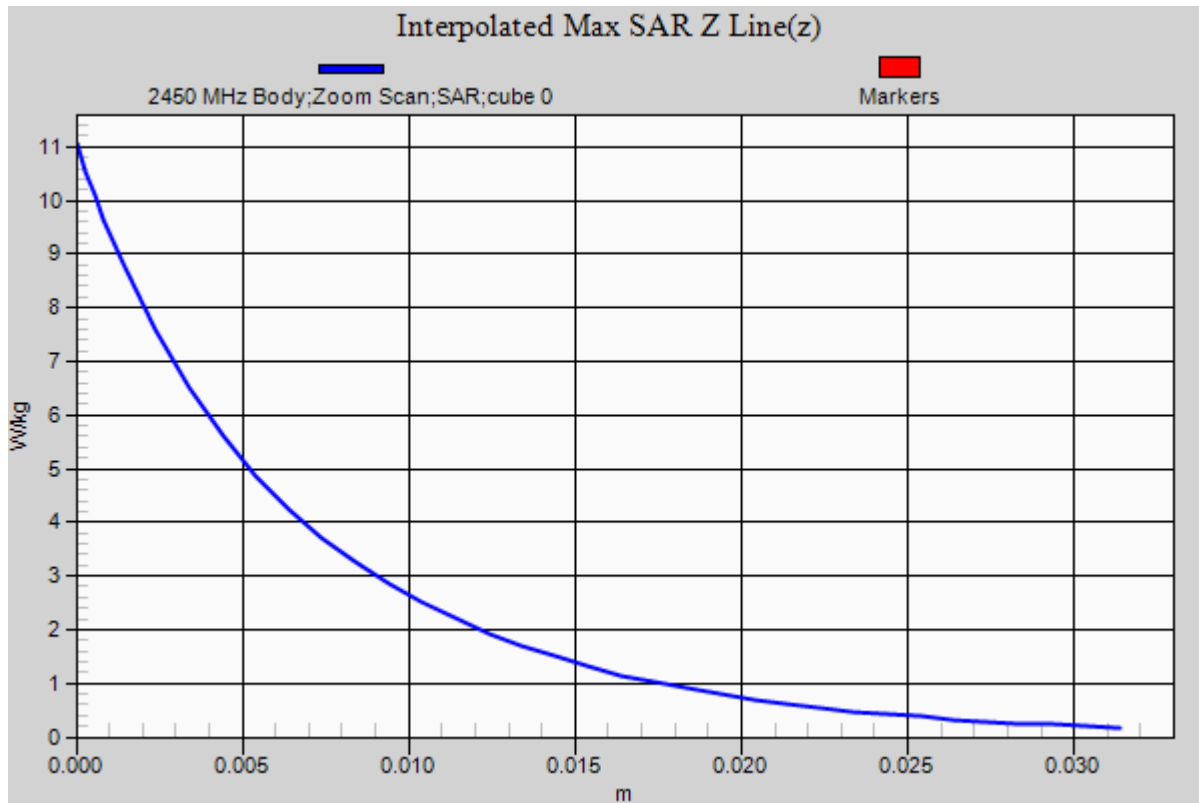

RF Exposure Lab

Plot 13

DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003

Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 2.12$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: Date: 7/9/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.15, 7.15, 7.15); Calibrated: 4/20/2018;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1321; Calibrated: 1/10/2018

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037

Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2550 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.18 W/kg


2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 54.541 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 8.98 W/kg

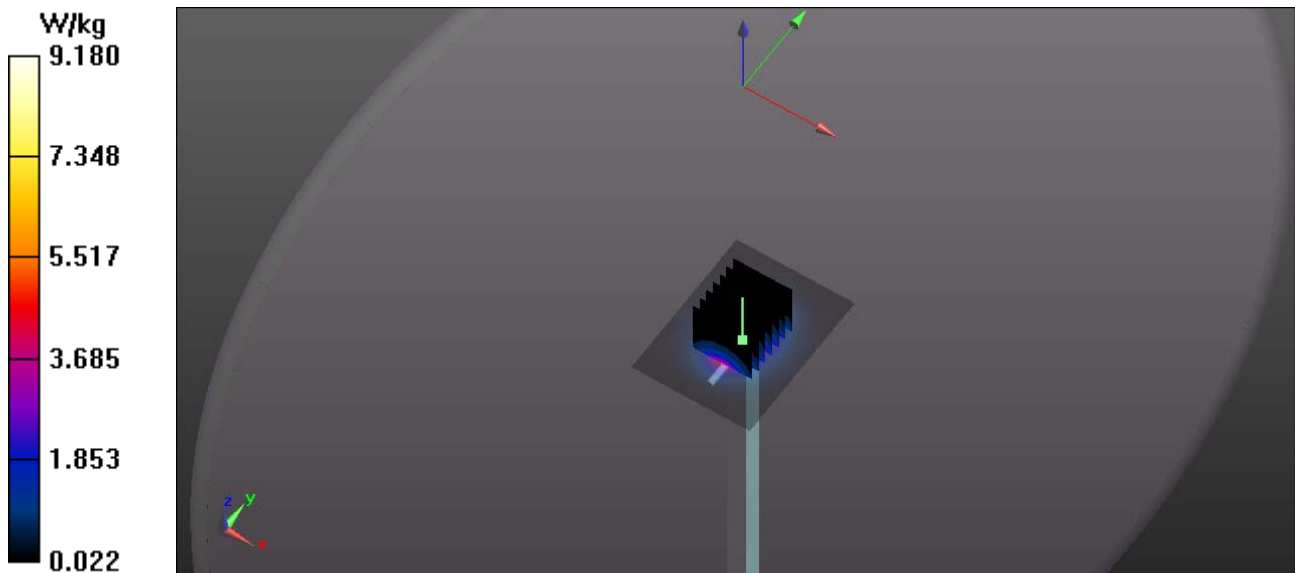

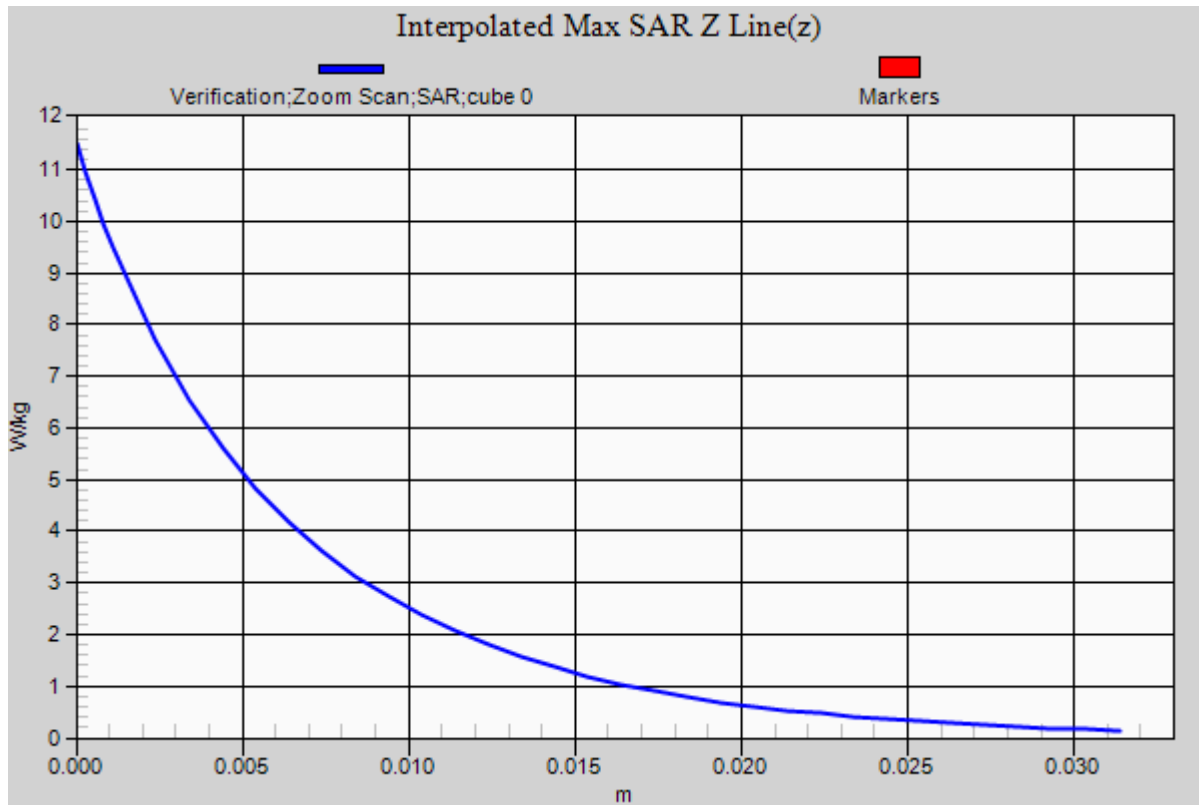

RF Exposure Lab

Plot 14

DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1
Medium: MSL2600; Medium parameters used: $f = 2550$ MHz; $\sigma = 2.11$ S/m; $\epsilon_r = 52.18$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/25/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7.15, 7.15, 7.15); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2550 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 8.91 W/kg

2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.867 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 11.6 W/kg
SAR(1 g) = 5.33 W/kg; SAR(10 g) = 2.43 W/kg
Maximum value of SAR (measured) = 9.18 W/kg

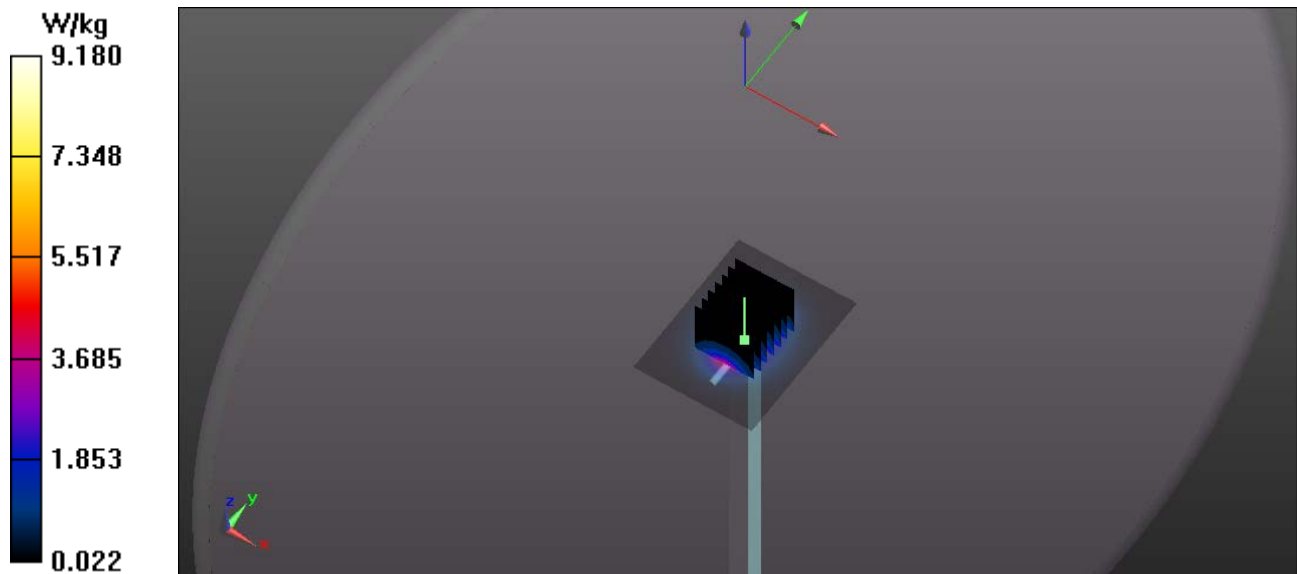

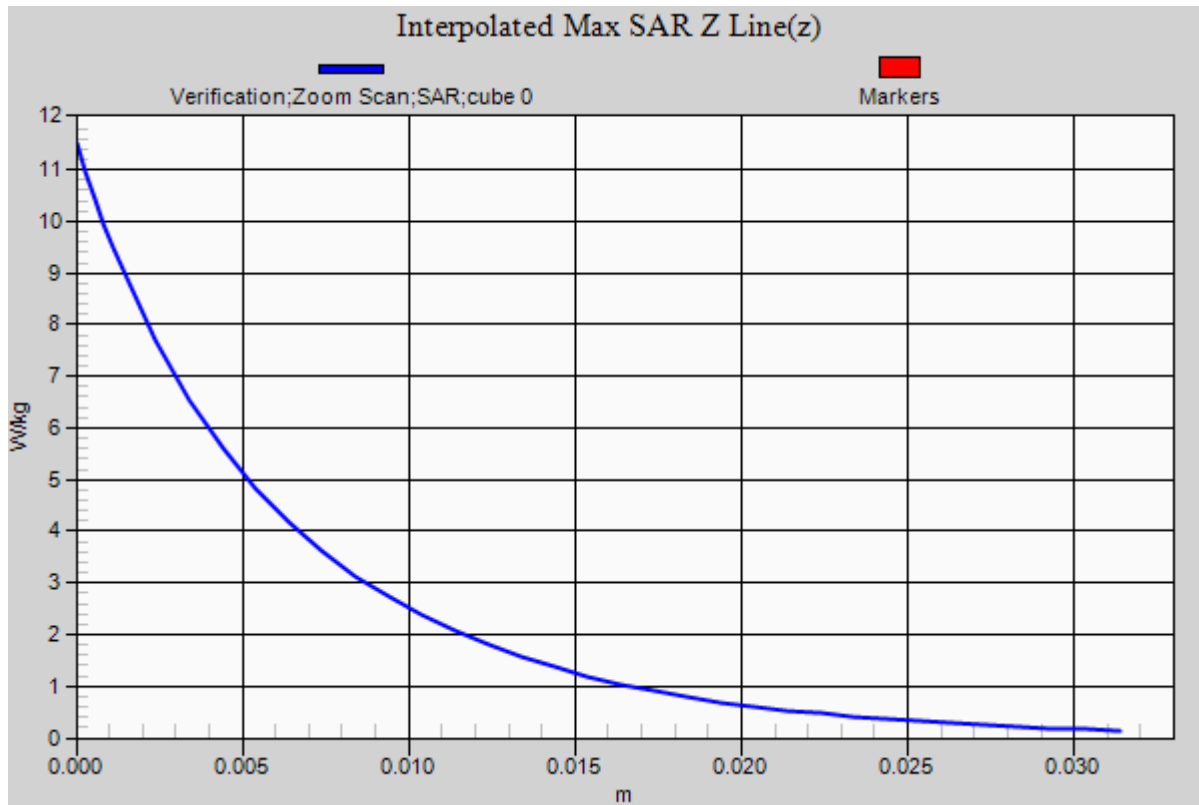

RF Exposure Lab

Plot 15

DUT: Dipole D3500V2; Type: D3500V2; Serial: D3500V2 - SN:1061


Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.35$ S/m; $\epsilon_r = 51.23$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/11/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3500 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.64 W/kg

3500 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm
Reference Value = 11.892 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.245 W/kg
Maximum value of SAR (measured) = 1.70 W/kg

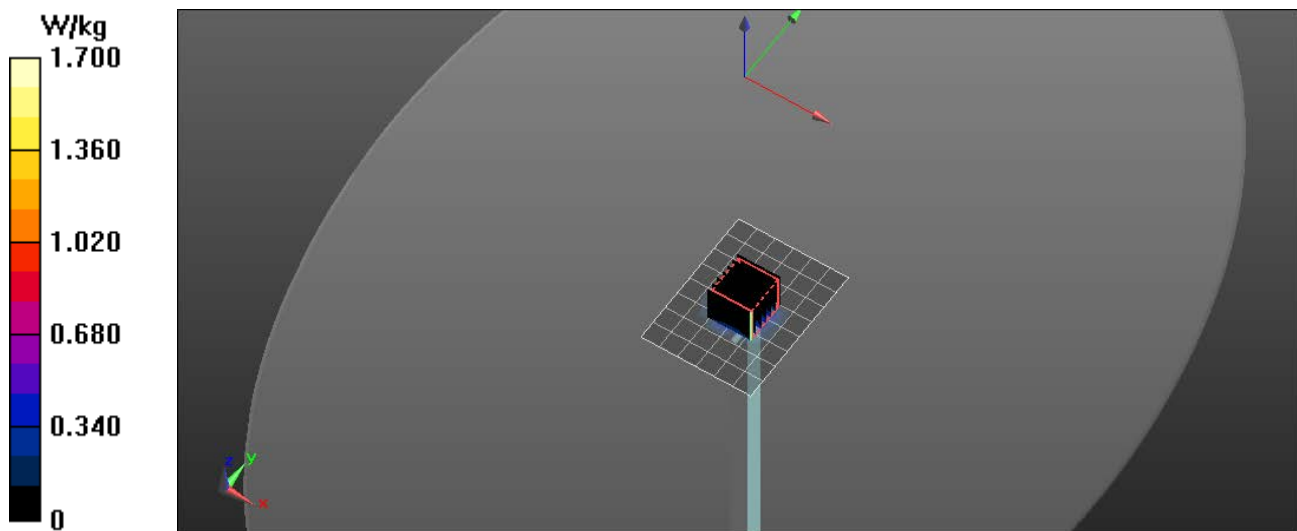

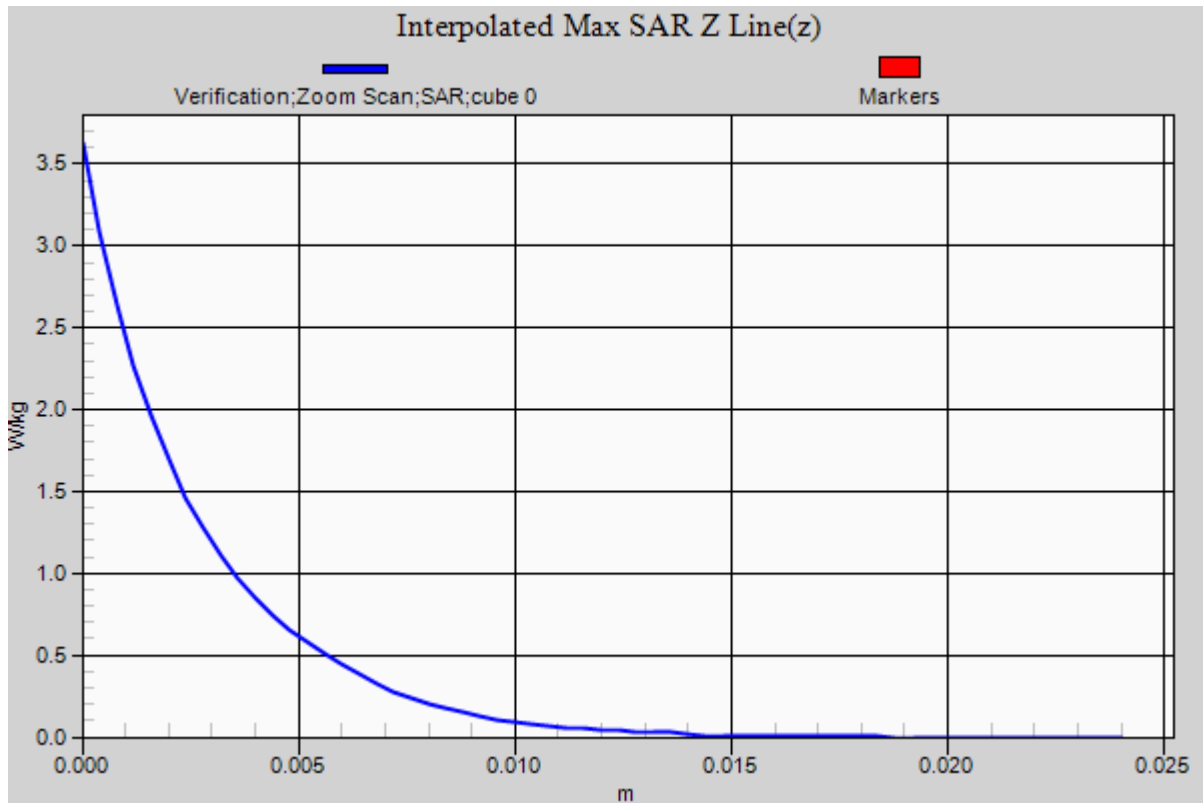

RF Exposure Lab

Plot 16

DUT: Dipole D3500V2; Type: D3500V2; Serial: D3500V2 - SN:1061


Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 51.11$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 2/25/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2019
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3500 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.61 W/kg

3500 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm
Reference Value = 12.358 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.65 W/kg
SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.246 W/kg
Maximum value of SAR (measured) = 1.68 W/kg

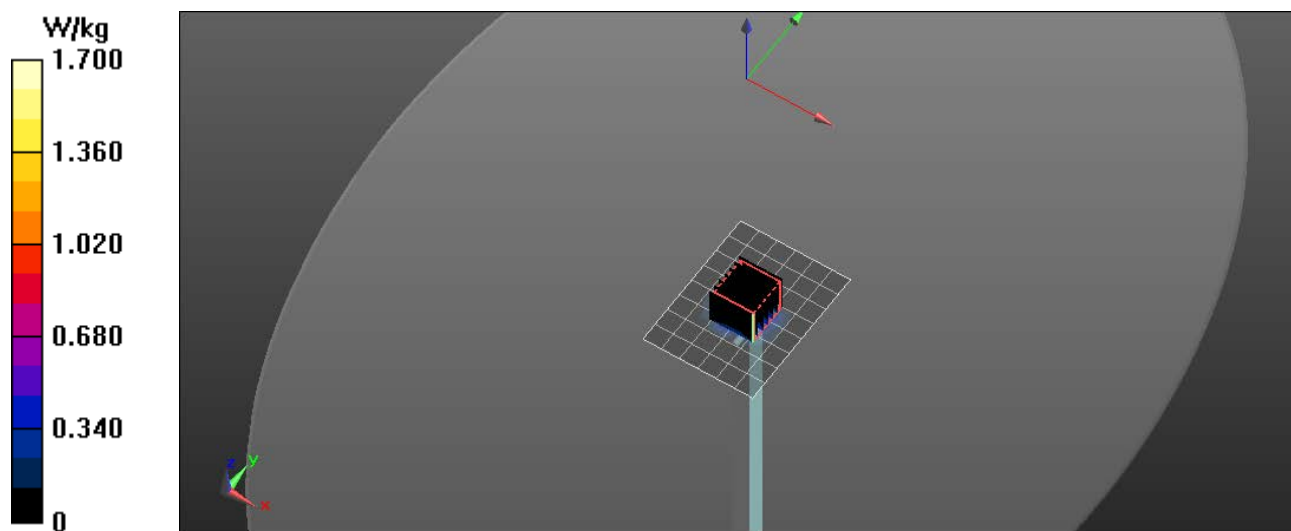

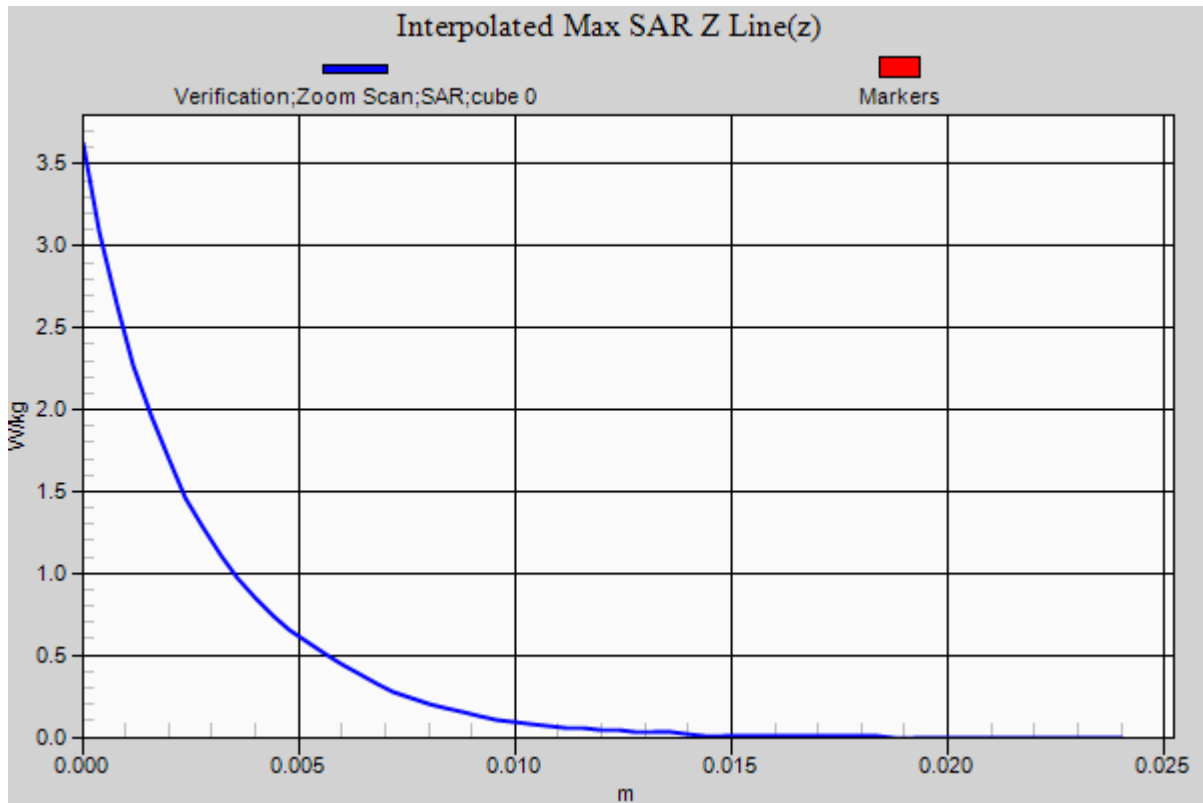

RF Exposure Lab

Plot 17

DUT: Dipole D3700V2; Type: D3700V2; Serial: D3700V2 - SN:1024


Communication System: CW; Frequency: 3700 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3700$ MHz; $\sigma = 3.57$ S/m; $\epsilon_r = 50.92$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/11/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(6.71, 6.71, 6.71); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

3700 MHz Body/Verification/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.55 W/kg

3700 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm
Reference Value = 55.759 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.09 W/kg
SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.238 W/kg
Maximum value of SAR (measured) = 1.58 W/kg

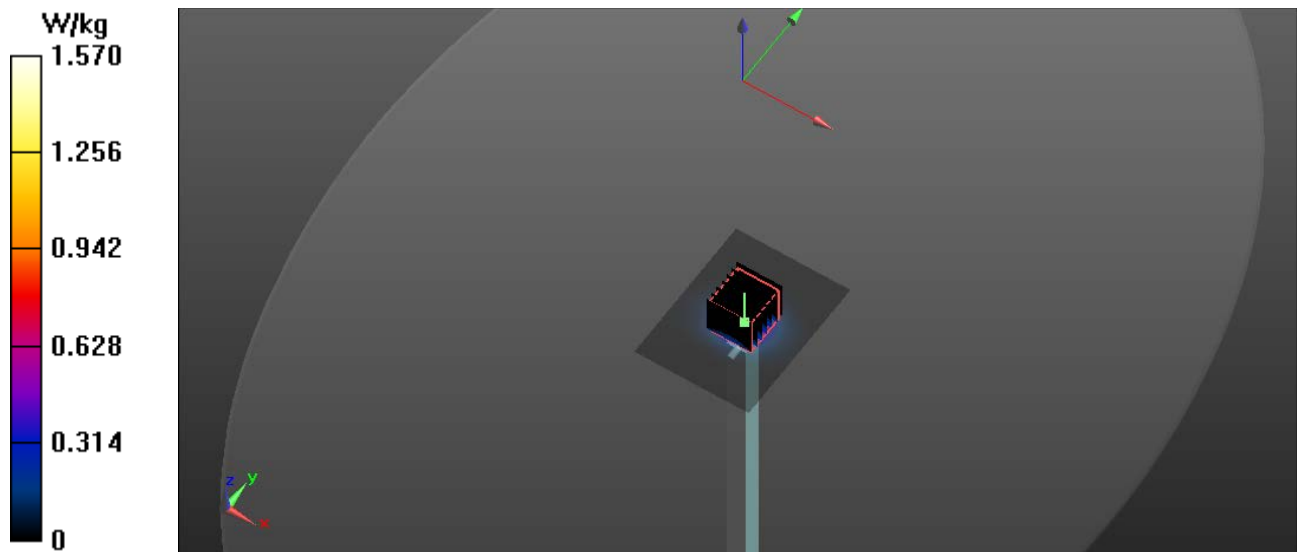

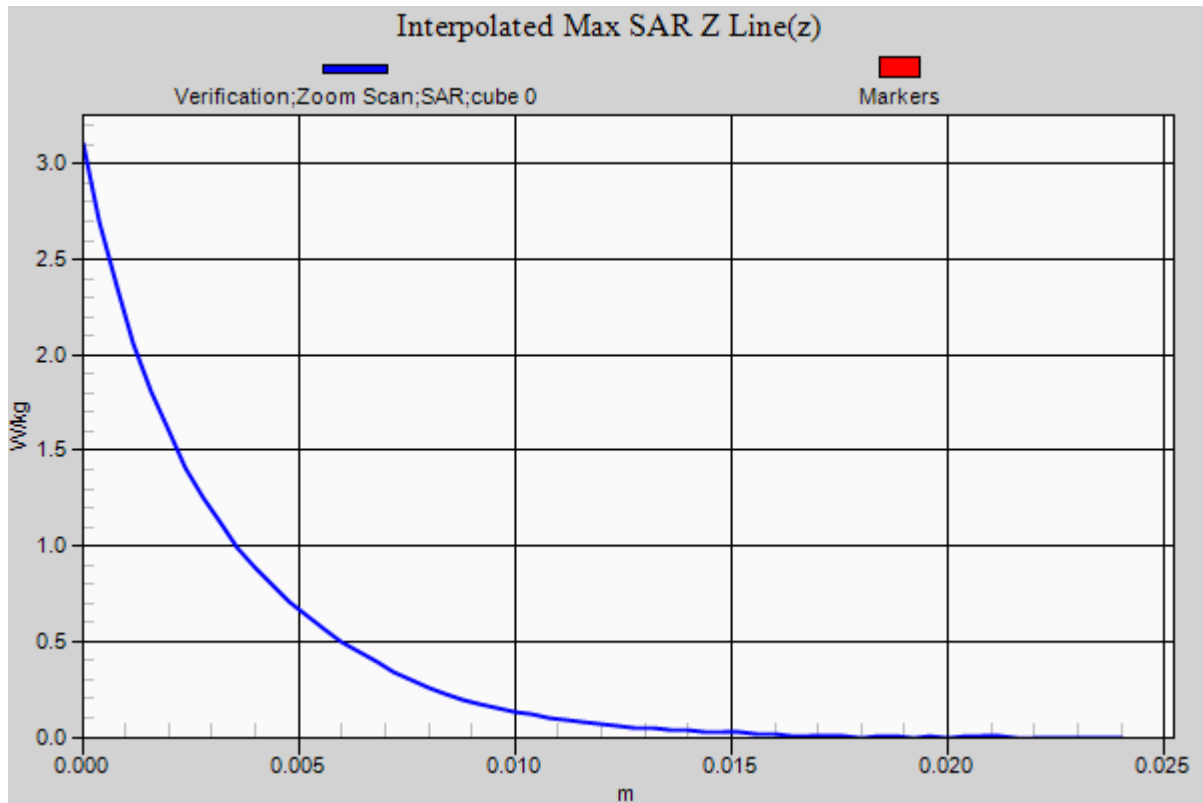

RF Exposure Lab

Plot 18

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN: 881


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 52.77$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/2/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(7.29, 7.29, 7.29); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Body Verification/2450 MHz/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 8.92 W/kg

Body Verification/2450 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 53.359 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 11.04 W/kg
SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.47 W/kg
Maximum value of SAR (measured) = 8.79 W/kg

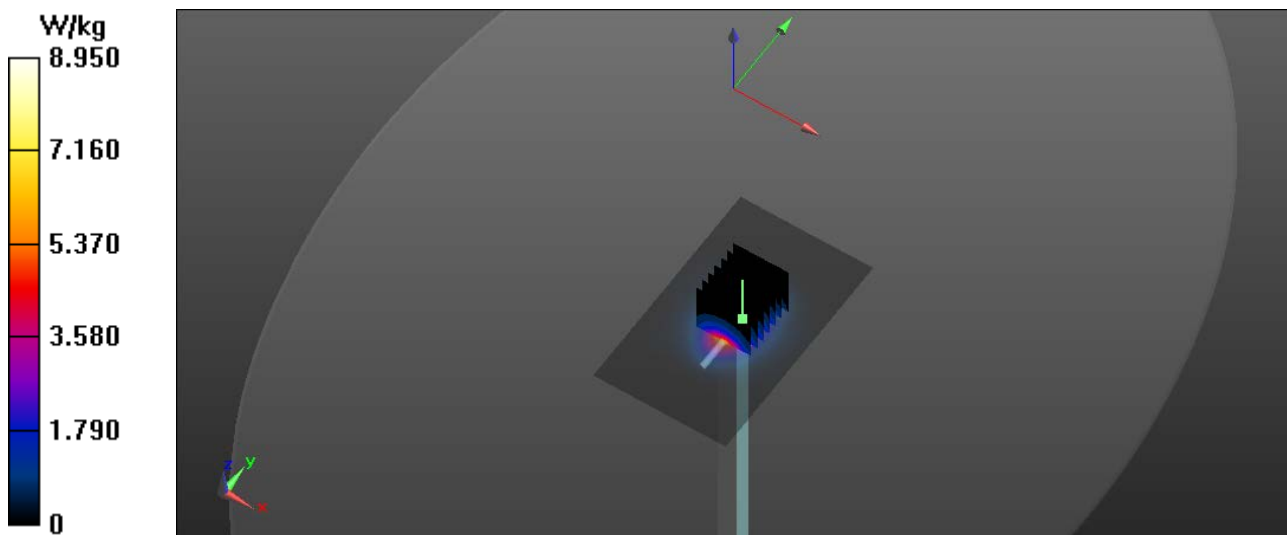

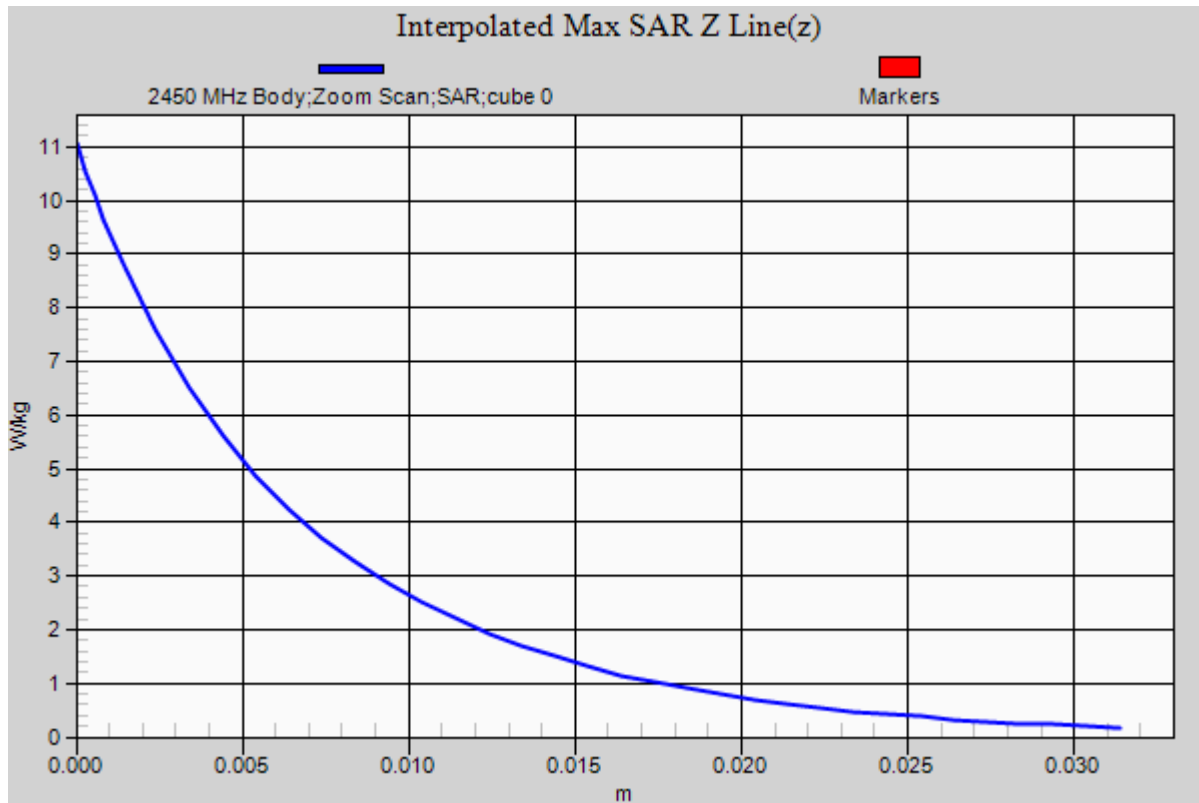

RF Exposure Lab

Plot 19

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1119


Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 49.07$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/28/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(4.46, 4.46, 4.46); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5200 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.58 W/kg

5200 MHz Body/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.705 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.75 W/kg
SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.231 W/kg
Maximum value of SAR (measured) = 1.65 W/kg

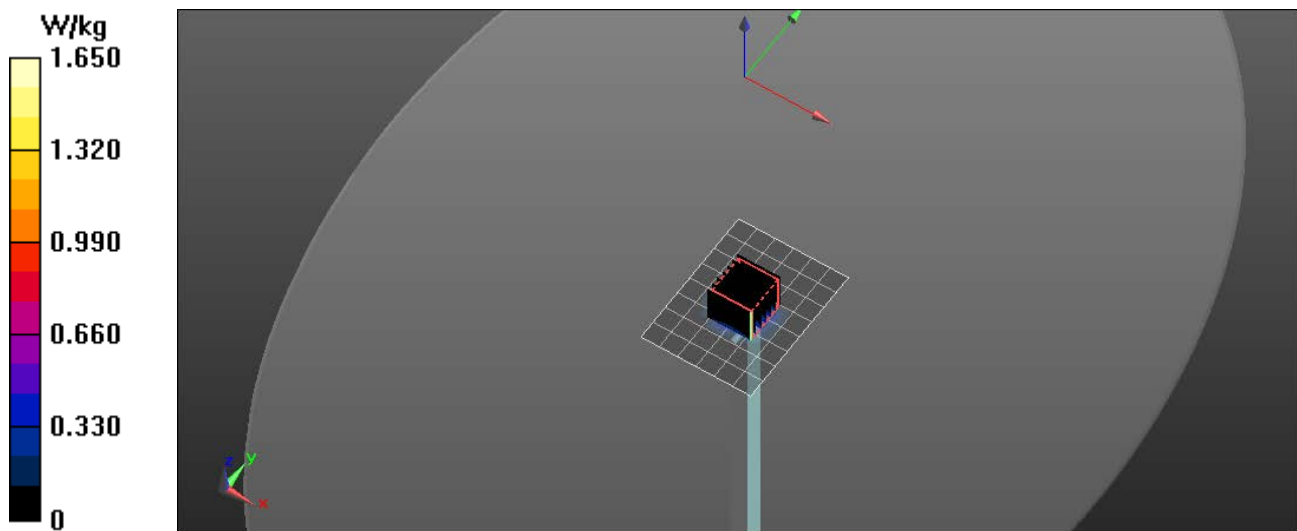

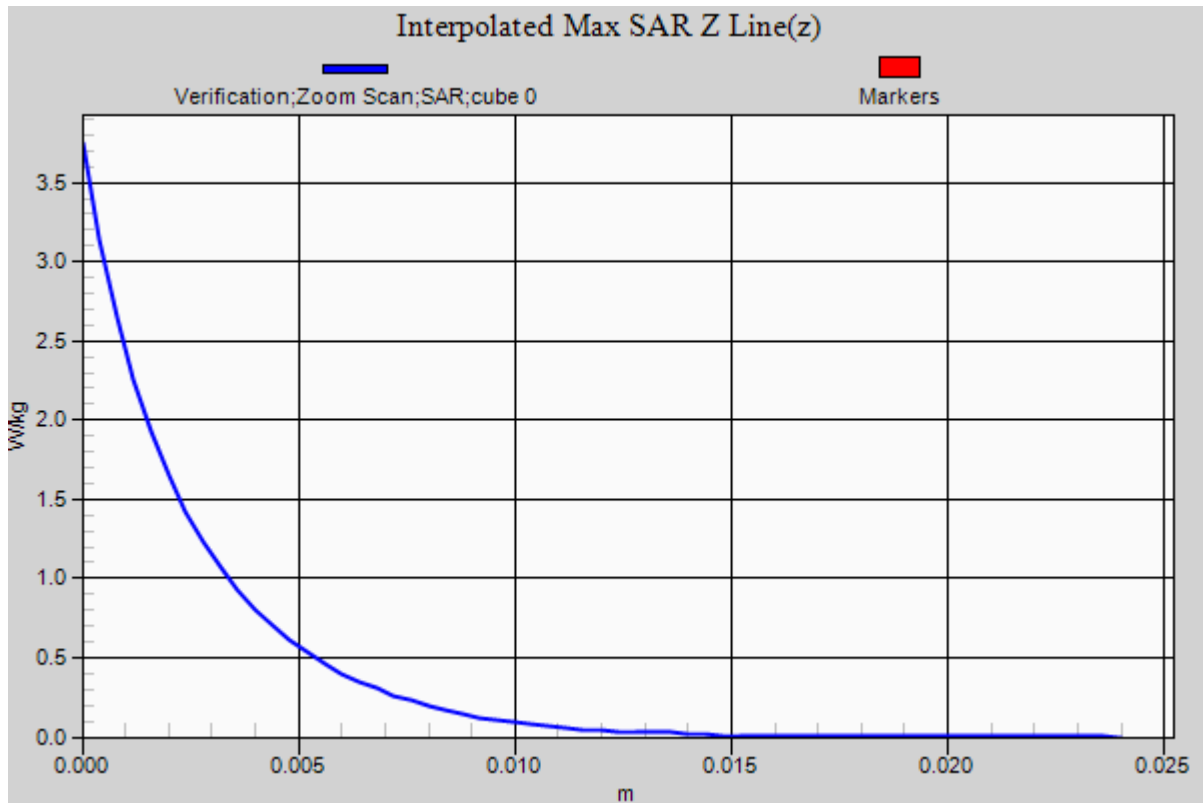

RF Exposure Lab

Plot 20

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1119


Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.99$ S/m; $\epsilon_r = 48.17$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/28/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C
Probe: EX3DV4 - SN3662; ConvF(4.08, 4.08, 4.08); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5800 MHz Body/Verification/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.56 W/kg

5800 MHz Body/Verification/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.621 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.47 W/kg
SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.228 W/kg
Maximum value of SAR (measured) = 1.63 W/kg

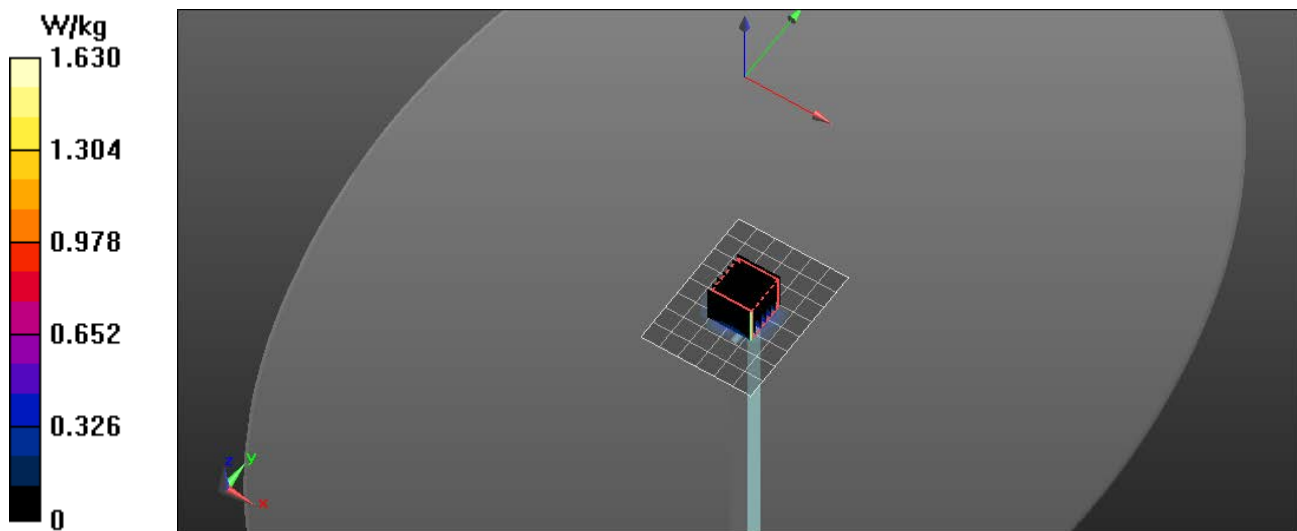

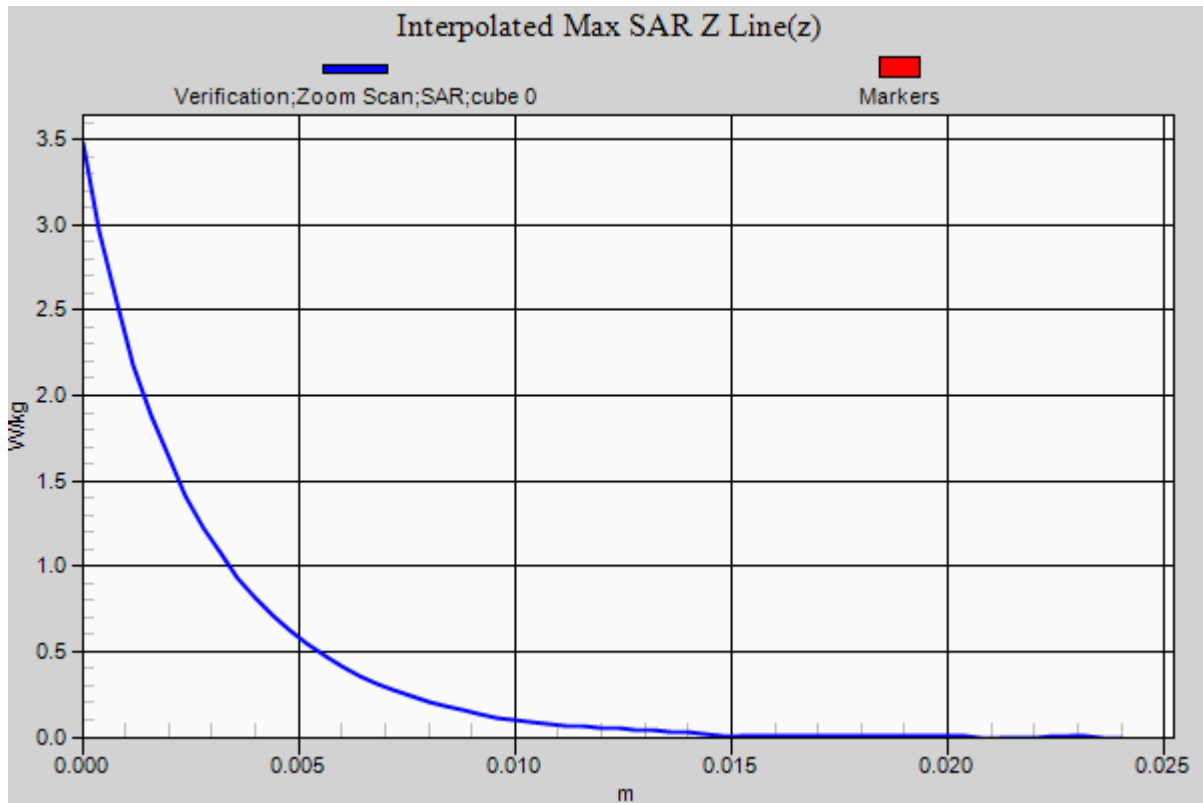

Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.978$ S/m; $\epsilon_r = 55.508$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.8, 9.8, 9.8); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 12 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 W/kg

Band 12 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.23 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.441 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.743 W/kg

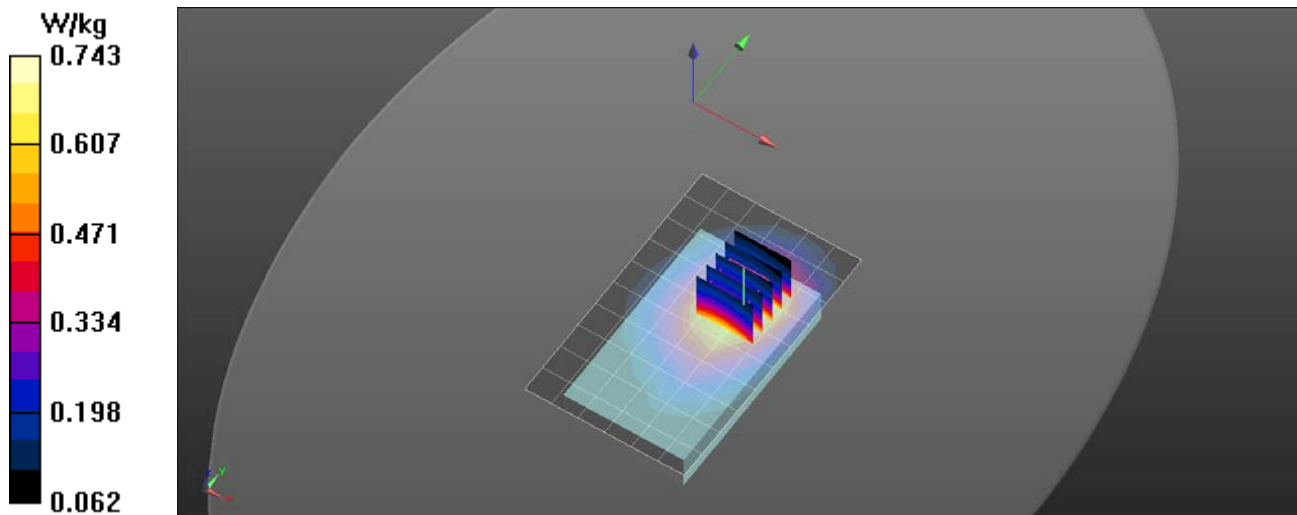

RF Exposure Lab

Plot 2

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 2/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.8, 9.8, 9.8); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 17 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.746 W/kg


Band 17 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.13 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.804 W/kg

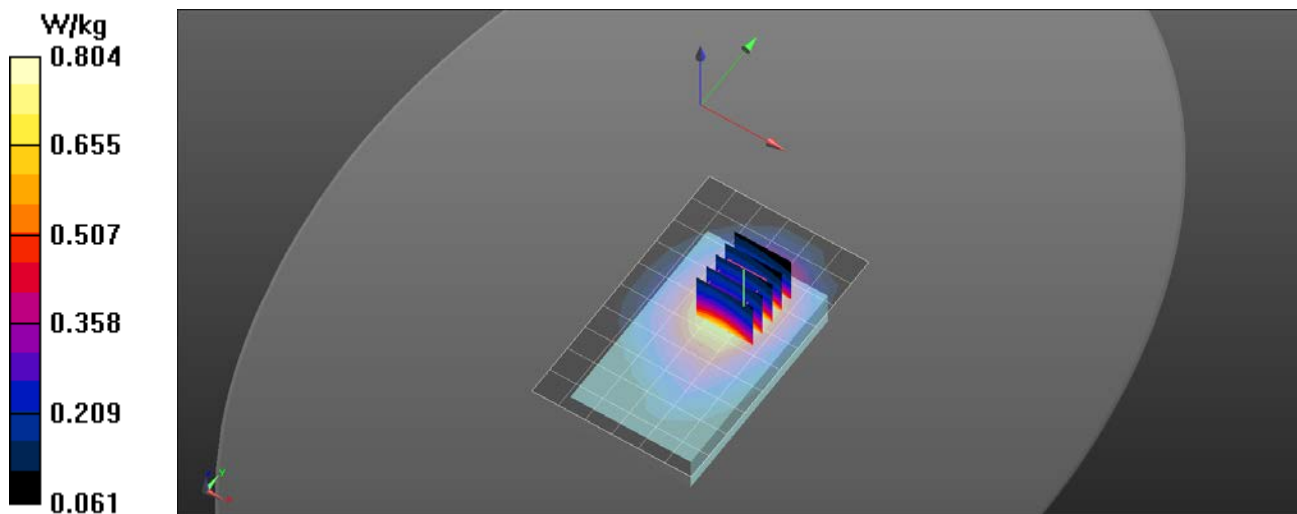

RF Exposure Lab

Plot 3

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 55.452$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 6/6/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.8, 9.8, 9.8); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 13 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 W/kg

Band 13 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.32 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 1 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 W/kg

Band 13 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.32 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.905 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.09 W/kg

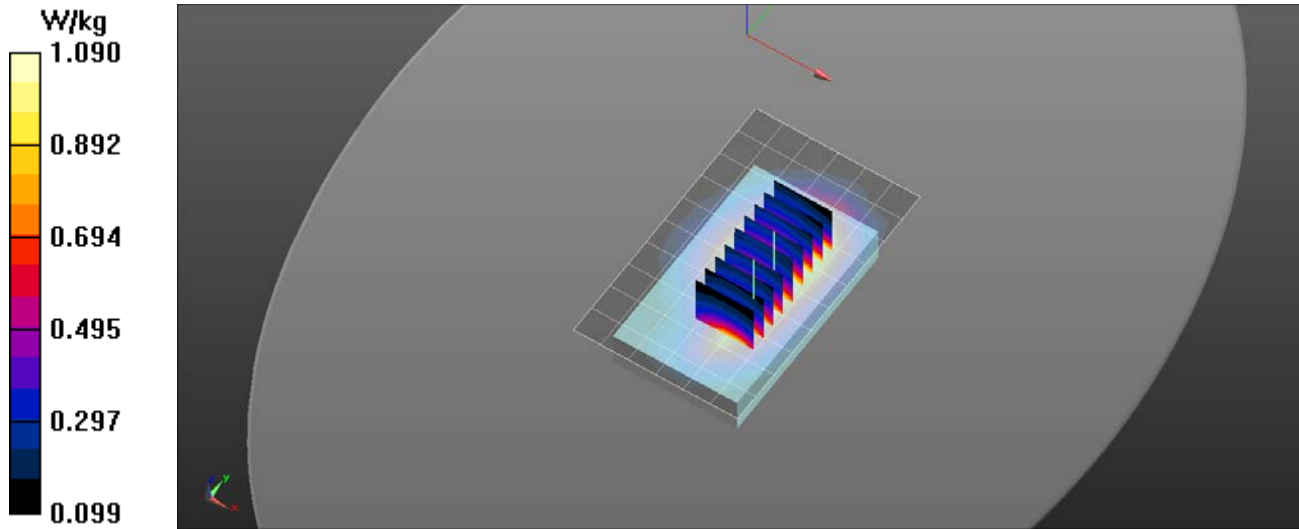

RF Exposure Lab

Plot 4

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 793 \text{ MHz}$; $\sigma = 1.003 \text{ S/m}$; $\epsilon_r = 55.408$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 6/6/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.8, 9.8, 9.8); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 14 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.921 W/kg

Band 14 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.757 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Band 14 LTE/Side A 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.597 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.739 W/kg

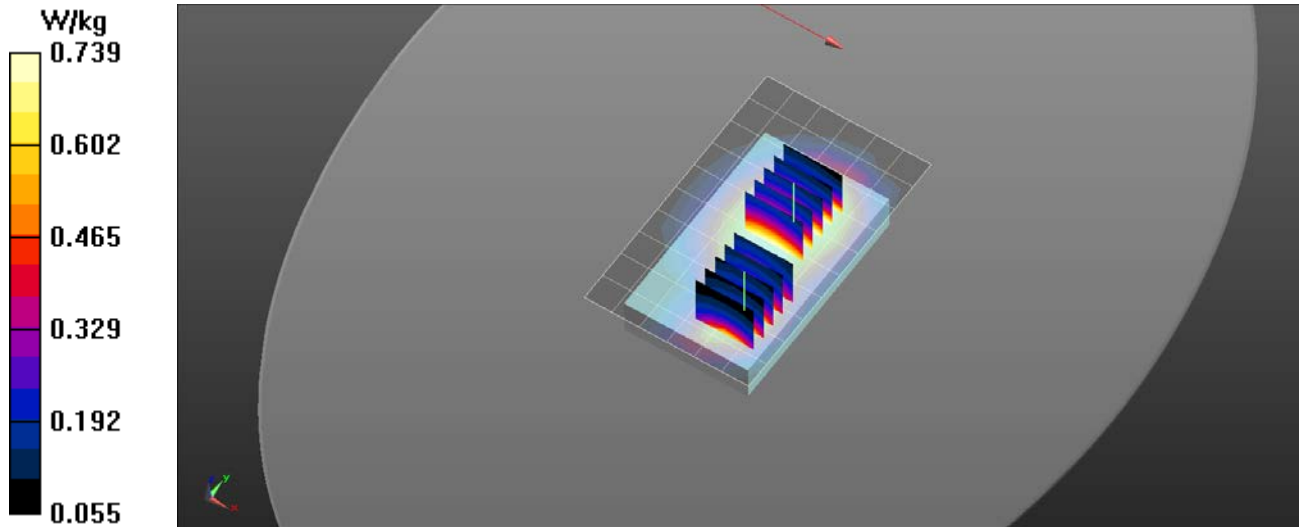

RF Exposure Lab

Plot 5

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: UMTS (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.902$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/1/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.21, 9.21, 9.21); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 5 UMTS/Side C Ant 0 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.709 W/kg

Band 5 UMTS/Side C Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.23 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.589 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.727 W/kg

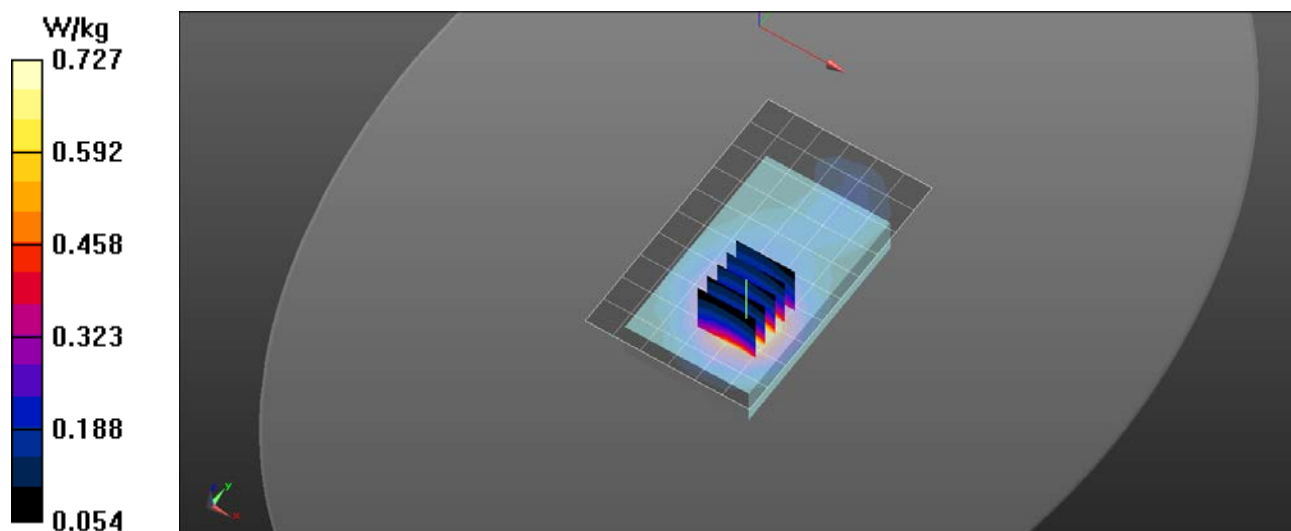

RF Exposure Lab

Plot 6

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 829 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 55.934$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 6/1/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.21, 9.21, 9.21); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 5 LTE/Side A 1 RB 24 Offset Ant 0 Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

Band 5 LTE/Side A 1 RB 24 Offset Ant 0 Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.59 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.975 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.18 W/kg

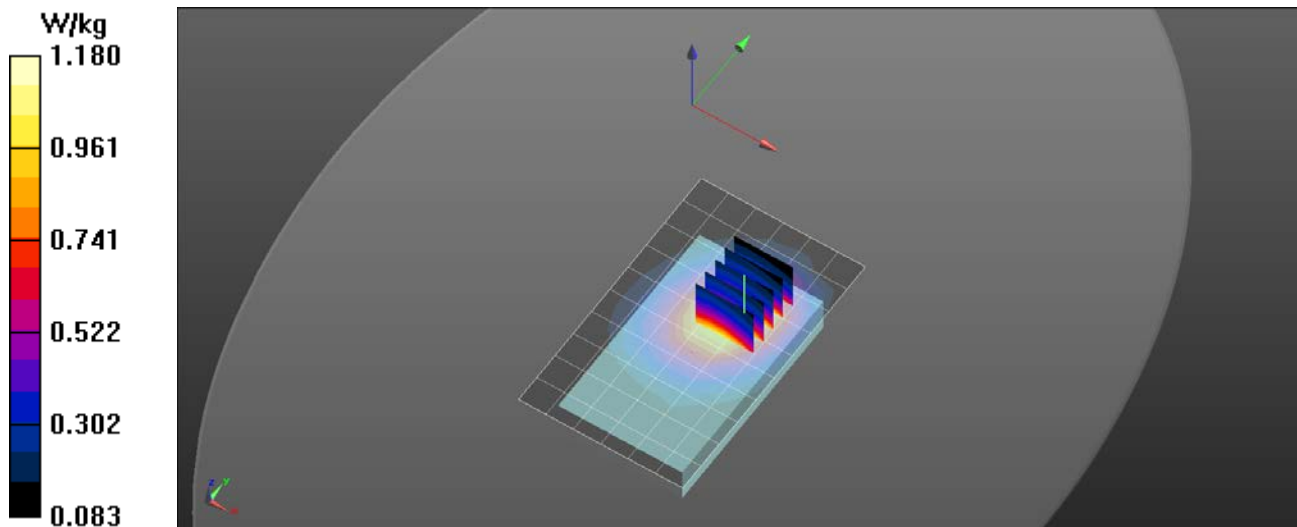

RF Exposure Lab

Plot 7

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.744$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/19/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.21, 9.21, 9.21); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 26 LTE/Side C 1 RB 24 Offset Ant 0 Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.800 W/kg

Band 26 LTE/Side C 1 RB 24 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.82 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.951 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.481 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.833 W/kg

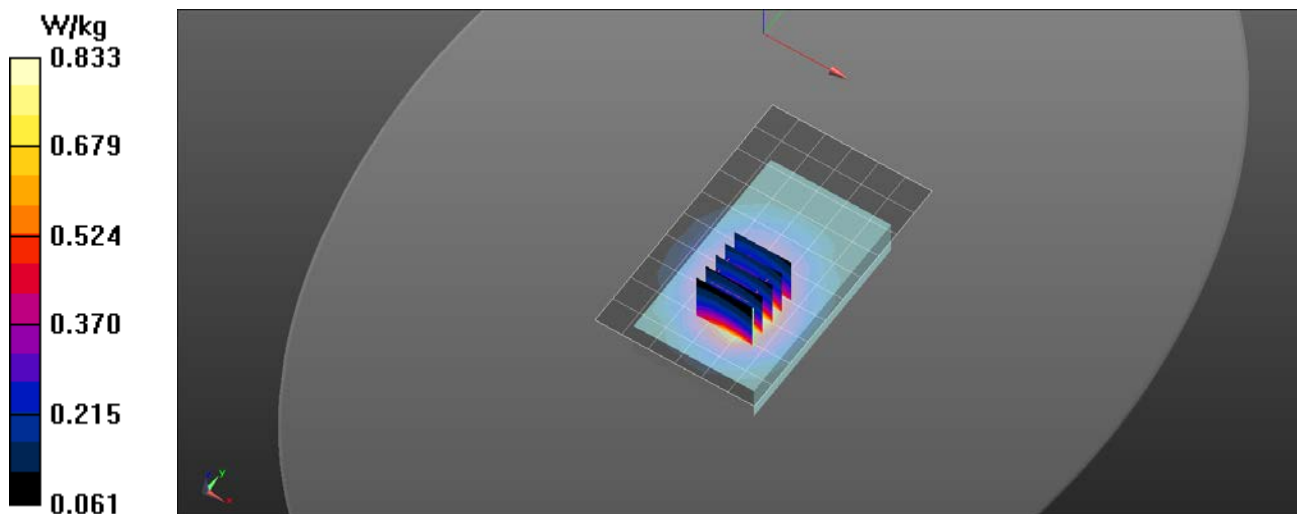

RF Exposure Lab

Plot 8

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: UMTS (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 52.803$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/22/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.96, 7.96, 7.96); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 4 UMTS/Side A Ant 0 Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.53 W/kg

Band 4 UMTS/Side A Ant 0 Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.41 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.482 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.67 W/kg

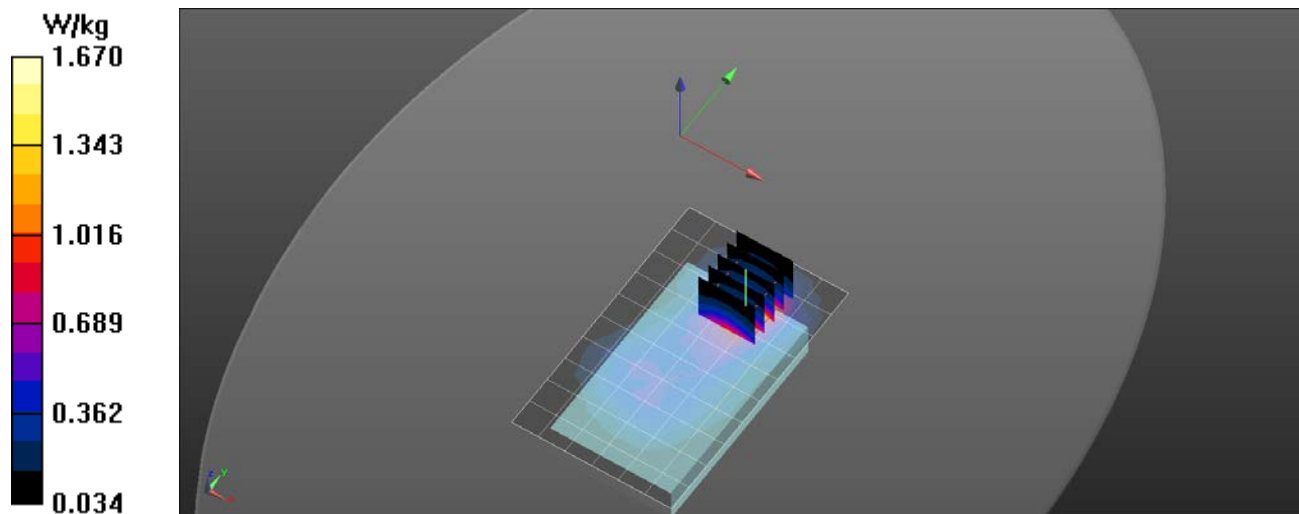

RF Exposure Lab

Plot 9

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used: $f = 1720$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/8/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.96, 7.96, 7.96); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 66 LTE Retest/Side A 1 RB 49 Offset Ant 0 Low2/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.73 W/kg

Band 66 LTE Retest/Side A 1 RB 49 Offset Ant 0 Low2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.62 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 1.28 W/kg
Maximum value of SAR (measured) = 1.66 W/kg

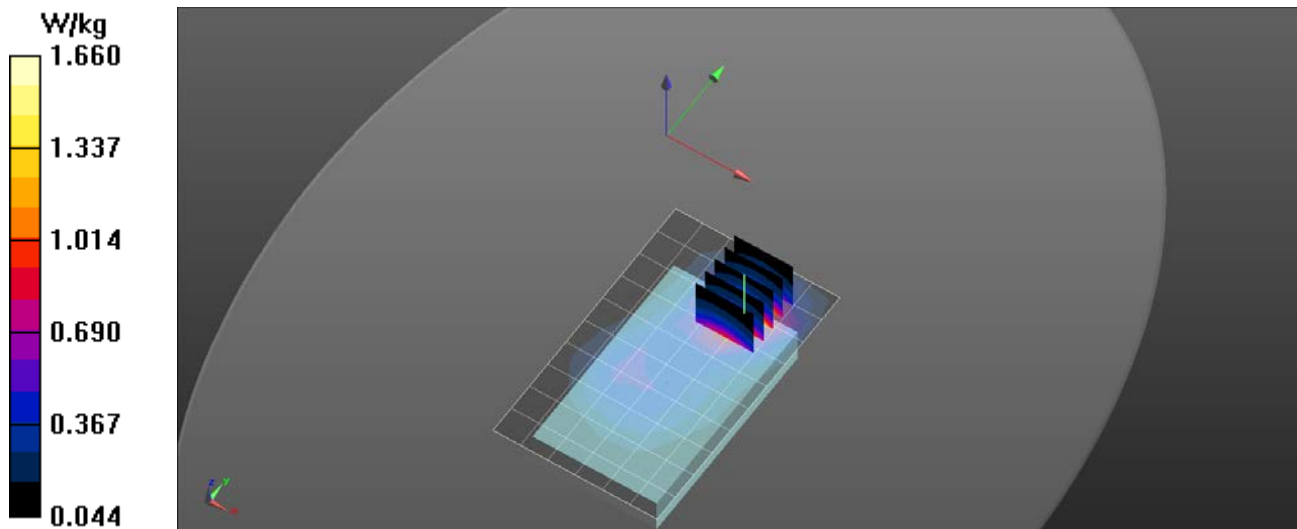

RF Exposure Lab

Plot 10

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: UMTS (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 52.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/1/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.54, 7.54, 7.54); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 2 UMTS/Side A Ant 0 Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.38 W/kg

Band 2 UMTS/Side A Ant 0 Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.81 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.11 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.48 W/kg

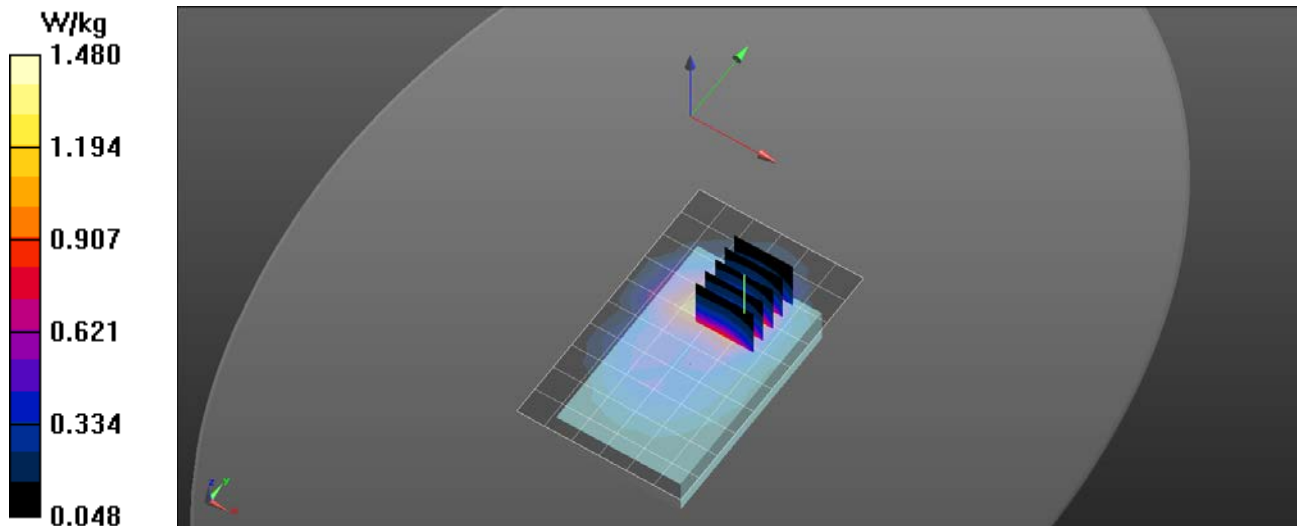

RF Exposure Lab

Plot 11

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 52.07$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 5/31/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.54, 7.54, 7.54); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 2 LTE/Side A 1 RB 49 Offset Ant 0 High/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.04 W/kg


Band 2 LTE/Side A 1 RB 49 Offset Ant 0 High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.79 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.948 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

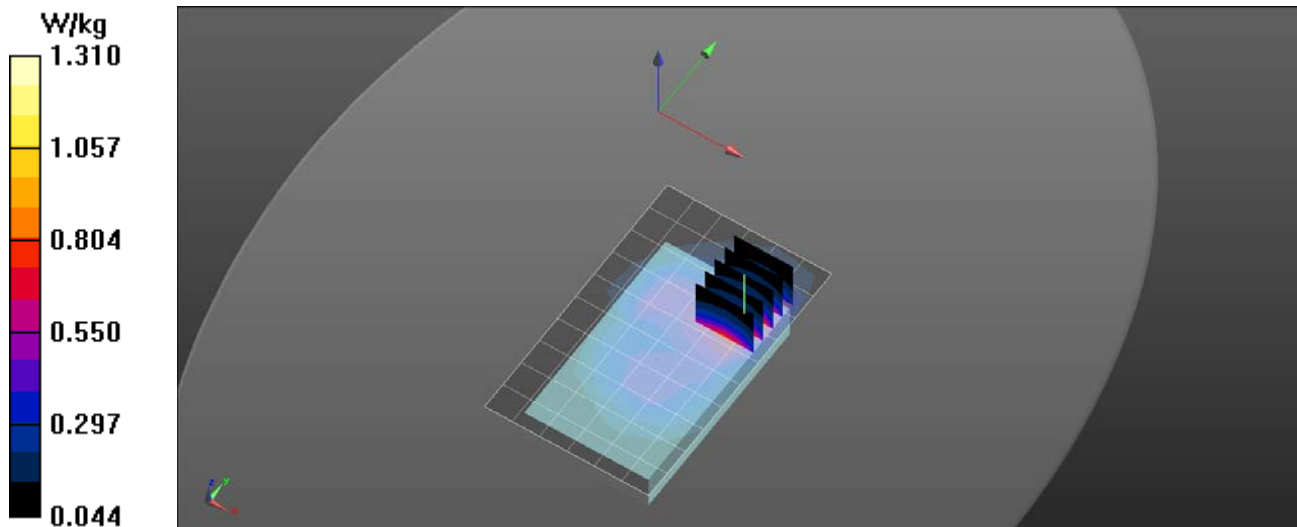

RF Exposure Lab

Plot 12

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/27/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.61, 7.61, 7.61); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 25 LTE/Side A 1 RB 49 Offset Ant 0 Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.99 W/kg


Band 25 LTE/Side A 1 RB 49 Offset Ant 0 Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.67 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.615 W/kg

Maximum value of SAR (measured) = 2.04 W/kg

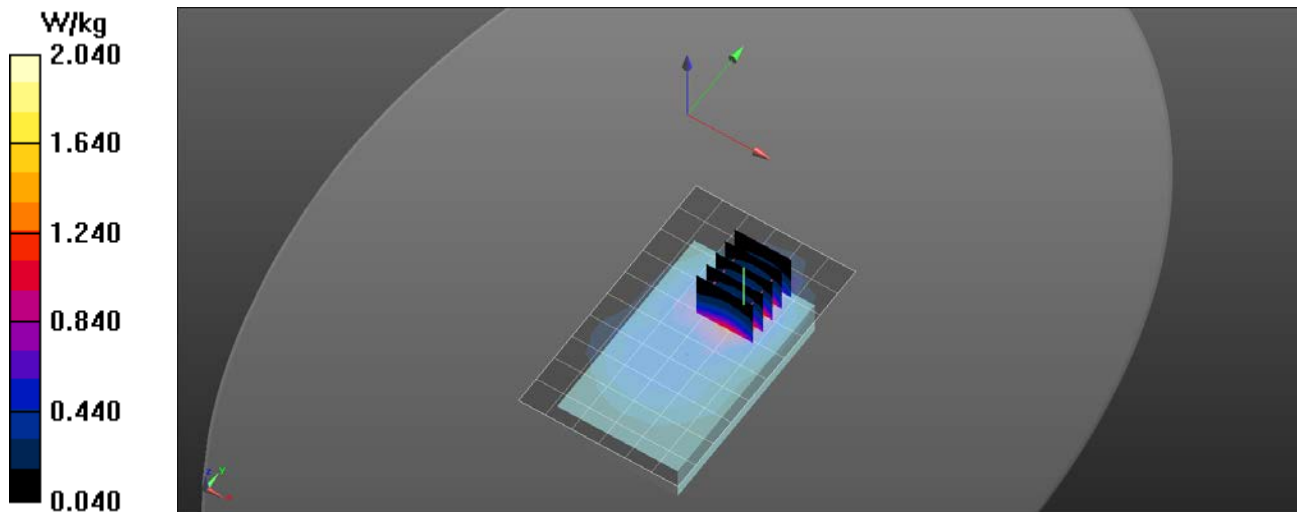

RF Exposure Lab

Plot 13

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: MSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/14/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.33, 7.33, 7.33); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 30 LTE/Side A 1 RB 24 Offset Ant 2 Mid/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.05 W/kg


Band 30 LTE/Side A 1 RB 24 Offset Ant 2 Mid/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm

Reference Value = 4.858 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

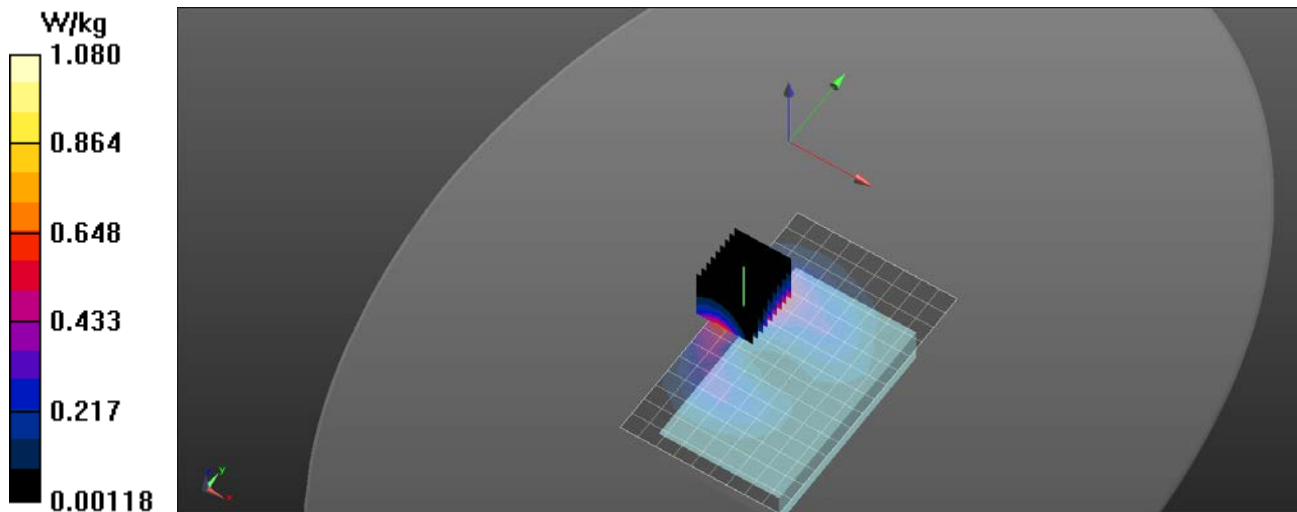

RF Exposure Lab

Plot 14

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2390 MHz; Duty Cycle: 1:8.33681
Medium: MSL2300; Medium parameters used (extrapolated): $f = 2390$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 52.47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/14/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.33, 7.33, 7.33); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 40 LTE/Side A 1 RB 49 Offset Ant 2 High/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.48 W/kg

Band 40 LTE/Side A 1 RB 49 Offset Ant 2 High/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm


Reference Value = 6.025 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.482 W/kg

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.63 W/kg

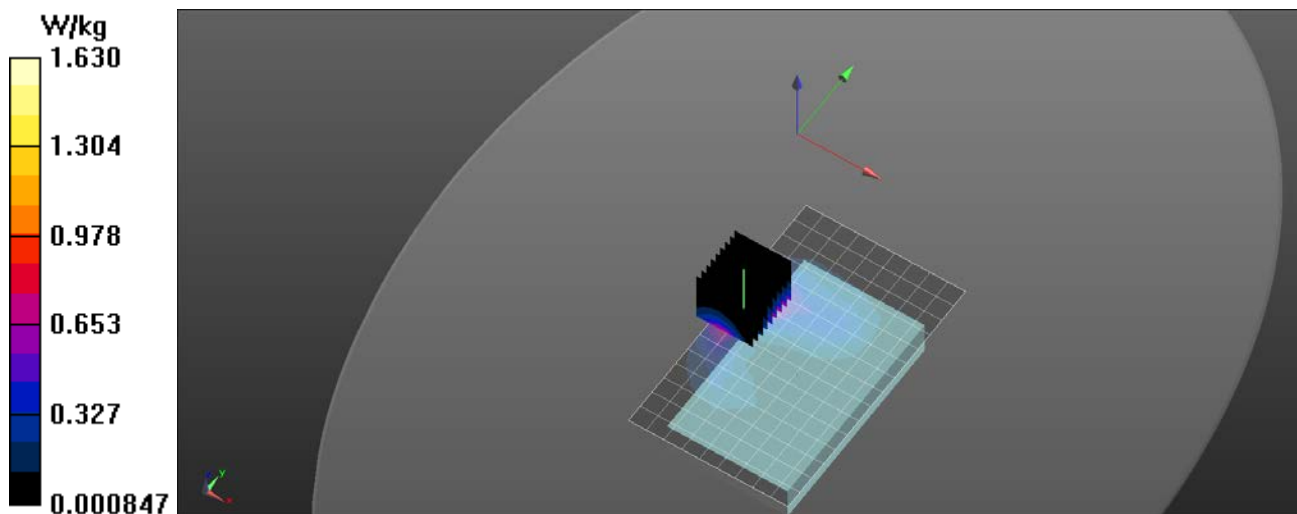

RF Exposure Lab

Plot 15

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: MSL2550; Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.1$ S/m; $\epsilon_r = 52.495$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/9/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.15, 7.15, 7.15); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 7 LTE Final/Side A 50 RB 24 Offset Ant 2 Mid/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.92 W/kg

Band 7 LTE Final/Side A 50 RB 24 Offset Ant 2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.825 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.31 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.98 W/kg

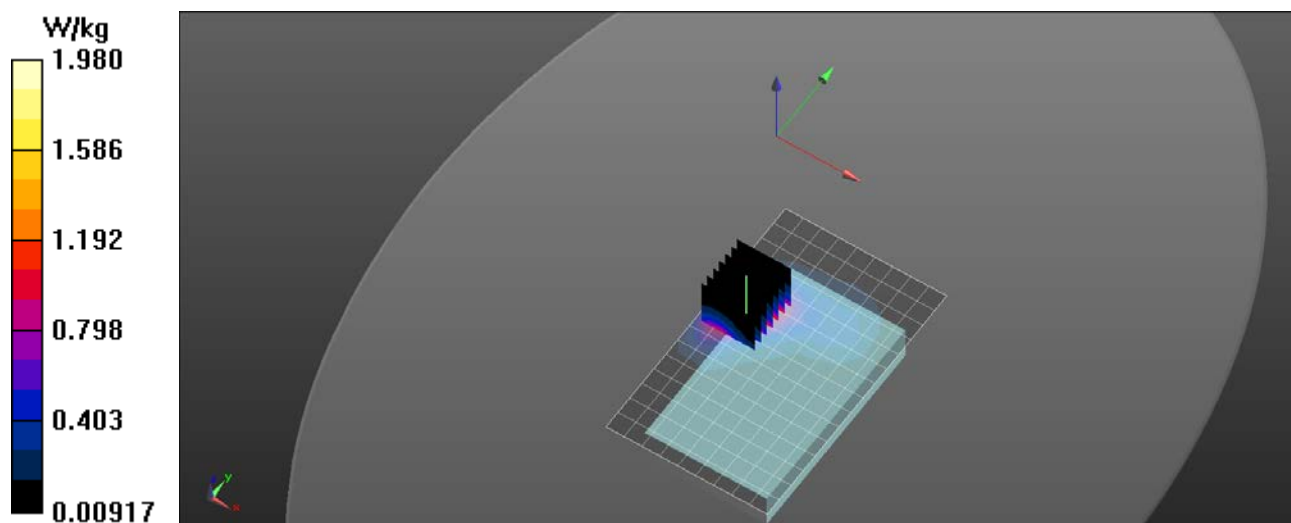

RF Exposure Lab

Plot 16

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681
Medium: MSL2550; Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.186$ S/m; $\epsilon_r = 52.097$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/25/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.15, 7.15, 7.15); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 41 LTE/Side A 1 RB 49 Offset Ant 2 Mid/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.05 W/kg

Band 41 LTE/Side A 1 RB 49 Offset Ant 2 Mid/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm


Reference Value = 8.500 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 1.20 W/kg; SAR(10 g) = 0.575 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.28 W/kg

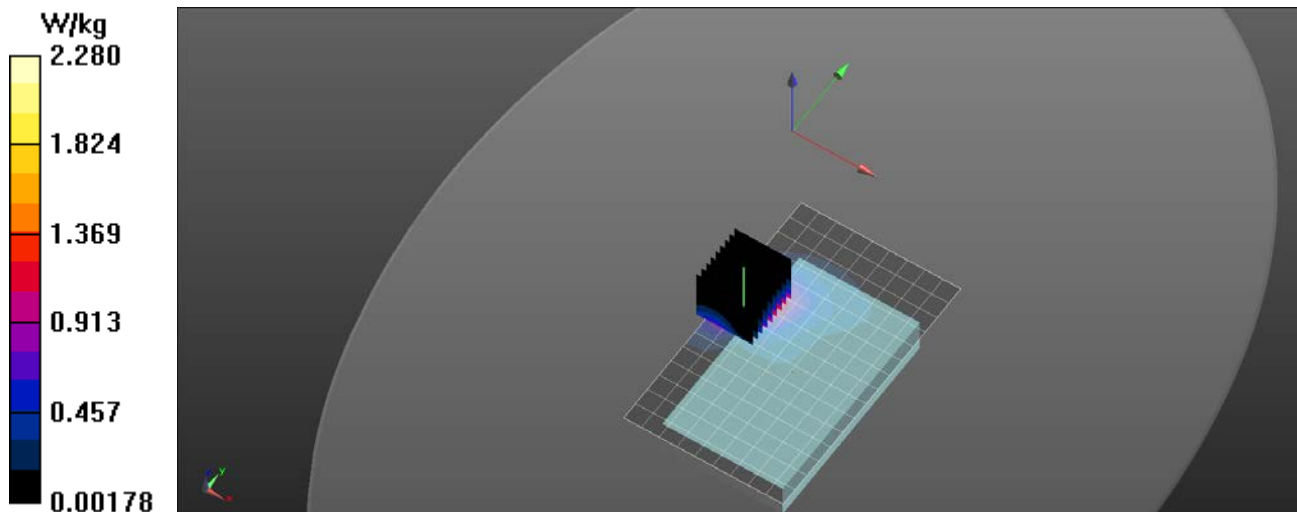

RF Exposure Lab

Plot 17

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3500 MHz; Duty Cycle: 1:8.33681
Medium: MSL 3-6 GHz; Medium parameters used: $f = 3500$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 51.11$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 2/25/2019; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7, 7, 7); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 42 LTE/Side A 1 RB 49 Offset Ant 2 Mid/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.590 W/kg


Band 42 LTE/Side A 1 RB 49 Offset Ant 2 Mid/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm

Reference Value = 6.230 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

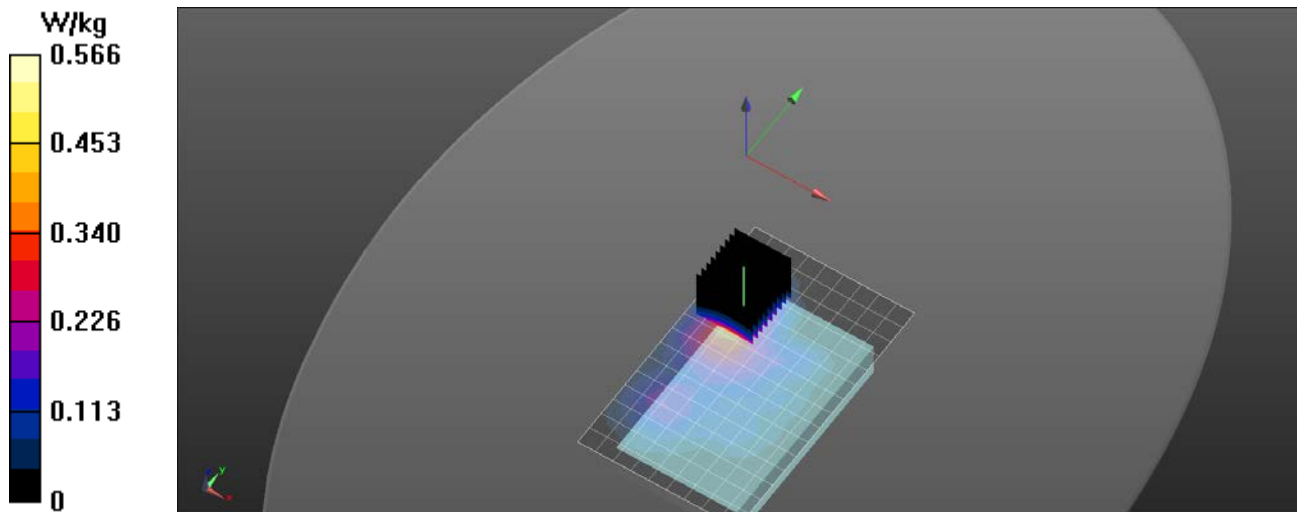

RF Exposure Lab

Plot 18

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 3625 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 3625$ MHz; $\sigma = 3.485$ S/m; $\epsilon_r = 51.045$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/11/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(6.71, 6.71, 6.71); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Band 48 LTE/Side A 1 RB 49 Offset Ant 4 Mid2/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.516 W/kg

Band 48 LTE/Side A 1 RB 49 Offset Ant 4 Mid2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=4mm


Reference Value = 5.811 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.319 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.544 W/kg

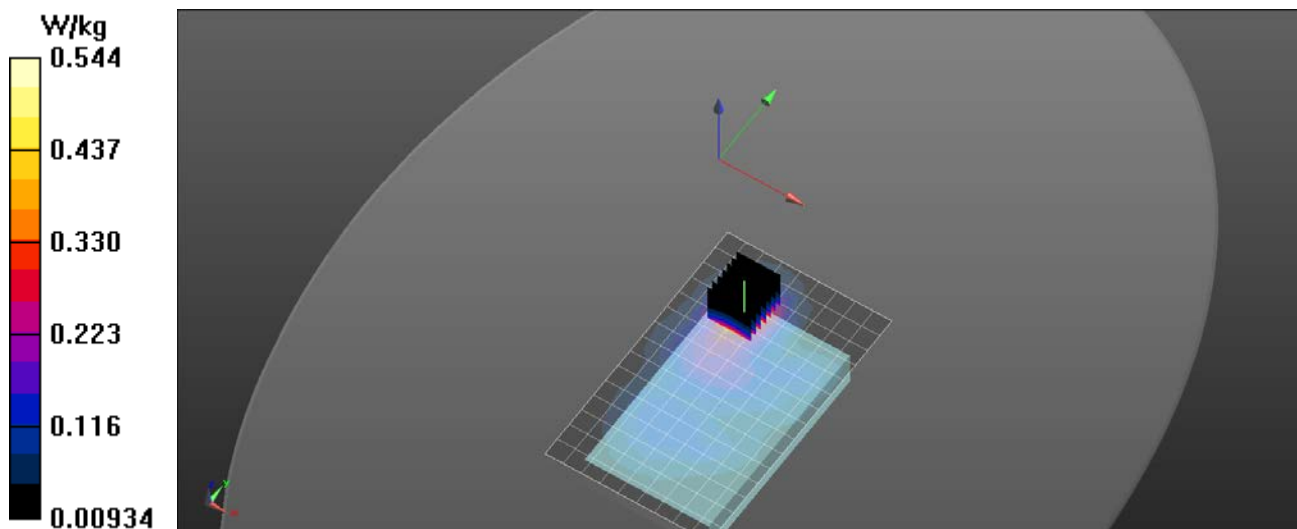

RF Exposure Lab

Plot 19

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: WiFi 802.11b (DSSS, 11 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: MSL2450; Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 52.796$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 7/2/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.29, 7.29, 7.29); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

2450 MHz/Side A Ant 1Mid/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.343 W/kg

2450 MHz/Side A Ant 1Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.066 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.257 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.357 W/kg

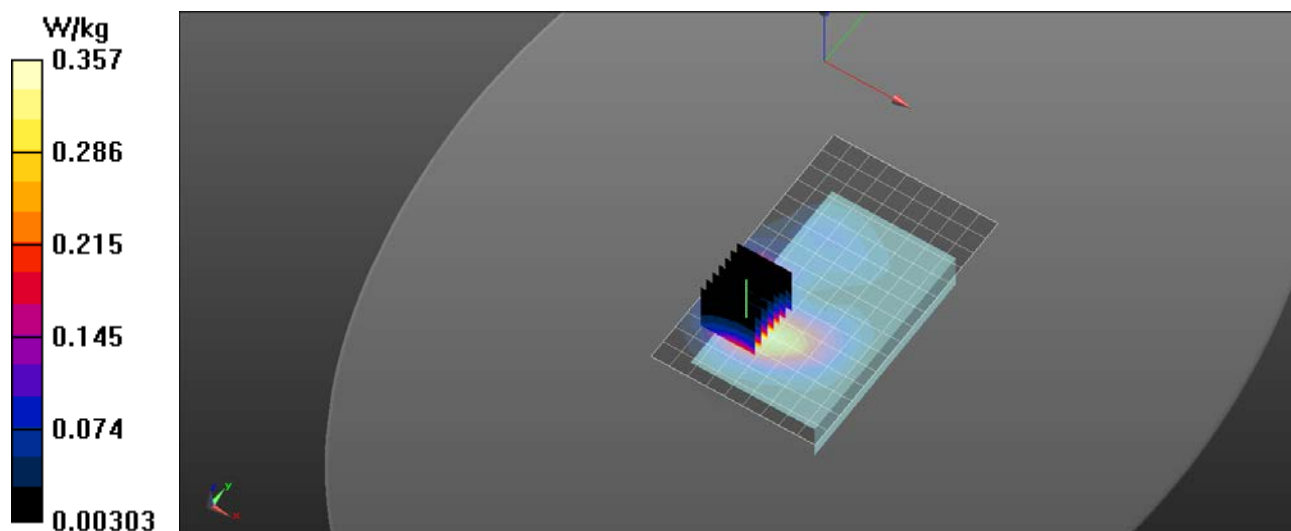

RF Exposure Lab

Plot 20

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 49.11$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 6/28/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(4.46, 4.46, 4.46); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5200 MHz/Side B Ant 0 40/Area Scan (7x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.942 W/kg

5200 MHz/Side B Ant 0 40/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.305 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.10 W/kg
SAR(1 g) = 0.547 W/kg
Maximum value of SAR (measured) = 1.06 W/kg

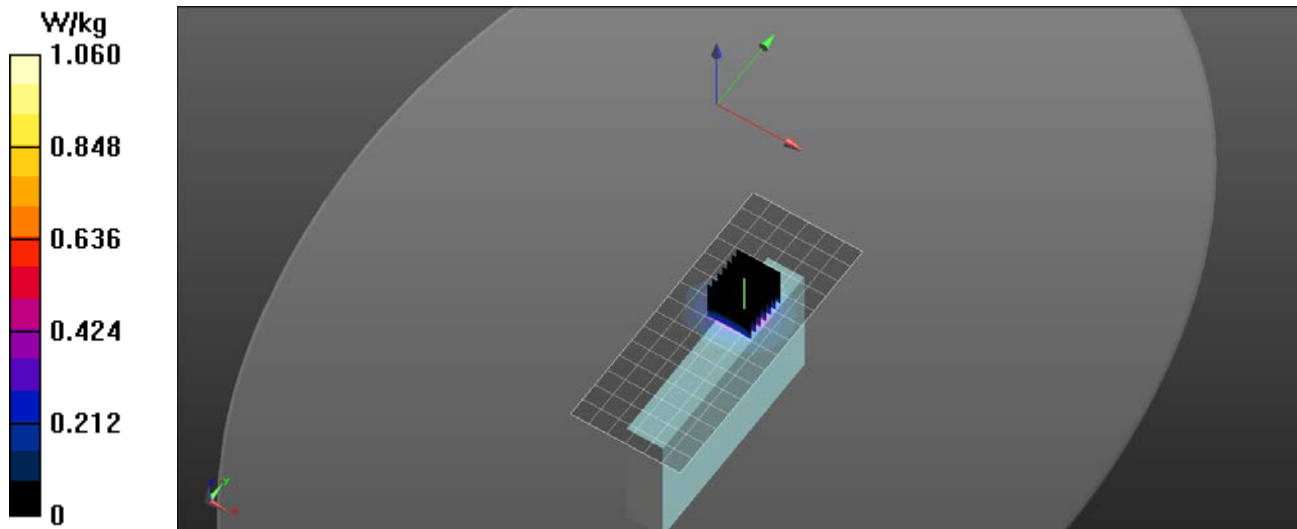

RF Exposure Lab

Plot 21

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: WiFi 802.11a (OFDM, 6 Mbps); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: MSL 3-6 GHz; Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.975$ S/m; $\epsilon_r = 48.193$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 6/28/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(4.08, 4.08, 4.08); Calibrated: 4/20/2018;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1321; Calibrated: 1/10/2018
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

5800 MHz/Side B Ant 0 157/Area Scan (7x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.35 W/kg

5800 MHz/Side B Ant 0 157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.62 W/kg

SAR(1 g) = 1.36 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.51 W/kg

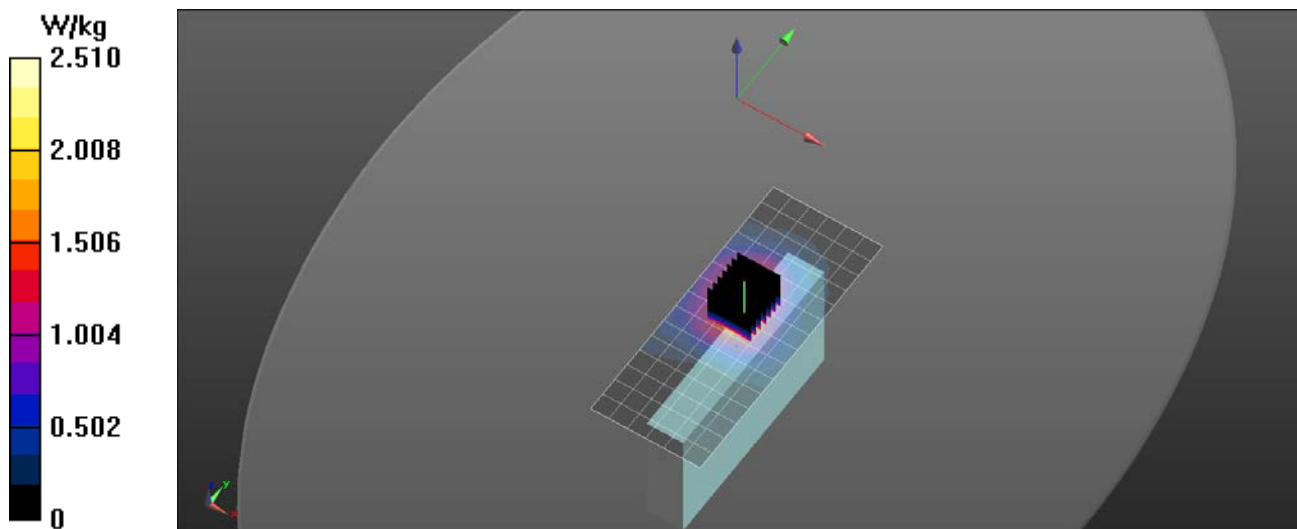

RF Exposure Lab

Plot 22

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.05$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/26/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.55, 9.55, 9.55); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Multi Band Result:

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.788 W/kg
Maximum value of SAR (interpolated) = 1.77 W/kg

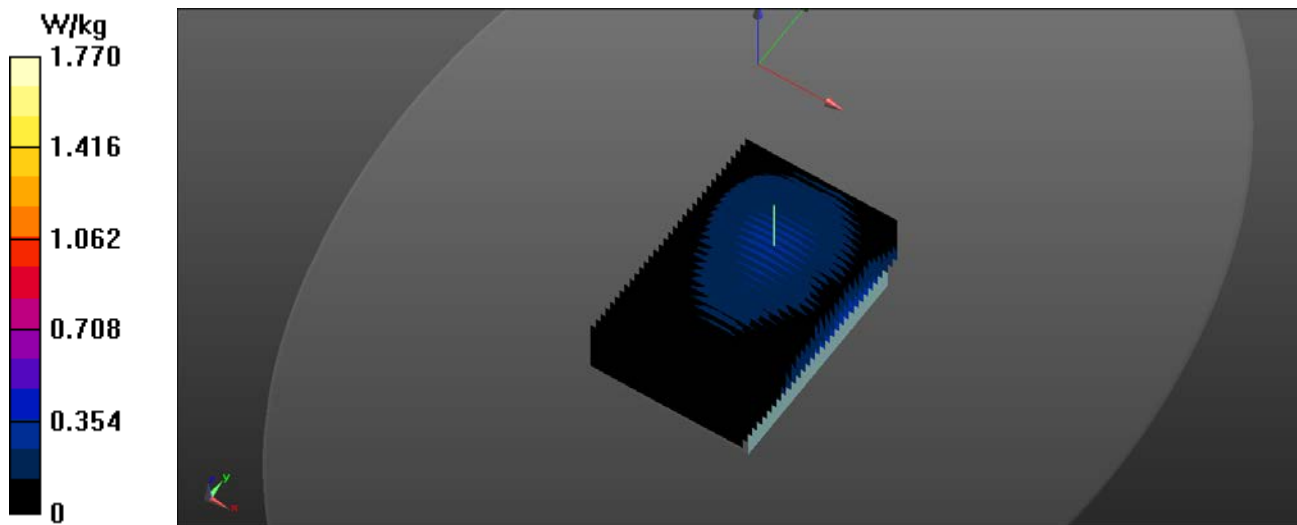

RF Exposure Lab

Plot 23

DUT: MIFI8000; Type: Hotspot; Serial: 67

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 53.316$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 7/26/2018; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.55, 9.55, 9.55); Calibrated: 8/18/2017;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/21/2017
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

Procedure Notes:

Multi Band Result:

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.702 W/kg
Maximum value of SAR (interpolated) = 1.76 W/kg

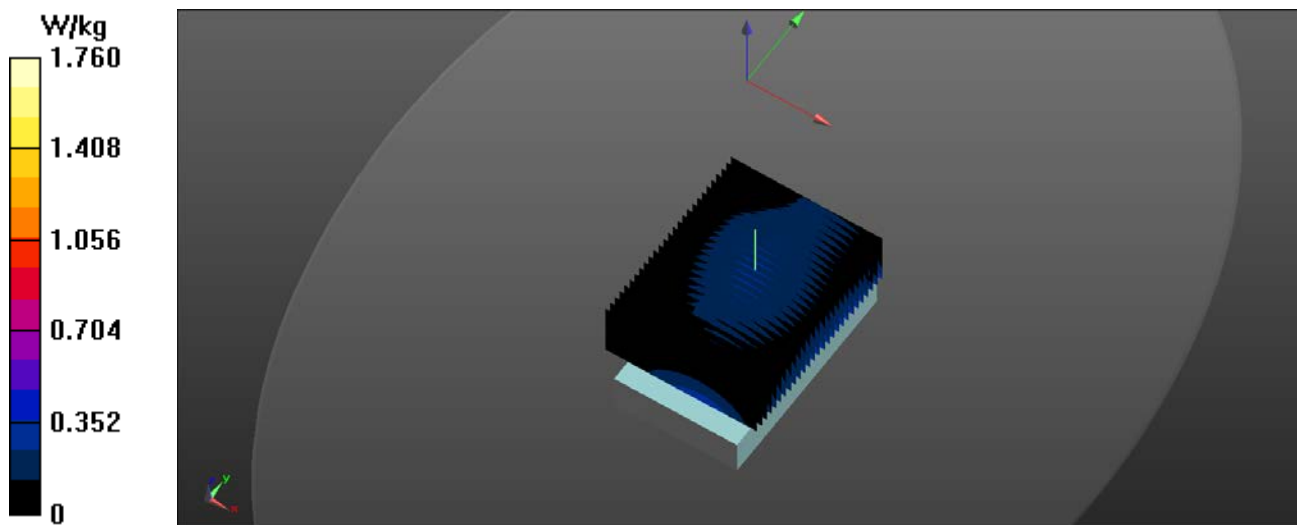

Appendix C – SAR Test Setup Photos

Appendix D – Probe Calibration Data Sheets

gm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **EX3-3662_Apr18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3662**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 20, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 20, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3662

Manufactured: October 20, 2008
Calibrated: April 20, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.44	0.45	0.48	$\pm 10.1 \%$
DCP (mV) ^B	102.6	97.6	96.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	136.8	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		132.2	
		Z	0.0	0.0	1.0		148.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	9.80	9.80	9.80	0.43	0.90	± 12.0 %
900	41.5	0.97	9.29	9.29	9.29	0.40	0.91	± 12.0 %
1750	40.1	1.37	8.29	8.29	8.29	0.29	0.84	± 12.0 %
1900	40.0	1.40	8.01	8.01	8.01	0.37	0.80	± 12.0 %
2300	39.5	1.67	7.71	7.71	7.71	0.35	0.80	± 12.0 %
2450	39.2	1.80	7.39	7.39	7.39	0.28	0.91	± 12.0 %
2600	39.0	1.96	7.14	7.14	7.14	0.36	0.85	± 12.0 %
3500	37.9	2.91	7.08	7.08	7.08	0.25	1.20	± 13.1 %
3700	37.7	3.12	6.99	6.99	6.99	0.25	1.20	± 13.1 %
5250	35.9	4.71	5.04	5.04	5.04	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.81	4.81	4.81	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.89	4.89	4.89	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.62	9.62	9.62	0.37	0.98	± 12.0 %
900	55.0	1.05	9.21	9.21	9.21	0.44	0.84	± 12.0 %
1750	53.4	1.49	7.96	7.96	7.96	0.45	0.80	± 12.0 %
1900	53.3	1.52	7.61	7.61	7.61	0.44	0.80	± 12.0 %
2300	52.9	1.81	7.33	7.33	7.33	0.41	0.80	± 12.0 %
2450	52.7	1.95	7.29	7.29	7.29	0.36	0.87	± 12.0 %
2600	52.5	2.16	7.15	7.15	7.15	0.26	0.99	± 12.0 %
3500	51.3	3.31	7.00	7.00	7.00	0.25	1.20	± 13.1 %
3700	51.0	3.55	6.71	6.71	6.71	0.23	1.20	± 13.1 %
5250	48.9	5.36	4.46	4.46	4.46	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.91	3.91	3.91	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.08	4.08	4.08	0.50	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

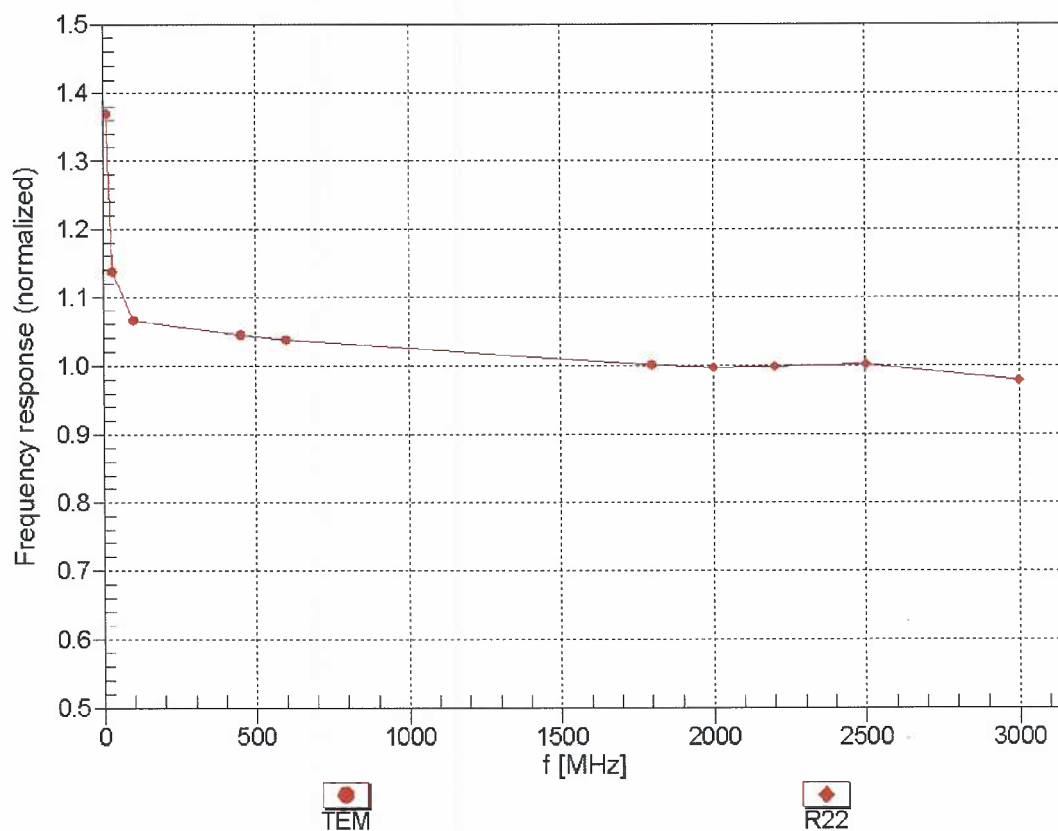



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


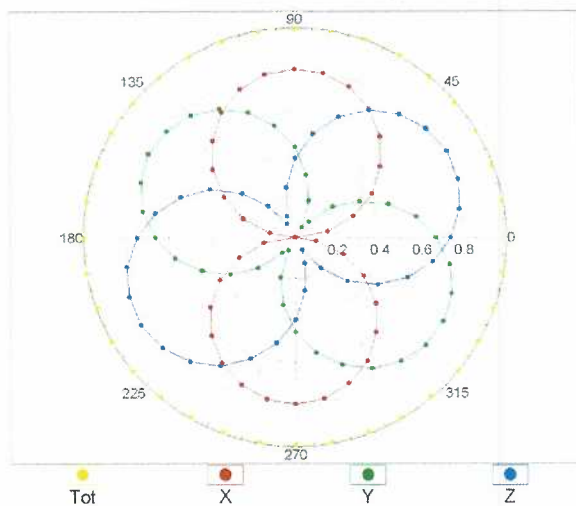


f=1800 MHz,R22

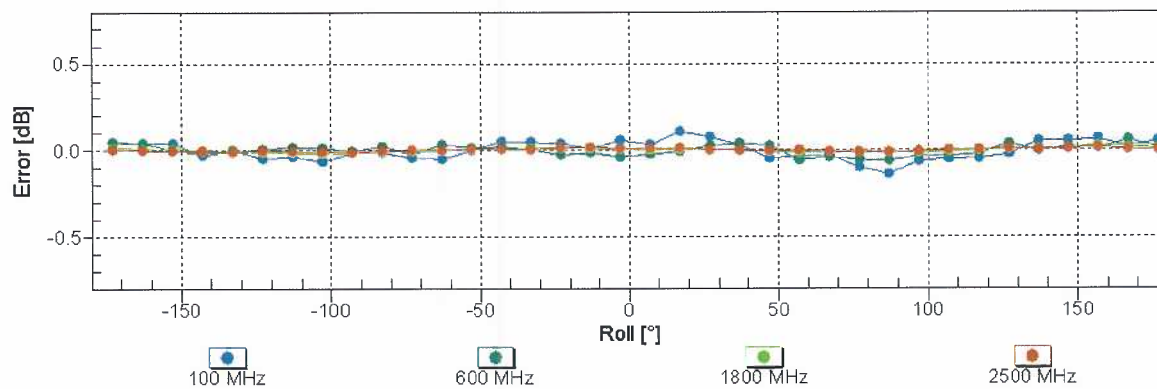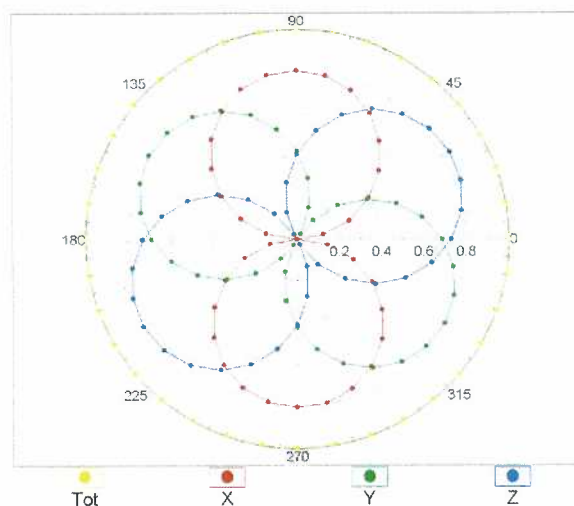


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

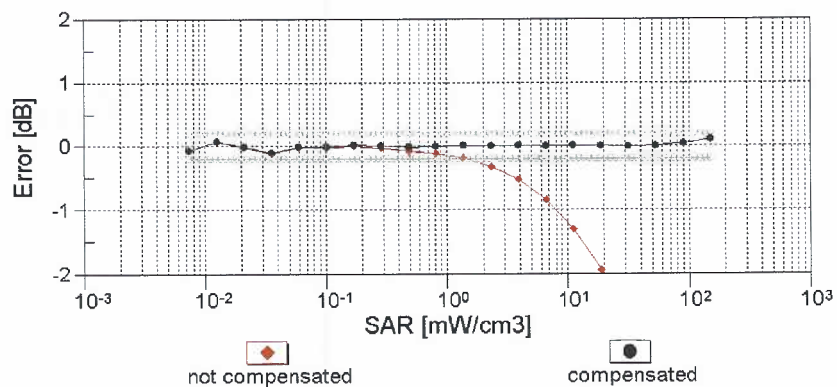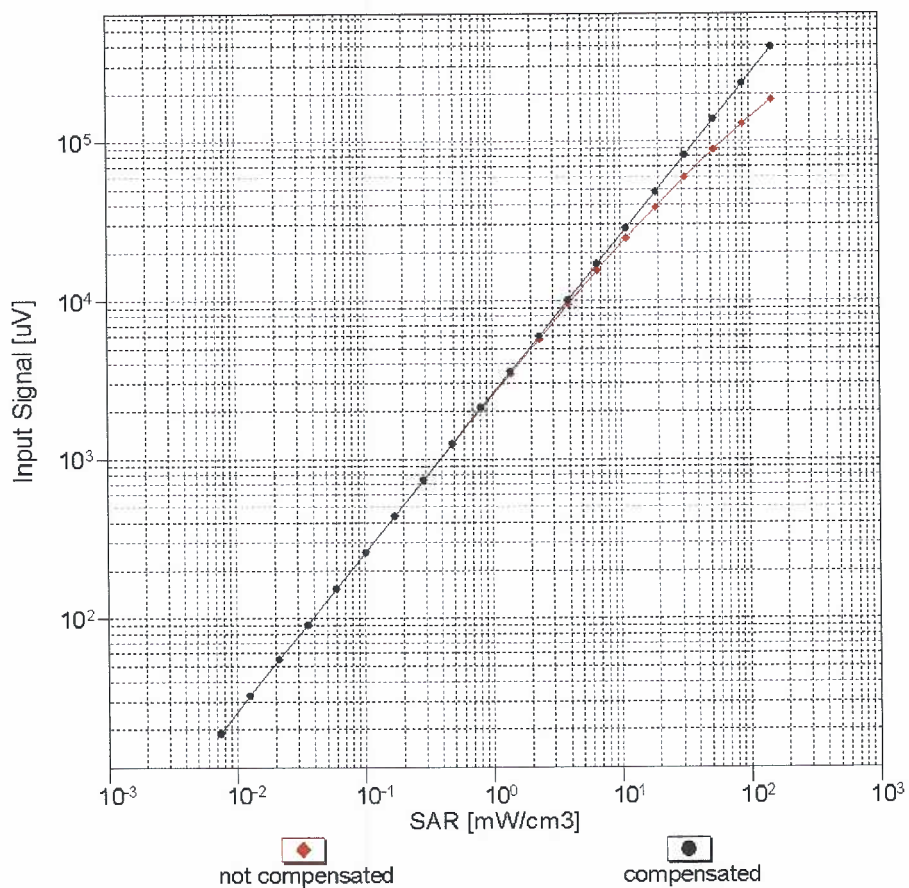



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

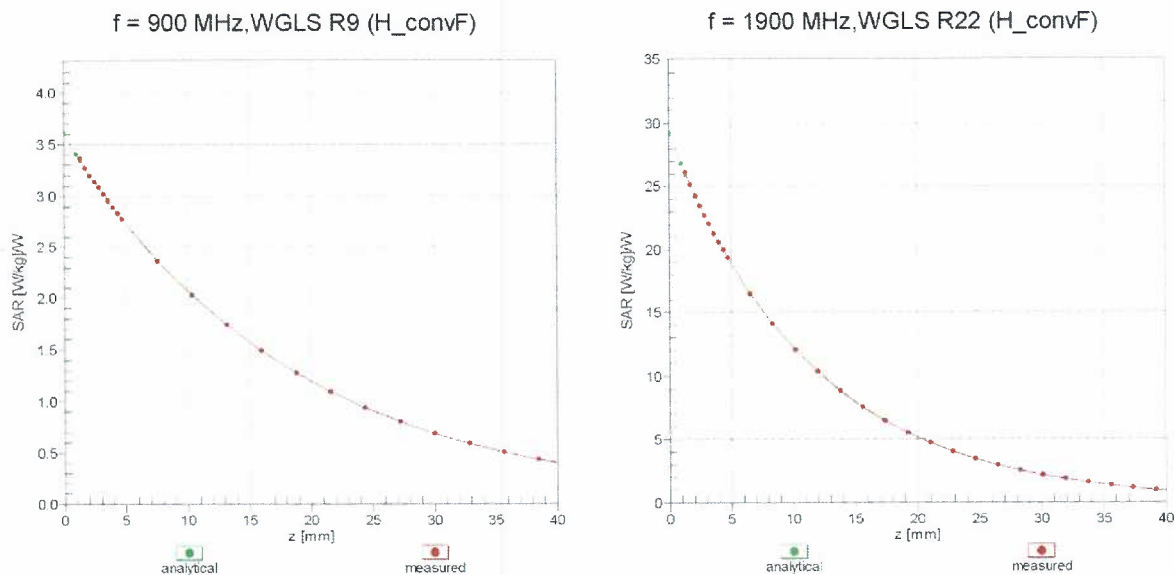

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), $f = 900 \text{ MHz}$

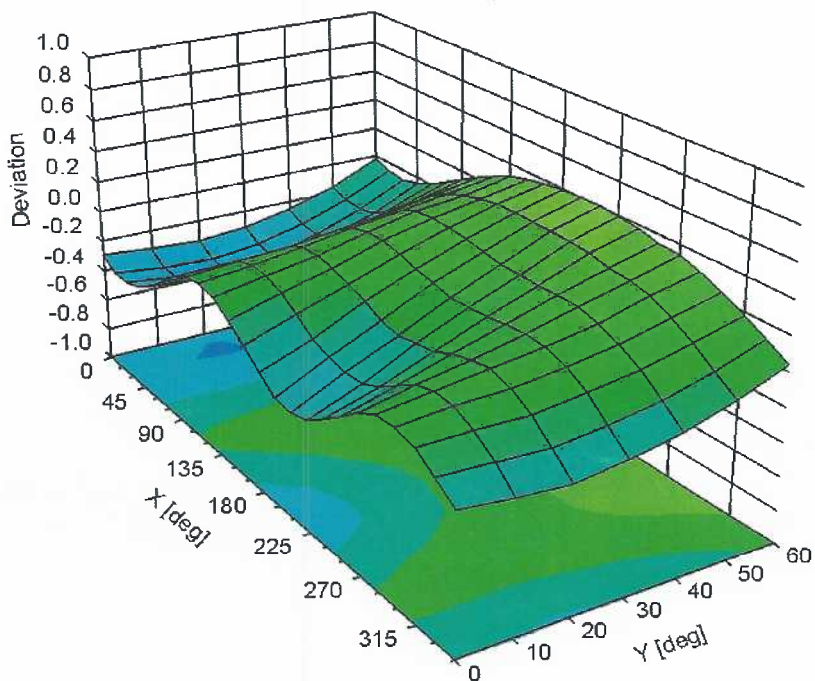

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3662

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-22.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **EX3-3693_Aug17**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3693**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**

Calibration date: **August 18, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: August 22, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3693

Manufactured: April 22, 2009
Calibrated: August 18, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.39	0.32	0.35	$\pm 10.1 \%$
DCP (mV) ^B	95.1	97.9	107.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	153.2	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		144.5	
		Z	0.0	0.0	1.0		151.4	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms} \cdot \text{V}^{-2}$	T2 $\text{ms} \cdot \text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	33.42	257.2	37.63	9.549	1.014	5.071	0	0.481	1.008
Y	36.13	269.4	35.53	11.22	0.702	5.041	0.308	0.41	1.005
Z	28.36	204.6	33.61	4.581	0.465	5.032	0.705	0.298	1.004

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
150	52.3	0.76	11.31	11.31	11.31	0.00	1.00	± 13.3 %
220	49.0	0.81	10.54	10.54	10.54	0.00	1.00	± 13.3 %
450	43.5	0.87	9.78	9.78	9.78	0.13	1.60	± 13.3 %
750	41.9	0.89	9.55	9.55	9.55	0.36	1.03	± 12.0 %
1750	40.1	1.37	8.15	8.15	8.15	0.28	0.85	± 12.0 %
1900	40.0	1.40	7.85	7.85	7.85	0.30	0.85	± 12.0 %
2300	39.5	1.67	7.44	7.44	7.44	0.38	0.85	± 12.0 %
2450	39.2	1.80	7.05	7.05	7.05	0.31	0.84	± 12.0 %
5200	36.0	4.66	5.09	5.09	5.09	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.83	4.83	4.83	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.85	4.85	4.85	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.70	4.70	4.70	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.65	4.65	4.65	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
150	61.9	0.80	10.76	10.76	10.76	0.00	1.00	± 13.3 %
220	60.2	0.86	10.08	10.08	10.08	0.00	1.00	± 13.3 %
450	56.7	0.94	10.19	10.19	10.19	0.10	1.30	± 13.3 %
750	55.5	0.96	9.35	9.35	9.35	0.50	0.85	± 12.0 %
1750	53.4	1.49	7.77	7.77	7.77	0.37	0.85	± 12.0 %
1900	53.3	1.52	7.54	7.54	7.54	0.30	0.96	± 12.0 %
2300	52.9	1.81	7.41	7.41	7.41	0.38	0.84	± 12.0 %
2450	52.7	1.95	7.26	7.26	7.26	0.34	0.89	± 12.0 %
5200	49.0	5.30	4.70	4.70	4.70	0.35	1.90	± 13.1 %
5300	48.9	5.42	4.46	4.46	4.46	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.04	4.04	4.04	0.40	1.90	± 13.1 %
5600	48.5	5.77	4.00	4.00	4.00	0.40	1.90	± 13.1 %
5800	48.2	6.00	4.21	4.21	4.21	0.40	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


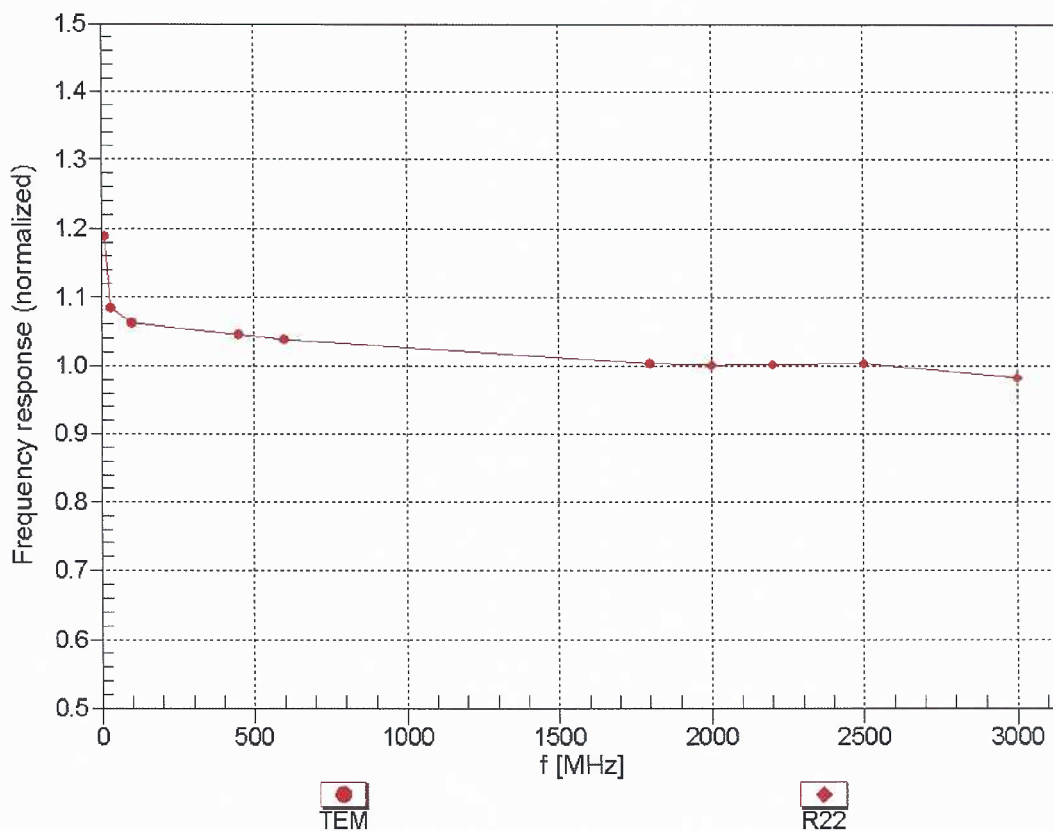


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

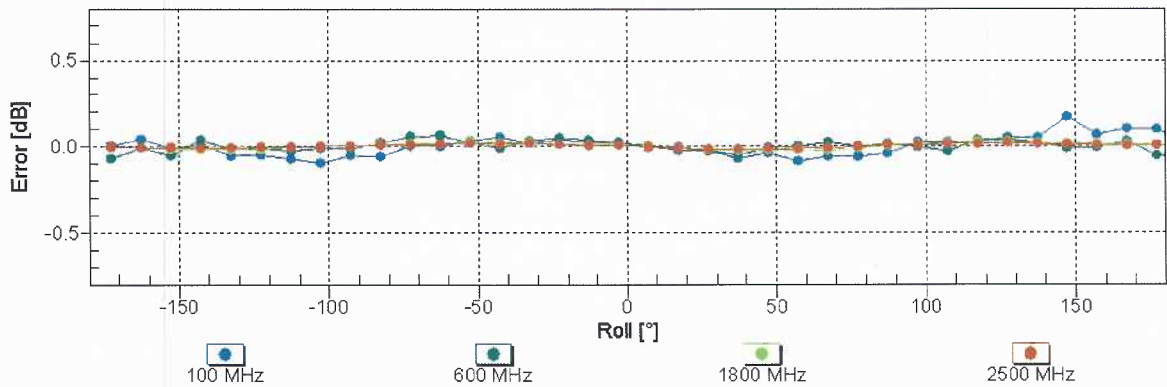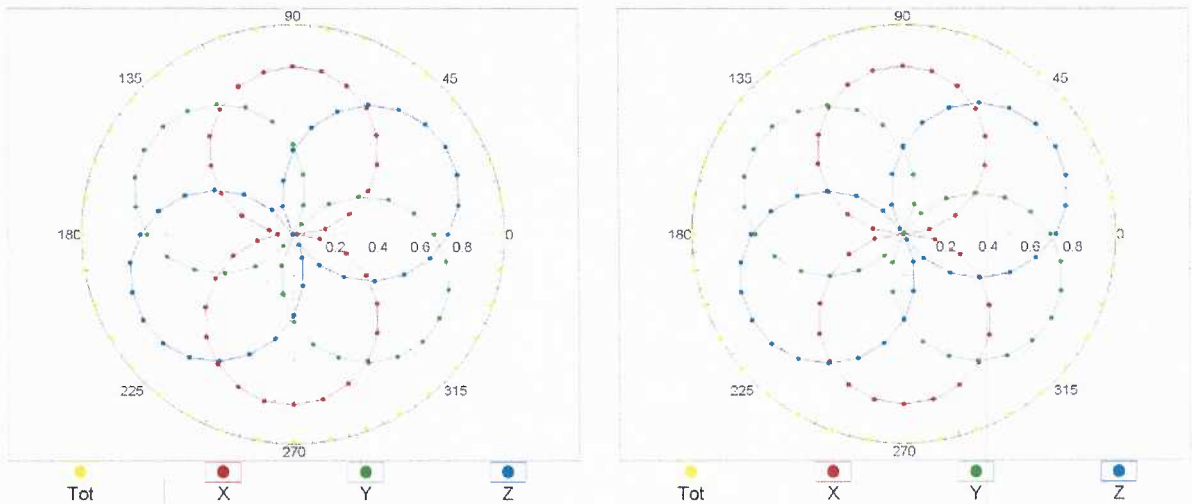


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

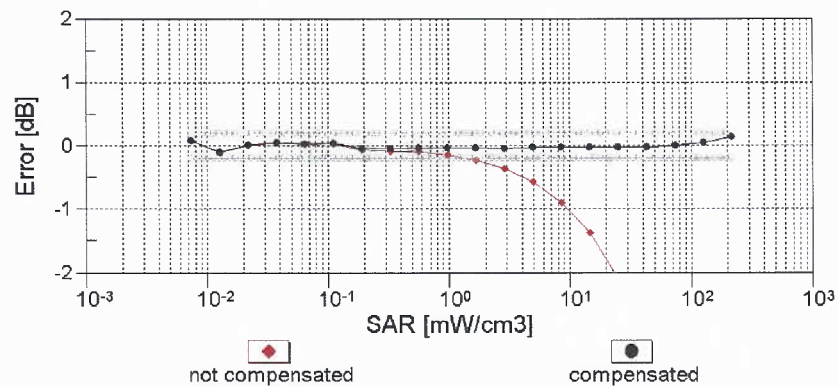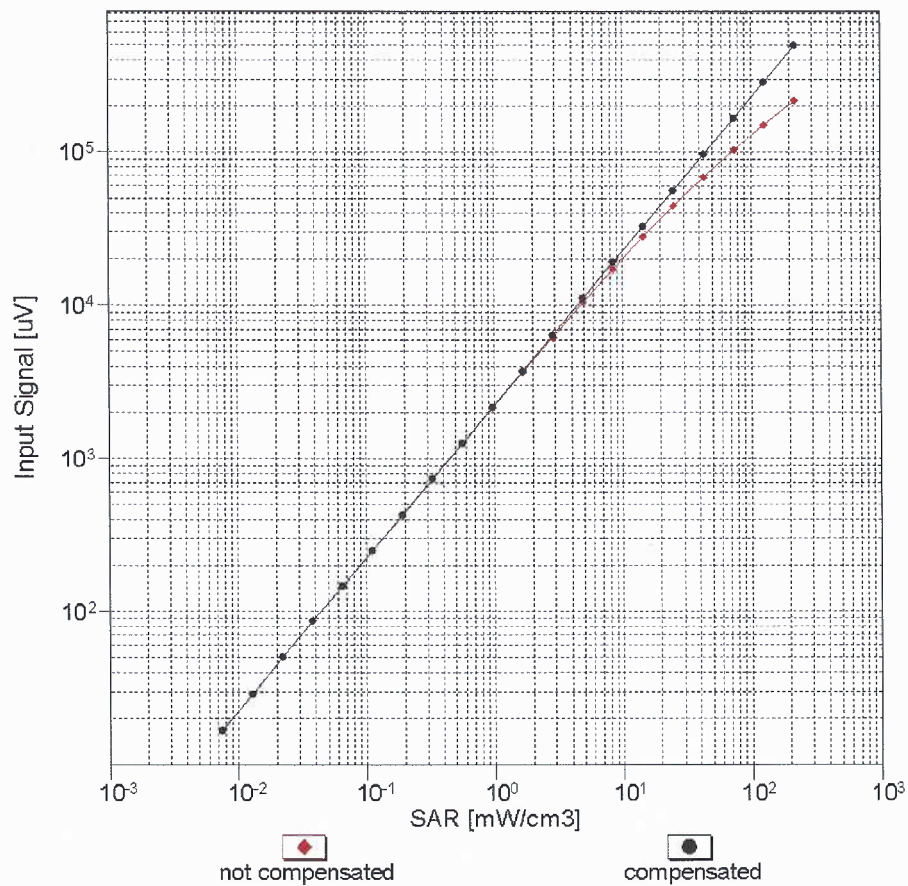



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

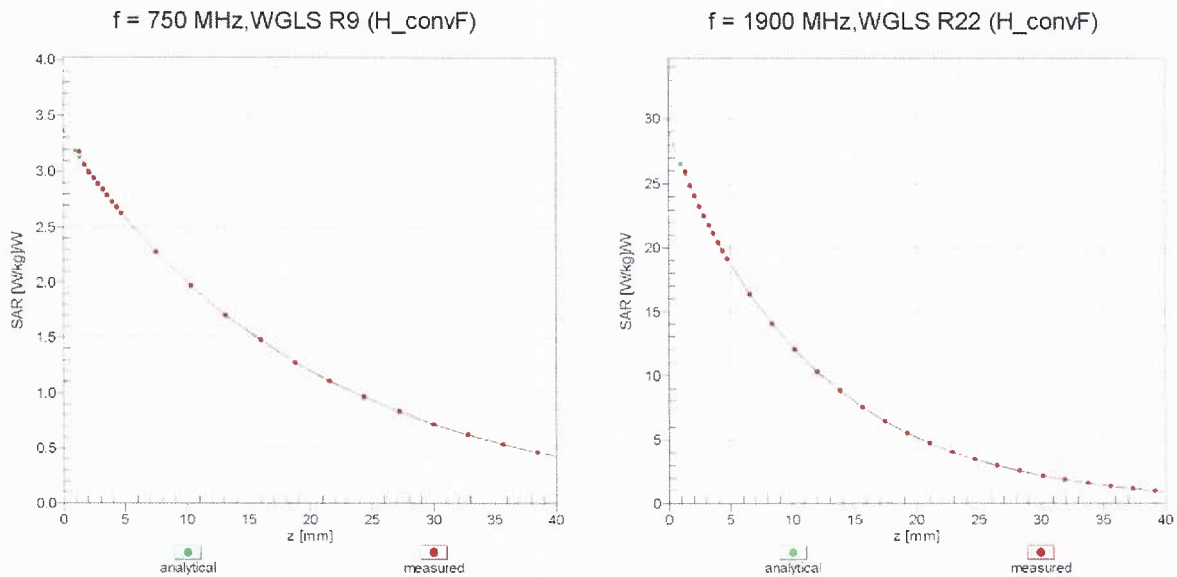

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

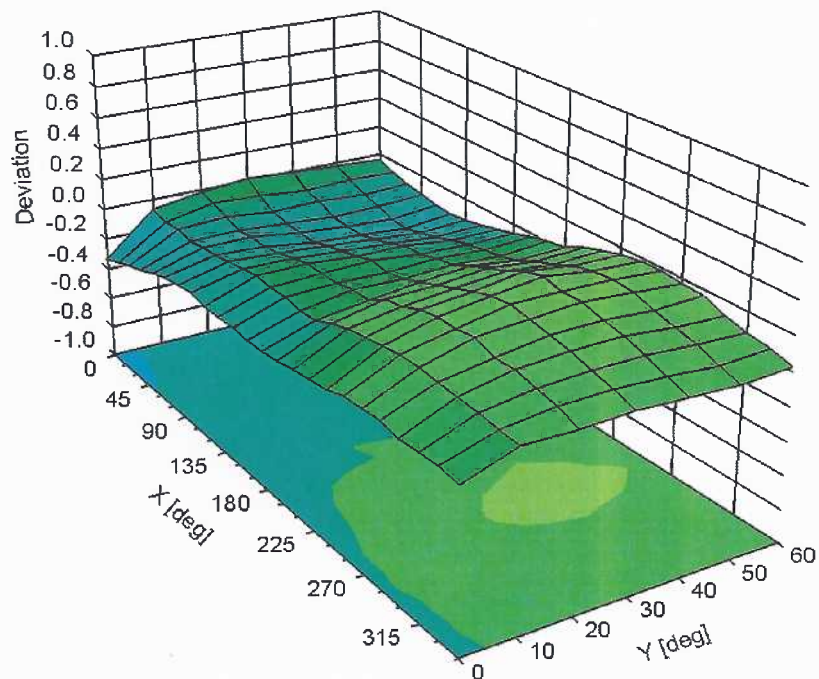

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	107.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm