


GFSK Middle Channel




GFSK High Channel

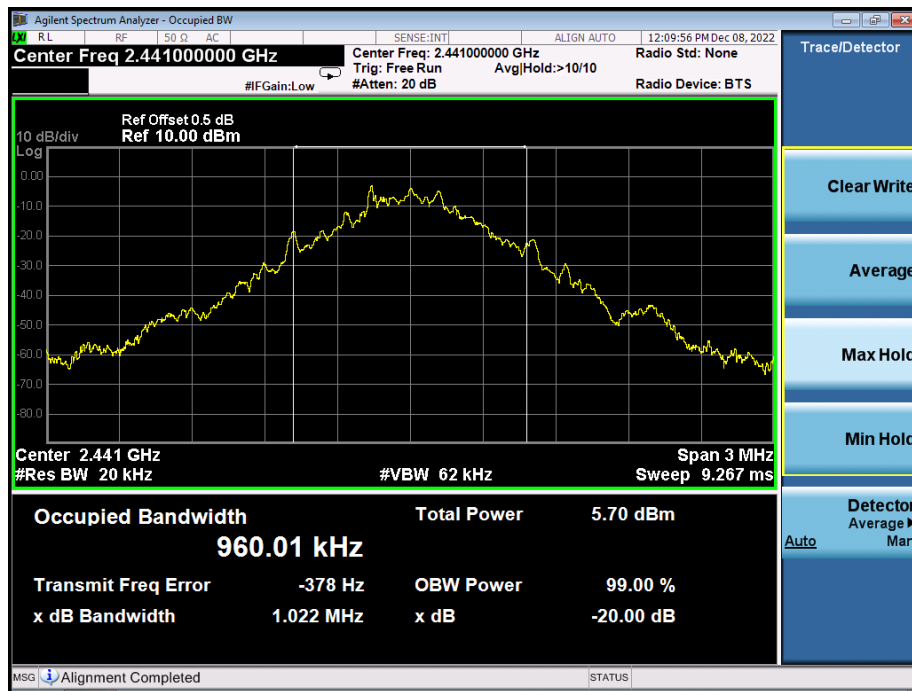


$\pi/4$ DQPSK Low Channel




$\pi/4$ DQPSK Middle Channel

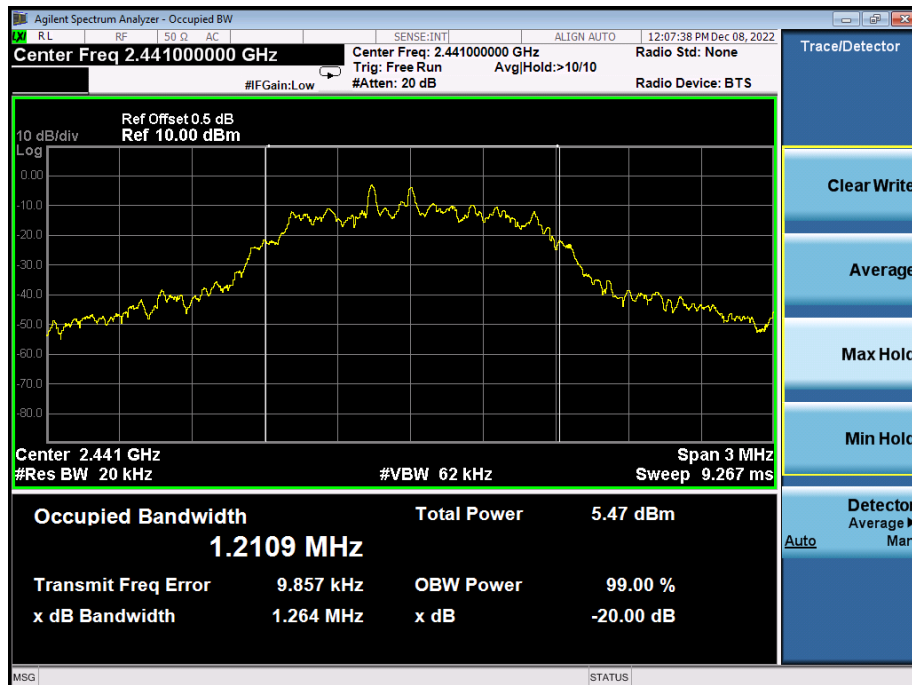

$\pi/4$ DQPSK High Channel

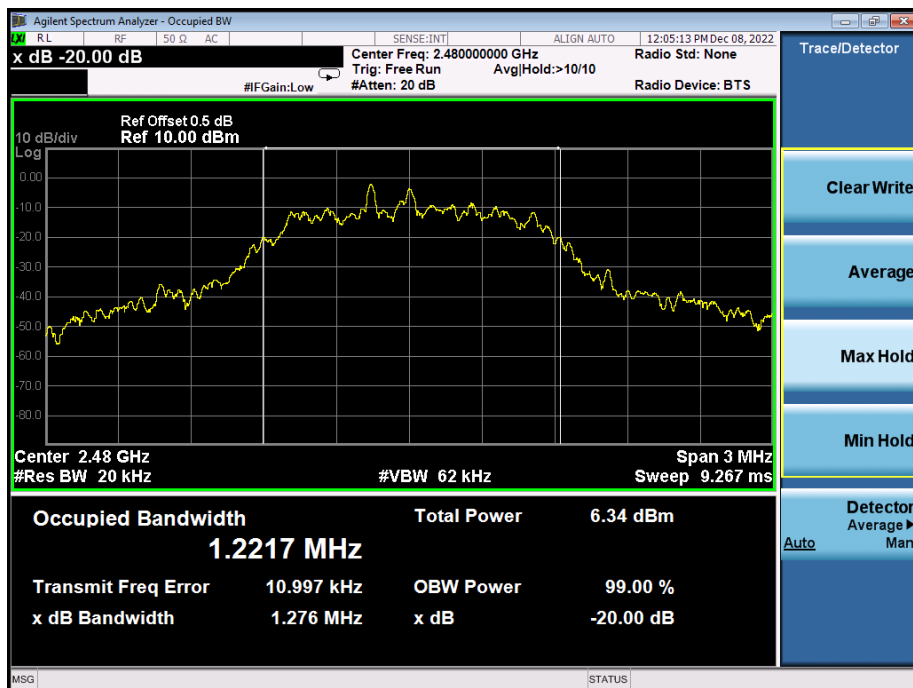


8DPSK Low Channel

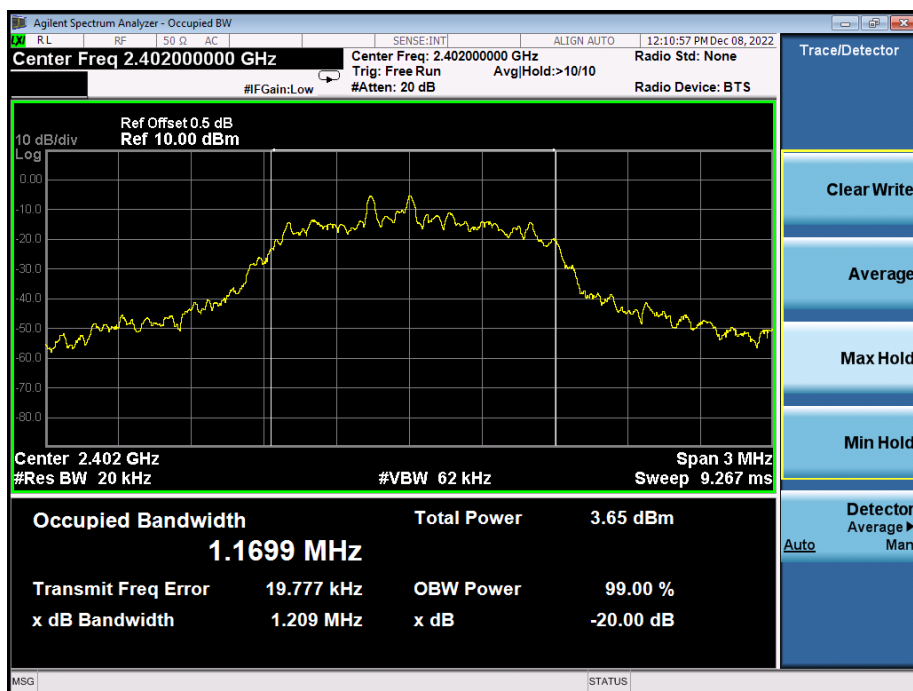

8DPSK Middle Channel




8DPSK High Channel

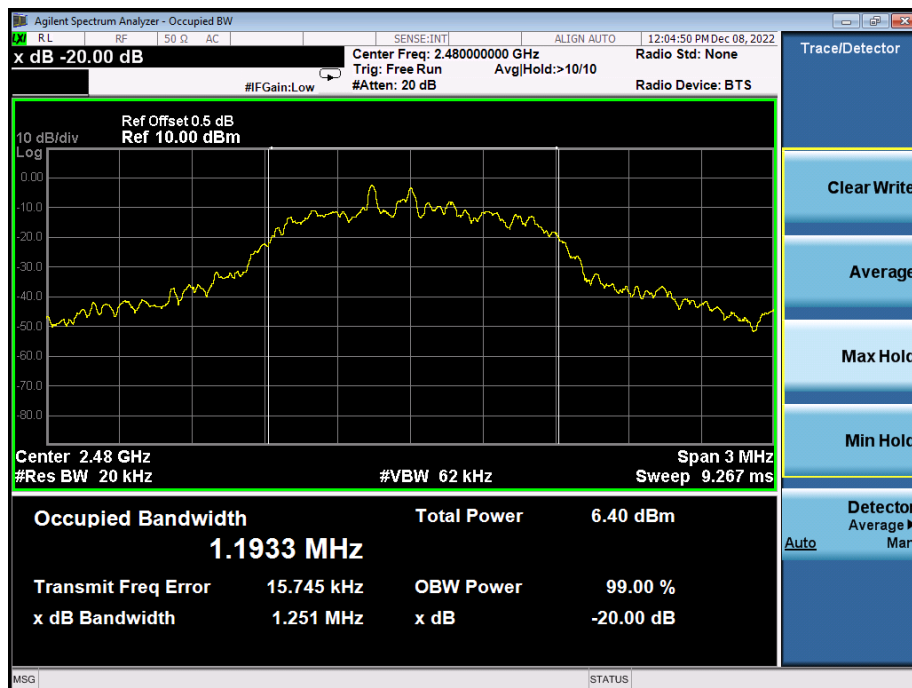

11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 10MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.4 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.7V

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-1.408	21
GFSK	Middle	0.153	21
GFSK	High	1.140	21
$\pi/4$ DQPSK	Low	-0.643	21
$\pi/4$ DQPSK	Middle	0.861	21
$\pi/4$ DQPSK	High	1.843	21
8DPSK	Low	-0.158	21
8DPSK	Middle	1.316	21
8DPSK	High	2.177	21


Test plots
GFSK Low Channel





GFSK Middle Channel

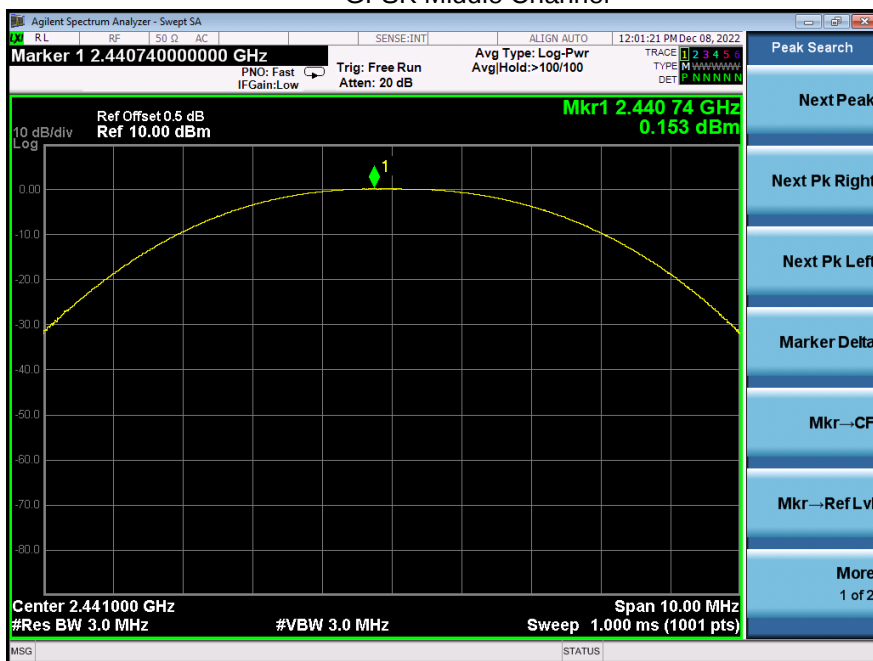


GFSK High Channel

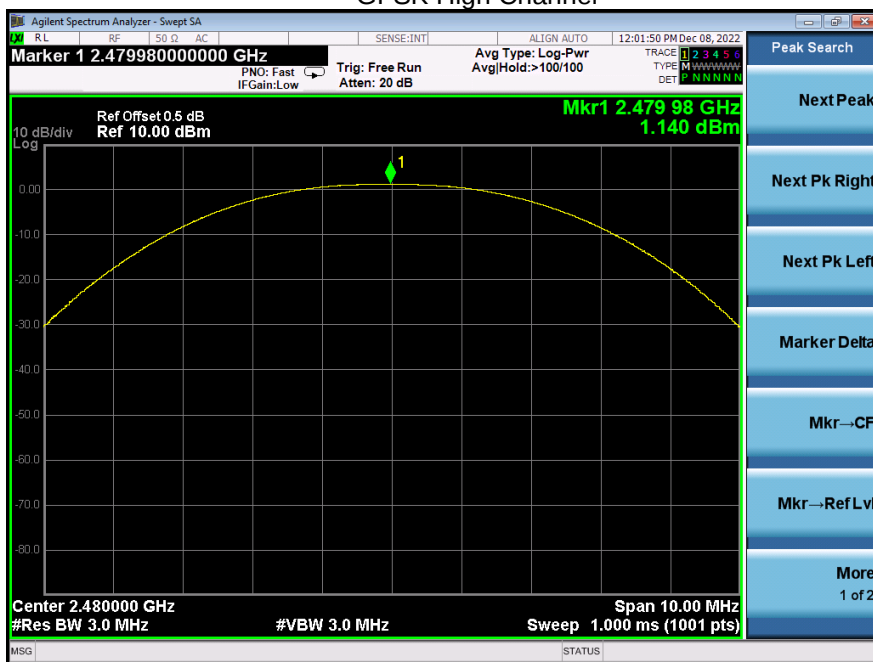


SHENZHEN

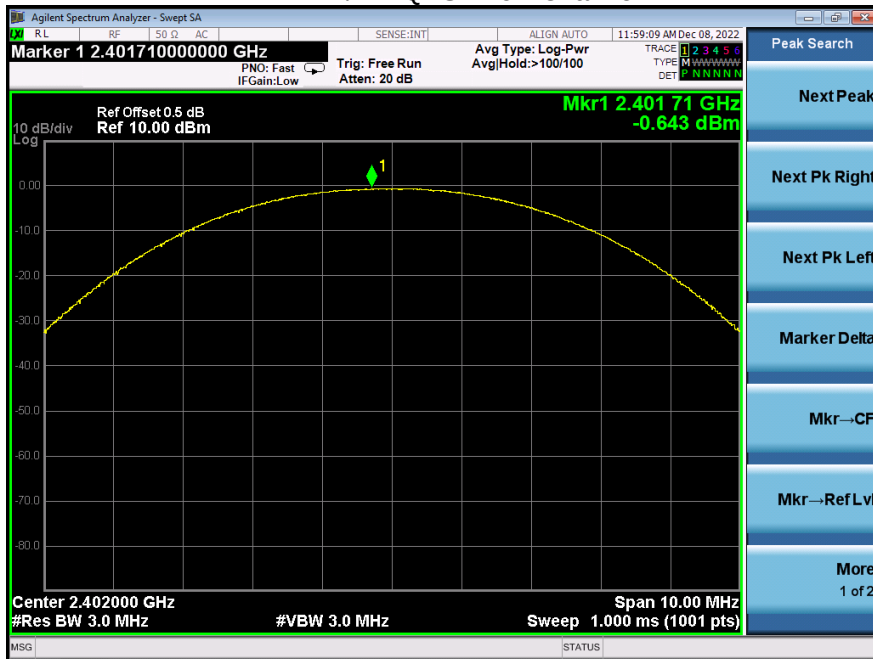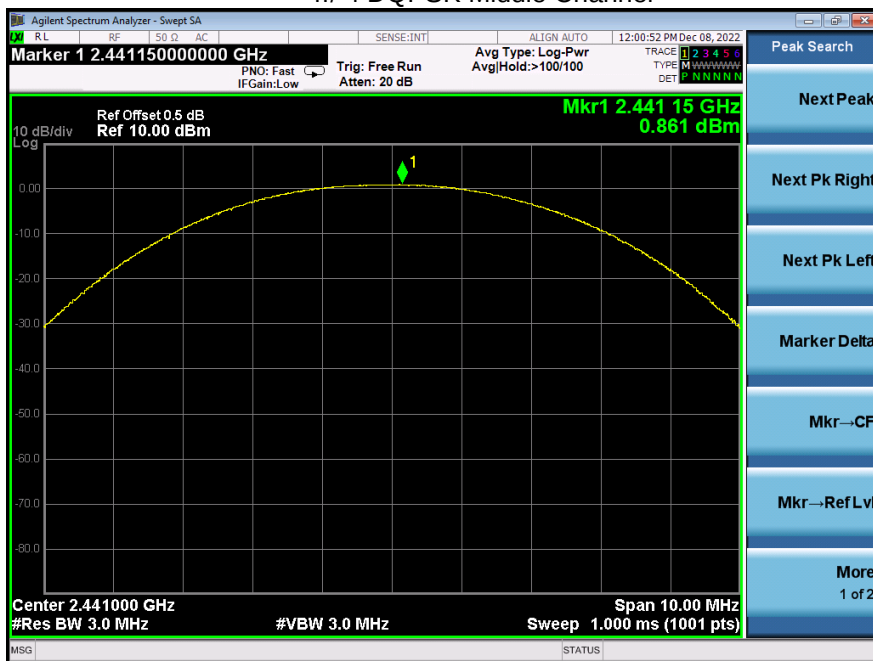$\pi/4$ DQPSK Low Channel

 $\pi/4$ DQPSK Middle Channel

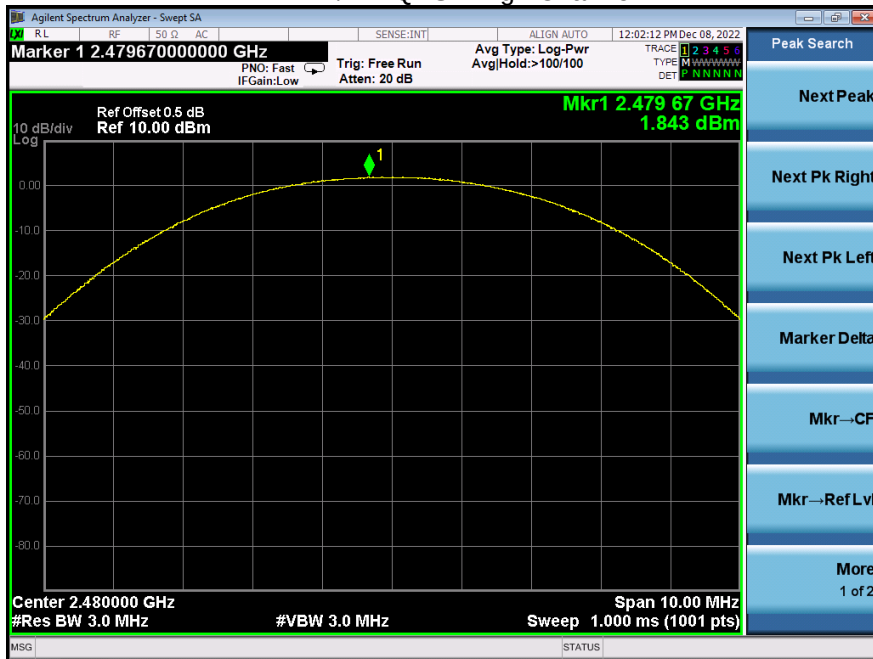
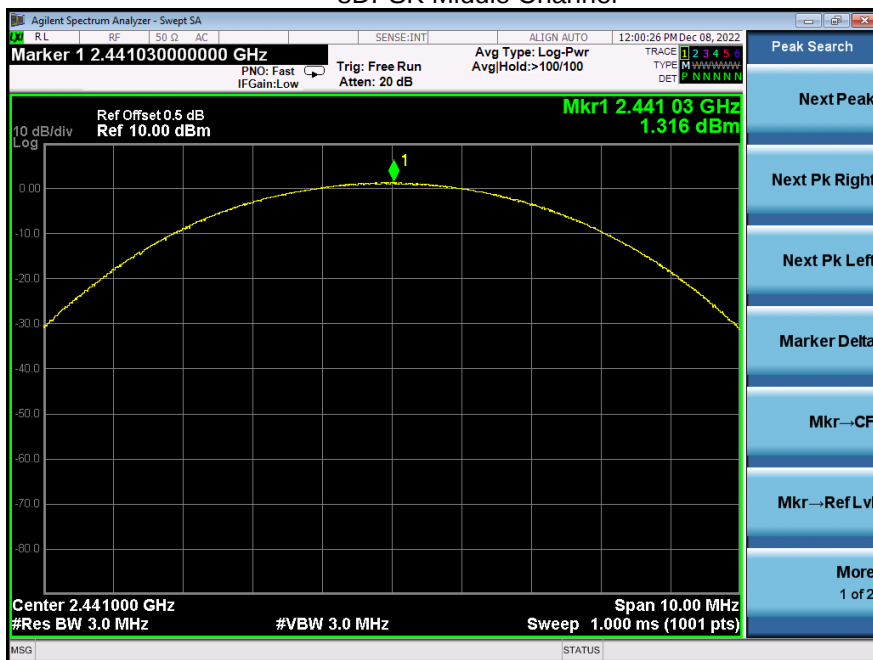
$\pi/4$ DQPSK High Channel

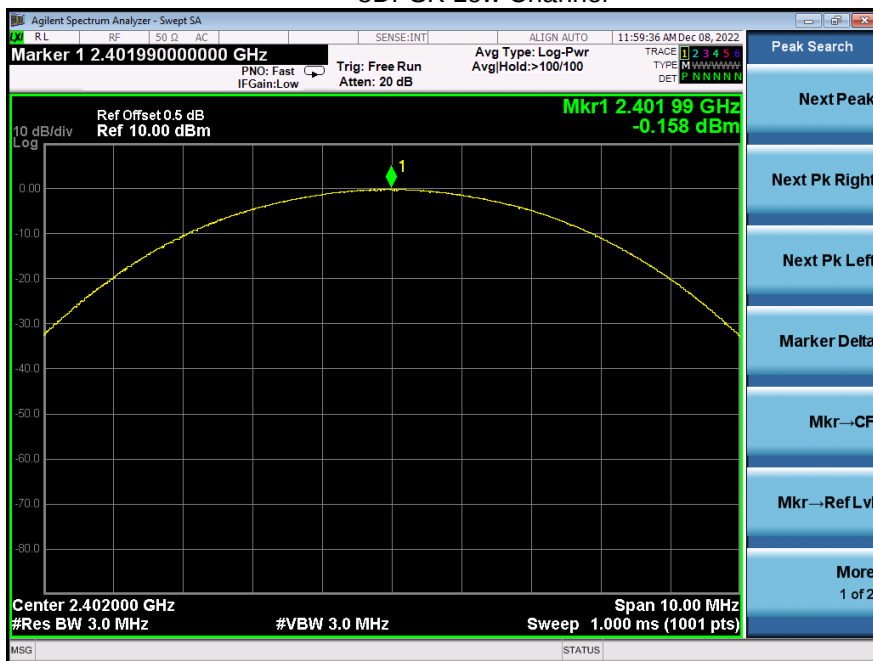


8DPSK Low Channel



8DPSK Middle Channel




8DPSK High Channel

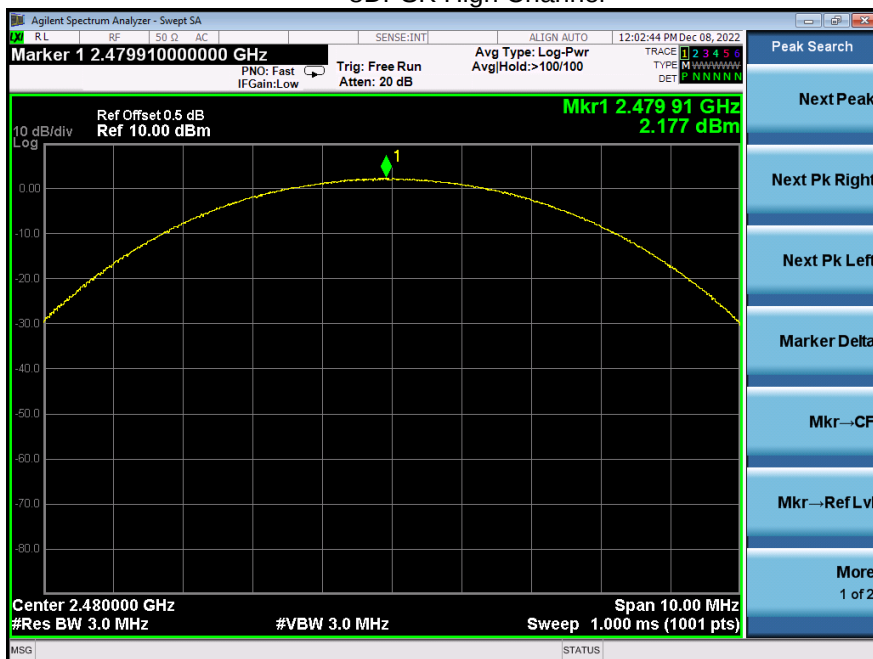

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.002	0.992	PASS
GFSK	Middle	0.994	0.681	PASS
GFSK	High	1.000	0.684	PASS
$\pi/4$ DQPSK	Low	1.002	0.828	PASS
$\pi/4$ DQPSK	Middle	0.998	0.843	PASS
$\pi/4$ DQPSK	High	0.998	0.851	PASS
8DPSK	Low	1.002	0.806	PASS
8DPSK	Middle	1.000	0.807	PASS
8DPSK	High	1.002	0.834	PASS

Test plots
GFSK Low Channel





GFSK Middle Channel




GFSK High Channel

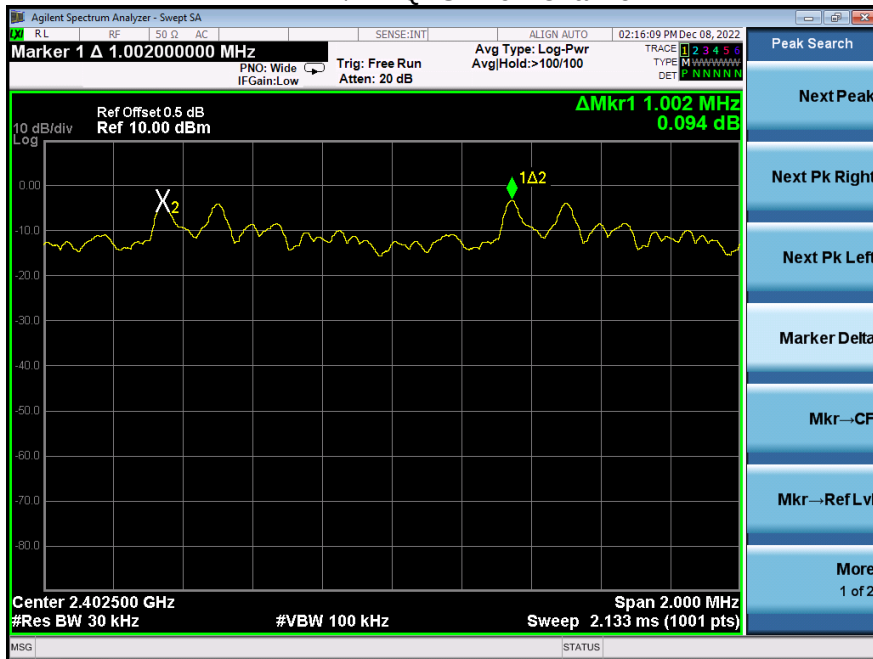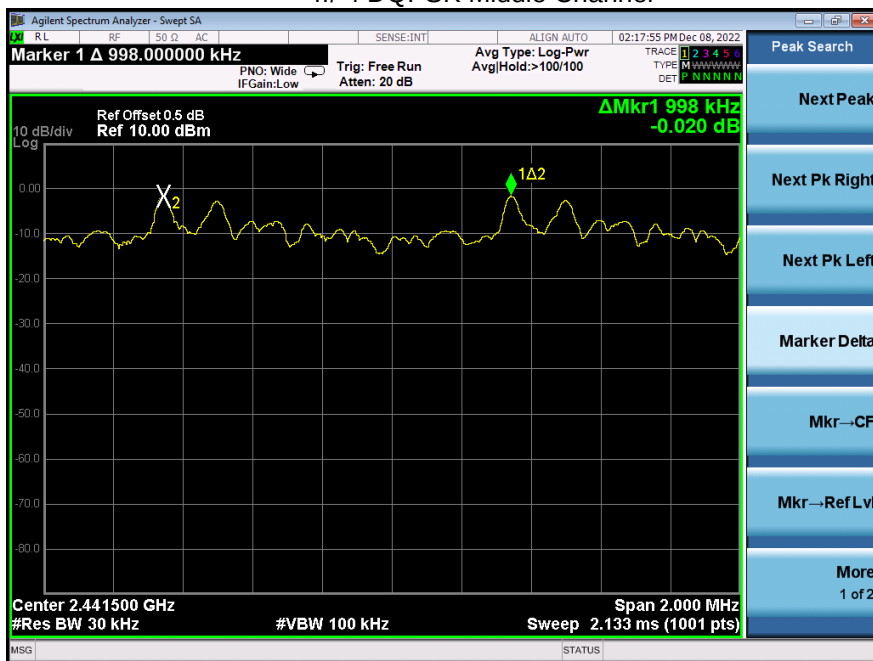


$\pi/4$ DQPSK Low Channel

 $\pi/4$ DQPSK Middle Channel

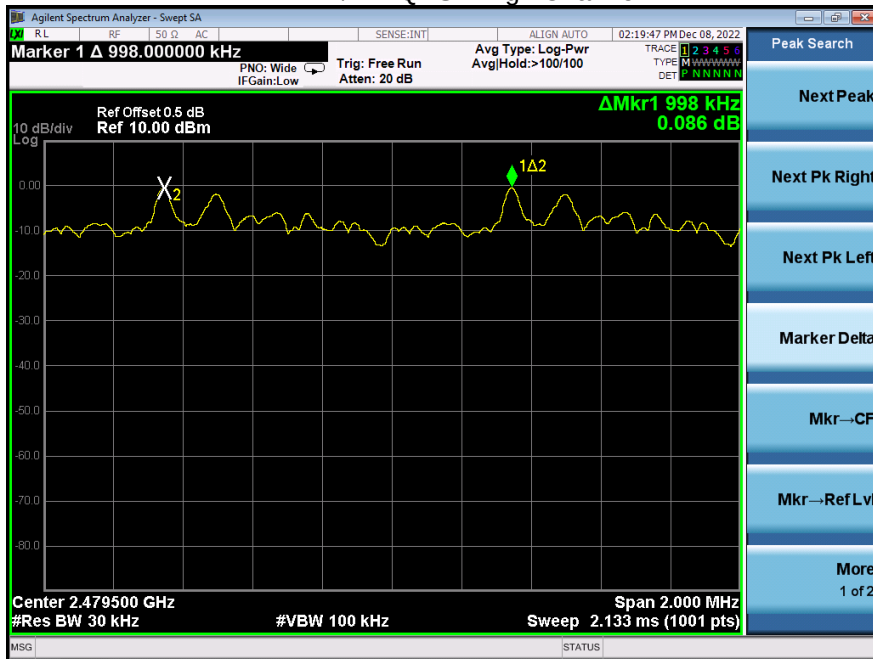
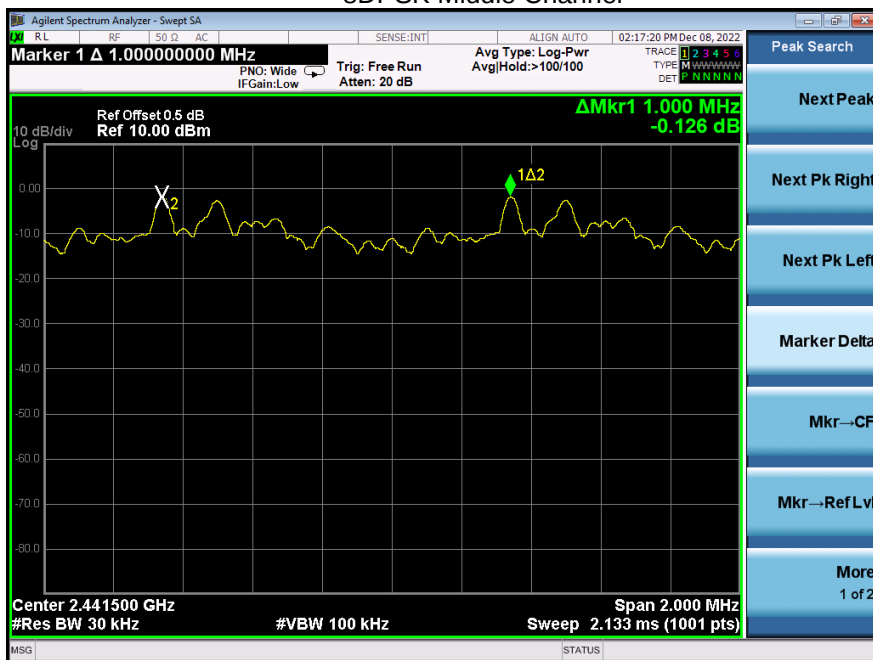
$\pi/4$ DQPSK High Channel

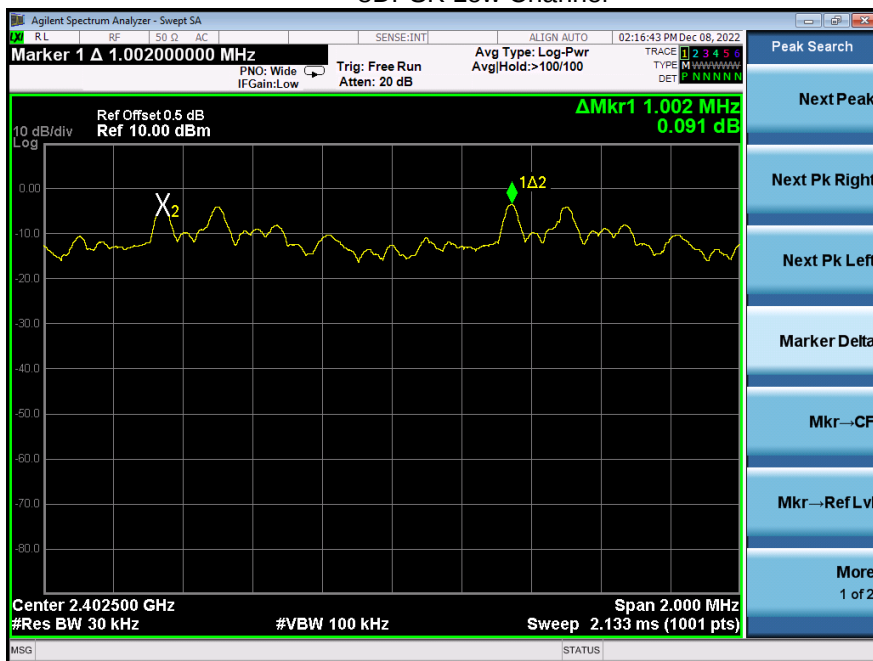


8DPSK Low Channel



8DPSK Middle Channel




8DPSK High Channel

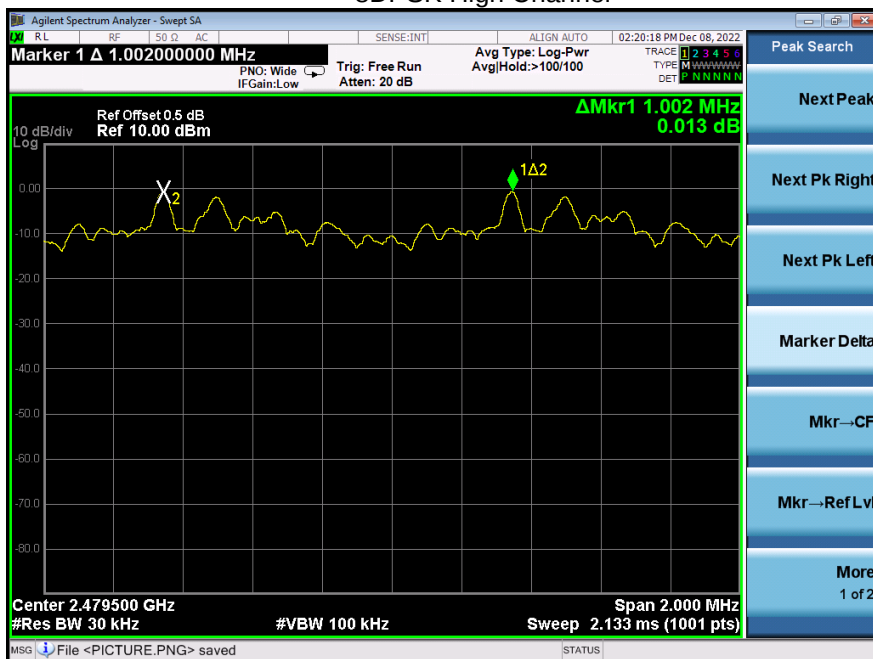

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result


Test Plots: 79 Channels in total GFSK

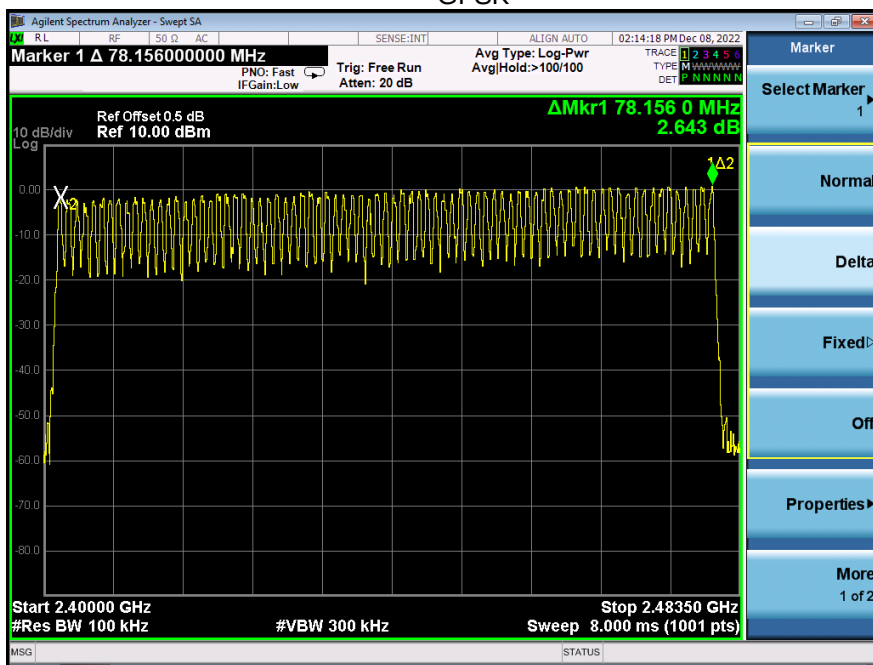

$\pi/4$ DQPSK

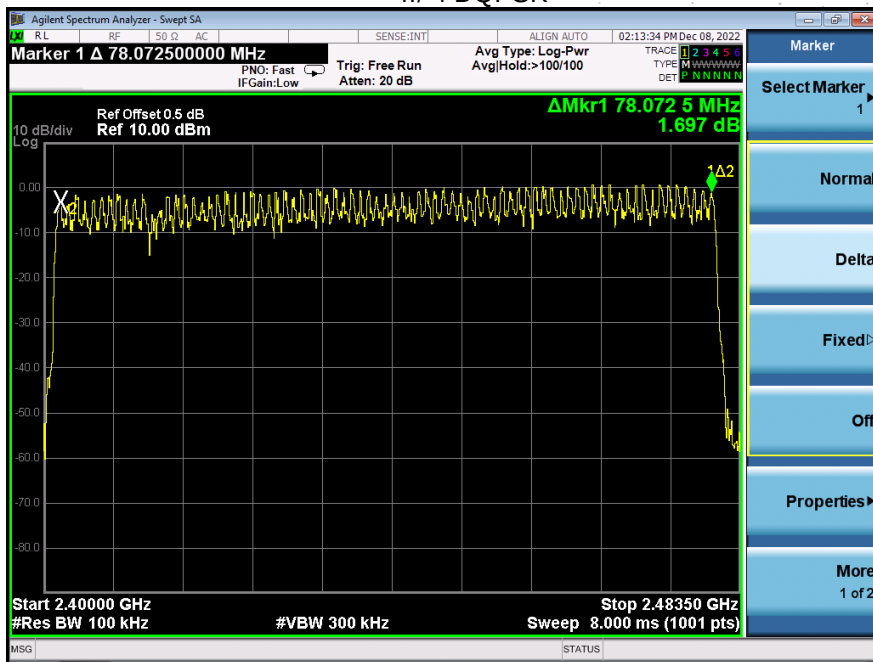


8DPSK

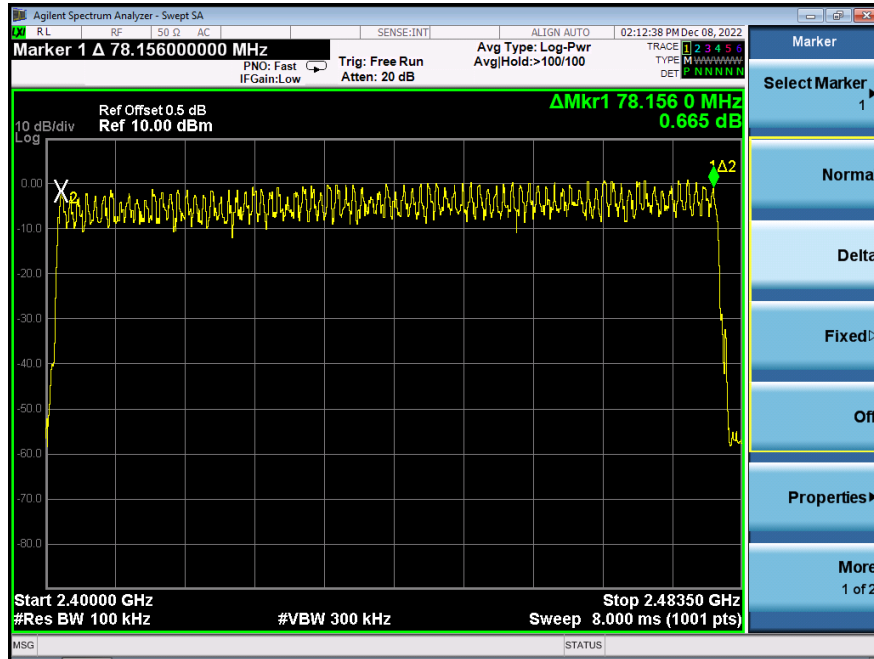

14. Dwell Time

14.1 Block Diagram Of Test Setup

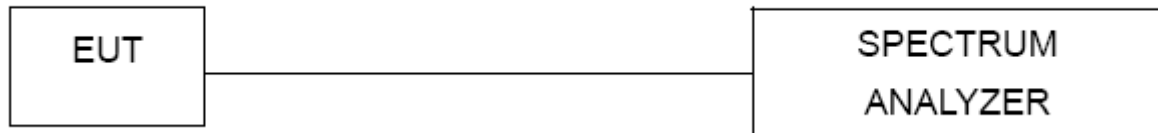

14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel

(5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel

(3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel

(1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:1600/79/6*0.4*79*(MkrDelta)/1000


DH3:1600/79/4*0.4*79*(MkrDelta)/1000

DH1:1600/79/2*0.4*79*(MkrDelta)/1000


Remark: Mkr Delta is once pulse time.

Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	1DH1	0.373	0.119	0.4
		1DH3	1.620	0.259	0.4
		1DH5	2.870	0.306	0.4
$\pi/4$ DQPSK	Middle	2DH1	0.384	0.123	0.4
		2DH3	1.632	0.261	0.4
		2DH5	2.880	0.307	0.4
8DPSK	Middle	3DH1	0.385	0.123	0.4
		3DH3	1.623	0.260	0.4
		3DH5	2.885	0.308	0.4


Test Plots
GFSK DH1 Middle Channel


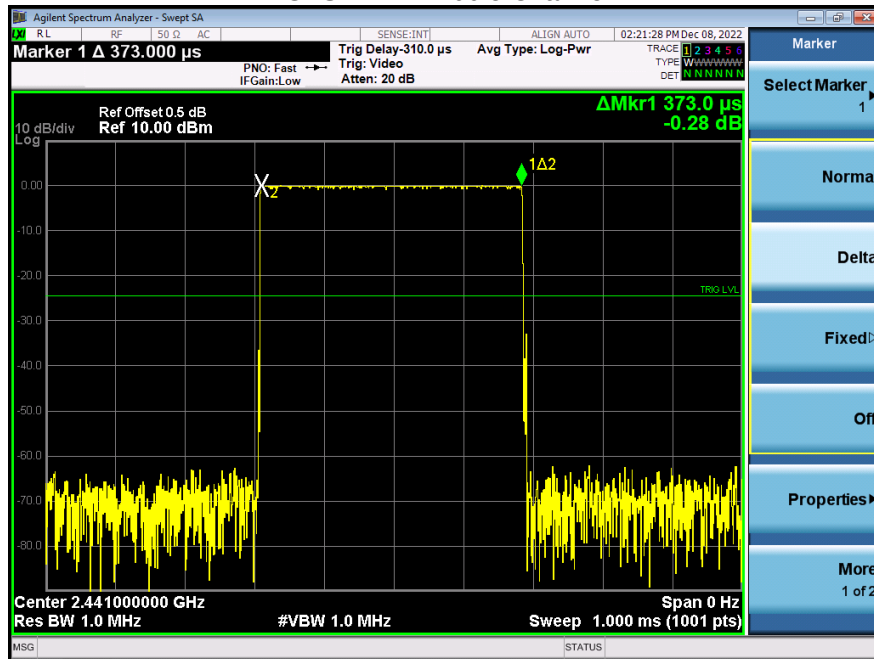



GFSK DH3 Middle Channel

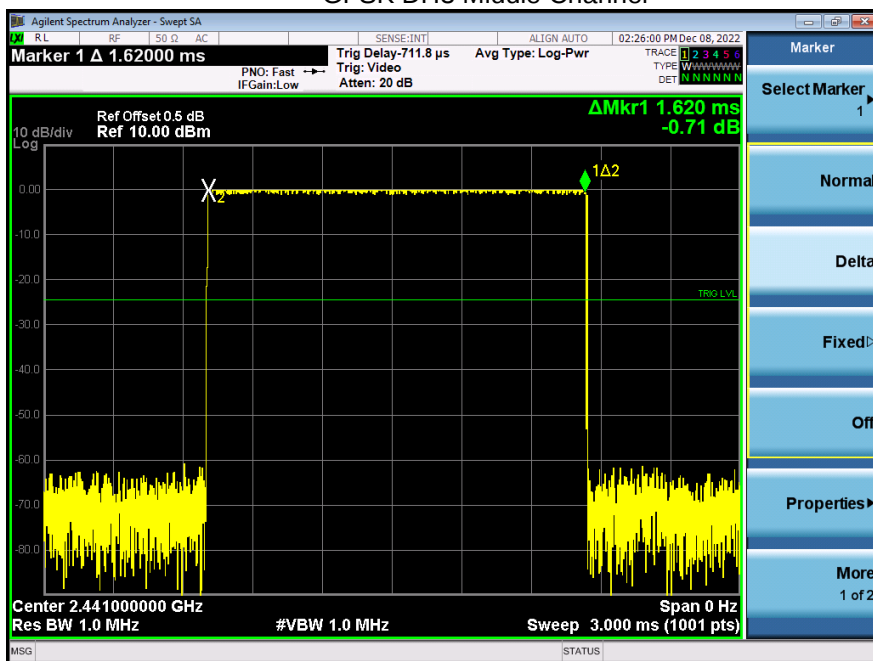


GFSK DH5 High Middle Channel

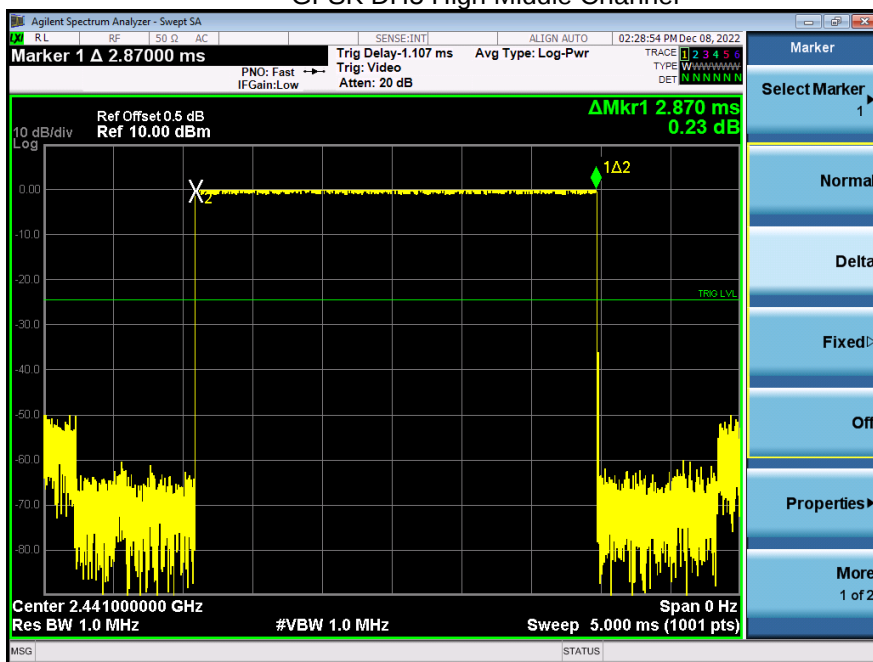

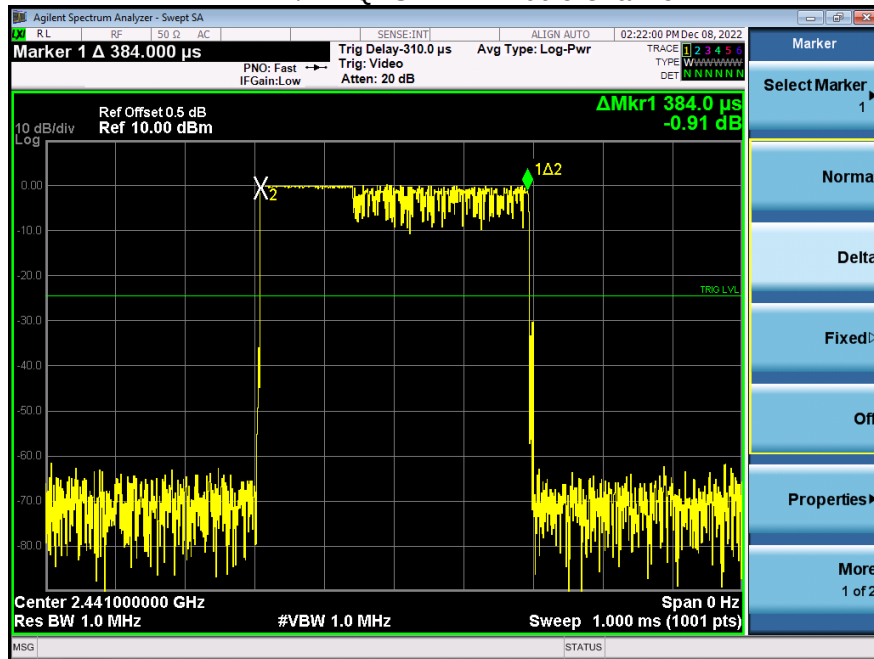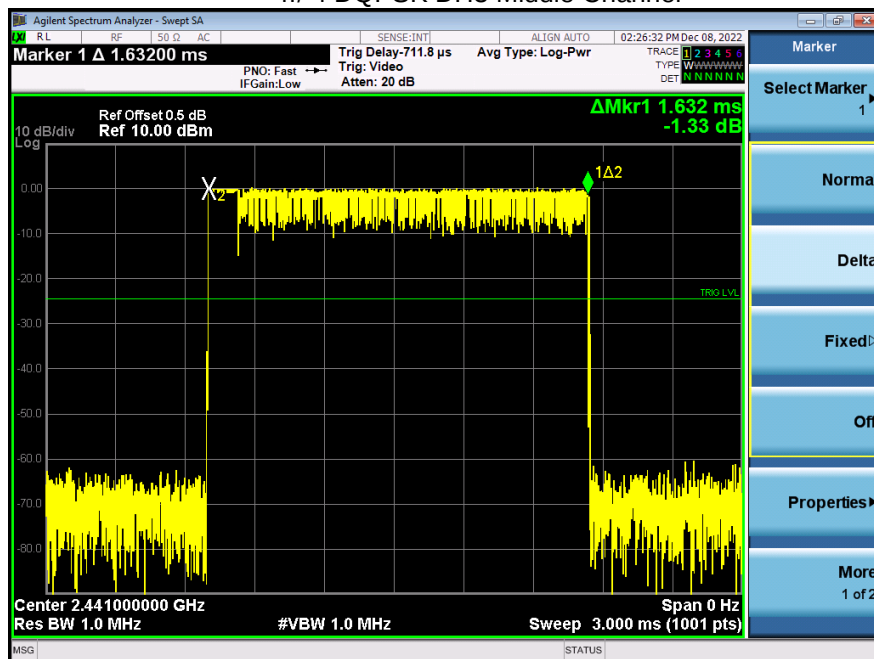$\pi/4$ DQPSK DH1 Middle Channel

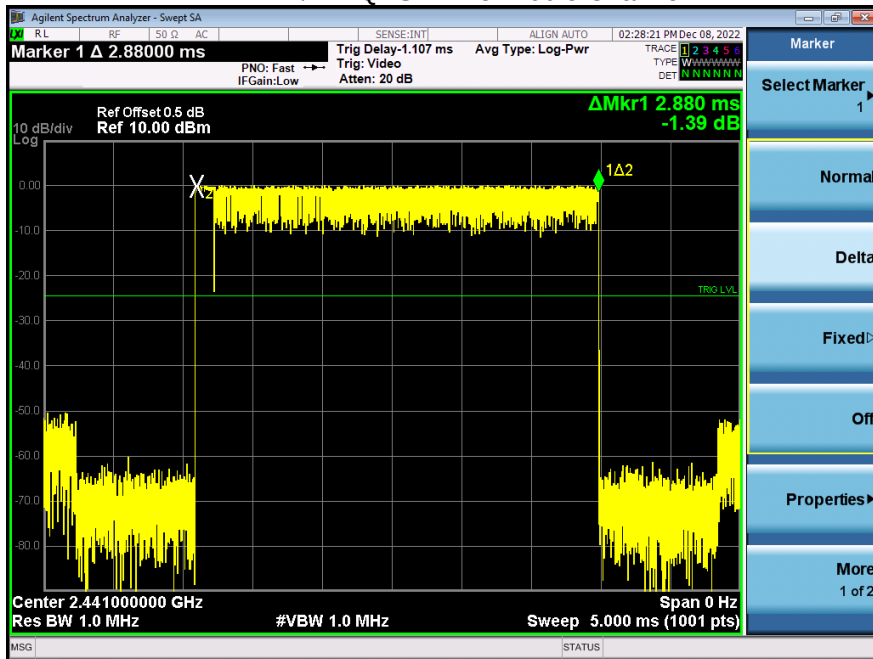 $\pi/4$ DQPSK DH3 Middle Channel


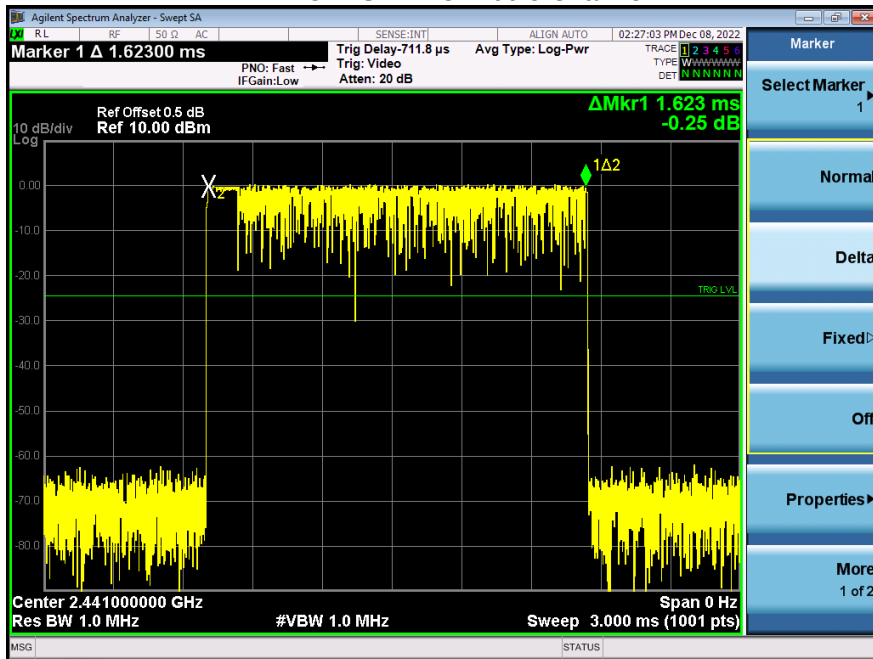
$\pi/4$ DQPSK DH5 Middle Channel

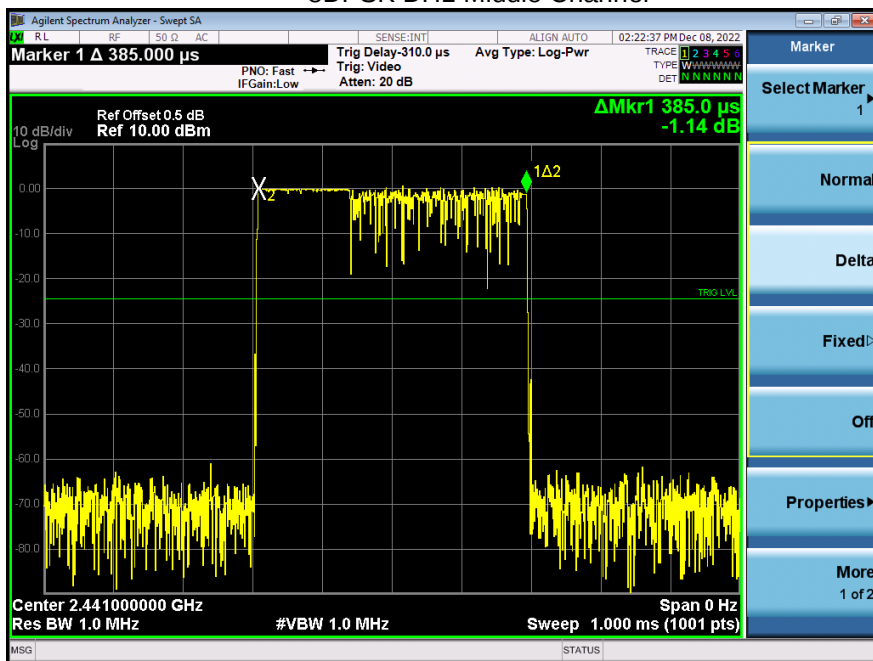
8DPSK DH1 Middle Channel




CO., LTD.

8DPSK DH3 Middle Channel



8DPSK DH5 Middle Channel

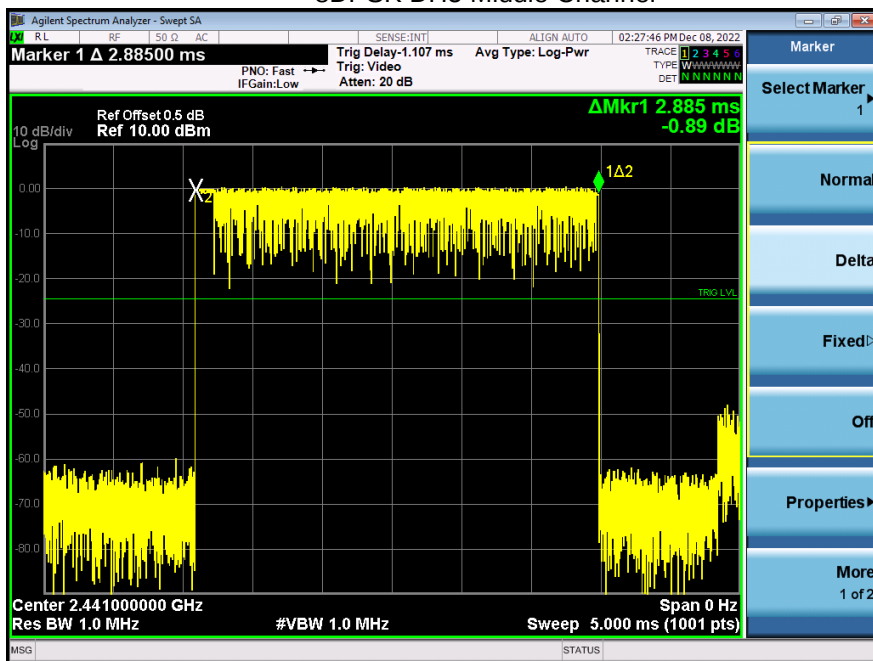

15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is Internal antenna, fulfill the requirement of this section.



16. EUT Photographs

EUT Photo



NOTE: Appendix-Photographs Of EUT Constructional Details

TC
3C
PPR
測

17. EUT Test Setup Photographs

Conducted emissions



TEST
TO
OVER
检

Radiated Measurement Photos



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****