



RF TEST REPORT

Report No.: SET2015-07090

Product Name: Portable ECG Monitor

FCC ID: 2ABOGPM10

Model No. : PM10

Applicant: Contec Medical Systems Co., Ltd.

Address: No.112 Qinhuang West Street, Economic & Technical Development Zone, Qinhuangdao, Hebei Province, PEOPLE'S REPUBLIC OF CHINA

Dates of Testing: 05/04/2015 — 05/11/2015

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **66** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name.....: Portable ECG Monitor

Brand Name.....: N/A

Trade Name.....: **CONTEC**

Applicant.....: Contec Medical Systems Co., Ltd.

Applicant Address.....: No.112 Qinhuang West Street, Economic & Technical
Development Zone, Qinhuangdao, Hebei Province,
PEOPLE'S REPUBLIC OF CHINA

Manufacturer.....: Contec Medical Systems Co., Ltd.

Manufacturer Address.....: No.112 Qinhuang West Street, Economic & Technical
Development Zone, Qinhuangdao, Hebei Province,
PEOPLE'S REPUBLIC OF CHINA

Test Standards.....: 47 CFR Part 15 Subpart C 2013: Radio Frequency Devices
ANSI C63.10:2009: American National Standard for
Testing Unlicensed Wireless Devices
DA 00-705: Filing and Measurement Guidelines
for Frequency Hopping Spread Spectrum Systems

Test Result.....: PASS

Tested by

2015.05.19

Haigang He, Test Engineer

Reviewed by

2015.05.19

Zhu Qi, Senior Engineer

Approved by

2015.05.19

Wu Li'an, Manager

Table of contents

1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Test Standards and Results.....	5
1.3. Frequency Hopping System Requirements	6
1.4. Facilities and Accreditations	7
2. 47 CFR PART 15C REQUIREMENTS.....	8
2.1. Antenna requirement.....	8
2.2. Number of Hopping Frequency	9
2.3. Peak Output Power.....	12
2.4. 20dB Bandwidth	13
2.5. Carried Frequency Separation.....	20
2.6. Time of Occupancy (Dwell time)	23
2.7. Conducted Spurious Emissions.....	30
2.8. Conducted Band Edge.....	40
2.9. Conducted Emission	47
2.10. Radiated Band Edges and Spurious Emission	51
2.11. RF exposure evaluation.....	65
3. LIST OF MEASURING EQUIPMENT	66

Change History		
Issue	Date	Reason for change
1.0	2015.05.19	First edition

1. General Information

1.1. EUT Description

EUT Type: Portable ECG Monitor
Hardware Version: BT43H
Software Version: V0.91
Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type: Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Antenna Type.....: PCB Antenna
Antenna Gain.....: -0.5dBi

Note 1: The EUT is a Portable ECG Monitor, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: a. When power on, the EUT will scan the whole frequency until a Connection command from the other BT devices.
b. When receiving the signal from the other BT devices, The EUT transmit are sponse signal.
c. The other devices receive the response signal and recognize it, then send a connection command to establish the connection.
d. After the connection establish successfully, the data transmission is beginning. At the same time, the both devices will shift frequencies in synchronization per a same pseudo randomly ordered list of hopping frequencies, the hopping rate is 1600 times per second. This device conforms to the criteria in FCC Public Notice DA 00-705.
e. The bandwidth of the receiver, which is set to a fixed width by the software.

Note 4: Bluetooth signal has 9 packages DH1, DH3, DH5, 3DH1, 3DH3, 3DH5, 5DH1, 5DH3, 5DH5, DH5 package is largest, we are testing DH5 in the document.

Note 5: The antenna of EUT is designed with permanent attachment and no consideration of replacement. It is a PCB Antenna with a maximum gain of -0.5dBi, and it is used to radiate the RF emissions.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2013	Radio Frequency Devices
2	ANSI C63.10 2009	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(a)	Number of Hopping Frequency	PASS
3	15.247(b)	Peak Output Power	PASS
4	15.247(a)	20dB Bandwidth	PASS
5	15.247(a)	Carrier Frequency Separation	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	PASS
7	15.247(d)	Conducted Spurious Emission	PASS
8	15.247(d)	Band Edge	PASS
9	15.207	Conducted Emission	PASS
10	15.209 15.247(c)	Radiated Emission	PASS
11	1.1307(b)	RF exposure evaluation	PASS

Note 1: The tests were performed according to the method of measurements prescribed in DA-00-705.

Note 2: The test of Radiated Emission was performed according to the method of measurements prescribed in ANSI C63.10 2009.

1.3. Frequency Hopping System Requirements

1.3.1. Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

1.3.2. Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centered from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given pioneer are synchronized to the frequency-hopping channel for the pioneer. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a pioneer must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its pioneer to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no

impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

1.3.3. EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.4. Facilities and Accreditations

1.4.1. Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

IC-Registration No.: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: Internal antenna

An Internal antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT Model	Ant. Cat.	Ant. Type	Gain(dBi)
1	PM10	Internal	PCB	-0.5

2.1.3. Result: comply


The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Number of Hopping Frequency

2.2.1. Limit of Number of Hopping Frequency

Frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Setup

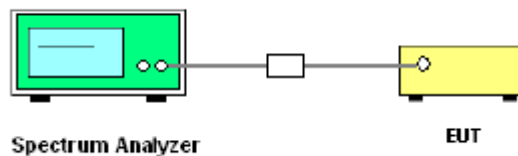

2.2.3. Test Procedure


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

2.2.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS

Test Plots:

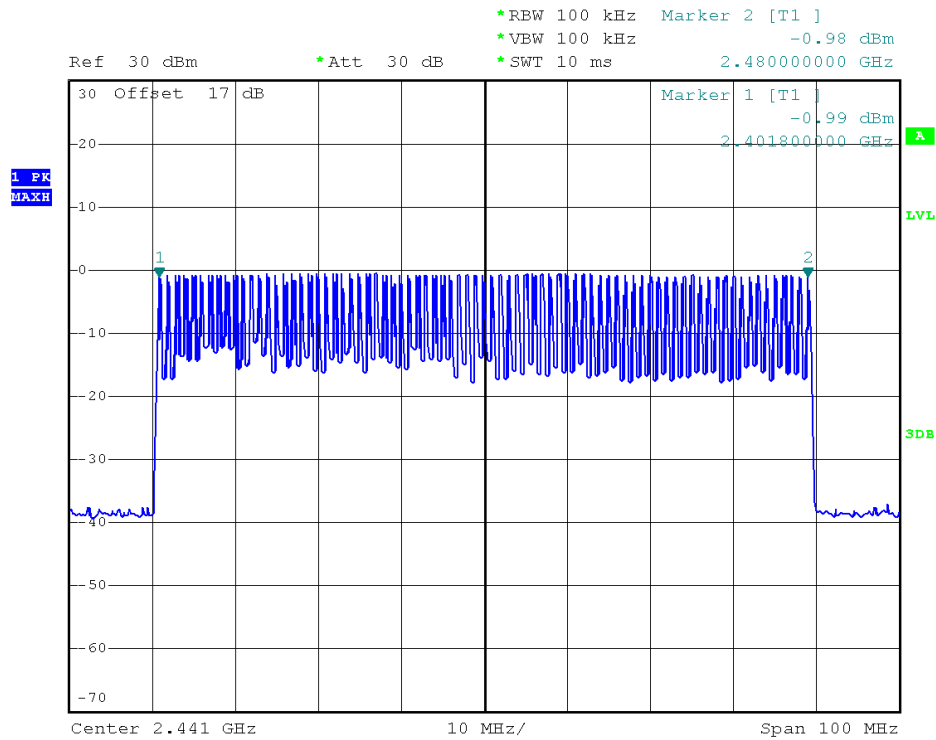

(Plot A: GFSK)

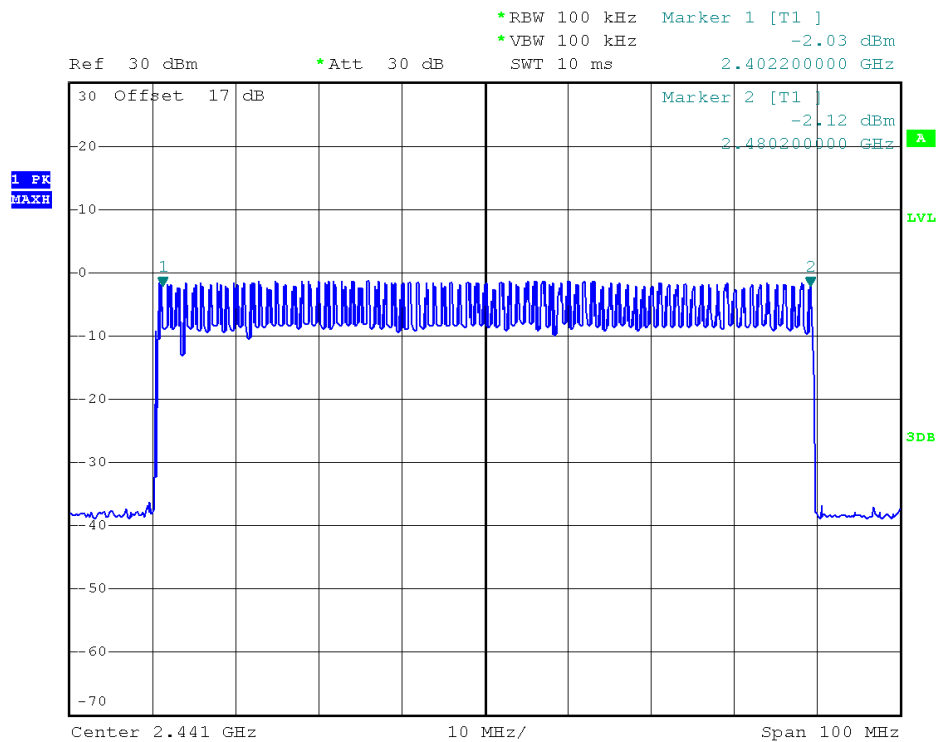
(Plot B: $\pi/4$ -DQPSK)

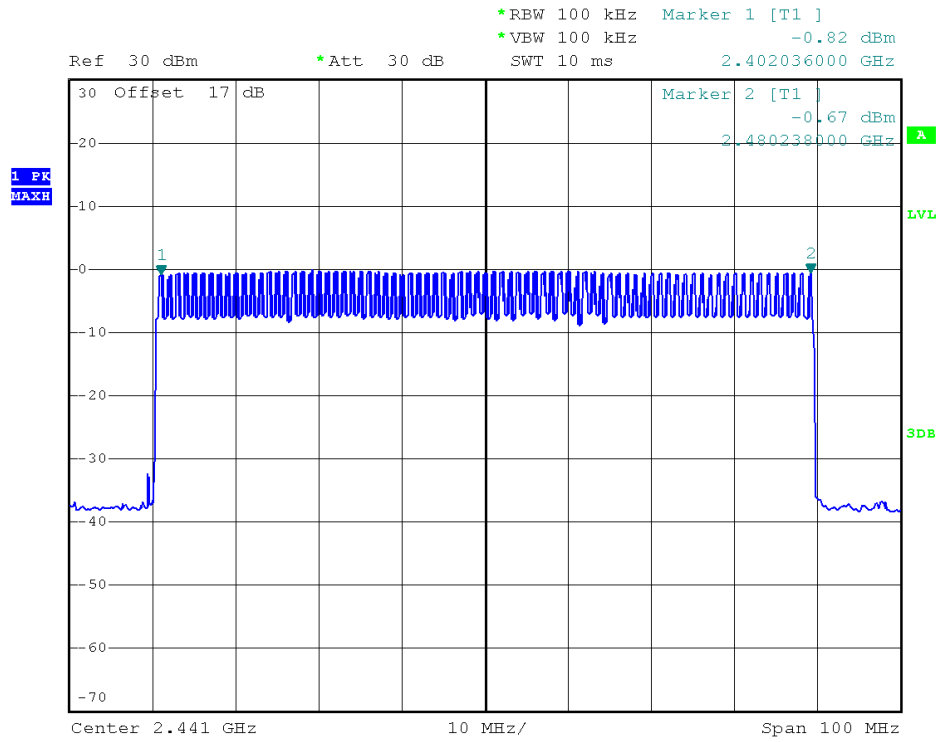


(Plot C: 8- DPSK)

2.3. Peak Output Power

2.3.1. Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

2.3.2. Test Setup



2.3.3. Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

2.3.4. Test Result


Test Mode	Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	-0.24	30	PASS
	39	2441	-0.14		PASS
	78	2480	-0.38		PASS
$\pi/4$ -DQPSK	0	2402	-1.16		PASS
	39	2441	-0.87		PASS
	78	2480	-0.99		PASS
8- DPSK	0	2402	-1.64		PASS
	39	2441	-1.51		PASS
	78	2480	-1.25		PASS

2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Setup

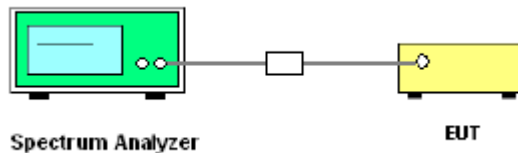

2.4.1. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq 1\%$ of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.


2.4.2. Test Result

2.4.2.1. GFSK Mode


Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.104	Plot A
39	2441	1.086	Plot B
78	2480	1.104	Plot C


Test Plots:

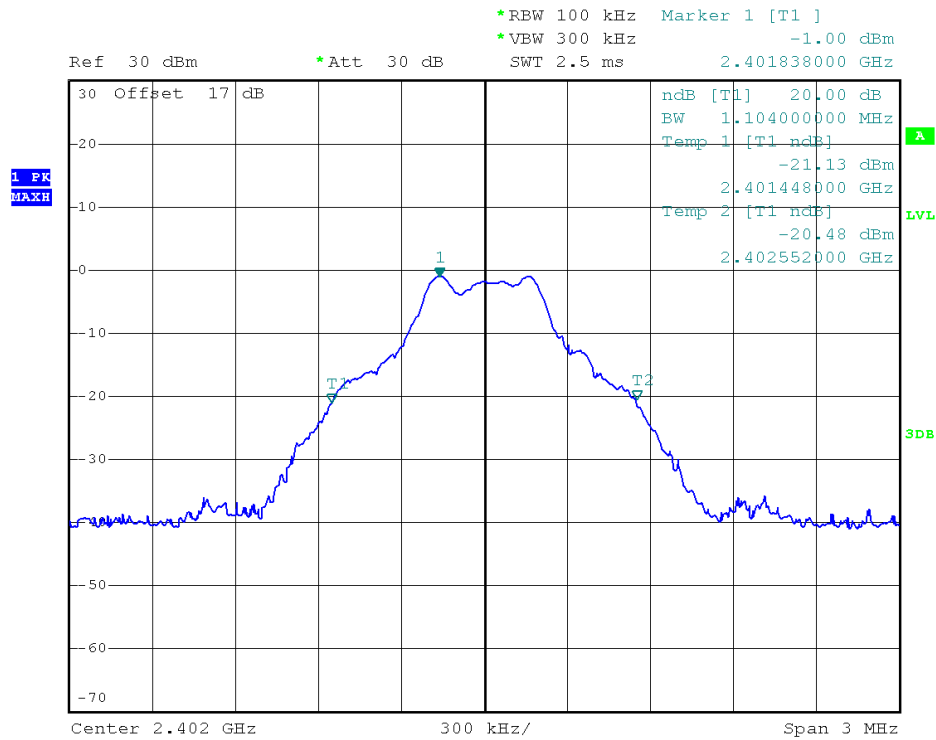

(Plot A: Channel = 2402 @ GFSK)

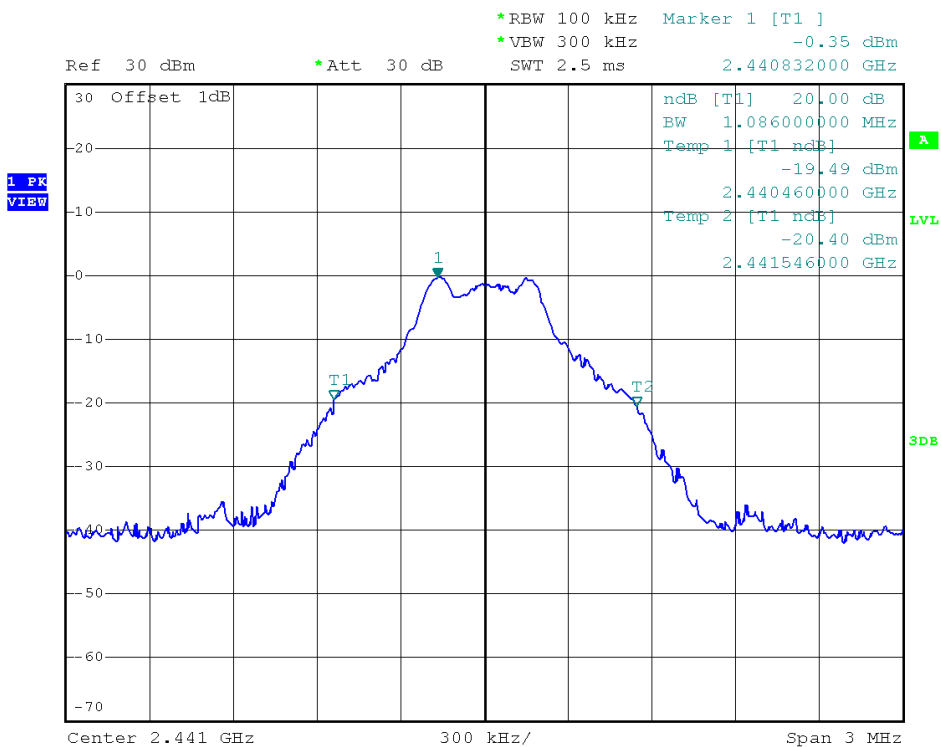

(Plot B: Channel = 2441 @ GFSK)

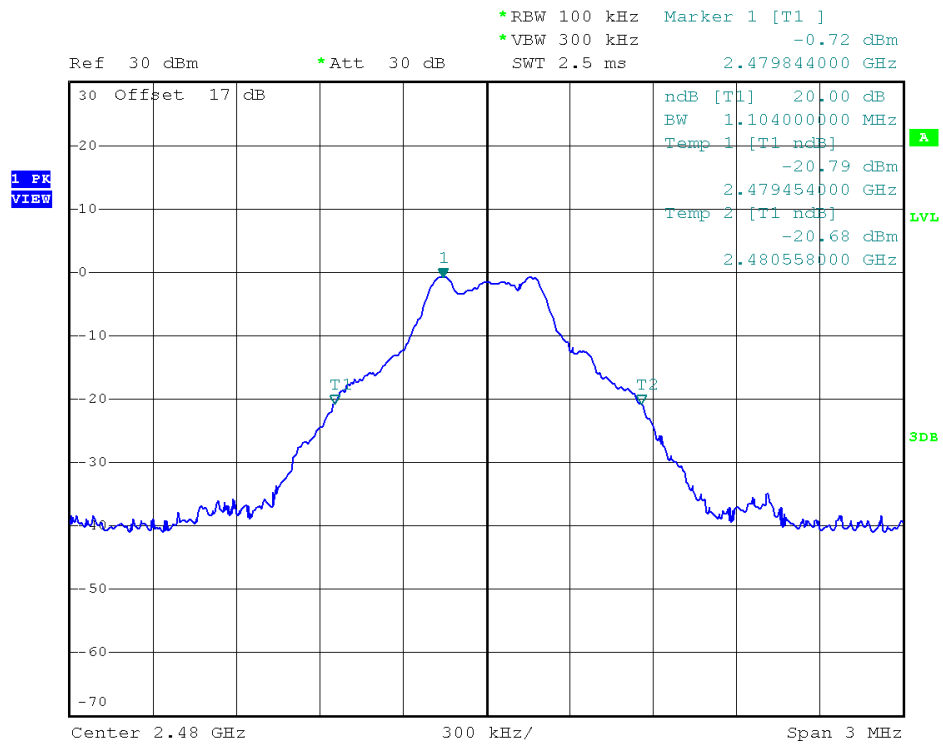


(Plot C: Channel = 2480 @ GFSK)

2.4.2.2. $\pi/4$ -DQPSK Mode



Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.284	Plot D
39	2441	1.284	Plot E
78	2480	1.290	Plot F

Test Plots:

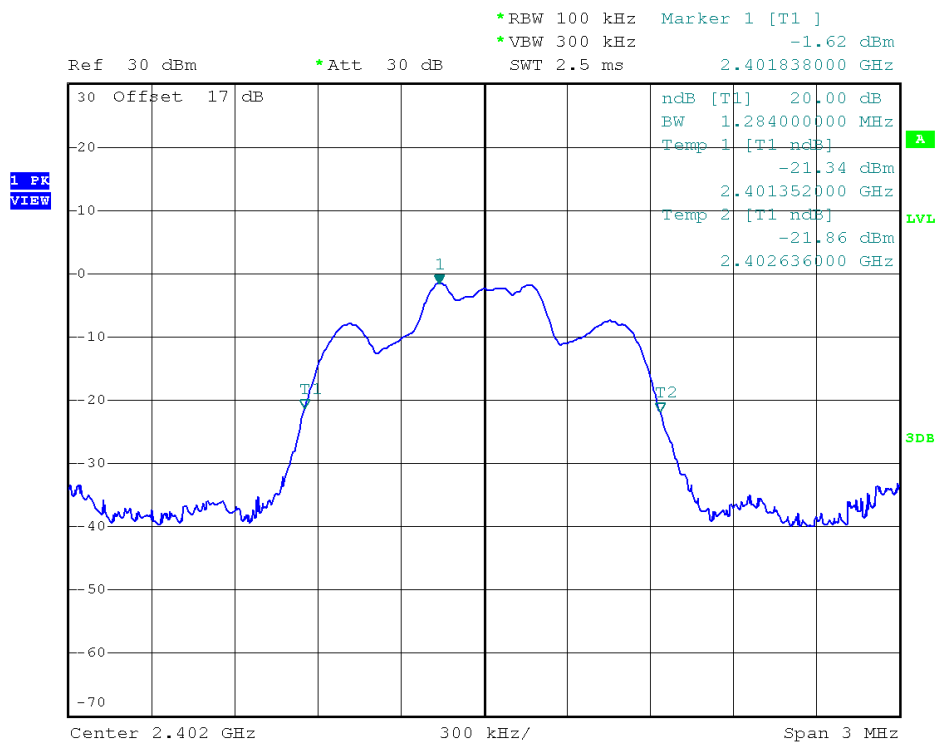

(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)

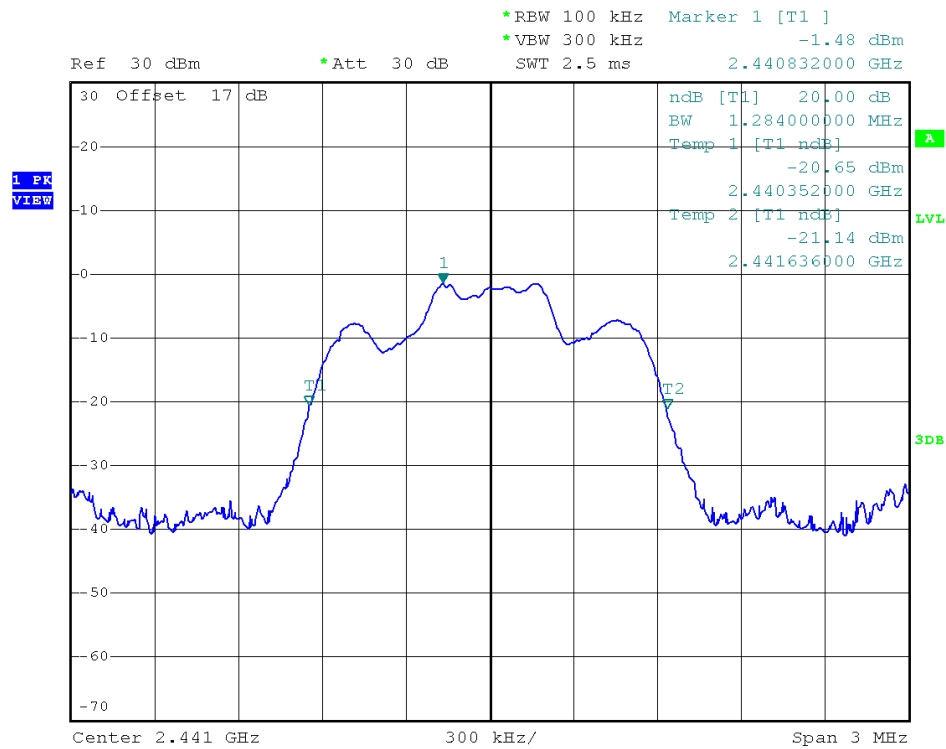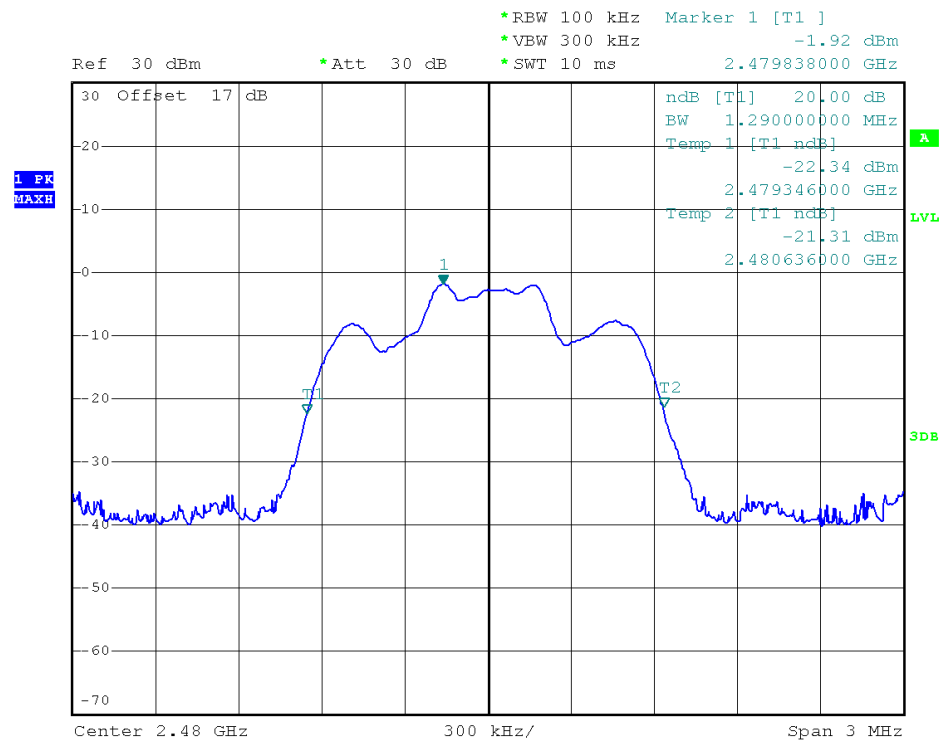

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)

2.4.2.3. 8-DPSK Mode


Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.278	Plot G
39	2441	1.284	Plot H
78	2480	1.284	Plot I

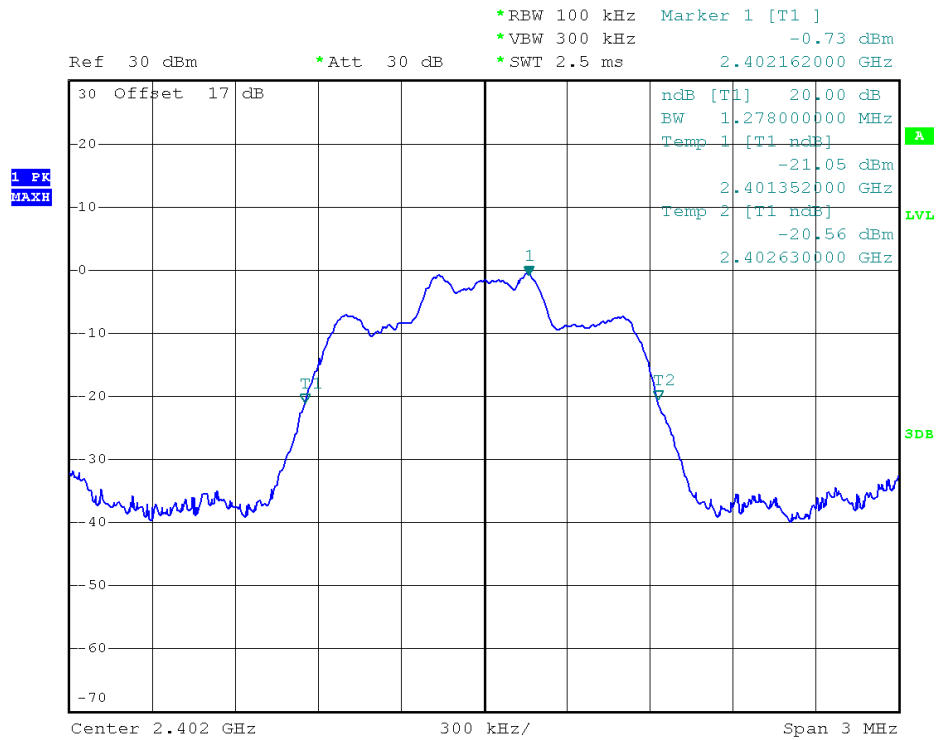
Test Plots:



(Plot G: Channel = 2402 @ 8-DPSK)

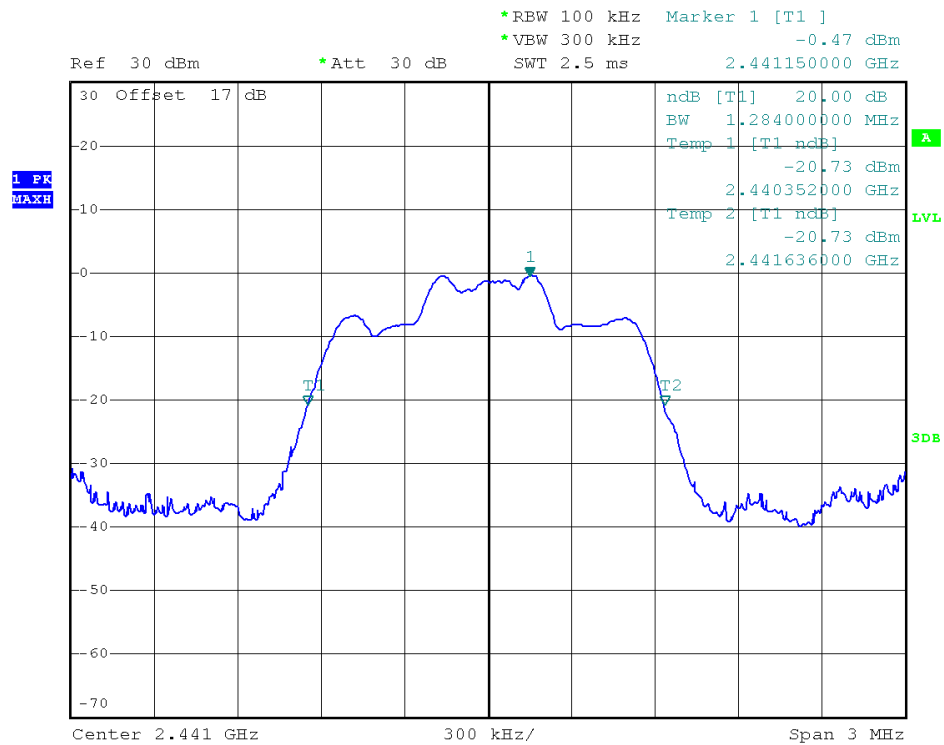

(Plot H: Channel = 2441 @ 8-DPSK)

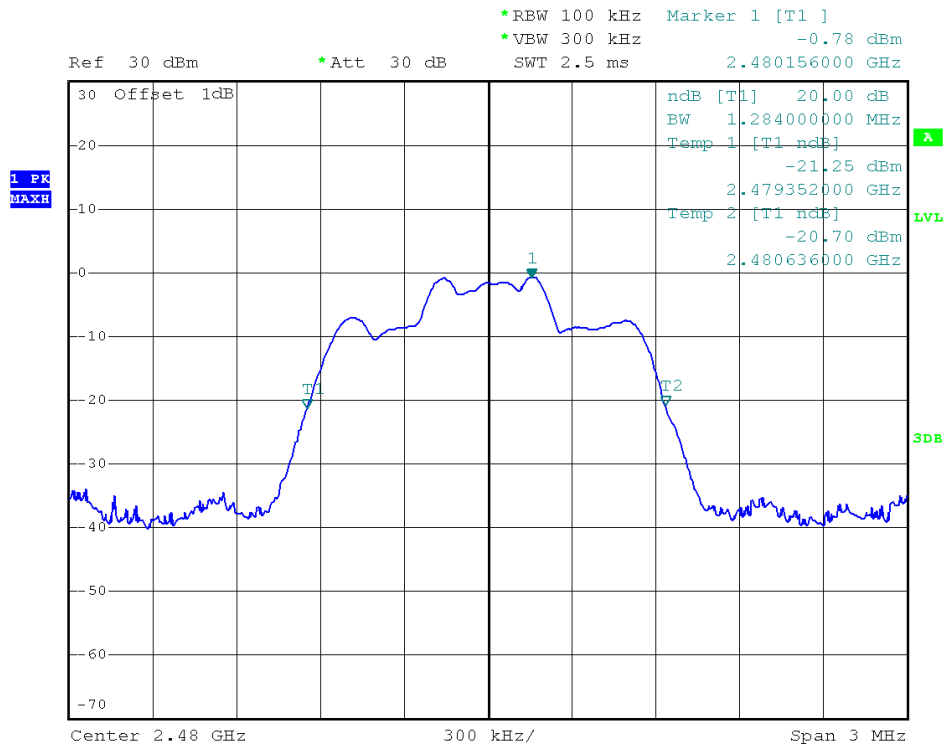


(Plot I: Channel = 2480 @ 8-DPSK)

2.5. Carried Frequency Separation

2.5.1. Limit of Carried Frequency Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Setup

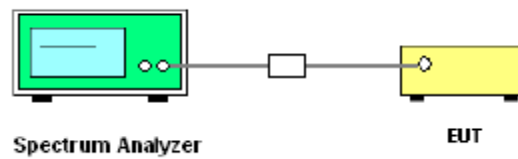


2.5.3. Test Procedure


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

2.5.4. Test Result


Test mode	Frequency Separation(MHz)	(2/3 of 20dB BW) Limits (MHz)	Verdict
GFSK	1.056	0.74	PASS
$\pi/4$ -DQPSK	1.014	0.86	PASS
8-DPSK	1.002	0.86	PASS

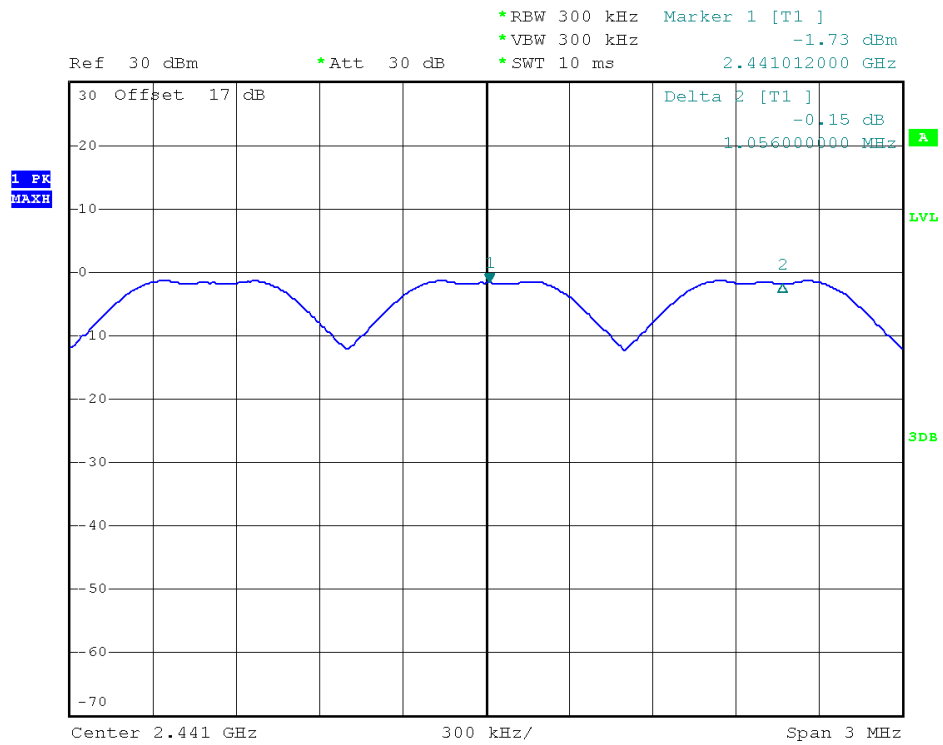

GFSK Mode

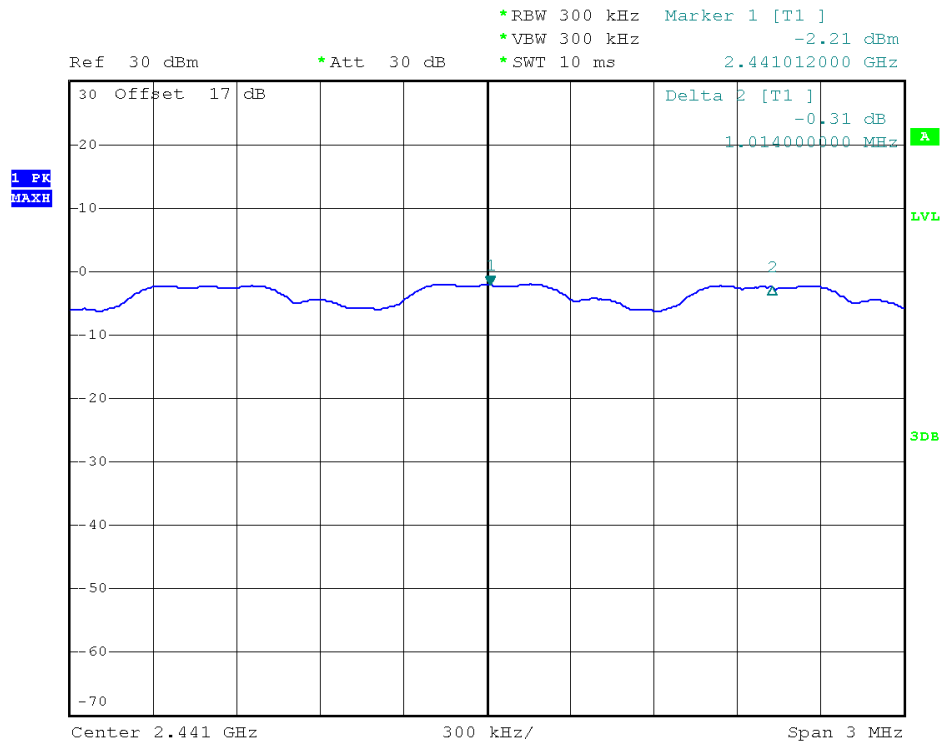

$\pi/4$ -DQPSK Mode

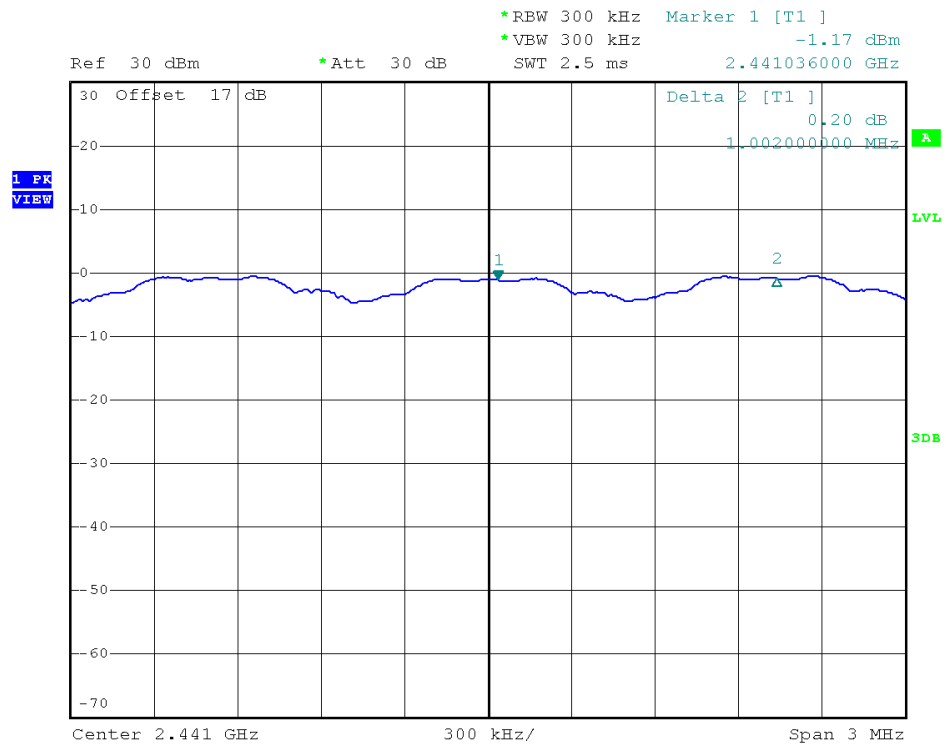


8-DPSK Mode

2.6. Time of Occupancy (Dwell time)

2.6.1. Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

2.6.2. Test Setup

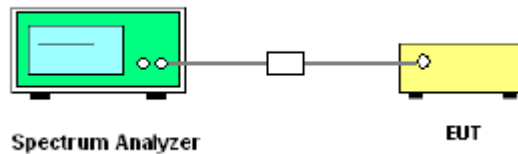

2.6.3. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

2.6.4. Test Result

NOTE

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




2.6.4.1. GFSK Mode


Test Verdict:

Channel	Frequency (MHz)	Pulse Time		Dwell Time (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.88	Plot A	307.200	400	PASS
39	2441	2.90	Plot B	309.333		PASS
78	2480	2.88	Plot C	307.200		PASS


Test Plots:

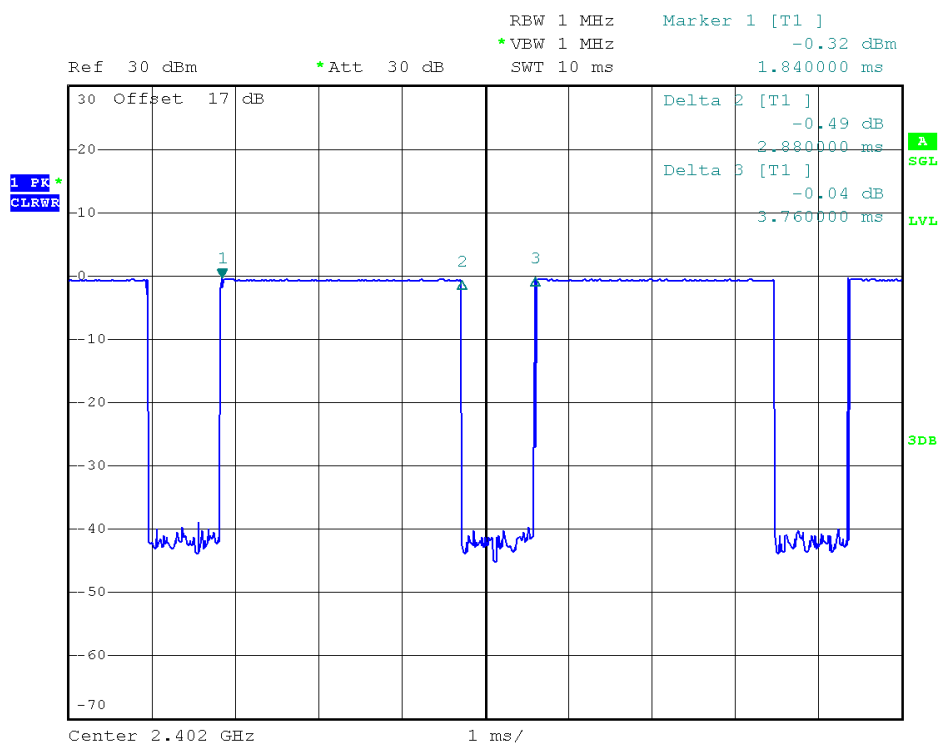

(Plot A: Channel = 2402 @ GFSK)

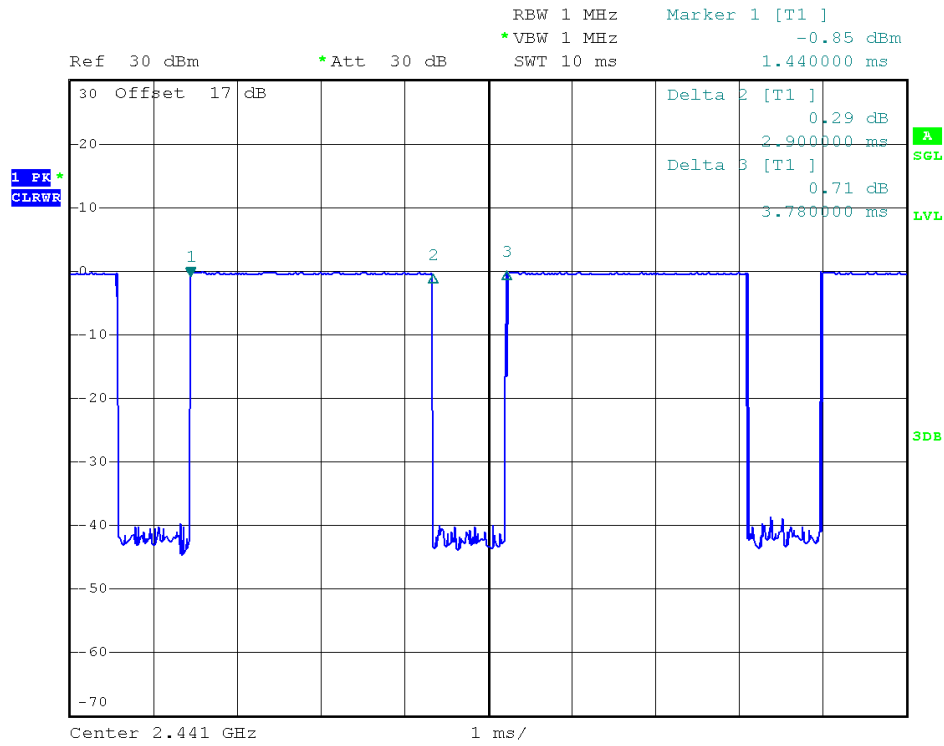

(Plot B: Channel = 2441 @ GFSK)

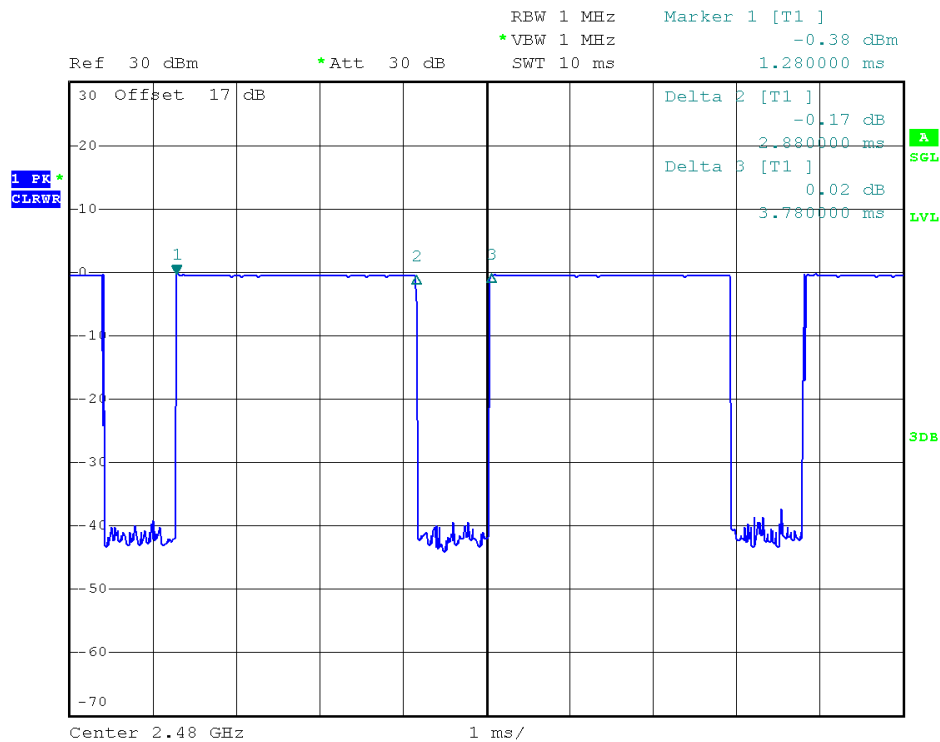


(Plot C: Channel = 2480 @ GFSK)

2.6.4.2. $\pi/4$ -DQPSK Mode



Test Verdict:

Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.88	Plot D	307.200	400	PASS
39	2441	2.88	Plot E	307.200		PASS
78	2480	2.88	Plot F	307.200		PASS

Test Plots:

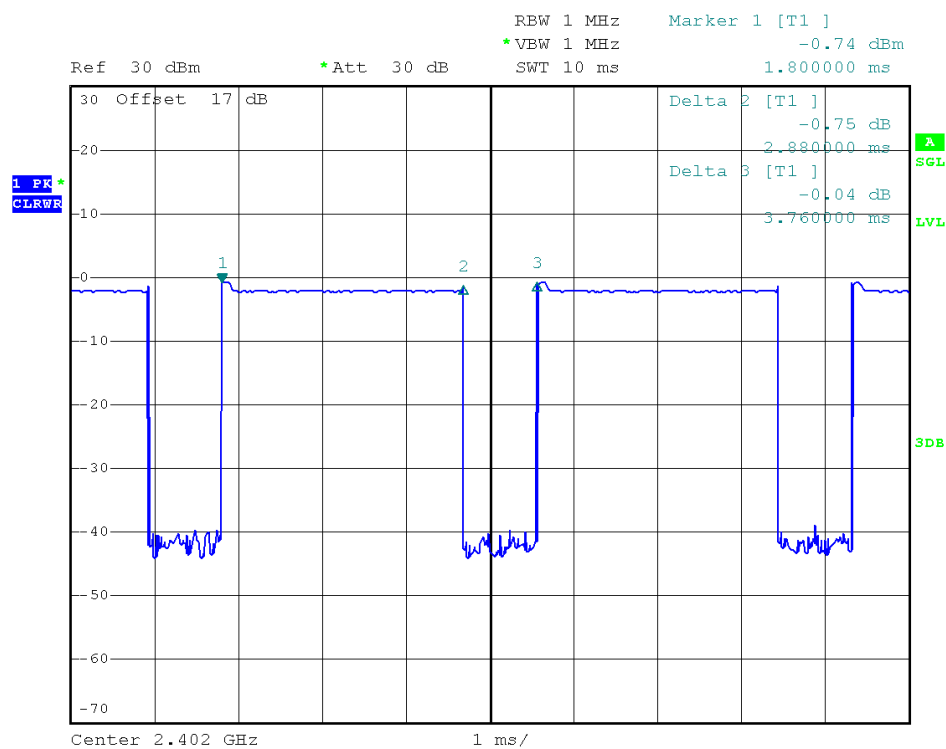


(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)

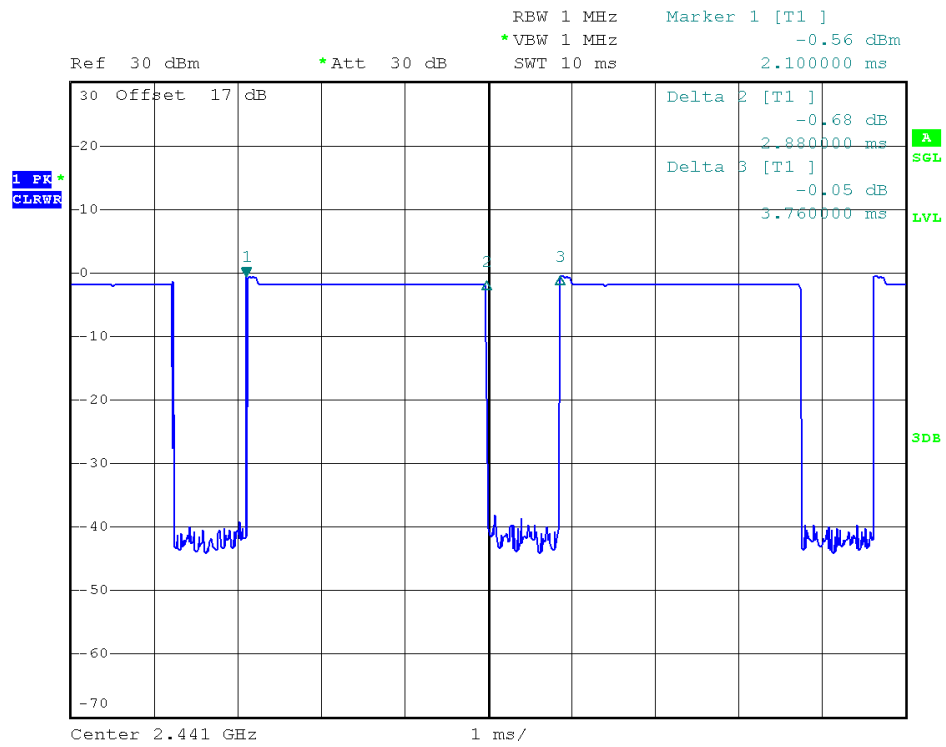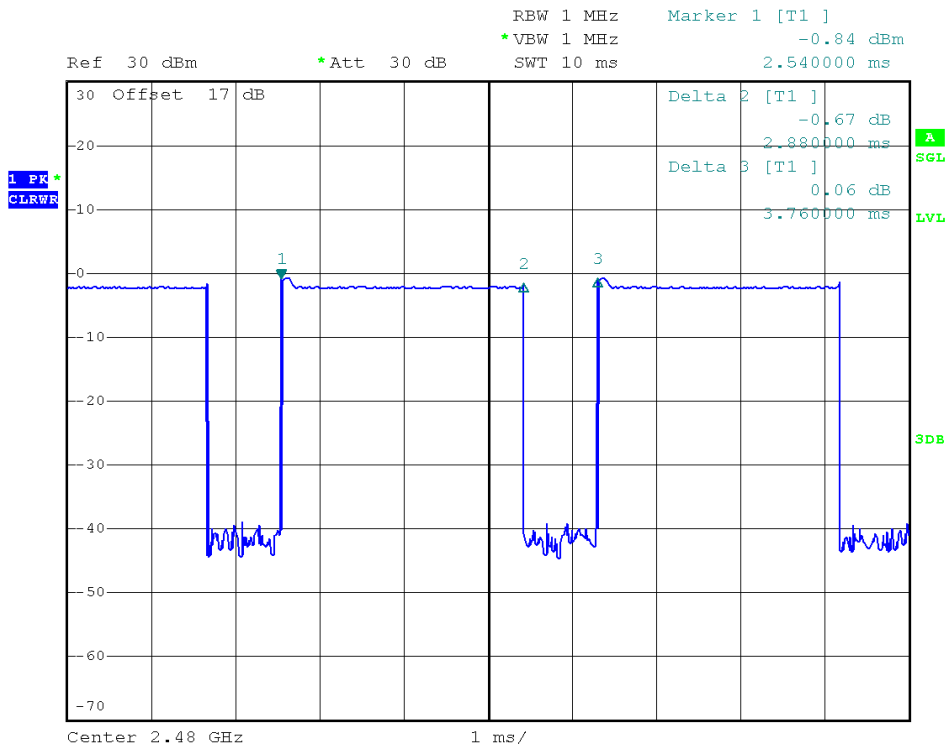

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)

**2.6.4.3. 8-DPSK mode****Test Verdict:**

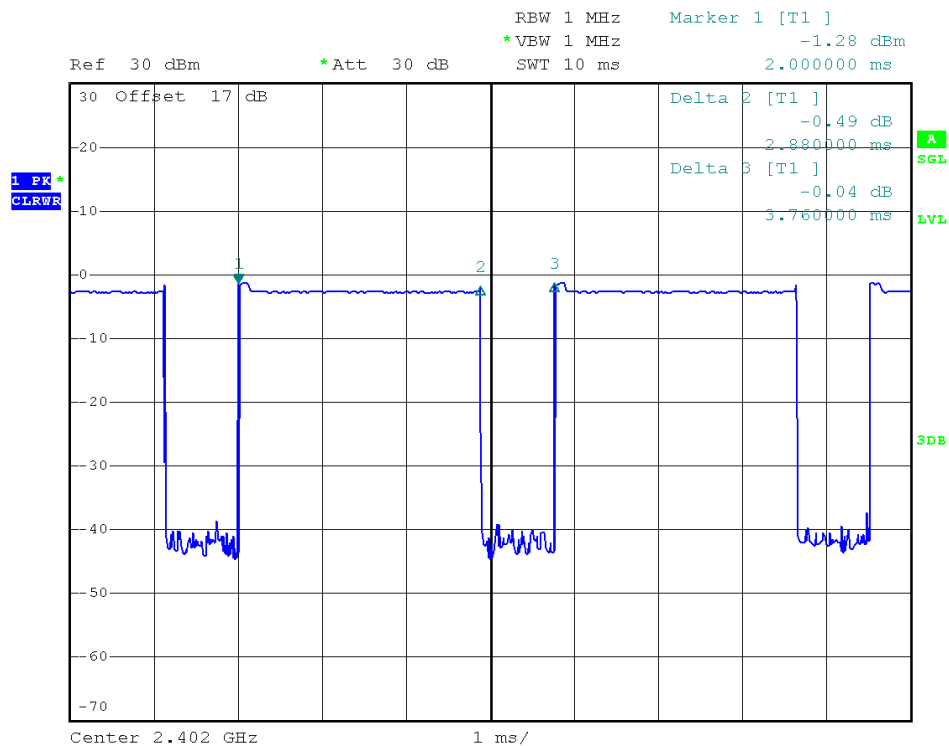
Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.88	Plot G	307.200	400	PASS
39	2441	2.88	Plot H	307.200		PASS
78	2480	2.88	Plot I	307.200		PASS

Test Plots:

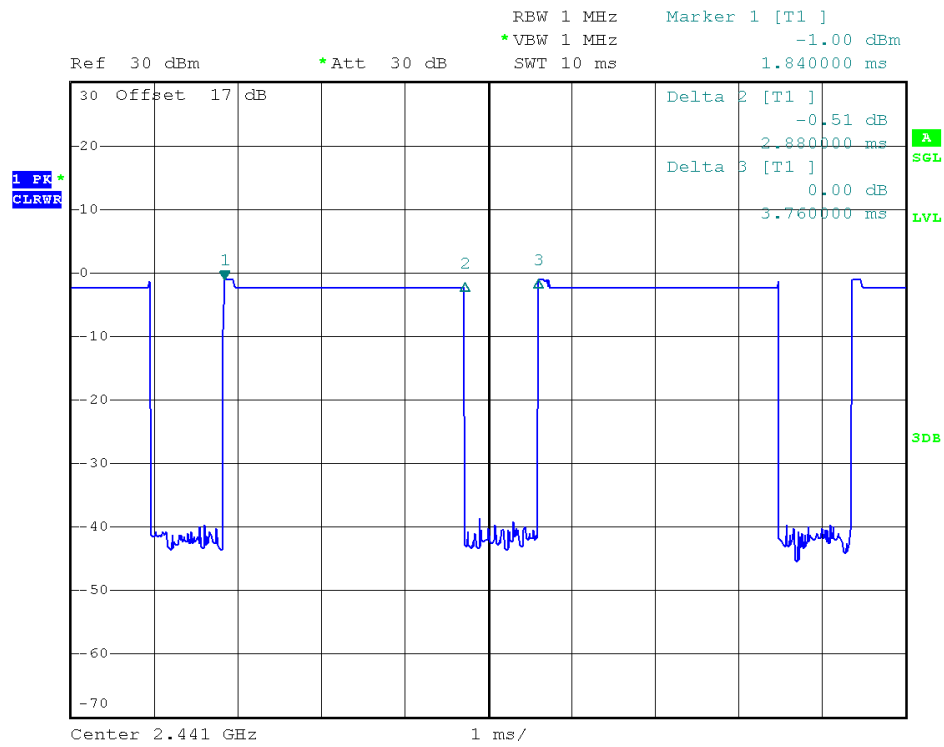(Plot G: Channel = 2402 @ 8-DPSK)



(Plot H: Channel = 2441 @ 8-DPSK)

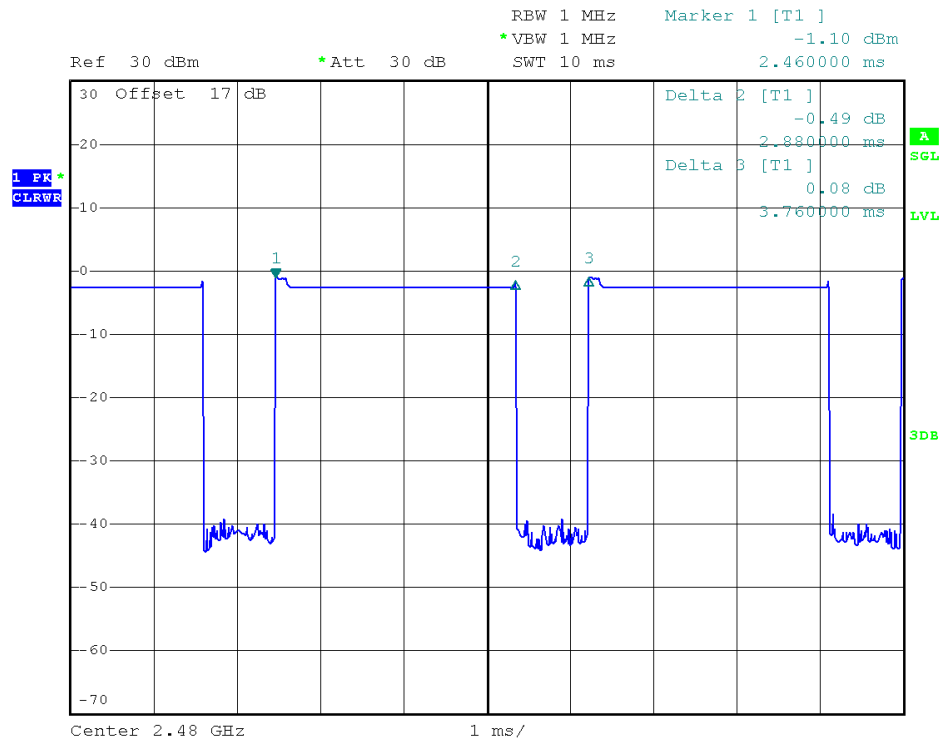


(Plot I: Channel = 2480 @ 8-DPSK)

2.7. Conducted Spurious Emissions

2.7.1. Limit of Spurious Emission

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


2.7.2. Test Setup

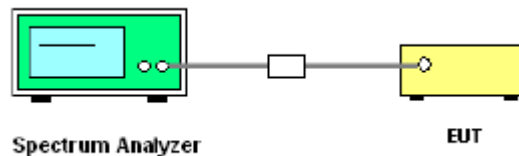


2.7.3. Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


2.7.4. Test Result

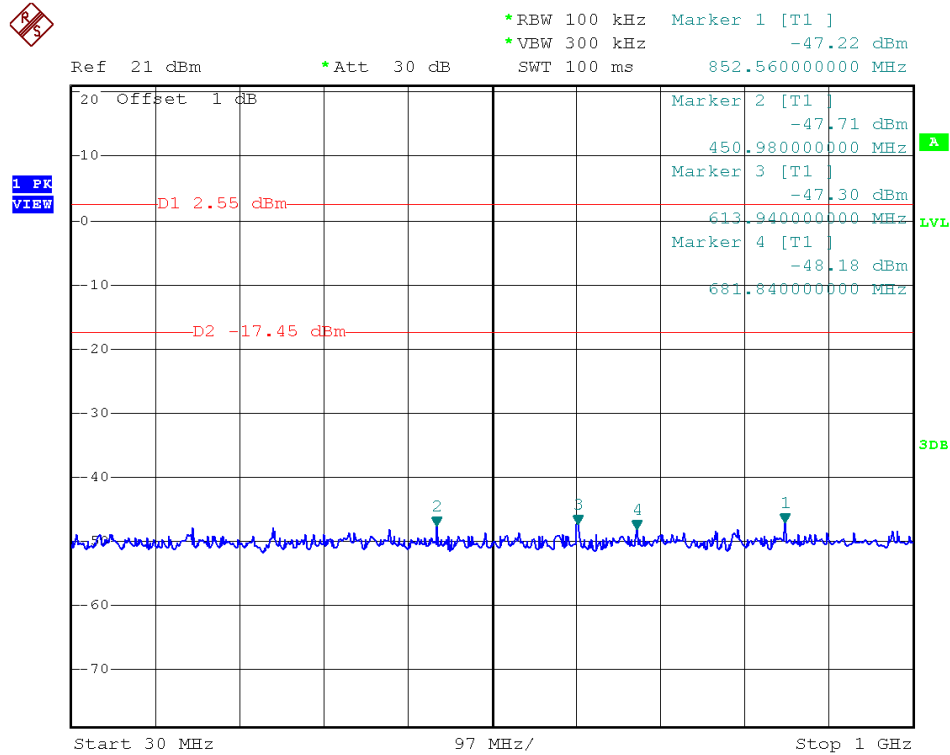


Channel = 0, 30MHz to 1GHz @ GFSK Mode

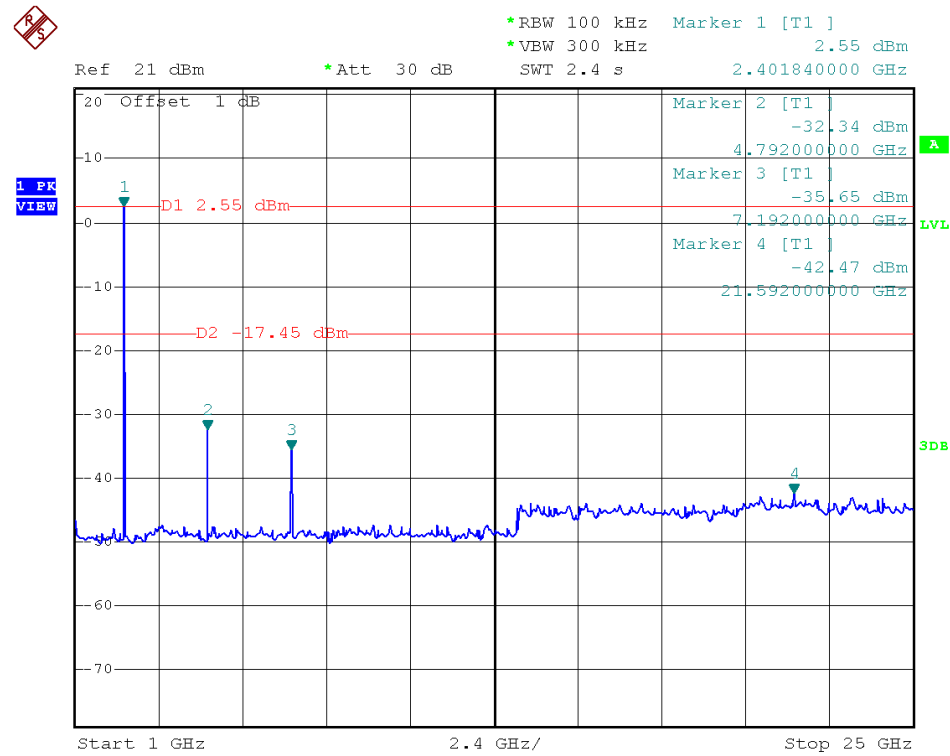


Channel = 0, 1GHz to 25GHz @ GFSK Mode

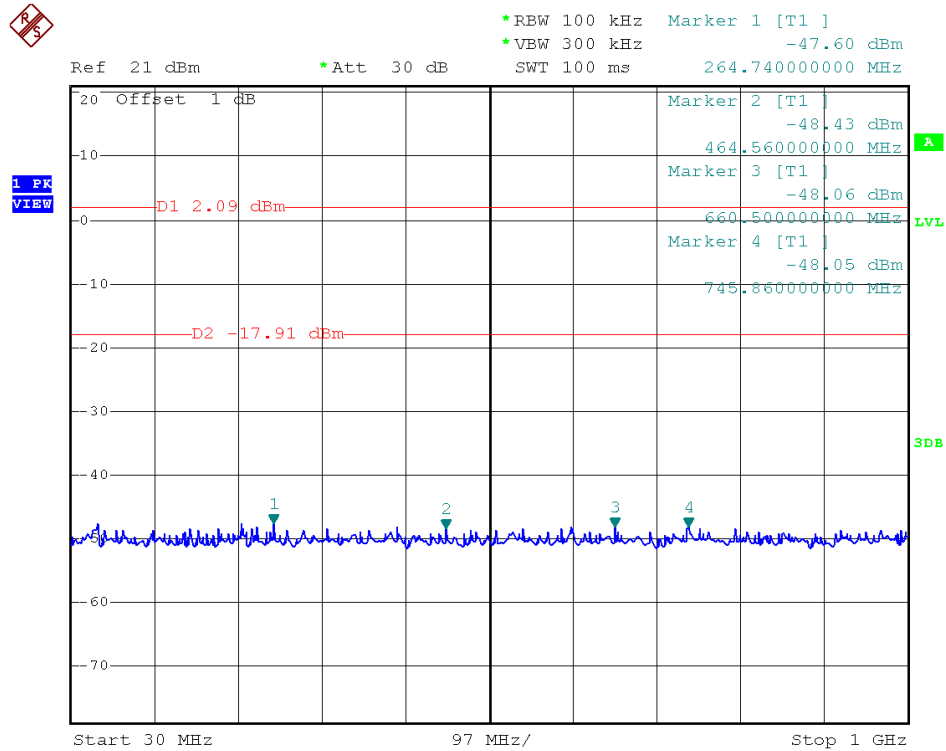


Channel = 39, 30MHz to 1GHz @ GFSK Mode

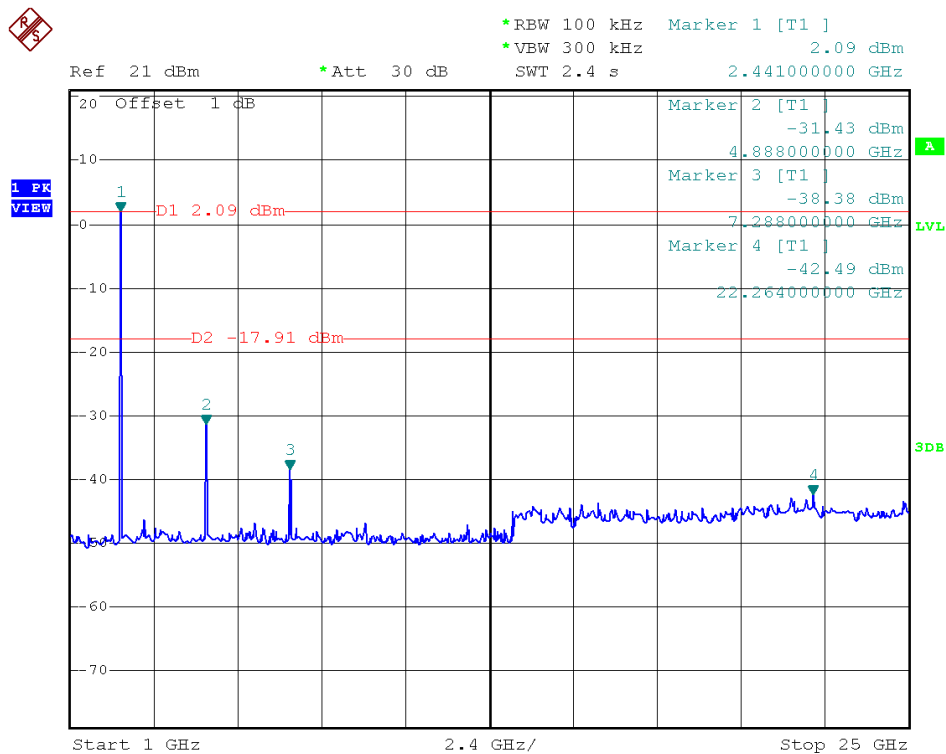


Channel = 39, 1GHz to 25GHz @ GFSK Mode

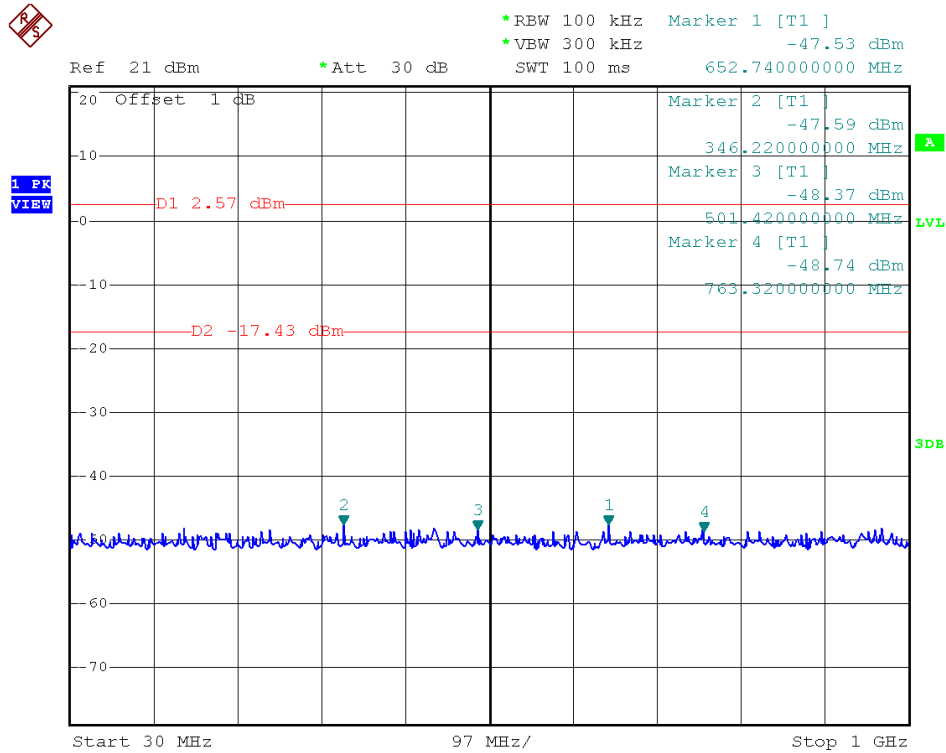


Channel = 78, 30MHz to 1GHz @ GFSK Mode

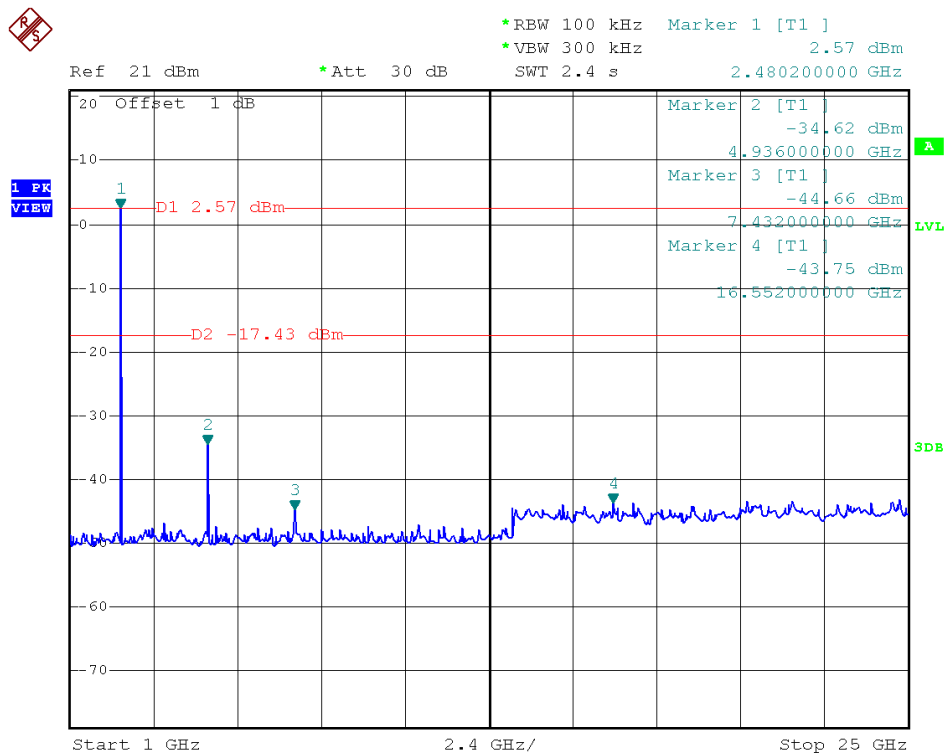


Channel = 78, 1GHz to 25GHz @ GFSK Mode

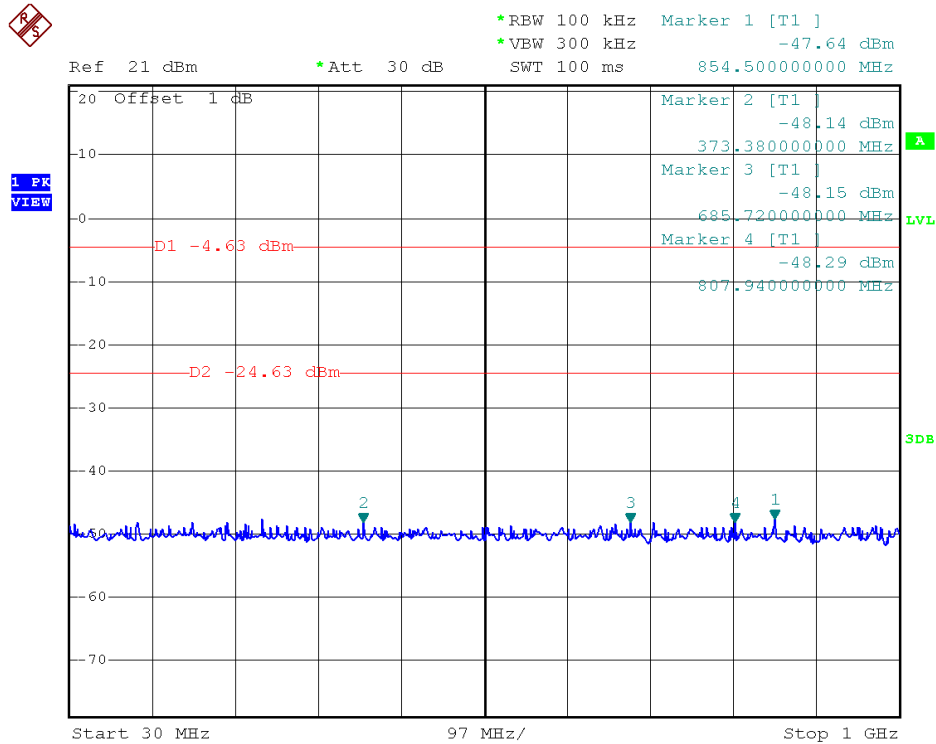


Channel = 0, 30MHz to 1GHz @ $\pi/4$ -DQPSK

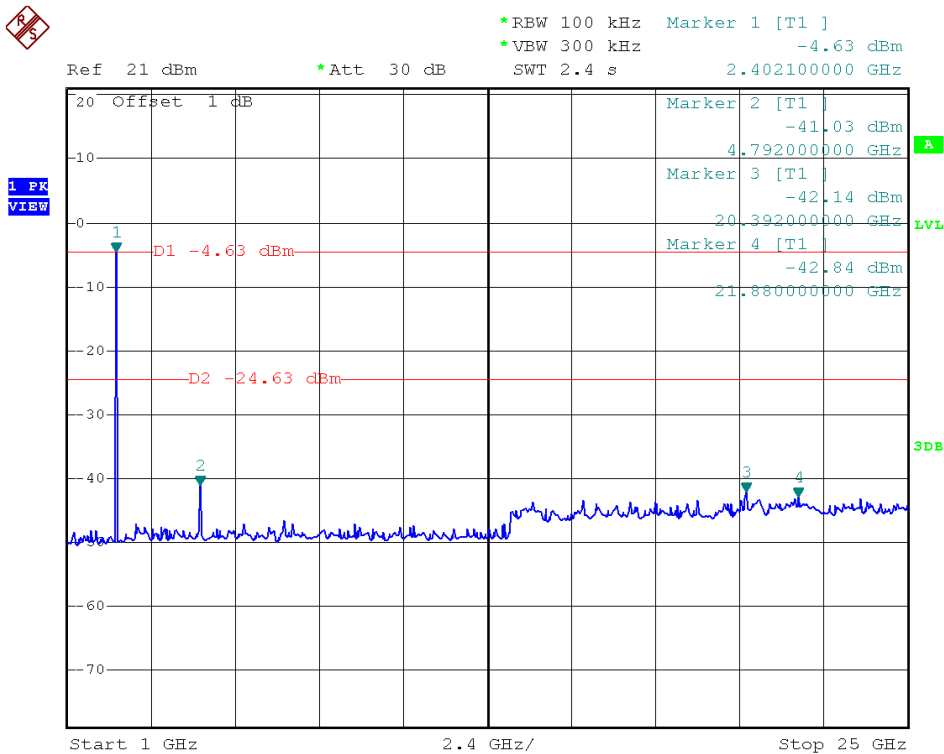


Channel = 0, 1GHz to 25GHz @ $\pi/4$ -DQPSK

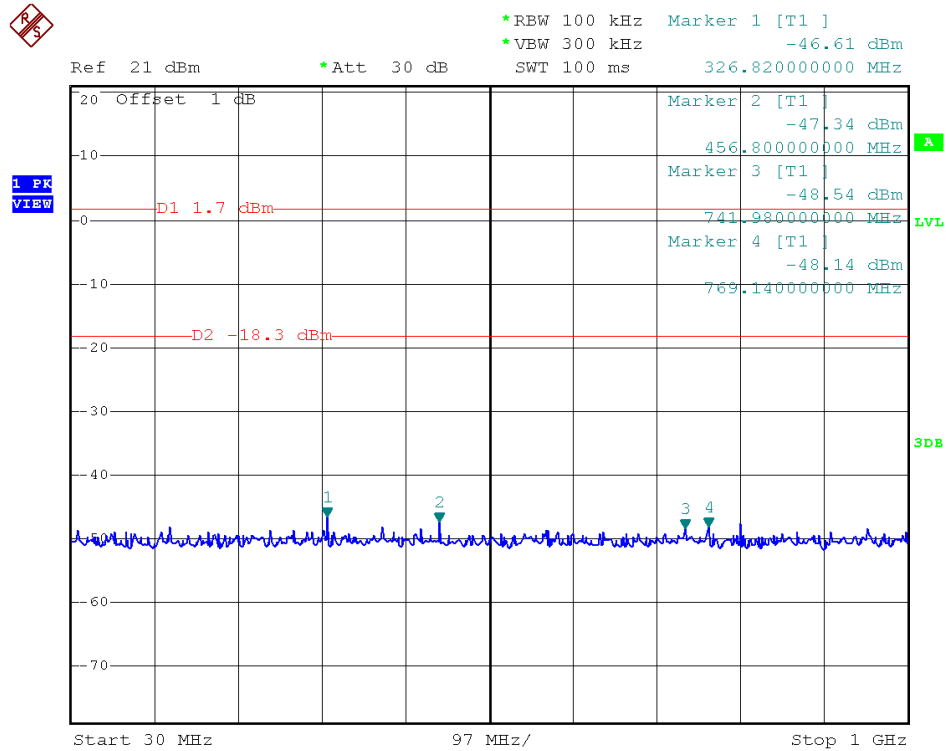


Channel = 39, 30MHz to 1GHz @ $\pi/4$ -DQPSK

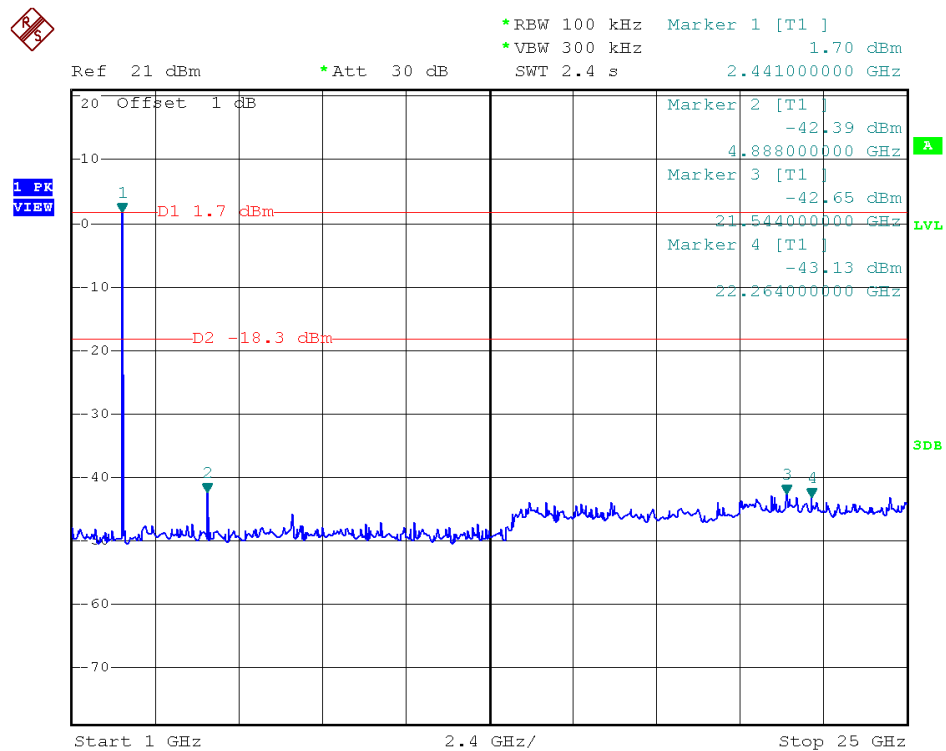


Channel = 39, 1GHz to 25GHz @ $\pi/4$ -DQPSK

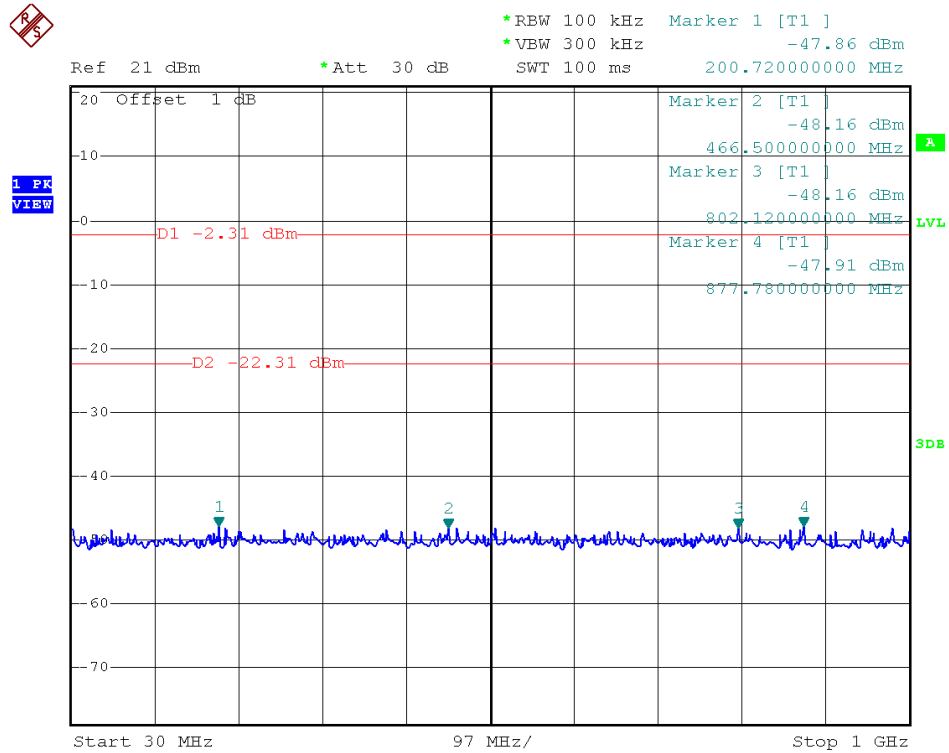


Channel = 78, 30MHz to 1GHz @ $\pi/4$ -DQPSK

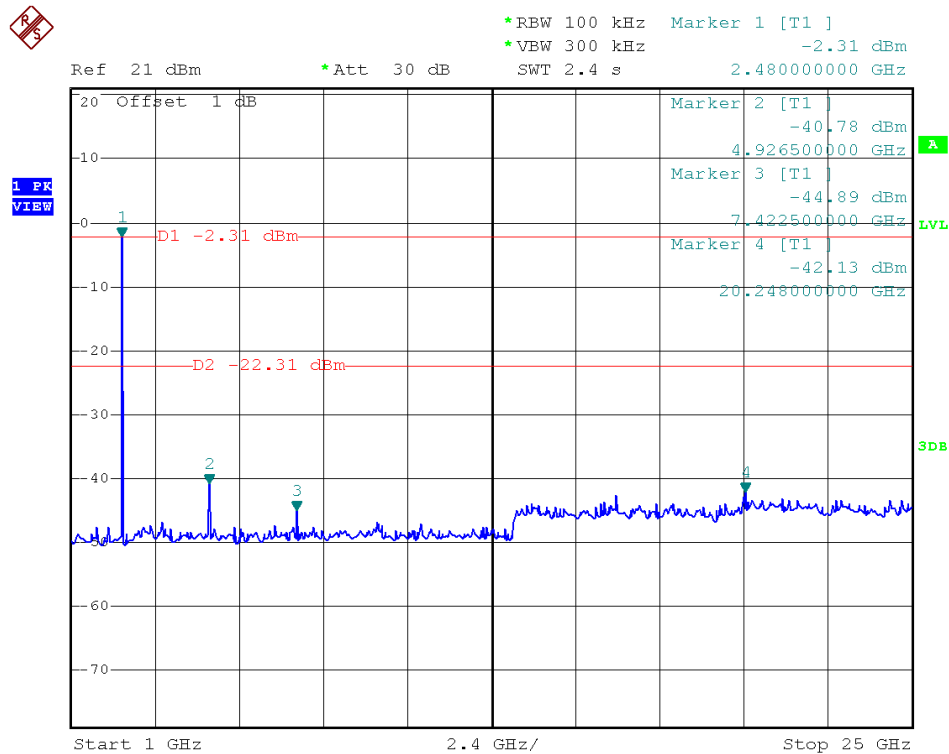


Channel = 78, 1GHz to 25GHz @ $\pi/4$ -DQPSK

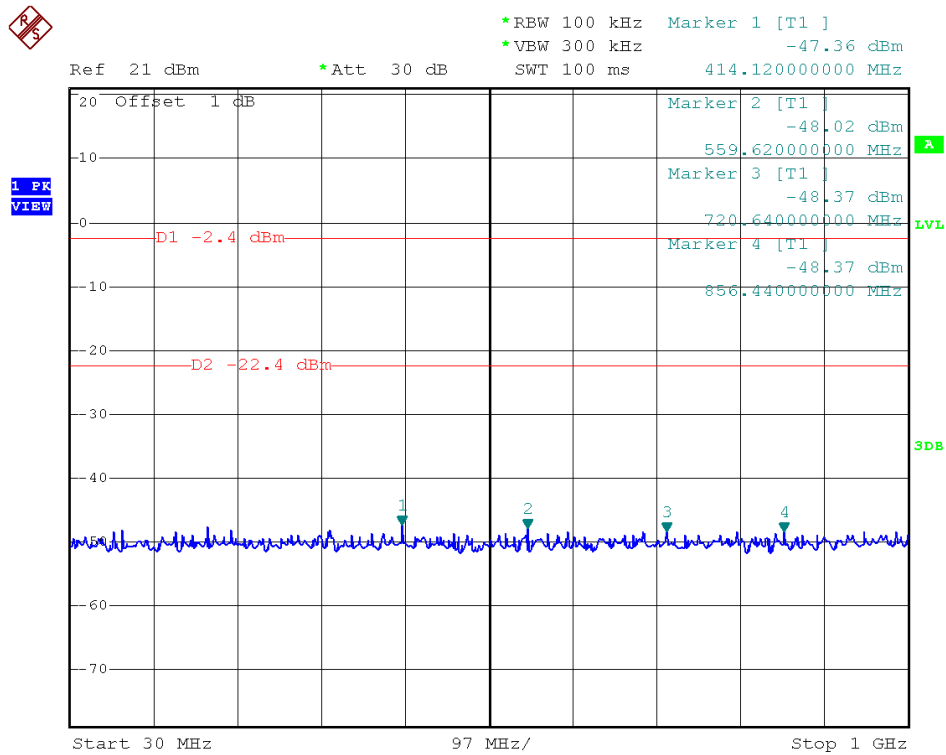


Channel = 0, 30MHz to 1GHz @ 8-DPSK

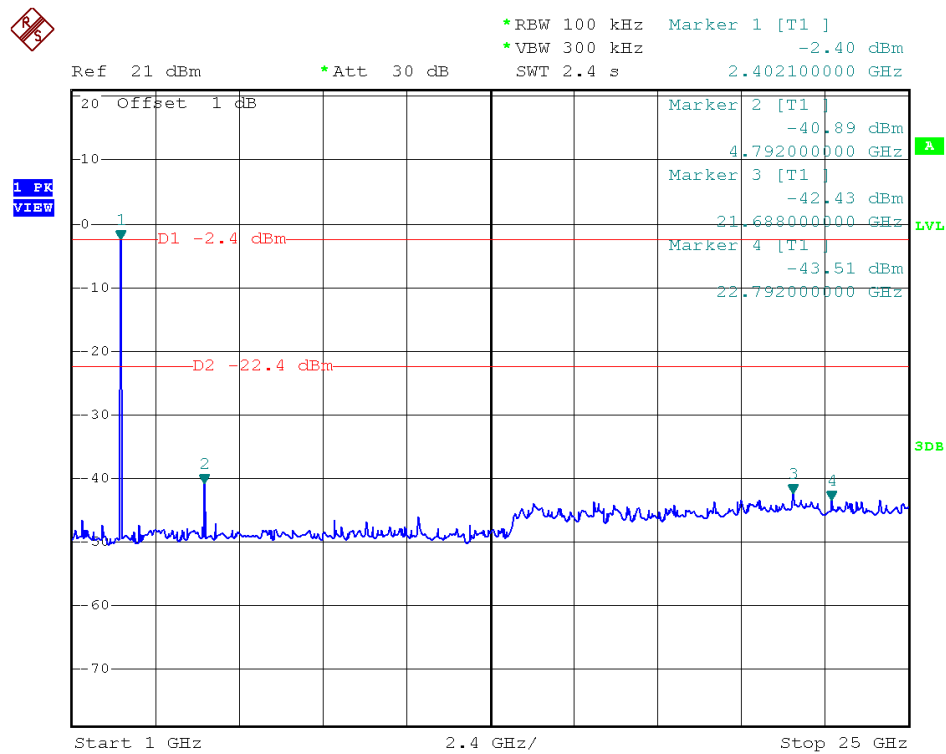


Channel = 0, 1GHz to 25GHz @ 8-DPSK

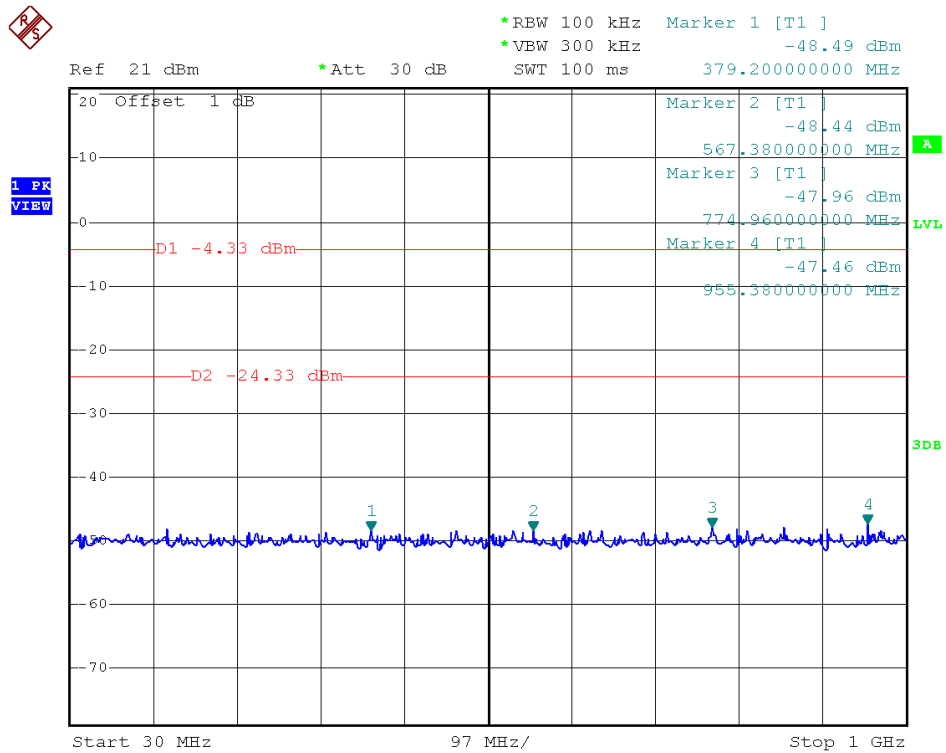


Channel = 39, 30MHz to 1GHz @ 8-DPSK

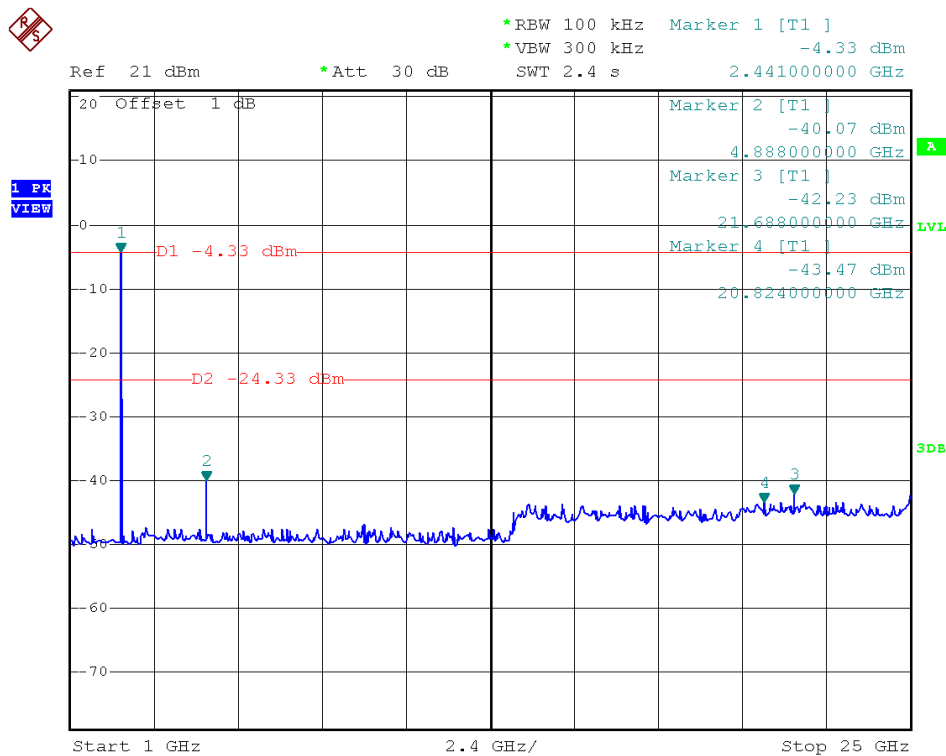

Channel = 39, 1GHz to 25GHz @ 8-DPSK

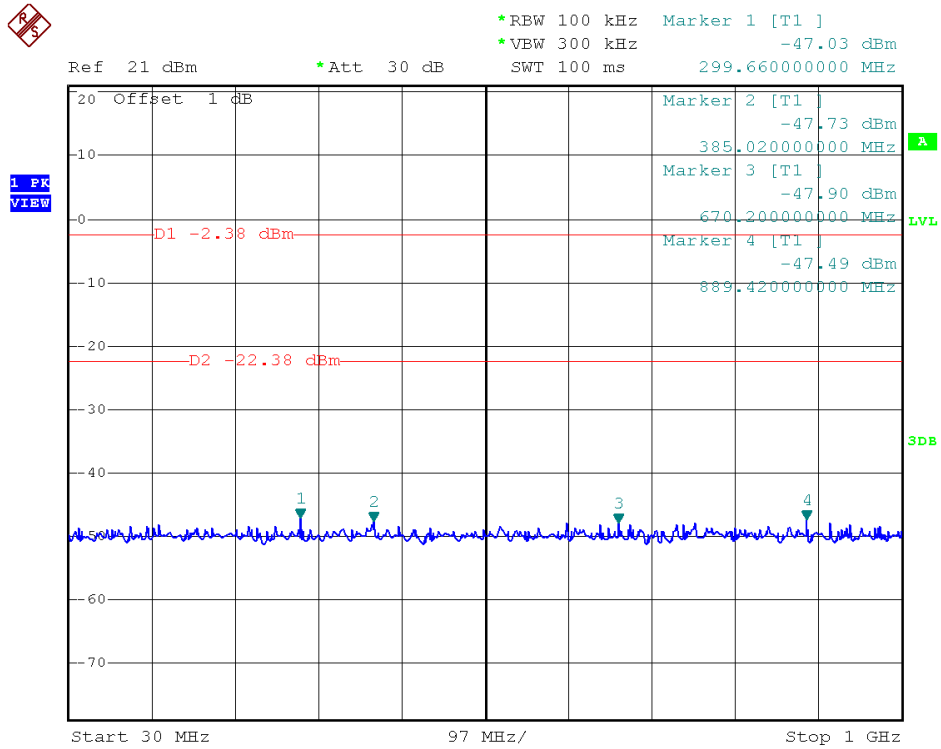

Channel = 78, 30MHz to 1GHz @ 8-DPSK

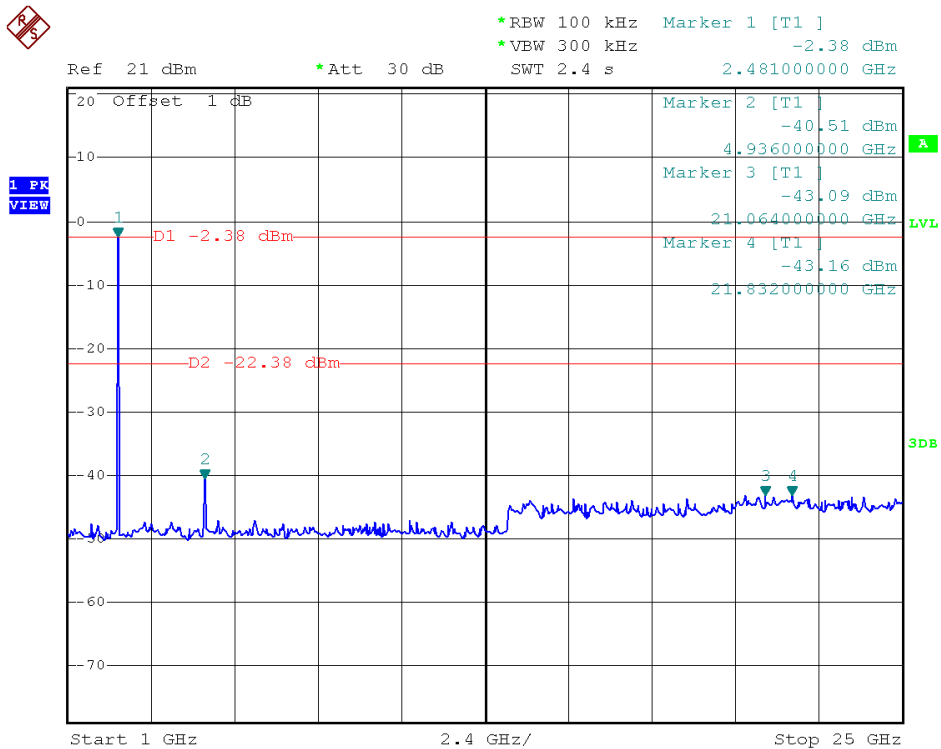


Channel = 78, 1GHz to 25GHz @ 8-DPSK

2.8. Conducted Band Edge

2.8.1. Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

2.8.2. Test Setup

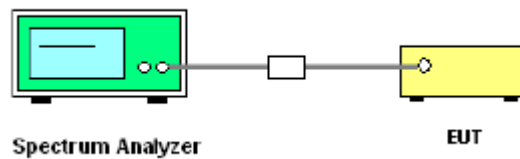


2.8.3. Test Procedure


1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set $RBW = 100\text{kHz}$ ($\geq 1\%$ span=10MHz), $VBW = 300\text{kHz}$ ($\geq RBW$). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

2.8.4. Test Result


Band edge – Conducted (Un-hopping)

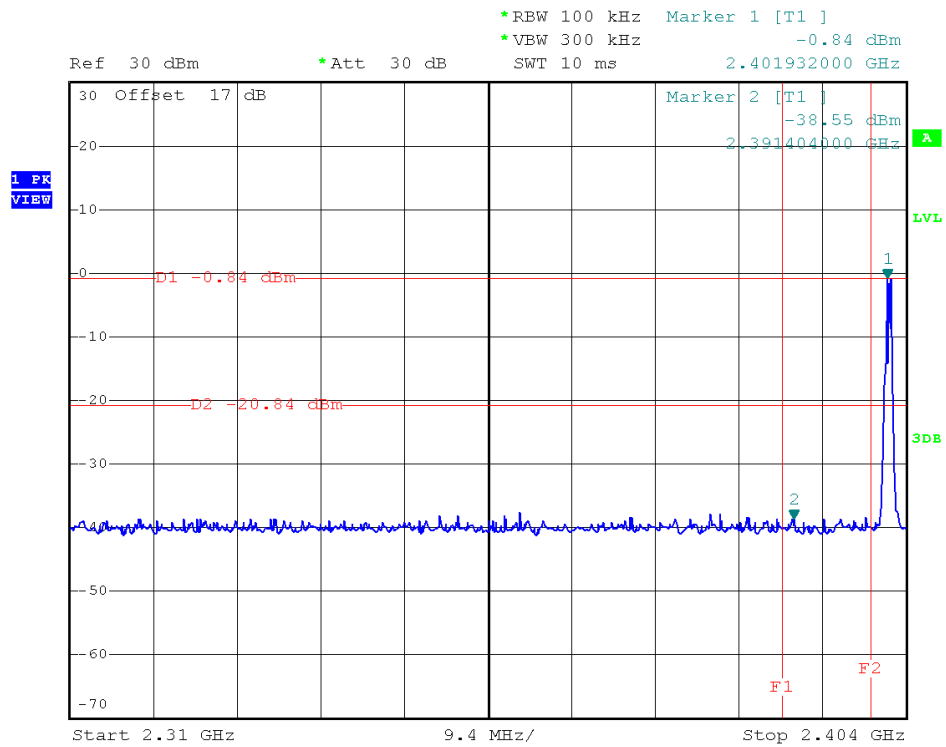


Low Band Edge Plot on channel 0 @ GFSK

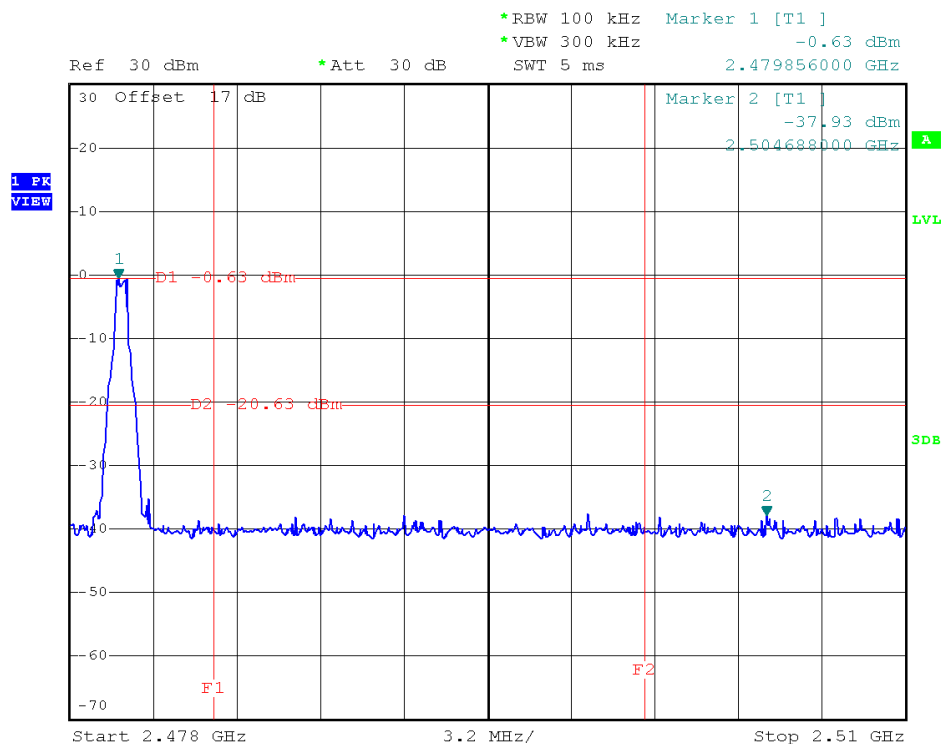


High Band Edge Plot on channel 78 @ GFSK

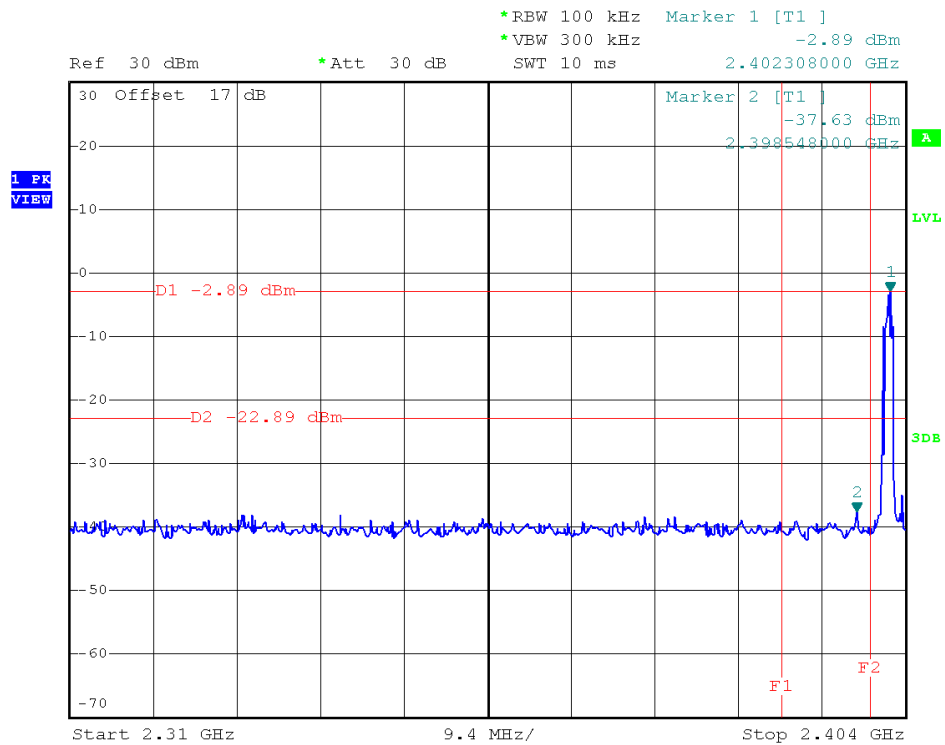


Low Band Edge Plot on channel 0 @ $\pi/4$ -DQPSK

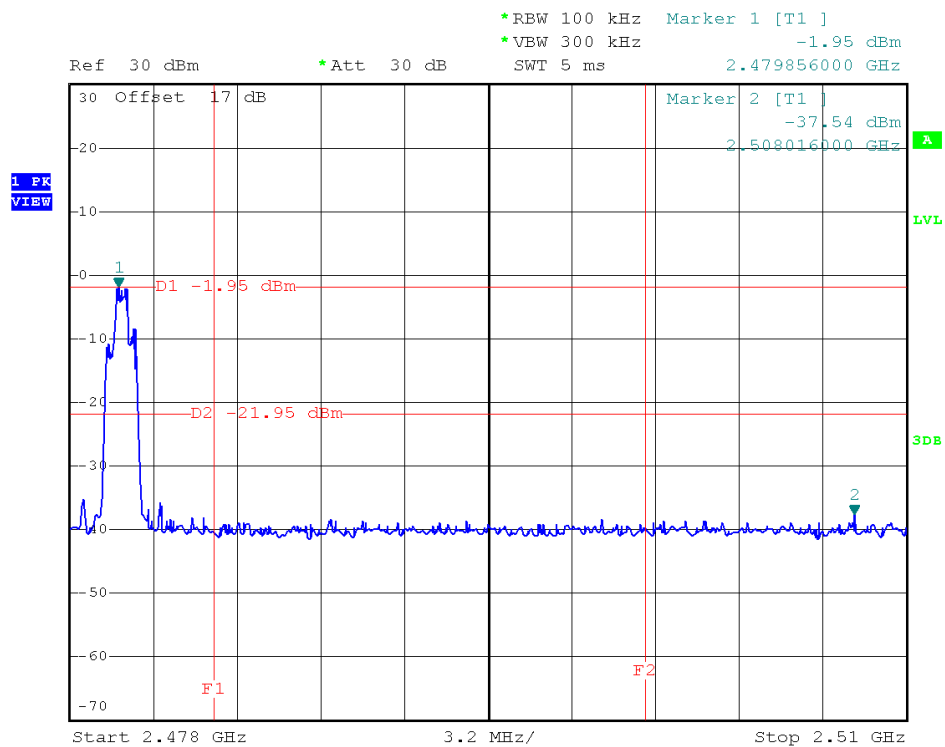

High Band Edge Plot on channel 78 @ $\pi/4$ -DQPSK

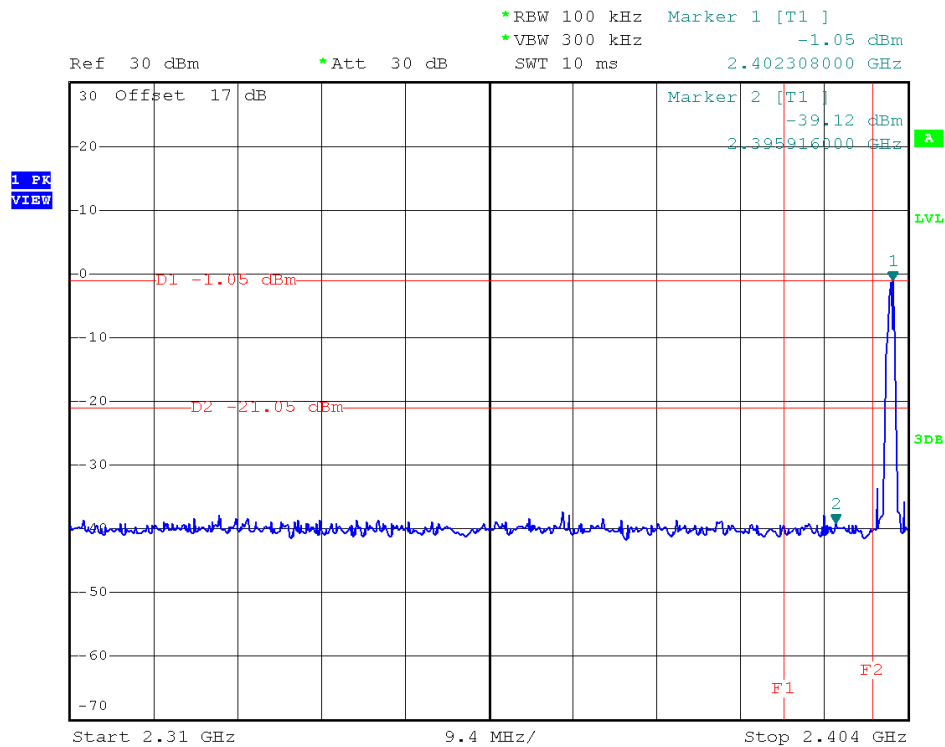


Low Band Edge Plot on channel 0 @8-DPSK

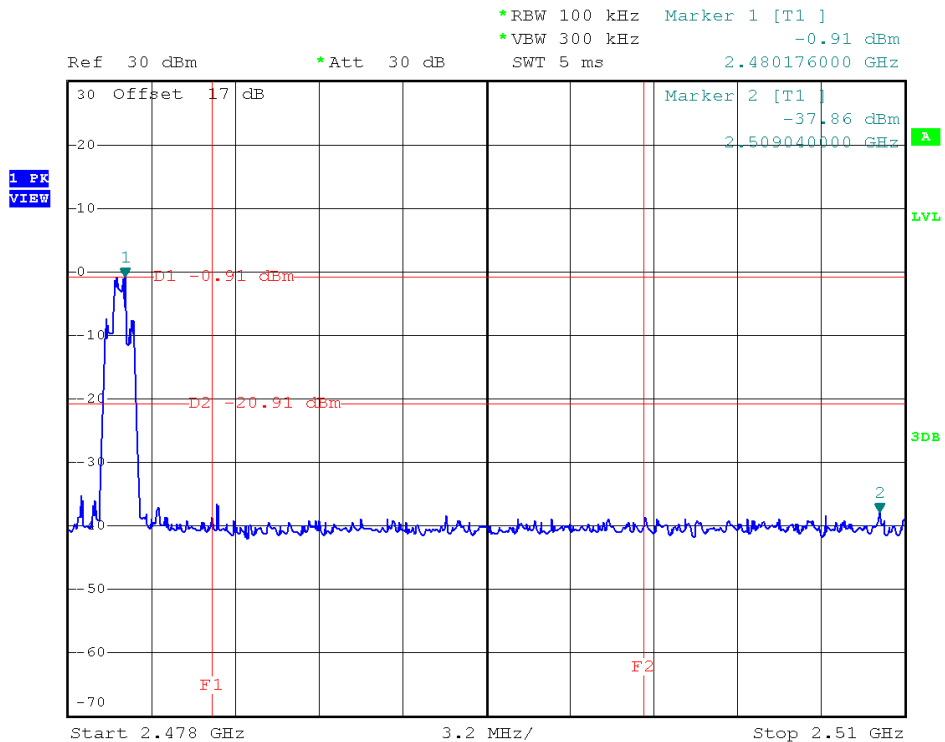


High Band Edge Plot on channel 78 @8-DPSK


Band edge - Conducted (hopping)

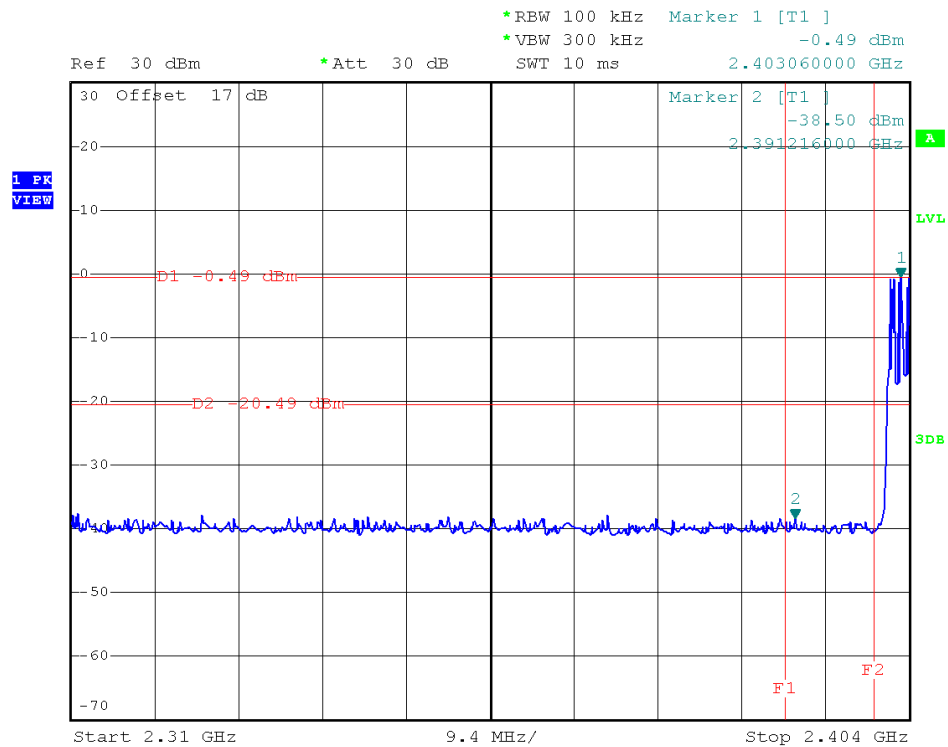


Low Band Edge Plot on channel 0 @ GFSK

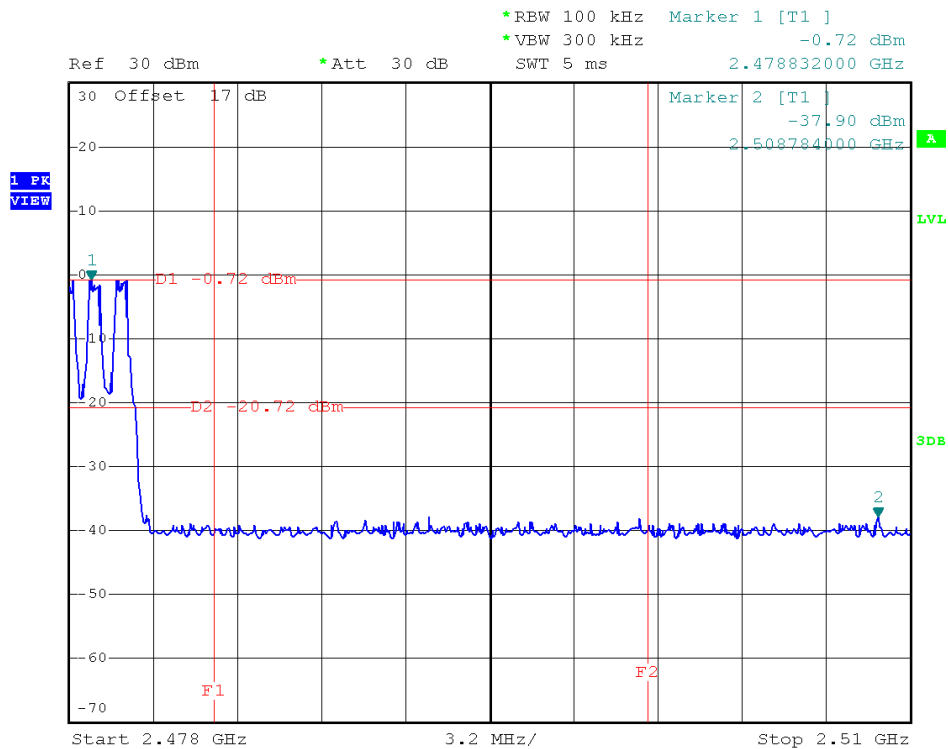


High Band Edge Plot on channel 78 @ GFSK

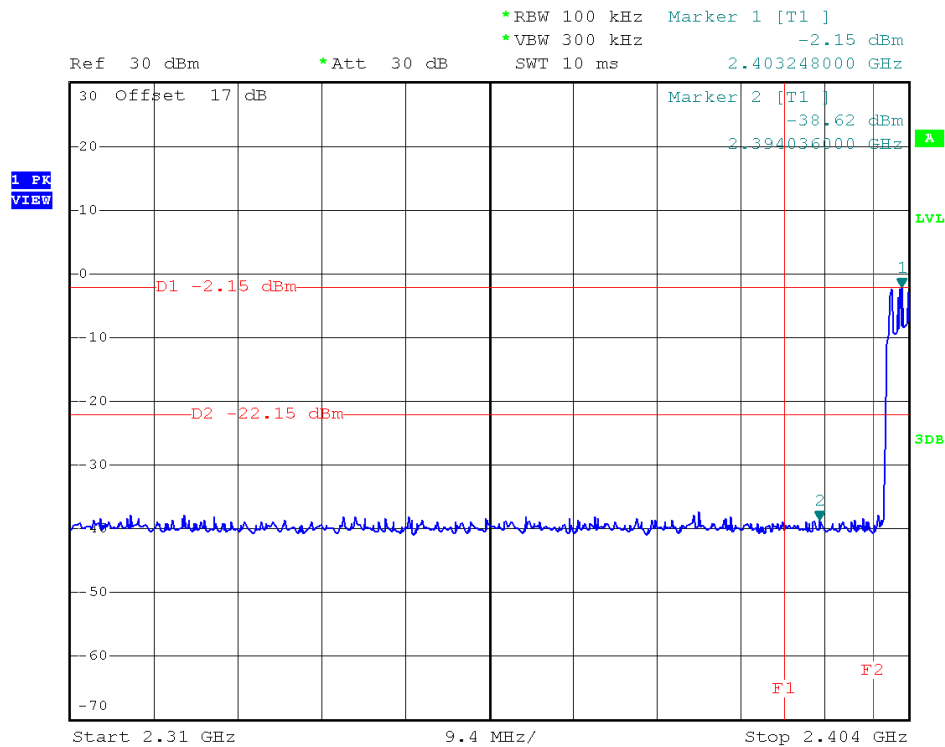


Low Band Edge Plot on channel 0 @ $\pi/4$ -DQPSK

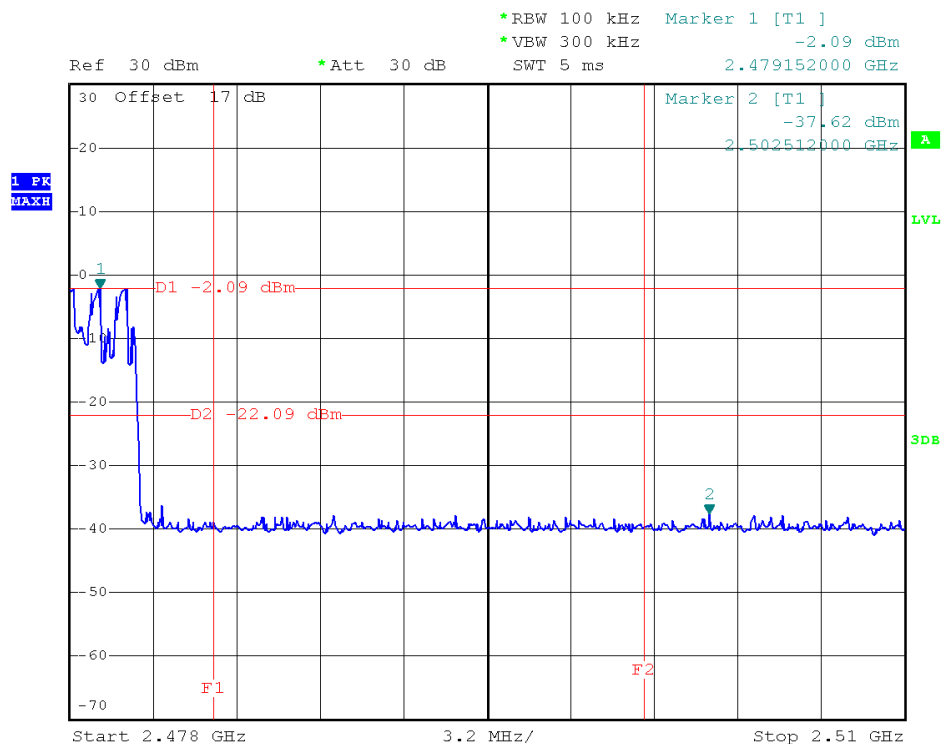

High Band Edge Plot on channel 0 @ $\pi/4$ -DQPSK

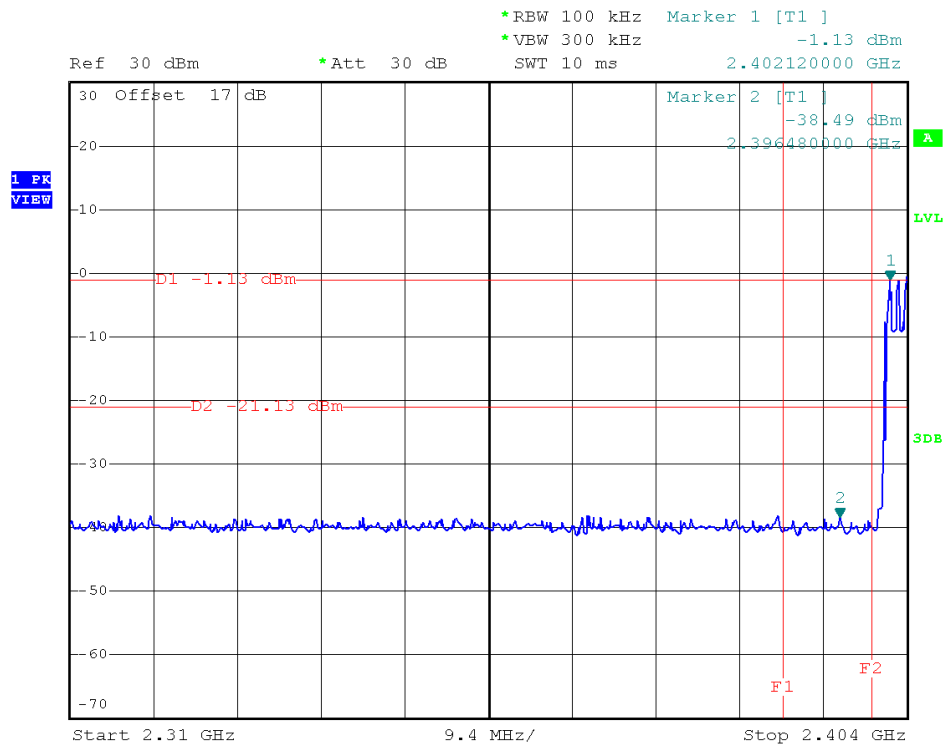

Low Band Edge Plot on channel 0 @8-DPSK

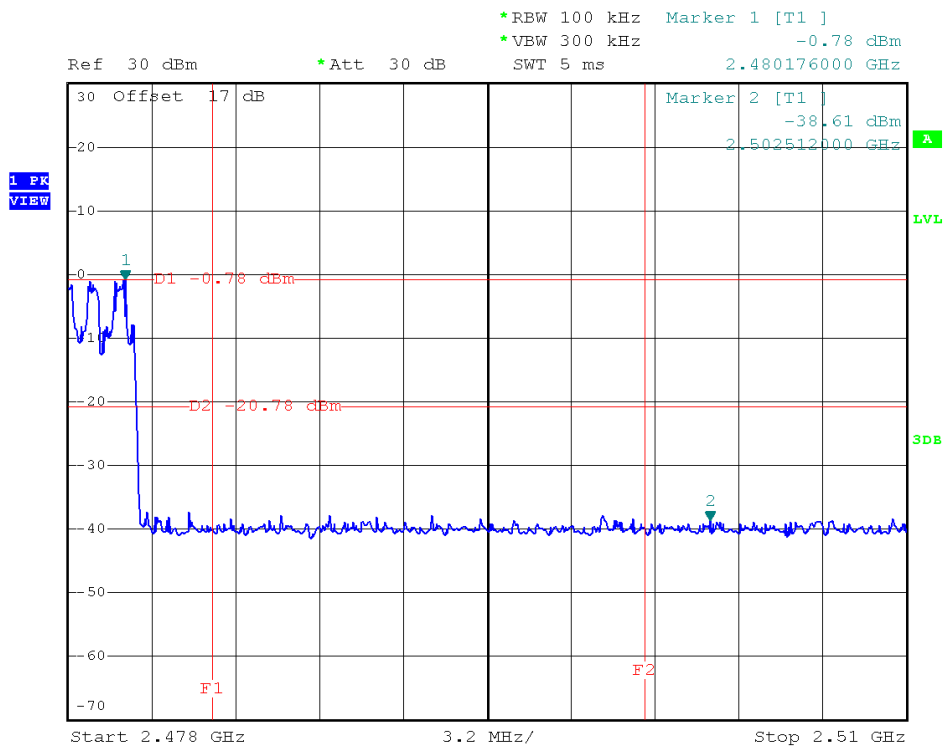

High Band Edge Plot on channel 0 @8-DPSK


2.9. Conducted Emission

2.9.1. Limit of Conducted Emissions

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

2.9.2. Test Setup

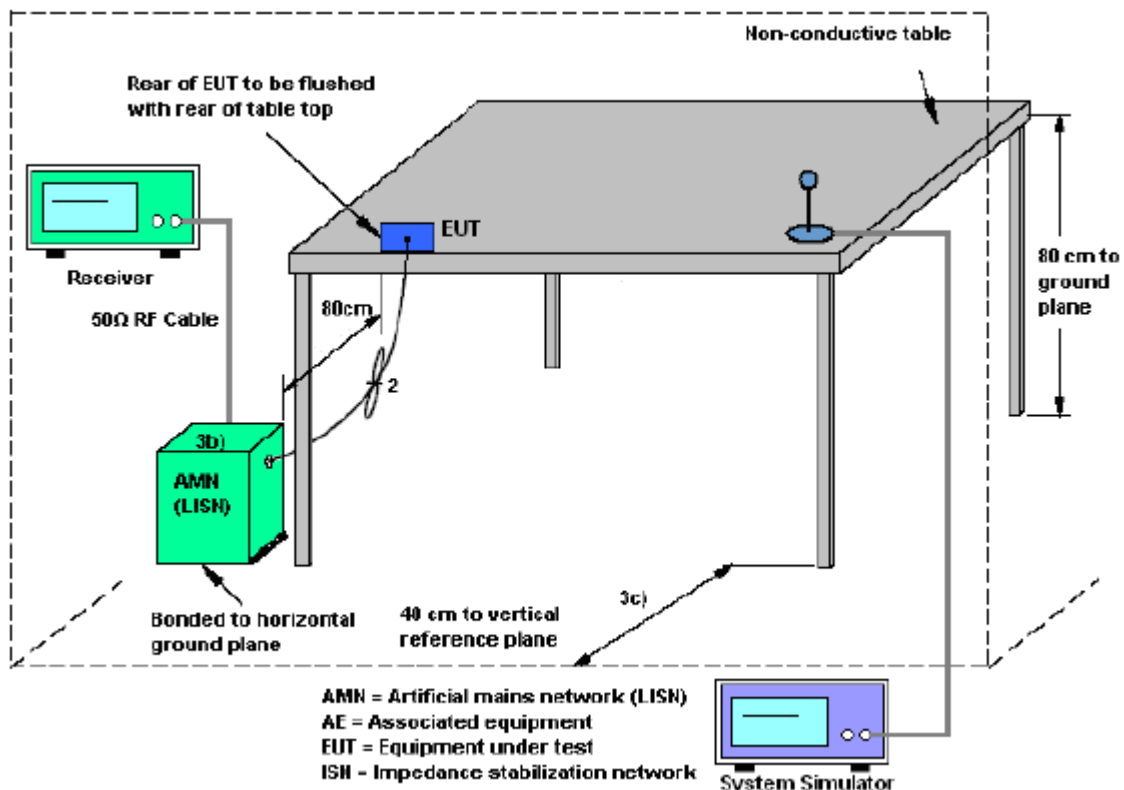

2.9.3. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.


7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.9.4. Test Result

The EUT configuration of the emission tests is Bluetooth Link + USB Cable (Charging from Adapter).

Adapter				
Model	CMS105			
Input	AC	100~240V	50/60Hz	0.15A
Output	DC	5V	1A	


Voltage Test

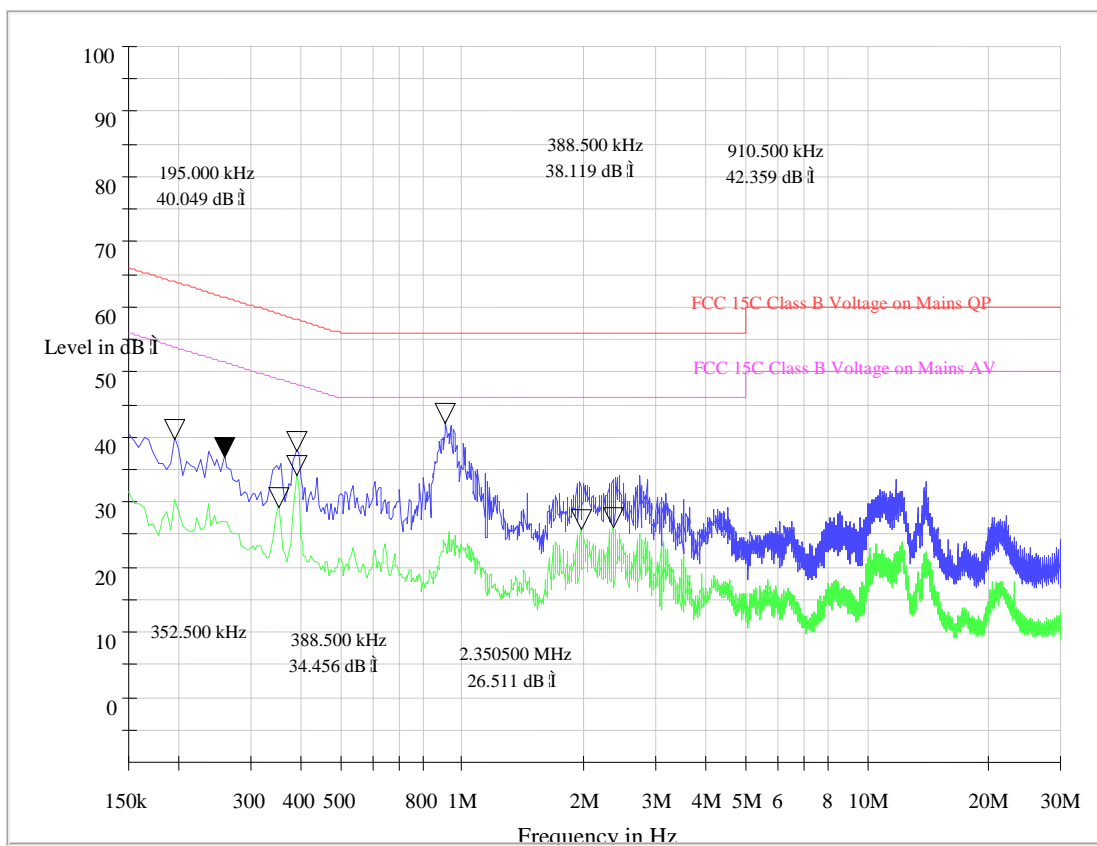

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals					
L Test Data					
QP			AV		
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)
0.195	63.8	40.05	0.353	48.9	29.51
0.258	61.5	37.18	0.389	48.1	34.46
0.389	58.1	38.12	1.959	48.9	26.05
0.911	56.0	42.36	2.351	46.00	26.51

Voltage Test

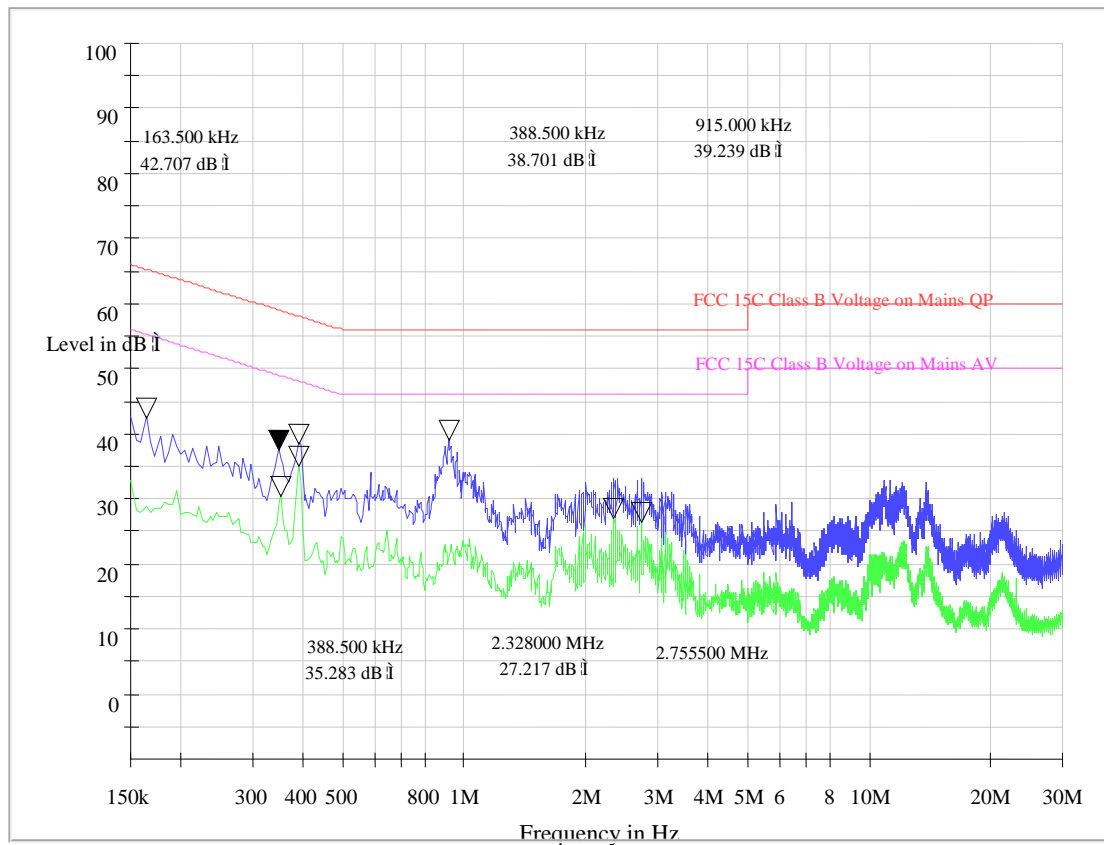

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals					
N Test Data					
QP			AV		
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)
0.164	65.3	42.71	0.353	48.9	30.74
0.348	59.0	37.64	0.389	48.1	35.28
0.389	58.1	38.70	2.328	46.0	27.22
0.915	56.0	39.24	2.756	46.0	26.81

2.10. Radiated Band Edges and Spurious Emission


2.10.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

2.10.2. Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

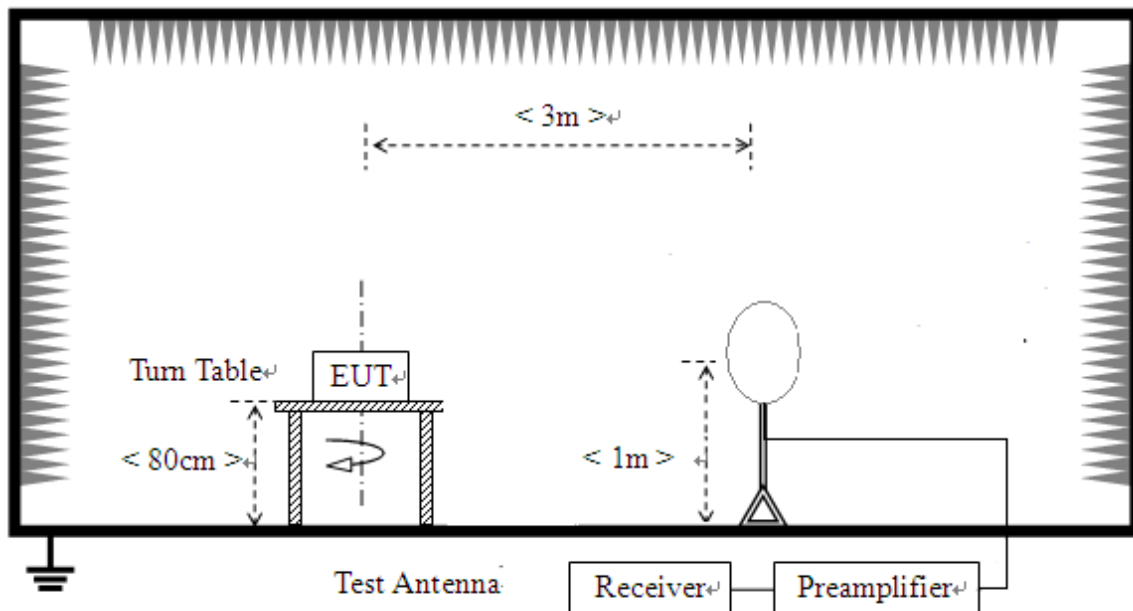

- 2) For radiated emissions from 30MHz to 1GHz

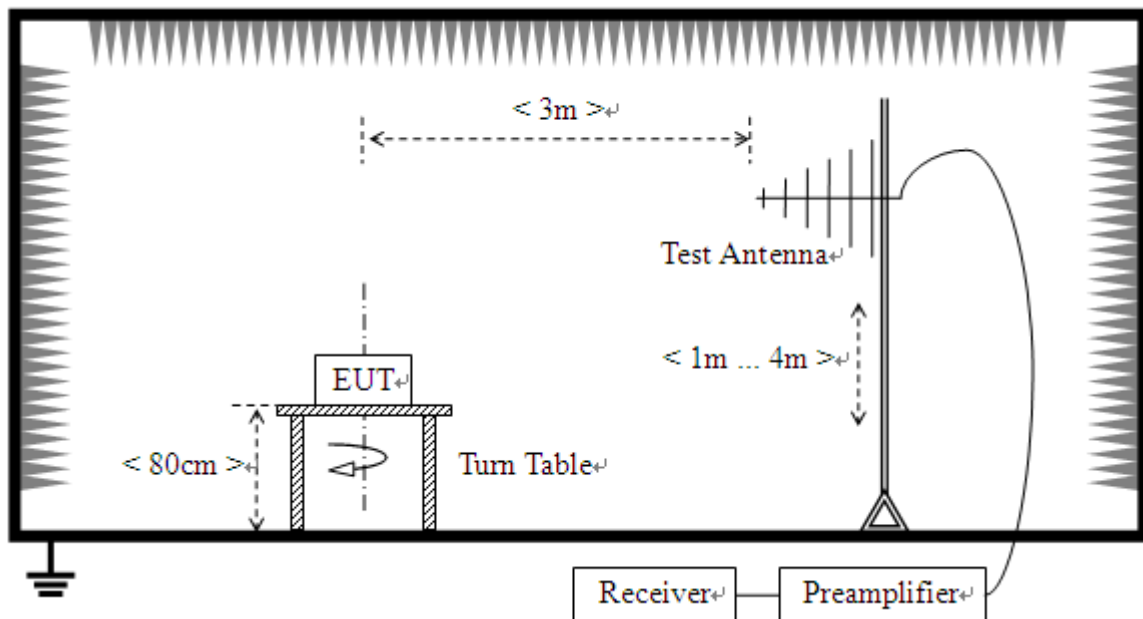

- 3) For radiated emissions above 1GHz

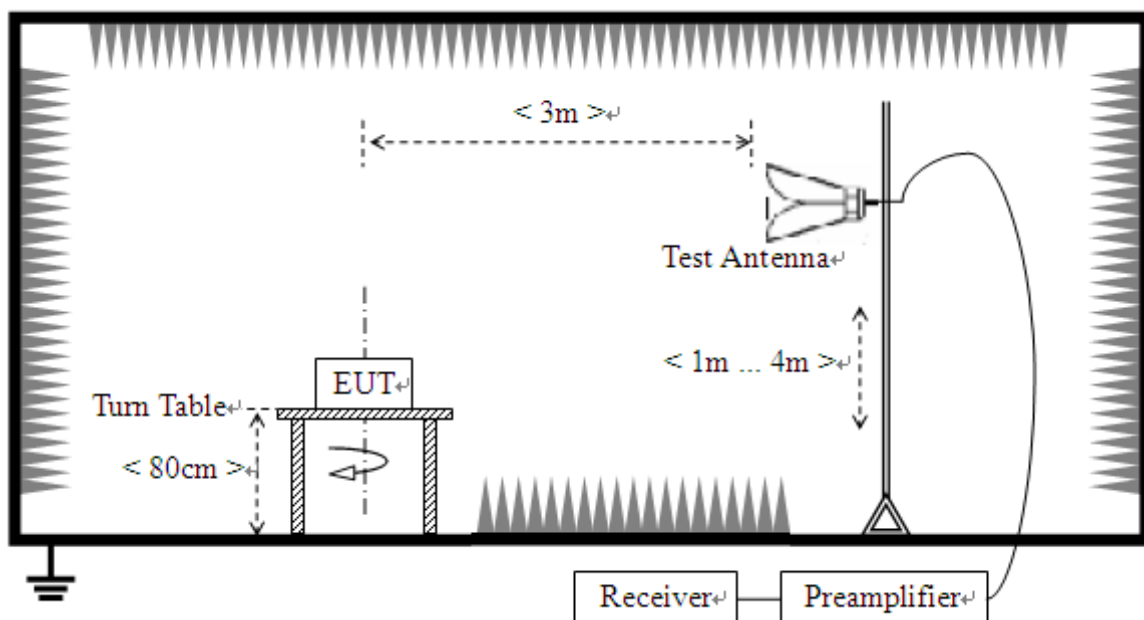

2.10.3. Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.


2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1 \text{ GHz}$; VBW \geq RBW;Sweep = auto; Detector function = peak; Trace = max hold for peak
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
8. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
9. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3dB lower than the applicable limit, the peak emission level will be reported, otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

2.10.4. Test Result

For 9KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30MHz to 1000MHz

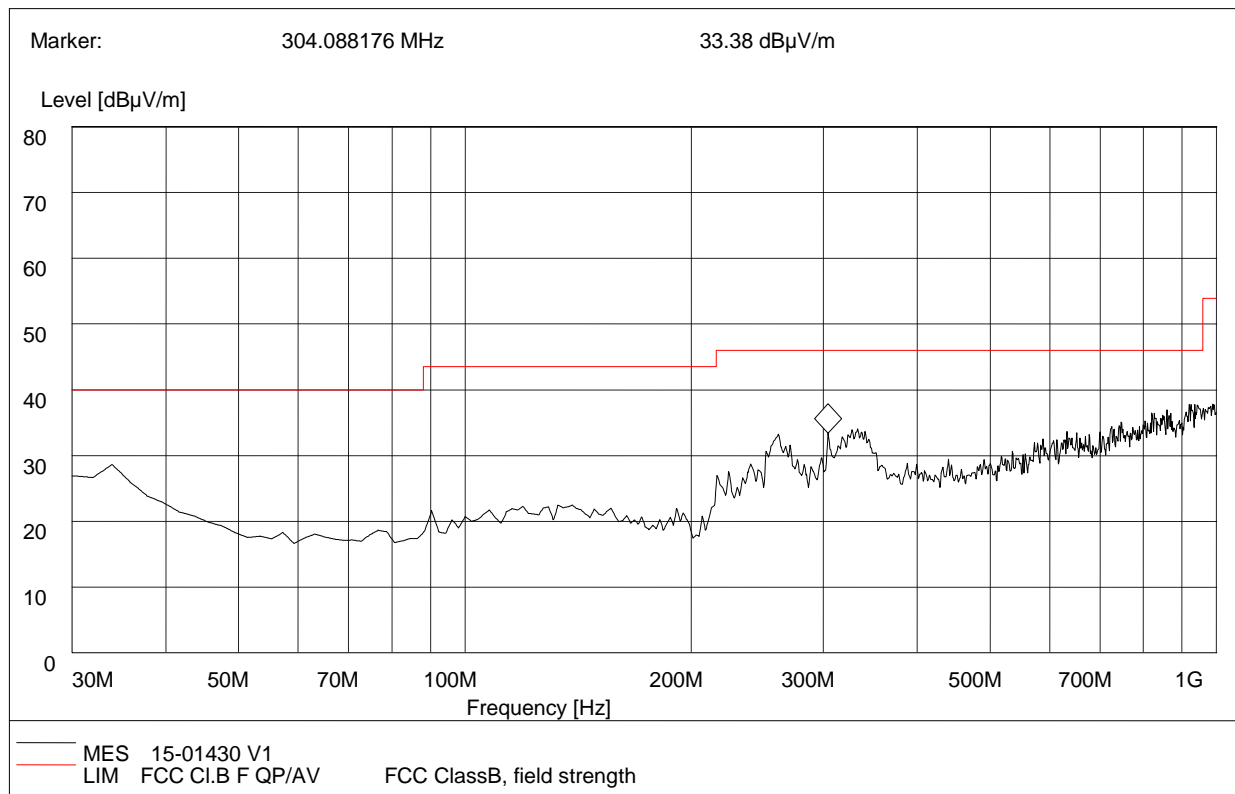

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
33.160	37.49	120.000	100.0	40.00	Vertical	Pass
261.340	31.56	120.000	100.0	46.00	Vertical	Pass
304.088	33.38	120.000	100.0	46.00	Vertical	Pass

(Plot A: 30MHz to 1GHz, Antenna Vertical)

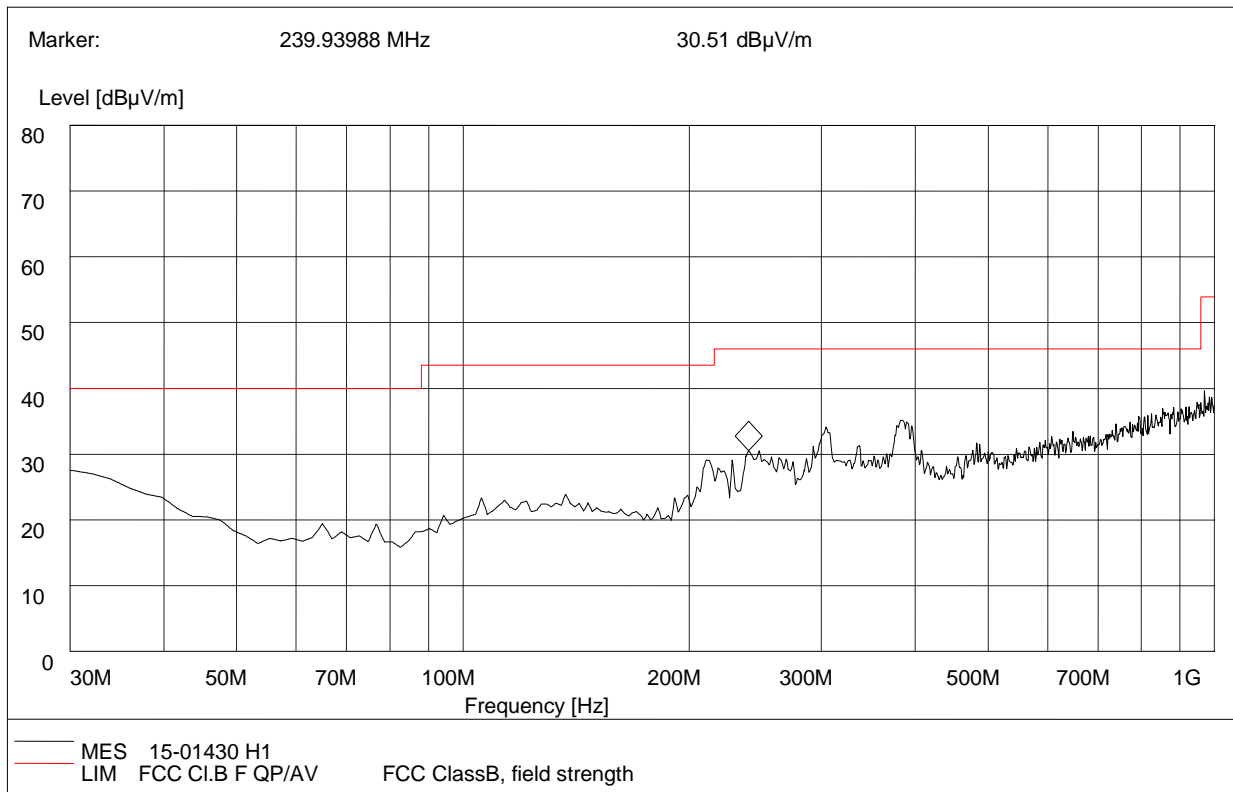

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
30.000	28.22	120.000	100.0	40.00	Horizontal	Pass
239.940	30.51	120.000	100.0	46.0	Horizontal	Pass
304.150	33.16	120.000	100.0	46.0	Horizontal	Pass
383.260	33.67	120.000	100.0	46.0	Horizontal	Pass

(Plot B: 30MHz to 1GHz, Antenna Horizontal)

For 1GHz to 25GHz (10th Harmonic)
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK-2402MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4	PK	74.0	-17.6	1.01 H	228	24.20	32.20
2	2390.00	43.7	AV	54.0	-10.3	1.01 H	228	11.50	32.20
3	*2402.00	104.4	PK	/	/	1.03 H	112	72.20	32.20
4	*2402.00	102.0	AV	/	/	1.03 H	112	69.80	32.20
5	4804.00	50.8	PK	74.00	-23.2	1.00 H	254	45.50	5.30
6	4804.00	42.6	AV	54.00	-11.4	1.00 H	254	37.30	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK-2402MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0	PK	74.0	-17.0	1.11 V	228	24.80	32.20
2	2390.00	44.2	AV	54.0	-9.8	1.11 V	228	12.00	32.20
3	*2402.00	117.1	PK	/	/	1.09 V	112	84.90	32.20
4	*2402.00	113.6	AV	/	/	1.03 V	112	81.40	32.20
5	4804.00	54.4	PK	74.00	-19.6	1.21 V	254	49.10	5.30
6	4804.00	44.7	AV	54.00	-9.3	1.21 V	254	39.40	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK_2441MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	107.5	PK	/	/	1.01 H	210	75.30	32.20
2	*2441.00	105.9	AV	/	/	1.01 H	210	73.70	32.20
3	4882.00	53.8	PK	74.00	-20.2	1.03 H	272	48.50	5.30
4	4882.00	43.2	AV	54.00	-10.8	1.03 H	272	37.90	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK_2441MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	109.0	PK	/	/	1.09 V	112	76.80	32.20
2	*2441.00	105.3	AV	/	/	1.09 V	112	73.10	32.20
3	4884.00	56.5	PK	74.00	-17.5	1.21 V	254	51.20	5.30
4	4884.00	41.5	AV	54.00	-12.5	1.21 V	254	36.20	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	108.2	PK	/	/	1.05 V	215	75.90	32.30
2	*2480.00	106.8	AV	/	/	1.05 V	215	74.50	32.30
3	2483.50	57.3	PK	74.0	-16.7	1.05 V	211	24.90	32.40
4	2483.50	45.0	AV	54.0	-9.0	1.05 V	211	12.60	32.40
5	4960.00	52.4	PK	74.0	-21.6	1.45 V	320	46.90	5.50
6	4960.00	45.3	AV	54.0	-8.7	1.45 V	320	39.80	5.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	118.7	PK	/	/	1.05 V	174	86.40	32.30
2	*2480.00	116.8	AV	/	/	1.05 V	174	84.50	32.30
3	2483.50	55.5	PK	74.0	-18.5	1.05 V	177	23.10	32.40
4	2483.50	45.7	AV	54.0	-8.3	1.05 V	177	13.30	32.40
5	4960.00	55.9	PK	74.0	-18.1	1.45 V	201	50.40	5.50
6	4960.00	40.9	AV	54.0	-13.1	1.45 V	201	35.40	5.50

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M ($\pi/4$ -DQPSK -2402MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.7	PK	74.0	-17.3	1.01 H	228	24.50	32.20
2	2390.00	43.9	AV	54.0	-10.1	1.01 H	228	11.70	32.20
3	*2402.00	107.4	PK	/	/	1.03 H	112	75.20	32.20
4	*2402.00	107.0	AV	/	/	1.03 H	112	74.80	32.20
5	4804.00	51.8	PK	74.00	-22.2	1.00 H	254	46.50	5.30
6	4804.00	44.6	AV	54.00	-9.4	1.00 H	254	39.30	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M ($\pi/4$ -DQPSK -2402MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0	PK	74.0	-17.0	1.11 V	228	24.80	32.20
2	2390.00	43.6	AV	54.0	-10.4	1.11 V	228	11.40	32.20
3	*2402.00	107.1	PK	/	/	1.09 V	112	74.90	32.20
4	*2402.00	104.6	AV	/	/	1.03 V	112	72.40	32.20
5	4804.00	54.4	PK	74.00	-19.6	1.21 V	254	49.10	5.30
6	4804.00	44.0	AV	54.00	-10.0	1.21 V	254	38.70	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M ($\pi/4$ -DQPSK _2441MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	110.3	PK	/	/	1.01 H	210	78.10	32.20
2	*2441.00	110.1	AV	/	/	1.01 H	210	77.90	32.20
3	4882.00	54.8	PK	74.00	-19.2	1.03 H	272	49.50	5.30
4	4882.00	41.2	AV	54.00	-12.8	1.03 H	272	35.90	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M ($\pi/4$ -DQPSK _2441MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	110.0	PK	/	/	1.09 V	112	77.80	32.20
2	*2441.00	107.3	AV	/	/	1.09 V	112	75.10	32.20
3	4884.00	55.8	PK	74.00	-18.2	1.21 V	254	50.50	5.30
4	4884.00	41.5	AV	54.00	-12.5	1.21 V	254	36.20	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M ($\pi/4$ -DQPSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	110.2	PK	/	/	1.05 V	215	77.90	32.30
2	*2480.00	108.1	AV	/	/	1.05 V	215	75.80	32.30
3	2483.50	57.3	PK	74.0	-16.7	1.05 V	211	24.90	32.40
4	2483.50	43.0	AV	54.0	-11.0	1.05 V	211	10.60	32.40
5	4960.00	52.4	PK	74.0	-21.6	1.45 V	320	46.90	5.50
6	4960.00	44.3	AV	54.0	-9.7	1.45 V	320	38.80	5.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M ($\pi/4$ -DQPSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.5	PK	/	/	1.05 V	174	77.20	32.30
2	*2480.00	106.8	AV	/	/	1.05 V	174	74.50	32.30
3	2483.50	55.5	PK	74.0	-18.5	1.05 V	177	23.10	32.40
4	2483.50	43.7	AV	54.0	-10.3	1.05 V	177	11.30	32.40
5	4960.00	55.9	PK	74.0	-18.1	1.45 V	201	50.40	5.50
6	4960.00	42.9	AV	54.0	-11.1	1.45 V	201	37.40	5.50

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8-DQPSK -2402MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7	PK	74.0	-20.3	1.01 H	228	21.50	32.20
2	2390.00	43.9	AV	54.0	-10.1	1.01 H	228	11.70	32.20
3	*2402.00	111.4	PK	/	/	1.03 H	112	79.20	32.20
4	*2402.00	108.0	AV	/	/	1.03 H	112	75.80	32.20
5	4804.00	51.8	PK	74.00	-22.2	1.00 H	254	46.50	5.30
6	4804.00	43.6	AV	54.00	-10.4	1.00 H	254	38.30	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8-DQPSK -2402MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0	PK	74.0	-17.0	1.11 V	228	24.80	32.20
2	2390.00	43.6	AV	54.0	-10.4	1.11 V	228	11.40	32.20
3	*2402.00	117.1	PK	/	/	1.09 V	112	84.90	32.20
4	*2402.00	113.6	AV	/	/	1.03 V	112	81.40	32.20
5	4804.00	54.4	PK	74.00	-19.6	1.21 V	254	49.10	5.30
6	4804.00	44.4	AV	54.00	-9.6	1.21 V	254	39.10	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8-DQPSK _2441MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	107.3	PK	/	/	1.01 H	210	75.10	32.20
2	*2441.00	104.1	AV	/	/	1.01 H	210	71.90	32.20
3	4882.00	53.8	PK	74.00	-20.2	1.03 H	272	48.50	5.30
4	4882.00	46.2	AV	54.00	-7.8	1.03 H	272	40.90	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8-DQPSK _2441MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	109.0	PK	/	/	1.09 V	112	76.80	32.20
2	*2441.00	105.3	AV	/	/	1.09 V	112	73.10	32.20
3	4884.00	56.8	PK	74.00	-17.2	1.21 V	254	51.50	5.30
4	4884.00	43.5	AV	54.00	-10.5	1.21 V	254	38.20	5.30

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8-DQPSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	116.2	PK	/	/	1.05 V	215	83.90	32.30
2	*2480.00	112.8	AV	/	/	1.05 V	215	80.50	32.30
3	2483.50	57.3	PK	74.0	-16.7	1.05 V	211	24.90	32.40
4	2483.50	43.5	AV	54.0	-10.5	1.05 V	211	11.10	32.40
5	4960.00	52.4	PK	74.0	-21.6	1.45 V	320	46.90	5.50
6	4960.00	44.3	AV	54.0	-9.7	1.45 V	320	38.80	5.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8-DQPSK _2480MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	116.8	PK	/	/	1.05 V	174	84.50	32.30
2	*2480.00	114.8	AV	/	/	1.05 V	174	82.50	32.30
3	2483.50	55.5	PK	74.0	-18.5	1.05 V	177	23.10	32.40
4	2483.50	42.7	AV	54.0	-11.3	1.05 V	177	10.30	32.40
5	4960.00	55.9	PK	74.0	-18.1	1.45 V	201	50.40	5.50
6	4960.00	42.9	AV	54.0	-11.1	1.45 V	201	37.40	5.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
- Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value
5. " * ": Fundamental frequency.

2.11. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is -0.14dBm, the maximum gain of antenna is -0.5dBi, the maximum output power is -0.64dBm (0.863mW), which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.

3. List of measuring equipment

Description	Manufacturer	Model	Serial No.	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB26	A0304218	2014.06.11	2015.06.10	Radiation
Loop Antenna	Schwarzbeck	HFH2-Z2	100047	2014.06.11	2015.06.10	Radiation
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2014.06.10	2015.06.09	Radiation
Double ridge horn antenna	R&S	HF960	100150	2014.06.11	2015.06.10	Radiation
Ultra-wideband antenna	R&S	HL562	100089	2014.06.10	2015.06.09	Radiation
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2014.06.11	2015.06.10	Radiation
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2014.06.10	2015.06.09	Radiation
Amplifier 1G~18GHz	R&S	MITEQ AFS42-001 01800	25-S-42	2014.06.05	2015.06.04	Radiation
Amplifier 18G~40GHz	R&S	JS42-18002 600-28-5A	12111.0980.00	2014.06.05	2015.06.04	Radiation
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2014.06.11	2015.06.10	Radiation
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.11	2015.06.10	Conducted
Power Meter	R&S	NRVS	1020.1809.02	2014.06.08	2015.06.07	Conducted
Power Sensor	R&S	NRV-Z4	823.3618.03	2014.06.08	2015.06.07	Conducted
Test Receiver	R&S	ESCS30	A0304260	2014.06.11	2015.06.10	Conducted
LISN	ROHDE&SCHWARZ	ESH2-Z5	A0304221	2014.06.11	2015.06.10	Conducted
Cable	SUNHNER	SUCOFLEX 100	/	2014.06.05	2015.06.04	Radiation
Cable	SUNHNER	SUCOFLEX 104	/	2014.06.05	2015.06.04	Radiation

** END OF REPORT **