

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

客 戶 料 號:

CUST P/N:

言之行 料 號:

Y Z X P/N:

YZX8860

產 品 型 號:

DESC:

DD88*60

日 期:

DATE:

2022/8/20

版 本:

Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE

Dongguan Yanzhixing Electronic Technology Co., LTD


Factory address: 8 Shima Xinwei, Tangxia Town, Dongguan City

TEL: 18033336905

SPECIFICATION

產品型號: DESC	DD88*60 双线圈	版本 Rev: A.0	客戶 CUST:	XXX
			客戶料号 CUST P/N:	


一、尺寸 DIMENSION:(mm)

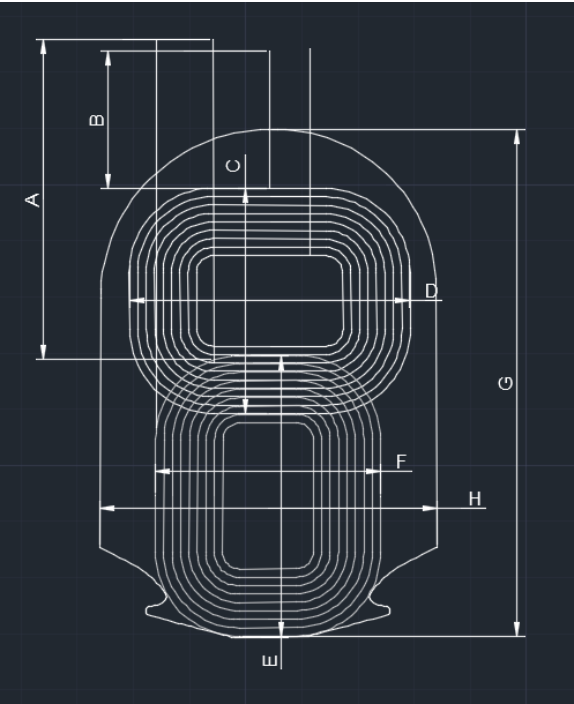

A	80.0±3.5
B	20.5±3.5
C	40±2
D	47±2
E	48±2
F	41±2
G	88±1.5
H	60±1.5

- 注：如图所示
- 1.单个磁片尺寸为 F88*60mm 厚度 0.8±0.2mm,用双面胶 粘接,并且带手撕位;
 - 2.下线圈位置靠隔磁下边贴 合
 - 3.图片为参考具体细节以样 品为准

二、原理图 SCHEMATIC DIAGRAM:

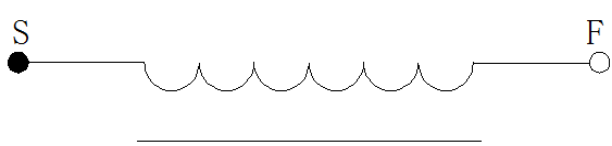

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	1.15±0.1mm	9Ts	CCW
2	S	F	1.15±0.1mm	9Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	上线圈 6.75uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	下线圈 6.6uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤60m Ω		LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
------------------------	-----------------------
