



Report No.: FR432902B

## FCC RADIO TEST REPORT

FCC ID : 2AMK2-RM02AA

Equipment : reMarkable Paper Pro

Brand Name : reMarkable

Model Name : RM02A

Applicant : reMarkable AS

Fridtjof Nansens vei 12, 0369 Oslo, Norway

Manufacturer : reMarkable AS

Fridtjof Nansens vei 12, 0369 Oslo, Norway

Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 29, 2024 and testing was performed from Apr. 19, 2024 to May 28, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## **Table of Contents**

Report No.: FR432902B

His	tory o	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	5
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Carrier Frequency Channel	7
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	9
	2.4	Support Unit used in test configuration and system	9
	2.5	EUT Operation Test Setup	
	2.6	Measurement Results Explanation Example	10
3	Test	Result	11
	3.1	6dB and 99% Bandwidth Measurement	11
	3.2	Output Power Measurement	12
	3.3	Power Spectral Density Measurement	13
	3.4	Conducted Band Edges and Spurious Emission Measurement	14
	3.5	Radiated Band Edges and Spurious Emission Measurement	15
	3.6	AC Conducted Emission Measurement	19
	3.7	Antenna Requirements	21
4	List	of Measuring Equipment	22
5	Meas	surement Uncertainty	24
Ар	pendi	x A. Conducted Test Results	
Ap	pendi:	x B. AC Conducted Emission Test Result	
Αp	pendi	x C. Radiated Spurious Emission	
-		x D. Radiated Spurious Emission Plots	
-		x E. Duty Cycle Plots	
Αp	pendi	x F. Setup Photographs	

TEL: 886-3-327-3456 Page Number : 2 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## History of this test report

Report No.: FR432902B

Report No.	Version	Description	Issue Date
FR432902B	01	Initial issue of report	Jun. 18, 2024
FR432902B	02	Revise applicant information and Conducted test date  This report is an updated version, replacing the report issued on Jun. 18, 2024.	Jun. 26, 2024

TEL: 886-3-327-3456 Page Number : 3 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## **Summary of Test Result**

Report No.: FR432902B

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth Pass		-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.62 dB under the limit at 2337.62 MHz
3.6	15.207	AC Conducted Emission	Pass	11.65 dB under the limit at 13.56 MHz
3.7	15.203	Antenna Requirement Pass		-

#### **Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the
  regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who
  shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken
  into account.
- 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

#### Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng Report Producer: Mila Chen

TEL: 886-3-327-3456 Page Number : 4 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 1 General Description

## 1.1 Product Feature of Equipment Under Test

#### **Product Feature**

Report No.: FR432902B

#### **General Specs**

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and NFC.

#### **Antenna Type**

WLAN: Monopole Antenna Bluetooth: Monopole Antenna NFC: Coil Inductor Antenna

Antenna information					
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.6			

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

#### 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory				
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978				
Test Site No.	Sporton Site No.				
1631 3116 110.	TH02-HY, CO05-HY, 03CH07-HY				

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

TEL: 886-3-327-3456 Page Number : 5 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FR432902B

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

#### Remark:

- 1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
- 2. The TAF code is not including all the FCC KDB listed without accreditation.
- 3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 6 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 2 Test Configuration of Equipment Under Test

## 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
2400-2483.5 MHz	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : 7 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

#### 2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Report No.: FR432902B


b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

	Summary table of Test Cases						
Test Item	Data Rate / Modulation						
	Bluetooth – LE / GFSK						
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps						
Conducted	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps						
Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps						
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps						
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps						
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps						
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps						
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps						
Radiated	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps						
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps						
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps						
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps						
AC Conducted	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + NFC Charging to pen 1 + USB						
Emission	Cable (Charging from Adapter) + Battery						
	Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.						

TEL: 886-3-327-3456 Page Number : 8 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 2.3 Connection Diagram of Test System

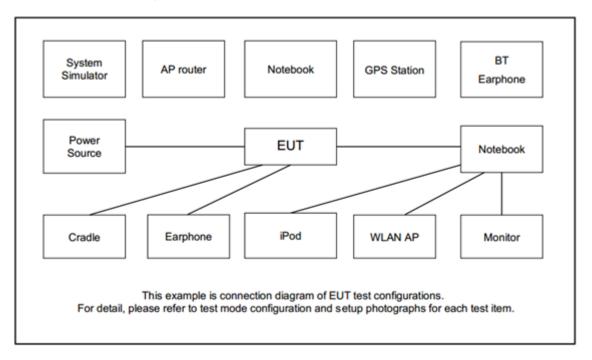

Report No.: FR432902B

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord	
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m	
2.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m	
3.	Phone	Apple	A1586	N/A	N/A	N/A	
4.	Adapter	Aohai	G9BR1	FCC DoC	N/A	N/A	
5.	Adapter	PHILIPS	DLP6341C	NA	N/A	N/A	

## 2.5 EUT Operation Test Setup

The RF test items, utility "putty 0.78" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

TEL: 886-3-327-3456 Page Number : 9 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 2.6 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Report No.: FR432902B

#### Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).  
= 
$$4.2 + 10 = 14.2$$
 (dB)

TEL: 886-3-327-3456 Page Number : 10 of 24 FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

#### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

#### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.1.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.

Report No.: FR432902B

- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set
   1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 6. Measure and record the results in the test report.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

#### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 11 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 3.2 Output Power Measurement

#### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Report No.: FR432902B


#### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.2.3 Test Procedures

- 1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
- 2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
- 3. The path loss is compensated to the results for each measurement.
- 4. Set the maximum power setting and enable the EUT to transmit continuously.
- 5. Measure the conducted output power and record the results in the test report.

#### 3.2.4 Test Setup



#### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 12 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

Report No.: FR432902B


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.
   Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup



#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 13 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

Report No.: FR432902B


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.4.3 Test Procedure

- 1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- 4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup



### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

#### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 14 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Report No.: FR432902B

Frequency	Field Strength	Measurement Distance		
(MHz)	(microvolts/meter)	(meters)		
0.009 - 0.490	2400/F(kHz)	300		
0.490 – 1.705	24000/F(kHz)	30		
1.705 – 30.0	30	30		
30 – 88	100	3		
88 – 216	150	3		
216 - 960	200	3		
Above 960	500	3		

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

TEL: 886-3-327-3456 Page Number : 15 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

#### 3.5.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
- 2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.

Report No.: FR432902B

- The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
- 4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
- 7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".
- 8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for f ≥ 1 GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

TEL: 886-3-327-3456 Page Number : 16 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024


## 3.5.4 Test Setup

#### For radiated test below 30MHz

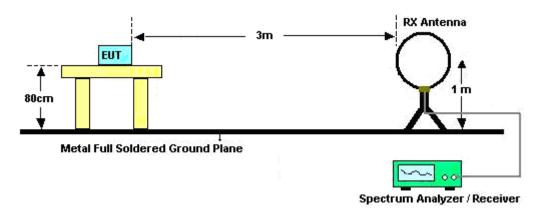


Report No.: FR432902B

#### For radiated test from 30MHz to 1GHz

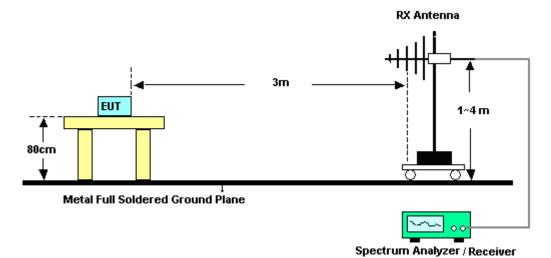


For radiated test from 1GHz to 18GHz

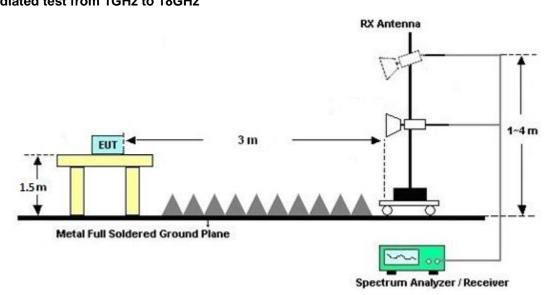

TEL: 886-3-327-3456 Page Number : 17 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

#### For radiated test above 18GHz

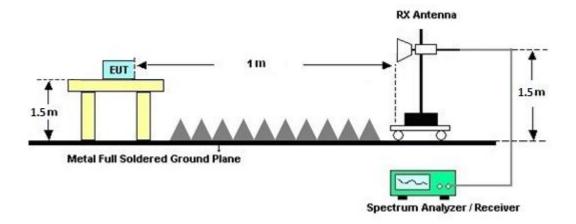

Report No.: FR432902B

#### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

#### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

#### 3.5.7 Duty Cycle

Please refer to Appendix E.

#### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

TEL: 886-3-327-3456 Page Number : 18 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

#### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR432902B

Eroquency of emission (MHz)	Conducted limit (dBµV)				
Frequency of emission (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

<sup>\*</sup>Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

- 1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
- 6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
- 7. The frequency range from 150 kHz to 30 MHz is scanned.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-3456 Page Number : 19 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 3.6.4 Test Setup

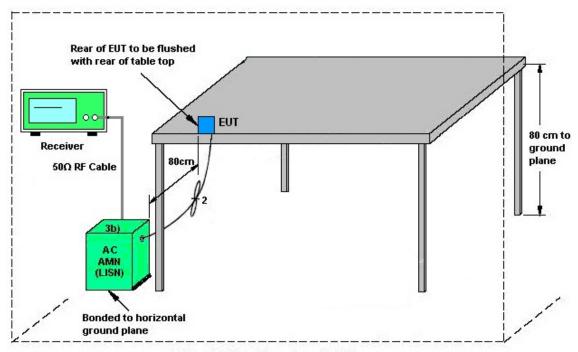

Report No.: FR432902B

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

#### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 20 of 24 FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 3.7 Antenna Requirements

## 3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

Report No.: FR432902B

## 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

TEL: 886-3-327-3456 Page Number : 21 of 24
FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 27, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Apr. 27, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	Apr. 27, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Apr. 27, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Apr. 27, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	00691	N/A	Jul. 28, 2023	Apr. 27, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Apr. 27, 2024	Dec. 27, 2024	Conduction (CO05-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 27, 2023	Apr. 22, 2024~ May 11, 2024	Nov. 26, 2024	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Apr. 22, 2024~ May 11, 2024	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 23, 2024	Apr. 22, 2024~ May 11, 2024	Mar. 22, 2025	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 25, 2023	Apr. 22, 2024~ May 11, 2024	Jul. 24, 2024	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 26, 2024	Apr. 22, 2024~ May 11, 2024	Mar. 25, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 21, 2024	Apr. 22, 2024~ May 11, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 21, 2024	Apr. 22, 2024~ May 11, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 15, 2023	Apr. 22, 2024~ May 11, 2024	Sep. 14, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 21, 2024	Apr. 22, 2024~ May 11, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Apr. 22, 2024~ May 11, 2024	Apr. 21, 2025	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Apr. 22, 2024~ May 11, 2024	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Apr. 22, 2024~ May 11, 2024	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Apr. 22, 2024~ May 11, 2024	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 22, 2024~ May 11, 2024	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Apr. 22, 2024~ May 11, 2024	N/A	Radiation (03CH07-HY)

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : 22 of 24 FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 01, 2024	Apr. 22, 2024~ May 11, 2024	Feb. 28, 2025	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 24, 2023	Apr. 22, 2024~ May 11, 2024	Nov. 23, 2024	Radiation (03CH07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Apr. 19, 2024~ May 28, 2024	Nov. 06, 2024	Conducted (TH02-HY)
Power Sensor	DARE	RPR3008W	RPR8W-23010 17 (NO:20)	10MHz~8GHz	Jul. 26, 2023	Apr. 19, 2024~ May 28, 2024	Jul. 25, 2024	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Aug. 31, 2023	Apr. 19, 2024~ May 28, 2024	Aug. 30, 2024	Conducted (TH02-HY)
DC Power Supply	GW Instek	GPE-2323	GEU810970	0V~64V ; 0A~6A	Nov. 16, 2023	Apr. 19, 2024~ May 28, 2024	Nov. 15, 2024	Conducted (TH02-HY)

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : 23 of 24 FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

## **5** Measurement Uncertainty

#### **Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence	2.5.40
of 95% (U = 2Uc(y))	3.5 dB

Report No.: FR432902B

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	6.3 dB
of 95% (U = 2Uc(y))	0.3 UB

#### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence	4.6 dB
of 95% (U = 2Uc(y))	4.0 UB

#### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	
Measuring Uncertainty for a Level of Confidence	4.3 dB
of 95% (U = 2Uc(y))	

#### <u>Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	5.3 dB
of 95% (U = 2Uc(y))	3.3 ub

TEL: 886-3-327-3456 Page Number : 24 of 24 FAX: 886-3-328-4978 Issue Date : Jun. 26, 2024

Report Number : FR432902B

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kevin Xiao	Temperature:	21~25	°C
Test Date:	2024/4/19~2024/5/28	Relative Humidity:	51~54	%

#### TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.025	0.707	0.50	Pass
BLE	1Mbps	1	19	2440	1.025	0.706	0.50	Pass
BLE	1Mbps	1	39	2480	1.027	0.702	0.50	Pass

## TEST RESULTS DATA Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.00	30.00	1.60	9.60	36.00	Pass
BLE	1Mbps	1	19	2440	7.70	30.00	1.60	9.30	36.00	Pass
BLE	1Mbps	1	39	2480	7.00	30.00	1.60	8.60	36.00	Pass

## TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	8.08	-7.03	1.60	8.00	Pass
BLE	1Mbps	1	19	2440	7.52	-7.53	1.60	8.00	Pass
BLE	1Mbps	1	39	2480	6.82	-8.28	1.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Report Number: FR432902B

#### TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.046	1.162	0.50	Pass
BLE	2Mbps	1	19	2440	2.042	1.161	0.50	Pass
BLE	2Mbps	1	39	2480	2.046	1.162	0.50	Pass

# TEST RESULTS DATA Average Power Table

Mod.	Data Rate	N⊤×	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.90	30.00	1.60	9.50	36.00	Pass
BLE	2Mbps	1	19	2440	7.60	30.00	1.60	9.20	36.00	Pass
BLE	2Mbps	1	39	2480	6.90	30.00	1.60	8.50	36.00	Pass


## TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	N⊤×	СН.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	8.21	-10.01	1.60	8.00	Pass
BLE	2Mbps	1	19	2440	7.62	-10.54	1.60	8.00	Pass
BLE	2Mbps	1	39	2480	6.89	-11.30	1.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.


## 6dB Bandwidth

#### <1Mbps>

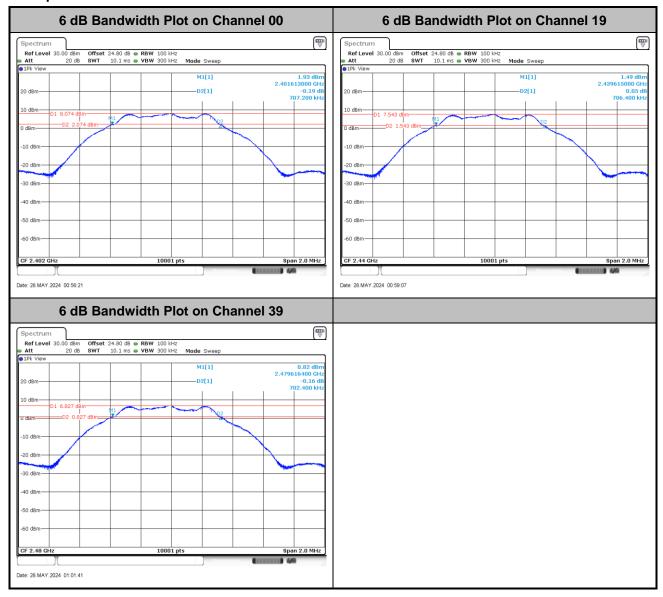

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-1 of 12

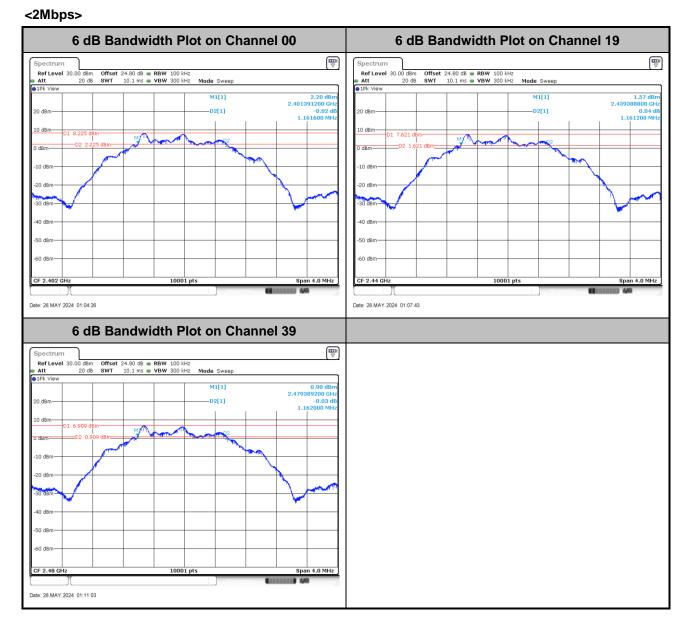


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-2 of 12

## 99% Occupied Bandwidth


#### <1Mbps>

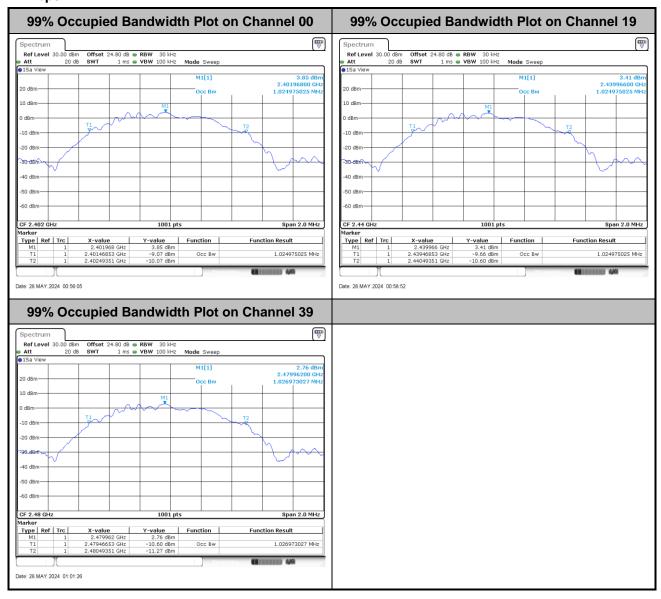

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-3 of 12

#### <2Mbps>

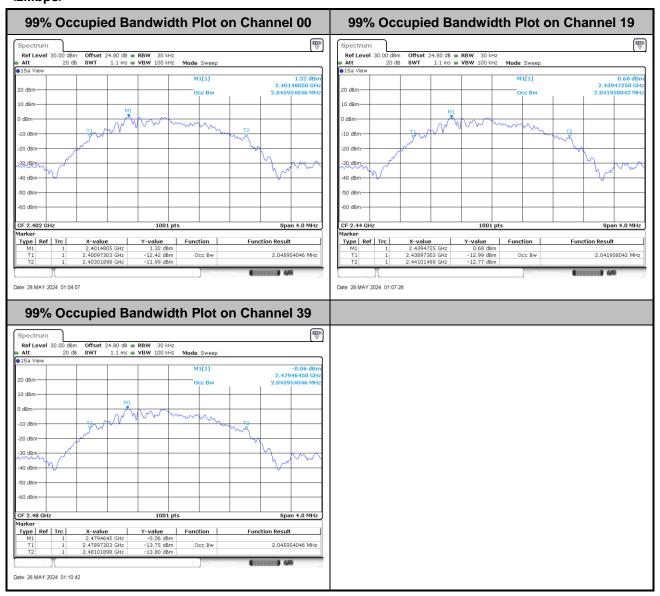


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-4 of 12

## Power Spectral Density (dBm/3kHz)


#### <1Mbps>

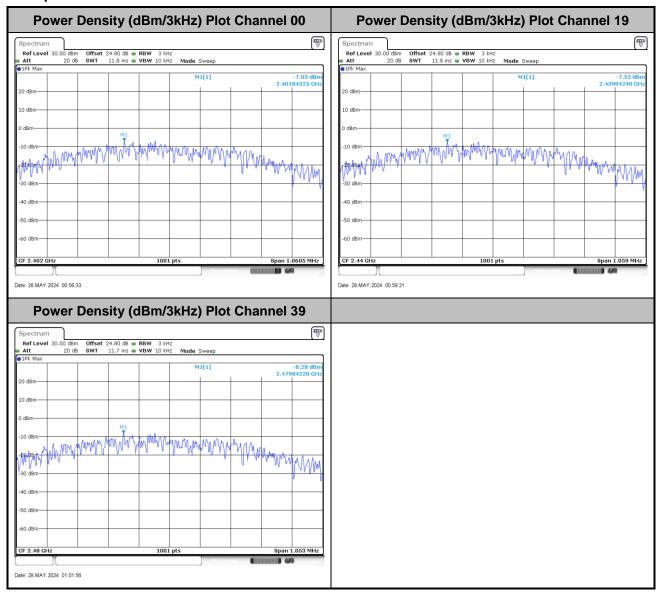

Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-5 of 12

#### <2Mbps>

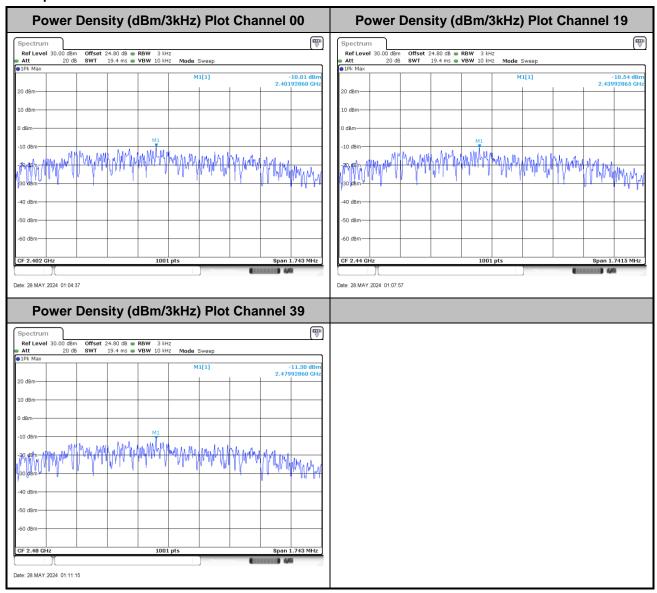


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-6 of 12


## **Band Edge and Conducted Spurious Emission**

#### <1Mbps>

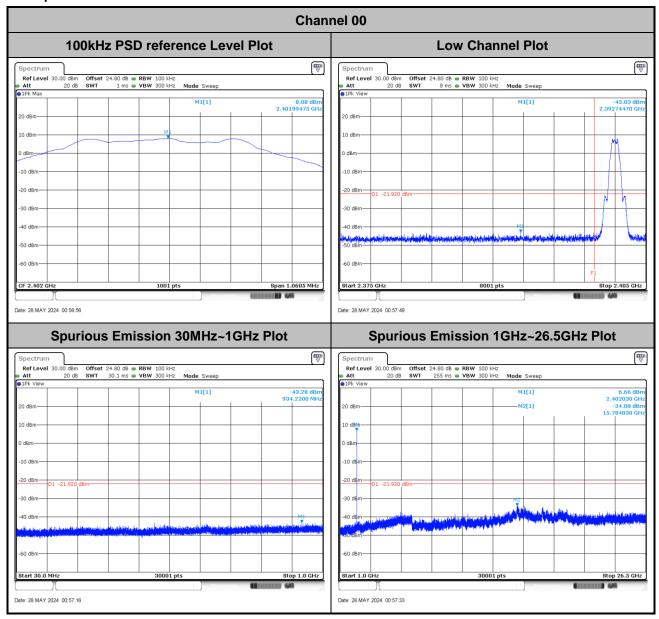


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-7 of 12

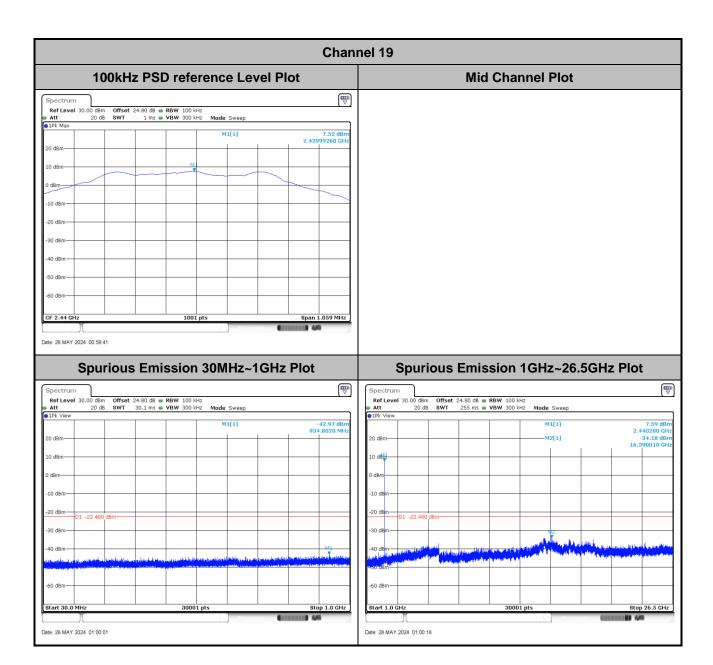

Report No.: FR432902B


TEL: 886-3-327-3456 Page Number : A2-8 of 12

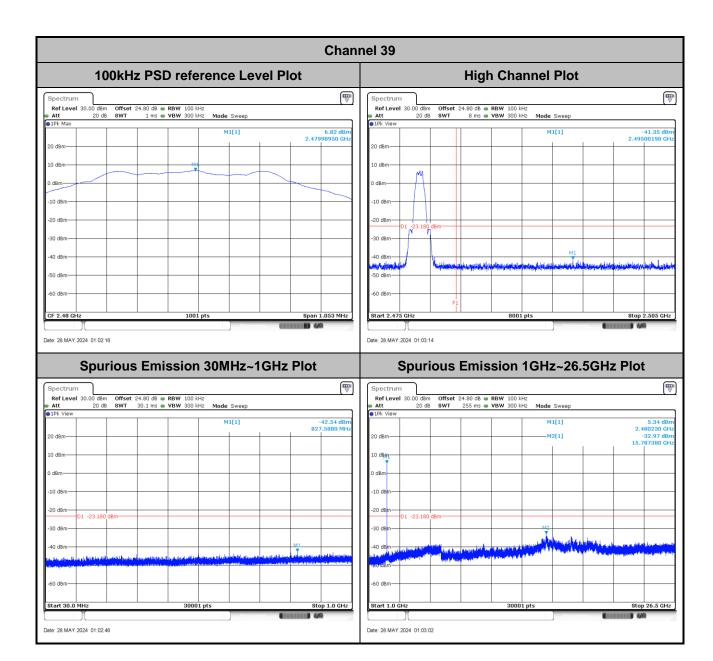

Report No.: FR432902B


TEL: 886-3-327-3456 Page Number : A2-9 of 12

#### <2Mbps>

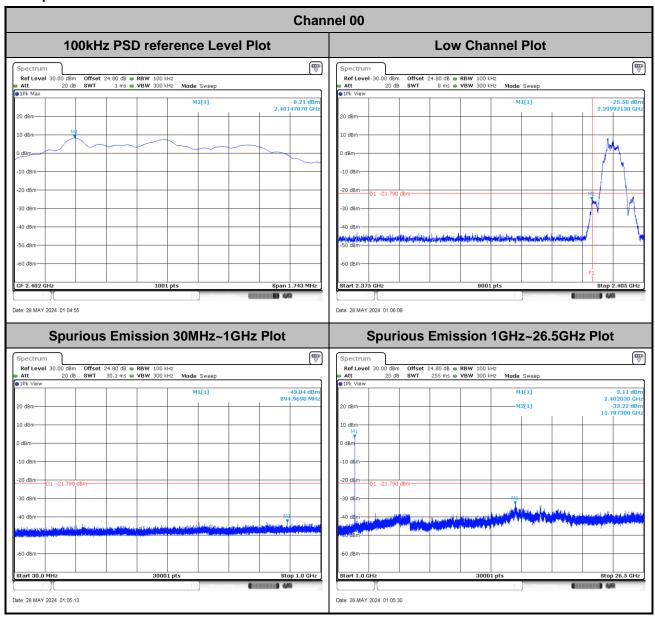


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number : A2-10 of 12

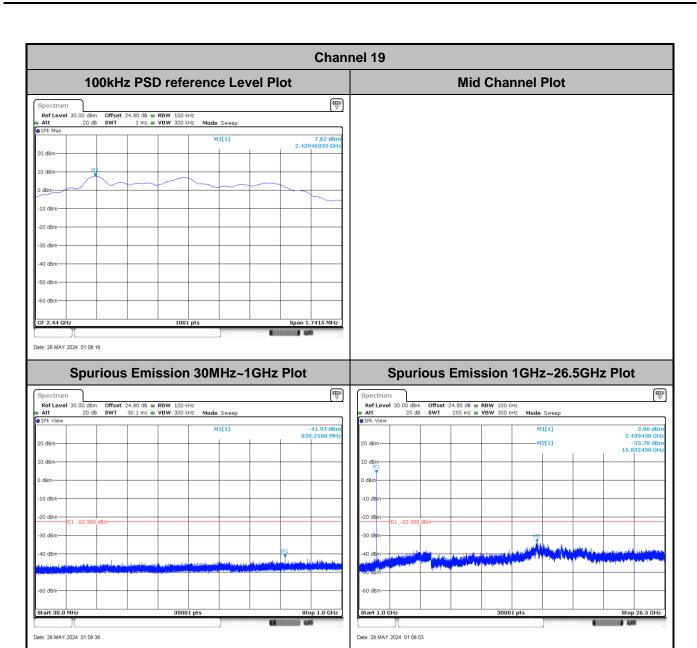

TEL: 886-3-327-3456 Page Number : A2-11 of 12

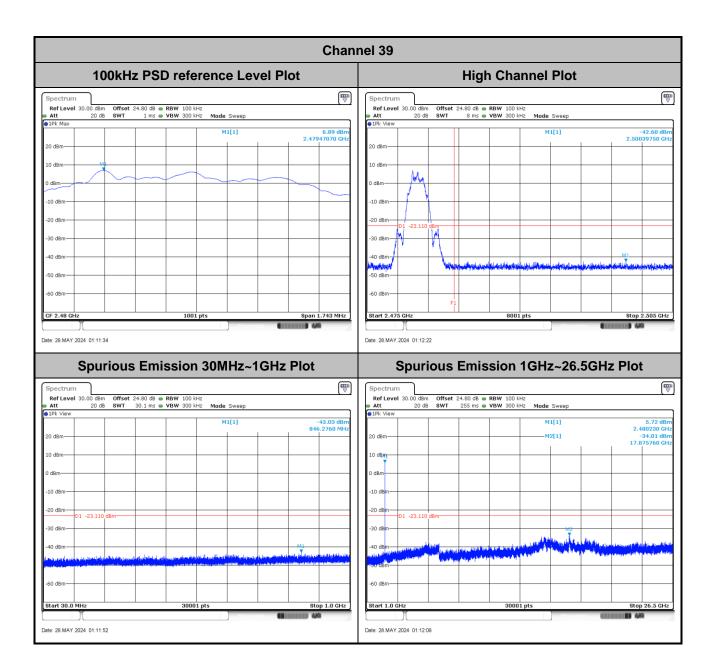

TEL: 886-3-327-3456 Page Number : A2-12 of 12

## **Appendix B. AC Conducted Emission Test Results**

Test Engineer :	Calvin Wana	Temperature :	23~26℃
rest Engineer .	Calvill Wally	Relative Humidity:	45~55%

Report No. : FR432902B

TEL: 886-3-327-3456 Page Number : B1 of B1

#### **EUT Information**


 Report NO :
 432902

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

#### FullSpectrum

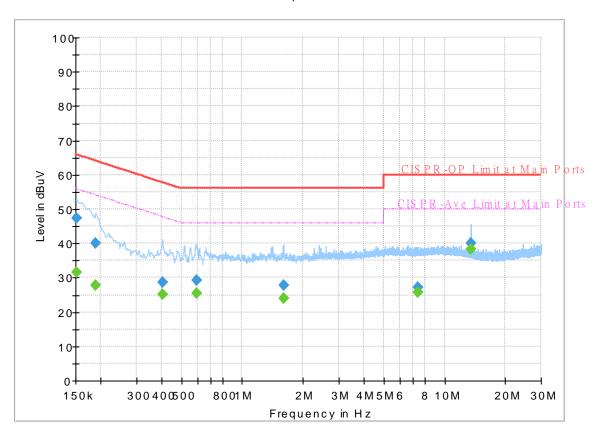


### Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250		31.48	55.88	24.40	L1	OFF	19.8
0.152250	47.49		65.88	18.39	L1	OFF	19.8
0.188250		27.86	54.11	26.25	L1	OFF	19.8
0.188250	40.06		64.11	24.05	L1	OFF	19.8
0.402000		25.11	47.81	22.70	L1	OFF	19.8
0.402000	28.68		57.81	29.13	L1	OFF	19.8
0.597750		25.31	46.00	20.69	L1	OFF	19.8
0.597750	29.24		56.00	26.76	L1	OFF	19.8
1.596750		24.12	46.00	21.88	L1	OFF	19.9
1.596750	27.84		56.00	28.16	L1	OFF	19.9
7.365750		25.80	50.00	24.20	L1	OFF	20.0
7.365750	27.14		60.00	32.86	L1	OFF	20.0
13.560000		38.18	50.00	11.82	L1	OFF	20.2
13.560000	39.99		60.00	20.01	L1	OFF	20.2

#### **EUT Information**

Report NO: 432902
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

Full Spectrum

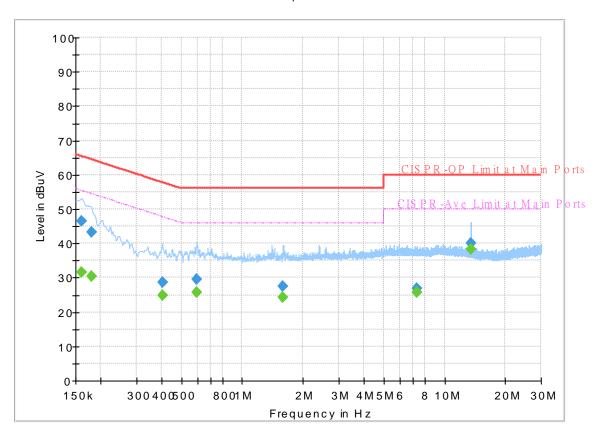

### Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250		31.59	55.40	23.81	N	OFF	19.8
0.161250	46.50		65.40	18.90	N	OFF	19.8
0.179250		30.31	54.52	24.21	N	OFF	19.8
0.179250	43.33		64.52	21.19	N	OFF	19.8
0.404250		24.87	47.77	22.90	N	OFF	19.8
0.404250	28.54		57.77	29.23	N	OFF	19.8
0.595500		25.81	46.00	20.19	N	OFF	19.8
0.595500	29.42		56.00	26.58	N	OFF	19.8
1.594500		24.13	46.00	21.87	N	OFF	19.9
1.594500	27.34		56.00	28.66	N	OFF	19.9
7.311750		25.86	50.00	24.14	N	OFF	20.1
7.311750	26.91		60.00	33.09	N	OFF	20.1
13.560000		38.35	50.00	11.65	N	OFF	20.3
13.560000	39.93		60.00	20.07	N	OFF	20.3

## Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, and Ken Wu	Temperature :	22.1~26.0°C
rest Engineer .		Relative Humidity :	48.2~69.5%

<1Mbps>

## 2.4GHz 2400~2483.5MHz

### BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	(dB)	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
		2377.935	54.47	-19.53	74	38.56	31.9	18.33	34.32	165	149	Р	Н
		2350.11	45.67	-8.33	54	29.62	32.1	18.29	34.34	165	149	Α	Н
	*	2402	101.34	-	-	85.28	32	18.37	34.31	165	149	Р	Н
DI E	*	2402	100.65	-	-	84.59	32	18.37	34.31	165	149	Α	Н
BLE CH 00													Н
2402MHz		2315.25	54.24	-19.76	74	38.26	32.1	18.23	34.35	367	178	Р	V
2402181112		2357.355	45.52	-8.48	54	29.52	32.03	18.3	34.33	367	178	Α	٧
	*	2402	105.35	-	-	89.29	32	18.37	34.31	367	178	Р	٧
	*	2402	104.9	-	-	88.84	32	18.37	34.31	367	178	Α	٧
													٧
		2356.76	54.41	-19.59	74	38.41	32.03	18.3	34.33	128	148	Р	Н
		2358.72	45.32	-8.68	54	29.34	32.01	18.3	34.33	128	148	Α	Н
	*	2440	100.21	-	-	84.15	31.9	18.46	34.3	128	148	Р	Н
	*	2440	99.74	-	-	83.68	31.9	18.46	34.3	128	148	Α	Н
D. F.		2484.11	54.45	-19.55	74	38.05	32.14	18.54	34.28	128	148	Р	Н
BLE CH 19		2498.25	45.94	-8.06	54	29.35	32.28	18.58	34.27	128	148	Α	Н
2440MHz		2352.98	54.51	-19.49	74	38.48	32.07	18.29	34.33	358	173	Р	٧
2440111112		2361.38	45.32	-8.68	54	29.36	31.99	18.3	34.33	358	173	Α	٧
	*	2440	103.8	-	-	87.74	31.9	18.46	34.3	358	173	Р	٧
	*	2440	103.21	-	-	87.15	31.9	18.46	34.3	358	173	Α	٧
		2491.74	54.61	-19.39	74	38.09	32.22	18.57	34.27	358	173	Р	٧
		2493.14	46.09	-7.91	54	29.56	32.23	18.57	34.27	358	173	Α	٧

TEL: 886-3-327-3456 Page Number : C1 of C13

FAX: 886-3-328-4978

.



### FCC RADIO TEST REPORT

	*	2480	99.53	-	-	83.17	32.1	18.54	34.28	124	149	Р	
	*	2480	99.02	-	-	82.66	32.1	18.54	34.28	124	149	Α	
		2488.64	54.49	-19.51	74	38.01	32.19	18.56	34.27	124	149	Р	
		2495.76	45.9	-8.1	54	29.34	32.26	18.57	34.27	124	149	Α	
) E													
BLE													
H 39 0MHz	*	2480	102.71	-	-	86.35	32.1	18.54	34.28	346	187	Р	
OIVII IZ	*	2480	102.19	-	-	85.83	32.1	18.54	34.28	346	187	Α	
		2484.52	55.44	-18.56	74	39.03	32.15	18.54	34.28	346	187	Р	
		2491	45.89	-8.11	54	29.39	32.21	18.56	34.27	346	187	Α	

Remark 1. No other spurious for

TEL: 886-3-327-3456 Page Number : C2 of C13

FAX: 886-3-328-4978

<sup>2.</sup> All results are PASS against Peak and Average limit line.

#### 2.4GHz 2400~2483.5MHz

### BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	( dBµV/m )	( dB )	Line ( dBµV/m )	Level ( dBµV )	Factor ( dB/m )	Loss (dB)	Factor (dB)	Pos ( cm )	Pos ( deg )	Avg. (P/A)	
		4804	41.53	-32.47	74	53.45	34.2	13.07	59.19	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 00		4804	40.64	-33.36	74	52.56	34.2	13.07	59.19	-	-	Р	V
2402MHz													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-3456 Page Number : C3 of C13

FAX: 886-3-328-4978

.

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( NALL )	( -ID) (/ )	( -ID )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	(1100
		(MHz)	( dBµV/m )	(dB)	( dBµV/m )		( dB/m )	(dB)	(dB)	( cm )	( deg )		
		4880	40.84	-33.16	74	52.53	34.26	13.07	59.02	-	-	Р	Н
		7320	42.12	-31.88	74	48.77	35.8	15.29	57.74	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 19													Н
2440MHz		4880	41.81	-32.19	74	53.5	34.26	13.07	59.02	-	-	Р	V
244011112		7320	42.36	-31.64	74	49.01	35.8	15.29	57.74	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-3456 Page Number : C4 of C13

FAX: 886-3-328-4978

:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	( dBµV/m )	(dB)	Line ( dBµV/m )	Level ( dBµV )	Factor ( dB/m )	Loss (dB)	Factor (dB)	Pos ( cm )	Pos ( deg )	Avg.	(H/V)
		4960	41.77	-32.23	74	53.14	34.4	13.07	58.84	-	-	Р	Н
		7440	41.65	-32.35	74	48.47	35.62	15.45	57.89	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 39													Н
2480MHz		4960	40.43	-33.57	74	51.8	34.4	13.07	58.84	-	-	Р	V
		7440	41.24	-32.76	74	48.06	35.62	15.45	57.89	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
	1. No	o other spurious	s found										٧
		results are PA		Peak and	Average lim	it line.							
Remark		e emission pos	-		-		ission found	d with suf	ficient mar	gin agai	nst limit	line or	noise
	flo	or only.											

TEL: 886-3-327-3456 Page Number : C5 of C13

FAX: 886-3-328-4978

<2Mbps>

#### 2.4GHz 2400~2483.5MHz

### BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	(dB)	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
		2336.88	55.27	-18.73	74	39.25	32.1	18.26	34.34	165	146	Р	Н
		2337.615	47.38	-6.62	54	31.36	32.1	18.26	34.34	165	146	Α	Н
	*	2402	101.35	-	-	85.29	32	18.37	34.31	165	146	Р	Н
DI E	*	2402	100.09	-	-	84.03	32	18.37	34.31	165	146	Α	Н
BLE CH 00													Н
2402MHz		2384.025	54.35	-19.65	74	38.39	31.94	18.34	34.32	358	175	Р	٧
2402111112		2380.98	47.22	-6.78	54	31.29	31.91	18.34	34.32	358	175	Α	٧
	*	2402	104.22	-	-	88.16	32	18.37	34.31	358	175	Р	٧
	*	2402	102.86	-	-	86.8	32	18.37	34.31	358	175	Α	٧
													٧
		2387.14	54.36	-19.64	74	38.36	31.97	18.35	34.32	129	150	Р	Н
		2356.62	46.94	-7.06	54	30.94	32.03	18.3	34.33	129	150	Α	Н
	*	2440	99.77	-	-	83.71	31.9	18.46	34.3	129	150	Р	Н
	*	2440	98.43	-	-	82.37	31.9	18.46	34.3	129	150	Α	Н
		2498.81	54.36	-19.64	74	37.76	32.29	18.58	34.27	129	150	Р	Н
BLE CH 19		2487.4	47.18	-6.82	54	30.74	32.17	18.55	34.28	129	150	Α	Н
2440MHz		2338.14	55.76	-18.24	74	39.74	32.1	18.26	34.34	400	170	Р	٧
2440WII 12		2352	47.01	-6.99	54	30.98	32.08	18.29	34.34	400	170	Α	٧
	*	2440	102.05	-	-	85.99	31.9	18.46	34.3	400	170	Р	٧
	*	2440	100.84	-	-	84.78	31.9	18.46	34.3	400	170	Α	V
		2497.06	54.91	-19.09	74	38.33	32.27	18.58	34.27	400	170	Р	٧
		2499.65	47.21	-6.79	54	30.6	32.3	18.58	34.27	400	170	Α	٧

TEL: 886-3-327-3456 Page Number : C6 of C13

FAX: 886-3-328-4978

:



	*	2480	99.4	-	-	83.04	32.1	18.54	34.28	125	147	Р	Н
	*	2480	98.28	-	-	81.92	32.1	18.54	34.28	125	147	Α	Н
		2499.32	54.41	-19.59	74	37.81	32.29	18.58	34.27	125	147	Р	Н
		2497.88	47.33	-6.67	54	30.74	32.28	18.58	34.27	125	147	Α	Н
51.5													Н
BLE													Н
CH 39 2480MHz	*	2480	102.03	-	-	85.67	32.1	18.54	34.28	387	174	Р	V
2400WITIZ	*	2480	100.85	-	-	84.49	32.1	18.54	34.28	387	174	Α	V
		2494.28	55.39	-18.61	74	38.85	32.24	18.57	34.27	387	174	Р	V
		2484.32	47.3	-6.7	54	30.9	32.14	18.54	34.28	387	174	Α	V
													V
													V
	1. N	o other spurious	s found.										
Remark		I results are PA		Peak and	Average lim	nit line.							

TEL: 886-3-327-3456 Page Number : C7 of C13

FAX: 886-3-328-4978

:

#### 2.4GHz 2400~2483.5MHz

#### BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		, <b></b> .	 		Line	Level	Factor	Loss	Factor	Pos		Avg.	4100
		( MHz )	( dBµV/m )		( dBµV/m )	( dBµV )	( dB/m )	(dB)	(dB)	( cm )	( deg )	( <b>P/A)</b>	
		4804	41.4	-32.6	74	53.32	34.2	13.07	59.19	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 00		4804	41.61	-32.39	74	53.53	34.2	13.07	59.19	-	-	Р	V
2402MHz													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-3456 Page Number : C8 of C13

FAX: 886-3-328-4978

:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBµV/m )	(dB)	Line ( dBµV/m )	Level ( dBµV )	Factor ( dB/m )	Loss (dB)	Factor (dB)	Pos ( cm )	Pos ( deg )	Avg. (P/A)	(H/V)
		4880	42.35	-31.65	74	54.04	34.26	13.07	59.02	-	-	Р	Н
		7320	42.37	-31.63	74	49.02	35.8	15.29	57.74	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 19 2440MHz		4880	41.21	-32.79	74	52.9	34.26	13.07	59.02	-	-	Р	V
2440101712		7320	42.62	-31.38	74	49.27	35.8	15.29	57.74	-	-	Р	V
													٧
													٧
													٧
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-3456 Page Number : C9 of C13

FAX: 886-3-328-4978

:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )		( dBµV/m )		( dB/m )	( dB )	( dB )	( cm )	( deg )		
		4960	40.57	-33.43	74	51.94	34.4	13.07	58.84	-	-	Р	Н
		7440	41.46	-32.54	74	48.28	35.62	15.45	57.89	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 39		4960	40.49	-33.51	74	51.86	34.4	13.07	58.84	-	-	Р	V
2480MHz		7440	41.34	-32.66	74	48.16	35.62	15.45	57.89	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
	1. No	other spurious	s found										
		results are PA		Peak and	Average lim	it line							
Remark		e emission pos					ission found	d with suf	ficient mar	gin agai	nst limit	line or	· noise
		or only.	J. J. J. Harrot	. 40 111		Joce on	icolori louric	a with our		yııı ayaı			,10100

TEL: 886-3-327-3456 Page Number : C10 of C13

FAX: 886-3-328-4978

.

# Emission below 1GHz

#### 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	( dB )	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
		30	23.18	-16.82	40	27.5	24.51	1.11	29.94	-	-	Р	Н
		165	35.69	-7.81	43.5	46.93	15.99	2.61	29.84	-	-	Р	Н
		187.14	34.66	-8.84	43.5	47.05	14.66	2.78	29.83	-	-	Р	Н
		783.7	31.58	-14.42	46	27.87	27.85	5.21	29.35	-	-	Р	Н
		890.8	32.52	-13.48	46	27.19	28.6	5.63	28.9	-	-	Р	Н
		954.5	34.43	-11.57	46	26.72	30.57	5.78	28.64	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
2.4GHz													Н
BLE		30	30.66	-9.34	40	34.98	24.51	1.11	29.94	-	-	Р	V
LF		56.46	30.03	-9.97	40	46.26	12.12	1.57	29.92	-	-	Р	V
		183.36	33.93	-9.57	43.5	46.27	14.73	2.76	29.83	-	-	Р	٧
		841.8	31.67	-14.33	46	26.96	28.47	5.43	29.19	-	-	Р	V
		886.6	33.67	-12.33	46	28.35	28.63	5.62	28.93	-	-	Р	V
		954.5	35.02	-10.98	46	27.31	30.57	5.78	28.64	-	-	Р	V
													٧
													V
													V
													V
													V
													V
													٧

1. No other spurious found.

#### Remark

2. All results are PASS against limit line.

 The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

TEL: 886-3-327-3456 Page Number: C11 of C13

FAX: 886-3-328-4978

### Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted
	emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	Peak or Average
H/V	Horizontal or Vertical

TEL: 886-3-327-3456 Page Number : C12 of C13

FAX: 886-3-328-4978

#### A calculation example for radiated spurious emission is shown as below:

Report No.: FR432902B

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	( dBµV/m )	( dB )	( dBµV/m )	(dBµV)	( dB/m )	( dB )	( dB )	( cm )	(deg)	(P/A)	(H/V)
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 00													
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

- 1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
- 2. Level( $dB\mu V/m$ ) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

3. Margin (dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

#### For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Margin (dB)
- = Level( $dB\mu V/m$ ) Limit Line( $dB\mu V/m$ )
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

#### For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Margin (dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

TEL: 886-3-327-3456 Page Number: C13 of C13

## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, and Ken Wu	Temperature :	22.1~26.0°C
rest Engineer.		Relative Humidity :	48.2~69.5%

Report No. : FR432902B

## **Note symbol**

-L	Low channel location
-R	High channel location


TEL: 886-3-327-3456 Page Number: D1 of D24

<1Mbps>

#### 2.4GHz 2400~2483.5MHz


Report No.: FR432902B

#### BLE (Band Edge @ 3m)

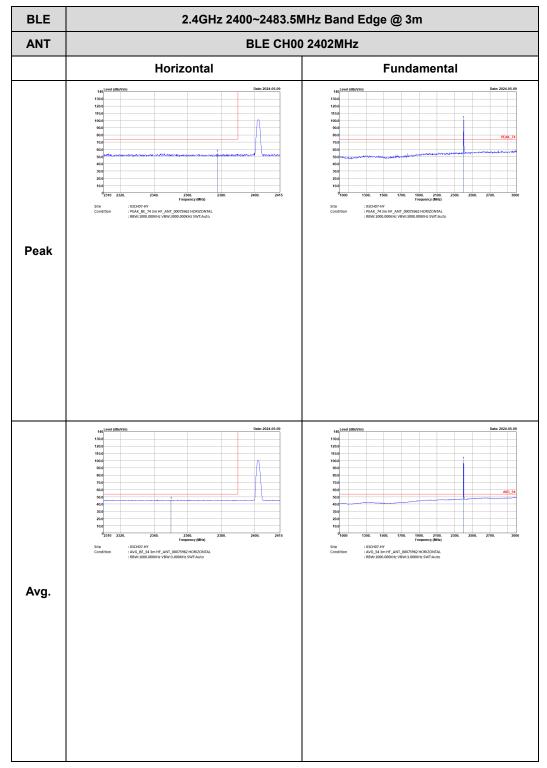

TEL: 886-3-327-3456 Page Number: D2 of D24



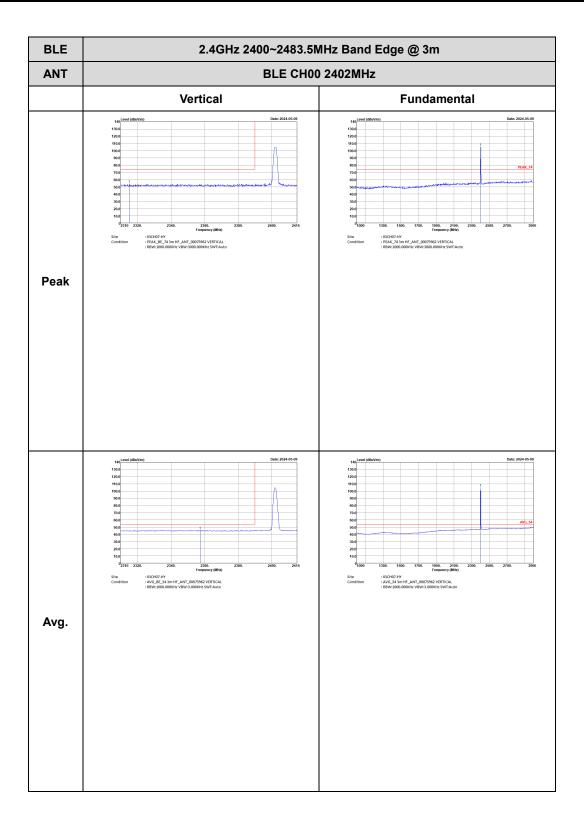

TEL: 886-3-327-3456 Page Number: D3 of D24




BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - L **ANT** Horizontal **Fundamental** : 03CH07-HY : PEAK\_BE\_74 3m HF\_ANT\_00075962 HORIZONTAL : R8W:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH07-HY : PEAK\_74 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH07-HY : AVG\_BE\_543m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto : 03CH07-HY : AVG\_54 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Avg.


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number: D4 of D24

IO TEST REPORT Report No. : FR432902B

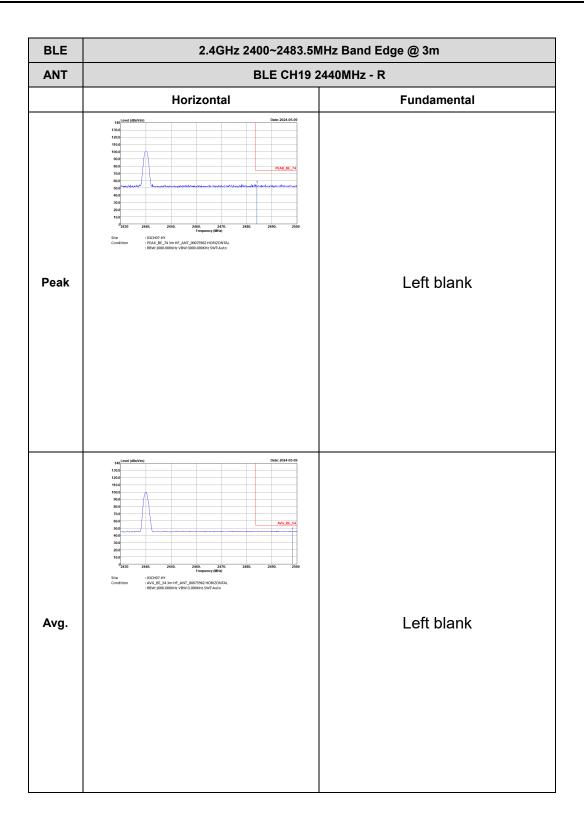


TEL: 886-3-327-3456 Page Number: D5 of D24

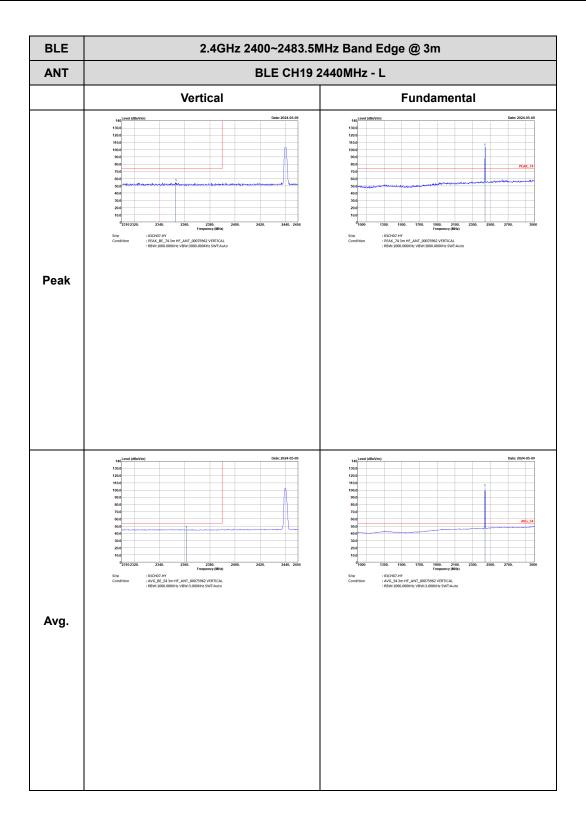


TEL: 886-3-327-3456 : D6 of D24 Page Number


Report No.: FR432902B BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m

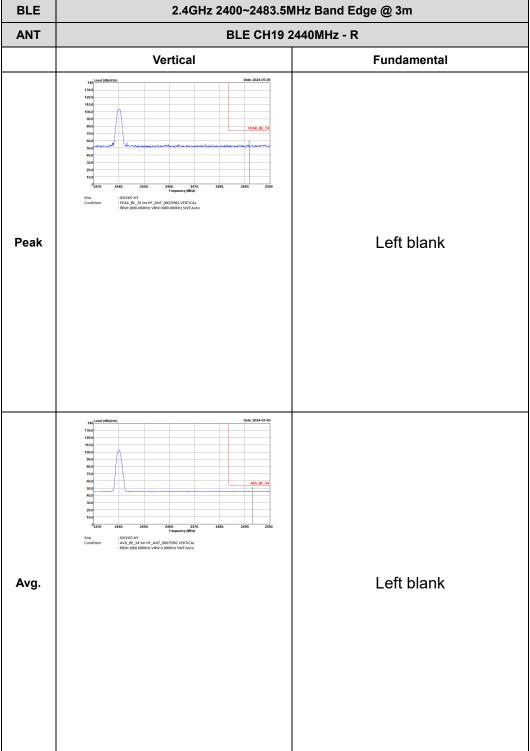

TEL: 886-3-327-3456 : D7 of D24 Page Number

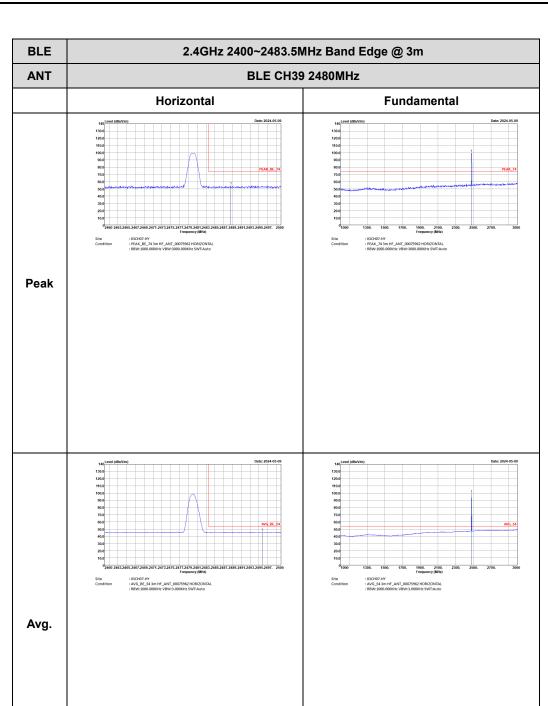

TEL: 886-3-327-3456 Page Number: D8 of D24

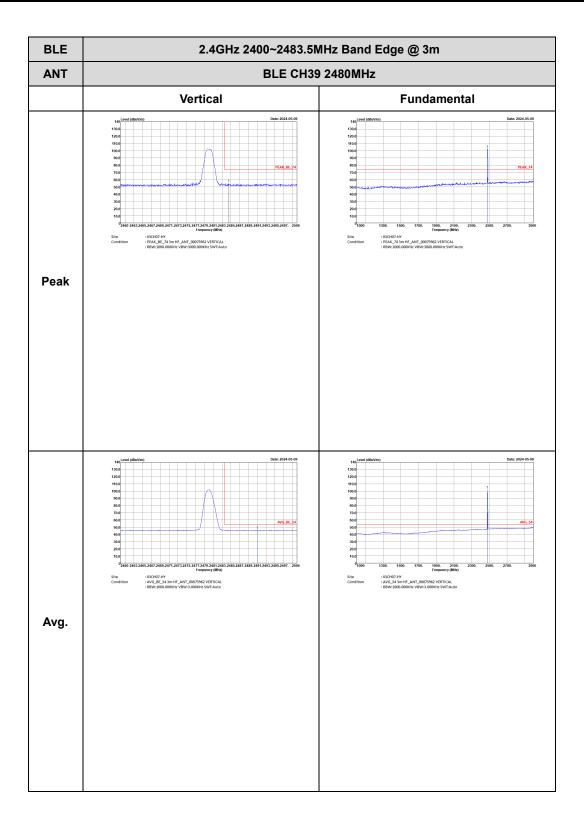


TEL: 886-3-327-3456 : D9 of D24 Page Number

## 2.4GHz 2400~2483.5MHz


Report No.: FR432902B

#### BLE (Harmonic @ 3m)

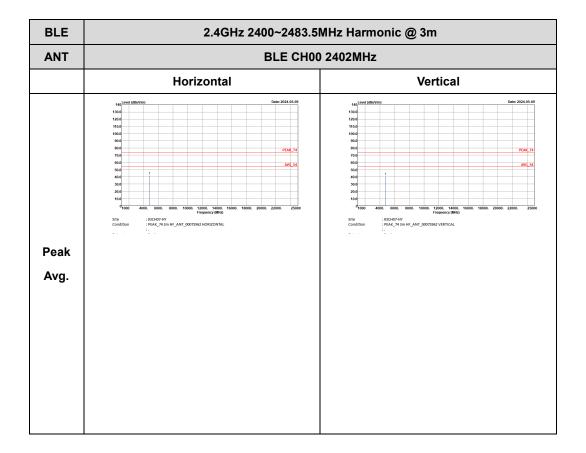



TEL: 886-3-327-3456 Page Number: D10 of D24



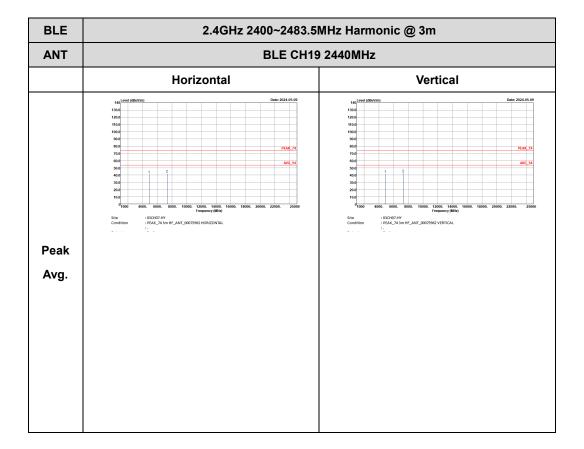

TEL: 886-3-327-3456 Page Number: D11 of D24



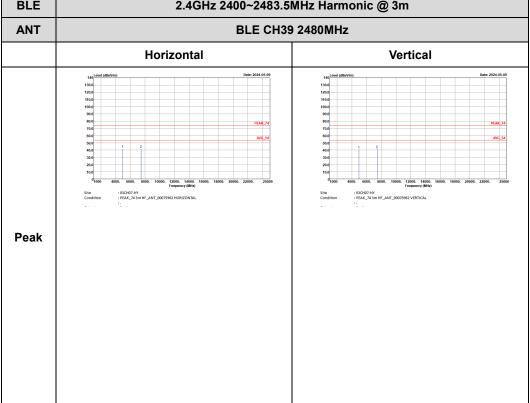


TEL: 886-3-327-3456 Page Number: D12 of D24

<2Mbps>

#### 2.4GHz 2400~2483.5MHz


Report No.: FR432902B

#### BLE (Band Edge @ 3m)

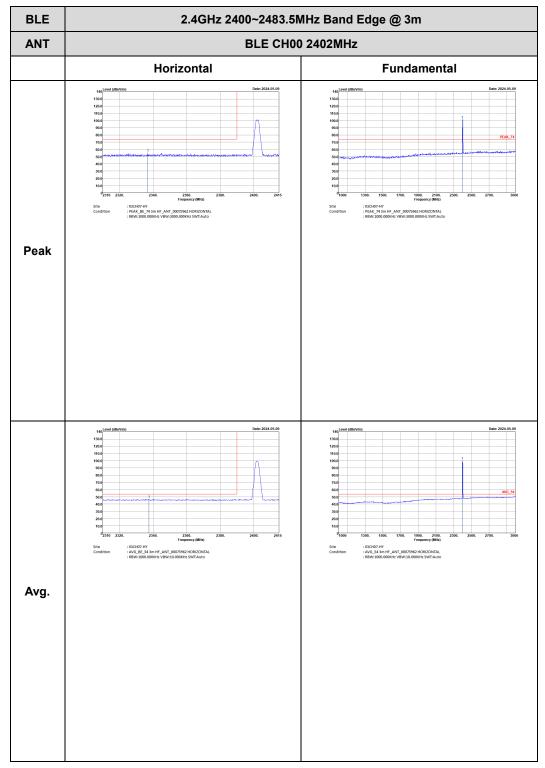

TEL: 886-3-327-3456 Page Number: D13 of D24



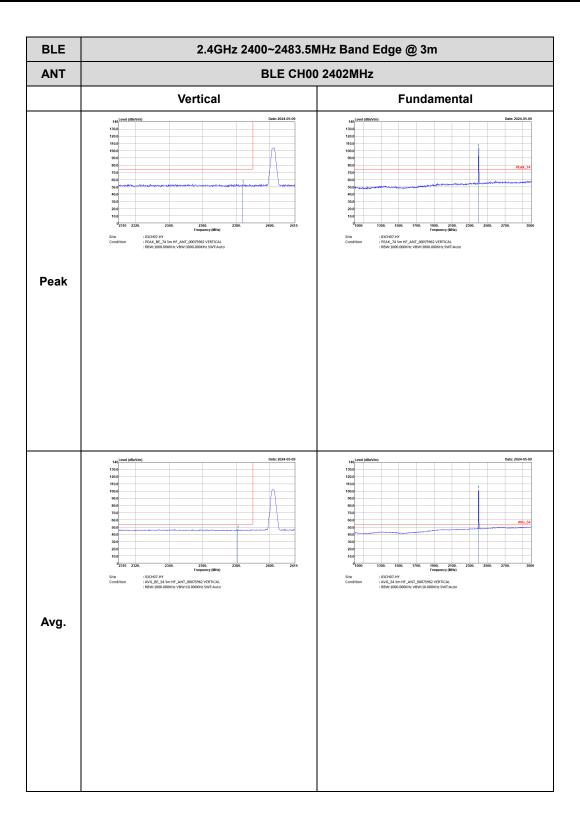

TEL: 886-3-327-3456 Page Number : D14 of D24




BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - L **ANT** Horizontal **Fundamental** : 03CH07-HY : PEAK\_BE\_74 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH07-HY : PEAK\_74 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH07-HY : AVG\_BE\_54 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto : 03CH07-HY : AVG\_54 3m HF\_ANT\_00075962 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Avg.


Report No.: FR432902B

TEL: 886-3-327-3456 Page Number: D15 of D24



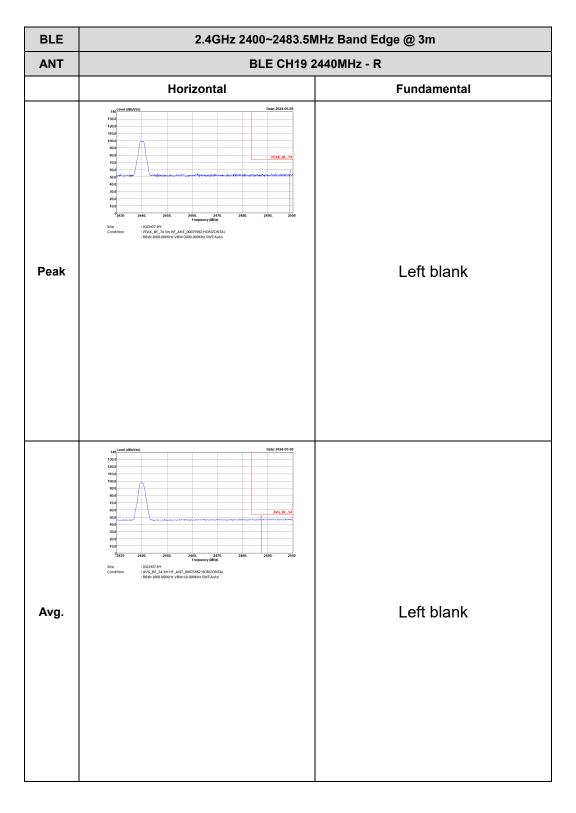


TEL: 886-3-327-3456 Page Number : D16 of D24

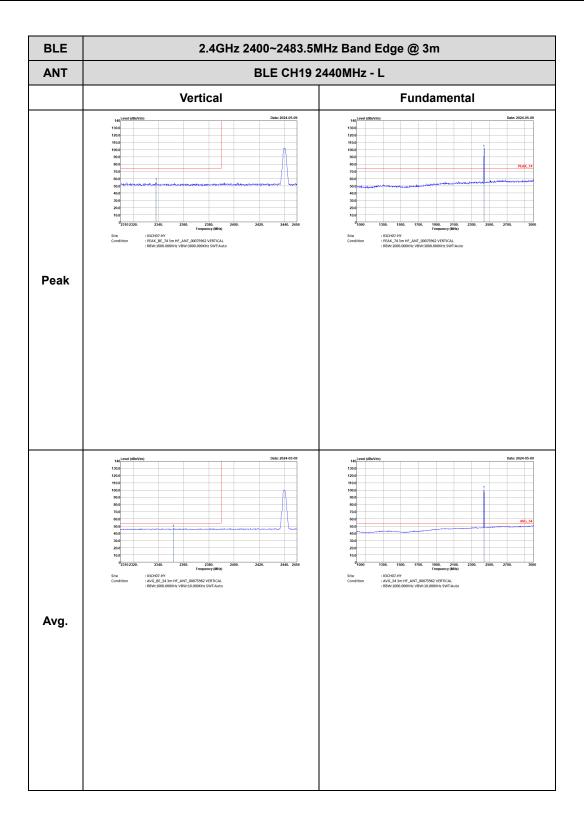


TEL: 886-3-327-3456 : D17 of D24 Page Number


FCC RADIO TEST REPORT Report No.: FR432902B

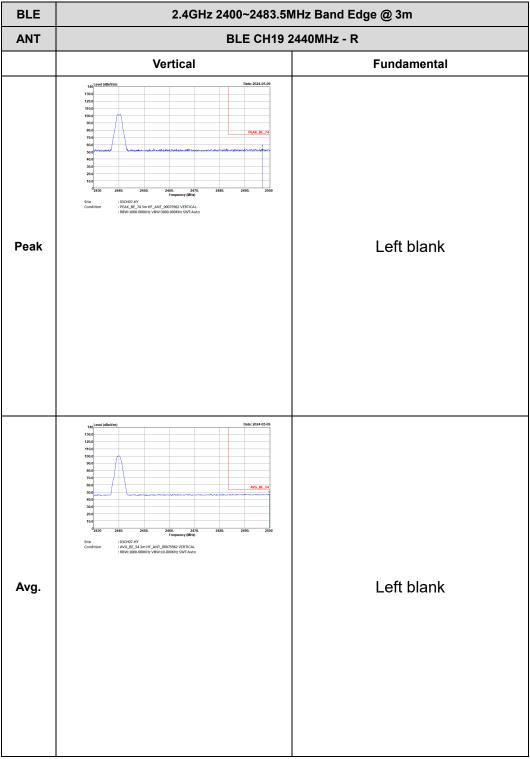

TEL: 886-3-327-3456 : D18 of D24 Page Number

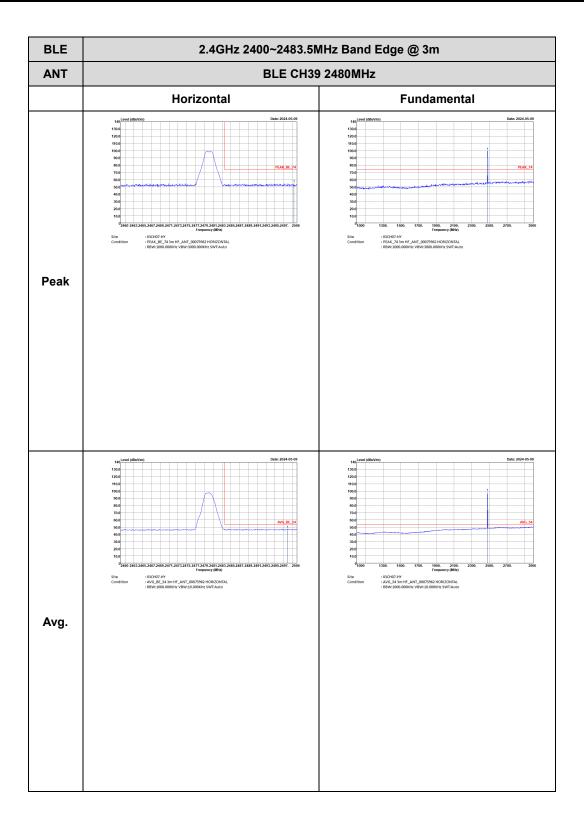

TEL: 886-3-327-3456 : D19 of D24 Page Number

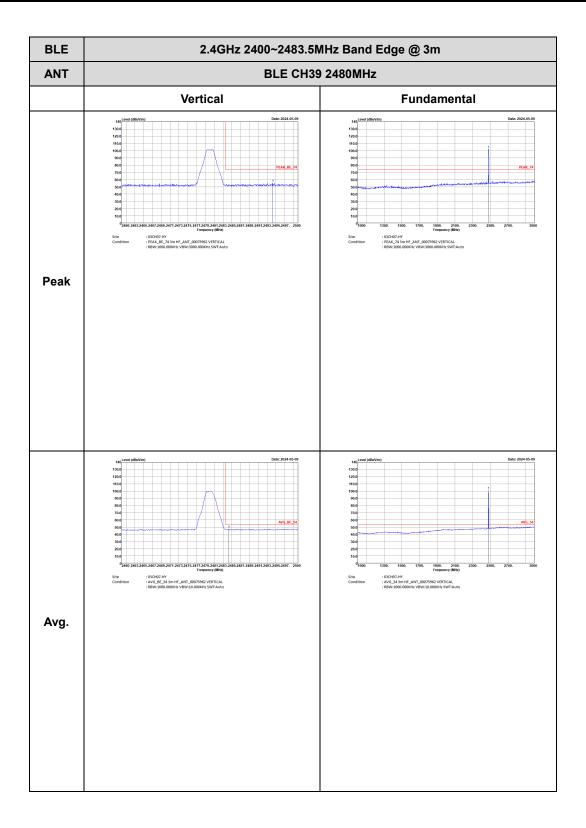


TEL: 886-3-327-3456 : D20 of D24 Page Number


## 2.4GHz 2400~2483.5MHz

Report No.: FR432902B


#### BLE (Harmonic @ 3m)

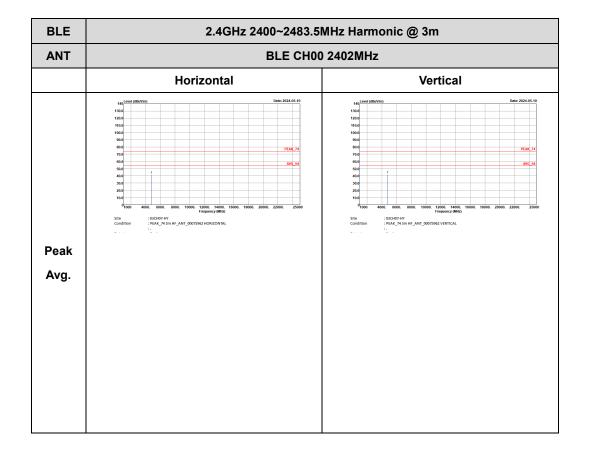

TEL: 886-3-327-3456 Page Number: D21 of D24

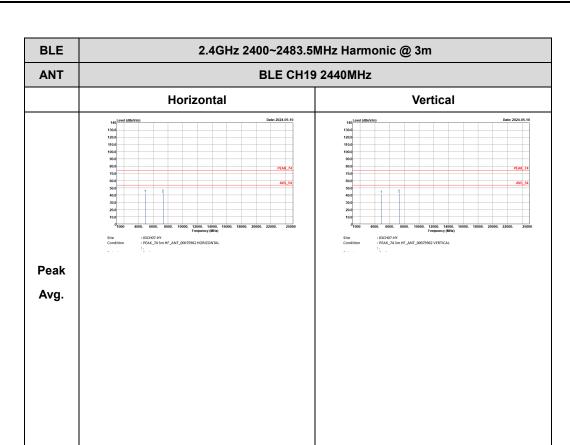


TEL: 886-3-327-3456 Page Number: D22 of D24

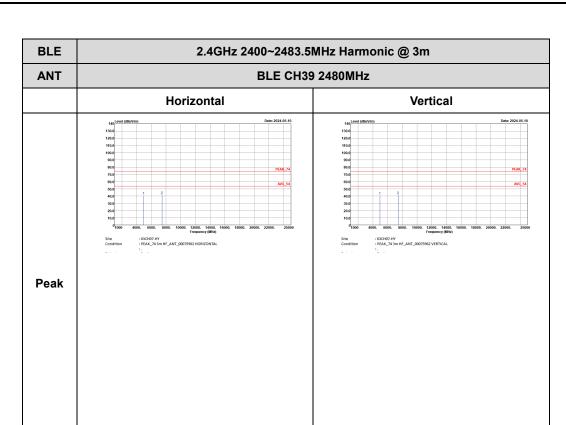

TEL: 886-3-327-3456 Page Number: D23 of D24

## Emission below 1GHz 2.4GHz BLE (LF)

Report No.: FR432902B

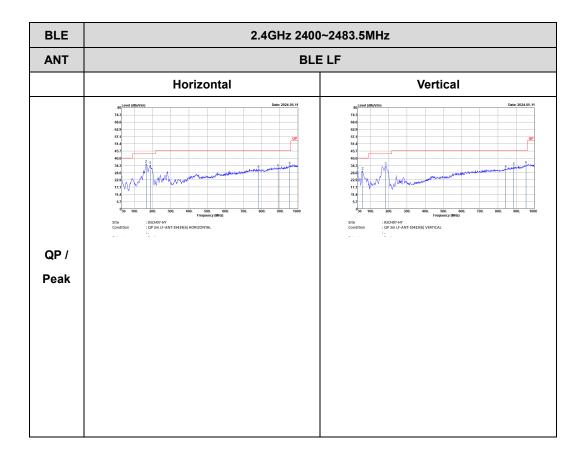


TEL: 886-3-327-3456 Page Number: D24 of D24

## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.72	387	2.58	3kHz
Bluetooth - LE for 2Mbps	32.70	204.3	4.89	10kHz

Report No.: FR432902B

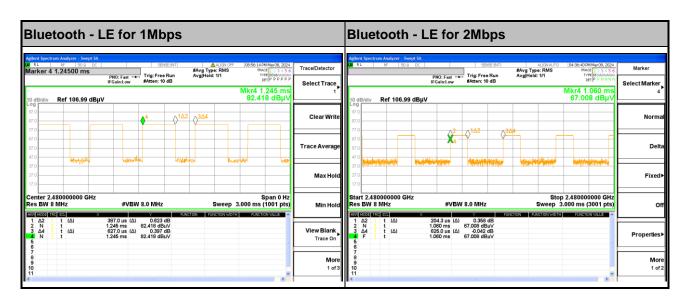

TEL: 886-3-327-3456 Page Number : E1 of E1