



Report No.: FCC1906059 File reference No.: 2019-06-27

Applicant: Shenzhen Star Sources Electronic Technology Co., Ltd.

Product: Keyboard with touchpad

Model No.: BRK2100B

Brand Name: brookstone

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 27, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1906059 Page 2 of 36

Date: 2019-06-27



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Date: 2019-06-27



Test Report Conclusion

Content 1.0 General Details 4 4 1.1 Test Lab Details. 1.2 Applicant Details. 4 1.3 Description of EUT 1.4 Submitted Sample.... 4 1.5 Test Duration. 5 1.6 5 Test Uncertainty. 1.7 Test By..... 5 2.0 List of Measurement Equipment 3.0 7 Technical Details..... 7 3.1 Summary of Test Results.... 3.2 7 Test Standards 4.0 EUT Modification. 7 Power Line Conducted Emission Test. 5.0 5.1 Schematics of the Test. 8 5 2 Test Method and Test Procedure. 8 Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition... Conducted Emission Limit. 5.5 9 5.6 Test Result. 6.0 Radiated Emission test 10 Test Method and Test Procedure. 6.1 10 6.2 Configuration of the EUT..... 10 6.3 EUT Operation Condition.... 10 6.4 Radiated Emission Limit. 11 6.5 Test Result. 12 7.0 Band Edge 20 7.1 Test Method and Test Procedure. 20 7.2 Radiated Test Setup. 20 7.3 Configuration of the EUT..... 20 7.4 EUT Operating Condition.... 20 7.5 Band Edge Limit. 20 Band Edge Test Result. 7.6 21 8.0 Antenna Requirement. 25 9.0 20dB bandwidth measurement. 26 10.0 29 FCC ID Label Photo of Test Setup and EUT View. 30 11.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-06-27



1.0 **General Details**

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Star Sources Electronic Technology Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen,

China

Telephone: 0755 -86397260 Fax: 0755-26609516

1.3 Description of EUT

Product: Keyboard with touchpad

Manufacturer: Shenzhen Star Sources Electronic Technology Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Brand Name: brookstone
Model Number: BRK2100B

Additional Model Name N/A

Input Voltage: DC3.0V, 2 pcs AAA batteries

Modulation Type: GFSK

Operation Frequency 2404-2478MHz

Channel	1	2	3	4	5
Frequency(MHz)	2414	2404	2408	2478	2406
Channel	6	7	8	9	10
Frequency(MHz)	2454	2410	2456	2474	2405
Channel	11	12	13	14	15
Frequency(MHz)	2441	2425	2458	2470	2452
Channel	16	17	18	19	20
Frequency(MHz)	2477	2435	2460	2421	2466

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1906059 Page 5 of 36

Date: 2019-06-27



Antenna Designation PCB antenna with gain 0dBi Max

Hardware Version: V1.4 Software Version: V1.1

1.4 Submitted Sample

2 Sample

1.5 Test Duration

209-06-22 to 2019-06-25

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty =3.6dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 36 Report No.: FCC1906059



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver R&S		ESPI 3	100379	2019-06-21	2020-06-20
Ultra Broadband ANT	R&S	HL562	100157	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2019-06-21	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-18	2020-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-23	2020-05-22
RF Cable	Zhengdi	7m		2019-03-08	2020-03-07
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
DC Power Supply	Jingtong	JT12098	WYK-305	2018.08.20	2019-08-19
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1906059 Page 7 of 36

Date: 2019-06-27



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	Complies
FCC Part 15 Subpart C Paragraph 15.249(a)	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209 15.205	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2019-06-27



5. Power Line Conducted Emission Test

5.1 Schematics of the test

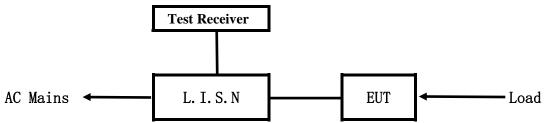


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4-2014.

Block diagram of Test setup

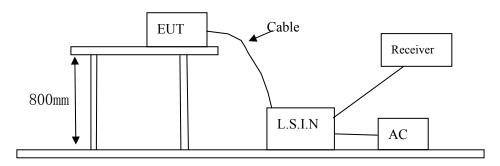

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Keyboard with	Shenzhen Star Sources Electronic	BRK2100B	ZJEST-WK600
touchpad	Technology Co., Ltd.	DKK2100D	ZJES1-W K000

Report No.: FCC1906059 Page 9 of 36

Date: 2019-06-27



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107 and 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB μ V)			
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

N/A

Note: EUT powered by AAA battery, this test item not applicable.

Report No.: FCC1906059 Page 10 of 36


Date: 2019-06-27



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

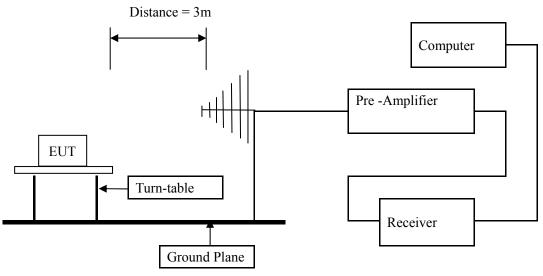

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1906059 Page 11 of 36

Date: 2019-06-27



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ental (3m)	Field S	trength of Harmo	nics (3m)
(MHz)	mV/m	dBu	V/m	uV/m	dBuV/m	
2400-2483.5	50	94 (Average) 114 (Peal		500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. New batteries were used during tests.

Report No.: FCC1906059 Page 12 of 36

Date: 2019-06-27




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel

Horizontal

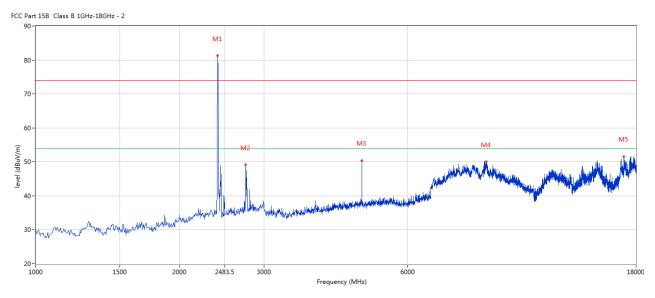

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2402.149	81.22	-3.57	74.0	7.22	Peak	17.00	100	Н	N/A
2	2750.562	49.08	-2.83	74.0	-24.92	Peak	22.00	100	Н	Pass
3	4807.048	50.41	3.13	74.0	-23.59	Peak	0.00	100	Н	Pass
4	8758.560	50.04	7.96	74.0	-23.96	Peak	247.00	100	Н	Pass
5	16959.010	51.62	12.72	74.0	-22.38	Peak	0.00	100	Н	Pass


Report No.: FCC1906059 Page 13 of 36

Date: 2019-06-27



Vertical



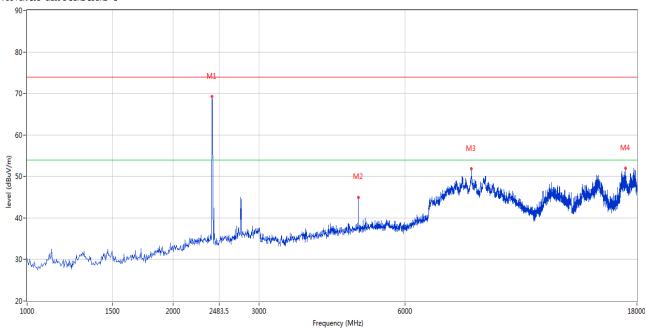

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2402.149	69.24	-3.57	74.0	-4.76	Peak	96.00	100	V	Pass
2	4807.048	45.00	3.13	74.0	-29.00	Peak	87.00	100	V	Pass
3	8214.696	51.83	8.32	74.0	-22.17	Peak	358.00	100	V	Pass
4	17035.491	52.03	12.93	74.0	-21.97	Peak	0.00	100	V	Pass

Page 14 of 36


Report No.: FCC1906059

Date: 2019-06-27



Please refer to the following test plots for details: Middle Channel

Horizontal

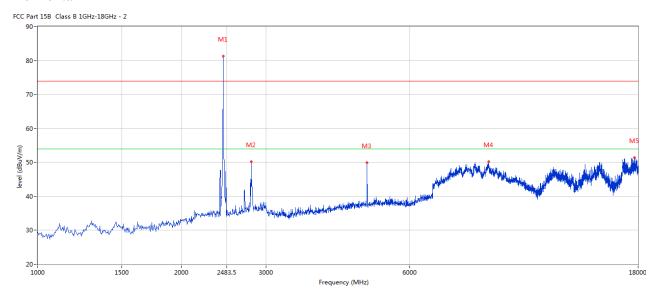


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2440.390	81.27	-3.57	74.0	7.27	Peak	17.00	100	Н	N/A
2	2793.052	50.18	-2.71	74.0	-23.82	Peak	25.00	100	Н	Pass
3	4883.529	49.84	3.20	74.0	-24.16	Peak	360.00	100	Н	Pass
4	8771.307	50.21	7.96	74.0	-23.79	Peak	298.00	100	Н	Pass
5	17677.081	51.39	12.77	74.0	-22.61	Peak	0.00	100	Н	Pass

Report No.: FCC1906059 Page 15 of 36

Date: 2019-06-27



Vertical

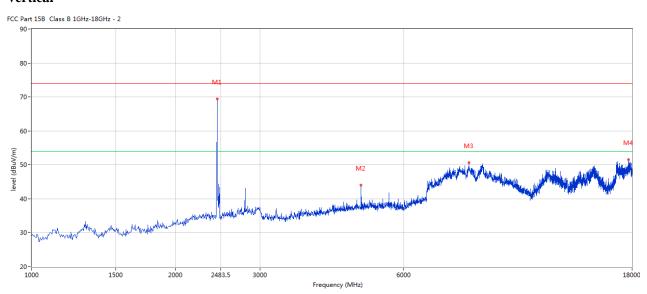

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2440.390	69.44	-3.57	74.0	-4.56	Peak	91.00	100	V	Pass
2	4883.529	44.01	3.20	74.0	-29.99	Peak	86.00	100	V	Pass
3	8206.198	50.60	8.33	74.0	-23.40	Peak	360.00	100	V	Pass
4	17698.325	51.48	12.76	74.0	-22.52	Peak	360.00	100	V	Pass

Page 16 of 36


Report No.: FCC1906059

Date: 2019-06-27



Please refer to the following test plots for details: High Channel

Horizontal

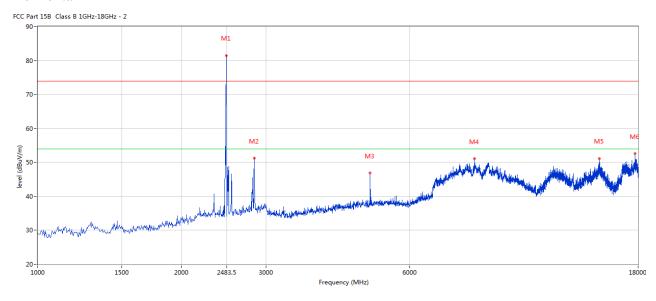

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2478.630	81.51	-3.57	74.0	7.51	Peak	67.00	100	Н	N/A
2	2835.541	51.23	-2.69	74.0	-22.77	Peak	28.00	100	Н	Pass
3	4955.761	46.90	3.35	74.0	-27.10	Peak	0.00	100	Н	Pass
4	8197.701	51.10	8.33	74.0	-22.90	Peak	233.00	100	Н	Pass
5	14932.267	51.14	12.59	74.0	-22.86	Peak	360.00	100	Н	Pass
6	17732.317	52.58	12.75	74.0	-21.42	Peak	360.00	100	Н	Pass


Page 17 of 36

Report No.: FCC1906059

Date: 2019-06-27



Vertical

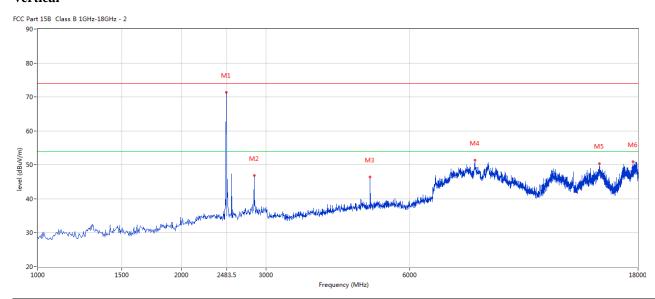

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2478.630	71.36	-3.57	74.0	-2.64	Peak	358.00	100	V	Pass
2	2835.541	46.88	-2.69	74.0	-27.12	Peak	83.00	100	V	Pass
3	4955.761	46.37	3.35	74.0	-27.63	Peak	119.00	100	V	Pass
4	8206.198	51.42	8.33	74.0	-22.58	Peak	267.00	100	V	Pass
5	14949.263	50.39	12.63	74.0	-23.61	Peak	0.00	100	V	Pass
6	17579.355	50.94	12.81	74.0	-23.06	Peak	0.00	100	V	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz, It is only the floor noise. No necessary to take down.

Report No.: FCC1906059 Page 18 of 36

Date: 2019-06-27




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

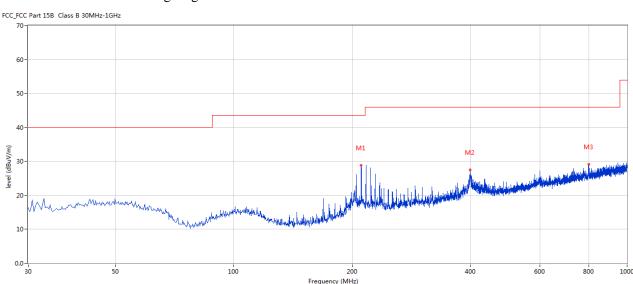

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	210.860	28.89	-13.64	43.5	-14.61	Peak	360.00	200	Н	Pass
2	398.750	27.55	-8.63	46.0	-18.45	Peak	360.00	200	Н	Pass
3	798.533	29.20	-3.01	46.0	-16.80	Peak	126.00	100	Н	Pass

Report No.: FCC1906059 Page 19 of 36

Date: 2019-06-27




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

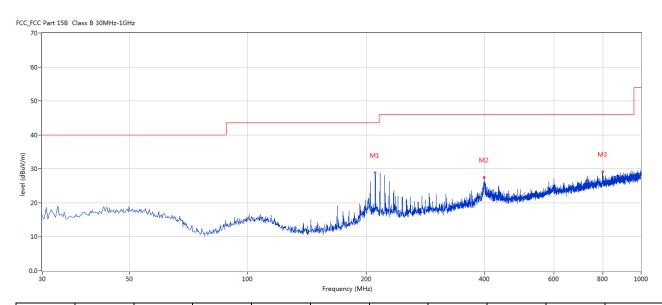

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	210.860	28.89	-13.64	43.5	-14.61	Peak	360.00	200	Н	Pass
2	398.750	27.55	-8.63	46.0	-18.45	Peak	360.00	200	Н	Pass
3	798.533	29.20	-3.01	46.0	-16.80	Peak	126.00	100	Н	Pass

Report No.: FCC1906059 Page 20 of 36

Date: 2019-06-27




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz,VBW=3MHz and Peak detector is for PK value, RMS detector is for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

(Note: for Fundamental frequency radiated emission measurement,RBW=3MHz, VBW=10MHz)

7. 2 Radiated Test Setup

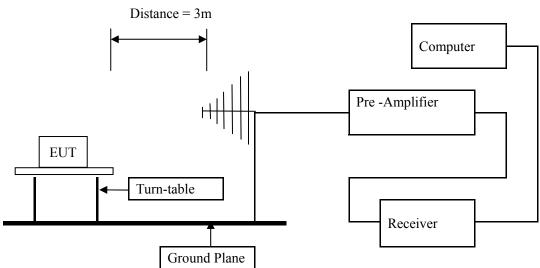

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC1906059 Page 21 of 36

Date: 2019-06-27



7.6 Test Result

Product:	Keyboar	d with touchpad	Polarity	Horizontal
Mode	Keepin	g Transmitting	Test Voltage	DC3.0V
Temperature	2	4 deg. C,	Humidity	56% RH
Test Result:		Pass		
2400MHz	PK (dBμV/m)	55.36	Limit	$74~dB\mu V/m$
2400MHz	AV (dBμV/m)	43.51	Limit	54 dBμV/m
2390 MHz	PK (dBμV/m)	44.71	Limit	74 dBμV/m
2390 MHz	AV (dBμV/m)		Limit	54 dBμV/m

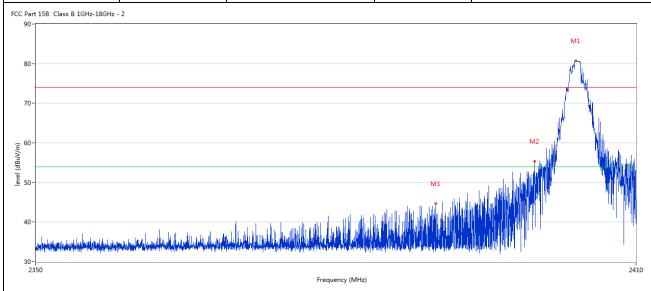


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2403.942	80.69	-3.57	74.0	6.69	Peak	11.00	100	Н	N/A
2	2399.773	55.36	-3.57	74.0	-18.64	Peak	34.00	100	Н	Pass
3	2399.773	43.51	-3.57	54.0	-10.49	AV	34.00	100	Н	Pass
4	2389.830	44.71	-3.53	74.0	-29.29	Peak	219.00	100	Н	Pass

Report No.: FCC1906059 Page 22 of 36



Product:	Keyboar	d with touchpad	Detector	Vertical
Mode	Keeping	g Transmitting	Test Voltage	DC3.0V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:	Pass			
2400MHz	PK (dBμV/m)	45.28	Limit	$74~dB\mu V/m$
2400MHz	AV $(dB\mu V/m)$	1	Limit	54 dBμV/m
2390 MHz	PK (dBμV/m)	35.31	Limit	$74~dB\mu V/m$
2390 MHz	AV (dBμV/m)		Limit	$54~dB\mu V/m$

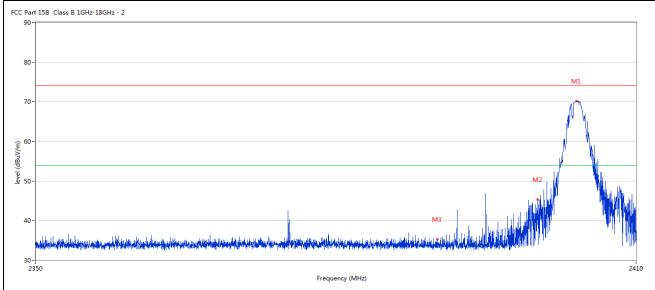


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2403.957	70.18	-3.57	74.0	-3.82	Peak	90.00	100	V	Pass
2	2400.072	45.28	-3.57	74.0	-28.72	Peak	90.00	100	V	Pass
3	2389.980	35.31	-3.53	74.0	-38.69	Peak	197.00	100	V	Pass

Page 23 of 36 Report No.: FCC1906059



Product:	Keyboar	d with touchpad	Polarity	Horizontal
Mode	Keeping	g Transmitting	Test Voltage	DC3.0V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:		Pass		-
2483.5MHz	PK (dBμV/m)	57.06	Limit	$74~dB\mu V/m$
2483.5MHz	AV (dBμV/m)	45.39	Limit	54 dBμV/m

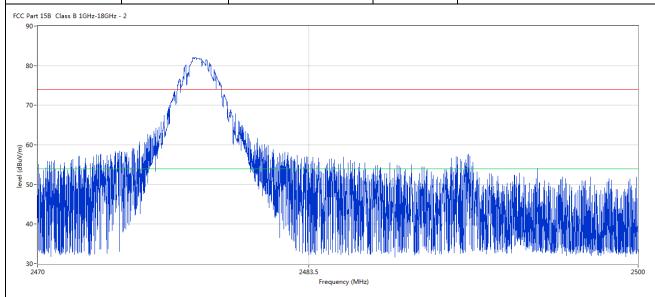

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2477.828	82.01	-3.57	74.0	8.01	Peak	67.00	100	Н	N/A
2	2483.509	57.06	-3.57	74.0	-16.94	Peak	57.00	100	Н	Pass
3	2483.509	45.39	-3.57	54.0	-8.61	AV	57.00	100	Н	Pass
4	2490.608	58.12	-3.69	74.0	-15.88	Peak	57.00	100	Н	Pass
5	2490.608	46.28	-3.69	54.0	-7.72	AV	57.00	100	Н	Pass

Report No.: FCC1906059 Page 24 of 36

Date: 2019-06-27



P	roduct:		Keyboar	d with touc	hpad	De	tector		Vertica	al
	Mode		Keepin	g Transmitt	ing	Test	Voltage		DC3.0	V
Ter	nperature		2	4 deg. C,		Hui	midity		56% R	Н
Tes	st Result:			Pass						
248	83.5MHz	PK (dl	BμV/m)	4	6.26	L	imit		74 dBμV	7/m
248	83.5MHz	AV (dl	BμV/m)			L	imit		54 dBμV	7/m
Part 15	5B Class B 1GHz-18GH	1z - 2		•		•	•			
80-										
70-			Amy							
			N W							
60-		<i>\</i>		N _{ii}						
50-										
n.J	Language de la langu				All Marks began best	hawa a sa		h .		
40-								H. Allanda da d		linds, is come stablened.
20	Minda dia (2004 dia			in in	וראי ויינו או יוינטף ו	ndirih dan militotak		MINISTER PROPERTY.		
30- 2470					2483.5 Frequence	cy (MHz)				25
No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	2477.746	72.02	-3.57	74.0	-1.98	Peak	355.00	100	V	N/A
2	2483.527	46.26	-3.57	74.0	-27.74	Peak	360.00	100	V	Pass

Note: The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: FCC1906059 Page 25 of 36

Date: 2019-06-27



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is 0dBi Max. It fulfills the requirement of this section. Test Result: Pass

Page 26 of 36 Report No.: FCC1906059



9.0 20dB Bandwidt	h Measurement									
Product:	Keyboard with touchpad				Test Mode:			Keep transmitting		
Mode	Keeping Transmitting				Test Voltage		DC3.0V			
Temperature		24 deg. C,			F	Humidity				
Test Result:		Pass]	Detector	PK			
20dB Bandwidth		1.122MHz								
Ŕ	Marke	r 1 [T1 r	ndB]	R	BW	30 k) kHz RF Att 0			
Ref Lvl	ndB			100 k						
-10 dBm	BW	1.122244	49 MHz	SI	ИT	14 m	s U:	nit	dBm	1 -
-10						v ₁	[T1]	-22	.43 dBm	A
2.0			1					2.40398	497 GHz	
-20						ndE		20	.00 dB	
				724		BW ▼ _{T1}	[T1]	1.12224	449 MHz	
-30			7	44/	1			2.40342		
					N	$ riangledown_{ ext{T1}}$	[T1]	-42		1
-40		7	V			7		2.40454	609 GHz	1MA
-50						4				
-60	w. L.	/ ~				\sim	\\	m	4.	
-70									700	
-80										
-90										
-100										
-110 Center 2.	404 GHz		500	kHz/				Spa	ın 5 MHz	
	.JUN.2019	L0:33:09		_,				220		

Page 27 of 36 Report No.: FCC1906059



Mode Keeping Transmitting Temperature 24 deg. C,		Test Vol	togo				
			Test Voltage		Keep transmitting DC3.0V		
		Humidity			56% RH		
Test Result: Pass		Detector			PK		
20dB Bandwidth 1.102MHz	1.102MHz			_			
Marker 1 [T1 ndB]	R	BW 3	0 k1	Hz RF Att 0 dB			
Ref Lvl ndB 20.00 dB	V		0 k1				
-10 dBm BW 1.10220441 MHz	z Si	WT 1	4 ms	s Ui	nit	dBr	n
-10			\mathbf{v}_1	[T1]	-23	.04 dBr	
					2.44098	497 GHz	A
-20	-		ndB		20	.00 dB	1
			BW		1.10220		
-30	HUN		$\nabla_{\mathrm{T}1}$	[T1]	-42	.37 dBr	
	J	\ _	$ abla_{\mathrm{T}2}$	[m 1]	2.44043		
-40		V 	* T2	[T1]	2.44153	.82 dBr 607 GHz	
1MAX		7			2.44133	007 GH2	1MA
-50							
		9					
-60			M				
Joseph John January V			/	Try Jum		myllur	7
-70							
-80							
-90							-
-100							
-110							
Center 2.441 GHz 500 kHz/ Span 5 MHz							
Date: 24.JUN.2019 10:35:12							

Page 28 of 36

Report No.: FCC1906059



Product:	Keyboa	rd with touchpad	Test Mode:	Keep transmi	tting		
Mode		ng Transmitting	Test Voltage				
Temperature		24 deg. C,	Humidity	56% RH	·		
Test Result:		Pass	Detector	PK			
20dB Bandwidth	1	.112MHz					
Ŕ	Marker	1 [T1 ndB]	RBW 30 k	Hz RF Att () dB		
Ref Lvl	ndB	20.00 dB	VBW 100 k	Hz			
-10 dBm	BW	L.11222445 MHz	SWT 14 m	s Unit	dBm		
-10			v ₁	[T1] -25.51	L dBm		
				2.47798497	GHz		
-20		1	ndE	20.00) dB		
		l i	BW	1.11222445	MHz		
-30			V _T		dBm		
				2.47743387			
-40		/ /	\(\sqrt{1}\)	2 [T1] -45.63			
1MAX		₩	Γ2 V	2.47854609	GHz		
-50							
-50							
-60							
4N adlama a		v v v	W	many poor			
-70 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	Long Reserved			V W	''\ \'\\		
-80							
-90							
-100							
-110							
Center 2.478 GHz 500 kHz/ Span 5 MHz							
Date: 24.JUN.2019 10:36:49							

Report No.: FCC1906059 Page 29 of 36

Date: 2019-06-27




10.0 FCC ID Label

FCC ID: ZJEST-WK600

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

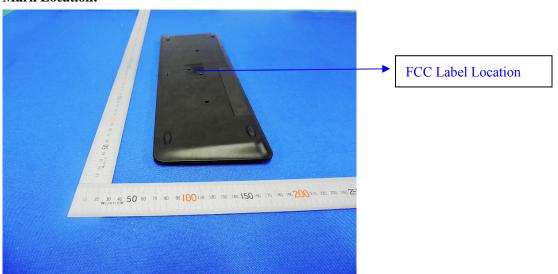


Date: 2019-06-27



11.0 Photo of testing

11.1 Radiated emission test view

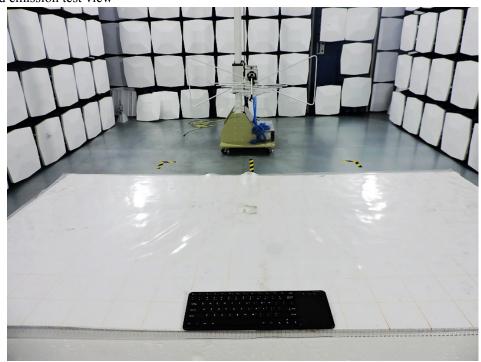



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-06-27



11.2 Photographs – EUT

Outside View-Mouse





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2019-06-27



Photographs – EUT

Outside View-Mouse



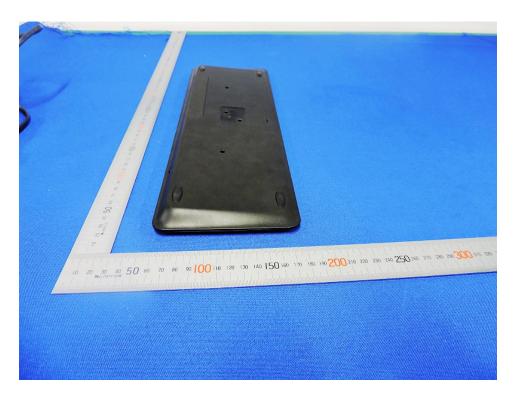

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 33 of 36

Report No.: FCC1906059

Date: 2019-06-27



Outside View-Mouse





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 34 of 36


Report No.: FCC1906059

Date: 2019-06-27



Inside view-Mouse



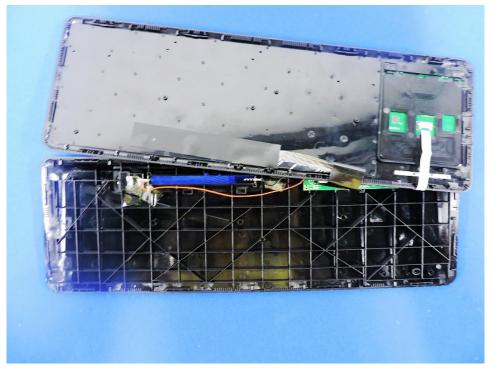

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.


will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2019-06-27



Inside view-Mouse

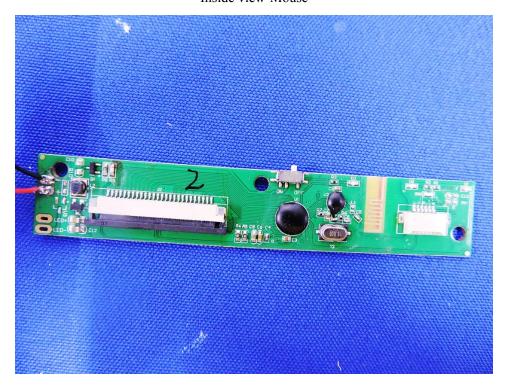

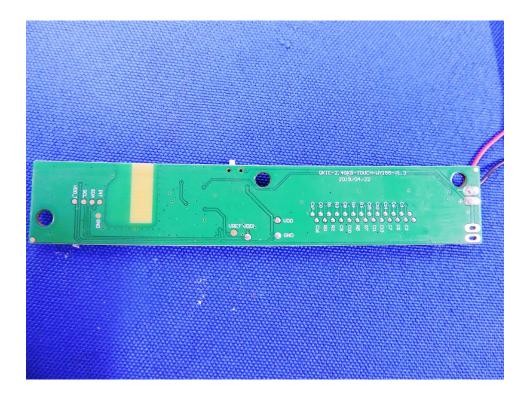

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.


will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2019-06-27



Inside view-Mouse

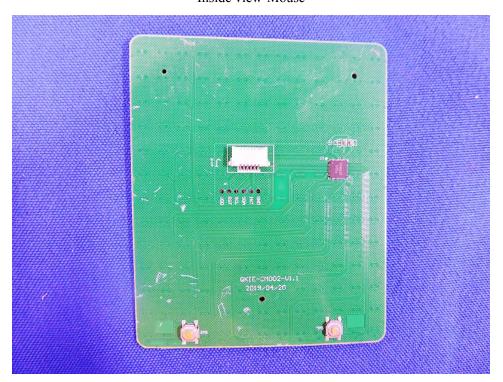

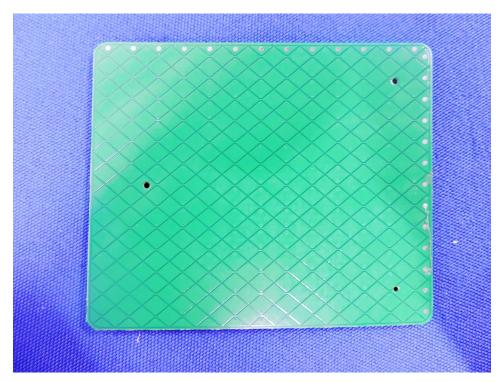

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to