

Note:

- 1. Below 30MHz no Spurious found and above is the worst mode data.
- 2. As no emission found in standby or receive mode, no recording in this report.



Page 50 of 72

13. Radiated Spurious Emission

13.1. Provisions Applicable

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

13.2. Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



Report No.: AGC03709230501FR04 Page 51 of 72


pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.
- 12. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 13. The spurious emissions is calculated by the following formula;
 - ♦ Result(dBm) = Pg(dBm) +Factor(dB)
 - → Factor(dB) = Ant Gain(dB)-Cable Loss(dB) + Power Splitter(dB) (Above 1GHz)
 - → Factor(dB) = Ant Gain(dB)-Cable Loss(dB) (Below 1GHz)
- 14. Where: P_{ois} the generator output power into the substitution antenna.
- 15. If the Fundamental frequency is below 1GHz, RF output power has been converted to EIRP.




13.3. Measurement Setup

Radiated Emissions 30MHz to 1GHz Test setup

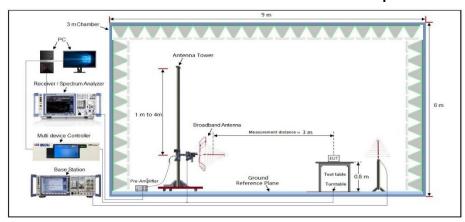

Radiated Emissions Above 1GHz Test setup

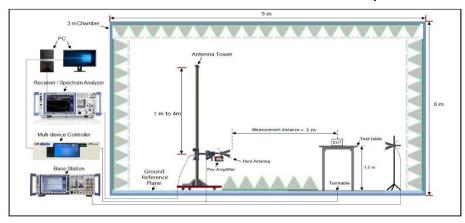




Page 53 of 72

13.4 Measurement Result


The measurement Below 1GHz data as follows:

			G	SM 850			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	Trequency	Reading	factor	Result	Lillin	Wargin	Ant. Pol.
	(MHz)	(dBm)	(dB/m) (dBm)		(dBm)	(dB)	
			GSM_ Lo	west Channel			
1	159.102	-65.93	15.52	-50.41	-13.00	-37.41	Horizontal
2	240.362	-62.47	16.75	-45.72	-13.00	-32.72	Horizontal
3	754.152	-59.23	19.35	-39.88	-13.00	-26.88	Horizontal
4	46.415	-64.74	10.44	-54.30	-13.00	-41.30	Vertical
5	433.374	-61.35	17.75	-43.60	-13.00	-30.60	Vertical
6	502.112	-59.19	18.66	-40.53	-13.00	-27.53	Vertical
			GSM_ M	iddle Channel			
1	32.636	-60.12	9.78	-50.34	-13.00	-37.34	Horizontal
2	159.695	-60.10	13.75	-46.35	-13.00	-33.35	Horizontal
3	240.051	-56.79	16.75	-40.04	-13.00	-27.04	Horizontal
4	43.748	-64.56	10.23	-54.33	-13.00	-41.33	Vertical
5	435.035	-62.03	17.75	-44.28	-13.00	-31.28	Vertical
6	498.117	-58.37	18.02	-40.35	-13.00	-27.35	Vertical
			GSM_ Hi	ghest Channe			·
1	160.025	-66.90	13.75	-53.15	-13.00	-40.15	Horizontal
2	240.158	-65.91	16.75	-49.16	-13.00	-36.16	Horizontal
3	679.745	-63.11	19.01	-44.10	-13.00	-31.10	Horizontal
4	43.639	-63.66	10.23	-53.43	-13.00	-40.43	Vertical
5	433.745	-61.79	17.75	-44.04	-13.00	-31.04	Vertical
6	498.859	-58.91	18.02	-40.89	-13.00	-27.89	Vertical






			PC	CS 1900			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	riequeiloy	Reading	factor	Result	Lillit	Wargin	Ant. Pol.
	(MHz)	(dBm)	(dB/m) (dBm)		(dBm)	(dB)	
			GSM_ Lo	west Channe			
1	159.759	-65.41	15.52	-49.89	-13.00	-36.89	Horizontal
2	240.144	-60.78	16.75	-44.03	-13.00	-31.03	Horizontal
3	754.963	-58.04	19.35	-38.69	-13.00	-25.69	Horizontal
4	46.708	-63.63	10.44	-53.19	-13.00	-40.19	Vertical
5	433.340	-59.22	17.75	-41.47	-13.00	-28.47	Vertical
6	502.247	-58.01	18.66	-39.35	-13.00	-26.35	Vertical
				iddle Channel			
1	31.735	-63.17	9.78	-53.39	-13.00	-40.39	Horizontal
2	159.759	-64.16	13.75	-50.41	-13.00	-37.41	Horizontal
3	240.144	-61.43	16.75	-44.68	-13.00	-31.68	Horizontal
4	43.233	-63.74	10.23	-53.51	-13.00	-40.51	Vertical
5	433.340	-62.47	17.75	-44.72	-13.00	-31.72	Vertical
6	498.730	-59.17	18.02	-41.15	-13.00	-28.15	Vertical
			GSM_ Hi	ghest Channe	l		<u>.</u>
1	159.759	-64.37	13.75	-50.62	-13.00	-37.62	Horizontal
2	240.144	-62.78	16.75	-46.03	-13.00	-33.03	Horizontal
3	679.435	-58.77	19.01	-39.76	-13.00	-26.76	Horizontal
4	43.233	-64.70	10.23	-54.47	-13.00	-41.47	Vertical
5	433.340	-61.28	17.75	-43.53	-13.00	-30.53	Vertical
6	498.730	-58.57	18.02	-40.55	-13.00	-27.55	Vertical





			WCDI	MA Band II			
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	rrequericy	Reading	factor	Result	Lillit	Wiaigiii	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbps	s_ Lowest Cha	annel		
1	159.759	-68.67	15.52	-53.15	-13.00	-40.15	Horizontal
2	240.144	-65.91	16.75	-49.16	-13.00	-36.16	Horizontal
3	754.963	-63.45	19.35	-44.10	-13.00	-31.10	Horizontal
4	46.708	-63.87	10.44	-53.43	-13.00	-40.43	Vertical
5	433.340	-61.79	17.75	-44.04	-13.00	-31.04	Vertical
6	502.247	-59.55	18.66	-40.89	-13.00	-27.89	Vertical
			RMC 12.2kbp	s_ Middle Cha	nnel		
1	31.735	-62.03	9.78	-52.25	-13.00	-39.25	Horizontal
2	159.759	-62.07	13.75	-48.32	-13.00	-35.32	Horizontal
3	240.144	-60.11	16.75	-43.36	-13.00	-30.36	Horizontal
4	43.233	-62.68	10.23	-52.45	-13.00	-39.45	Vertical
5	433.340	-62.78	17.75	-45.03	-13.00	-32.03	Vertical
6	498.730	-57.60	18.02	-39.58	-13.00	-26.58	Vertical
			RMC 12.2kbps	_ Highest Ch	annel		
1	159.759	-65.36	13.75	-51.61	-13.00	-38.61	Horizontal
2	240.144	-63.48	16.75	-46.73	-13.00	-33.73	Horizontal
3	679.435	-60.17	19.01	-41.16	-13.00	-28.16	Horizontal
4	43.233	-64.26	10.23	-54.03	-13.00	-41.03	Vertical
5	433.340	-62.28	17.75	-44.53	-13.00	-31.53	Vertical
6	498.730	-59.43	18.02	-41.41	-13.00	-28.41	Vertical






			WCDI	MA Band V			
	Eroguenev	SA	Correction	EIRP	Limit	Margin	
No.	Frequency	Reading	factor	Result	Lillit	Wargin	Ant. Pol.
	(MHz)	(dBm)	(dB/m) (dBm)		(dBm)	(dB)	
			RMC 12.2kbps	s_ Lowest Cha	annel		
1	136.521	-66.12	15.52	-50.60	-13.00	-37.60	Horizontal
2	258.914	-63.13	16.75	-46.38	-13.00	-33.38	Horizontal
3	783.021	-60.04	19.35	-40.69	-13.00	-27.69	Horizontal
4	50.122	-65.10	10.44	-54.66	-13.00	-41.66	Vertical
5	395.365	-61.96	17.75	-44.21	-13.00	-31.21	Vertical
6	511.745	-61.65	18.66	-42.99	-13.00	-29.99	Vertical
	1			s_ Middle Cha	nnel		
1	31.262	-62.83	9.78	-53.05	-13.00	-40.05	Horizontal
2	159.031	-63.09	13.75	-49.34	-13.00	-36.34	Horizontal
3	240.854	-62.08	16.75	-45.33	-13.00	-32.33	Horizontal
4	43.612	-63.69	10.23	-53.46	-13.00	-40.46	Vertical
5	433.362	-62.26	17.75	-44.51	-13.00	-31.51	Vertical
6	498.291	-58.89	18.02	-40.87	-13.00	-27.87	Vertical
			RMC 12.2kbps	_ Highest Ch	annel		
1	122.586	-64.19	13.75	-50.44	-13.00	-37.44	Horizontal
2	245.012	-61.89	16.75	-45.14	-13.00	-32.14	Horizontal
3	689.362	-60.39	19.01	-41.38	-13.00	-28.38	Horizontal
4	45.336	-64.15	10.23	-53.92	-13.00	-40.92	Vertical
5	435.012	-61.26	17.75	-43.51	-13.00	-30.51	Vertical
6	601.015	-59.28	18.02	-41.26	-13.00	-28.26	Vertical



Page 57 of 72


The measurement Above 1GHz data as follows:

	GSM 850												
	Fraguency	SA	Correction	EIRP	Limit	Morain							
No.	Frequency	Reading	factor	Result	LIIIII	Margin	Ant. Pol.						
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)							
	GSM_ Lowest Channel												
1	1648.400	-88.28	23.50	-64.78	-13.00	-51.78	Horizontal						
2	2472.600	-87.56	29.47	-58.09	-13.00	-45.09	Horizontal						
3	1648.400	-88.91	23.72	-65.19	-13.00	-52.19	Vertical						
4	2472.600	-88.61	29.47	-59.14	-13.00	-46.14	Vertical						
			GSM_ M	iddle Channel									
1	1673.200	-88.07	23.50	-64.57	-13.00	-51.57	Horizontal						
2	2509.800	-90.26	29.47	-60.79	-13.00	-47.79	Horizontal						
3	1673.200	-87.97	23.72	-64.25	-13.00	-51.25	Vertical						
4	2509.800	-92.35	29.47	-62.88	-13.00	-49.88	Vertical						
			GSM_ Hi	ghest Channe									
1	1697.600	-92.22	23.50	-68.72	-13.00	-55.72	Horizontal						
2	2546.400	-92.56	29.47	-63.09	-13.00	-50.09	Horizontal						
3	1697.600	-92.33	23.72	-68.61	-13.00	-55.61	Vertical						
4	2546.400	-92.75	29.47	-63.28	-13.00	-50.28	Vertical						






	PCS 1900												
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.						
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)							
	GSM_ Lowest Channel												
1	3700.400	-86.21	32.11	-54.10	-13.00	-41.10	Horizontal						
2	5550.600	-85.78	33.21	-52.57	-13.00	-39.57	Horizontal						
3	3700.400	-87.99	32.09	-55.90	-13.00	-42.90	Vertical						
4	5550.600 -86.50		34.03	-52.47	-13.00	-39.47	Vertical						
			GSM_ M	iddle Channel									
1	3760.000	-82.45	32.11	-50.34	-13.00	-37.34	Horizontal						
2	5640.000	-84.35	33.21	-51.14	-13.00	-38.14	Horizontal						
3	3760.000	-89.28	32.09	-57.19	-13.00	-44.19	Vertical						
4	5640.000	-86.40	34.03	-52.37	-13.00	-39.37	Vertical						
			GSM_ Hig	ghest Channe									
1	3819.600	-88.54	32.11	-56.43	-13.00	-43.43	Horizontal						
2	5729.400	-86.91	33.21	-53.70	-13.00	-40.70	Horizontal						
3	3819.600	-90.67	32.09	-58.58	-13.00	-45.58	Vertical						
4	5729.400	-89.40	34.03	-55.37	-13.00	-42.37	Vertical						





			WCDI	MA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbps	s_ Lowest Cha	annel		
1	3704.800	-82.69	31.09	-51.60	-13.00	-38.60	Horizontal
2	5557.200	-90.42	34.14	-56.28	-13.00	-43.28	Horizontal
3	3704.800	-80.45	33.13	-47.32	-13.00	-34.32	Vertical
4	5557.200	-85.95	32.66	-53.29	-13.00	-40.29	Vertical
			RMC 12.2kbp	s_ Middle Cha	nnel		
1	3760.000	-79.82	31.09	-48.73	-13.00	-35.73	Horizontal
2	5640.000	-88.43	34.14	-54.29	-13.00	-41.29	Horizontal
3	3760.000	-79.68	33.13	-46.55	-13.00	-33.55	Vertical
4	5640.000	-84.98	32.66	-52.32	-13.00	-39.32	Vertical
			RMC 12.2kbps	s_ Highest Cha	annel		
1	3815.200	-83.53	31.09	-52.44	-13.00	-39.44	Horizontal
2	5722.800	-86.45	34.14	-52.31	-13.00	-39.31	Horizontal
3	3815.200	-82.30	33.13	-49.17	-13.00	-36.17	Vertical
4	5722.800	-83.49	32.66	-50.83	-13.00	-37.83	Vertical





	WCDMA Band V												
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.						
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)							
	RMC 12.2kbps_ Lowest Channel												
1	1652.800	-83.32	23.12	-60.20	-13.00	-47.20	Horizontal						
2	2479.200	-85.98	28.47	-57.51	-13.00	-44.51	Horizontal						
3	1652.800	-84.00	23.12	-60.88	-13.00	-47.88	Vertical						
4	2479.200	-83.21	28.47	-54.74	-13.00	-41.74	Vertical						
			RMC 12.2kbp	s_ Middle Cha	ınnel								
1	1672.800	-81.36	23.12	-58.24	-13.00	-45.24	Horizontal						
2	2509.200	-83.75	28.47	-55.28	-13.00	-42.28	Horizontal						
3	1672.800	-83.56	23.12	-60.44	-13.00	-47.44	Vertical						
4	2509.200	-82.41	28.47	-53.94	-13.00	-40.94	Vertical						
			RMC 12.2kbps	_ Highest Cha	annel								
1	1693.200	-80.27	23.12	-57.15	-13.00	-44.15	Horizontal						
2	2539.800	-82.07	28.47	-53.60	-13.00	-40.60	Horizontal						
3	1693.200	-80.94	23.12	-57.82	-13.00	-44.82	Vertical						
4	2539.800	-80.85	28.47	-52.38	-13.00	-39.38	Vertical						

Note:

- Correct Factor = Antenna Factor + Cable Loss Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- 2. Result = Reading + Correct Factor.
- 3. Margin = Result Limit
- 4. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.



Page 61 of 72

14. Frequency Stability / Variation of Ambient Temperature

14.1 Provisions Applicable

14.1.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


14.1.2 For equipment powered by primary supply voltage

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2. reference).
- 3. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4. the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at
- 6. least one half-hour is provided to allow stabilization of the equipment at each temperature level.

14.2 Measurement Procedure

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30°C. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each






voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.

- 5. Subject the EUT to overnight soak at +50℃.
- 6. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8. At all temperature levels hold the temperature to +/- 0.5° C during the measurement procedure.

14.3 Measurement Setup

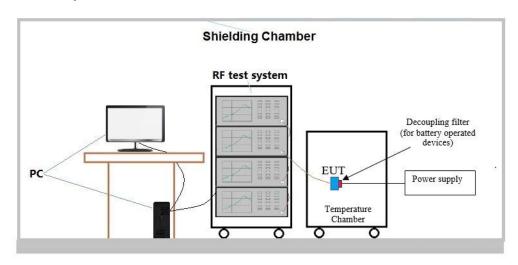




Page 63 of 72

14.4 Measurement Result

• Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Vordiet																
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict																
			TN	VL	-2.91	-0.003531	±2.5	PASS																
		LCH	TN	VN	-3.81	-0.004623	±2.5	PASS																
			TN	VH	-4.07	-0.004938	±2.5	PASS																
	GSM	6M MCH	TN	VL	-2.45	-0.002929	±2.5	PASS																
GSM850			TN	VN	-1.74	-0.002080	±2.5	PASS																
																			TN	VH	-1.36	-0.001626	±2.5	PASS
			TN	VL	1.74	0.002050	±2.5	PASS																
		HCH	TN	VN	-2.71	-0.003193	±2.5	PASS																
			TN	VH	-2.20	-0.002592	±2.5	PASS																

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Vordiet	
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict	
			TN	VL	-2.49	-0.003021	±2.5	PASS	
		LCH	TN	VN	-2.71	-0.003288	±2.5	PASS	
			TN	VH	4.33	0.005254	±2.5	PASS	
	EDGE		TN	VL	3.07	0.003670	±2.5	PASS	
GSM850		MCH	TN	VN	3.65	0.004363	±2.5	PASS	
			TN	VH	0.23	0.000275	±2.5	PASS	
			TN	VL	3.58	0.004218	±2.5	PASS	
		HCH	TN	VN	2.49	0.002934	±2.5	PASS	
			TN	VH	2.62	0.003087	±2.5	PASS	





Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	Verdict	
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	verdict	
			TN	VL	3.03	0.001638	Pass	
		LCH	TN	VN	1.23	0.000665	Pass	
			TN	VH	1.81	0.000978	Pass	
			TN	VL	4.84	0.002574	Pass	
PCS1900	GSM	MCH	TN	VN	-0.13	-0.000069	Pass	
			TN	VH	3.29	0.001750	Pass	
			TN	VL	3.49	0.001827	Pass	
		HCH	TN	VN	3.42	0.001791	Pass	
			TN	VH	2.20	0.001152	Pass	

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	
			TN	VL	19.79	0.010696	Pass
		LCH	TN	VN	20.05	0.010837	Pass
			TN	VH	10.56	0.005707	Pass
			TN	VL	10.91	0.005803	Pass
PCS1900	EDGE	MCH	TN	VN	12.69	0.006750	Pass
			TN	VH	11.69	0.006218	Pass
			TN	VL	13.69	0.007168	Pass
		HCH	TN	VN	11.14	0.005833	Pass
			TN	VH	9.33	0.004885	Pass

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.





Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	Limit	\/ordiot	
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict	
			TN	VL	-9.08	-0.010987	±2.5	Pass	
		MCH	TN	VN	-13.00	-0.015731	±2.5	Pass	
	UMTS		TN	VH	-11.32	-0.013698	±2.5	Pass	
			TN	VL	-11.57	-0.013833	±2.5	Pass	
WCDMA850			TN	VN	-12.48	-0.014921	±2.5	Pass	
			TN	VH	-11.11	-0.013283	±2.5	Pass	
		НСН	TN	VL	-6.08	-0.007182	±2.5	Pass	
			TN	VN	-10.39	-0.012273	±2.5	Pass	
			TN	VH	-10.69	-0.012627	±2.5	Pass	

Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	\
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	Verdict
		LCH	TN	VL	-11.72	-0.006327	Pass
			TN	VN	-11.52	-0.006219	Pass
	UMTS		TN	VH	-15.13	-0.008168	Pass
		МСН	TN	VL	-16.67	-0.008867	Pass
WCDMA1900			TN	VN	-17.05	-0.009069	Pass
			TN	VH	-13.30	-0.007074	Pass
		НСН	TN	VL	-11.01	-0.005772	Pass
			TN	VN	-9.36	-0.004907	Pass
			TN	VH	-13.92	-0.007297	Pass


Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Page 66 of 72


Frequency Error vs. Temperature:

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq. Error (Hz)	Freq. vs Rated (ppm)	Limit (ppm)	Verdict
			VN	-30	-4.07	-0.004938	±2.5	PASS
			VN	-20	-3.36	-0.004077	±2.5	PASS
			VN	-10	-1.68	-0.002038	±2.5	PASS
			VN	0	-0.71	-0.000861	±2.5	PASS
GSM850	GSM	LCH	VN	10	-4.20	-0.005096	±2.5	PASS
			VN	20	-1.03	-0.001250	±2.5	PASS
			VN	30	-0.65	-0.000789	±2.5	PASS
			VN	40	-2.52	-0.003058	±2.5	PASS
			VN	50	-5.23	-0.006346	±2.5	PASS
		MCH	VN	-30	0.19	0.000227	±2.5	PASS
			VN	-20	0.84	0.001004	±2.5	PASS
			VN	-10	-2.71	-0.003239	±2.5	PASS
			VN	0	1.49	0.001781	±2.5	PASS
GSM850	GSM		VN	10	-0.97	-0.001159	±2.5	PASS
			VN	20	-1.36	-0.001626	±2.5	PASS
			VN	30	-2.65	-0.003168	±2.5	PASS
			VN	40	-2.39	-0.002857	±2.5	PASS
			VN	50	-5.42	-0.006479	±2.5	PASS
			VN	-30	-1.29	-0.001520	±2.5	PASS
			VN	-20	-2.39	-0.002816	±2.5	PASS
			VN	-10	-1.10	-0.001296	±2.5	PASS
			VN	0	-3.16	-0.003723	±2.5	PASS
GSM850	GSM	HCH	VN	10	-0.90	-0.001060	±2.5	PASS
			VN	20	0.52	0.000613	±2.5	PASS
			VN	30	-2.45	-0.002886	±2.5	PASS
			VN	40	-2.20	-0.002592	±2.5	PASS
			VN	50	0.32	0.000377	±2.5	PASS






Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq. Error (Hz)	Freq. vs Rated (ppm)	Limit (ppm)	Verdict
			VN	-30	1.52	0.001844	±2.5	PASS
			VN	-20	1.00	0.001213	±2.5	PASS
			VN	-10	-10.17	-0.012339	±2.5	PASS
			VN	0	-9.81	-0.011902	±2.5	PASS
GSM850	EDGE	LCH	VN	10	-10.01	-0.012145	±2.5	PASS
			VN	20	-9.56	-0.011599	±2.5	PASS
			VN	30	-9.59	-0.011636	±2.5	PASS
			VN	40	-6.26	-0.007595	±2.5	PASS
			VN	50	-8.72	-0.010580	±2.5	PASS
		МСН	VN	-30	0.77	0.000920	±2.5	PASS
			VN	-20	2.16	0.002582	±2.5	PASS
			VN	-10	-5.55	-0.006634	±2.5	PASS
			VN	0	-2.94	-0.003514	±2.5	PASS
GSM850	EDGE		VN	10	-2.84	-0.003395	±2.5	PASS
			VN	20	-7.14	-0.008535	±2.5	PASS
			VN	30	-5.00	-0.005977	±2.5	PASS
			VN	40	-4.97	-0.005941	±2.5	PASS
			VN	50	-6.10	-0.007291	±2.5	PASS
			VN	-30	1.39	0.001638	±2.5	PASS
			VN	-20	3.20	0.003770	±2.5	PASS
			VN	-10	-4.13	-0.004866	±2.5	PASS
			VN	0	-1.97	-0.002321	±2.5	PASS
GSM850	EDGE	HCH	VN	10	-2.91	-0.003428	±2.5	PASS
			VN	20	-0.97	-0.001143	±2.5	PASS
			VN	30	-1.55	-0.001826	±2.5	PASS
			VN	40	-3.58	-0.004218	±2.5	PASS
			VN	50	-0.94	-0.001107	±2.5	PASS





Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq. Error (Hz)	Freq. vs Rated (ppm)	Verdict
			VN	-30	-0.84	-0.000454	PASS
			VN	-20	-1.49	-0.000805	PASS
			VN	-10	-2.26	-0.001221	PASS
			VN	0	1.87	0.001011	PASS
GSM1900	GSM	LCH	VN	10	-0.52	-0.000281	PASS
			VN	20	1.94	0.001049	PASS
			VN	30	-2.84	-0.001535	PASS
			VN	40	-1.16	-0.000627	PASS
			VN	50	2.32	0.001254	PASS
	GSM	МСН	VN	-30	2.26	0.001202	PASS
			VN	-20	2.91	0.001548	PASS
			VN	-10	6.52	0.003468	PASS
			VN	0	2.78	0.001479	PASS
GSM1900			VN	10	6.13	0.003261	PASS
			VN	20	3.29	0.001750	PASS
			VN	30	3.55	0.001888	PASS
			VN	40	3.29	0.001750	PASS
			VN	50	-0.97	-0.000516	PASS
			VN	-30	0.58	0.000304	PASS
			VN	-20	1.55	0.000812	PASS
			VN	-10	4.20	0.002199	PASS
			VN	0	3.23	0.001691	PASS
GSM1900	GSM	HCH	VN	10	0.13	0.000068	PASS
			VN	20	1.49	0.000780	PASS
			VN	30	2.97	0.001555	PASS
			VN	40	8.01	0.004194	PASS
			VN	50	4.65	0.002435	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.






Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq. Error (Hz)	Freq. vs Rated (ppm)	Verdict
Darid Wiodi	Wiede	Ondimor	VN	-30	12.27	0.006632	PASS
			VN	-20	11.36	0.006140	PASS
			VN	-10	21.21	0.011464	PASS
			VN	0	19.11	0.010329	PASS
GSM1900	EDGE	LCH	VN	10	19.11	0.010329	PASS
			VN	20	18.11	0.009788	PASS
			VN	30	10.98	0.005934	PASS
			VN	40	11.14	0.006021	PASS
			VN	50	11.69	0.006318	PASS
			VN	-30	13.88	0.007383	PASS
	EDGE	MCH	VN	-20	12.82	0.006819	PASS
			VN	-10	10.46	0.005564	PASS
			VN	0	10.75	0.005718	PASS
GSM1900			VN	10	8.78	0.004670	PASS
			VN	20	7.94	0.004223	PASS
			VN	30	13.14	0.006989	PASS
			VN	40	15.79	0.008399	PASS
			VN	50	17.24	0.009170	PASS
			VN	-30	12.75	0.006676	PASS
			VN	-20	14.53	0.007608	PASS
			VN	-10	5.75	0.003011	PASS
			VN	0	11.91	0.006236	PASS
GSM1900	EDGE	HCH	VN	10	10.65	0.005577	PASS
			VN	20	19.34	0.010127	PASS
			VN	30	14.63	0.007660	PASS
			VN	40	12.53	0.006561	PASS
			VN	50	8.17	0.004278	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Report No.: AGC03709230501FR04 Page 70 of 72

Test	Test	Test	Test	Test	Freq. Error	Freq. vs rated	Limit	\
Band	Mode	Channel	Volt.	Tem. (°C)	(Hz)	(ppm)	(ppm)	Verdict
			VN	-30	-11.17	-0.013516	±2.5	Pass
			VN	-20	-7.33	-0.008870	±2.5	Pass
			VN	-10	-8.37	-0.010128	±2.5	Pass
			VN	0	-12.07	-0.014606	±2.5	Pass
WCDMA850	UMTS	LCH	VN	10	-9.02	-0.010915	±2.5	Pass
			VN	20	-7.96	-0.009632	±2.5	Pass
			VN	30	-10.61	-0.012839	±2.5	Pass
			VN	40	-11.60	-0.014037	±2.5	Pass
			VN	50	-8.35	-0.010104	±2.5	Pass
		МСН	VN	-30	-9.00	-0.010891	±2.5	Pass
			VN	-20	-8.28	-0.010019	±2.5	Pass
			VN	-10	-12.40	-0.014825	±2.5	Pass
			VN	0	-8.66	-0.010354	±2.5	Pass
WCDMA850	UMTS		VN	10	-6.59	-0.007879	±2.5	Pass
			VN	20	-7.72	-0.009230	±2.5	Pass
			VN	30	-5.12	-0.006121	±2.5	Pass
			VN	40	-10.24	-0.012243	±2.5	Pass
			VN	50	-10.73	-0.012829	±2.5	Pass
			VN	-30	-9.01	-0.010772	±2.5	Pass
			VN	-20	-12.45	-0.014885	±2.5	Pass
			VN	-10	-11.53	-0.013785	±2.5	Pass
			VN	0	-10.30	-0.012315	±2.5	Pass
WCDMA850	UMTS	HCH	VN	10	-9.89	-0.011824	±2.5	Pass
			VN	20	-5.97	-0.007052	±2.5	Pass
			VN	30	-6.91	-0.008162	±2.5	Pass
			VN	40	-7.40	-0.008741	±2.5	Pass
			VN	50	-5.24	-0.006189	±2.5	Pass





Test	Test	Test	Test	Test	Freq. Error	Freq. vs Rated	
Band	Mode	Channel	Volt.	Tem. (°C)	(Hz)	(ppm)	Verdict
			VN	-30	-13.75	-0.007423	Pass
			VN	-20	-11.08	-0.005981	Pass
			VN	-10	-11.56	-0.006241	Pass
			VN	0	-13.04	-0.007040	Pass
WCDMA1900	UMTS	LCH	VN	10	-14.00	-0.007558	Pass
			VN	20	-13.55	-0.007315	Pass
			VN	30	-14.06	-0.007590	Pass
			VN	40	-9.92	-0.005355	Pass
			VN	50	-11.29	-0.006095	Pass
	UMTS		VN	-30	-11.44	-0.006176	Pass
		MCH	VN	-20	-8.46	-0.004567	Pass
			VN	-10	-10.77	-0.005814	Pass
			VN	0	-8.31	-0.004486	Pass
WCDMA1900			VN	10	-11.57	-0.006246	Pass
			VN	20	-12.85	-0.006937	Pass
			VN	30	-9.76	-0.005269	Pass
			VN	40	-9.21	-0.004972	Pass
			VN	50	-12.59	-0.006797	Pass
			VN	-30	-10.08	-0.005442	Pass
			VN	-20	-9.39	-0.005069	Pass
			VN	-10	-12.77	-0.006793	Pass
			VN	0	-6.95	-0.003697	Pass
WCDMA1900	UMTS	HCH	VN	10	-7.70	-0.004096	Pass
			VN	20	-8.70	-0.004628	Pass
			VN	30	-10.21	-0.005431	Pass
			VN	40	-13.56	-0.007213	Pass
			VN	50	-13.30	-0.007074	Pass

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Page 72 of 72

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC03709230501AP04

Appendix II: Photographs of EUT

Refer to the Report No.: AGC03709230501AP03

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.