

FCC SAR REPORT

Report No.: JYTSZ-R14-2400175

Applicant: SWAGTEK

Address of Applicant: 10205 NW 19th Street, STE 101, Miami, FL33172, USA

Equipment Under Test (EUT)

Product Name: 4G Feature Phone

Model No.: LINK, A22L

Trade mark: LOGIC, UNONU, iSWAG

FCC ID: O55245124

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 02 Jan., 2025 ~ 11 Jan., 2025

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 0.779 Body: 0.816

Project by: Jair Lin
Project Engineer

Reviewed by: Yiwei Zhang
Senior Engineer

Approved by: James Wei
Manager

Date: 21 Jan., 2025

Date: 21 Jan., 2025

Date: 21 Jan., 2025

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	21 Jan., 2025	Original

3 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY.....	4
5	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF EUT	5
5.3	MAXIMUM RF OUTPUT POWER.....	6
5.4	ENVIRONMENT OF TEST SITE	7
5.5	TEST SAMPLE PLAN	7
5.6	TEST LOCATION	7
6	INTRODUCTION.....	8
6.1	INTRODUCTION	8
6.2	SAR DEFINITION	8
7	RF EXPOSURE LIMITS	9
7.1	UNCONTROLLED ENVIRONMENT.....	9
7.2	CONTROLLED ENVIRONMENT	9
7.3	RF EXPOSURE LIMITS	9
8	SAR MEASUREMENT SYSTEM.....	10
8.1	E-FIELD PROBE.....	11
8.2	ROBOT	12
8.3	PHANTOM.....	13
8.4	DEVICE HOLDER.....	13
8.5	TEST EQUIPMENT LIST	14
9	TISSUE SIMULATING LIQUIDS	15
10	SAR SYSTEM VERIFICATION.....	17
11	EUT TESTING POSITION.....	19
11.1	HANDSET REFERENCE POINTS	19
11.2	POSITIONING FOR CHEEK / TOUCH	20
11.3	POSITIONING FOR EAR / 15o TILT.....	20
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	21
11.5	BODY WORN ACCESSORY CONFIGURATIONS	21
12	MEASUREMENT PROCEDURES	22
12.1	SPATIAL PEAK SAR EVALUATION	22
12.2	POWER REFERENCE MEASUREMENT.....	23
12.3	AREA & ZOOM SCAN PROCEDURES.....	23
12.4	VOLUME SCAN PROCEDURES	24
12.5	SAR AVERAGED METHODS	24
12.6	POWER DRIFT MONITORING	24
13	CONDUCTED RF OUTPUT POWER.....	25
13.1	GSM CONDUCTED POWER	25
13.2	WCDMA CONDUCTED POWER	27
13.3	LTE CONDUCTED POWER	30
13.4	BLUETOOTH CONDUCTED POWER	43
14	SAR TEST RESULTS SUMMARY	44
14.1	STANDALONE HEAD SAR DATA.....	44
14.2	STANDALONE BODY SAR	47
14.3	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....	49
14.4	SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....	50
14.5	MEASUREMENT UNCERTAINTY	51
15	REFERENCE.....	52
	APPENDIX A: PLOTS OF SAR SYSTEM CHECK	53
	APPENDIX B: PLOTS OF SAR TEST DATA	59

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as below:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.101	PCE	0.779
	GSM 1900	0.184		
	WCDMA Band II	0.568		
	WCDMA Band IV	0.363		
	WCDMA Band V	0.510		
	LTE Band 2	0.696		
	LTE Band 4	0.779		
	LTE Band 5	0.487		
	LTE Band 7	0.159		
	BLE	0.000	DTS	
Body (10 mm Gap)	GSM 850	0.120	PCE	0.816
	GSM 1900	0.490		
	WCDMA Band II	0.520		
	WCDMA Band IV	0.542		
	WCDMA Band V	0.646		
	LTE Band 2	0.762		
	LTE Band 4	0.816		
	LTE Band 5	0.738		
	LTE Band 7	0.641		
	BLE	0.000	DTS	

< Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Back	LTE Band 4	0.816	PCE	0.816
	BLE	0.000	DTS	

Note:

- The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
- This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020.

5 General Information

5.1 Client Information

Applicant:	SWAGTEK
Address of Applicant:	10205 NW 19th Street, STE 101, Miami, FL33172, USA
Manufacturer:	SWAGTEK
Address of Manufacturer:	10205 NW 19th Street, STE 101, Miami, FL33172, USA
Factory:	SWAGTEK
Address of Factory:	10205 NW 19th Street, STE 101, Miami, FL33172, USA

5.2 General Description of EUT

Product Name:	4G Feature Phone			
Model No.:	LINK, A22L			
Category of device	Portable device			
Operation Frequency:	GSM:	GSM850: 824.2~848.8 MHz	PCS 1900: 1850.2~1909.8 MHz	
	WCDMA:	Band II: 1852.4~1907.6 MHz	Band V: 826.4~846.6 MHz	
		Band IV: 1712.4~1752.6 MHz		
	LTE:	Band 2:1850MHz~1910MHz	Band 4:1710MHz~1755MHz	
		Band 5:824MHz~849MHz	Band 7: 2500MHz~2570MHz	
	Bluetooth: 2402 MHz ~ 2480 MHz			
Modulation technology:	GSM:	☒ Voice(GMSK)	☒ GPRS(GMSK)	☒ EGPRS(GMSK, 8PSK)
	WCDMA:	☒ RMC(QPSK)	☐ HSUPA(QPSK)	☐ HSDPA(QPSK,16QAM)
	LTE:	☒ QPSK	☒ 16QAM	☐ 64QAM
	Bluetooth:	☒ BDR(GFSK)	☒ EDR(π /4-DQPSK, 8DPSK)	☒ LE(GFSK)
Antenna Type:	Internal Antenna			
Antenna Gain:	GSM 850: 0.4dBi; PCS 1900: 0.8dBi WCDMA Band II: 0.8 dBi; WCDMA Band V: 0.4 dBi WCDMA Band IV: 0.7dBi LTE Band 2: 0.8dBi; LTE Band 4: 0.7dBi LTE Band 5: 0.4dBi; LTE Band 7: 0.5dBi Bluetooth: 0.1dBi;			
(E)GPRS Class:	(E)GPRS Class: 12			
Dimensions (L*W*H):	132 mm (L)× 55 mm (W)× 15 mm (H)			
Accessories information:	Adapter: Model: YD050AN-002-01 Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 500mA			Battery: Rechargeable Li-ion Battery DC3.7V, 2300mAh
				Headset: Support headset (shipped without)
Remark:	LINK, A22L were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name and trade mark.			

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	PCS 1900
GSM (Voice)	32.55	29.32
GPRS (1 TX Slot)	32.58	29.31
GPRS (2 TX Slots)	32.40	29.07
GPRS (3 TX Slots)	31.50	28.21
GPRS (4 TX Slots)	29.63	26.27
EGPRS (1 TX Slot)	28.60	27.05
EGPRS (2 TX Slots)	26.79	25.33
EGPRS (3 TX Slots)	24.87	22.97
EGPRS (4 TX Slots)	22.31	20.57

Mode	Average Power (dBm)		
	WCDMA Band II	WCDMA Band IV	WCDMA Band V
AMR 12.2 kbps	22.75	21.29	22.75
RMC 12.2 kbps	22.87	21.29	22.84

Mode	Average Power (dBm)			
	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7
BW/1.4 MHz	23.45	22.19	24.88	/
BW/3.0 MHz	23.31	22.48	24.71	/
BW/5.0 MHz	23.44	22.69	24.91	24.83
BW/10 MHz	23.32	22.75	24.91	24.80
BW/15 MHz	23.43	22.49	/	24.55
BW/20 MHz	23.55	22.51	/	24.64

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
Bluetooth	-6.47	-4.58	-4.23	5.15	5.05	5.09	5.08

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
SZR012400675-9	SAR
Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.	

5.6 Test Location

JianYan Testing Group Shenzhen Co., Ltd.
 1-2, Building 16, No. 16, Yuefu Avenue, Beibei District, Chongqing, People's Republic of China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

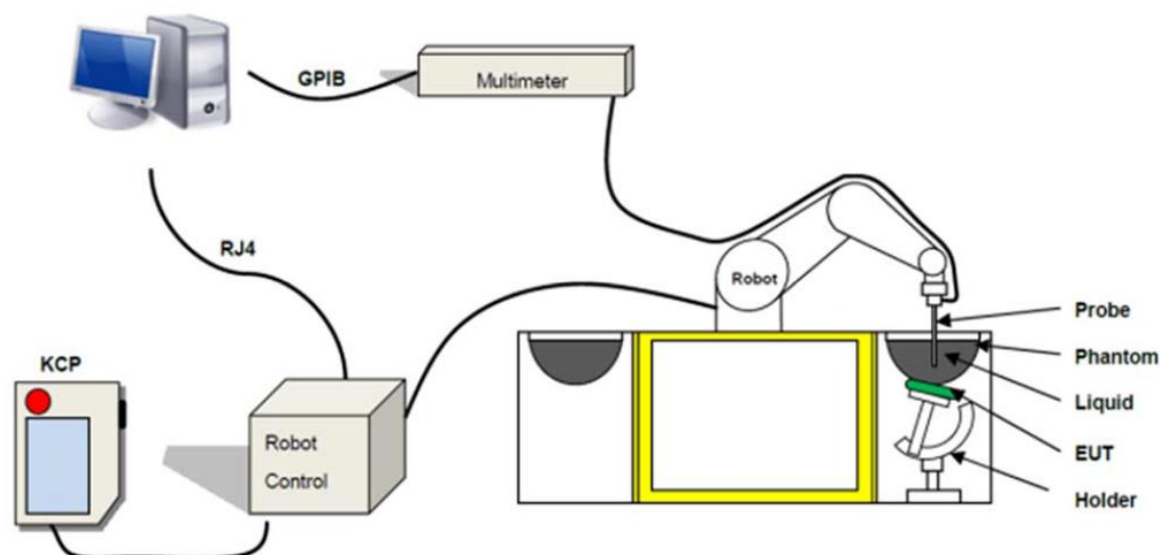


Fig. 8.1 MVG COMOSAR System Configurations

These measurements were performed with the automated near-field scanning system COMOSAR from MVG. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

The MVG COMOSAR system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification


Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency Range	150 MHz to 6 GHz
Dynamic Range	0.01W/kg to 100W/kg
Probe linearity	<0.25dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance between dipoles / probe extremity: 1 mm



Fig. 8.2 Photo of E-Field Probe

➤ E-Field Probe Calibration

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEC/IEEE 62209-1528:2020, with CALISAR, MVG proprietary calibration system. The calibration is performed with the technique using reference waveguide.

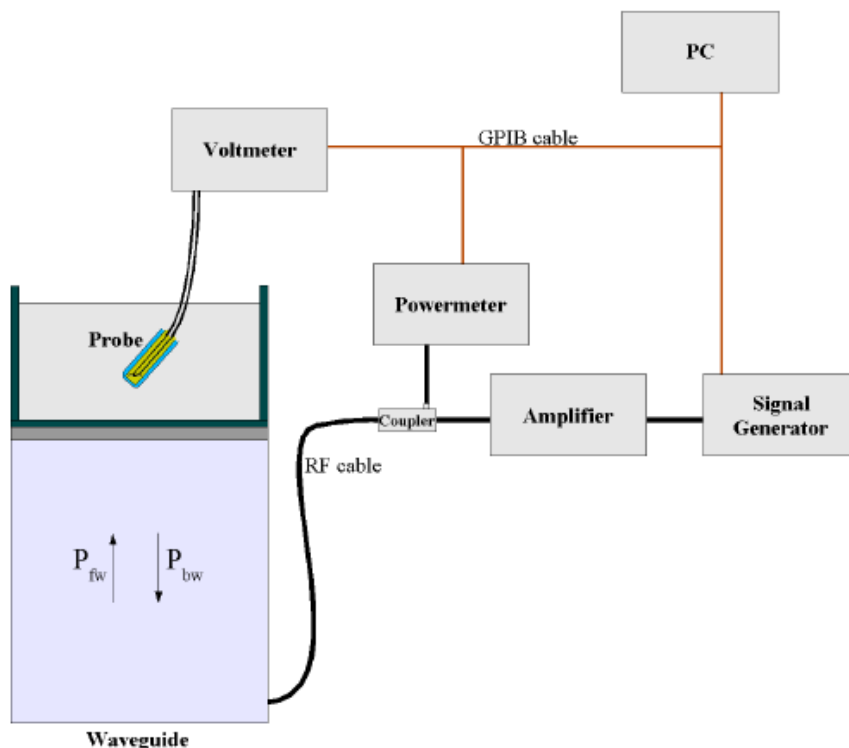

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\sigma)z}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- σ = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

8.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

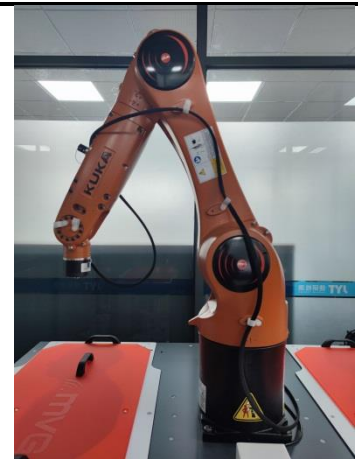


Fig. 8.4 Photo of Robot

8.3 Phantom

<SAM Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume Dimensions	Approx. 27 liters Length: 1000mm; Width: 500mm; Height: 200mm
Material	Fiberglass based
Relative permittivity	3-4
Loss tangent	0.02
Measurement Areas	Left Head, Right Head, Flat phantom



Fig. 8.7 Photo of SAM Phantom

The phantom developed by MVG is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

8.4 Device Holder

The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

<Device Holder for SAM Phantom>

Model	Handset Positioning System
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.
Mechanical properties	The positioning system developed by MVG allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail "x axis" so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular "y axis" and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device's acoustical output.
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°



Fig. 8.9 Photo of Device Holder

8.5 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
MVG	COMOSAR DOSIMETRIC E FIELD PROBE	SSE2	WXJ076-23	07.11.2024	07.10.2025
MVG	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	WXJ076-5	03.06.2024	03.05.2027
MVG	COMOSAR 1750 MHz REFERENCE DIPOLE	SID1750	WXJ076-8	03.06.2024	03.05.2027
MVG	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	WXJ076-9	03.06.2024	03.05.2027
MVG	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	WXJ076-12	03.06.2024	03.05.2027
MVG	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	WXJ076-13	03.06.2024	03.05.2027
KEITHLEY	DIGIT MULTIMETER	DMM6500	WXJ076-1	09.19.2024	09.18.2025
MVG	MVG Measurement Software	OpenSAR	Version: V5_01_09	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-2	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-3	N.C.R	N.C.R
MVG	MOBILE PHONE POSITIONNING SYSTEM	N/A	WXG009-4	N.C.R	N.C.R
KUKA	Robot	KR 6 R900 sixx	WXG009-1	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-4	01.10.2023	01.09.2025
R&S	Universal Radio Communication Tester	CMU200	WXJ008	01.10.2023	01.09.2025
HP	Network Analyzer	8753D	WXJ024	05.11.2024	05.10.2026
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	06.11.2024	06.10.2025
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	06.11.2024	06.10.2025
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	06.11.2024	06.10.2025
KEYSIGHT	Signal Generator	N5173B	WXJ095-3	09.19.2024	09.18.2025
Huber Suhner	RF Cable	SUCOFLEX	WXG011-2	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG011-3	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG011-4	See Note 3	
Weinschel	Attenuator	RBK18S50	WXG011-11	See Note 3	
N/A	Directional Coupler	SHWDCP-050180-10S	WXG008-12	See Note 3	
MVG	LIMESAR DIELECTRIC PROBE	SCLMP	WXG009-5	See Note 4	
N/A	Low-frequency Amplifier	N/A	WXG008-6	See Note 5	
N/A	Wideband Amplifier	WDA-00100800-24P26	WXG008-5	See Note 5	

Note:

- The calibration certificate of MVG can be referred to appendix C of this report.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by MVG.
- In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically

- required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
7. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.



Fig. 9.1 Photo of Liquid Height for Head SAR (depth>15cm)

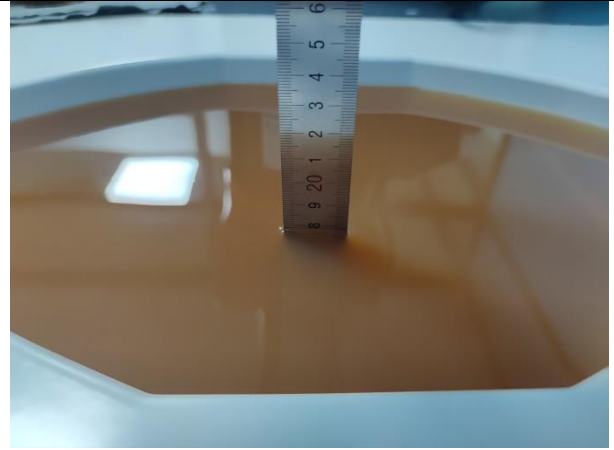


Fig. 9.2 Photo of Liquid Height for Body SAR (depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5800	35.3	5.27

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m

The dielectric parameters of liquids were verified prior to the SAR evaluation using a MVG Liquid measurement Kit and an Agilent Network Analyser.
The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Conductivity Target(σ)	Permittivity Target(εr)	Delta (σ)%	Delta (εr)%	Limit (%)	Date (dd/mm/yy)
835	21.3	0.91	41.62	0.90	41.50	1.11	0.29	±5	2.1.2025
1750	21.1	1.36	40.01	1.37	40.10	-1.09	-0.22	±5	6.1.2025
1900	21.1	1.35	40.43	1.40	40.00	-3.57	1.08	±5	6.1.2025
2450	21.5	1.72	40.20	1.80	39.20	-4.44	2.55	±5	29.12.2024
2600	21.5	1.92	39.11	1.96	39.00	-2.04	0.28	±5	29.12.2024

10 SAR System Verification

Each ComoSAR system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the OpenSAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

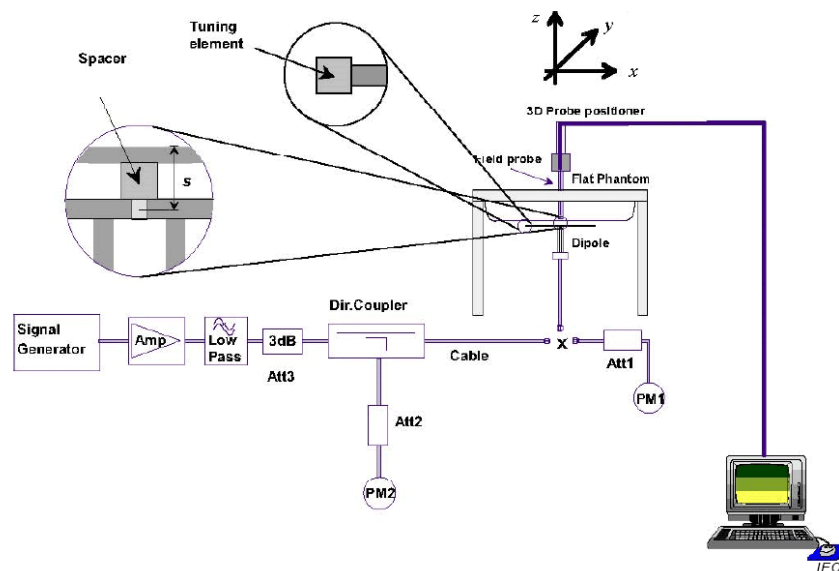


Fig.10.1 System Verification Setup Diagram

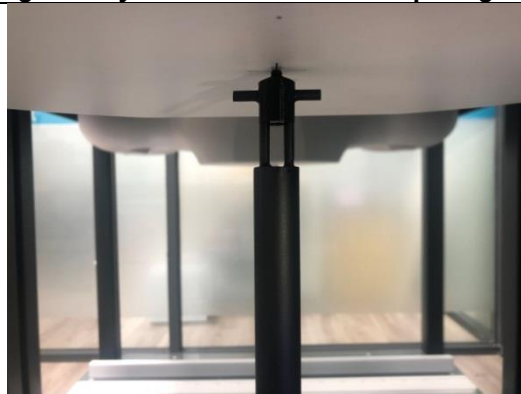


Fig.10.2 Photo of Dipole setup



➤ System Verification Results

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
2.1.2025	835	10	0.097	9.70	9.56	1.46
6.1.2025	1750	10	0.376	37.60	36.40	3.30
6.1.2025	1900	10	0.390	39.00	39.70	-1.76
29.12.2024	2450	10	0.533	53.30	52.40	1.72
29.12.2024	2600	10	0.572	57.20	55.30	3.44

11 EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

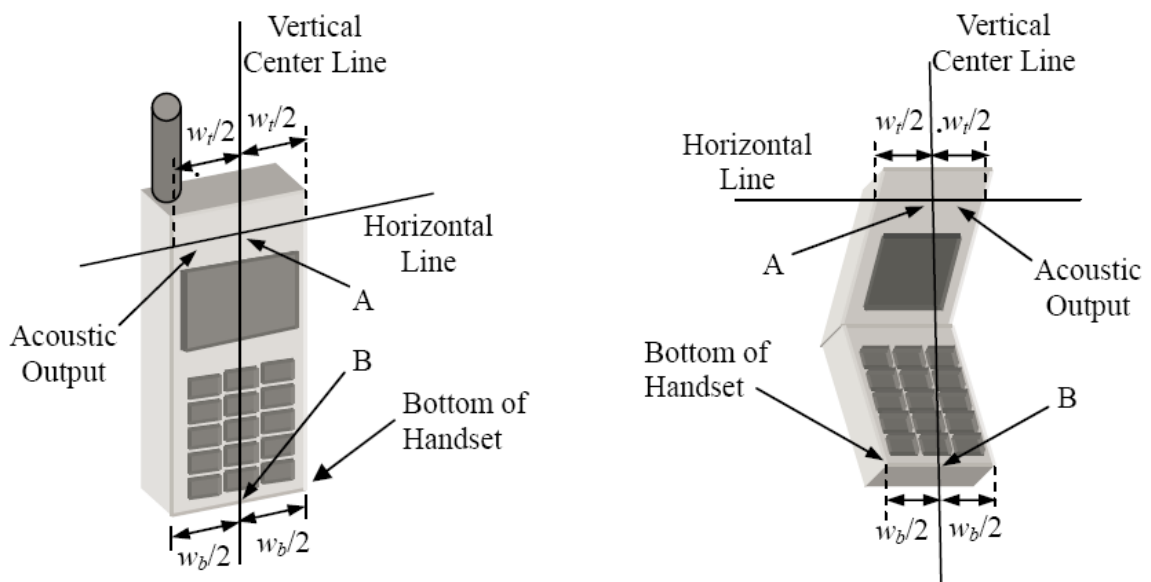


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15o Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

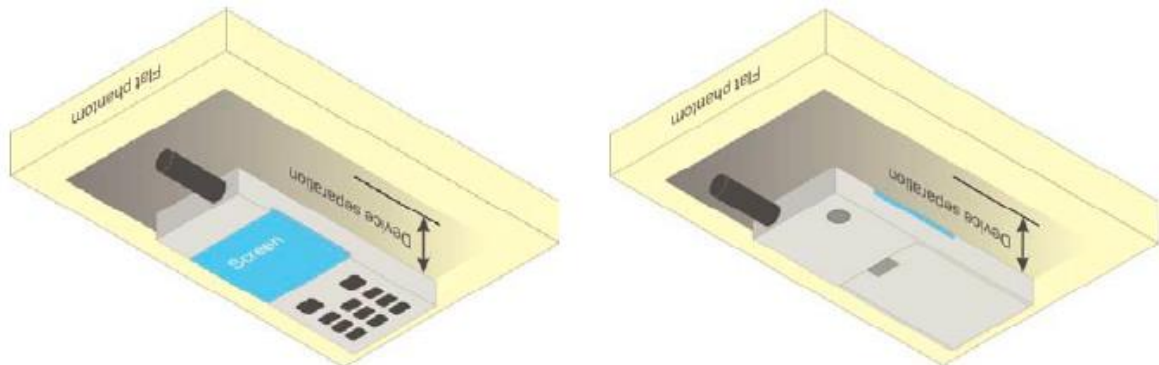


Fig.11.5 Illustration for Body Worn Position

12 Measurement Procedures

The measurement procedures are as below:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the OpenSAR software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OpenSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

12.5 SAR Averaged Methods

In COMOSAR system, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	32.43	32.55	32.37	23.40	23.52	23.34
GPRS (GMSK, 1 TX slot)	32.43	32.58	32.38	23.40	23.55	23.35
GPRS (GMSK, 2 TX slots)	32.25	32.4	32.19	26.23	26.38	26.17
GPRS (GMSK, 3 TX slots)	31.37	31.5	31.28	27.11	27.24	27.02
GPRS (GMSK, 4 TX slots)	29.49	29.63	29.4	26.48	26.62	26.39
EGPRS (8PSK, 1 TX slot)	28.44	27.54	28.6	19.41	18.51	19.57
EGPRS (8PSK, 2 TX slots)	26.55	26.15	26.79	20.53	20.13	20.77
EGPRS (8PSK, 3 TX slots)	24.66	23.56	24.87	20.40	19.30	20.61
EGPRS (8PSK, 4 TX slots)	22.07	21.57	22.31	19.06	18.56	19.30

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Body worn SAR testing, GSM Voice, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 3 TX slots mode due to the highest frame-averaged power..
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 3 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Band: PCS 1900	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.26	29.31	29.32	20.23	20.28	20.29
GPRS (GMSK, 1 TX slot)	29.29	29.31	29.31	20.26	20.28	20.28
GPRS (GMSK, 2 TX slots)	29.06	29.07	29.07	23.04	23.05	23.05
GPRS (GMSK, 3 TX slots)	28.17	28.17	28.21	23.91	23.91	23.95
GPRS (GMSK, 4 TX slots)	26.27	26.26	26.2	23.26	23.25	23.19
EGPRS (8PSK, 1 TX slot)	26.49	27	27.05	17.46	17.97	18.02
EGPRS (8PSK, 2 TX slots)	24.75	25.26	25.33	18.73	19.24	19.31
EGPRS (8PSK, 3 TX slots)	22.41	22.81	22.97	18.15	18.55	18.71
EGPRS (8PSK, 4 TX slots)	19.93	20.42	20.57	16.92	17.41	17.56

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 1900 Voice mode.
- For Body worn SAR testing, GSM Voice, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 3 TX slots mode due to the highest frame-averaged power..
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS3 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- The EUT do not support DTM and VoIP function.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	22.29	22.75	22.15
RMC 12.2 kbps	22.29	22.84	22.15

WCDMA Average power (dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
AMR 12.2 kbps	21.29	21.23	21.19
RMC 12.2 kbps	21.29	20.84	21.27

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	22.08	22.75	22.34
RMC 12.2 kbps	22.15	22.87	22.51

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> ?$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> ?$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

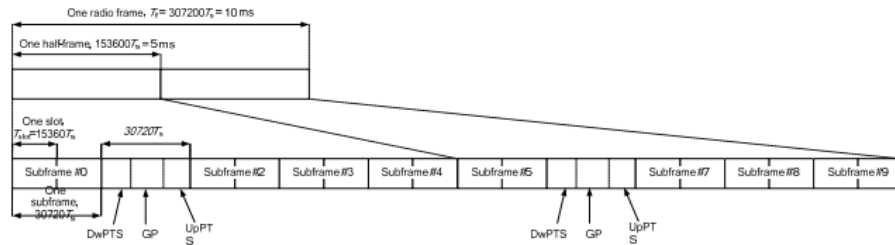


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_F = 307200 T_s = 10$ ms consists of two half-frames of length $153600 T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	22.95	23.45	22.91
			1	2	22.88	23.15	22.72
			1	5	22.82	23.21	22.71
			3	0	22.71	23.11	22.65
			3	1	22.66	23.09	22.66
			3	2	22.66	23.09	22.66
			6	0	21.86	22.26	21.81
		16QAM	1	0	22.11	22.45	21.79
			1	2	22.15	22.51	21.78
			1	5	22.13	22.46	21.64
			3	0	21.71	22.12	21.64
			3	1	21.72	22.12	21.63
			3	2	21.72	22.11	21.63
			6	0	20.87	21.44	20.94

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	23.10	23.24	23.17
			1	7	23.18	23.31	22.90
			1	14	23.02	23.28	22.70
			8	0	22.12	22.27	21.97
			8	4	22.12	22.30	22.05
			8	7	22.12	22.45	21.90
			15	0	22.08	22.39	21.97
		16QAM	1	0	22.25	22.23	22.23
			1	7	22.35	22.55	22.05
			1	14	22.21	22.54	21.85
			8	0	21.22	21.44	21.12
			8	4	21.20	21.44	21.13
			8	7	21.31	21.61	21.08
			15	0	21.10	21.48	QAM

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	23.01	23.20	23.30
			1	12	23.09	23.32	22.97
			1	24	23.11	23.44	22.80
			12	0	21.98	22.11	22.09
			12	6	22.00	22.13	22.19
			12	11	21.99	22.13	22.21
			25	0	22.05	22.28	22.10
		16QAM	1	0	22.29	22.10	22.46
			1	12	22.43	22.45	22.34
			1	24	22.50	22.58	22.07
			12	0	21.13	21.23	21.29
			12	6	21.12	21.24	21.33
			12	11	21.12	21.23	21.33
			25	0	21.17	21.39	21.14

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	22.99	22.85	22.93
			1	24	23.14	23.28	23.10
			1	49	23.01	23.32	22.73
			25	0	22.00	21.84	21.71
			25	12	21.98	21.83	21.80
			25	24	21.96	21.83	21.80
			50	0	21.98	22.15	21.95
		16QAM	1	0	22.04	21.94	22.14
			1	24	22.17	22.49	22.40
			1	49	22.05	22.52	22.00
			25	0	21.02	21.12	21.09
			25	12	21.03	21.10	21.13
			25	24	21.03	21.18	21.12
			50	0	21.10	21.24	21.20

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	23.14	22.75	23.24
			1	37	23.25	23.33	22.96
			1	74	22.84	23.43	22.80
			36	0	22.20	21.84	21.88
			36	16	22.19	21.83	21.97
			36	35	22.17	21.82	21.97
			75	0	21.99	22.22	22.01
		16QAM	1	0	22.30	21.87	22.68
			1	37	22.35	22.60	22.42
			1	74	21.97	22.69	22.29
			27	0	21.25	20.93	21.10

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	23.19	22.70	23.43
			1	49	23.30	23.55	23.08
			1	99	22.35	23.43	22.92
			50	0	22.26	21.78	22.09
			50	24	22.26	21.75	22.16
			50	49	22.22	21.78	22.16
			100	0	21.82	22.16	21.88
		16QAM	1	0	22.13	21.70	22.77
			1	49	22.16	22.63	22.38
			1	99	21.34	22.50	22.32
			27	0	21.08	20.54	21.33

LTE Band 4 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19957	20175	20393
					1710.7	1732.5MHz	1754.3MHz
Band 4	1.4	QPSK	1	0	22.19	21.88	22.01
			1	2	22.13	21.62	21.98
			1	5	22.11	21.62	22.03
			3	0	22.06	21.56	21.86
			3	1	22.05	21.55	21.87
			3	2	22.04	21.54	21.87
			6	0	21.33	20.81	21.07
		16QAM	1	0	21.55	20.83	21.02
			1	2	21.62	20.83	21.23
			1	5	21.53	20.70	21.21
			3	0	21.21	20.69	20.85
			3	1	21.20	20.68	20.85
			3	2	21.18	20.67	20.85
			6	0	20.51	19.96	20.15

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
Band 4	3	QPSK	1	0	22.38	21.94	21.84
			1	7	22.48	21.68	21.96
			1	14	22.43	21.53	21.97
			8	0	21.43	20.88	20.85
			8	4	21.46	20.92	20.91
			8	7	21.58	20.86	21.03
			15	0	21.45	20.90	20.98
		16QAM	1	0	21.65	20.78	20.86
			1	7	21.72	20.85	21.08
			1	14	21.68	20.67	21.15
			8	0	20.58	20.04	20.13
			8	4	20.56	20.04	20.15
			8	7	20.65	19.99	20.33
			15	0	20.50	19.93	20.21

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19975	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
Band 4	5	QPSK	1	0	22.51	22.00	21.64
			1	12	22.69	21.78	21.93
			1	24	22.51	21.69	22.06
			12	0	21.42	20.84	20.63
			12	6	21.46	20.87	20.66
			12	11	21.44	20.86	20.67
			25	0	21.53	20.85	20.85
		16QAM	1	0	21.91	20.97	20.65
			1	12	22.06	21.04	20.96
			1	24	21.90	20.92	21.18
			12	0	20.62	20.05	19.90
			12	6	20.60	20.04	19.91
			12	11	20.59	20.04	19.92
			25	0	20.57	20.00	20.06

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20000	20175	20350
					1715.0MHz	1732.5MHz	1750.0MHz
Band 4	10	QPSK	1	0	22.46	21.15	21.38
			1	24	22.75	21.83	21.46
			1	49	22.32	21.55	21.81
			25	0	21.47	20.82	20.26
			25	12	21.50	20.81	20.29
			25	24	21.46	20.79	20.29
			50	0	21.43	20.74	20.43
		16QAM	1	0	21.13	21.08	20.73
			1	24	21.51	21.13	20.68
			1	49	21.14	20.79	21.26
			25	0	20.33	20.18	19.75
			25	12	20.41	20.16	19.77
			25	24	20.42	20.14	19.75
			50	0	20.56	20.19	19.76

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20025	20175	20325
					1717.5MHz	1732.5MHz	1747.5MHz
Band 4	15	QPSK	1	0	22.45	21.17	21.32
			1	37	22.49	21.71	21.31
			1	74	21.90	21.33	21.89
			36	0	21.43	20.85	20.36
			36	16	21.48	20.83	20.39
			36	35	21.46	20.82	20.39
			75	0	21.34	20.83	20.42
		16QAM	1	0	21.24	20.29	21.01
			1	37	21.36	21.19	20.71
			1	74	20.85	20.82	21.35
			27	0	20.46	20.05	19.58

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
Band 4	20	QPSK	1	0	22.42	21.17	21.65
			1	49	22.51	21.79	21.49
			1	99	21.78	21.18	21.83
			50	0	21.45	20.82	20.35
			50	24	21.48	20.78	20.36
			50	49	21.44	20.76	20.36
			100	0	21.27	20.80	20.38
		16QAM	1	0	21.40	20.04	20.89
			1	49	21.57	21.07	20.61
			1	99	20.98	20.47	20.96
			27	0	20.36	19.83	19.54

LTE Band 5 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
Band 5	1.4	QPSK	1	0	24.88	24.39	24.67
			1	2	24.78	24.27	24.64
			1	5	24.20	24.54	24.61
			3	0	24.58	24.80	24.53
			3	1	24.64	24.77	24.51
			3	2	24.50	24.73	24.48
			6	0	23.94	23.71	23.60
		16QAM	1	0	23.22	23.23	23.99
			1	2	23.33	23.58	23.89
			1	5	23.24	23.65	23.76
			3	0	23.81	23.68	23.45
			3	1	23.77	23.63	23.42
			3	2	23.74	23.60	23.40
			6	0	22.86	22.63	22.44

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
Band 5	3	QPSK	1	0	24.64	24.66	24.71
			1	7	24.70	24.57	24.59
			1	14	24.20	24.71	24.29
			8	0	24.01	23.70	23.64
			8	4	24.02	23.76	23.69
			8	7	24.16	23.76	23.51
			15	0	24.13	23.71	23.63
		16QAM	1	0	24.18	23.71	23.75
			1	7	24.38	23.72	23.74
			1	14	24.25	23.44	23.51
			8	0	23.17	22.73	22.72
			8	4	23.15	22.73	22.72
			8	7	23.26	22.67	22.58
			15	0	23.04	22.62	22.64

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
Band 5	5	QPSK	1	0	24.77	24.68	24.73
			1	12	24.63	24.79	24.91
			1	24	24.83	24.79	24.48
			12	0	23.98	23.72	23.46
			12	6	24.02	23.79	23.50
			12	11	24.01	23.79	23.51
			25	0	24.15	23.68	23.62
		16QAM	1	0	24.10	24.07	23.56
			1	12	24.00	23.97	23.87
			1	24	24.17	23.85	23.61
			12	0	23.21	22.71	22.49
			12	6	23.21	22.72	22.51
			12	11	23.19	22.71	22.51
			25	0	23.13	22.73	22.64

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20450	20525	20600
					829MHz	836.5MHz	844MHz
Band 5	10	QPSK	1	0	24.74	23.95	24.91
			1	24	24.67	24.69	24.43
			1	49	24.75	24.84	24.35
			25	0	23.84	23.62	23.35
			25	12	23.97	23.65	23.35
			25	24	23.97	23.65	23.36
			50	0	23.92	23.56	23.19
		16QAM	1	0	23.74	24.21	24.09
			1	24	23.97	24.12	23.74
			1	49	23.78	23.88	23.62
			25	0	22.79	22.79	22.72
			25	12	22.92	22.81	22.69
			25	24	22.94	22.79	22.67
			50	0	22.99	22.84	22.72

LTE Band 7 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535MHz	2567.5MHz
Band 7	5	QPSK	1	0	24.71	23.40	22.83
			1	12	24.83	23.20	22.15
			1	24	24.66	22.85	21.26
			12	0	24.40	22.77	22.30
			12	6	24.40	22.84	22.35
			12	11	24.39	22.84	22.35
			25	0	24.48	23.00	22.00
		16QAM	1	0	23.88	23.12	22.79
			1	12	23.69	23.13	22.24
			1	24	23.80	22.85	21.39
			12	0	23.13	21.52	21.70
			12	6	23.12	21.52	21.70
			12	11	23.10	21.52	21.70
			25	0	23.05	21.62	21.29

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505MHz	2535MHz	2565MHz
Band 7	10	QPSK	1	0	24.47	23.24	23.27
			1	24	24.80	23.15	22.77
			1	49	24.37	22.54	21.08
			25	0	24.42	22.65	23.03
			25	12	24.37	22.64	23.02
			25	24	24.34	22.62	23.00
			50	0	24.36	22.81	22.49
		16QAM	1	0	23.30	23.14	23.58
			1	24	23.03	23.19	23.12
			1	49	23.08	22.54	21.43
			25	0	22.81	21.49	22.57
			25	12	22.83	21.54	22.57
			25	24	22.84	21.52	22.54
			50	0	22.91	21.54	22.51

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535MHz	2562.5MHz
Band 7	15	QPSK	1	0	24.51	23.32	23.60
			1	37	24.55	23.04	23.21
			1	74	24.01	22.74	21.33
			36	0	24.37	22.58	23.48
			36	16	24.35	22.61	23.49
			36	35	24.33	22.60	23.48
			75	0	24.12	22.94	22.94
		16QAM	1	0	23.47	21.44	23.76
			1	37	23.27	22.97	23.29
			1	74	23.03	22.60	21.45
			27	0	22.85	21.09	22.68

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510MHz	2535MHz	2560MHz
Band 7	20	QPSK	1	0	24.64	23.38	23.25
			1	49	24.63	23.13	23.73
			1	99	24.63	22.62	21.44
			50	0	24.46	22.57	23.51
			50	24	24.44	22.59	23.48
			50	49	24.40	22.58	23.47
			100	0	24.04	22.99	23.12
		16QAM	1	0	23.44	21.36	23.31
			1	49	23.05	23.14	23.68
			1	99	23.36	22.60	21.33
			27	0	22.80	21.01	22.76

13.4 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	-6.47	-4.58	-4.23
CH 39	2441	-7.06	-5.26	-4.56
CH 78	2480	-7.65	-6.09	-5.43

Average Power (dBm)					
Channel	Frequency (MHz)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
CH 00	2402	4.29	4.24	4.30	4.19
CH 20	2442	5.15	5.05	5.09	5.08
CH 39	2480	5.06	4.89	4.95	4.95

Note:

1. SAR test of Bluetooth is performed and the mode with highest average power is selected for SAR testing.
2. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

14 SAR Test Results Summary

14.1 Standalone Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
1	GSM850/Voice	Right Cheek	190	836.6	32.55	-4.00	33.0	0.091	1.109	0.101
	GSM850/Voice	Right Tilted	190	836.6	32.55	-0.38	33.0	0.058	1.109	0.064
	GSM850/Voice	Left Cheek	190	836.6	32.55	-0.78	33.0	0.089	1.109	0.099
	GSM850/Voice	Left Tilted	190	836.6	32.55	0.53	33.0	0.052	1.109	0.058
	PCS1900/Voice	Right Cheek	810	1909.8	29.32	-4.03	29.5	0.148	1.042	0.154
	PCS1900/Voice	Right Tilted	810	1909.8	29.32	0.19	29.5	0.073	1.042	0.076
2	PCS1900/Voice	Left Cheek	810	1909.8	29.32	0.20	29.5	0.177	1.042	0.184
	PCS1900/Voice	Left Tilted	810	1909.8	29.32	-1.89	29.5	0.086	1.042	0.090
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Right Cheek	9400	1880	22.87	0.63	23.0	0.483	1.03	0.497
	Band II/RMC	Right Tilted	9400	1880	22.87	1.99	23.0	0.186	1.03	0.192
3	Band II/RMC	Left Cheek	9400	1880	22.87	-4.12	23.0	0.551	1.03	0.568
	Band II/RMC	Left Tilted	9400	1880	22.87	-1.43	23.0	0.216	1.03	0.222
	Band IV/RMC	Right Cheek	1312	1712.4	21.29	-0.93	21.5	0.319	1.05	0.335
	Band IV/RMC	Right Tilted	1312	1712.4	21.29	-0.81	21.5	0.142	1.05	0.149
4	Band IV/RMC	Left Cheek	1312	1712.4	21.29	-3.20	21.5	0.346	1.05	0.363
	Band IV/RMC	Left Tilted	1312	1712.4	21.29	0.48	21.5	0.173	1.05	0.182
5	Band V/RMC	Right Cheek	4183	836.6	22.84	3.41	23.0	0.491	1.038	0.510
	Band V/RMC	Right Tilted	4183	836.6	22.84	1.45	23.0	0.258	1.038	0.268
	Band V/RMC	Left Cheek	4183	836.6	22.84	1.06	23.0	0.443	1.038	0.460
	Band V/RMC	Left Tilted	4183	836.6	22.84	0.28	23.0	0.213	1.038	0.221
A ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 2(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Right Cheek	18900	1880	23.55	0.60	24.0	0.219	1.109	0.243
	Band2/1RB#49	Right Tilted	18900	1880	23.55	0.78	24.0	0.076	1.109	0.084
	Band2/1RB#49	Left Cheek	18900	1880	23.55	1.12	24.0	0.603	1.109	0.669
	Band2/1RB#49	Left Tilted	18900	1880	23.55	1.16	24.0	0.319	1.109	0.354
	Band2/50%RB#49	Right Cheek	18700	1860	22.26	-0.39	22.5	0.244	1.057	0.258
	Band2/50%RB#49	Right Tilted	18700	1860	22.26	-0.24	22.5	0.081	1.057	0.086
6	Band2/50%RB#49	Left Cheek	18700	1860	22.26	-1.65	22.5	0.658	1.057	0.696
	Band2/50%RB#49	Left Tilted	18700	1860	22.26	0.51	22.5	0.327	1.057	0.346
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 4(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#49	Right Cheek	20050	1720	22.51	-0.18	23.0	0.240	1.119	0.269
	Band4/1RB#49	Right Tilted	20050	1720	22.51	-0.74	23.0	0.075	1.119	0.084
7	Band4/1RB#49	Left Cheek	20050	1720	22.51	-4.29	23.0	0.696	1.119	0.779
	Band4/1RB#49	Left Tilted	20050	1720	22.51	0.38	23.0	0.363	1.119	0.406
	Band4/50%RB#24	Right Cheek	20050	1720	21.48	-0.21	21.5	0.200	1.005	0.201
	Band4/50%RB#24	Right Tilted	20050	1720	21.48	1.38	21.5	0.084	1.005	0.084
	Band4/50%RB#24	Left Cheek	20050	1720	21.48	2.92	21.5	0.633	1.005	0.636
	Band4/50%RB#24	Left Tilted	20050	1720	21.48	0.51	21.5	0.337	1.005	0.339
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 5(10MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#0	Right Cheek	20600	844	24.91	-4.40	25.0	0.467	1.021	0.477
	Band5/1RB#0	Right Tilted	20600	844	24.91	-0.33	25.0	0.162	1.021	0.165
8	Band5/1RB#0	Left Cheek	20600	844	24.91	-2.61	25.0	0.477	1.021	0.487
	Band5/1RB#0	Left Tilted	20600	844	24.91	1.28	25.0	0.173	1.021	0.177
	Band5/50%RB#12	Right Cheek	20525	836.5	23.97	-2.55	24.0	0.445	1.007	0.448
	Band5/50%RB#12	Right Tilted	20525	836.5	23.97	-0.60	24.0	0.147	1.007	0.148
	Band5/50%RB#12	Left Cheek	20525	836.5	23.97	0.92	24.0	0.445	1.007	0.448
	Band5/50%RB#12	Left Tilted	20525	836.5	23.97	1.98	24.0	0.150	1.007	0.151
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#0	Right Cheek	20850	2510	24.64	0.65	25.0	0.101	1.086	0.110
	Band7/1RB#0	Right Tilted	20850	2510	24.64	0.03	25.0	0.055	1.086	0.060
	Band7/1RB#0	Left Cheek	20850	2510	24.64	-0.13	25.0	0.142	1.086	0.154
	Band7/1RB#0	Left Tilted	20850	2510	24.64	1.45	25.0	0.063	1.086	0.068
	Band7/50%RB#0	Right Cheek	20850	2510	24.46	-0.79	24.5	0.106	1.009	0.107
	Band7/50%RB#0	Right Tilted	20850	2510	24.46	-0.72	24.5	0.028	1.009	0.028
9	Band7/50%RB#0	Left Cheek	20850	2510	24.46	-0.67	24.5	0.158	1.009	0.159
	Band7/50%RB#0	Left Tilted	20850	2510	24.46	1.23	24.5	0.040	1.009	0.040
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ Bluetooth Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	Right Cheek	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
	BT/GFSK	Right Tilted	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
	BT/GFSK	Left Cheek	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
	BT/GFSK	Left Tilted	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

1. Per KDB 447498 D04v01, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
4. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

14.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/3 slots	Front	190	836.6	31.50	-3.61	32.0	0.079	1.122	0.089
10	GPRS850/3 slots	Back	190	836.6	31.50	0.97	32.0	0.107	1.122	0.120
	GPRS1900/3 slots	Front	810	1909.8	28.21	-0.97	28.5	0.326	1.069	0.348
11	GPRS1900/3 slots	Back	810	1909.8	28.21	-3.01	28.5	0.458	1.069	0.490
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	Front	9400	1880	22.87	-1.24	23.0	0.437	1.030	0.450
12	Band II/RMC	Back	9400	1880	22.87	0.99	23.0	0.505	1.030	0.520
	Band IV/RMC	Front	1312	1712.4	21.29	0.09	21.5	0.333	1.050	0.350
13	Band IV/RMC	Back	1312	1712.4	21.29	-0.13	21.5	0.516	1.050	0.542
	Band V/RMC	Front	4183	836.6	22.84	0.33	23.0	0.416	1.038	0.432
14	Band V/RMC	Back	4183	836.6	22.84	0.23	23.0	0.622	1.038	0.646
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Front	18900	1880	23.55	-4.85	24.0	0.383	1.109	0.425
15	Band2/1RB#49	Back	18900	1880	23.55	-2.04	24.0	0.687	1.109	0.762
	Band2/50%RB#49	Front	18700	1860	23.43	-0.47	23.5	0.401	1.016	0.407
	Band2/50%RB#49	Back	18700	1860	23.43	0.08	23.5	0.683	1.016	0.694
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 4(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#49	Front	20050	1720	22.51	-2.07	23.0	0.495	1.119	0.554
16	Band4/1RB#49	Back	20050	1720	22.51	-1.97	23.0	0.729	1.119	0.816
	Band4/1RB#49	Back	20175	1732.5	21.79	1.16	23.0	0.612	1.321	0.808
	Band4/1RB#99	Back	20300	1745	21.83	0.97	23.0	0.603	1.309	0.789
	Band4/50%RB#24	Front	20050	1720	21.48	0.09	21.5	0.410	1.005	0.412
	Band4/50%RB#24	Back	20050	1720	21.48	1.10	21.5	0.686	1.005	0.689
	Band4/100%RB#0	Back	20050	1720	21.27	-0.26	21.5	0.596	1.054	0.628
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#0	Front	20600	844	24.91	-0.39	25.0	0.554	1.021	0.566
17	Band5/1RB#0	Back	20600	844	24.91	-2.03	25.0	0.723	1.021	0.738
	Band5/50%RB#12	Front	20525	836.5	23.97	0.30	24.0	0.387	1.007	0.390
	Band5/50%RB#12	Back	20525	836.5	23.97	0.33	24.0	0.621	1.007	0.625
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#0	Front	20850	2510	24.64	-4.70	25.0	0.191	1.086	0.207
	Band7/1RB#0	Back	20850	2510	24.64	0.44	25.0	0.529	1.086	0.574
	Band7/50%RB#0	Front	20850	2510	24.46	4.52	24.5	0.190	1.009	0.192
18	Band7/50%RB#0	Back	20850	2510	24.46	3.69	24.5	0.635	1.009	0.641
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ Bluetooth Body SAR

Bluetooth Body GSK											
Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	Front	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
	BT/GFSK	Back	20	2442	5.15	0.00	5.5	<0.001*	1.084	1.000	<0.001*
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

1. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
3. Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
5. Per KDB 447498 D04v01, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
6. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
7. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
8. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
9. Highlight part of test data means repeated test.

14.3 Multi-Band Simultaneous Transmission Considerations

➤ Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Fig.15.1 Simultaneous Transmission Paths

➤ Multi-Band simultaneous Transmission Consideration

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	WWAN (Voice) + Bluetooth
	Body	WWAN (Voice) + Bluetooth

Note:

1. GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
2. The Report SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D04v01, simultaneous transmission SAR is compliant if,
 - i. Scalar SAR summation < 1.6 W/kg.
 - ii. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iii. Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

14.4 SAR Simultaneous Transmission Analysis

➤ Simultaneous Transmission

Position		Standalone SAR(W/kg)		? SAR _{1g} (W/kg)
		1	2	1+2
		WWAN	BT	
Head	Right Cheek	0.510	0.000	0.510
	Right Tilted	0.268	0.000	0.268
	Left Cheek	0.779	0.000	0.779
	Left Tilted	0.406	0.000	0.406
Body-worn	Front	0.566	0.000	0.566
	Back	0.816	0.000	0.816

➤ Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D04v01.

14.5 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEC/IEEE 62209-1528:2020 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

15 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, October 2020
- [4]. OpenSAR V5 Software User Manual
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D04 v01, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, November 2021
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMENT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

System check at 835 MHz

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.623315
Conductivity (S/m)	0.911244

C. SAR Surface and Volume

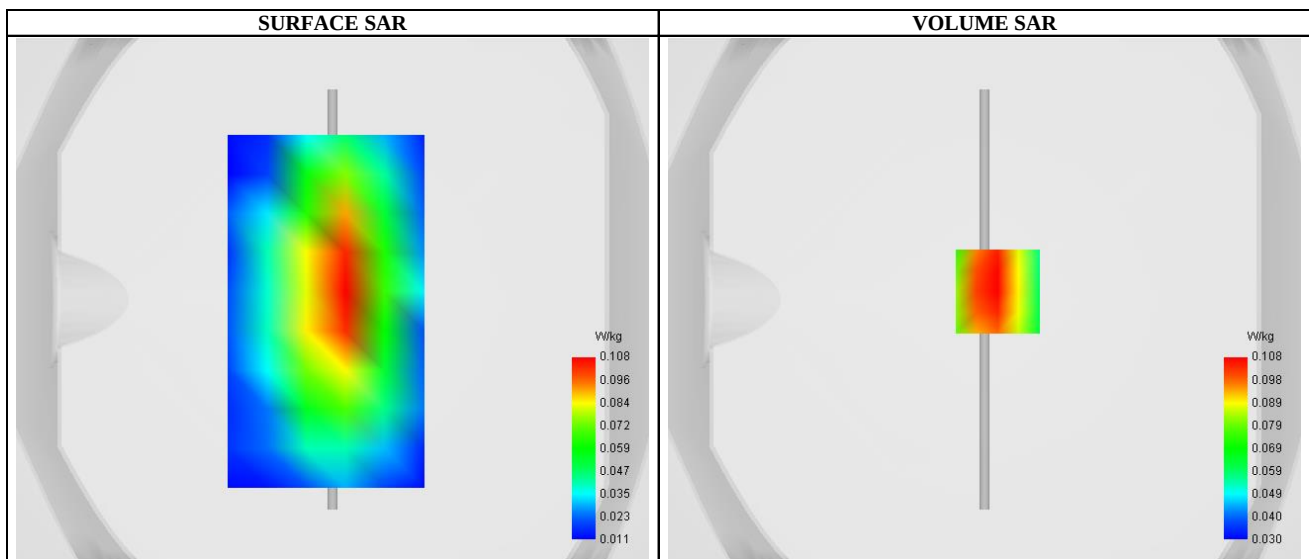


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.063115
SAR 1g (W/Kg)	0.097157
Variation (%)	-0.260000

E. Z Axis Scan

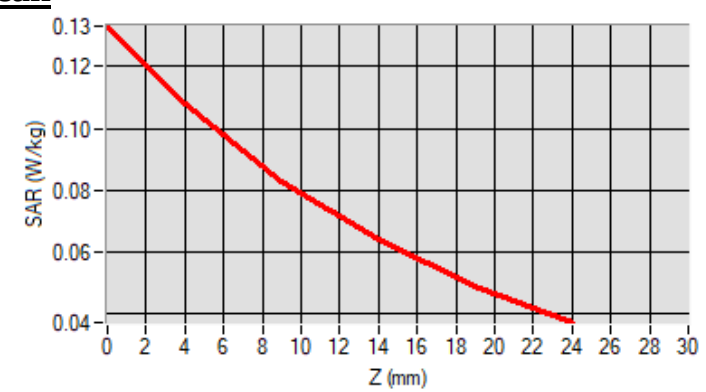

System check at 1750 MHz

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1750.000000
Relative permittivity (real part)	40.012214
Conductivity (S/m)	1.363815

C. SAR Surface and Volume

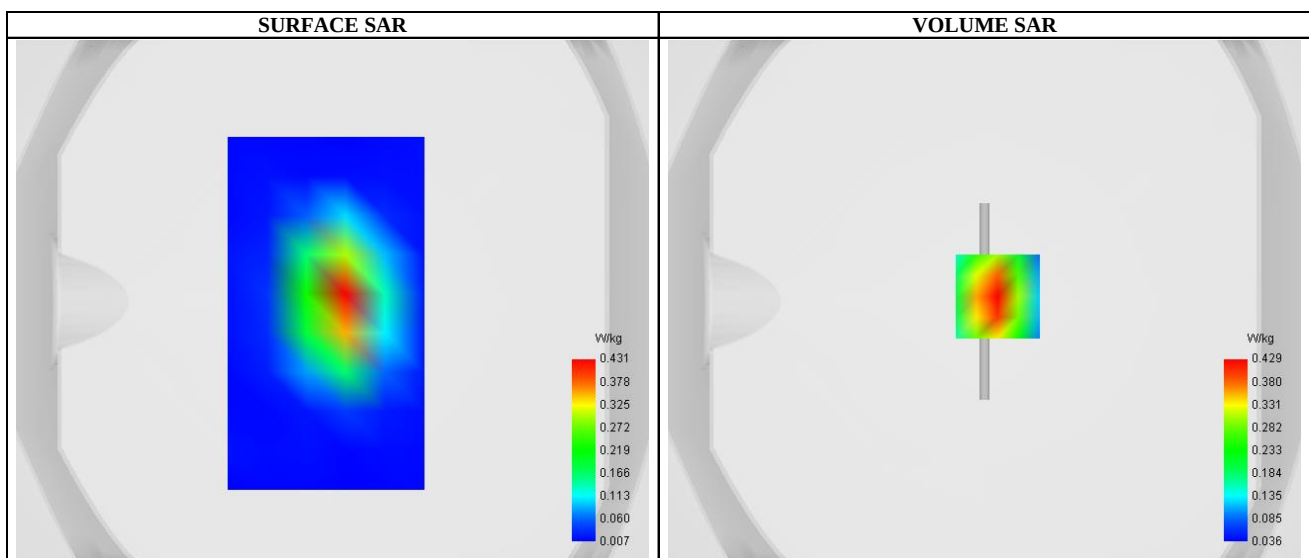


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.62 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.202112
SAR 1g (W/Kg)	0.376121
Variation (%)	-0.210000

E. Z Axis Scan

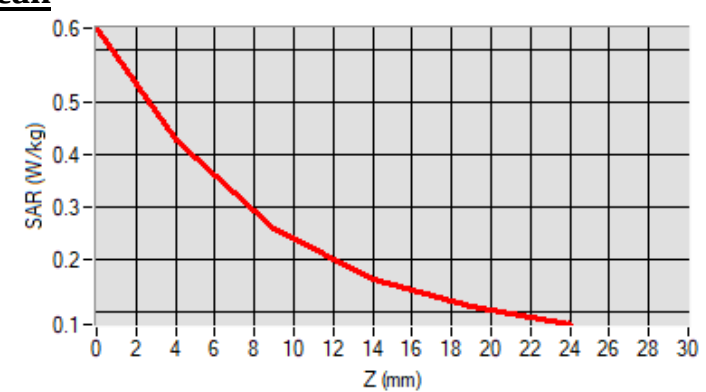

System check at 1900 MHz

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.425598
Conductivity (S/m)	1.349834

C. SAR Surface and Volume

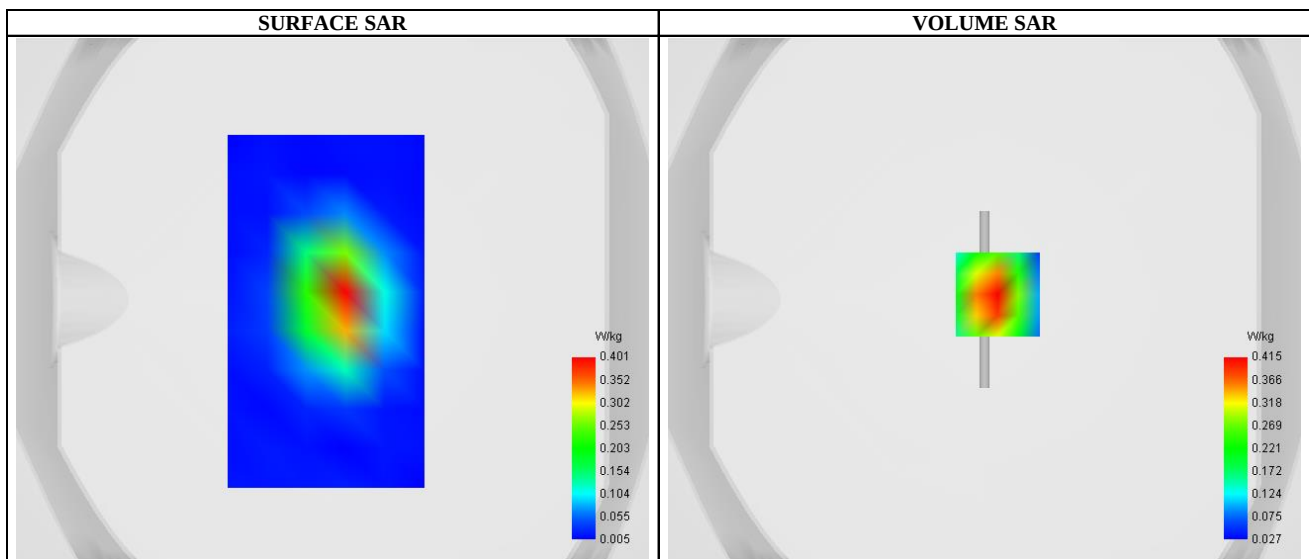


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 0.64 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.211193
SAR 1g (W/Kg)	0.390363
Variation (%)	1.350000

E. Z Axis Scan

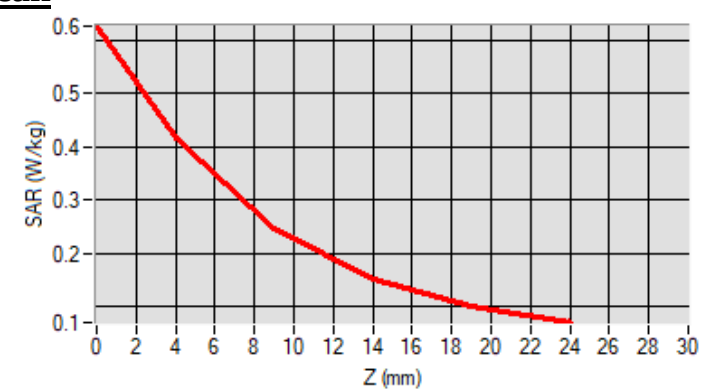

System check at 2450 MHz

Date of measurement: 29/12/2024


A. Experimental conditions.

Probe	2423-EPO-413
ConvF	2.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.202499
Conductivity (S/m)	1.725263

C. SAR Surface and Volume

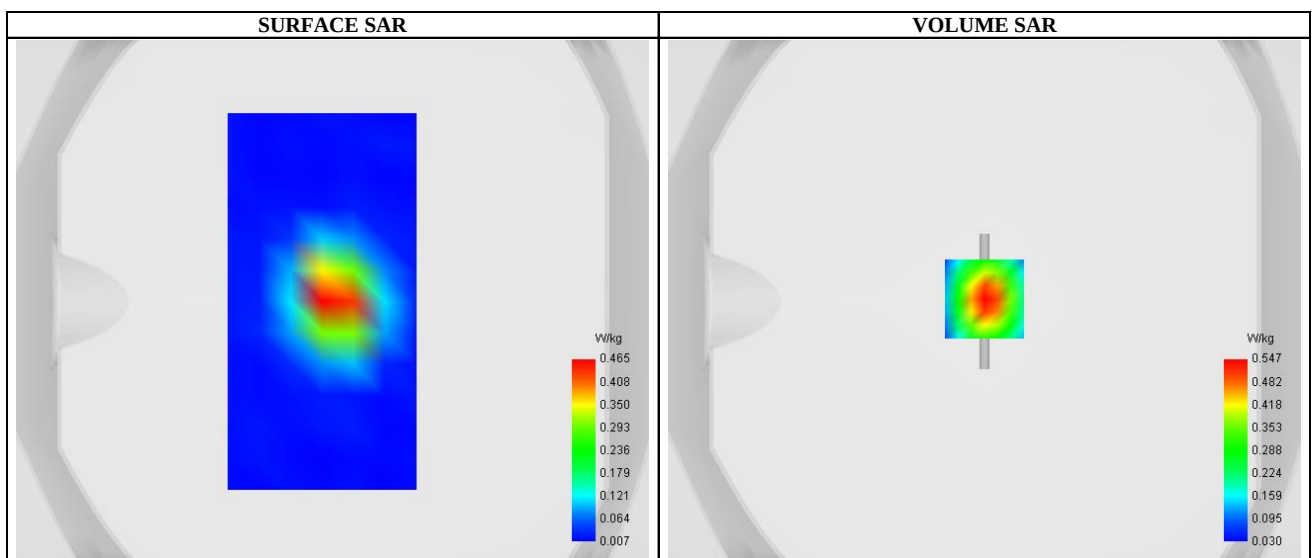


Maximum location: X=0.00, Y=1.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.248990
SAR 1g (W/Kg)	0.533458
Variation (%)	0.670000

E. Z Axis Scan

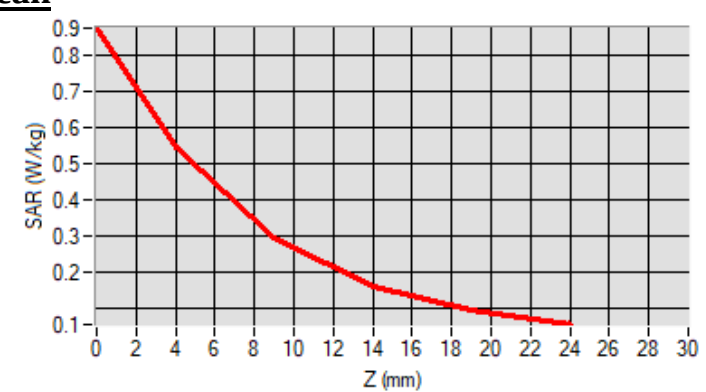

System check at 2600 MHz

Date of measurement: 29/12/2024


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.110841
Conductivity (S/m)	1.921315

C. SAR Surface and Volume

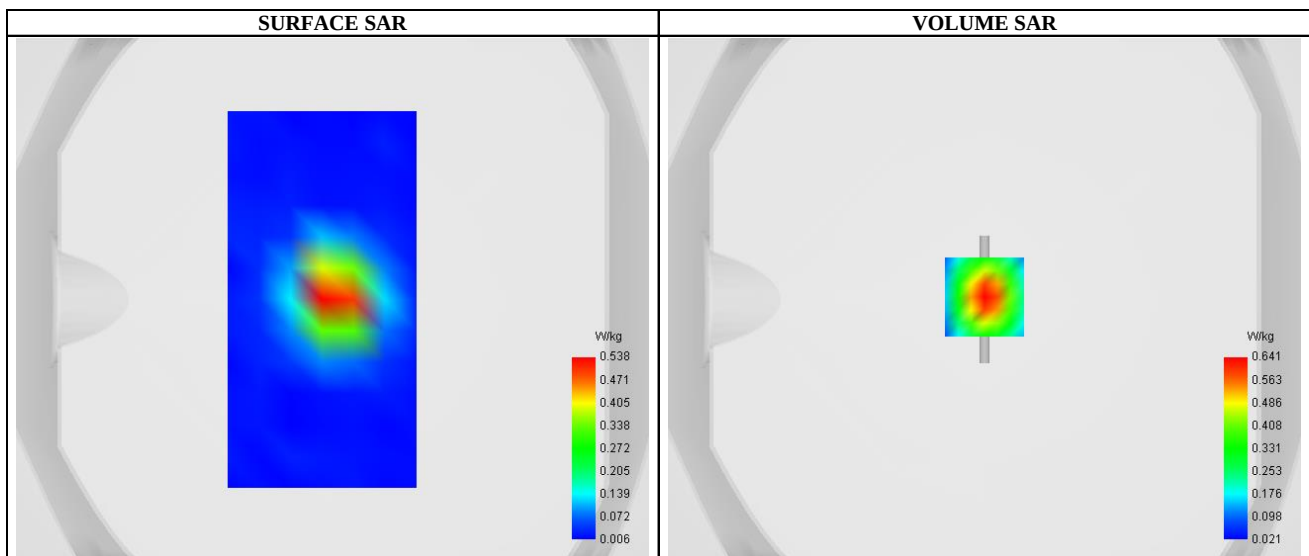


Maximum location: X=0.00, Y=1.00 ; SAR Peak: 1.04 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.256305
SAR 1g (W/Kg)	0.572191
Variation (%)	-0.310000

E. Z Axis Scan

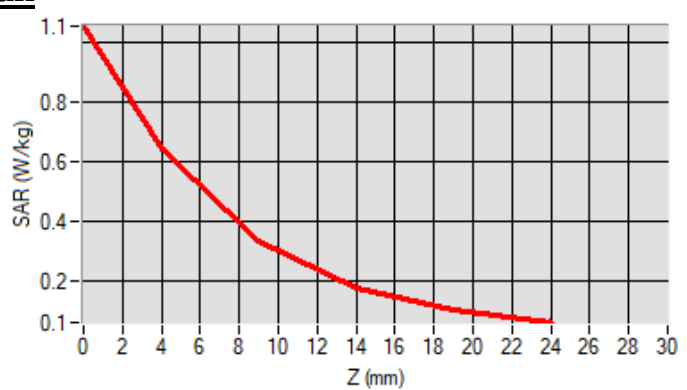

Appendix B: Plots of SAR Test Data

SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.622215
Conductivity (S/m)	0.911254

C. SAR Surface and Volume

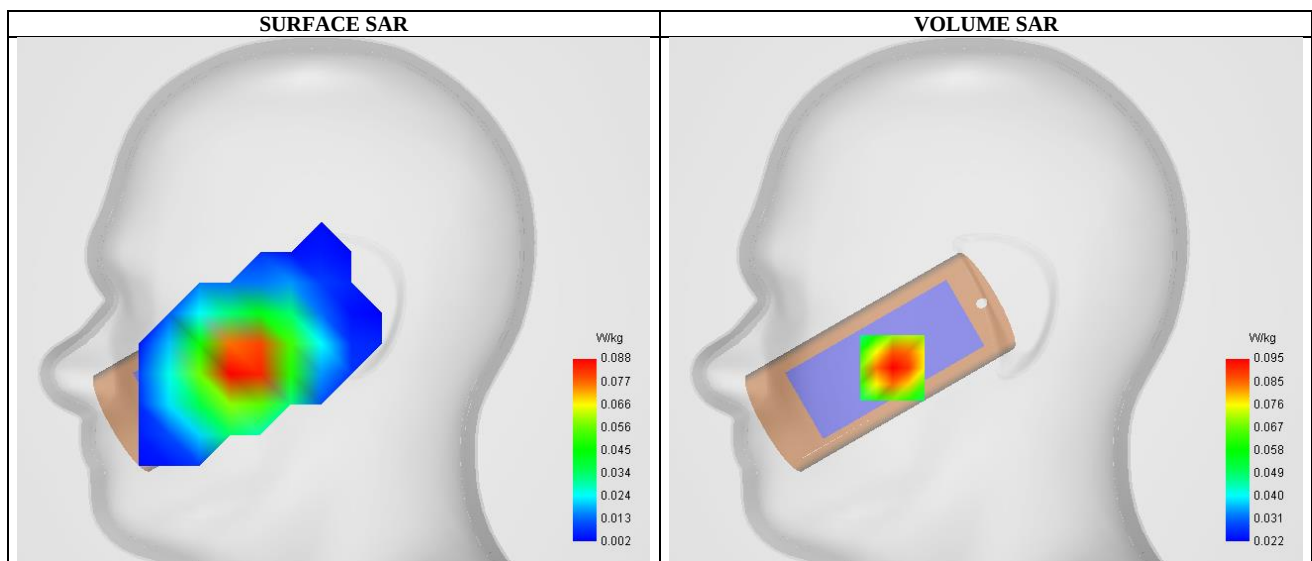


Maximum location: X=-46.00, Y=-33.00 ; SAR Peak: 0.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.066446
SAR 1g (W/Kg)	0.090589
Variation (%)	-4.000000

E. Z Axis Scan

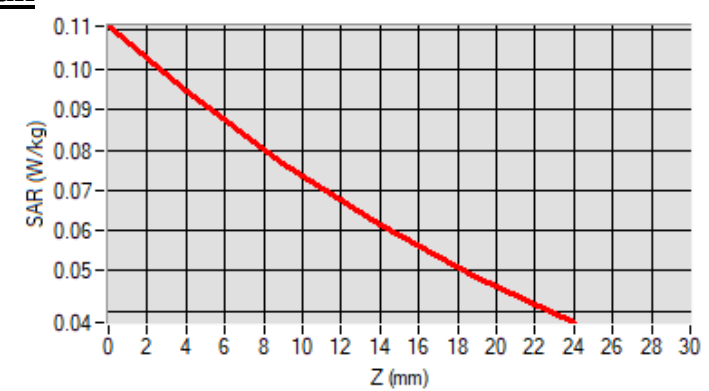

SAR Measurement at GSM1900 (Cheek, Left)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.421254
Conductivity (S/m)	1.350384

C. SAR Surface and Volume

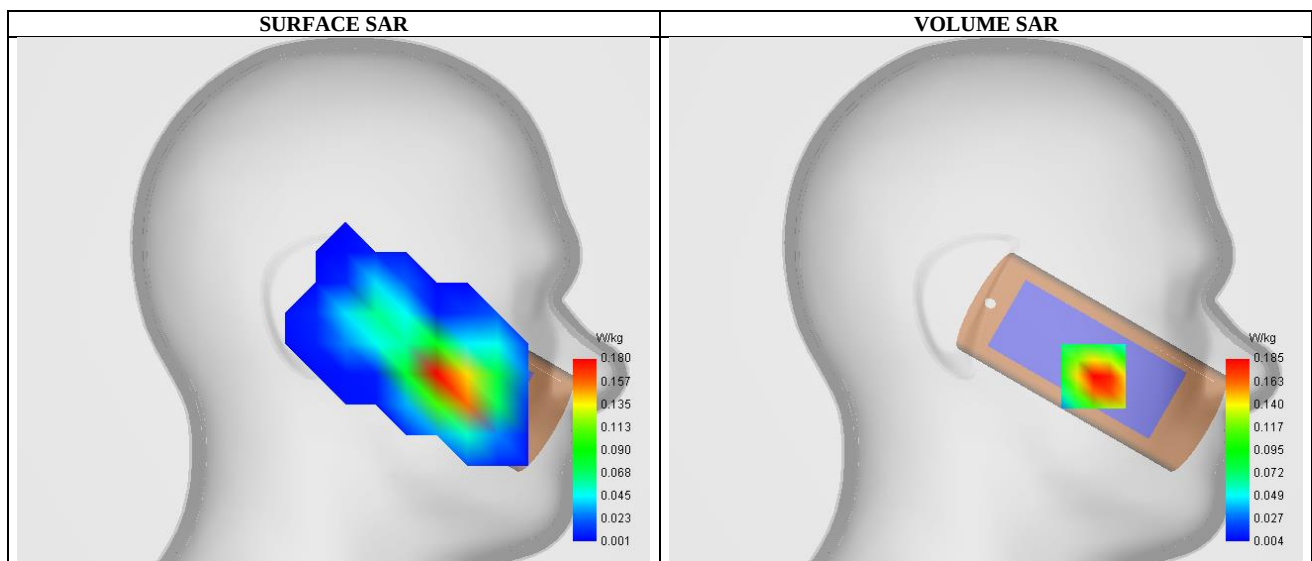


Maximum location: X=-53.00, Y=-37.00 ; SAR Peak: 0.24 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.110112
SAR 1g (W/Kg)	0.177075
Variation (%)	0.200001

E. Z Axis Scan

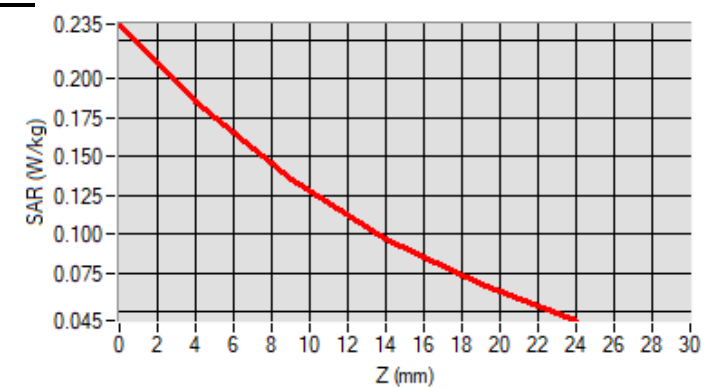

SAR Measurement at Band2_WCDMA1900 (Cheek, Left)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.435128
Conductivity (S/m)	1.345264

C. SAR Surface and Volume

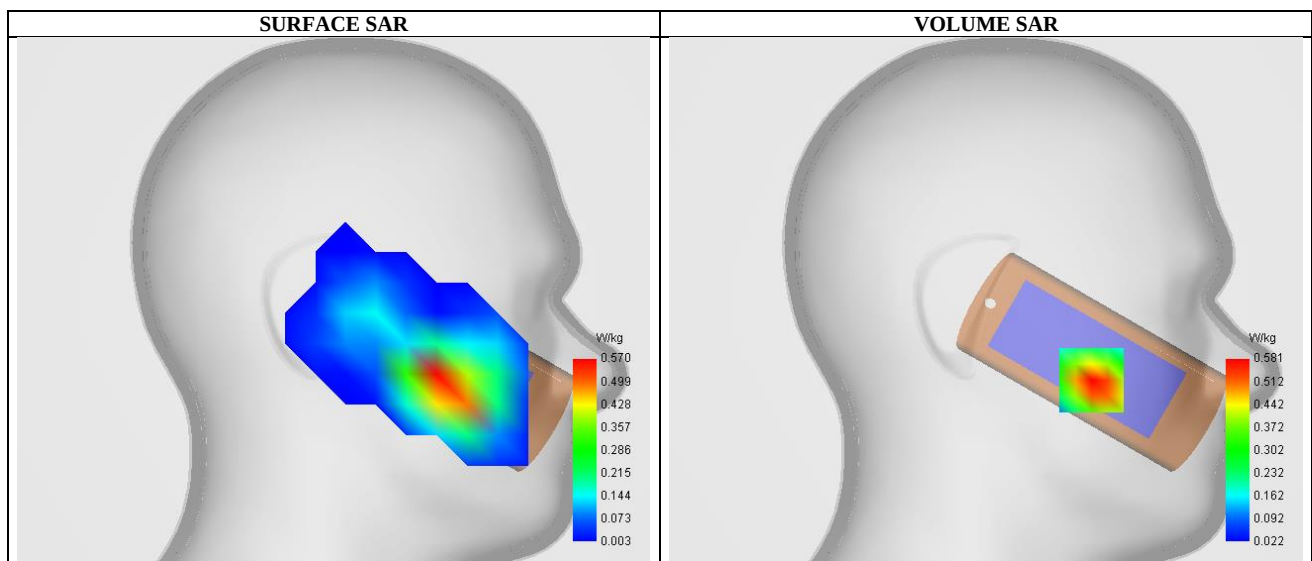


Maximum location: X=-52.00, Y=-39.00 ; SAR Peak: 0.75 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.349864
SAR 1g (W/Kg)	0.550538
Variation (%)	-4.120000

E. Z Axis Scan

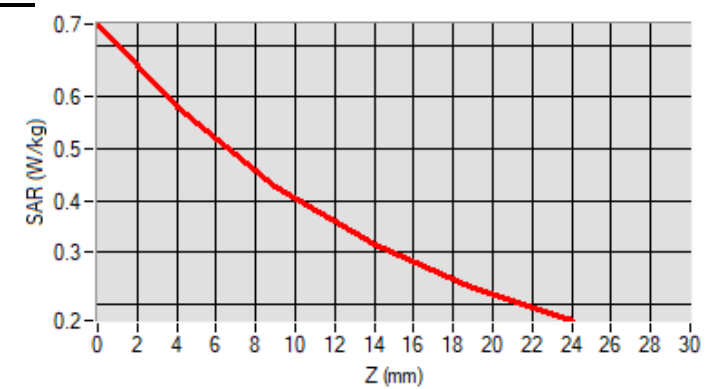

SAR Measurement at CUSTOM (WCDMA_1700) (Cheek, Left)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band4_WCDMA1700
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.015126
Conductivity (S/m)	1.357152

C. SAR Surface and Volume

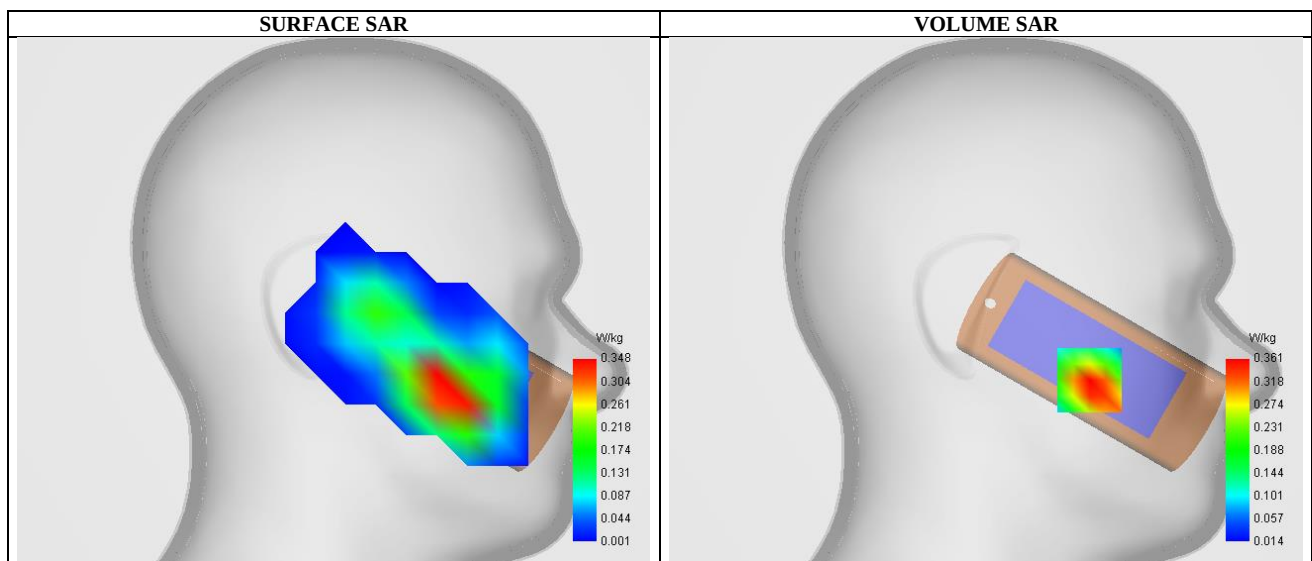


Maximum location: X=-51.00, Y=-39.00 ; SAR Peak: 0.46 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.223325
SAR 1g (W/Kg)	0.345742
Variation (%)	-3.200000

E. Z Axis Scan

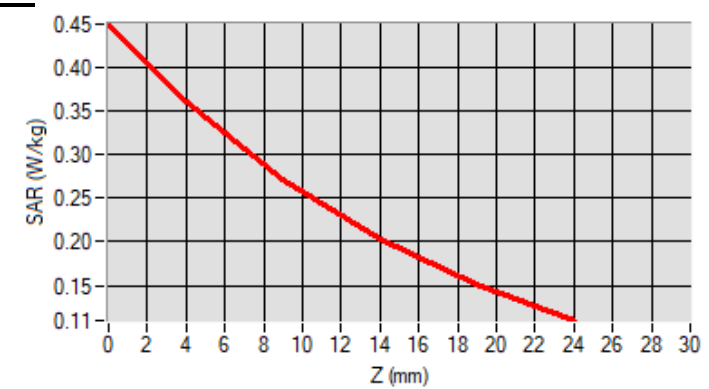

SAR Measurement at Band5_WCDMA850 (Cheek, Right)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.622215
Conductivity (S/m)	0.911254

C. SAR Surface and Volume

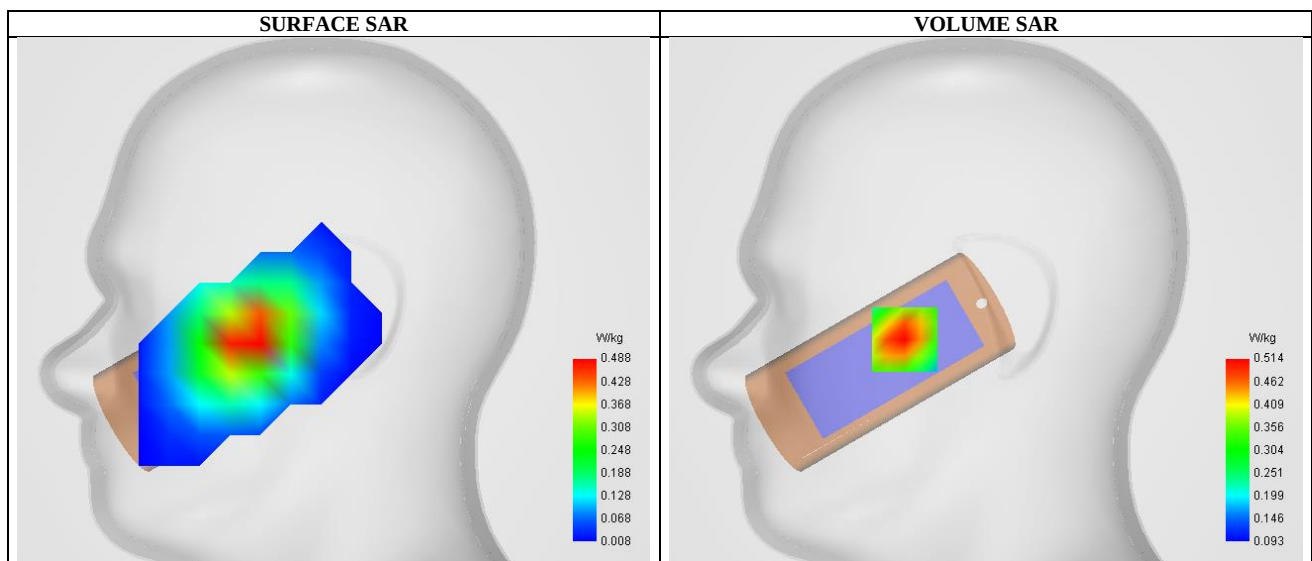


Maximum location: X=-40.00, Y=-19.00 ; SAR Peak: 0.61 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.351328
SAR 1g (W/Kg)	0.490913
Variation (%)	3.410000

E. Z Axis Scan

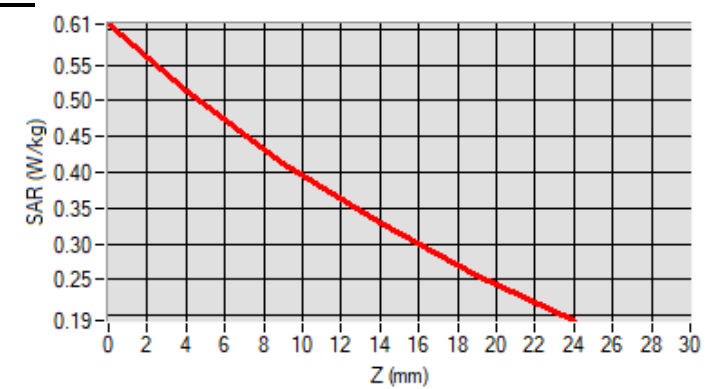

SAR Measurement at LTE band 2 (Cheek, Left)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1860.000000
Relative permittivity (real part)	40.436128
Conductivity (S/m)	1.344267

C. SAR Surface and Volume

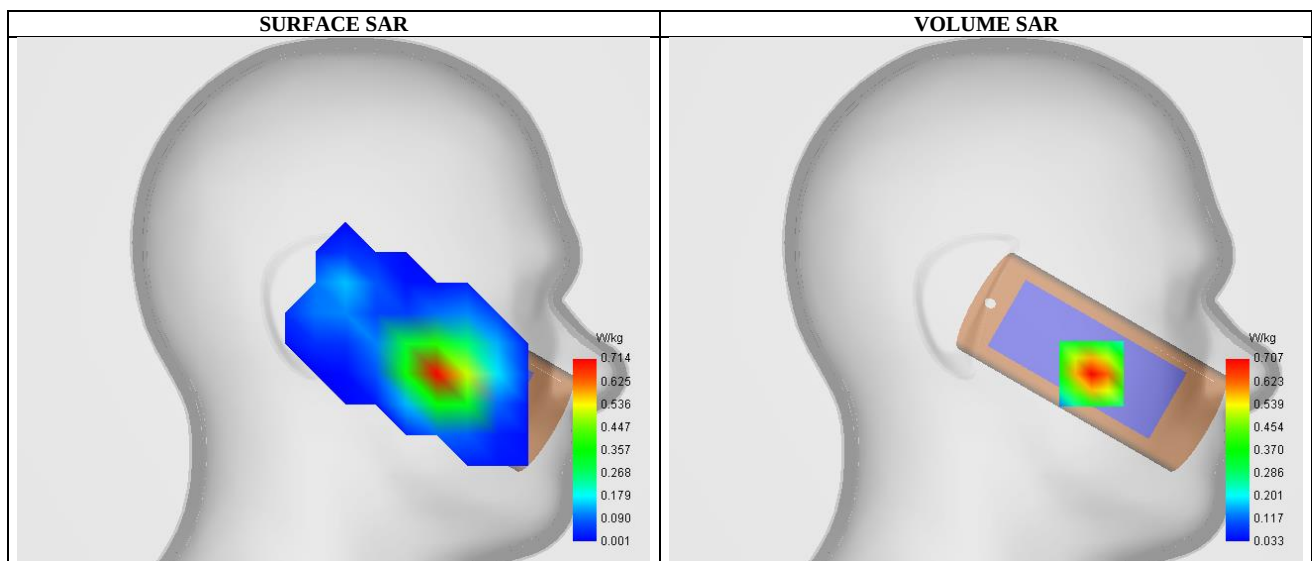


Maximum location: X=-52.00, Y=-36.00 ; SAR Peak: 0.92 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.404936
SAR 1g (W/Kg)	0.658362
Variation (%)	-1.650000

E. Z Axis Scan

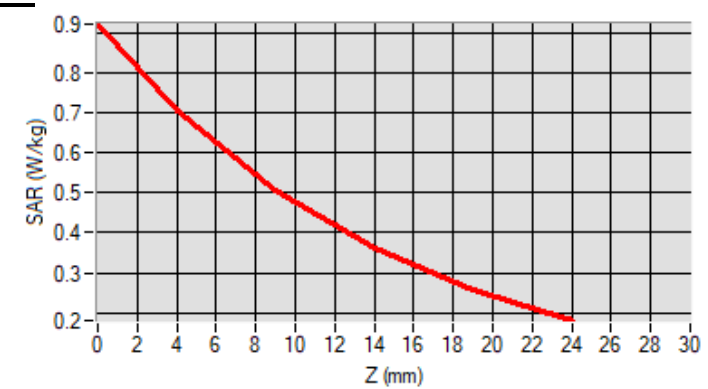

SAR Measurement at CUSTOM (LTE Band 4) (Cheek, Left)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.012654
Conductivity (S/m)	1.367715

C. SAR Surface and Volume

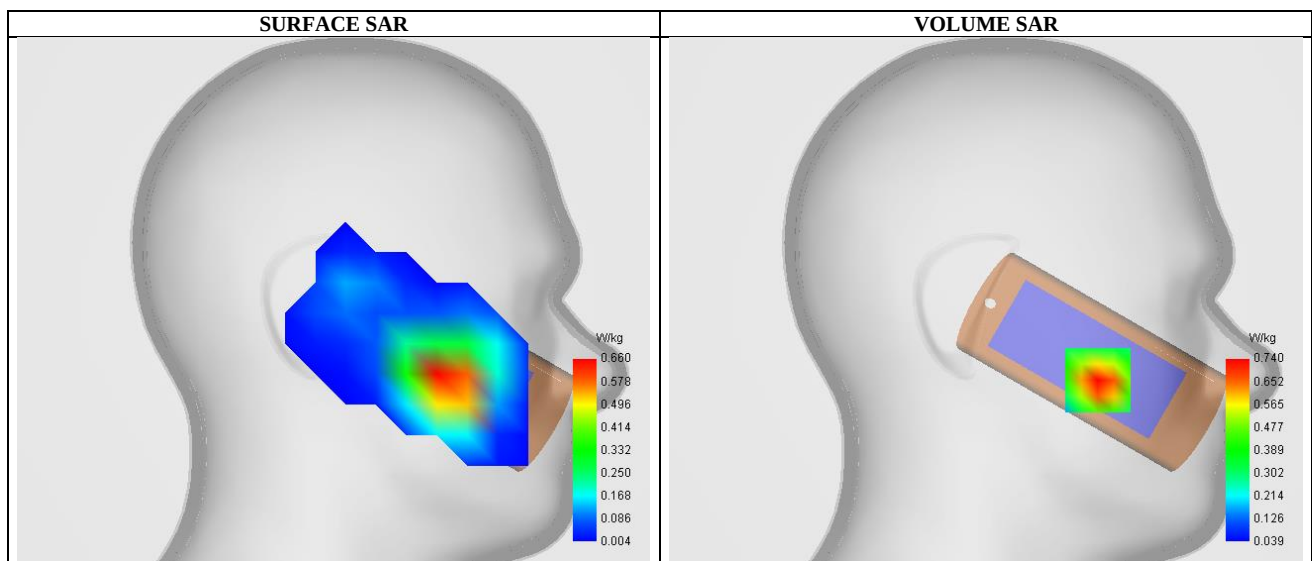


Maximum location: X=-55.00, Y=-39.00 ; SAR Peak: 0.96 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.438453
SAR 1g (W/Kg)	0.695770
Variation (%)	-4.290000

E. Z Axis Scan

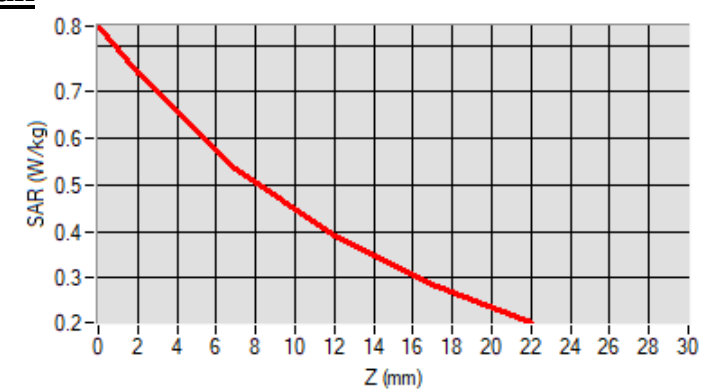

SAR Measurement at LTE band 5 (Cheek, Left)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	dx=15mm dy=15mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	844.000000
Relative permittivity (real part)	41.621215
Conductivity (S/m)	0.917521

C. SAR Surface and Volume

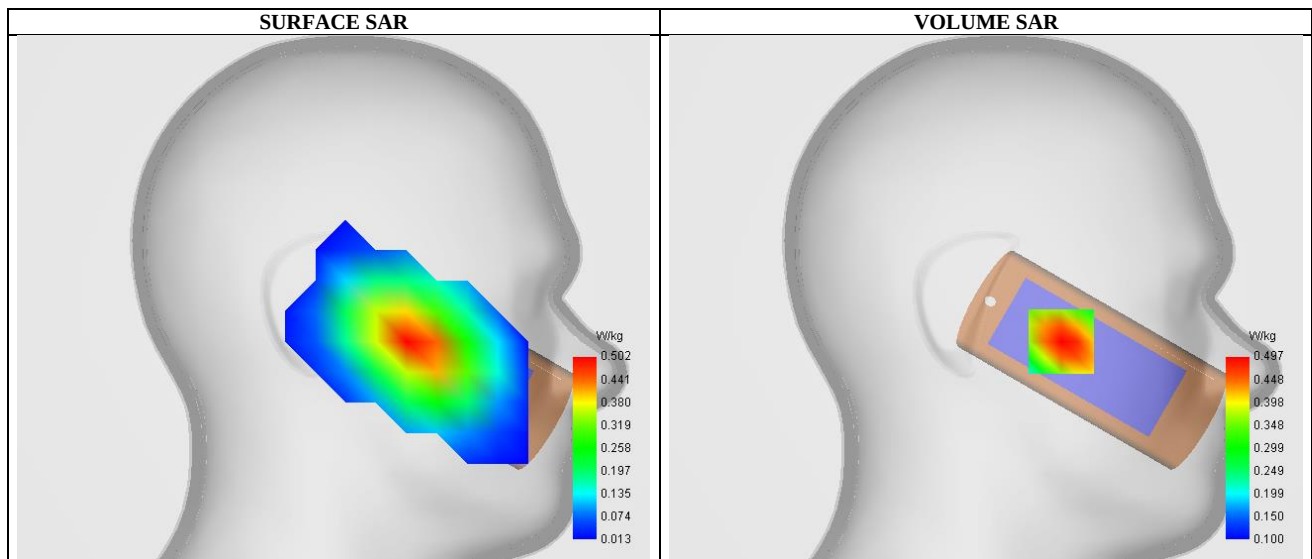


Maximum location: X=-37.00, Y=-21.00 ; SAR Peak: 0.59 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.348279
SAR 1g (W/Kg)	0.476733
Variation (%)	-2.610000

E. Z Axis Scan

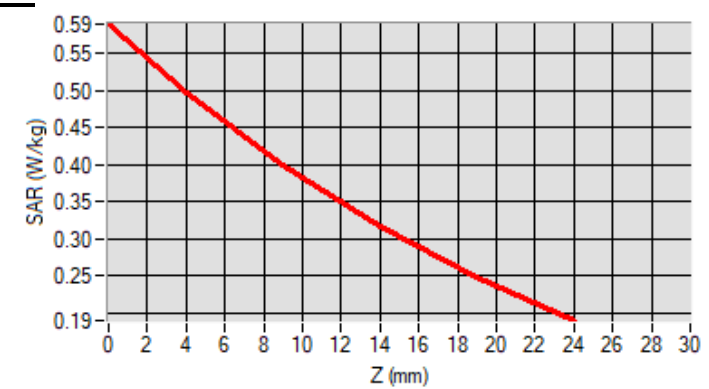

SAR Measurement at LTE band 7 (Cheek, Left)

Date of measurement: 29/12/2024


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	dx=12mm dy=12mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2510.000000
Relative permittivity (real part)	39.135261
Conductivity (S/m)	1.902615

C. SAR Surface and Volume

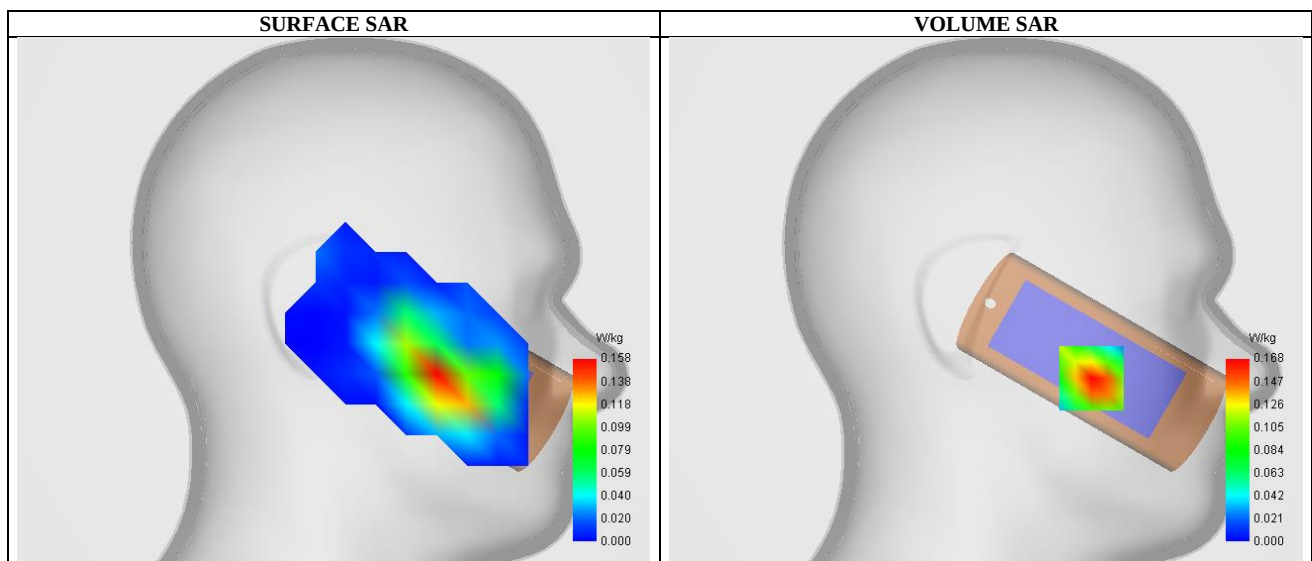


Maximum location: X=-52.00, Y=-38.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.088846
SAR 1g (W/Kg)	0.158338
Variation (%)	-0.670000

E. Z Axis Scan

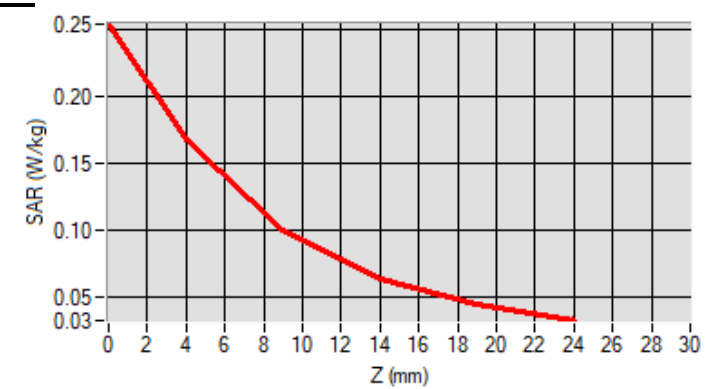

SAR Measurement at CUSTOM (GPRS8503TXslots) (Body, Validation Plane)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.622215
Conductivity (S/m)	0.911254

C. SAR Surface and Volume

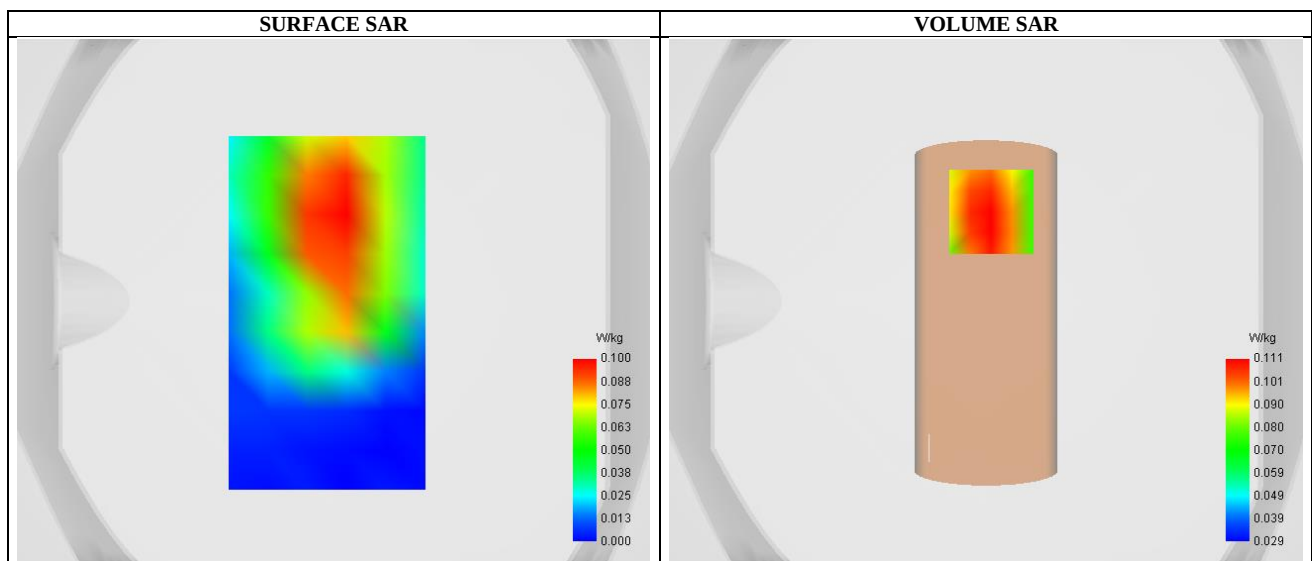


Maximum location: X=2.00, Y=34.00 ; SAR Peak: 0.14 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.079656
SAR 1g (W/Kg)	0.107471
Variation (%)	0.970000

E. Z Axis Scan

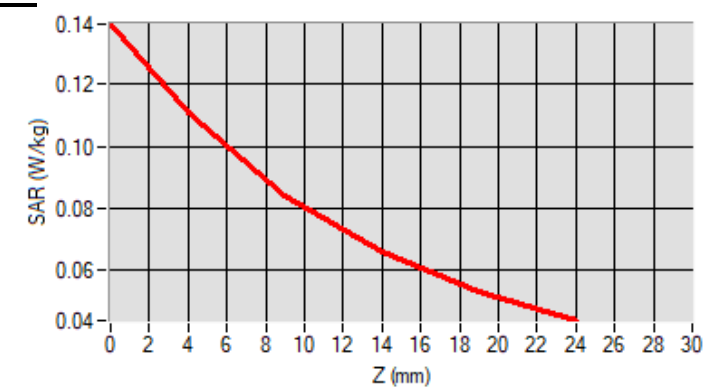

SAR Measurement at CUSTOM (GPRS19004Txslots) (Body, Validation Plane)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Channels	High
Signal	TDMA (Crest factor: 2.0)

B. Permittivity

Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.421254
Conductivity (S/m)	1.350384

C. SAR Surface and Volume

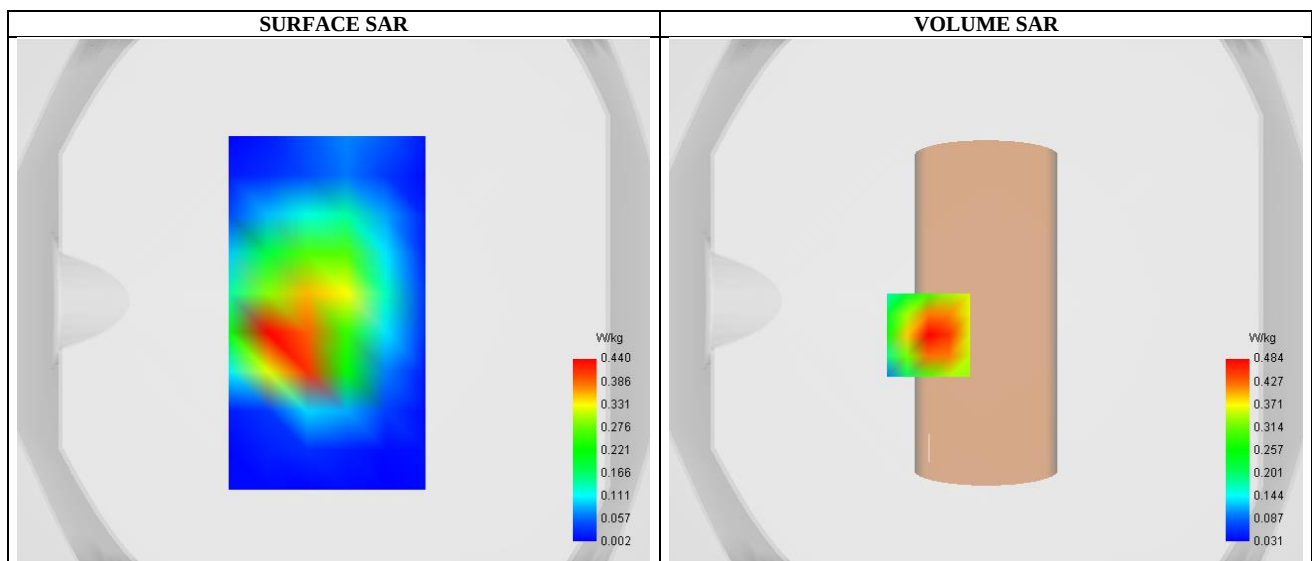


Maximum location: X=-22.00, Y=-13.00 ; SAR Peak: 0.72 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.267760
SAR 1g (W/Kg)	0.457558
Variation (%)	-3.010000

E. Z Axis Scan

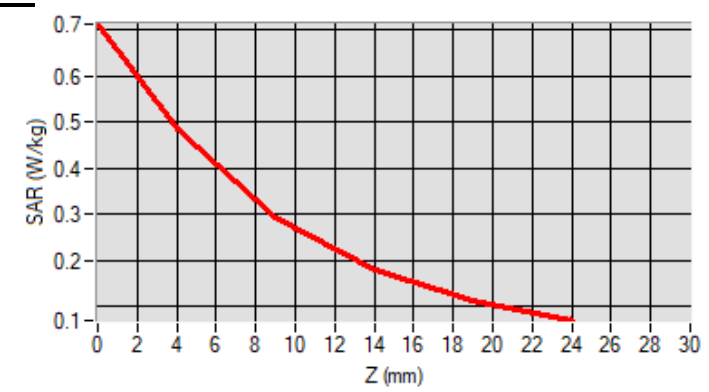

SAR Measurement at Band2_WCDMA1900 (Body, Validation Plane)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.435128
Conductivity (S/m)	1.345264

C. SAR Surface and Volume

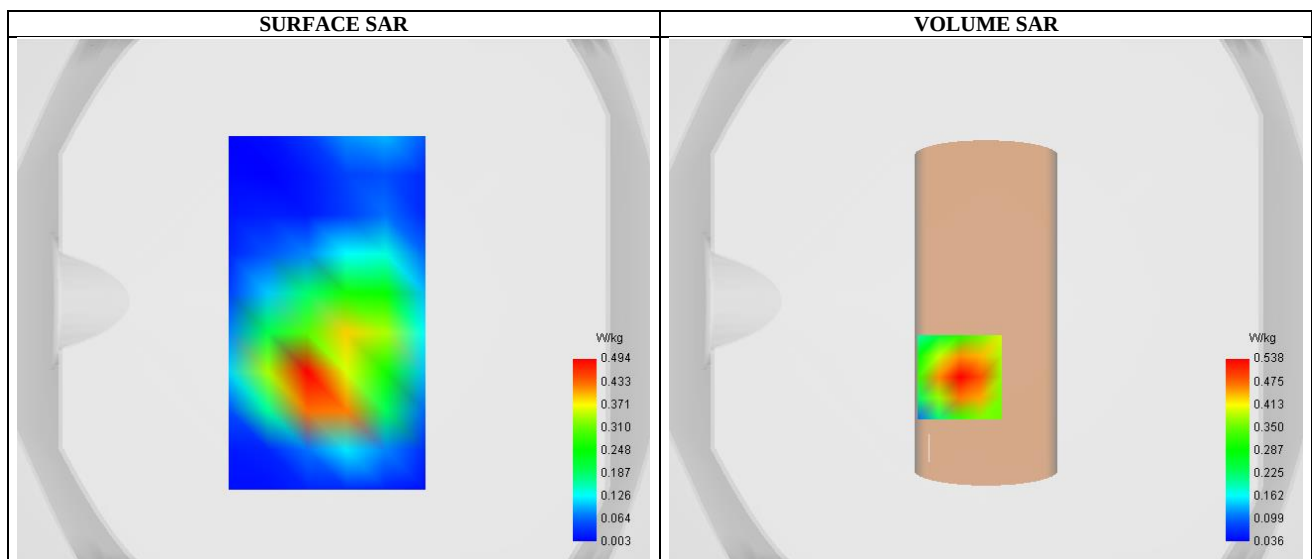


Maximum location: X=-10.00, Y=-29.00 ; SAR Peak: 0.79 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.294887
SAR 1g (W/Kg)	0.504757
Variation (%)	0.990000

E. Z Axis Scan

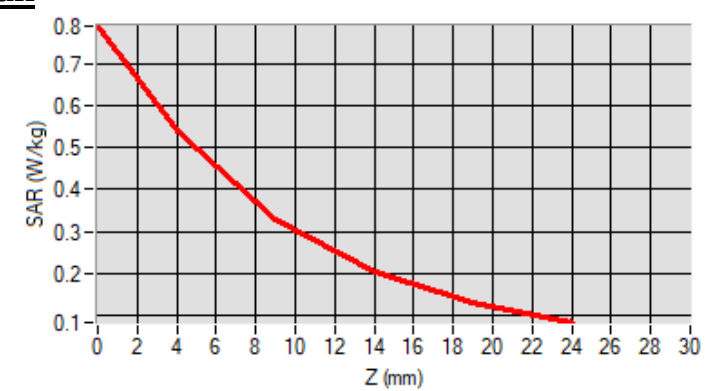

SAR Measurement at CUSTOM (WCDMA_1700) (Body, Validation Plane)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band4_WCDMA1700
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.015126
Conductivity (S/m)	1.357152

C. SAR Surface and Volume

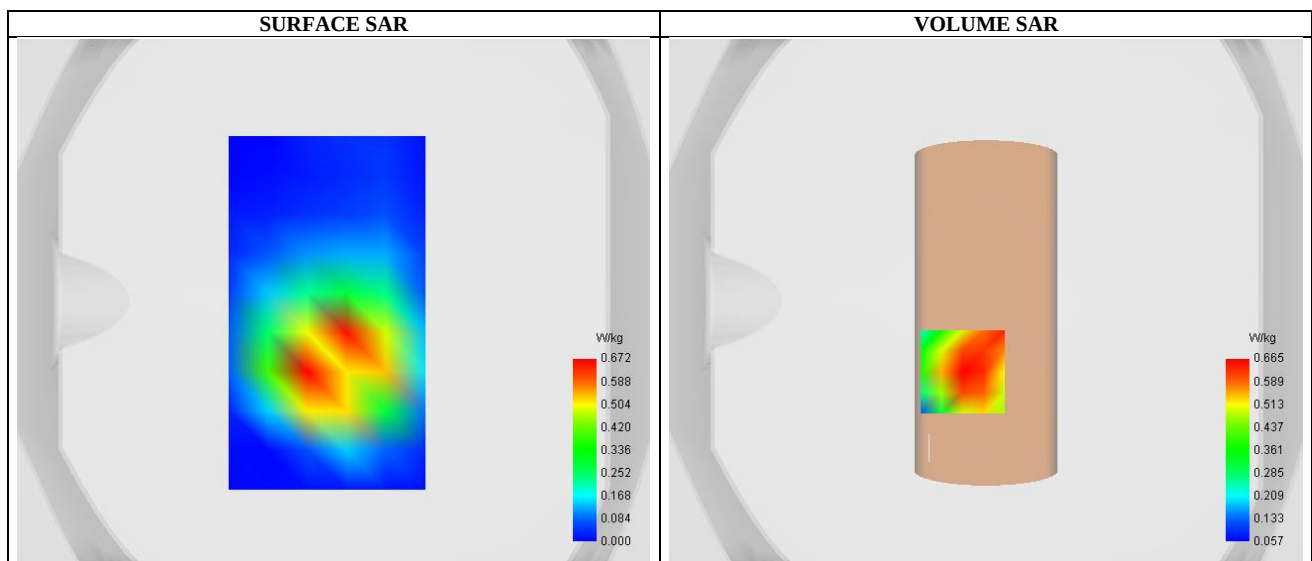


Maximum location: X=-9.00, Y=-27.00 ; SAR Peak: 0.81 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.318968
SAR 1g (W/Kg)	0.516410
Variation (%)	-0.130000

E. Z Axis Scan

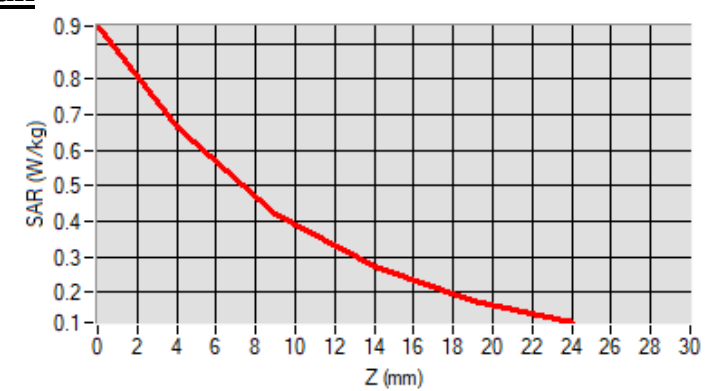

SAR Measurement at Band5_WCDMA850 (Body, Validation Plane)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.599976
Relative permittivity (real part)	41.622215
Conductivity (S/m)	0.911254

C. SAR Surface and Volume

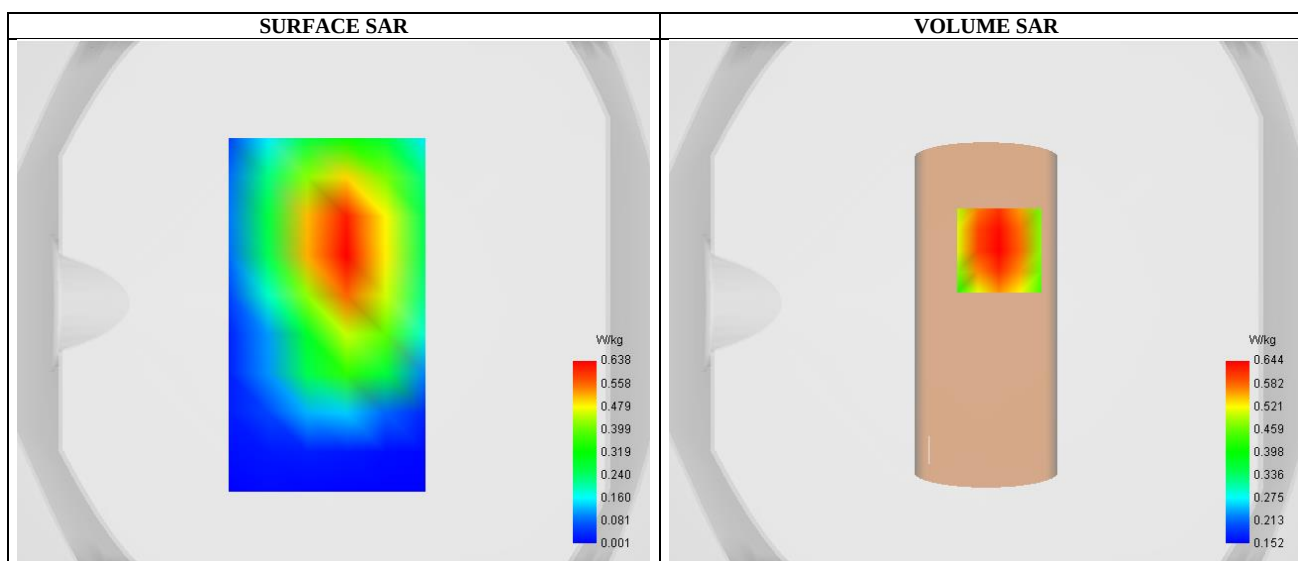


Maximum location: X=5.00, Y=20.00 ; SAR Peak: 0.77 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.466081
SAR 1g (W/Kg)	0.621845
Variation (%)	0.230000

E. Z Axis Scan

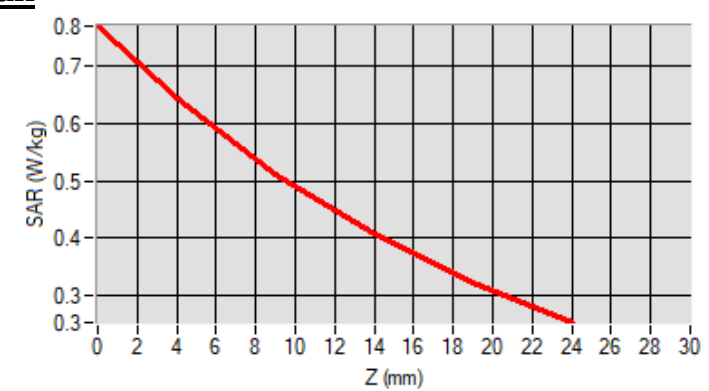

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1860.000000
Relative permittivity (real part)	40.436128
Conductivity (S/m)	1.344267

C. SAR Surface and Volume

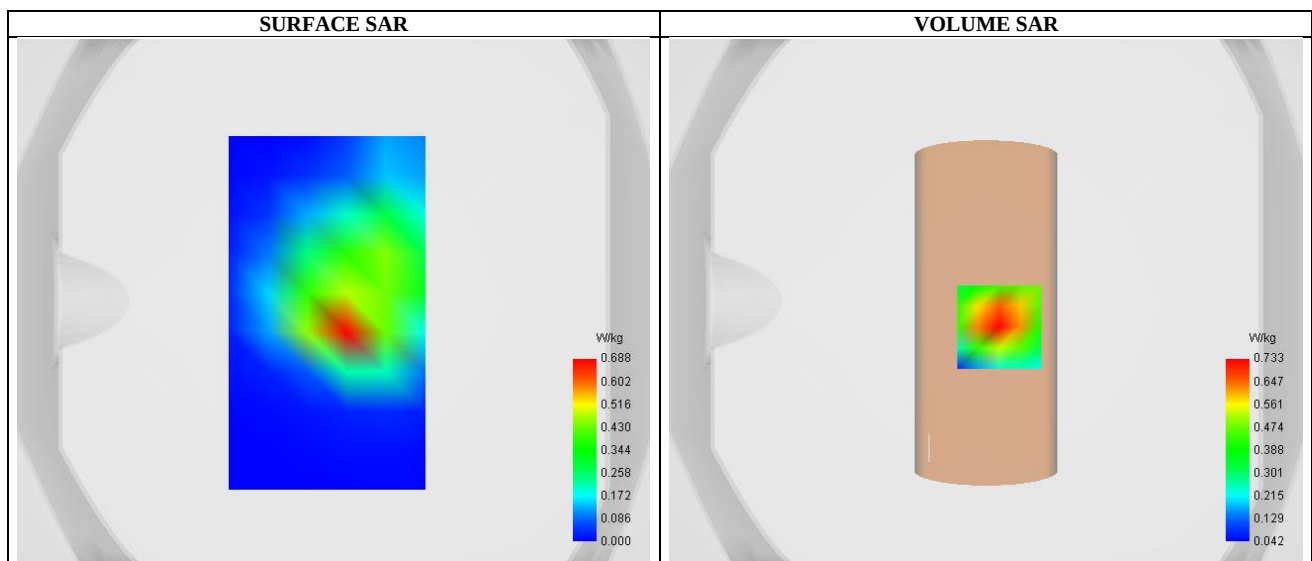


Maximum location: X=5.00, Y=-10.00 ; SAR Peak: 1.13 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.381335
SAR 1g (W/Kg)	0.686897
Variation (%)	-2.040000

E. Z Axis Scan

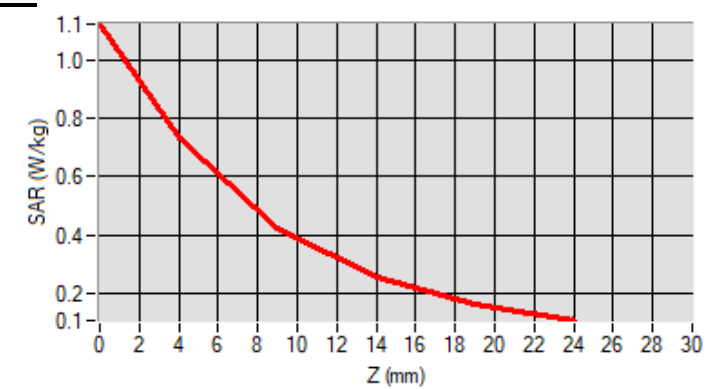

SAR Measurement at CUSTOM (LTE Band 4) (Body, Validation Plane)

Date of measurement: 6/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.71
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.012654
Conductivity (S/m)	1.367715

C. SAR Surface and Volume

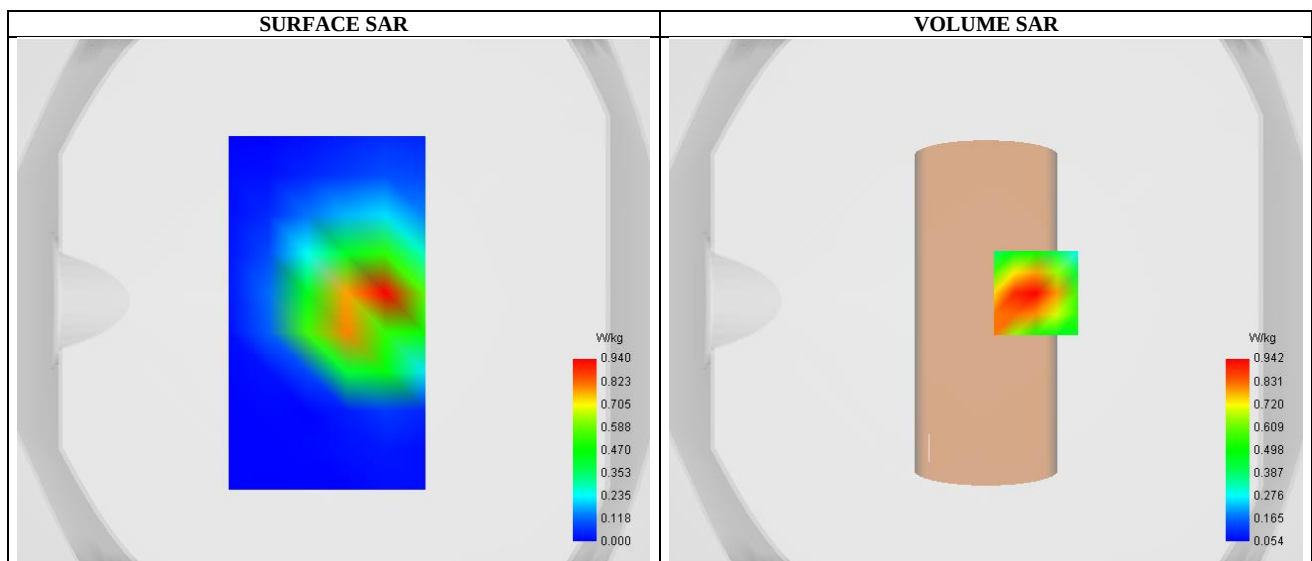


Maximum location: X=19.00, Y=3.00 ; SAR Peak: 1.16 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.431468
SAR 1g (W/Kg)	0.729449
Variation (%)	-1.970000

E. Z Axis Scan

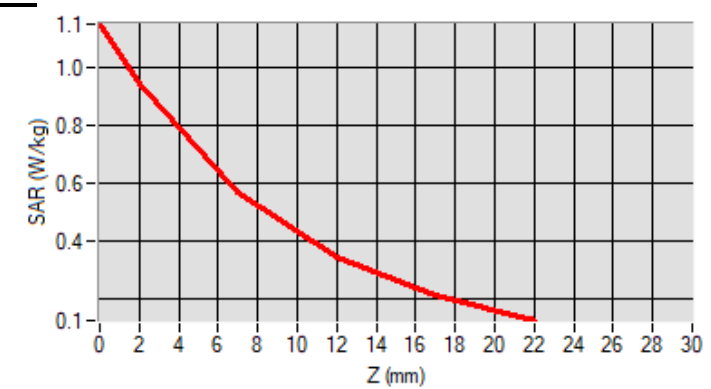

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 2/1/2025


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.53
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	High
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	844.000000
Relative permittivity (real part)	41.621215
Conductivity (S/m)	0.917521

C. SAR Surface and Volume

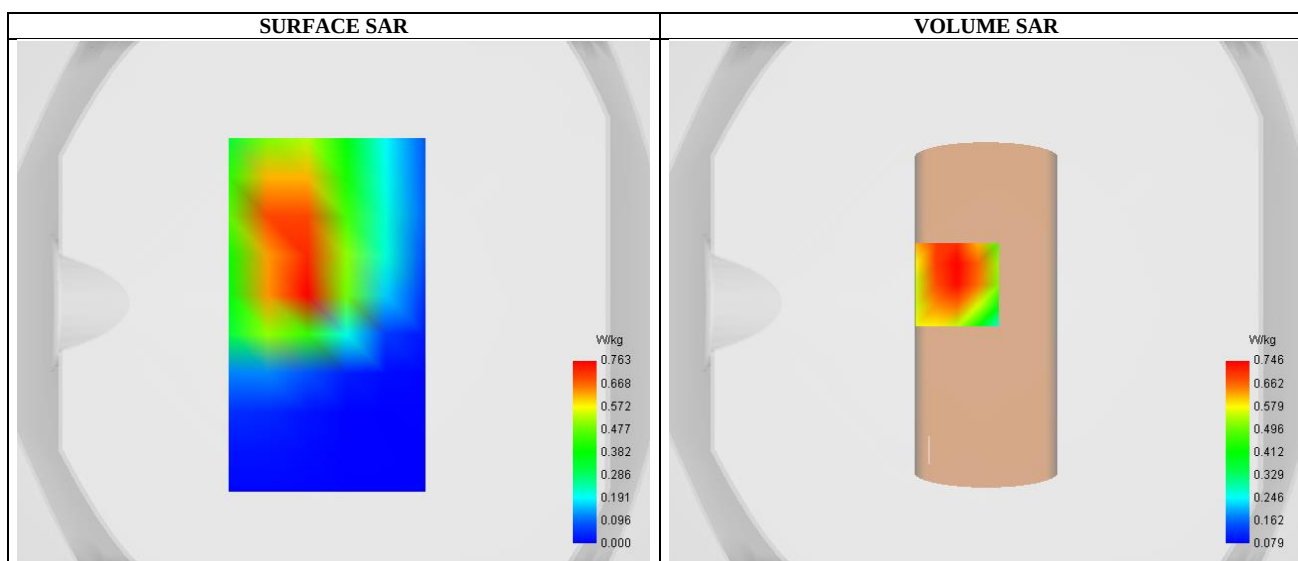


Maximum location: X=-11.00, Y=7.00 ; SAR Peak: 0.96 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.505947
SAR 1g (W/Kg)	0.722776
Variation (%)	-2.030000

E. Z Axis Scan

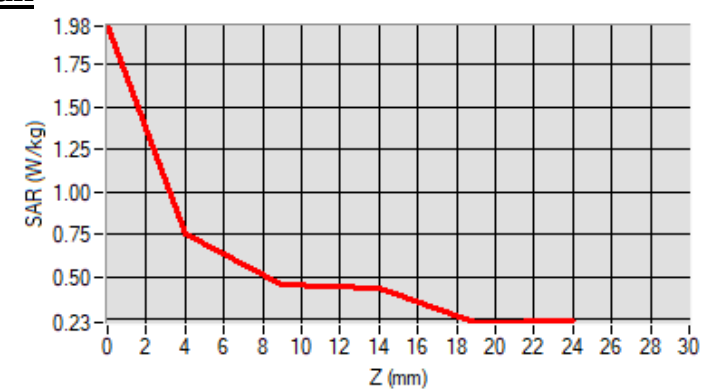

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 29/12/2024


A. Experimental conditions.

Probe	2423-EPGO-413
ConvF	2.62
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Low
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2510.000000
Relative permittivity (real part)	39.135261
Conductivity (S/m)	1.902615

C. SAR Surface and Volume

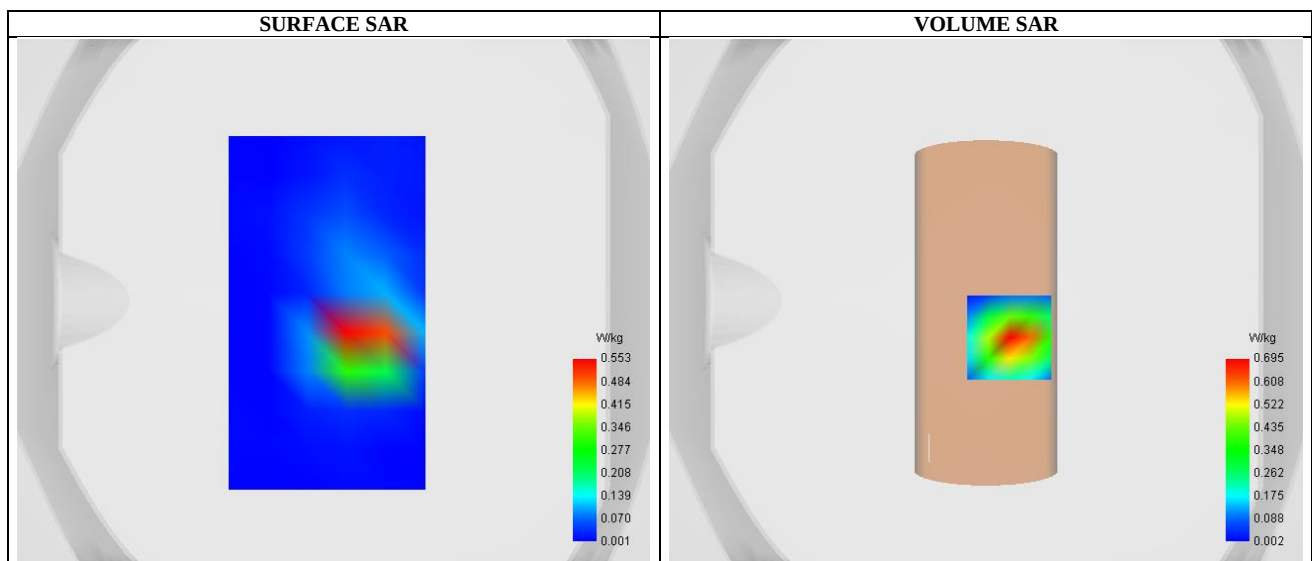


Maximum location: X=9.00, Y=-14.00 ; SAR Peak: 1.17 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.291591
SAR 1g (W/Kg)	0.635211
Variation (%)	3.690000

E. Z Axis Scan

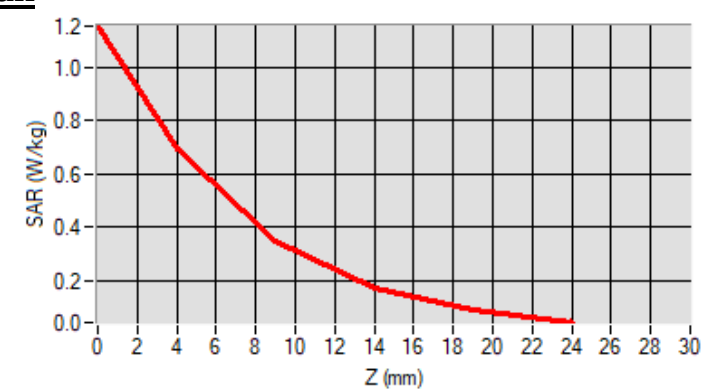

-----End of Report-----