



Safety Label Note:

1. Printing color: Black
2. **Vendor ID:** (Requested by CSA)
Decide by Vendor

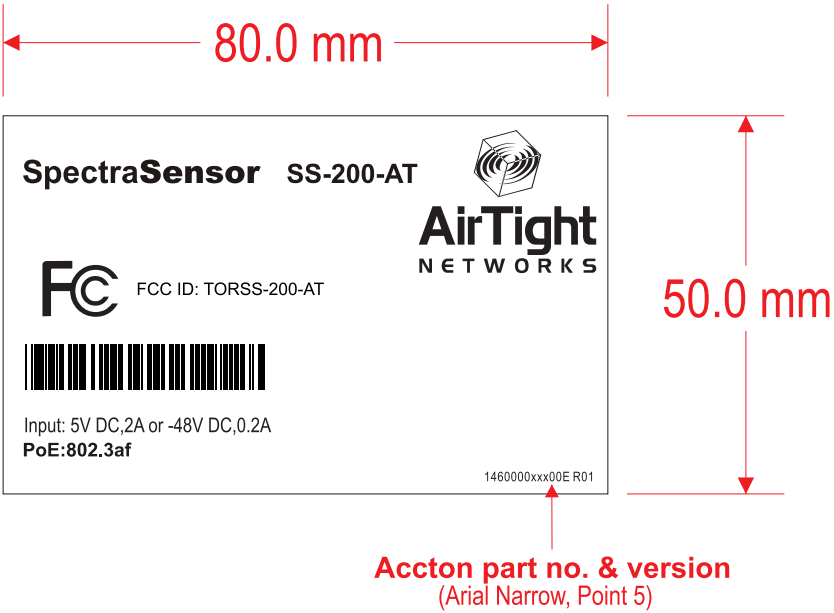

Modification		Card Paper / Top lineboard				Corrugate list				Die Cut Tolerance +/- 0.5 mm					PE Bag		White	Pink	Label list		(Total Thickness = 0.092 mm±10%)		Others			Accton TECHNOLOGY CORP.						
1		GSM (g/m²)	CCNB	SBS	Double SBS	Flute (A Degree)	Top lineboard	Single wall/ Double wall	GSM g/m (Top lineboard/Medium/Bottom lineboard)	DIM	GRADE	0	1	2	3	4	5	No Static	Anti-Static	Electronic	Material & Thickness		Adhesive		Material Spec:			Part No. 146000039400E REV. 04				
2		250				B	Yellow	230 X 100 X 230		16	63	0.05	0.1	0.15	0.2	0.2	0.5	Bubble	Single layer	Double layer	Art paper	✓ 0.025mm / 25# / 1mil	Acrylic	T=0.022mm				Description: UL label WA6102X-FW				
3		280				E	White	220 X 100 X 200		63	250	0.05	0.2	0.25	0.4	0.5	1.2	Thickness/mm	0.04	0.06	0.08	✓ Matelized	0.050mm / 50# / 2mil	✓ Acrylic UL approved	T=0.022mm							
4		300				A	Yellow	230 X 180 X 230		250	500	0.1	0.25	0.3	0.6	0.8	1.8	ESD Value/Ω _{ohm}	0-11	< 5		White Polyester	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm							
5		310					Yellow	230 X 100 X 230		500	1000	0.3	0.5	0.8	1.2	3.0		EPE Foam	White	Pink	(PP)Pepa paper	0.178mm / 7mil	Water Adhesive	T=0.022mm	Approve	Enoch	07.28.05					
6		340				AB		230X100X100X100X230		Printing Tolerance +/- mm					Expanded Rate/times		28-30	Other	Pulp Tray	(50% kraft + 50% newspaper)		PC 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil	Check						
7		350								Cardboard Die Cut Legend					Thickness/mm		1.5	2.0	Other	Other	0.500mm / 20mil	3M 7945	T=0.127mm / 5mil	Design	Melody	07.28.05						
8		Coated	UV	Mar Resistant Varnish		Bursting Strength (Kg / cm²)				(CL) Cutting Line	(CI) Crease Line	(SI) Slit-Score Line	(PCL) Partial Cutting Line		Weight / g =		+ / - 5%		PP Film	✓ LF (T = 0.045mm)	DF (T = 0.035mm)				UNIT	SCALE 1 / 1	SIZE A3					
		PP Film	LF(T=0.15mm)	DF(T=0.18mm)		8	14	16	18	Other															MM	(IN)	Outside View	Sheet 1 of 1				

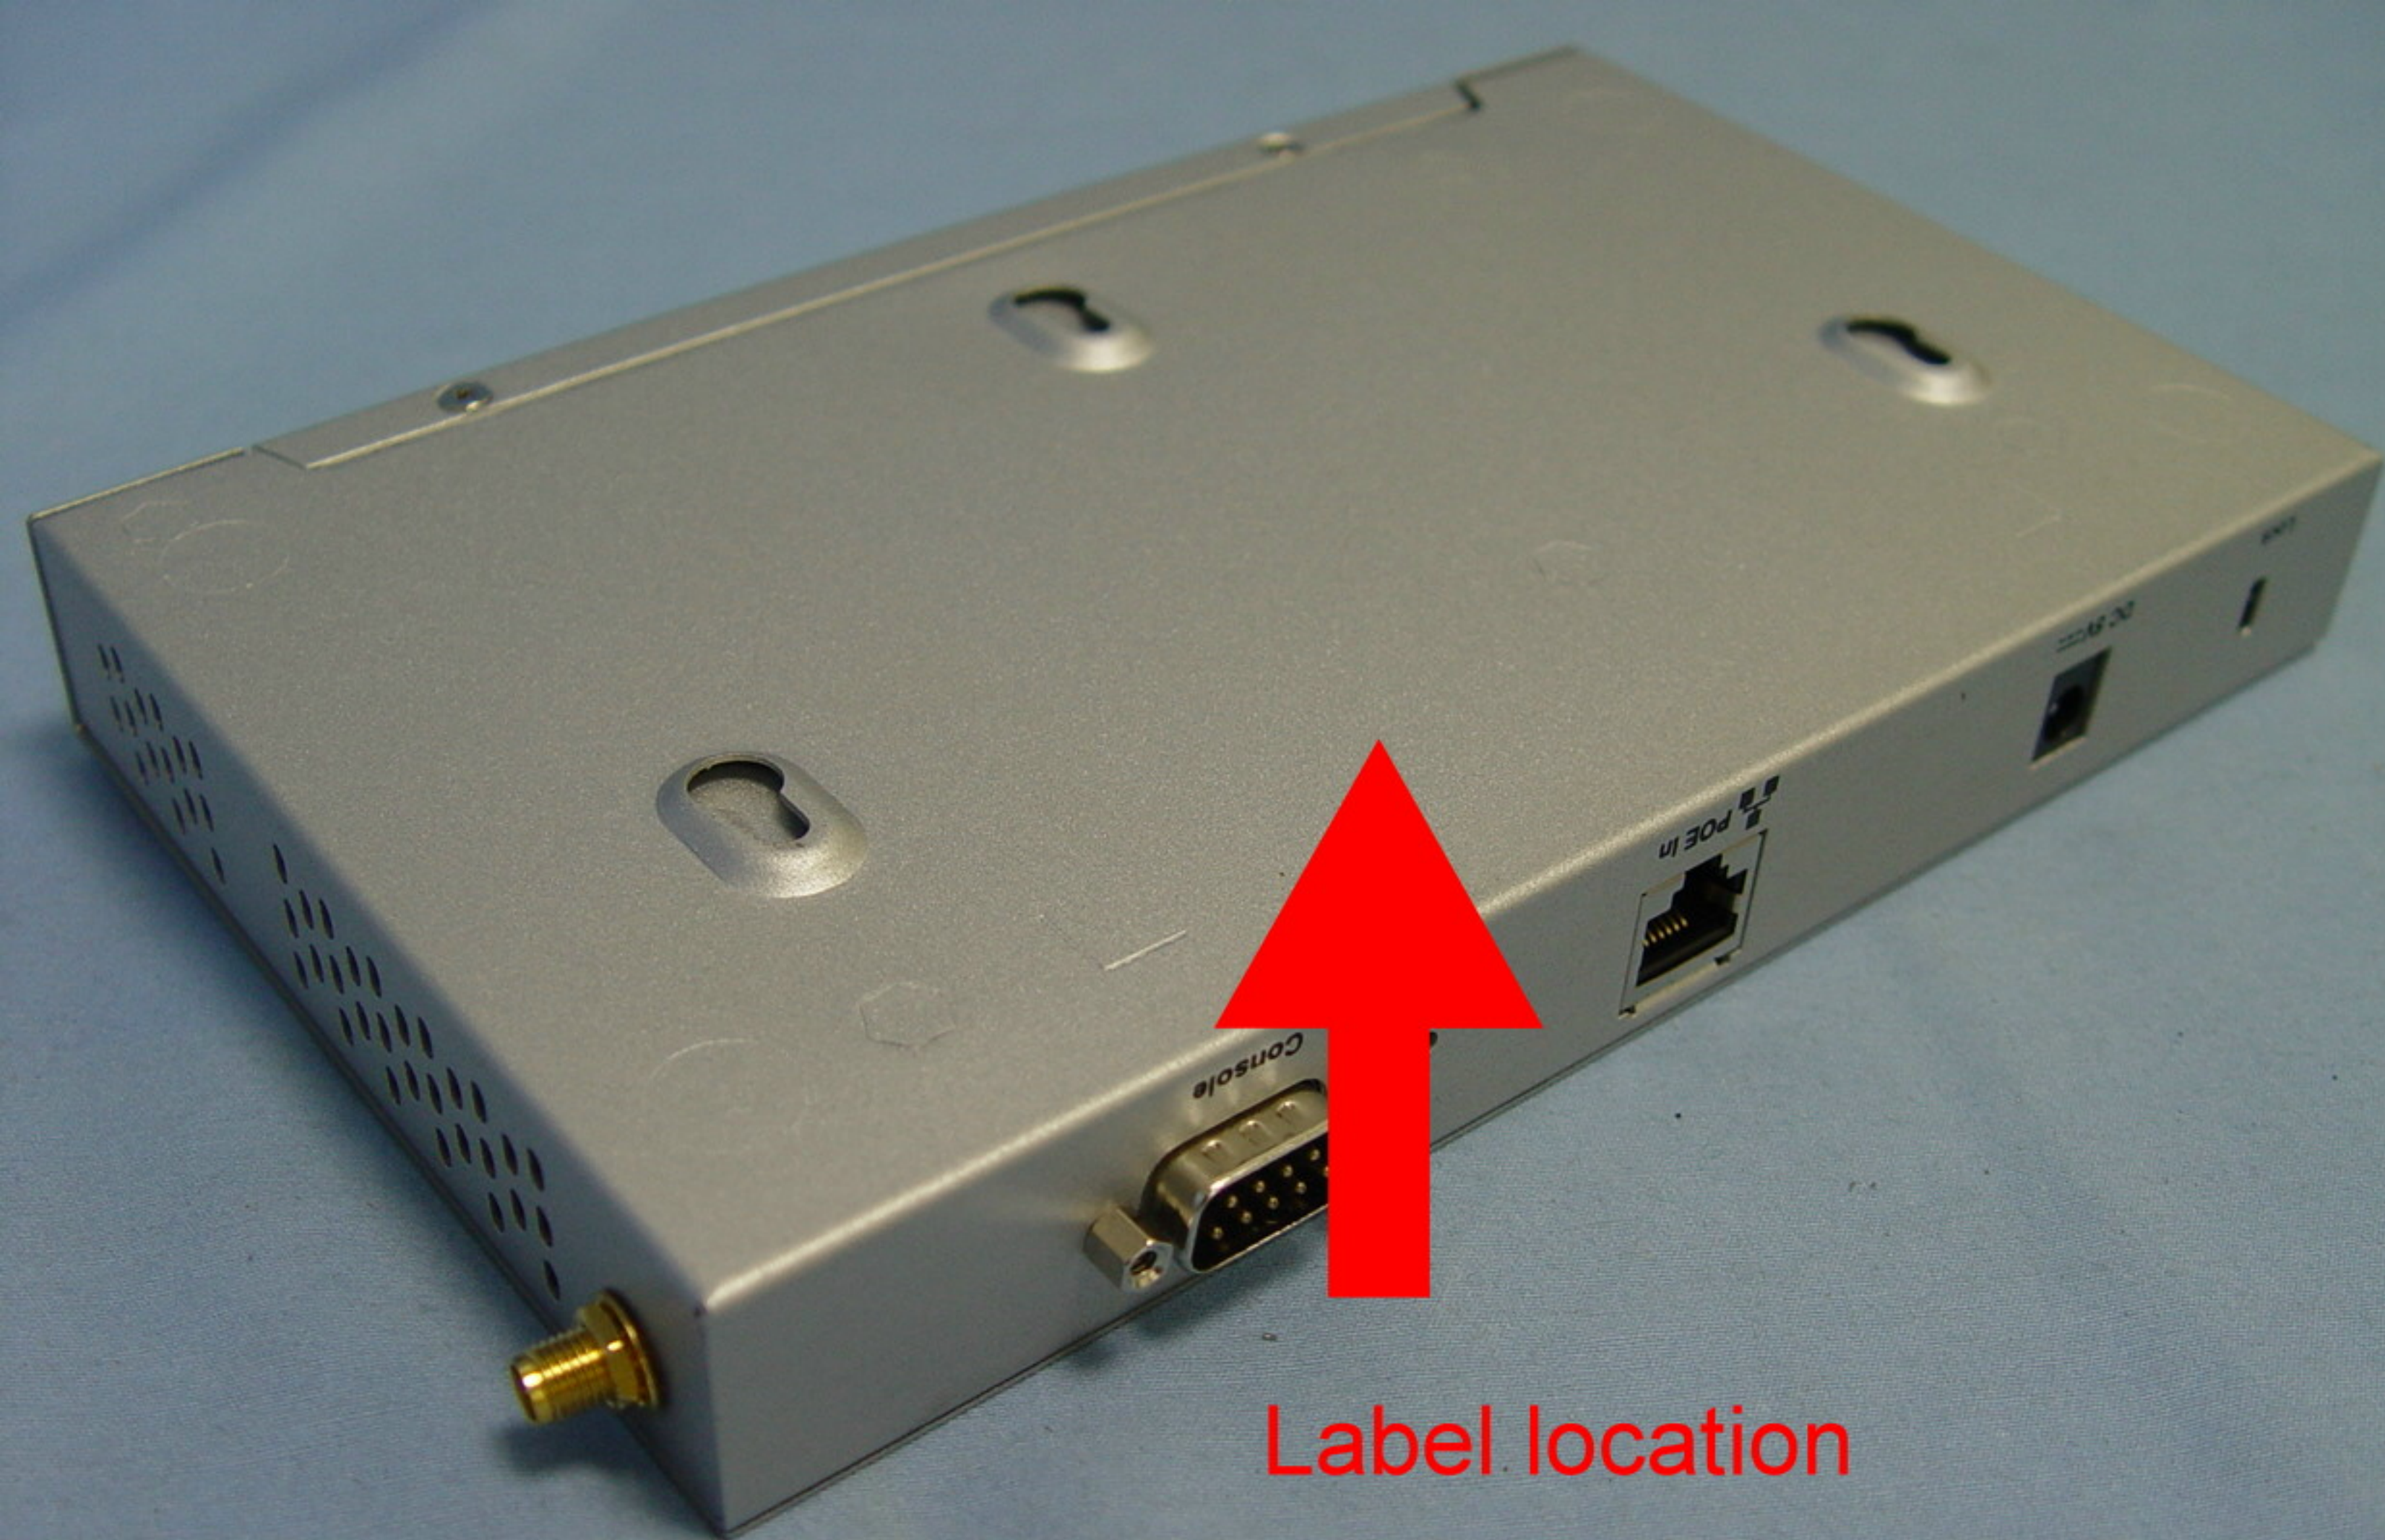

Label location