

Date: 2024-11-08

01_LTE Band 71_20M_QPSK_50RB_0Offset_Left Cheek_0mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.387 W/kg; SAR (10g) = 0.241 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.388 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

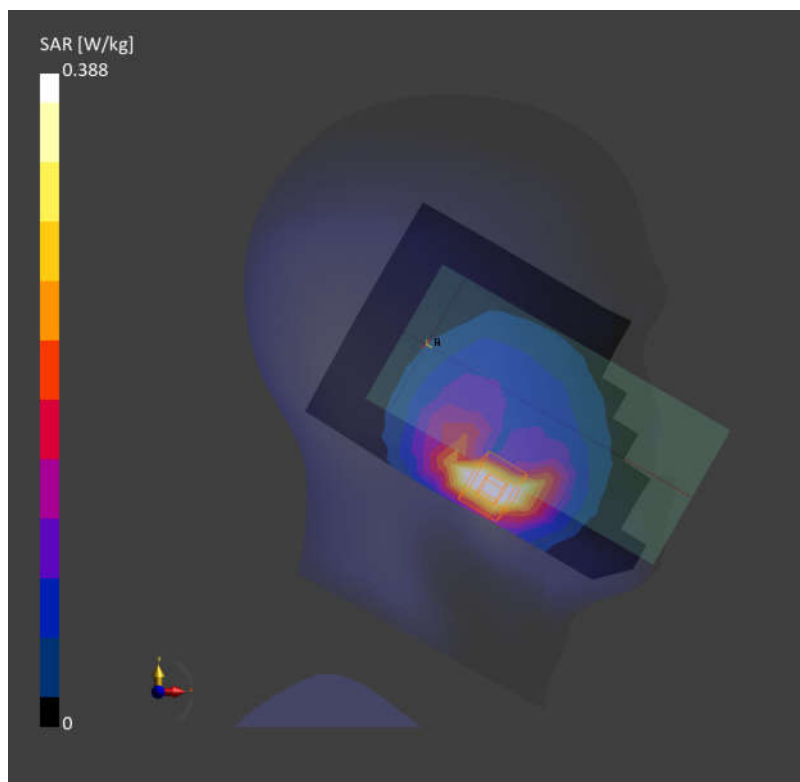

Date: 2024-11-08

02_LTE Band 12_10M_QPSK_25RB_0Offset_Left Cheek_0mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.700 W/kg; SAR (10g) = 0.439 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 84.7 %

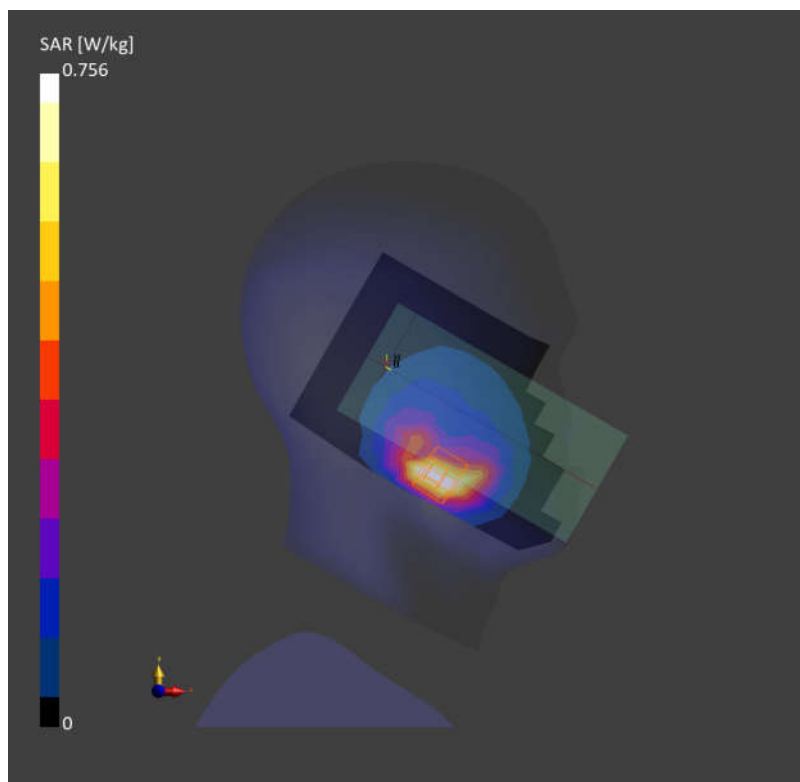

Date: 2024-11-08

03_LTE Band 13_10M_QPSK_25RB_0Offset_Left Cheek_0mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.715 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.716 W/kg; SAR (10g) = 0.399 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 82.0 %

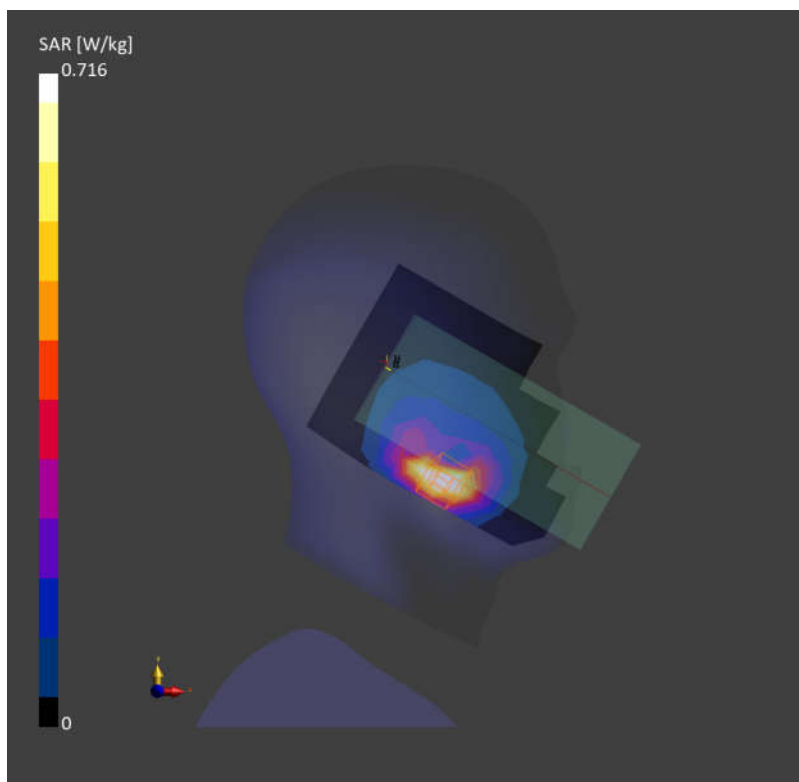

Date: 2024-11-08

04_FR1 n71_35M_QPSK_90RB_45Offset_Left Cheek_0mm_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.8$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.761 W/kg; SAR (10g) = 0.475 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.765 W/kg; SAR (10g) = 0.438 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 87.0 %

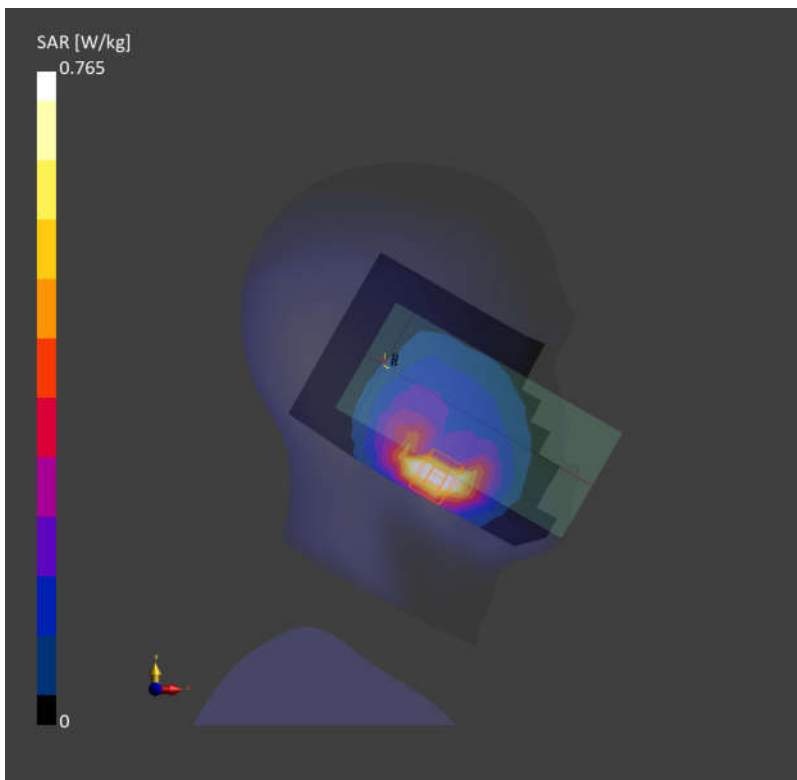

Date: 2024-11-08

05_FR1 n12_15M_QPSK_36RB_22Offset_Left Cheek_0mm_Ch141500


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.797 W/kg; SAR (10g) = 0.477 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.806 W/kg; SAR (10g) = 0.444 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 81.2 %

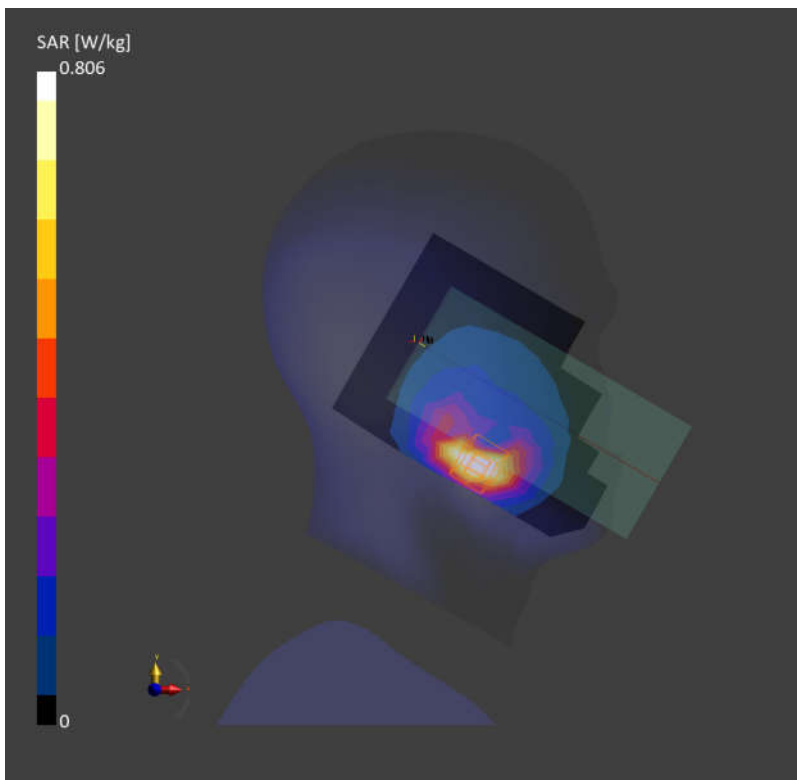

Date: 2024-11-09

06_GSM850_GPRS (4 Tx slots)_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.391 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

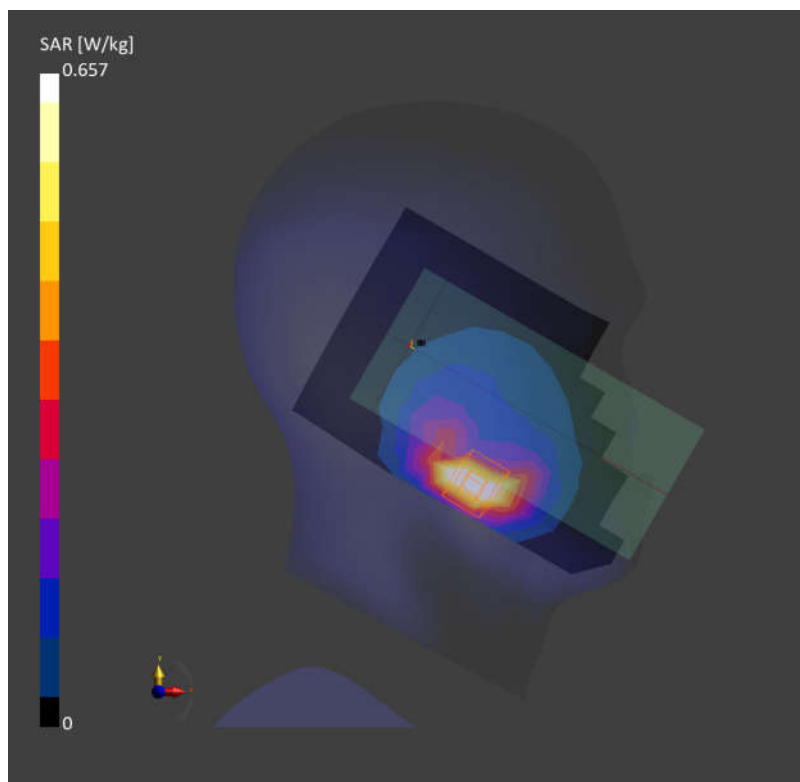

Date: 2024-11-09

07_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.668 W/kg; SAR (10g) = 0.405 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.672 W/kg; SAR (10g) = 0.377 W/kg
Smallest distance from peaks to all points 3 dB below = 7.8 mm
Ratio of SAR at M2 to SAR at M1 = 82.5 %

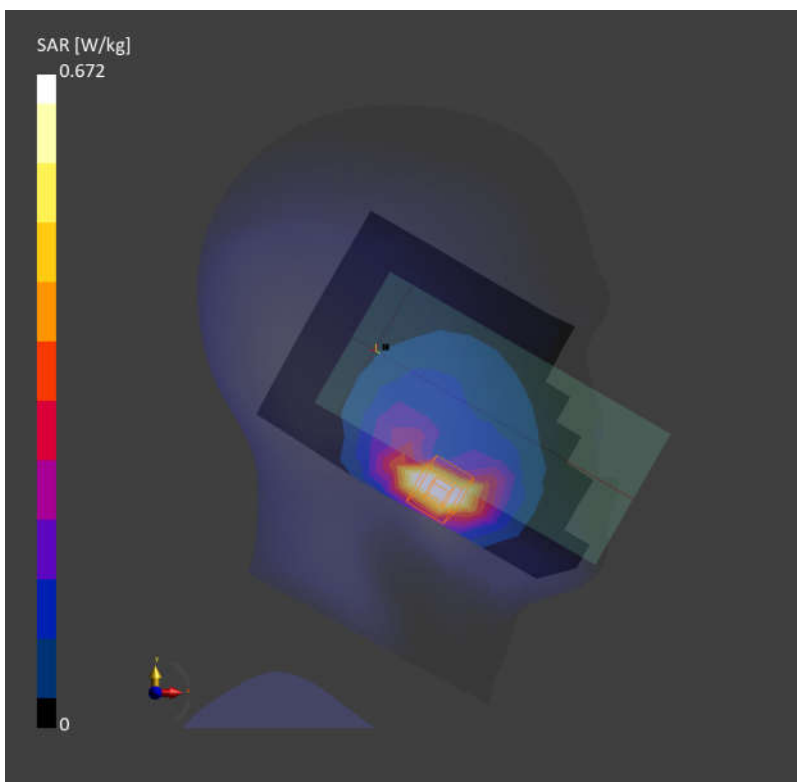

Date: 2024-11-09

08_LTE Band 5_10M_QPSK_25RB_0Offset_Left Cheek_0mm_Ch20525


Communication System: LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)
AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 42.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10156-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.693 W/kg; SAR (10g) = 0.445 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.862 W/kg; SAR (10g) = 0.486 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.0 %

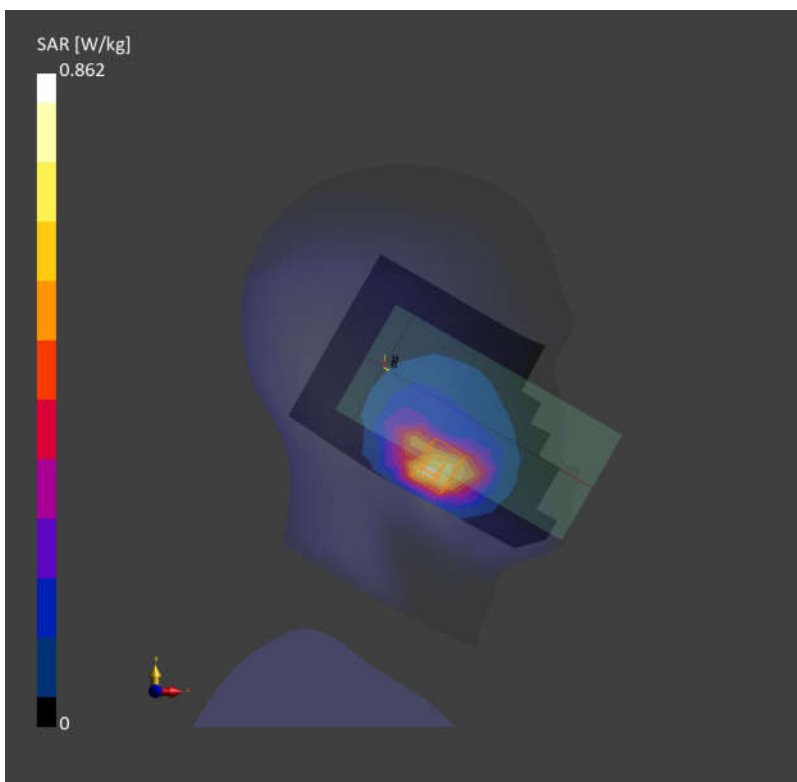

Date: 2024-11-09

09_LTE Band 26_15M_QPSK_36RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.675 W/kg; SAR (10g) = 0.436 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.841 W/kg; SAR (10g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

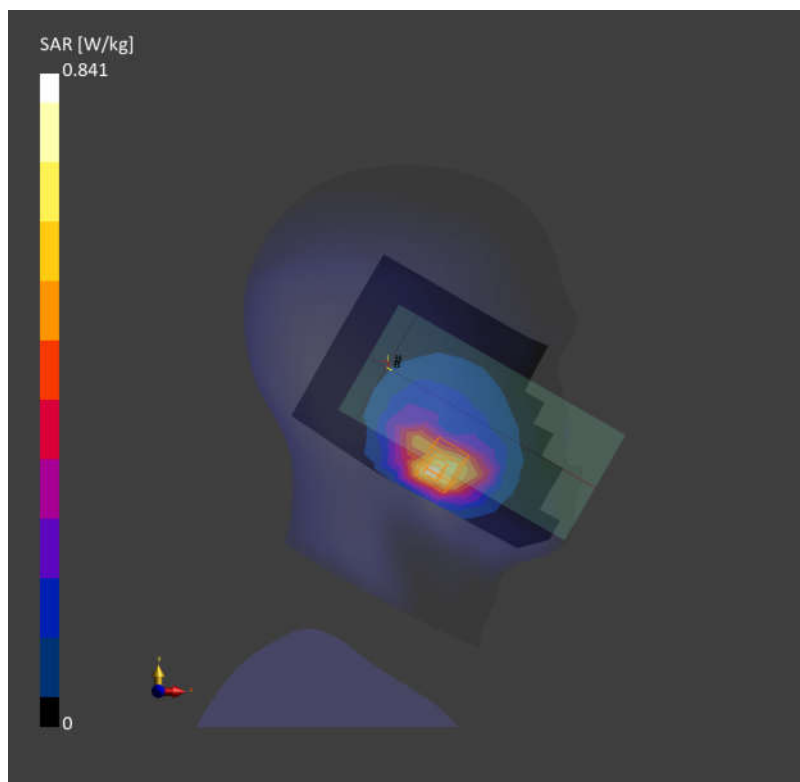

Date: 2024-11-09

10_FR1 n5_20M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.771 W/kg; SAR (10g) = 0.456 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.784 W/kg; SAR (10g) = 0.433 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 82.8 %

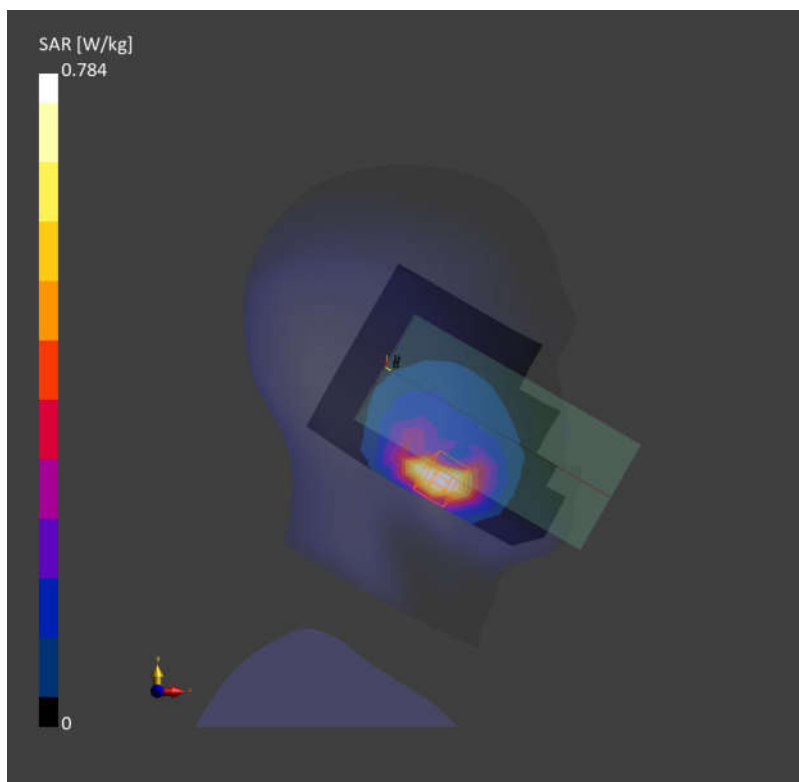

Date: 2024-11-09

11_FR1 n26_20M_QPSK_50RB_28Offset_Left Cheek_0mm_Ch166300


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.674 W/kg; SAR (10g) = 0.398 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.702 W/kg; SAR (10g) = 0.385 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.3 %

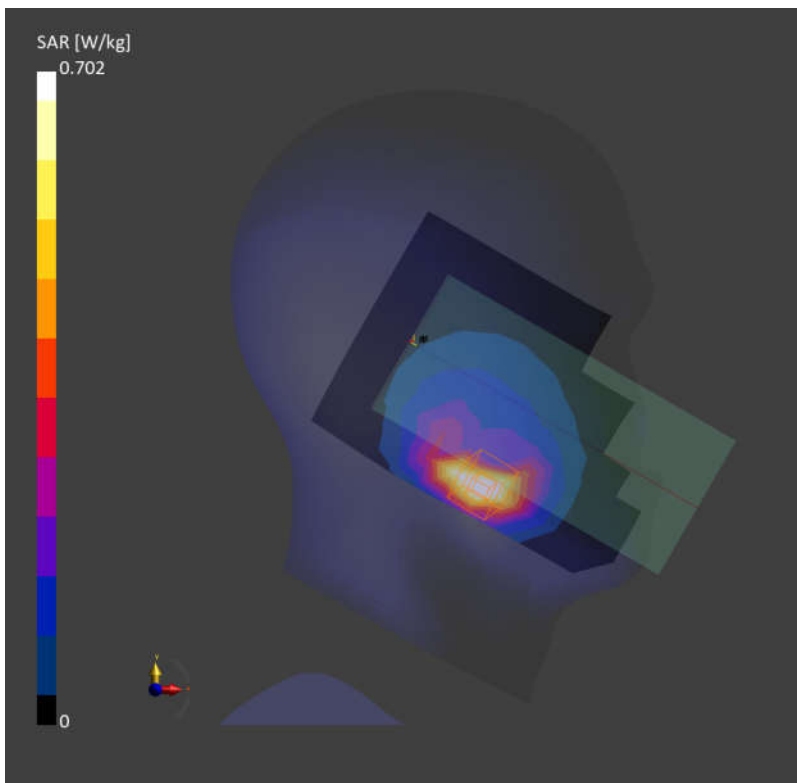

Date: 2024-11-10

12_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513


Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.683 W/kg; SAR (10g) = 0.364 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.729 W/kg; SAR (10g) = 0.363 W/kg
Smallest distance from peaks to all points 3 dB below = 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 78.9 %

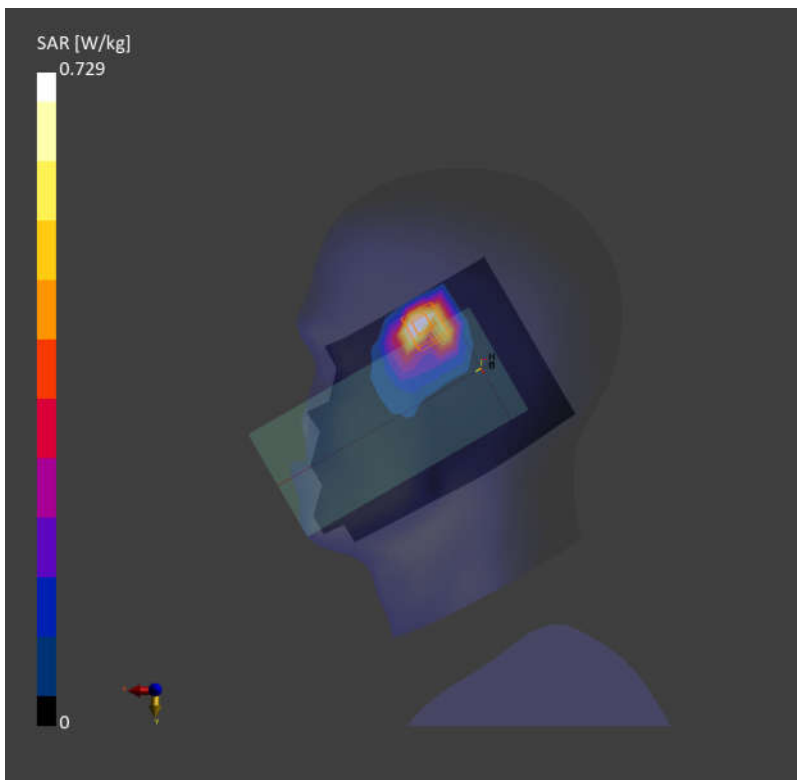

Date: 2024-11-10

13_LTE Band 4_20M_QPSK_100RB_0Offset_Right Cheek_0mm_Ch20175

Communication System: LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)

Frequency: 1732.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10100-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.368 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

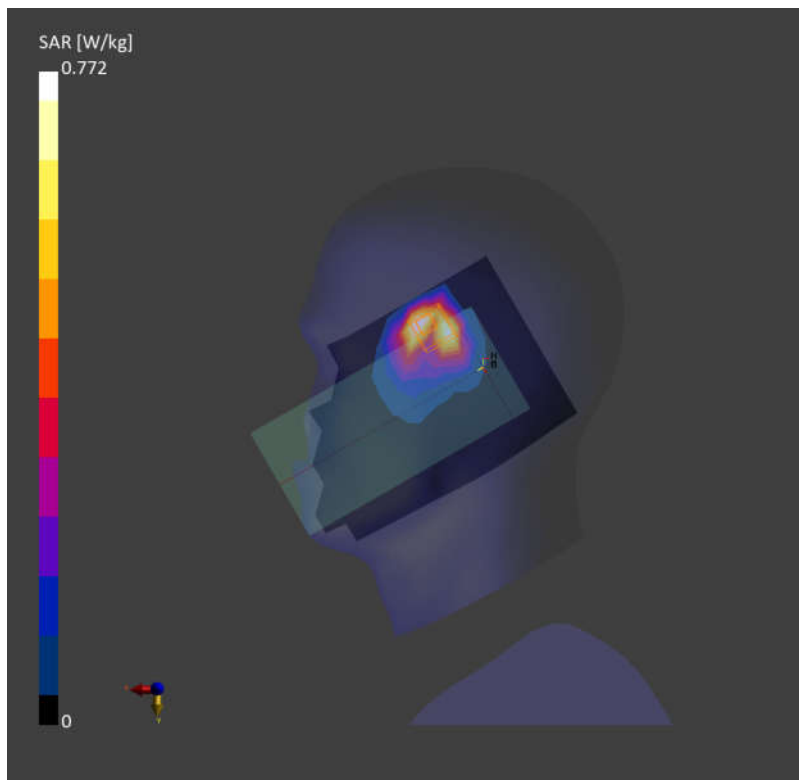

Date: 2024-11-10

14_LTE Band 66_20M_QPSK_50RB_0Offset_Right Tilted_0mm_Ch132572

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.841 W/kg; SAR (10g) = 0.455 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.944 W/kg; SAR (10g) = 0.478 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

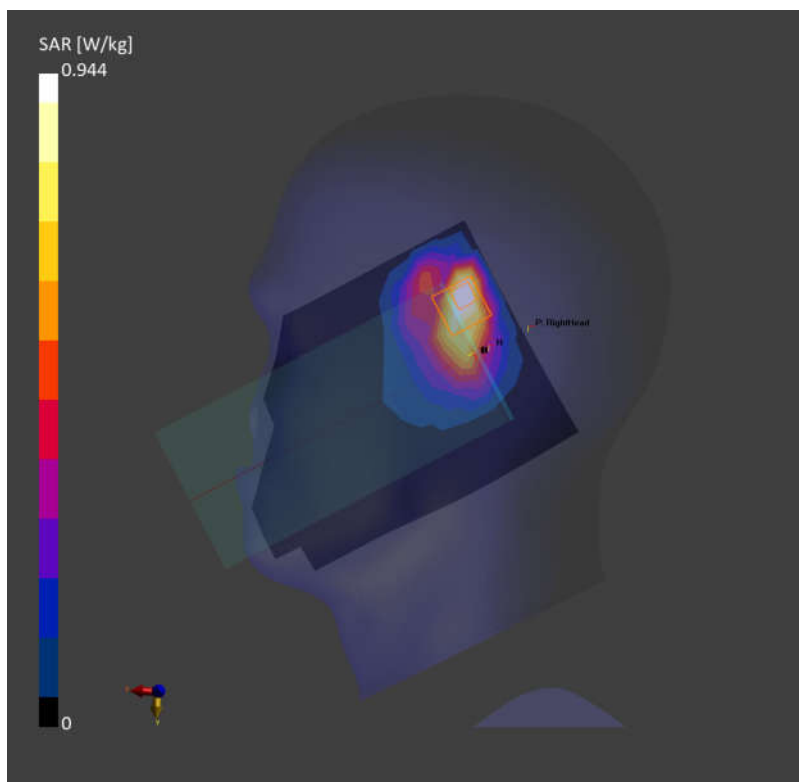

Date: 2024-11-10

15_FR1 n66_45M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.677 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.18 dB
SAR (1g) = 0.765 W/kg; SAR (10g) = 0.332 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 79.7 %

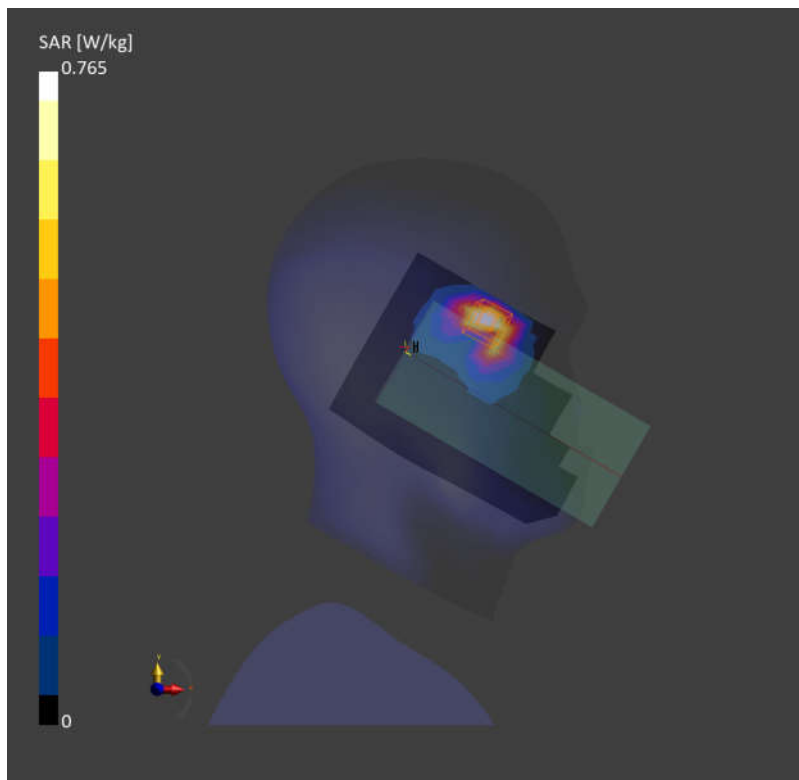

Date: 2024-11-11

16_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch512

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)

Frequency: 1850.200 MHz; Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.362 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.812 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

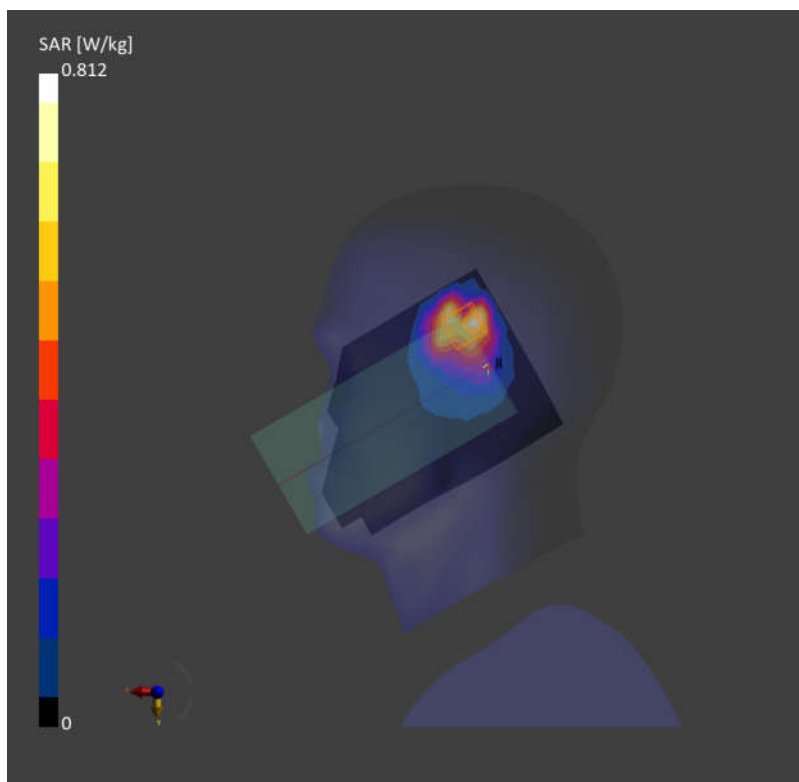

Date: 2024-11-11

17_WCDMA II_RMC 12.2Kbps_Left Cheek_0mm_Ch9262


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.785 W/kg; SAR (10g) = 0.399 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 0.788 W/kg; SAR (10g) = 0.379 W/kg
Smallest distance from peaks to all points 3 dB below = 7.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

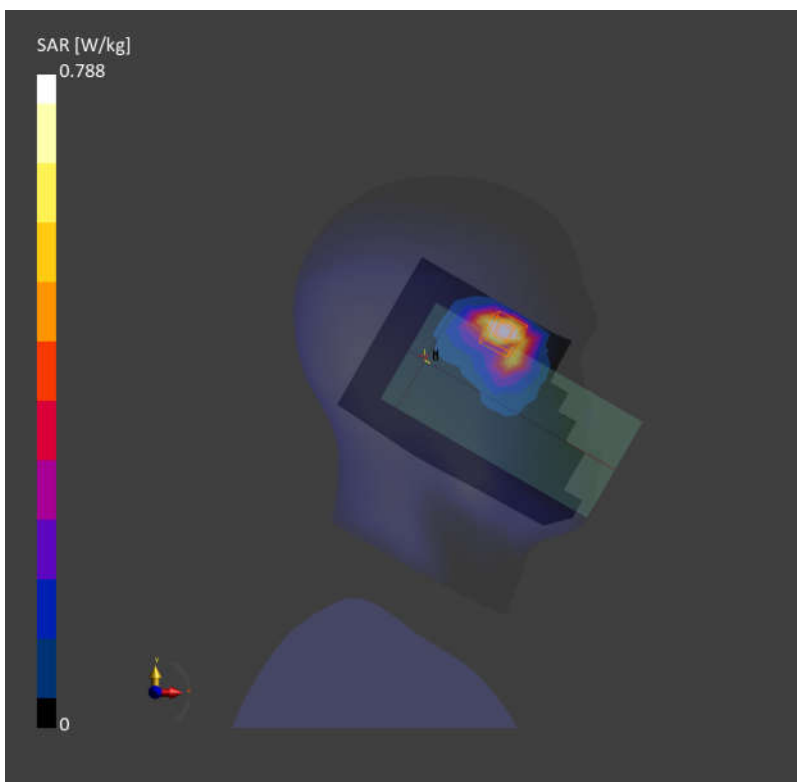

Date: 2024-11-11

18_LTE Band 2_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch19100

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.318 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

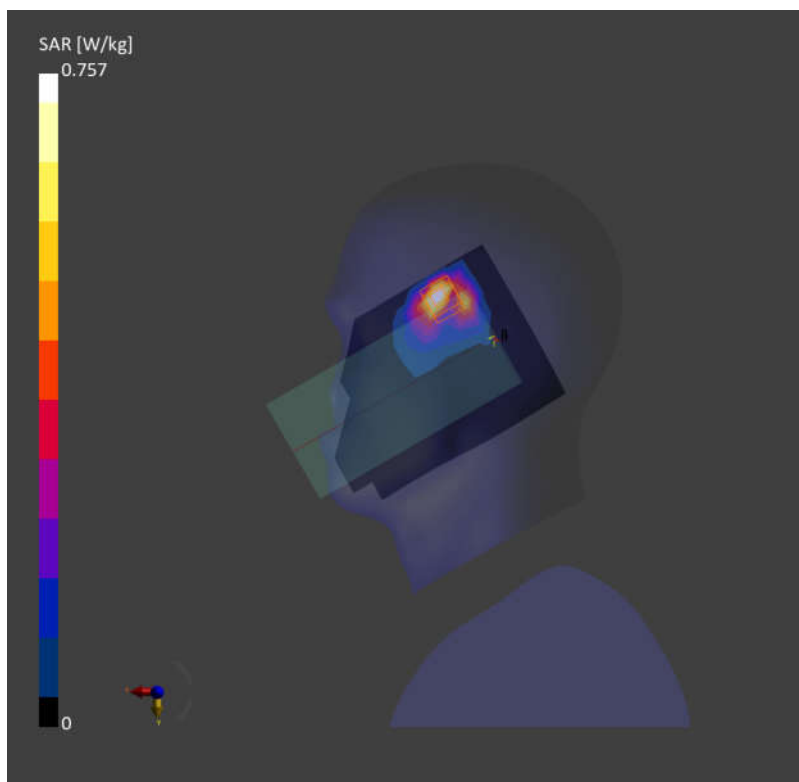

Date: 2024-11-11

19_LTE Band 25_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch26590

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1905.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.317 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.701 W/kg; SAR (10g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

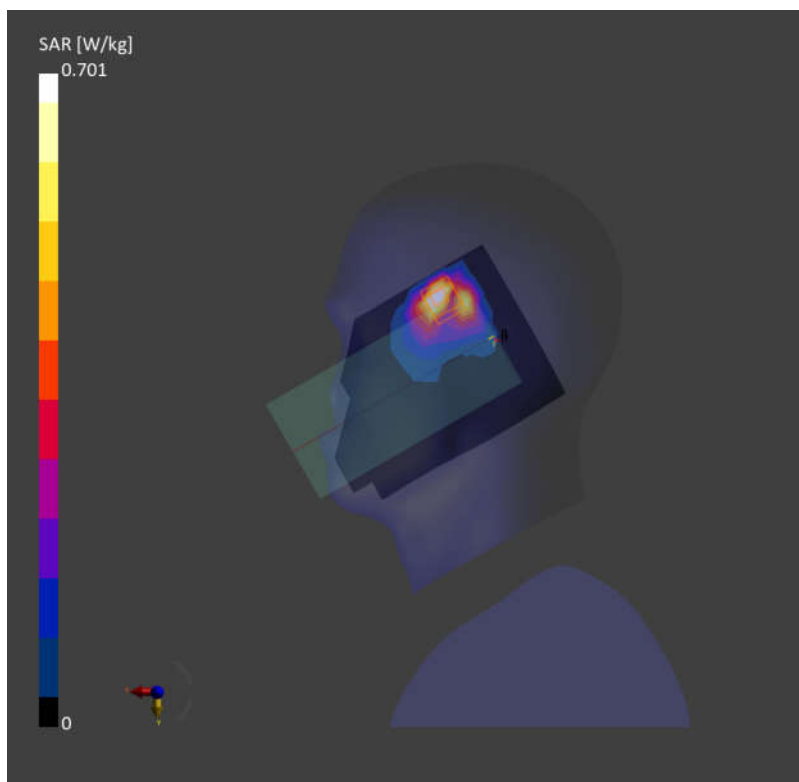

Date: 2024-11-11

20_FR1 n2_40M_QPSK_108RB_54Offset_Right Cheek_0mm_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.600 W/kg; SAR (10g) = 0.298 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.04 dB
 SAR (1g) = 0.771 W/kg; SAR (10g) = 0.320 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.2 mm
 Ratio of SAR at M2 to SAR at M1 = 77.8 %

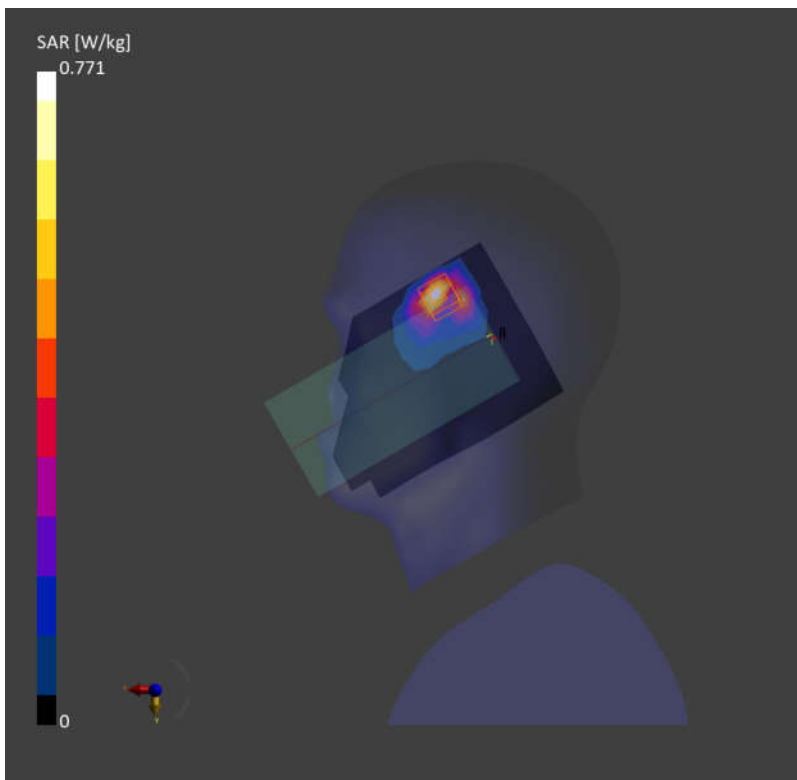

Date: 2024-11-11

21_FR1 n25_40M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch376500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.726 W/kg; SAR (10g) = 0.368 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.768 W/kg; SAR (10g) = 0.365 W/kg
Smallest distance from peaks to all points 3 dB below = 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.3 %

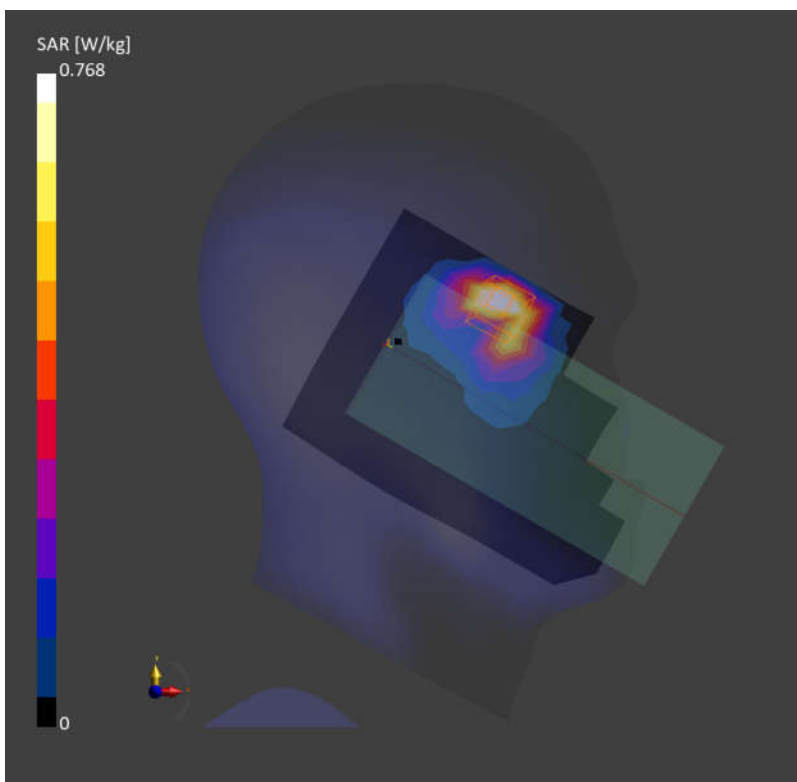

Date: 2024-11-13

22_LTE Band 7_20M_QPSK_50RB_0Offset_Left Cheek_0mm_Ch21350


Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.730 W/kg; SAR (10g) = 0.334 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.758 W/kg; SAR (10g) = 0.347 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.7 %

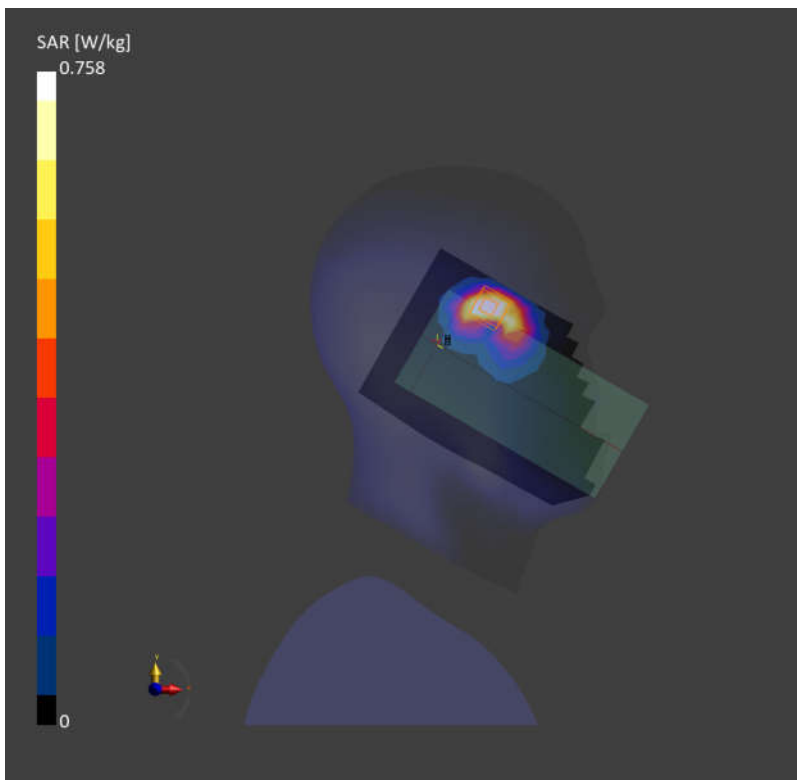

Date: 2024-11-13

23_LTE Band 38_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch38000


Communication System: LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 2595.000 MHz; Duty Cycle:1:1.59
Medium: HSL Medium parameters used: $f=2595.000$ MHz; $\sigma=1.93$ S/m; $\epsilon_r=39.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.707 W/kg; SAR (10g) = 0.301 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.736 W/kg; SAR (10g) = 0.305 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 74.3 %

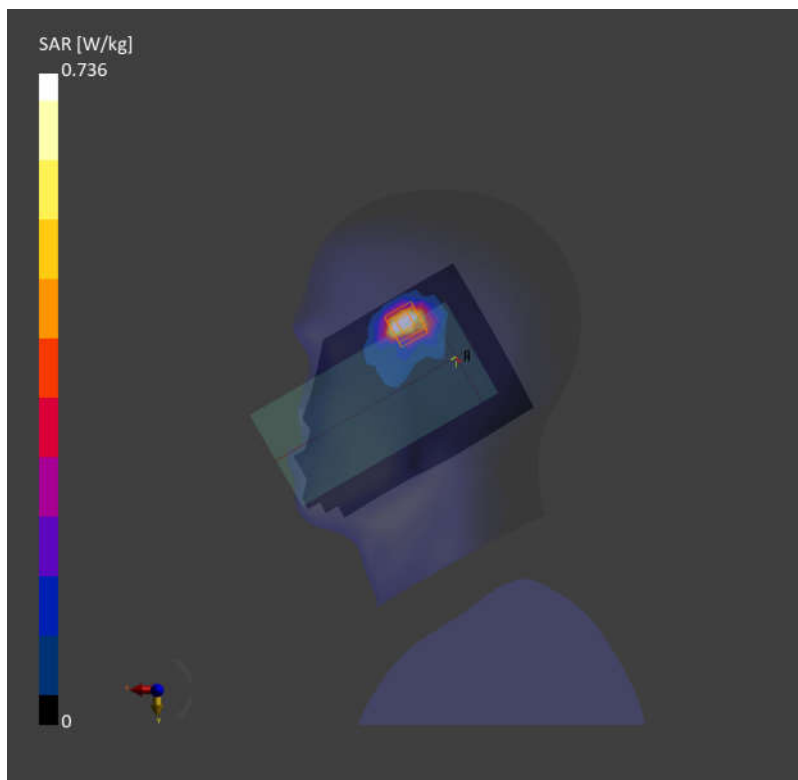

Date: 2024-11-13

24_LTE Band 41_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch40185


Communication System: LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 2549.500 MHz; Duty Cycle:1:1.59
Medium: HSL Medium parameters used: $f=2549.500$ MHz; $\sigma=1.92$ S/m; $\epsilon_r=39.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.688 W/kg; SAR (10g) = 0.295 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.710 W/kg; SAR (10g) = 0.296 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 79.7 %

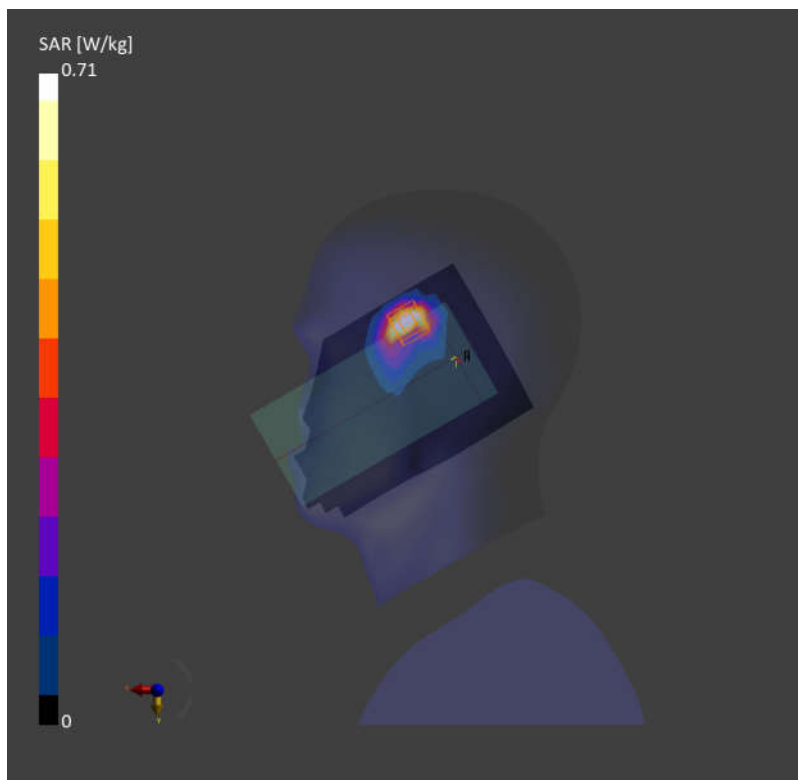

Date: 2024-11-13

25_FR1 n7_50M_QPSK_135RB_68Offset_Right Cheek_0mm_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.762 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.773 W/kg; SAR (10g) = 0.335 W/kg
Smallest distance from peaks to all points 3 dB below = 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 77.2 %

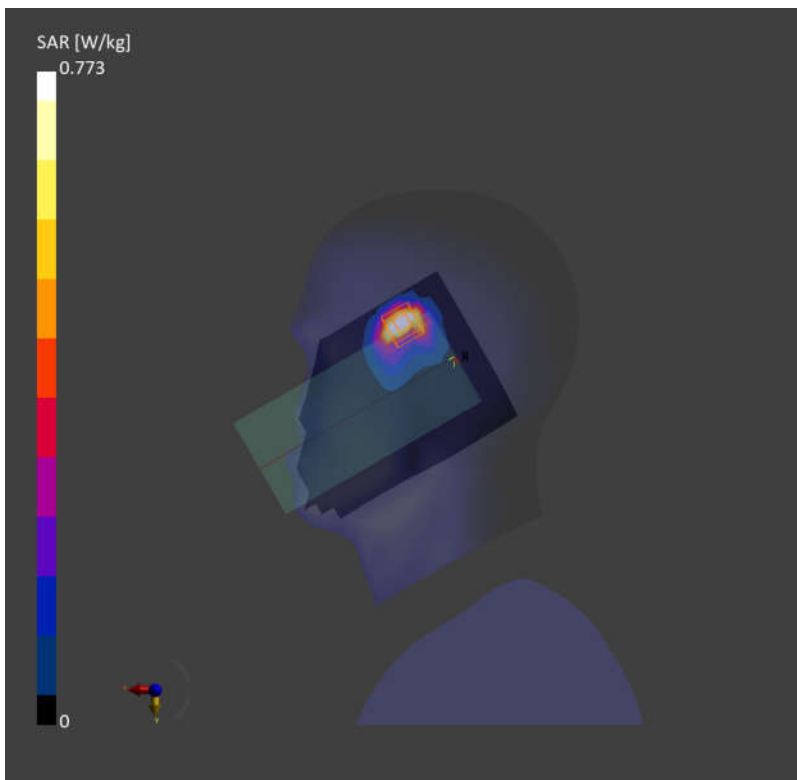

Date: 2024-11-13

26_FR1 n38_40M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch519000


Communication System: 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2595.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10773-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.713 W/kg; SAR (10g) = 0.312 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.755 W/kg; SAR (10g) = 0.318 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 76.2 %

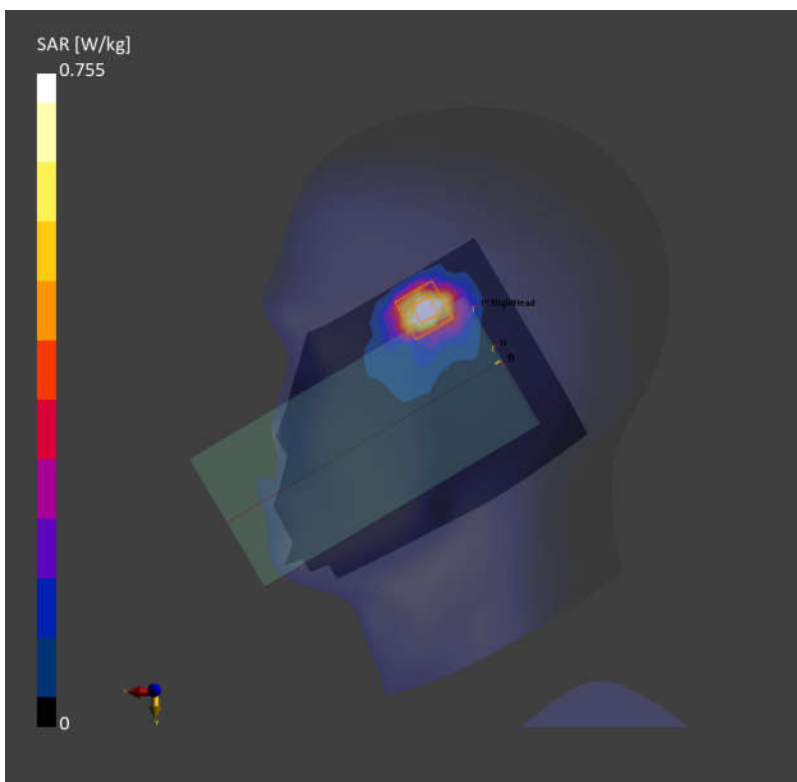

Date: 2024-11-13

27_FR1 n41_100M_QPSK_270RB_0Offset_Right Cheek_0mm_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.716 W/kg; SAR (10g) = 0.314 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.787 W/kg; SAR (10g) = 0.326 W/kg
Smallest distance from peaks to all points 3 dB below = 5.3 mm
Ratio of SAR at M2 to SAR at M1 = 78.4 %

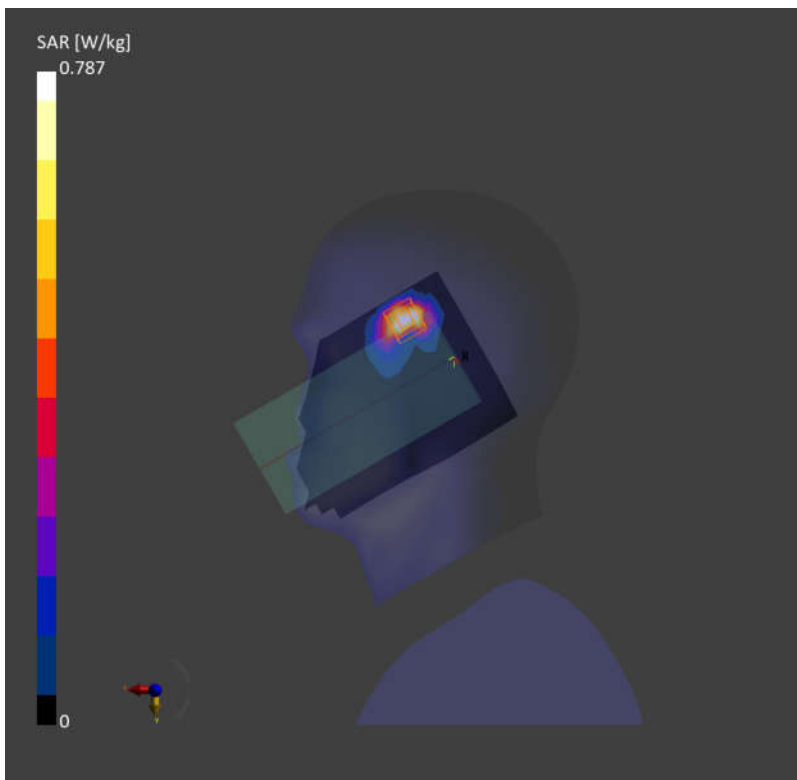

Date: 2024-11-14

28_LTE Band 42_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch42590


Communication System: LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle:1:1.59
Medium: HSL Medium parameters used: $f=3500.000$ MHz; $\sigma=2.81$ S/m; $\epsilon_r=39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.379 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.550 W/kg; SAR (10g) = 0.179 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 78.7 %

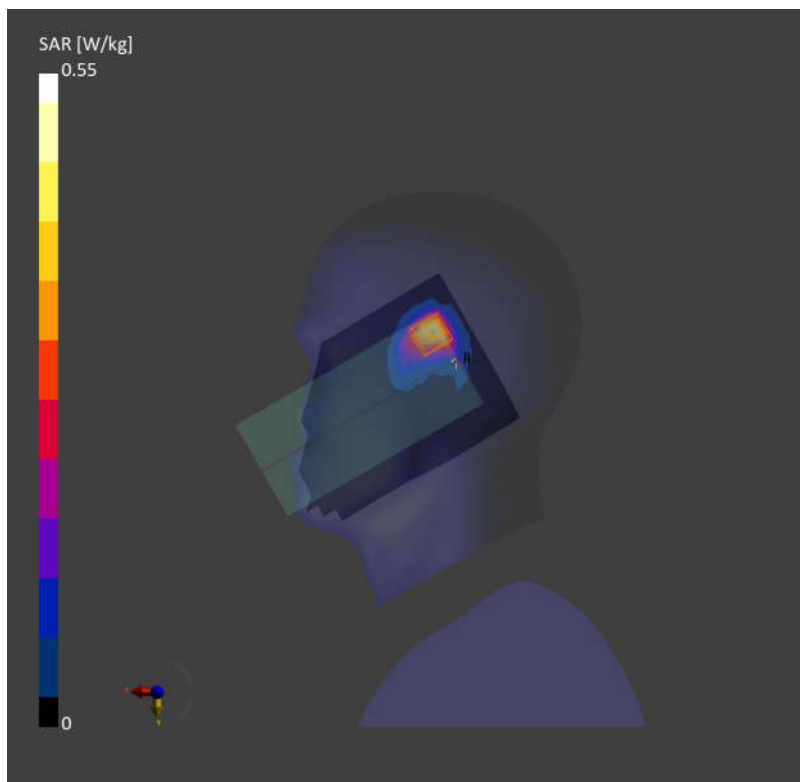

Date: 2024-11-15

29_LTE Band 48_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch56640

Communication System: LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
 AntennaCfg:SISO; Frequency: 3690.000 MHz; Duty Cycle:1:1.59
 Medium: HSL Medium parameters used: $f=3690.000$ MHz; $\sigma=2.98$ S/m; $\epsilon_r=38.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.621 W/kg; SAR (10g) = 0.247 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.667 W/kg; SAR (10g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

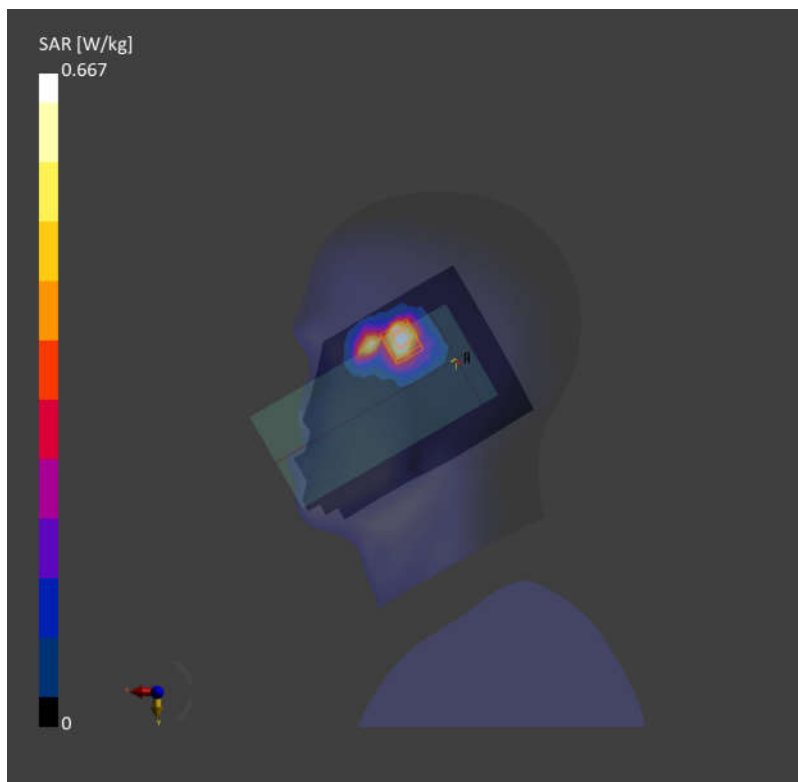

Date: 2024-11-15

30_FR1 n48_40M_QPSK_50RB_28Offset_Right Cheek_0mm_Ch641666


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 3624.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3624.990$ MHz; $\sigma = 2.98$ S/m; $\epsilon_r = 38.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.698 W/kg; SAR (10g) = 0.301 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.06 dB
SAR (1g) = 0.765 W/kg; SAR (10g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = 7.9 mm
Ratio of SAR at M2 to SAR at M1 = 77.2 %

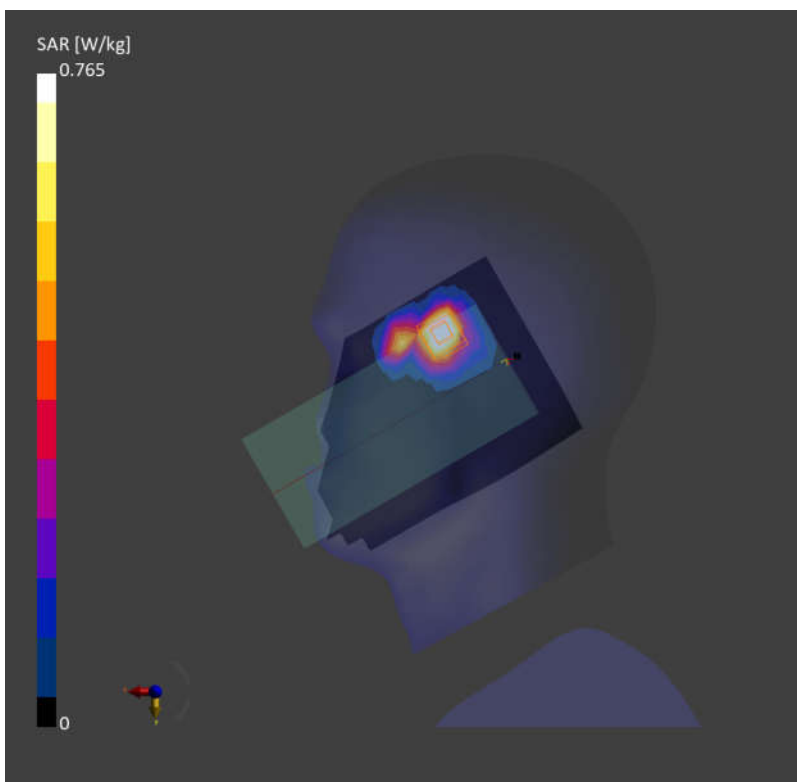

Date: 2024-11-14

31_FR1 n77 HPUE_100M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch633334


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3500.010 MHz; Duty Cycle: 1:2
Medium: HSL Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.678 W/kg; SAR (10g) = 0.293 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.04 dB
SAR (1g) = 0.903 W/kg; SAR (10g) = 0.302 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.5 %

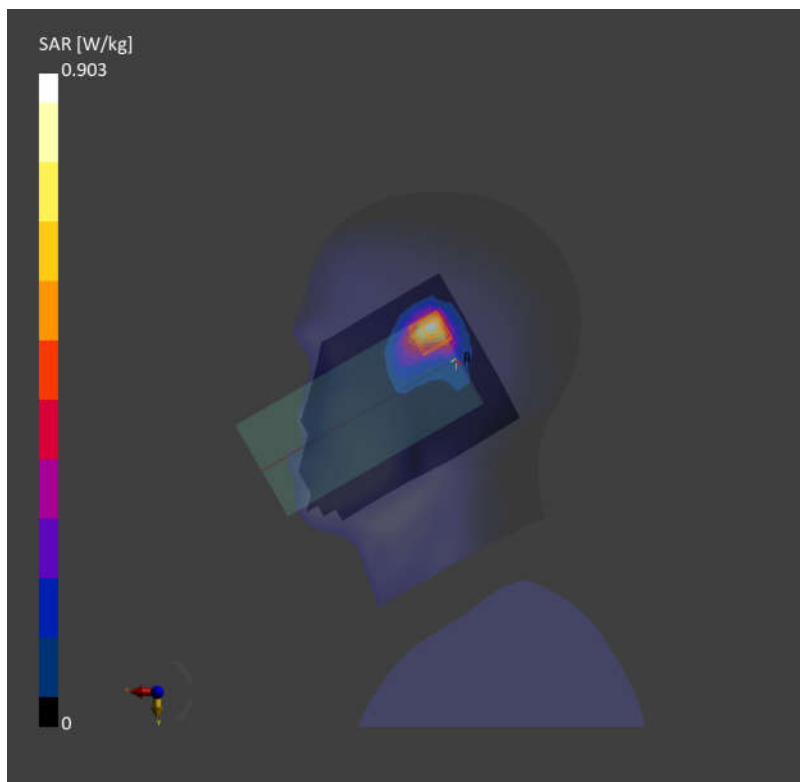

Date: 2024-11-14

32_FR1 n78 HPUE_100M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch633334


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3500.010 MHz; Duty Cycle: 1:2
Medium: HSL Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10973-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.701 W/kg; SAR (10g) = 0.308 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.04 dB
SAR (1g) = 0.753 W/kg; SAR (10g) = 0.329 W/kg
Smallest distance from peaks to all points 3 dB below = 8.3 mm
Ratio of SAR at M2 to SAR at M1 = 80.8 %

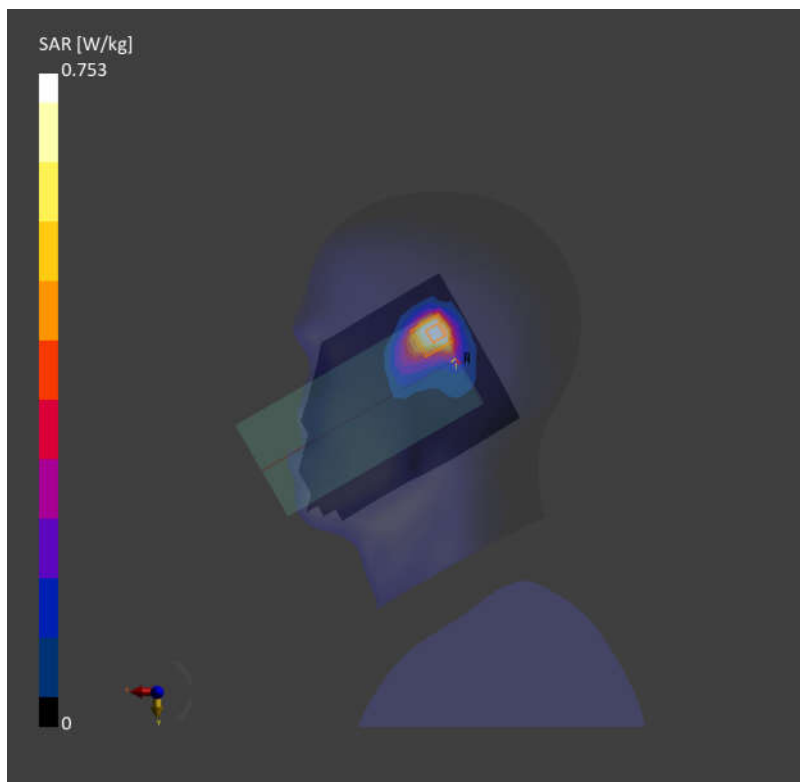

Date: 2024-11-12

33_WLAN2.4GHz_802.11b 1Mbps_Right Tilted_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2437.000 MHz; Duty Cycle: 1:1.031

Medium: HSL Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.350 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.890 W/kg; SAR (10g) = 0.378 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

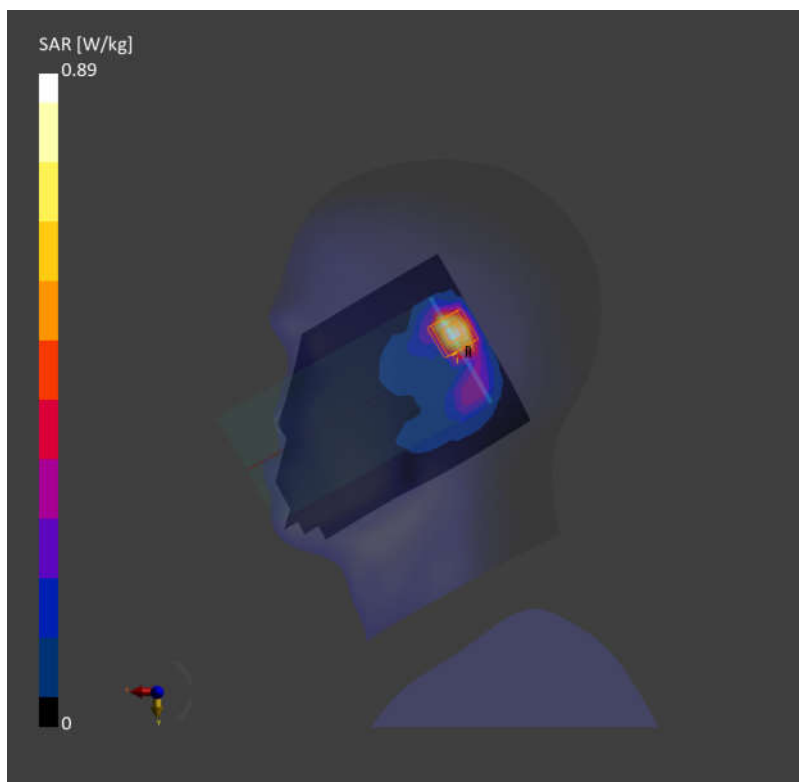

Date: 2024-11-12

34_Bluetooth_1Mbps_Right Tilted_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH3)

Frequency: 2441.000 MHz; DutyCycle: 1:1.3

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10031-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.579 W/kg; SAR (10g) = 0.280 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.586 W/kg; SAR (10g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

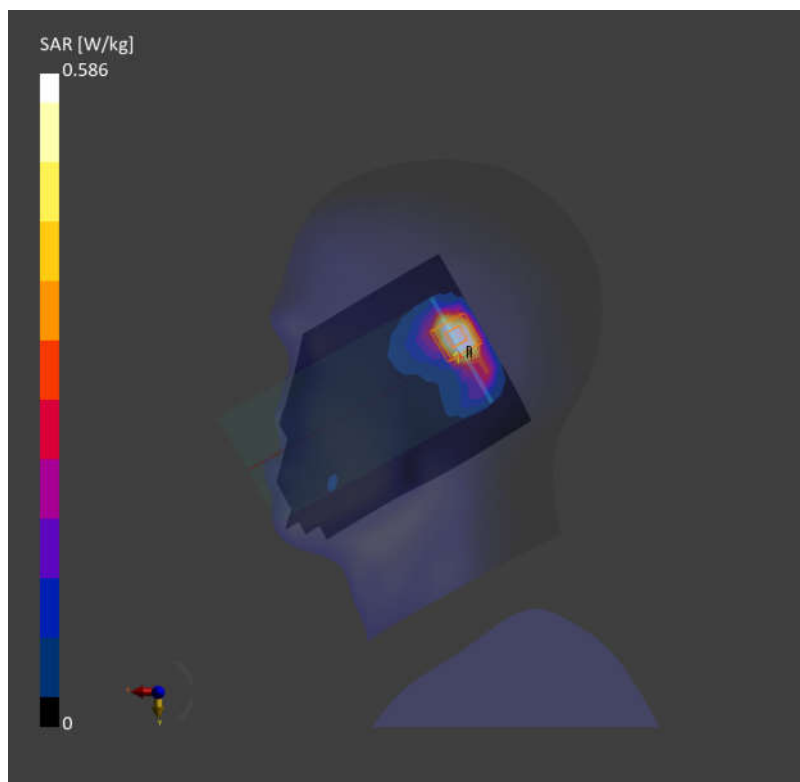

Date: 2024-11-17

35_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5290.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.340 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.901 W/kg; SAR (10g) = 0.357 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.5 %

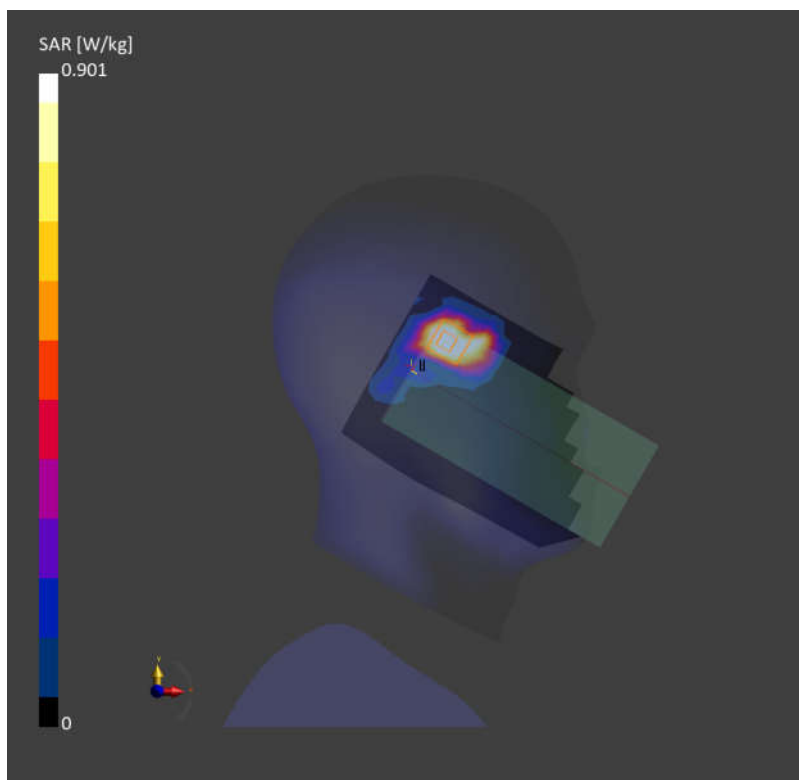

Date: 2024-11-18

36_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5530.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5530.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.267 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

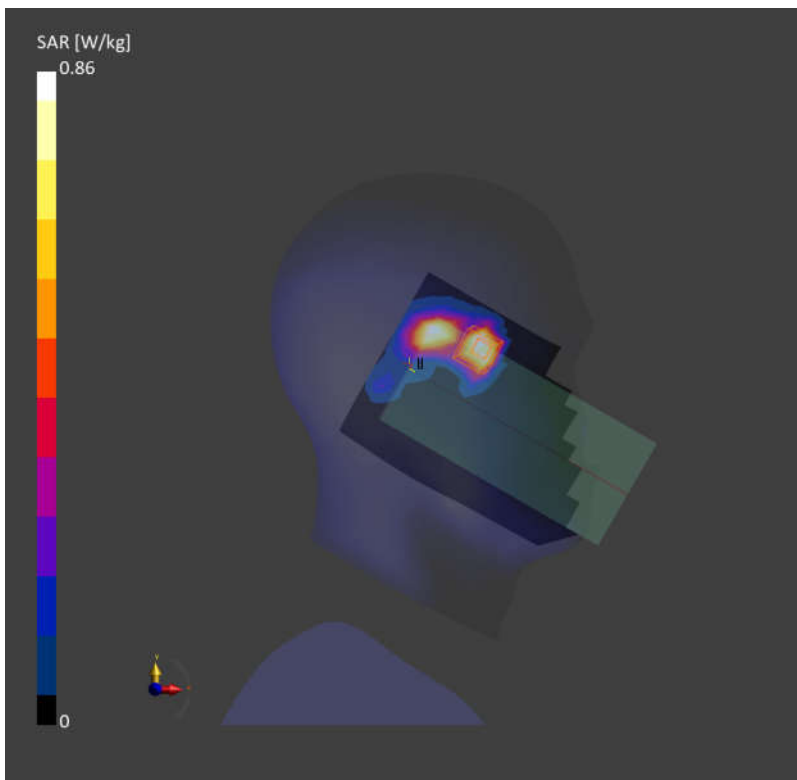

Date: 2024-11-19

37_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5775.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.821 W/kg; SAR (10g) = 0.370 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.931 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.8 %

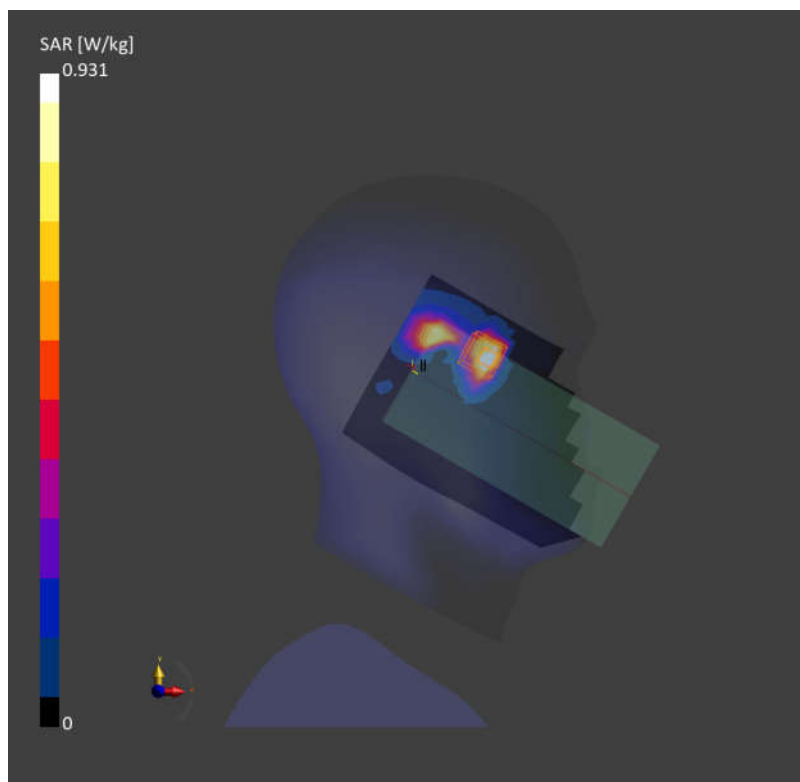

Date: 2024-11-19

38_LTE Band 71_20M_QPSK_1RB_0Offset_Right Side_10mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.447 W/kg; SAR (10g) = 0.311 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.455 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.9 %

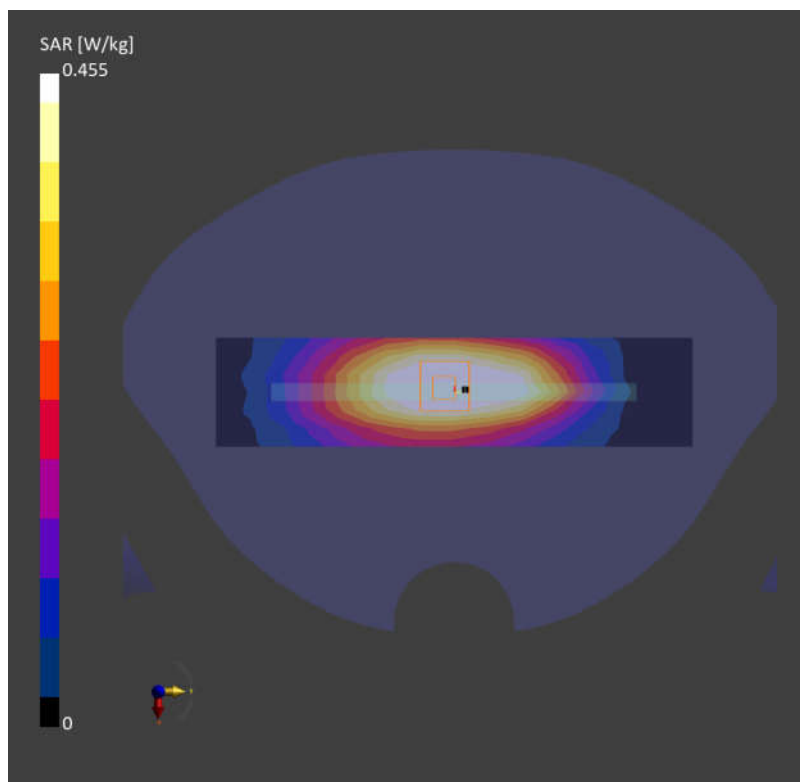

Date: 2024-11-19

39_LTE Band 12_10M_QPSK_25RB_0Offset_Left Side_10mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.641 W/kg; SAR (10g) = 0.394 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.655 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.3 %

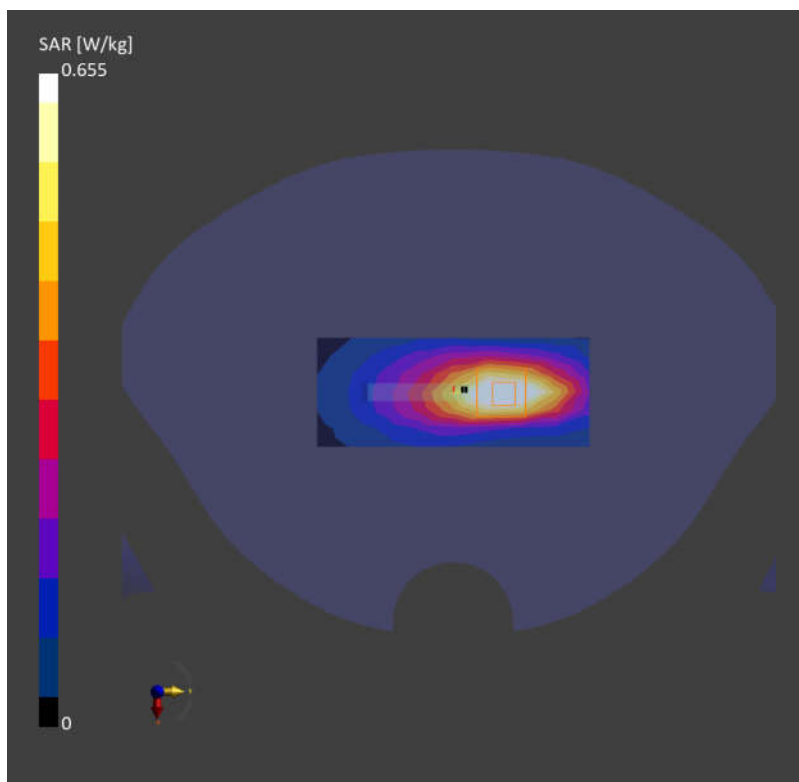

Date: 2024-11-19

40_LTE Band 13_10M_QPSK_25RB_0Offset_Left Side_10mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.596 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.4 %

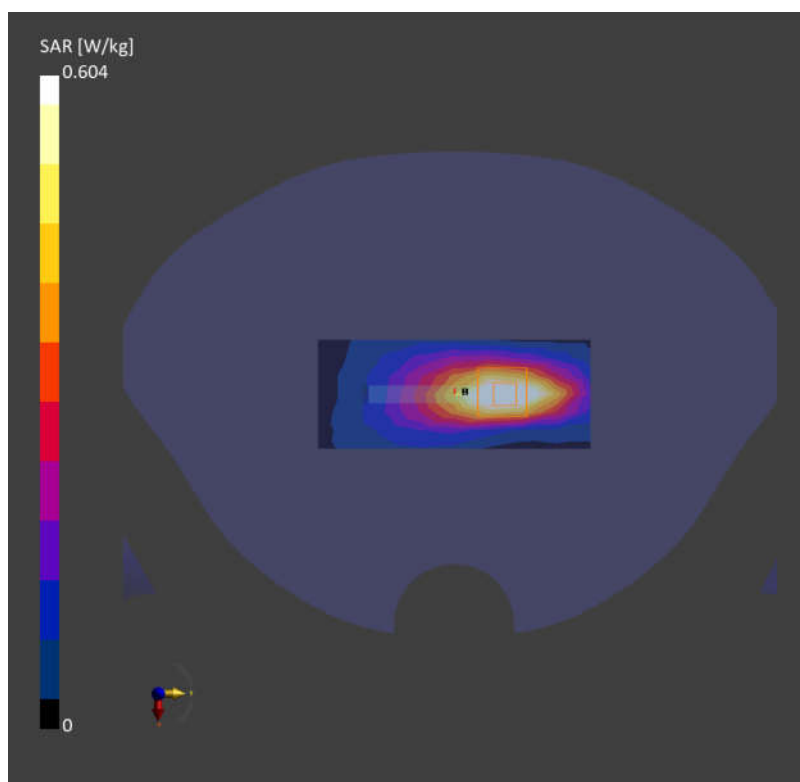

Date: 2024-11-19

41_FR1 n71_35M_QPSK_90RB_45Offset_Left Side_10mm_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.836$ S/m; $\epsilon_r = 43.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.698 W/kg; SAR (10g) = 0.443 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.720 W/kg; SAR (10g) = 0.443 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 87.2 %

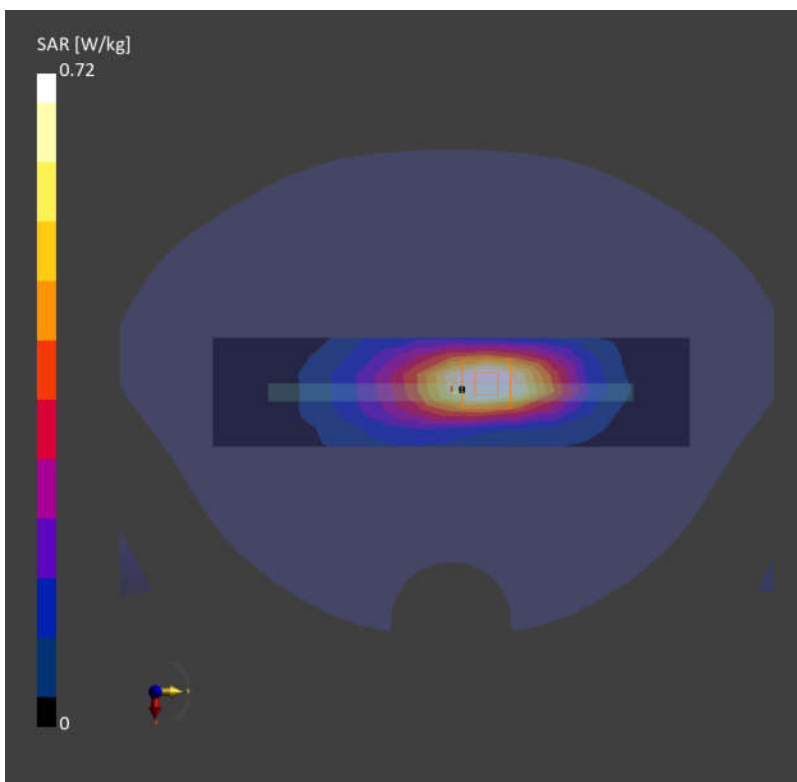

Date: 2024-11-19

42_FR1 n12_15M_QPSK_36RB_22Offset_Left Side_10mm_Ch141500


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 43.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.882 W/kg; SAR (10g) = 0.521 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.16 dB
SAR (1g) = 0.849 W/kg; SAR (10g) = 0.501 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 83.9 %

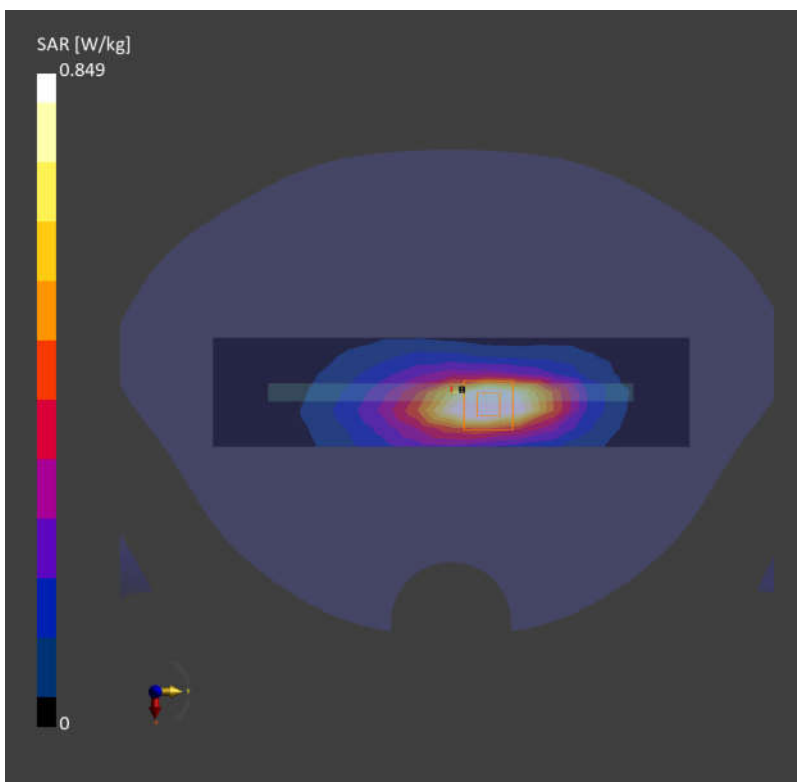

Date: 2024-11-20

43_GSM850_GPRS (4 Tx slots)_Left Side_10mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.403 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.678 W/kg; SAR (10g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.4 %

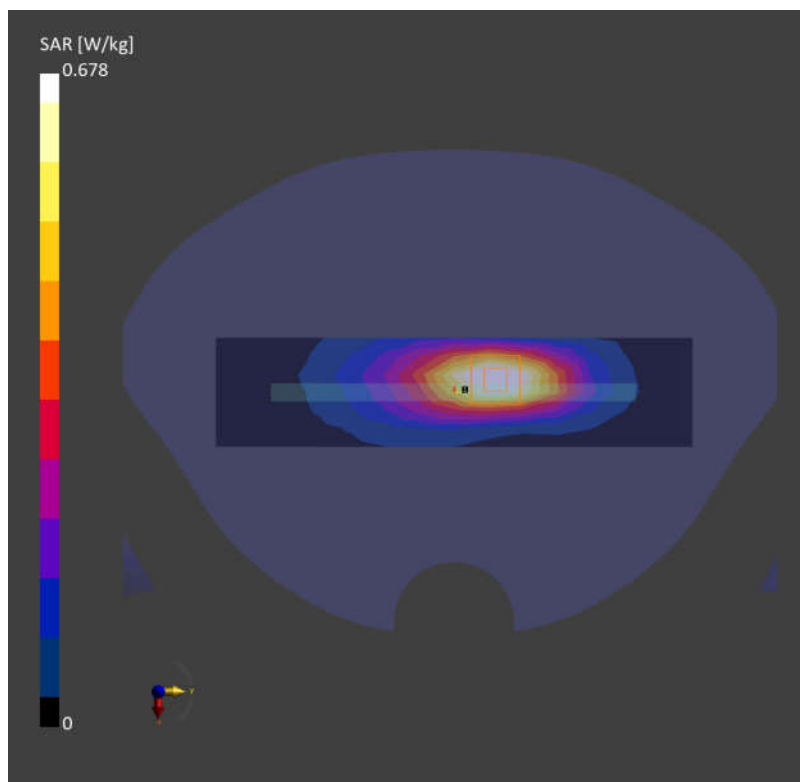

Date: 2024-11-20

44_WCDMA V_RMC 12.2Kbps_Left Side_10mm_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.752 W/kg; SAR (10g) = 0.445 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.756 W/kg; SAR (10g) = 0.442 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 85.3 %

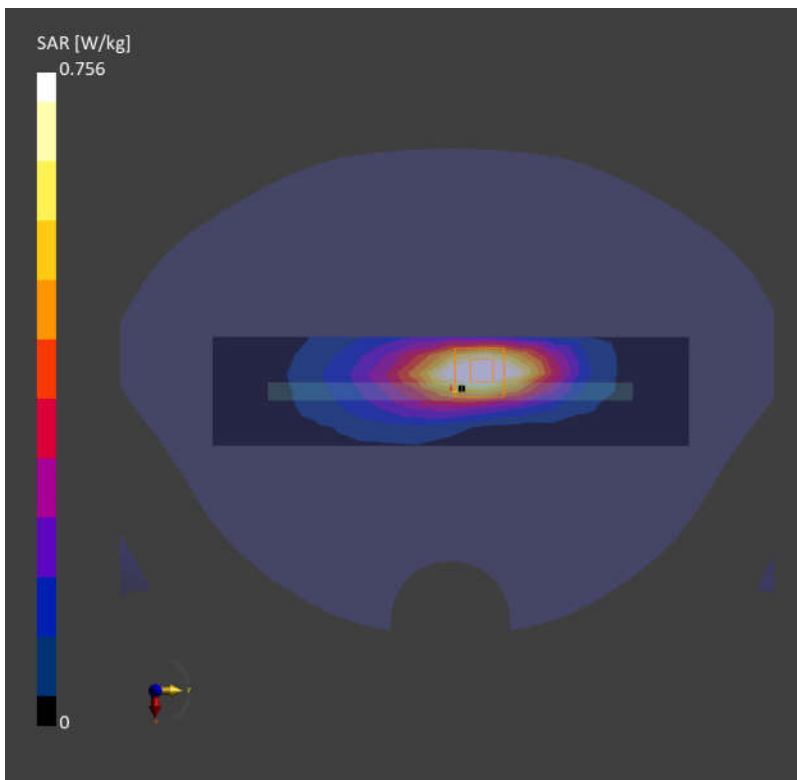

Date: 2024-11-20

45_LTE Band 5_10M_QPSK_1RB_0Offset_Left Side_10mm_Ch20525

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.389 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 86.9 %

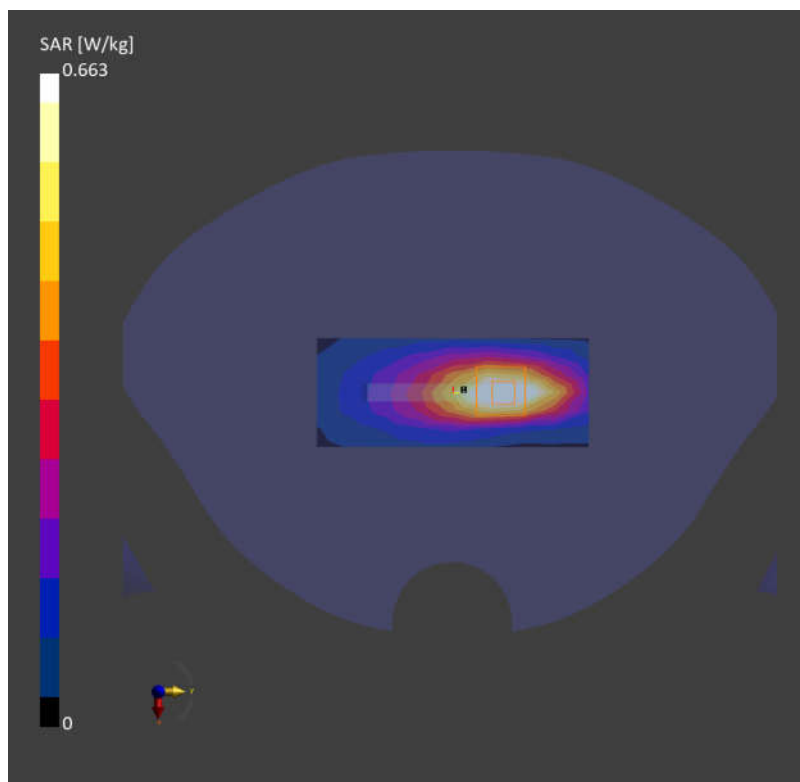

Date: 2024-11-20

46_LTE Band 26_15M_QPSK_1RB_0Offset_Left Side_10mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.395 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

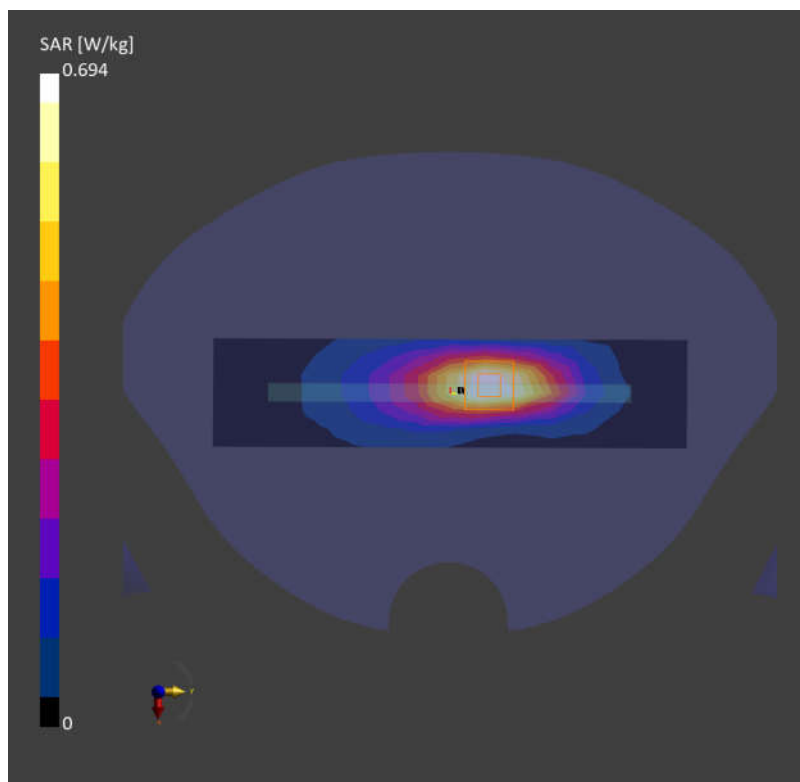

Date: 2024-11-20

47_FR1 n5_20M_QPSK_1RB_1Offset_Left Side_10mm_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.720 W/kg; SAR (10g) = 0.436 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.777 W/kg; SAR (10g) = 0.448 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 85.1 %

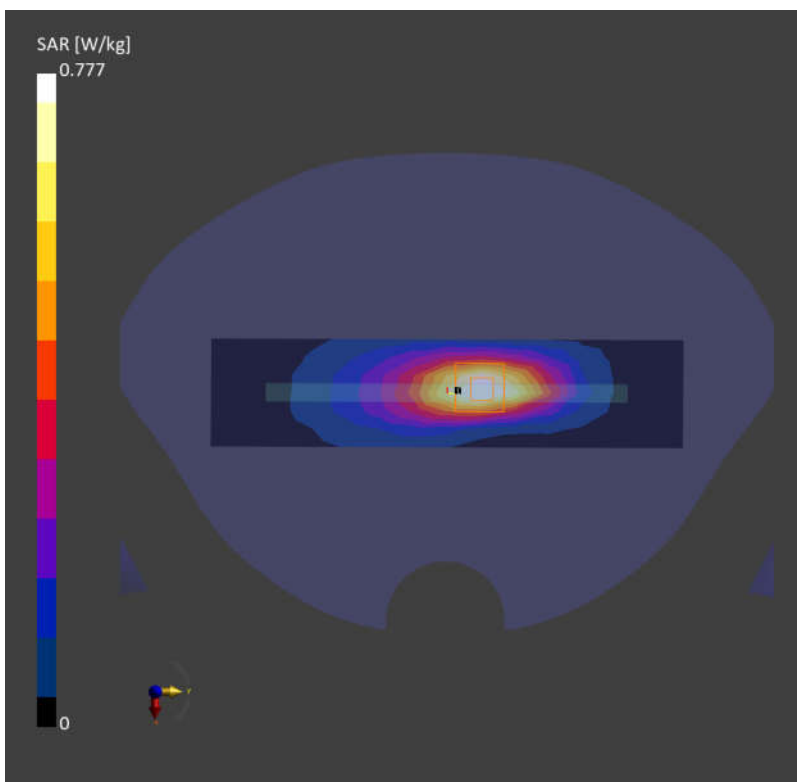

Date: 2024-11-20

48_FR1 n26_20M_QPSK_50RB_28Offset_Left Side_10mm_Ch166300


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.585 W/kg; SAR (10g) = 0.358 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.639 W/kg; SAR (10g) = 0.367 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 85.2 %

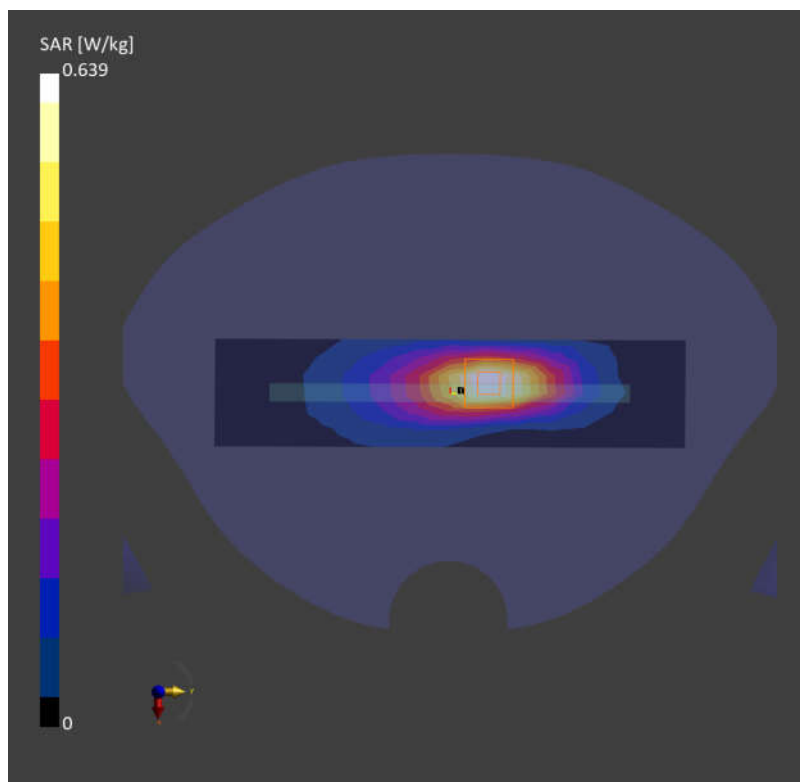

Date: 2024-11-21

49_WCDMA IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1513


Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.640 W/kg; SAR (10g) = 0.348 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.701 W/kg; SAR (10g) = 0.376 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 84.4 %

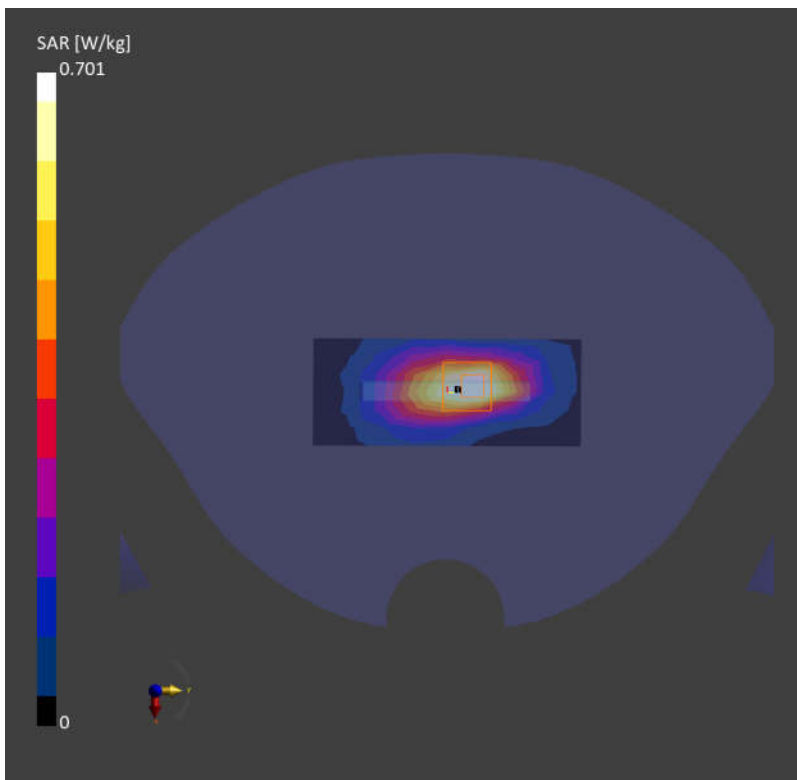

Date: 2024-11-21

50_LTE Band 4_20M_QPSK_50RB_0Offset_Bottom Side_10mm_Ch20175

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1732.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.333 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.678 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

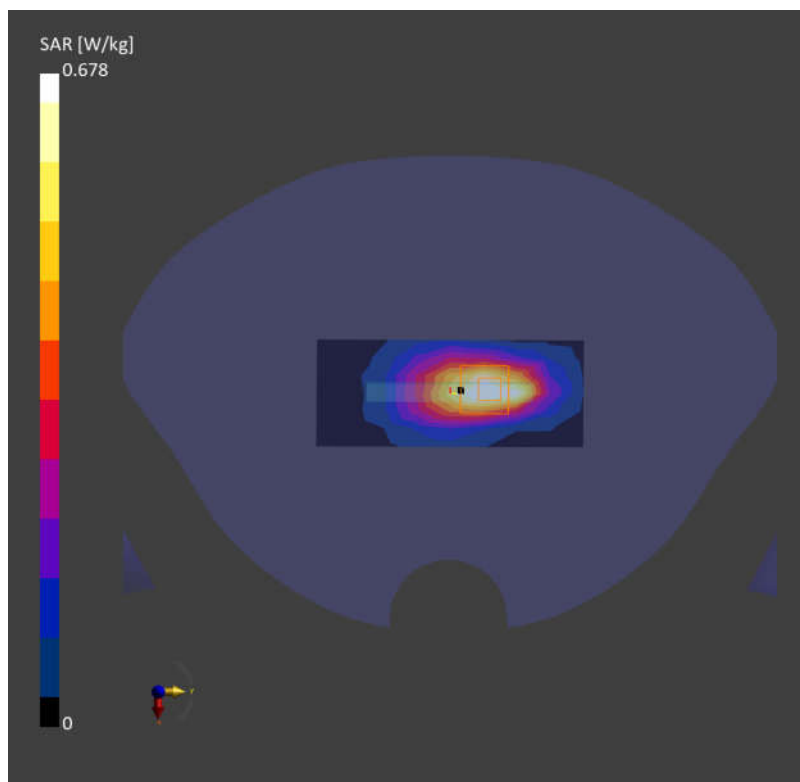

Date: 2024-11-21

51_LTE Band 66_20M_QPSK_50RB_0Offset_Bottom Side_10mm_Ch132322


Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.602 W/kg; SAR (10g) = 0.328 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.672 W/kg; SAR (10g) = 0.358 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 84.7 %

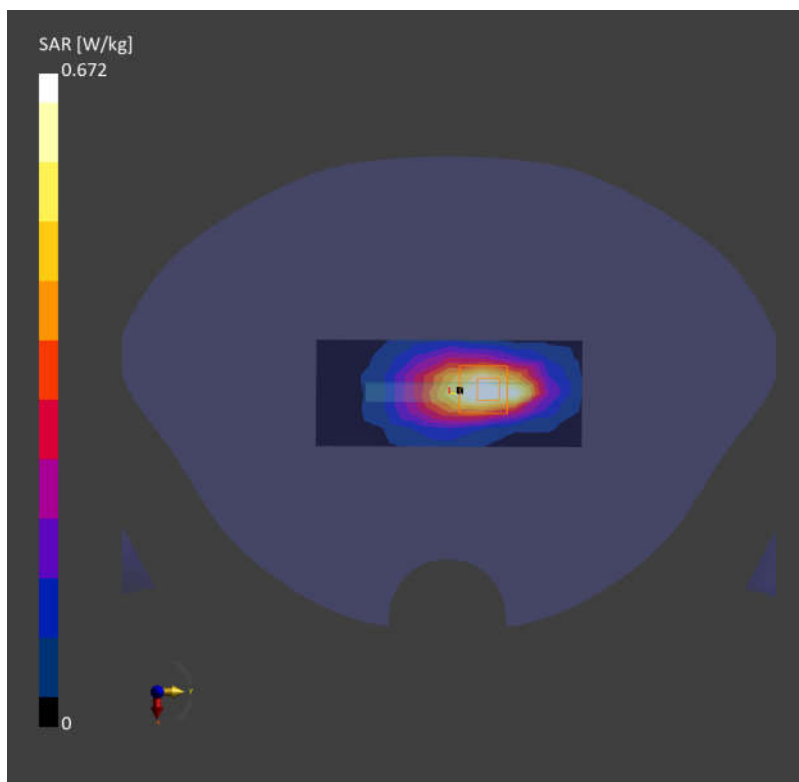

Date: 2024-11-21

52_FR1 n66_45M_QPSK_1RB_1Offset_Bottom Side_10mm_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.610 W/kg; SAR (10g) = 0.332 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.683 W/kg; SAR (10g) = 0.365 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.6 %

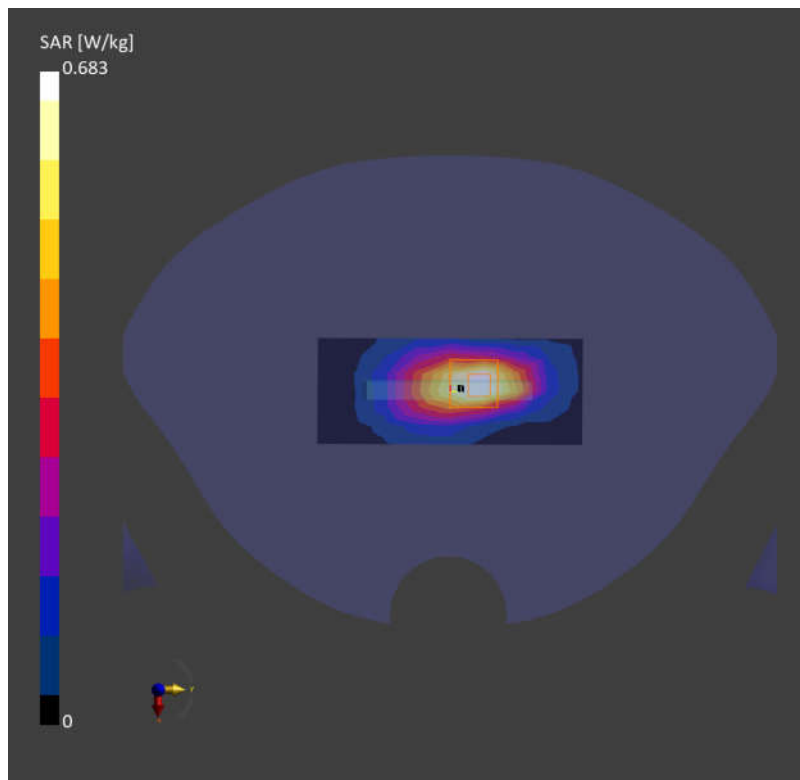

Date: 2024-11-22

53_GSM1900_GPRS (4 Tx slots)_Top Side_10mm_Ch661

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)

Frequency: 1880.000 MHz; Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.338 W/kg; SAR (10g) = 0.191 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.353 W/kg; SAR (10g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.0 %

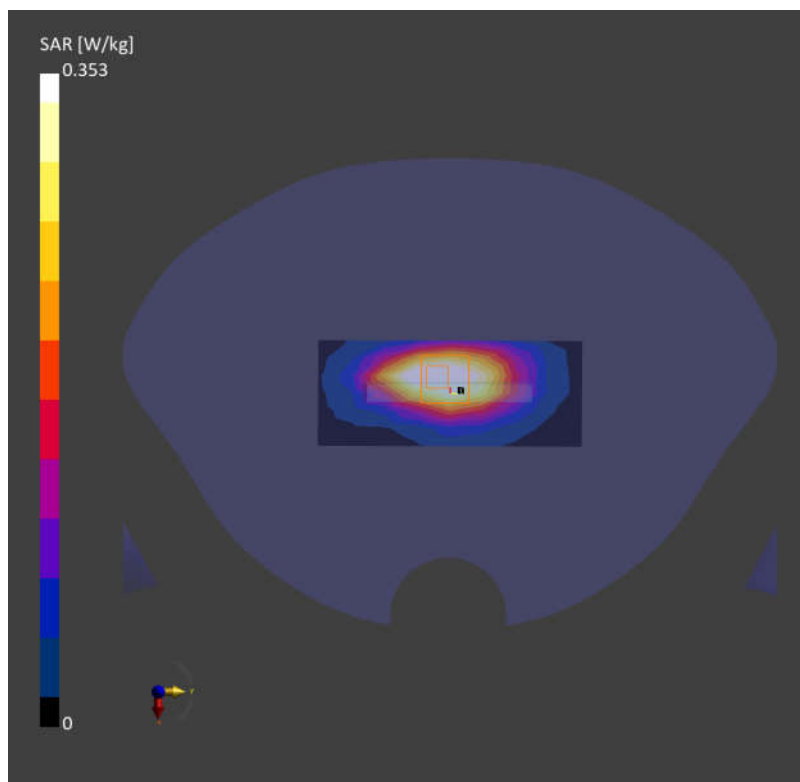

Date: 2024-11-22

54_WCDMA II_RMC 12.2Kbps_Bottom Side_10mm_Ch9400


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.704 W/kg; SAR (10g) = 0.377 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.772 W/kg; SAR (10g) = 0.410 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 84.2 %

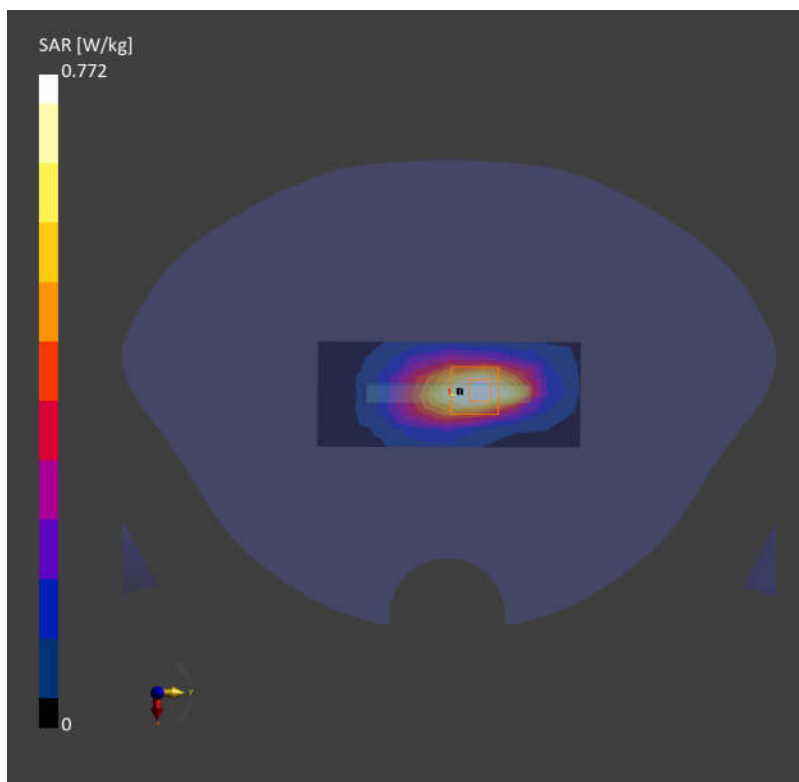

Date: 2024-11-22

55_LTE Band 2_20M_QPSK_100RB_0Offset_Bottom Side_10mm_Ch18900


Communication System: LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10100-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.711 W/kg; SAR (10g) = 0.383 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 0.773 W/kg; SAR (10g) = 0.414 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 83.9 %

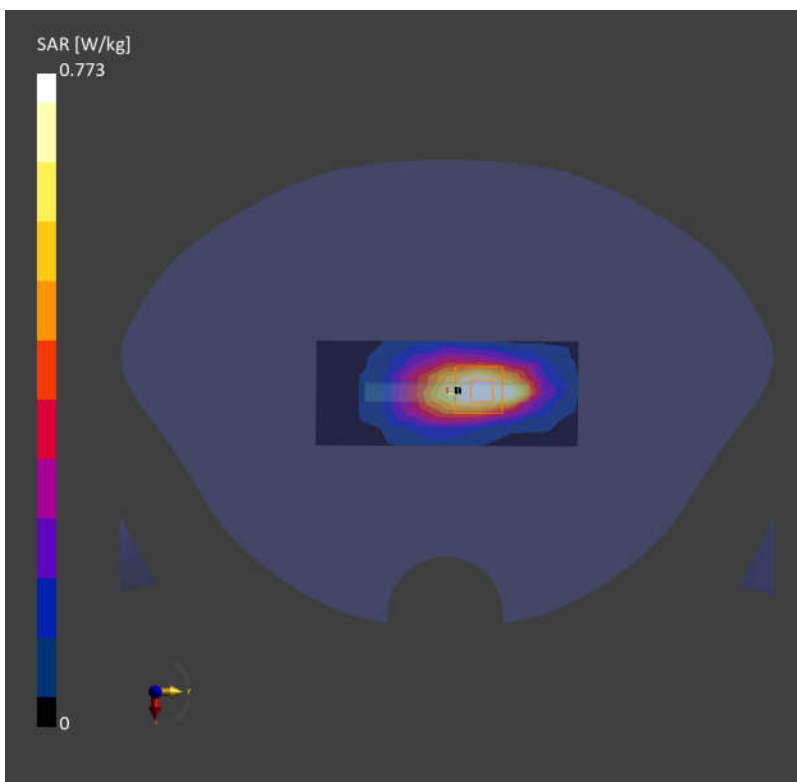

Date: 2024-11-22

56_LTE Band 25_20M_QPSK_50RB_0Offset_Bottom Side_10mm_Ch26140

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.335 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.671 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

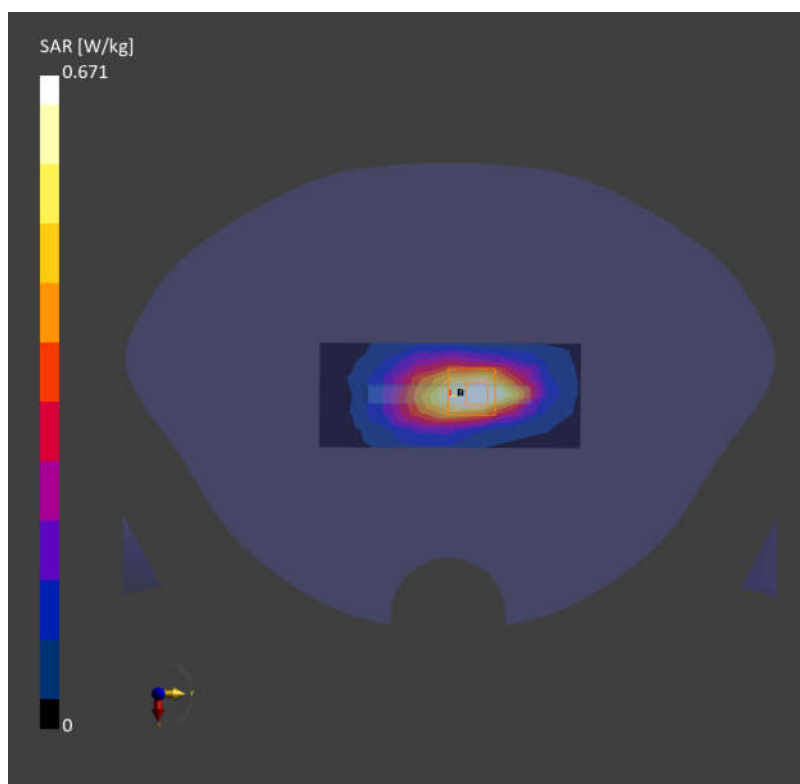

Date: 2024-11-22

57_FR1 n2_40M_QPSK_1RB_1Offset_Bottom Side_10mm_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.603 W/kg; SAR (10g) = 0.324 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.673 W/kg; SAR (10g) = 0.356 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.2 %

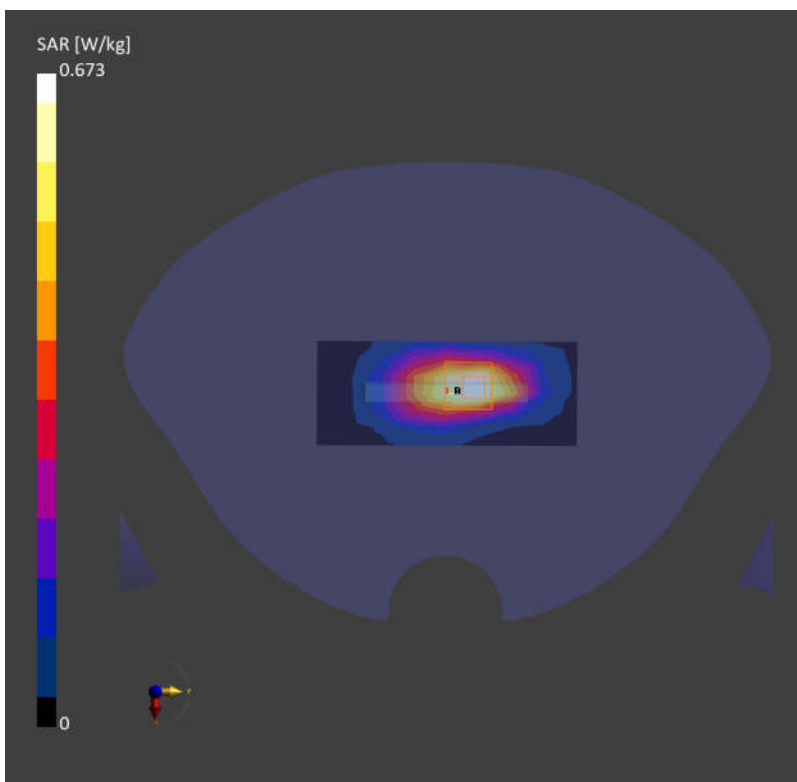

Date: 2024-11-22

58_FR1 n25_40M_QPSK_108RB_54Offset_Bottom Side_10mm_Ch376500


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.699 W/kg; SAR (10g) = 0.367 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.764 W/kg; SAR (10g) = 0.398 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 83.4 %

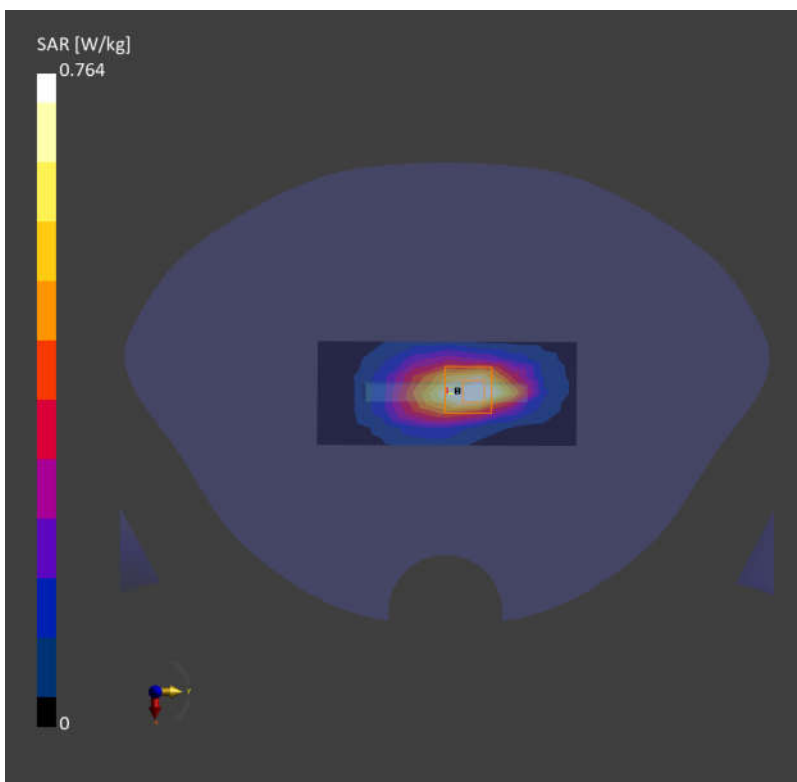

Date: 2024-11-24

59_LTE Band 7_20M_QPSK_50RB_0Offset_Right Side_10mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.438 W/kg; SAR (10g) = 0.217 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.459 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

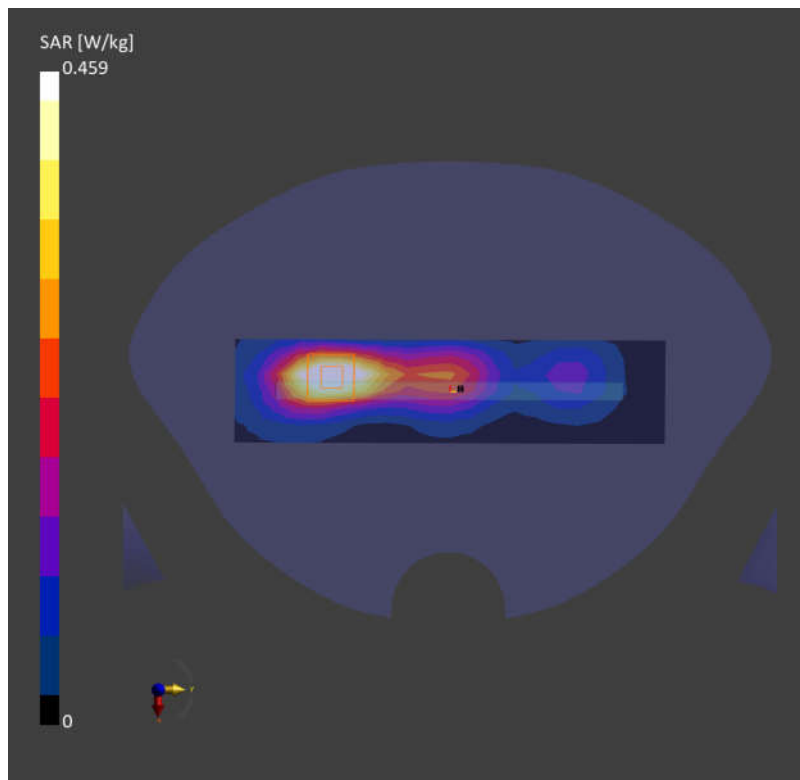

Date: 2024-11-24

60_LTE Band 38_20M_QPSK_1RB_0Offset_Right Side_10mm_Ch38000


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 2595.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.471 W/kg; SAR (10g) = 0.231 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.486 W/kg; SAR (10g) = 0.240 W/kg
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 82.9 %

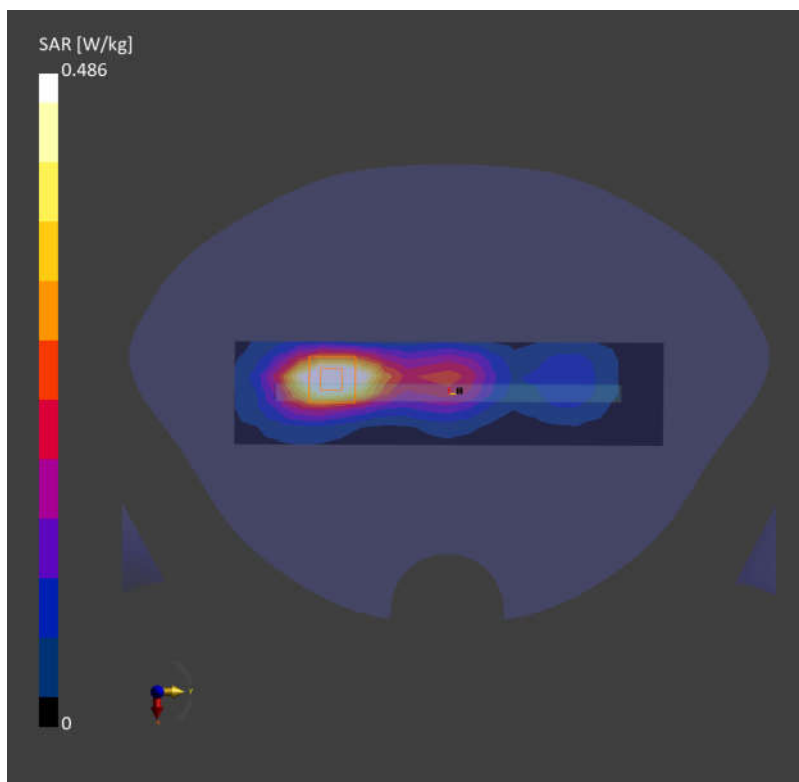

Date: 2024-11-24

61_LTE Band 41_20M_QPSK_1RB_0Offset_Right Side_10mm_Ch40620


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
 AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59
 Medium: HSL Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.4$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
 SAR (1g) = 0.551 W/kg; SAR (10g) = 0.274 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = -0.03 dB
 SAR (1g) = 0.581 W/kg; SAR (10g) = 0.291 W/kg
 Smallest distance from peaks to all points 3 dB below = 9.1 mm
 Ratio of SAR at M2 to SAR at M1 = 83.1 %

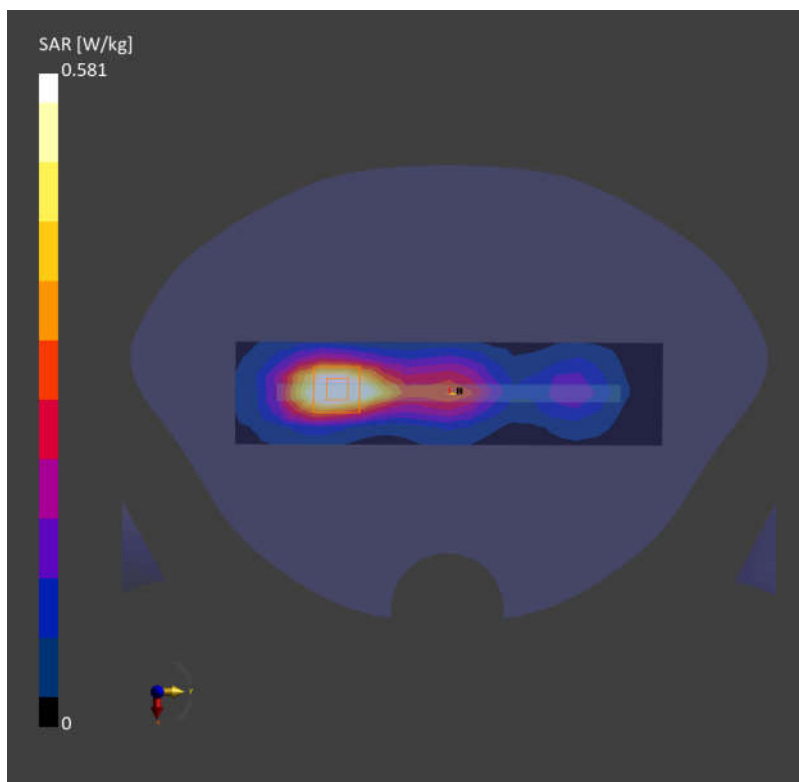

Date: 2024-11-24

62_FR1 n7_50M_QPSK_1RB_1Offset_Bottom Side_10mm_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.509 W/kg; SAR (10g) = 0.254 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.15 dB
SAR (1g) = 0.550 W/kg; SAR (10g) = 0.269 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.7 %

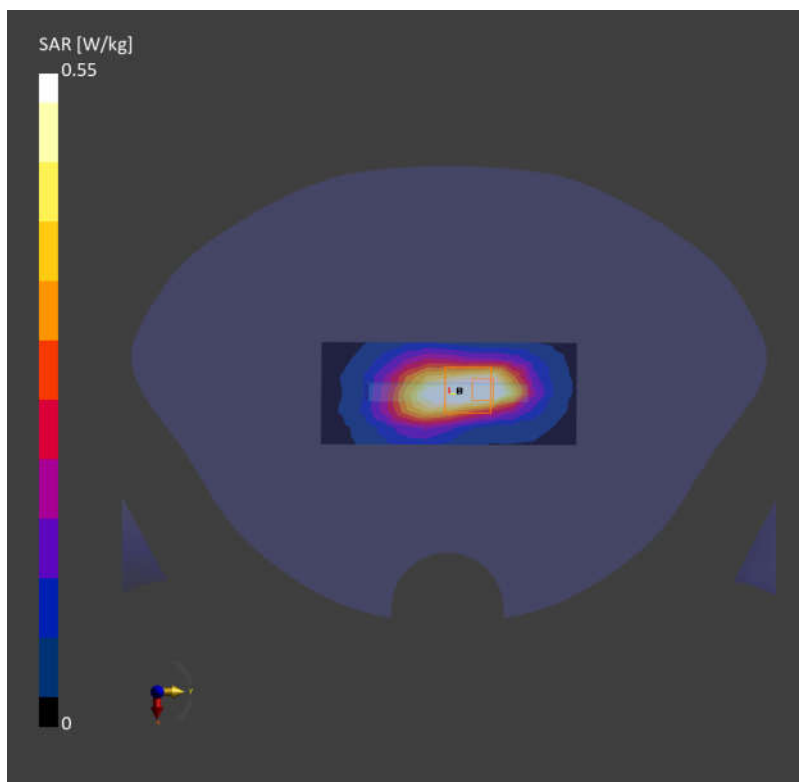

Date: 2024-11-24

63_FR1 n38_40M_QPSK_50RB_28Offset_Bottom Side_10mm_Ch519000


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2595.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 40.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.392 W/kg; SAR (10g) = 0.194 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.430 W/kg; SAR (10g) = 0.208 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

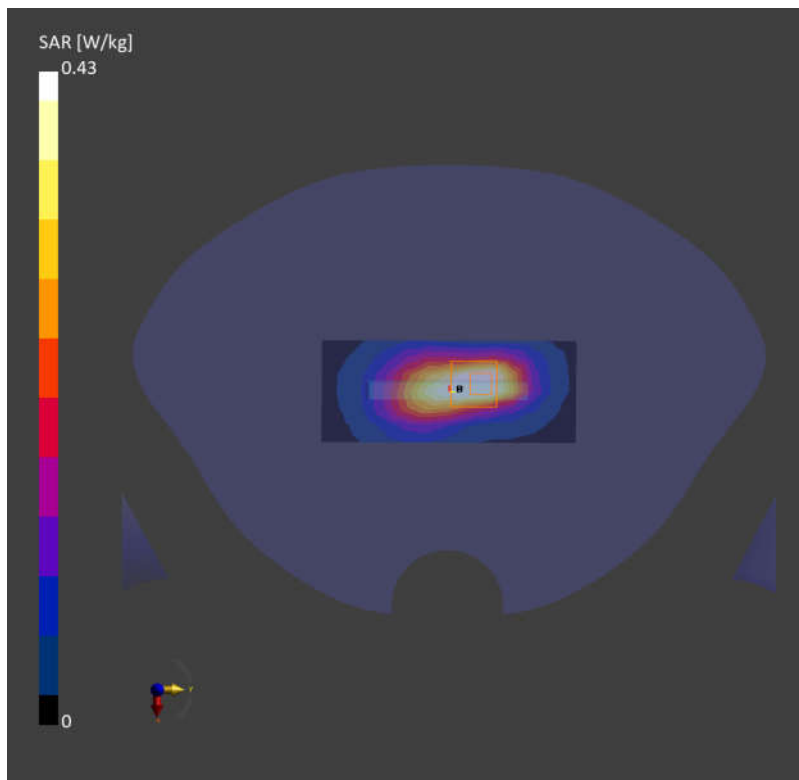

Date: 2024-11-24

64_FR1 n41_100M_QPSK_1RB_1Offset_Right Side_10mm_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.507 W/kg; SAR (10g) = 0.237 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.518 W/kg; SAR (10g) = 0.253 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 82.3 %

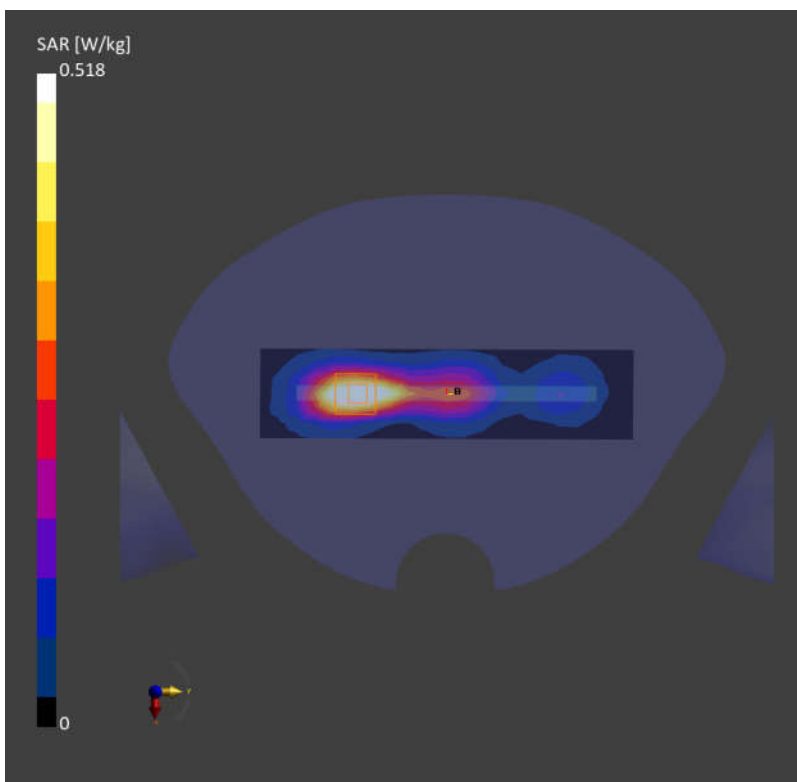

Date: 2024-11-25

65_LTE Band 42_20M_QPSK_1RB_0Offset_Bottom Side_10mm_Ch42590

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.216 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.07 dB
SAR (1g) = 0.541 W/kg; SAR (10g) = 0.232 W/kg
Smallest distance from peaks to all points 3 dB below = 8.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

