


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

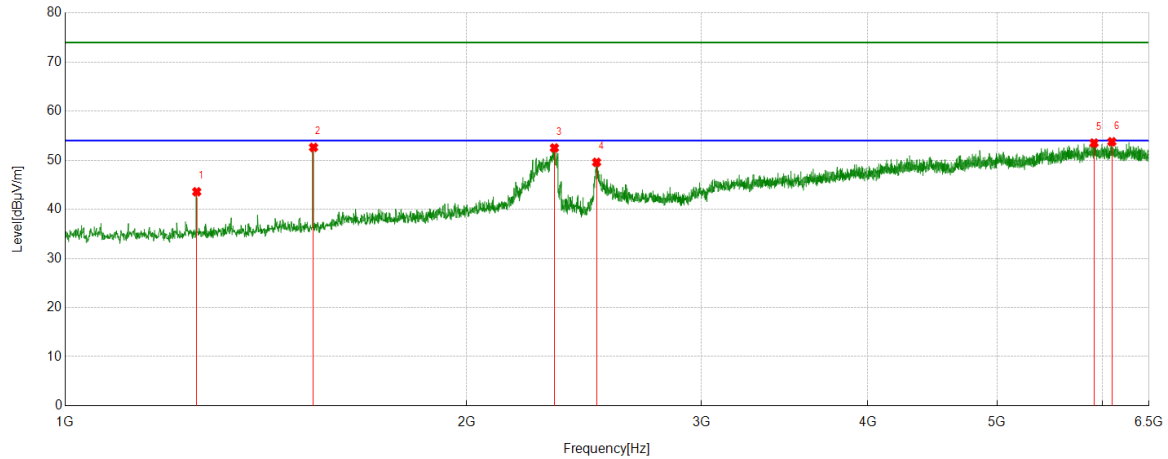


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.15	-1.57	43.58	74.00	-30.42	Horizontal
2	1535.6295	53.24	-0.62	52.62	74.00	-21.38	Horizontal
3	2327.7285	47.52	4.99	52.51	74.00	-21.49	Horizontal
4	2503.7505	43.70	5.89	49.59	74.00	-24.41	Horizontal
5	5911.4264	35.26	18.25	53.51	74.00	-20.49	Horizontal
6	6095.6995	35.50	18.27	53.77	74.00	-20.23	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

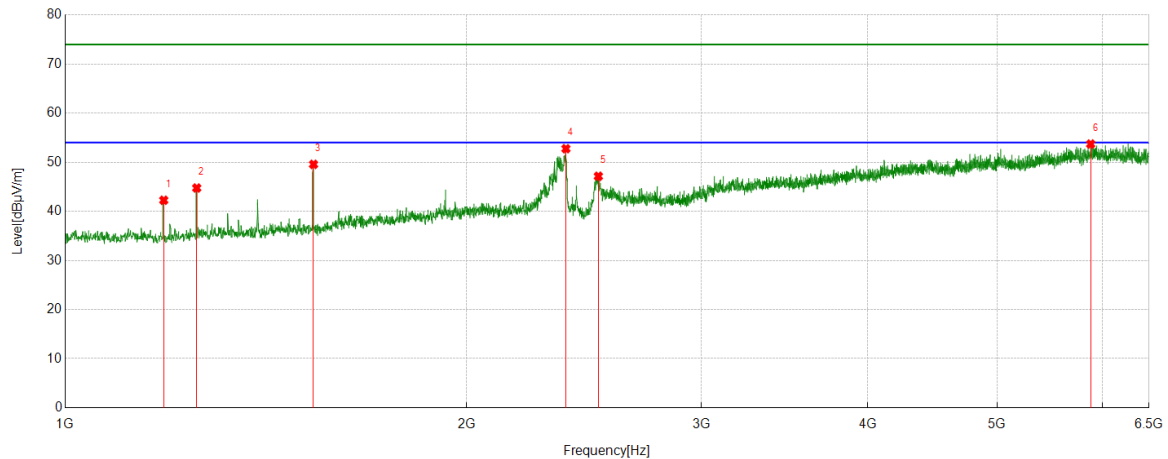


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	44.26	-2.00	42.26	74.00	-31.74	Vertical
2	1255.0944	46.32	-1.57	44.75	74.00	-29.25	Vertical
3	1535.6295	50.19	-0.62	49.57	74.00	-24.43	Vertical
4	2374.4843	47.94	4.82	52.76	74.00	-21.24	Vertical
5	2511.3139	41.27	5.88	47.15	74.00	-26.85	Vertical
6	5877.0471	35.98	17.73	53.71	74.00	-20.29	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

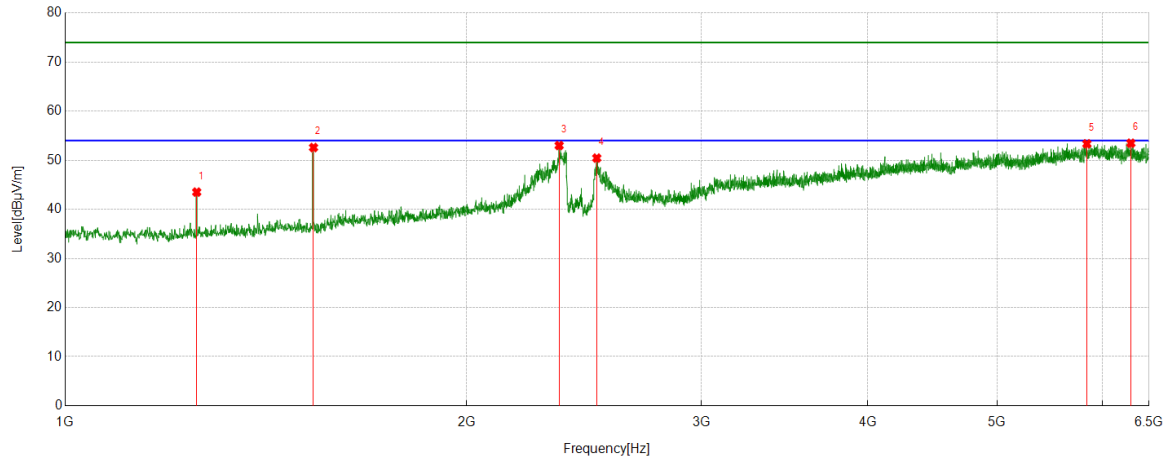


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.08	-1.57	43.51	74.00	-30.49	Horizontal
2	1535.6295	53.21	-0.62	52.59	74.00	-21.41	Horizontal
3	2346.9809	48.17	4.83	53.00	74.00	-21.00	Horizontal
4	2504.4381	44.55	5.89	50.44	74.00	-23.56	Horizontal
5	5838.5423	35.20	18.15	53.35	74.00	-20.65	Horizontal
6	6299.2249	34.71	18.76	53.47	74.00	-20.53	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

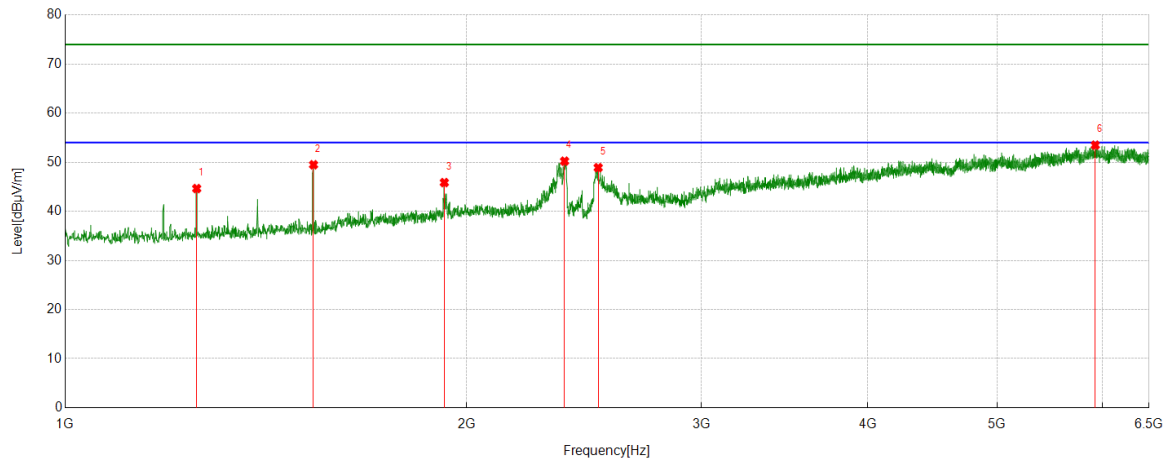


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.21	-1.57	44.64	74.00	-29.36	Vertical
2	1535.6295	50.11	-0.62	49.49	74.00	-24.51	Vertical
3	1924.8031	42.86	3.00	45.86	74.00	-28.14	Vertical
4	2368.9836	45.42	4.80	50.22	74.00	-23.78	Vertical
5	2510.6263	43.00	5.90	48.90	74.00	-25.10	Vertical
6	5923.8030	34.70	18.78	53.48	74.00	-20.52	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

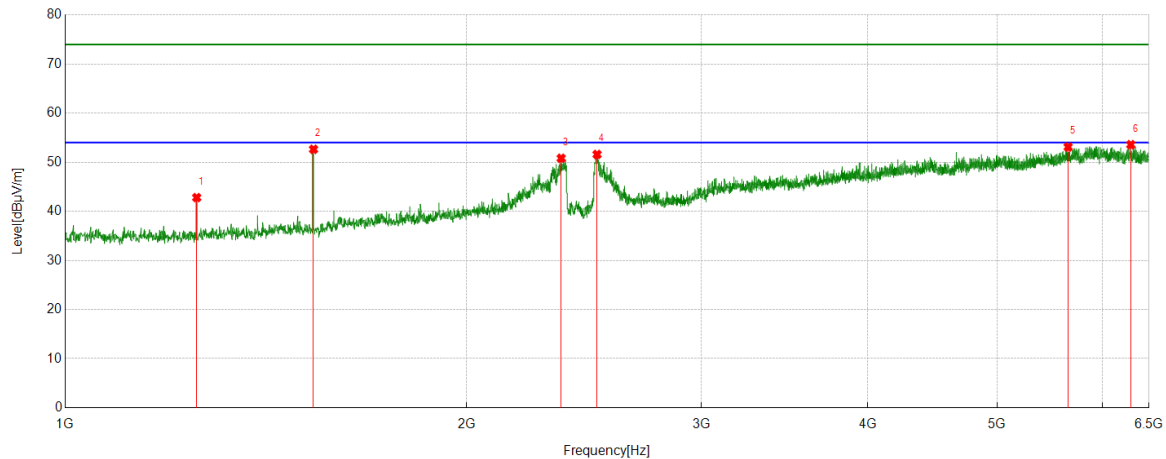


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.37	-1.57	42.80	74.00	-31.20	Horizontal
2	1535.6295	53.26	-0.62	52.64	74.00	-21.36	Horizontal
3	2355.2319	46.03	4.78	50.81	74.00	-23.19	Horizontal
4	2505.8132	45.69	5.90	51.59	74.00	-22.41	Horizontal
5	5652.2065	35.64	17.47	53.11	74.00	-20.89	Horizontal
6	6298.5373	34.82	18.76	53.58	74.00	-20.42	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

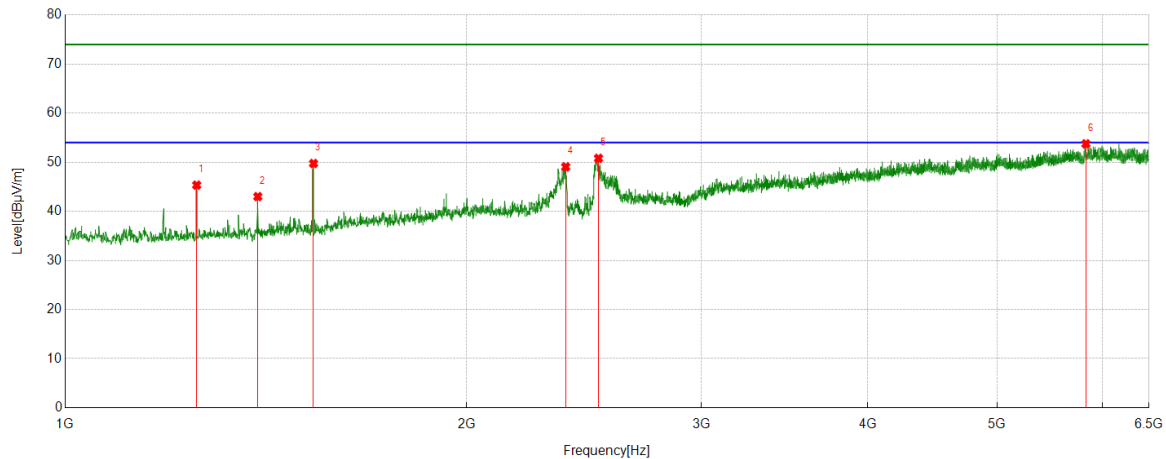


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	46.91	-1.57	45.34	74.00	-28.66	Vertical
2	1394.6743	44.35	-1.35	43.00	74.00	-31.00	Vertical
3	1535.6295	50.37	-0.62	49.75	74.00	-24.25	Vertical
4	2373.7967	44.24	4.82	49.06	74.00	-24.94	Vertical
5	2512.0015	44.94	5.86	50.80	74.00	-23.20	Vertical
6	5828.9161	35.07	18.68	53.75	74.00	-20.25	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

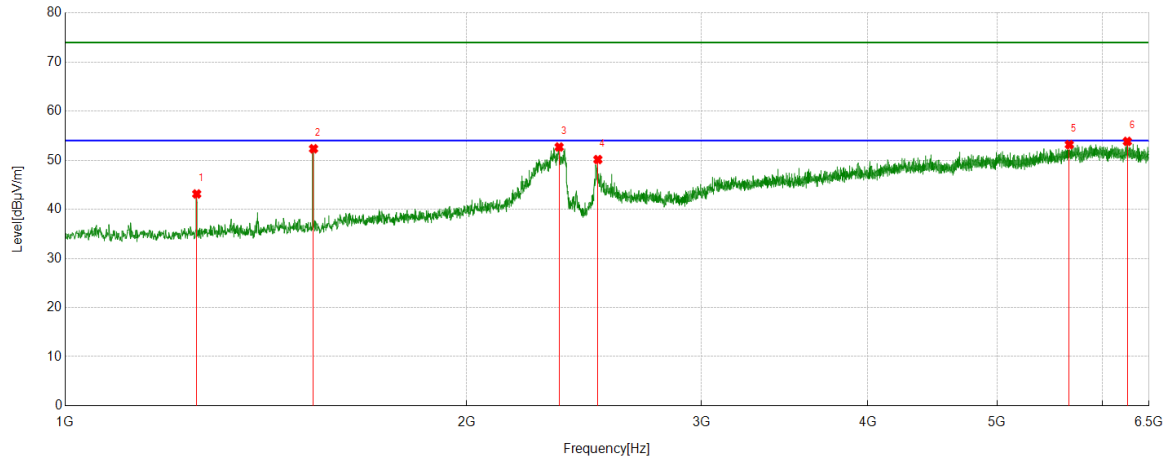


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.70	-1.57	43.13	74.00	-30.87	Horizontal
2	1535.6295	52.96	-0.62	52.34	74.00	-21.66	Horizontal
3	2346.9809	47.86	4.83	52.69	74.00	-21.31	Horizontal
4	2509.2512	44.23	5.91	50.14	74.00	-23.86	Horizontal
5	5663.8955	35.75	17.43	53.18	74.00	-20.82	Horizontal
6	6260.7201	35.27	18.57	53.84	74.00	-20.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

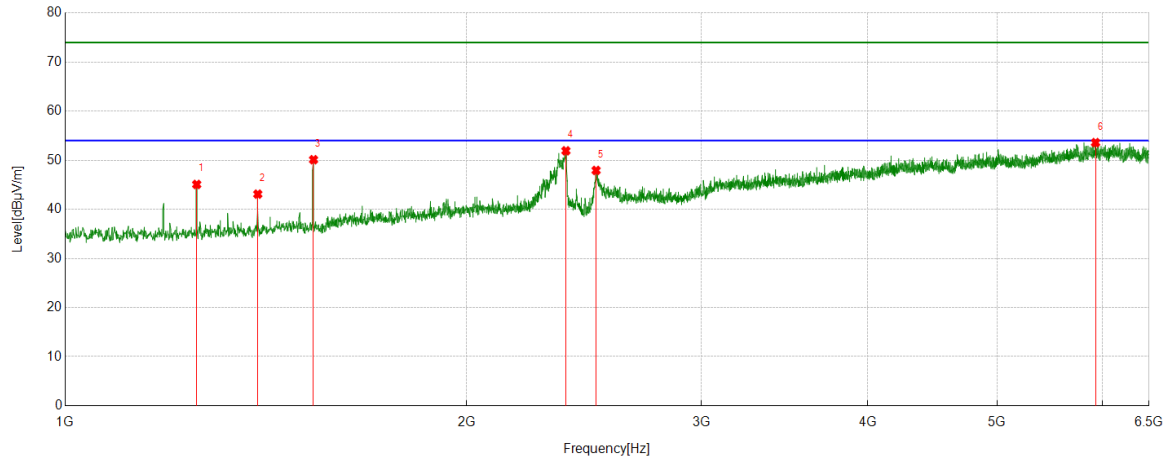


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.64	-1.57	45.07	74.00	-28.93	Vertical
2	1394.6743	44.45	-1.35	43.10	74.00	-30.90	Vertical
3	1535.6295	50.73	-0.62	50.11	74.00	-23.89	Vertical
4	2374.4843	47.10	4.82	51.92	74.00	-22.08	Vertical
5	2501.6877	42.05	5.88	47.93	74.00	-26.07	Vertical
6	5926.5533	34.75	18.84	53.59	74.00	-20.41	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

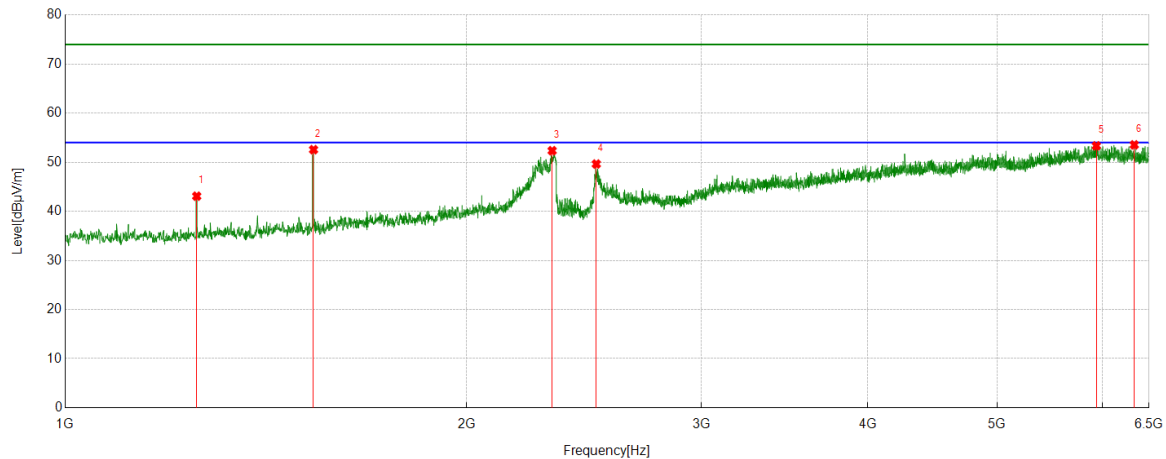


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.66	-1.57	43.09	74.00	-30.91	Horizontal
2	1535.6295	53.18	-0.62	52.56	74.00	-21.44	Horizontal
3	2318.7898	47.59	4.76	52.35	74.00	-21.65	Horizontal
4	2502.3753	43.76	5.88	49.64	74.00	-24.36	Horizontal
5	5934.8044	34.66	18.68	53.34	74.00	-20.66	Horizontal
6	6336.3545	34.60	18.94	53.54	74.00	-20.46	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

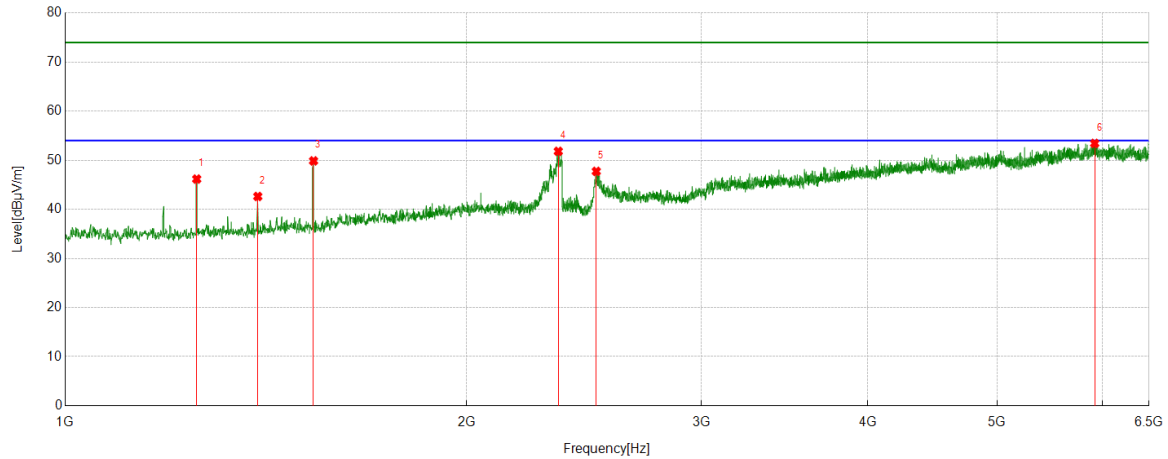


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.74	-1.57	46.17	74.00	-27.83	Vertical
2	1394.6743	43.97	-1.35	42.62	74.00	-31.38	Vertical
3	1535.6295	50.49	-0.62	49.87	74.00	-24.13	Vertical
4	2343.5429	46.91	4.91	51.82	74.00	-22.18	Vertical
5	2502.3753	41.86	5.88	47.74	74.00	-26.26	Vertical
6	5917.6147	34.86	18.57	53.43	74.00	-20.57	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

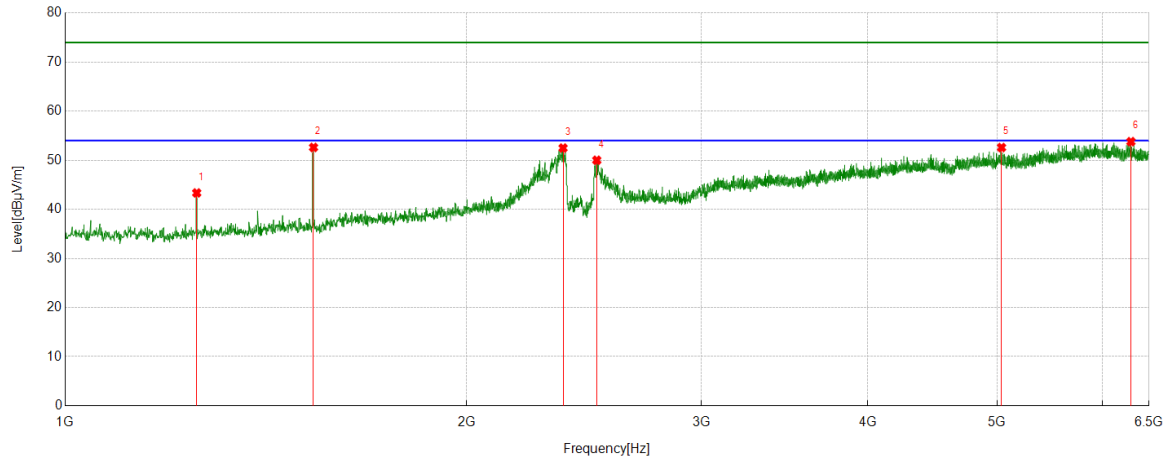


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	44.91	-1.57	43.34	74.00	-30.66	Horizontal
2	1535.6295	53.23	-0.62	52.61	74.00	-21.39	Horizontal
3	2362.7953	47.71	4.78	52.49	74.00	-21.51	Horizontal
4	2504.4381	44.11	5.89	50.00	74.00	-24.00	Horizontal
5	5038.1923	36.93	15.66	52.59	74.00	-21.41	Horizontal
6	6299.9125	35.01	18.78	53.79	74.00	-20.21	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

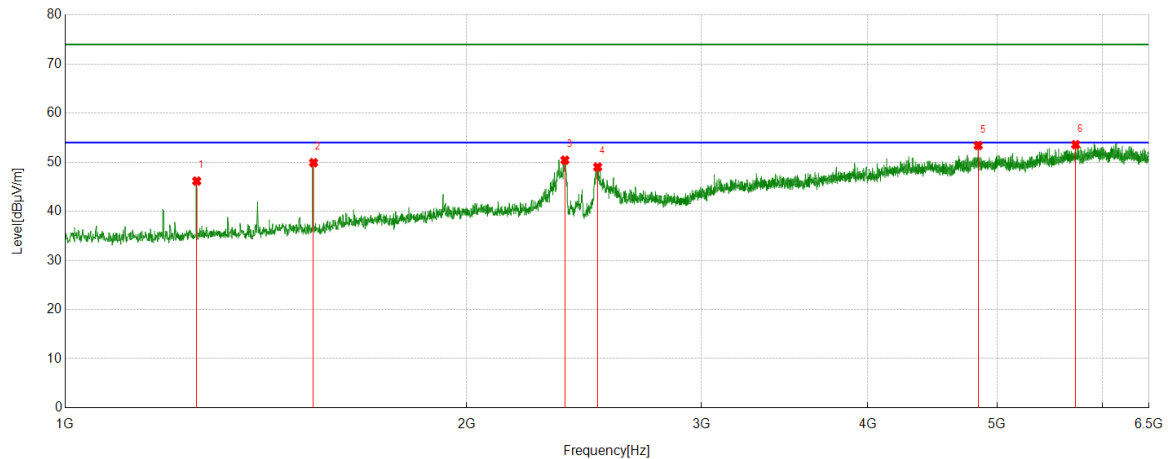


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	47.74	-1.57	46.17	74.00	-27.83	Vertical
2	1535.6295	50.53	-0.62	49.91	74.00	-24.09	Vertical
3	2370.3588	45.62	4.81	50.43	74.00	-23.57	Vertical
4	2508.5636	43.12	5.91	49.03	74.00	-24.97	Vertical
5	4839.4799	38.00	15.41	53.41	74.00	-20.59	Vertical
6	5726.4658	36.14	17.44	53.58	74.00	-20.42	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

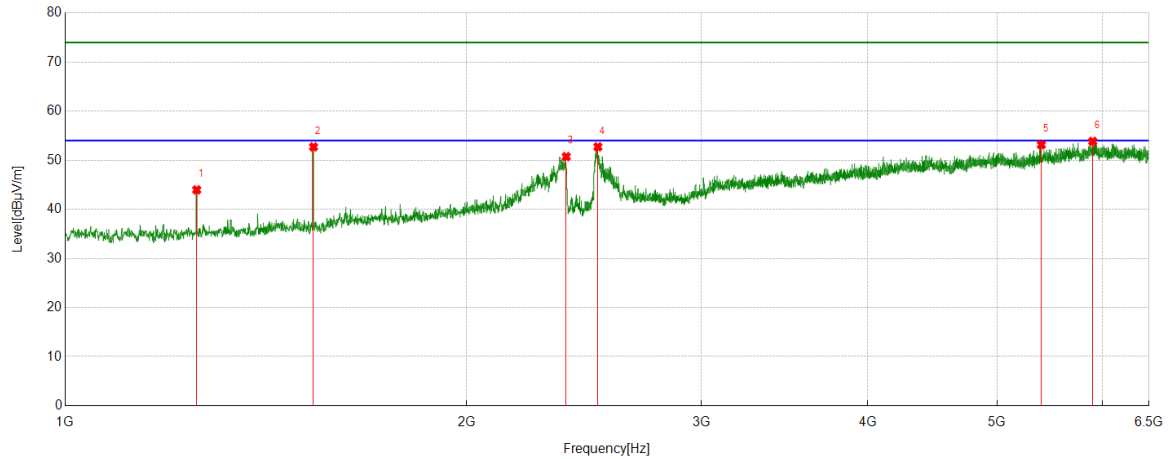


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.53	-1.57	43.96	74.00	-30.04	Horizontal
2	1535.6295	53.34	-0.62	52.72	74.00	-21.28	Horizontal
3	2375.8595	45.90	4.83	50.73	74.00	-23.27	Horizontal
4	2509.2512	46.82	5.91	52.73	74.00	-21.27	Horizontal
5	5397.1121	36.34	16.81	53.15	74.00	-20.85	Horizontal
6	5897.6747	35.89	17.95	53.84	74.00	-20.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

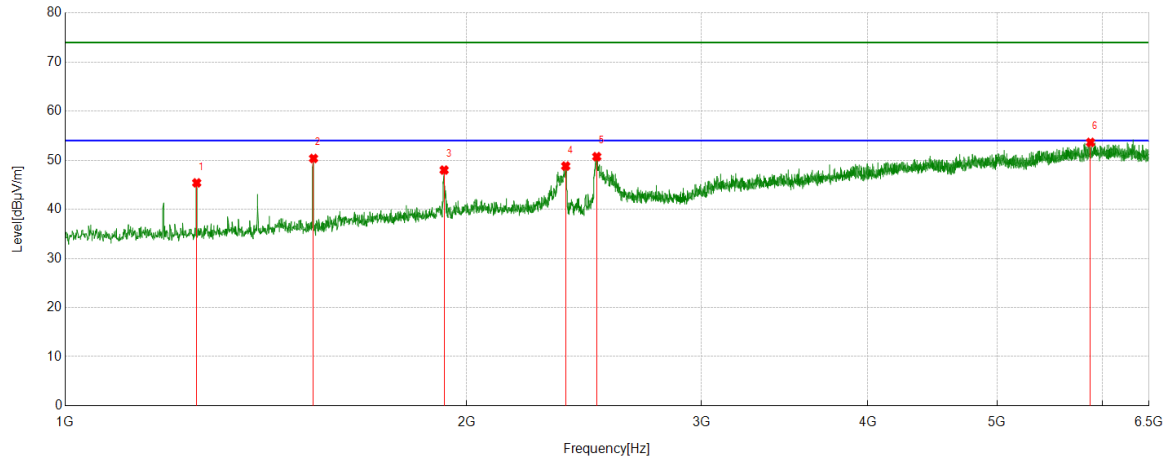


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.96	-1.57	45.39	74.00	-28.61	Vertical
2	1535.6295	50.99	-0.62	50.37	74.00	-23.63	Vertical
3	1924.1155	44.98	3.02	48.00	74.00	-26.00	Vertical
4	2373.7967	43.99	4.82	48.81	74.00	-25.19	Vertical
5	2504.4381	44.84	5.89	50.73	74.00	-23.27	Vertical
6	5874.9844	35.85	17.79	53.64	74.00	-20.36	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

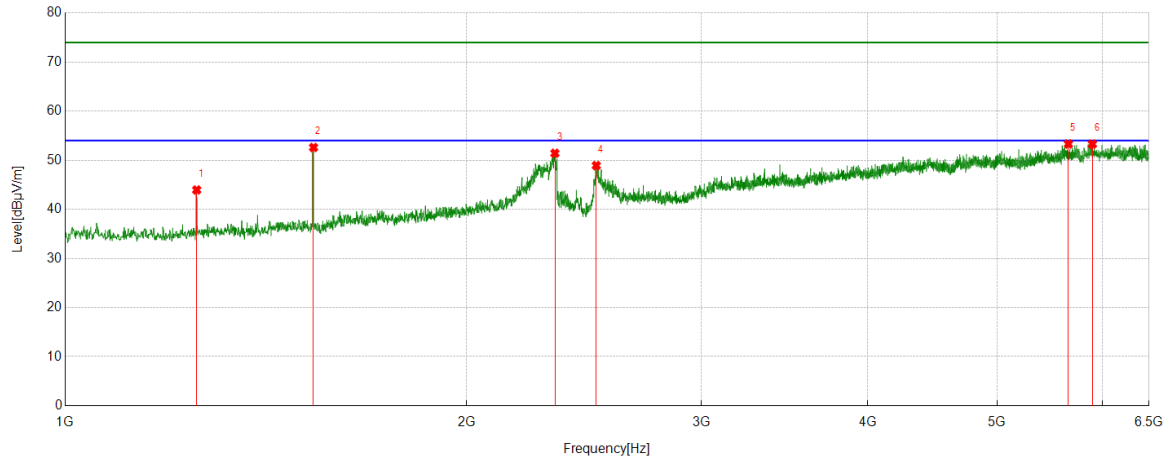


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.52	-1.57	43.95	74.00	-30.05	Horizontal
2	1535.6295	53.22	-0.62	52.60	74.00	-21.40	Horizontal
3	2329.7912	46.38	5.04	51.42	74.00	-22.58	Horizontal
4	2502.3753	43.04	5.88	48.92	74.00	-25.08	Horizontal
5	5654.9569	35.82	17.49	53.31	74.00	-20.69	Horizontal
6	5894.2368	35.33	17.96	53.29	74.00	-20.71	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

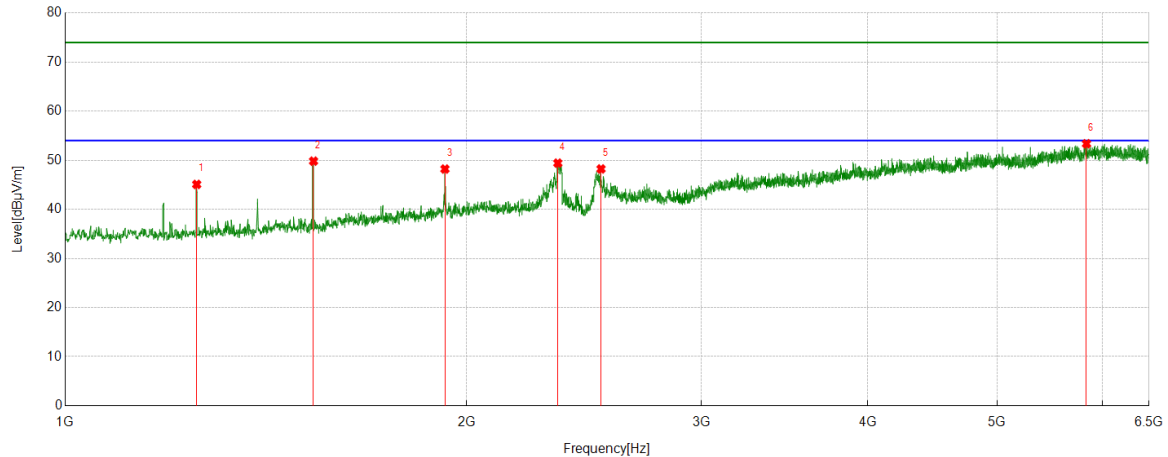


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.65	-1.57	45.08	74.00	-28.92	Vertical
2	1535.6295	50.44	-0.62	49.82	74.00	-24.18	Vertical
3	1926.8659	45.27	2.94	48.21	74.00	-25.79	Vertical
4	2341.4802	44.46	4.95	49.41	74.00	-24.59	Vertical
5	2523.0029	42.58	5.65	48.23	74.00	-25.77	Vertical
6	5834.4168	34.94	18.42	53.36	74.00	-20.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

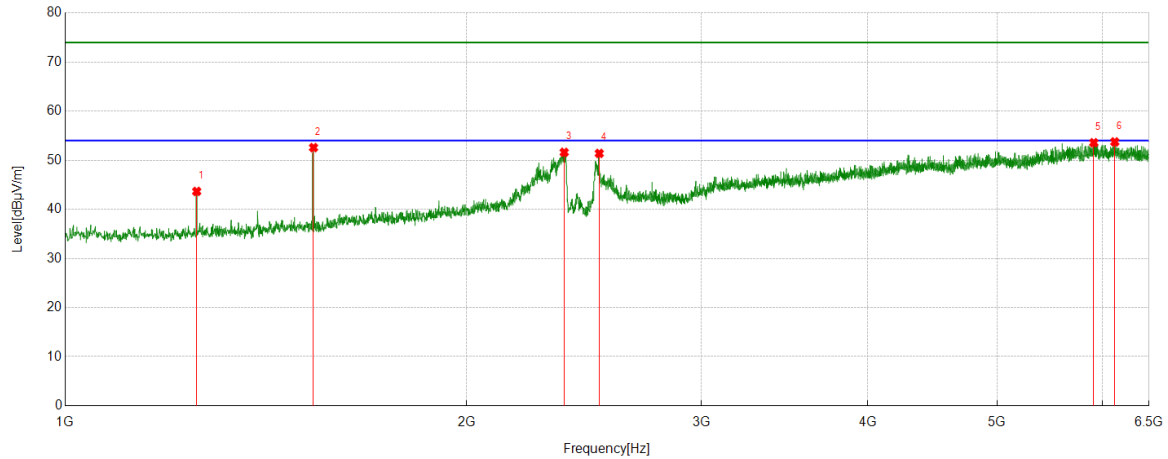


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.22	-1.57	43.65	74.00	-30.35	Horizontal
2	1535.6295	53.20	-0.62	52.58	74.00	-21.42	Horizontal
3	2367.6085	46.81	4.80	51.61	74.00	-22.39	Horizontal
4	2515.4394	45.60	5.79	51.39	74.00	-22.61	Horizontal
5	5908.6761	35.42	18.15	53.57	74.00	-20.43	Horizontal
6	6126.6408	35.48	18.25	53.73	74.00	-20.27	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

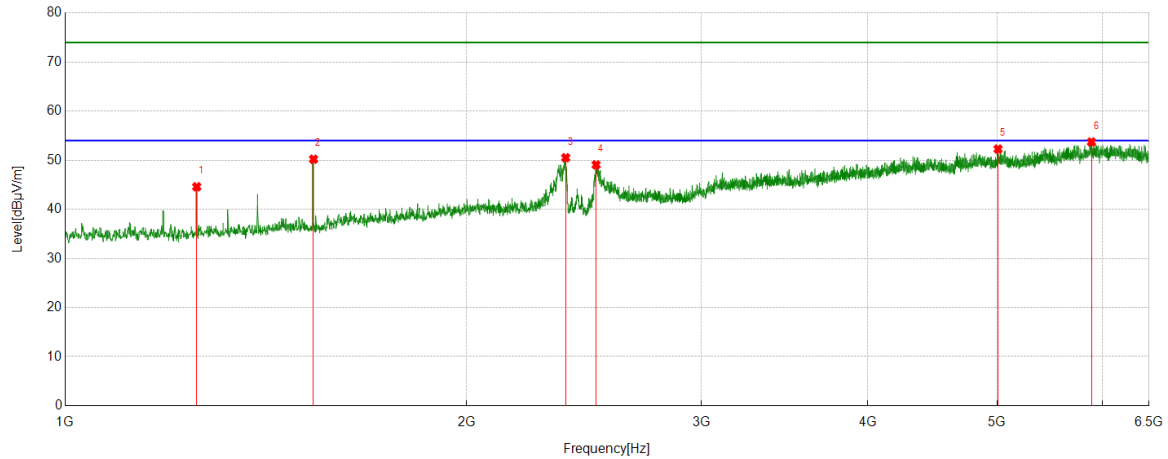


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.17	-1.57	44.60	74.00	-29.40	Vertical
2	1535.6295	50.83	-0.62	50.21	74.00	-23.79	Vertical
3	2373.7967	45.69	4.82	50.51	74.00	-23.49	Vertical
4	2501.6877	43.19	5.88	49.07	74.00	-24.93	Vertical
5	5007.9385	36.92	15.36	52.28	74.00	-21.72	Vertical
6	5884.6106	35.91	17.81	53.72	74.00	-20.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

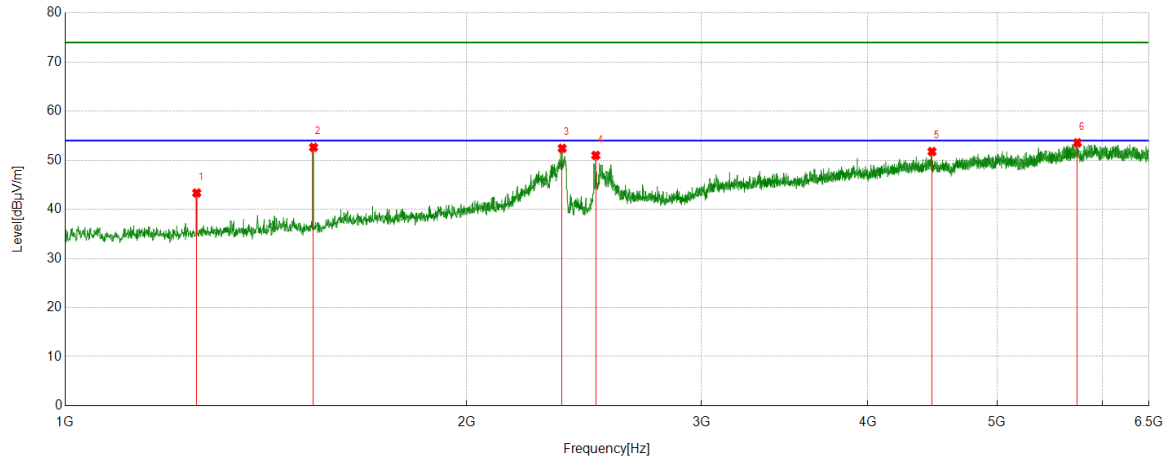


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.90	-1.57	43.33	74.00	-30.67	Horizontal
2	1535.6295	53.25	-0.62	52.63	74.00	-21.37	Horizontal
3	2359.3574	47.64	4.78	52.42	74.00	-21.58	Horizontal
4	2500.3125	45.11	5.88	50.99	74.00	-23.01	Horizontal
5	4468.1835	37.19	14.58	51.77	74.00	-22.23	Horizontal
6	5743.6555	35.77	17.78	53.55	74.00	-20.45	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

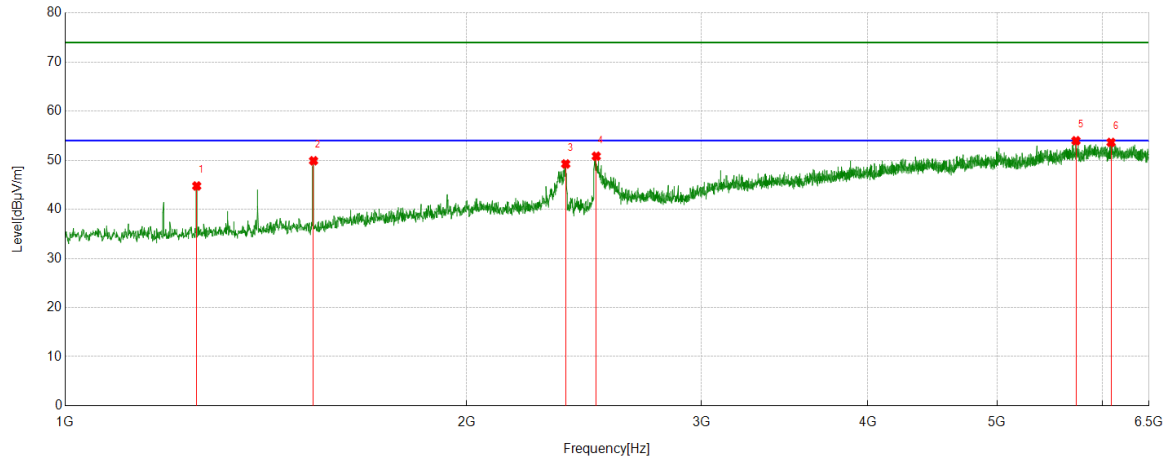


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.33	-1.57	44.76	74.00	-29.24	Vertical
2	1535.6295	50.52	-0.62	49.90	74.00	-24.10	Vertical
3	2373.7967	44.42	4.82	49.24	74.00	-24.76	Vertical
4	2502.3753	44.94	5.88	50.82	74.00	-23.18	Vertical
5	5729.2162	36.62	17.35	53.97	74.00	-20.03	Vertical
6	6087.4484	35.51	18.12	53.63	74.00	-20.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

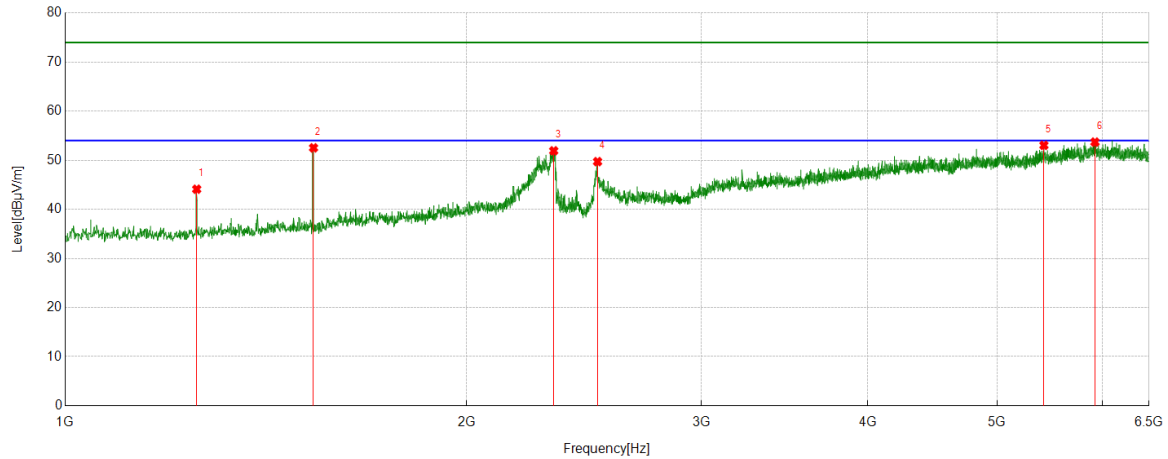


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.67	-1.57	44.10	74.00	-29.90	Horizontal
2	1535.6295	53.15	-0.62	52.53	74.00	-21.47	Horizontal
3	2324.9781	46.99	4.93	51.92	74.00	-22.08	Horizontal
4	2507.8760	43.81	5.91	49.72	74.00	-24.28	Horizontal
5	5421.1776	35.87	17.17	53.04	74.00	-20.96	Horizontal
6	5920.3650	35.00	18.70	53.70	74.00	-20.30	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

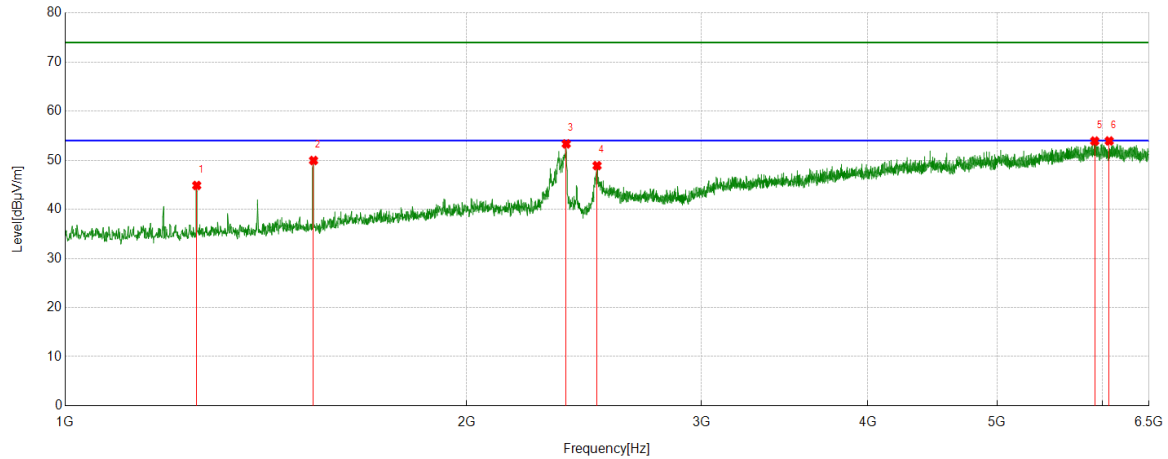


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.43	-1.57	44.86	74.00	-29.14	Vertical
2	1535.6295	50.57	-0.62	49.95	74.00	-24.05	Vertical
3	2375.8595	48.50	4.83	53.33	74.00	-20.67	Vertical
4	2505.8132	43.00	5.90	48.90	74.00	-25.10	Vertical
5	5918.3023	35.30	18.61	53.91	74.00	-20.09	Vertical
6	6068.1960	35.94	17.99	53.93	74.00	-20.07	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

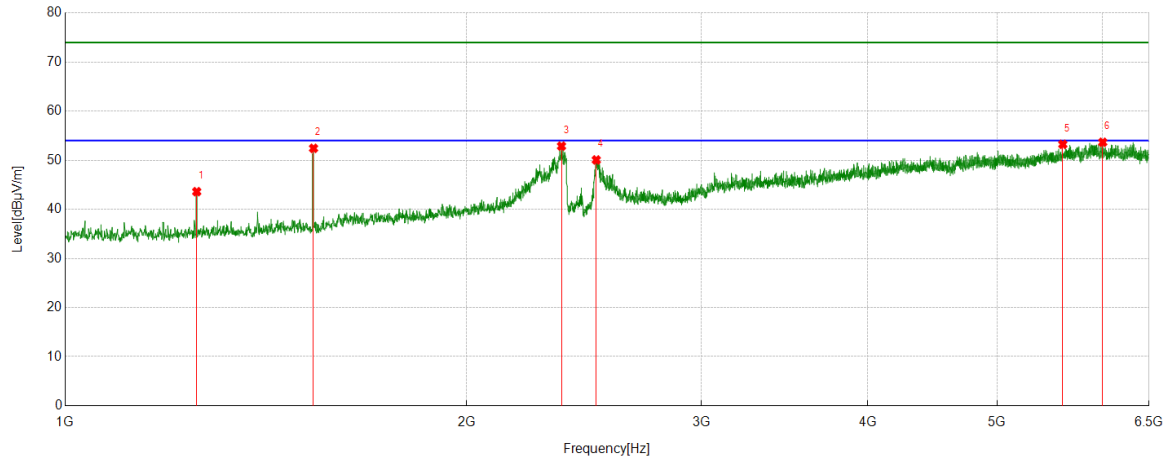


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.17	-1.57	43.60	74.00	-30.40	Horizontal
2	1535.6295	53.05	-0.62	52.43	74.00	-21.57	Horizontal
3	2356.6071	48.10	4.78	52.88	74.00	-21.12	Horizontal
4	2502.3753	44.18	5.88	50.06	74.00	-23.94	Horizontal
5	5600.6376	35.75	17.49	53.24	74.00	-20.76	Horizontal
6	6000.8126	35.42	18.24	53.66	74.00	-20.34	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Vertical	PASS

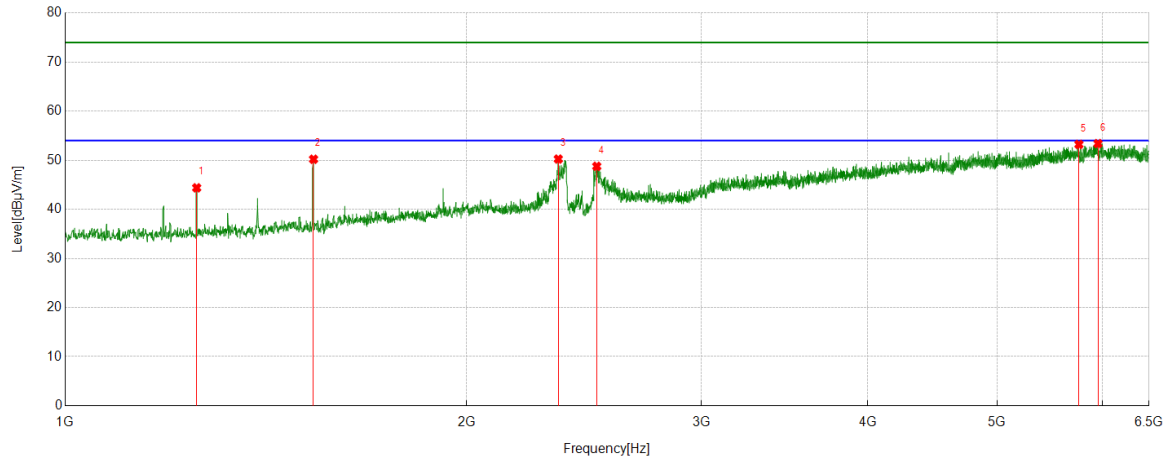


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.95	-1.57	44.38	74.00	-29.62	Vertical
2	1535.6295	50.82	-0.62	50.20	74.00	-23.80	Vertical
3	2343.5429	45.33	4.91	50.24	74.00	-23.76	Vertical
4	2504.4381	42.87	5.89	48.76	74.00	-25.24	Vertical
5	5758.7823	35.25	17.97	53.22	74.00	-20.78	Vertical
6	5951.9940	34.91	18.48	53.39	74.00	-20.61	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Horizontal	PASS

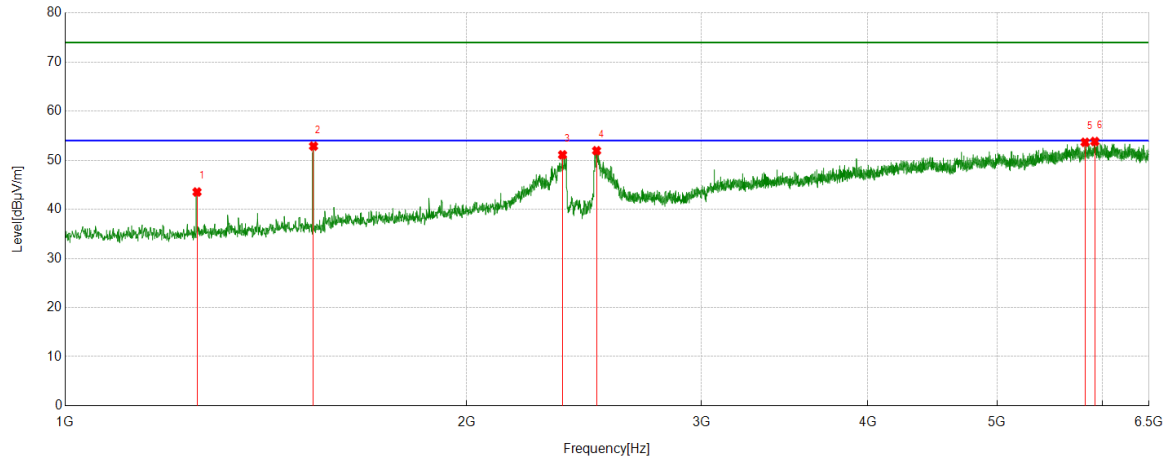


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.7820	45.10	-1.57	43.53	74.00	-30.47	Horizontal
2	1535.6295	53.49	-0.62	52.87	74.00	-21.13	Horizontal
3	2360.7326	46.32	4.78	51.10	74.00	-22.90	Horizontal
4	2503.7505	46.05	5.89	51.94	74.00	-22.06	Horizontal
5	5820.6651	35.00	18.66	53.66	74.00	-20.34	Horizontal
6	5918.9899	35.18	18.64	53.82	74.00	-20.18	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	HCH	Vertical	PASS

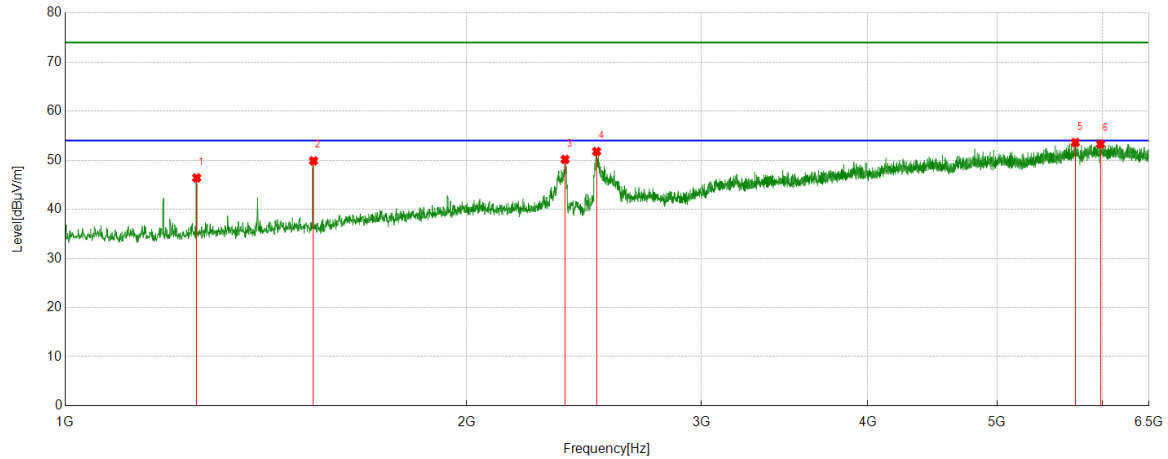


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.98	-1.57	46.41	74.00	-27.59	Vertical
2	1535.6295	50.50	-0.62	49.88	74.00	-24.12	Vertical
3	2371.0464	45.35	4.82	50.17	74.00	-23.83	Vertical
4	2503.7505	45.89	5.89	51.78	74.00	-22.22	Vertical
5	5723.0279	36.05	17.56	53.61	74.00	-20.39	Vertical
6	5978.1223	34.93	18.37	53.30	74.00	-20.70	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Horizontal	PASS

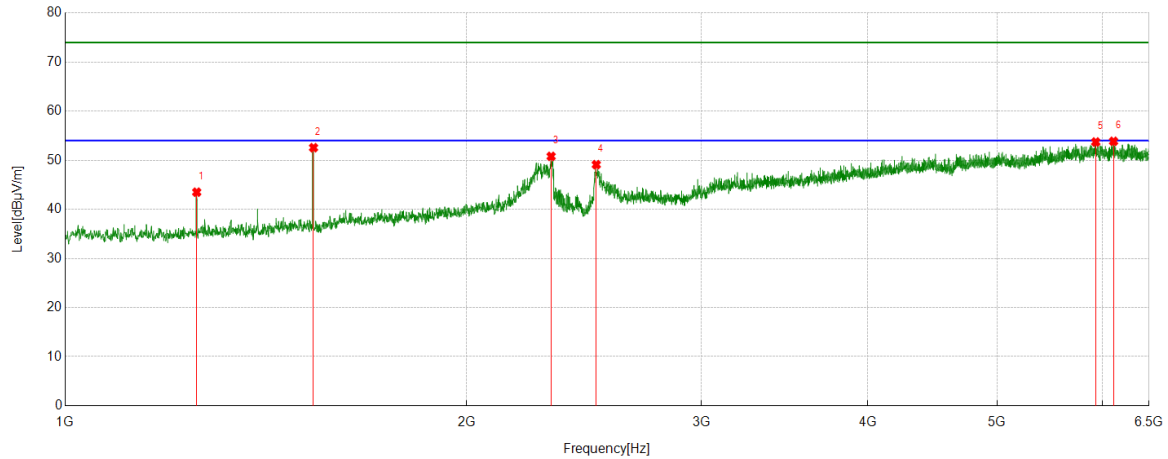


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.07	-1.57	43.50	74.00	-30.50	Horizontal
2	1535.6295	53.18	-0.62	52.56	74.00	-21.44	Horizontal
3	2314.6643	46.26	4.53	50.79	74.00	-23.21	Horizontal
4	2502.3753	43.22	5.88	49.10	74.00	-24.90	Horizontal
5	5928.6161	34.83	18.89	53.72	74.00	-20.28	Horizontal
6	6113.5767	35.80	18.06	53.86	74.00	-20.14	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	LCH	Vertical	PASS

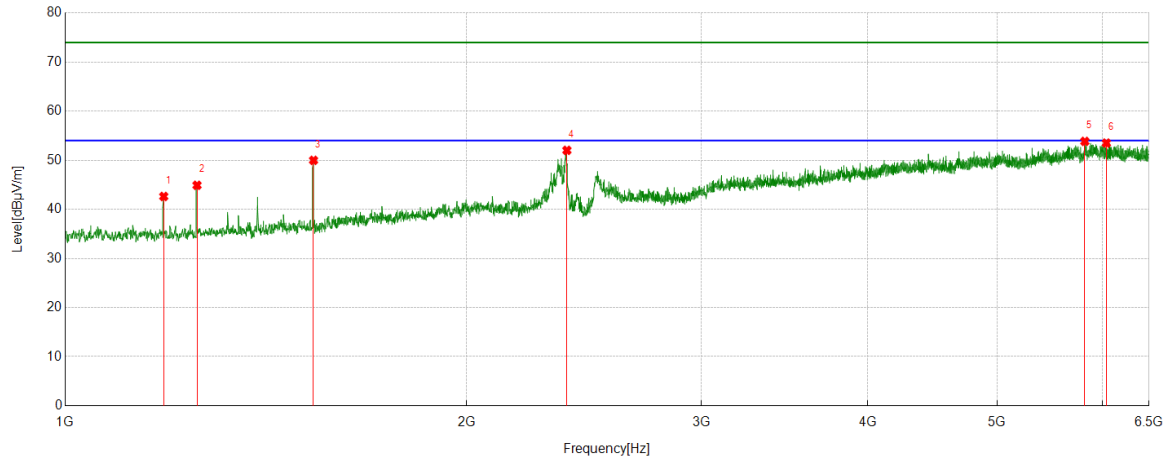


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	44.62	-2.00	42.62	74.00	-31.38	Vertical
2	1255.7820	46.47	-1.57	44.90	74.00	-29.10	Vertical
3	1535.6295	50.60	-0.62	49.98	74.00	-24.02	Vertical
4	2378.6098	47.19	4.83	52.02	74.00	-21.98	Vertical
5	5817.9147	35.30	18.54	53.84	74.00	-20.16	Vertical
6	6037.9422	35.60	17.90	53.50	74.00	-20.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Horizontal	PASS

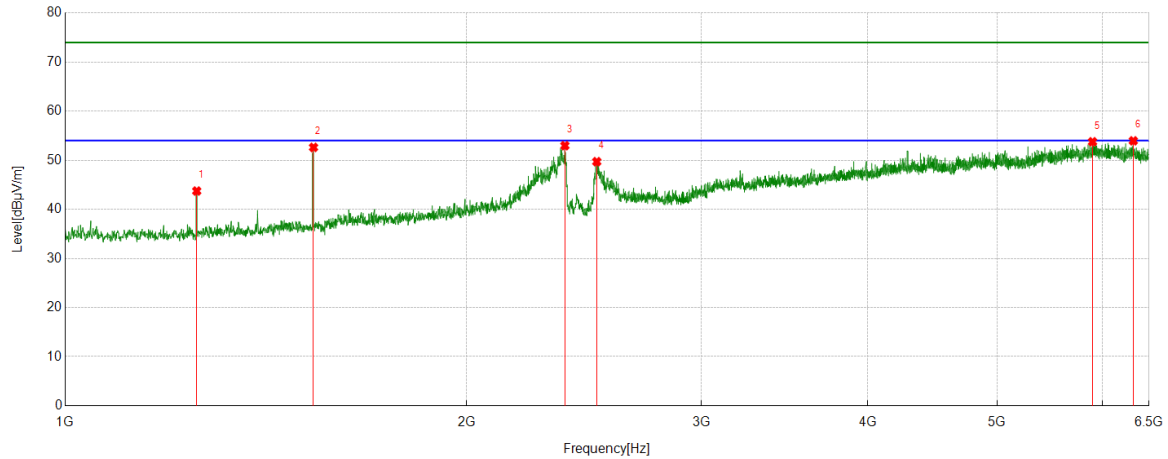


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	45.30	-1.57	43.73	74.00	-30.27	Horizontal
2	1535.6295	53.24	-0.62	52.62	74.00	-21.38	Horizontal
3	2370.3588	48.16	4.81	52.97	74.00	-21.03	Horizontal
4	2504.4381	43.82	5.89	49.71	74.00	-24.29	Horizontal
5	5895.6120	35.81	17.95	53.76	74.00	-20.24	Horizontal
6	6326.0408	34.95	19.01	53.96	74.00	-20.04	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	MCH	Vertical	PASS

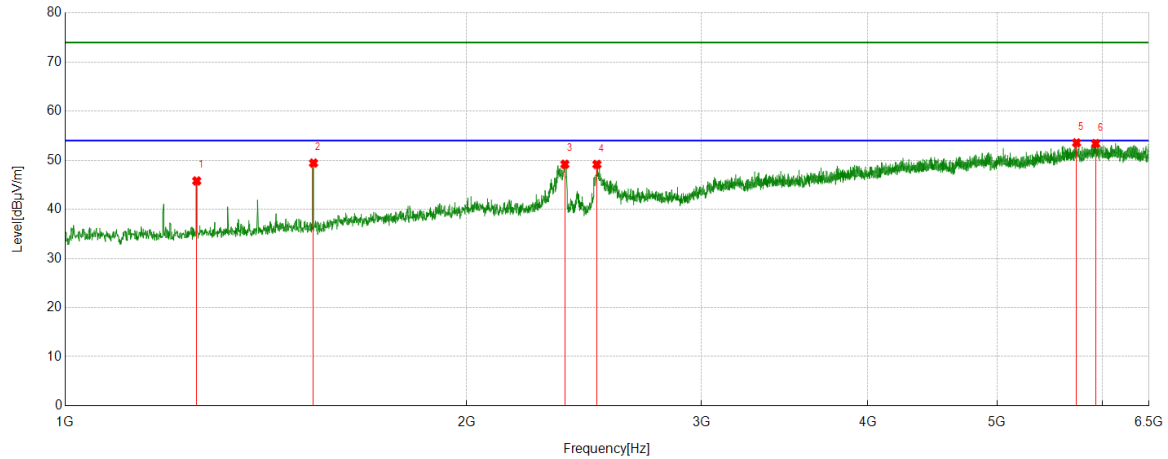


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.35	-1.57	45.78	74.00	-28.22	Vertical
2	1535.6295	50.04	-0.62	49.42	74.00	-24.58	Vertical
3	2370.3588	44.37	4.81	49.18	74.00	-24.82	Vertical
4	2505.1256	43.25	5.90	49.15	74.00	-24.85	Vertical
5	5735.4044	35.93	17.61	53.54	74.00	-20.46	Vertical
6	5927.9285	34.50	18.88	53.38	74.00	-20.62	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Horizontal	PASS

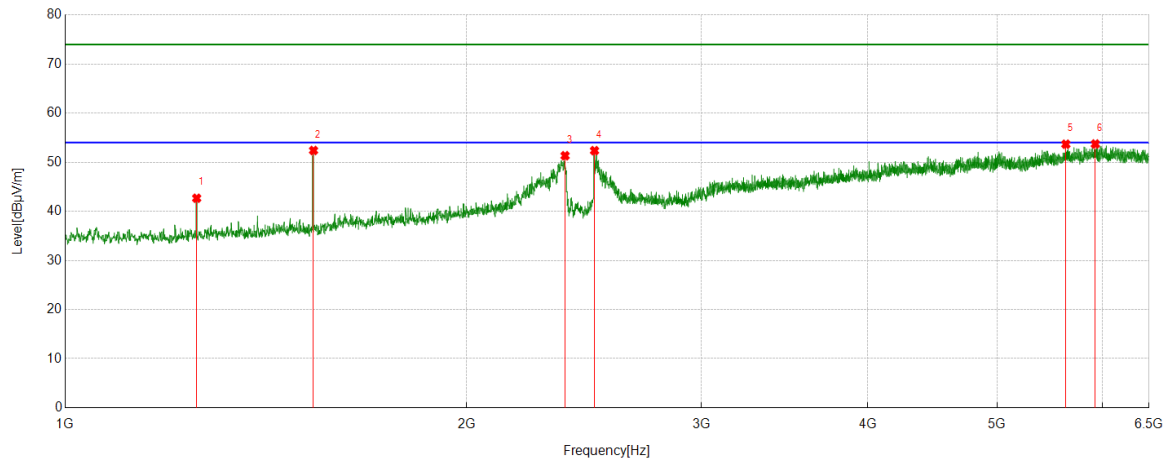


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.24	-1.57	42.67	74.00	-31.33	Horizontal
2	1535.6295	53.02	-0.62	52.40	74.00	-21.60	Horizontal
3	2371.0464	46.51	4.82	51.33	74.00	-22.67	Horizontal
4	2494.8119	46.52	5.84	52.36	74.00	-21.64	Horizontal
5	5630.2038	36.07	17.60	53.67	74.00	-20.33	Horizontal
6	5924.4906	34.93	18.79	53.72	74.00	-20.28	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE40	HCH	Vertical	PASS

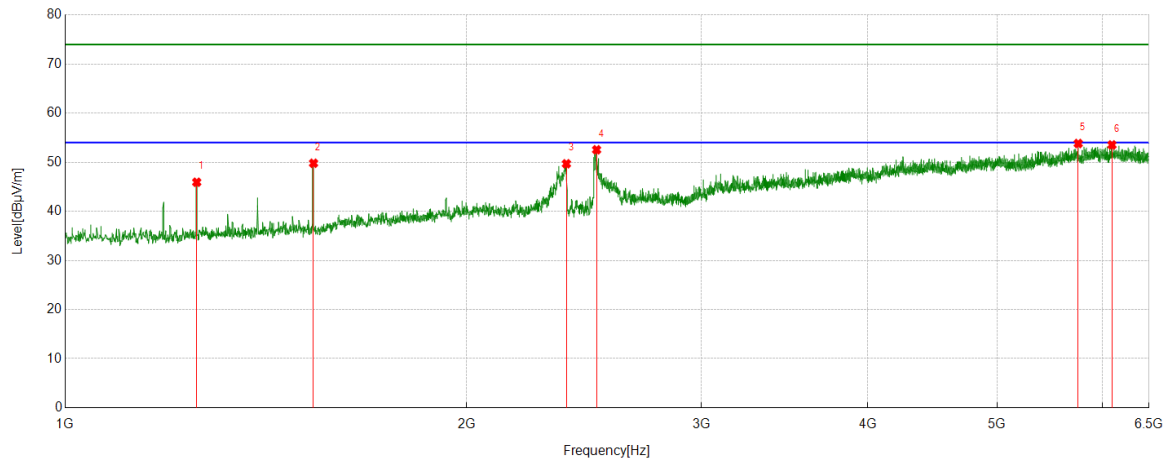

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	47.50	-1.57	45.93	74.00	-28.07	Vertical
2	1535.6295	50.42	-0.62	49.80	74.00	-24.20	Vertical
3	2376.5471	44.86	4.83	49.69	74.00	-24.31	Vertical
4	2503.7505	46.65	5.89	52.54	74.00	-21.46	Vertical
5	5751.9065	36.09	17.73	53.82	74.00	-20.18	Vertical
6	6097.0746	35.23	18.30	53.53	74.00	-20.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

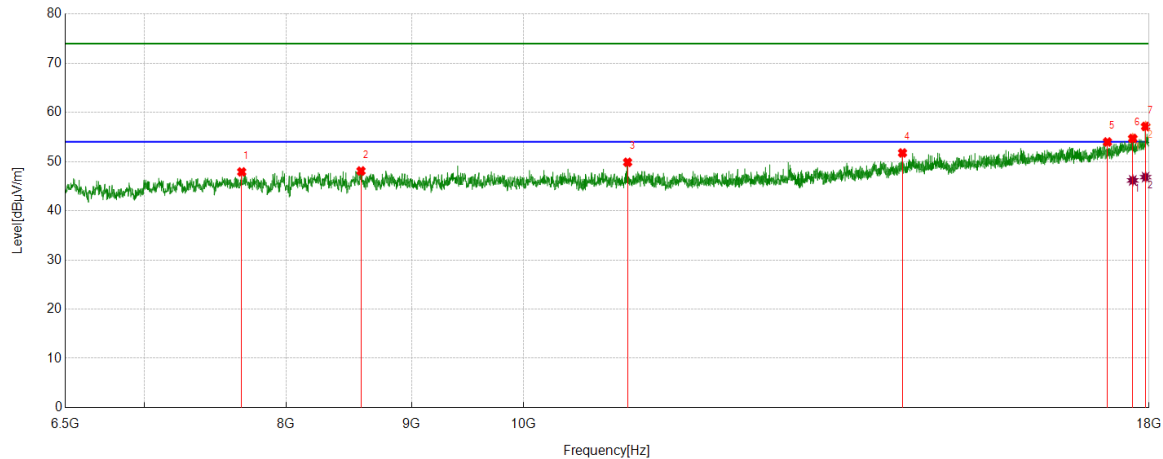

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7673.1466	42.65	5.25	47.90	74.00	-26.10	Horizontal
2	8583.1979	41.82	6.27	48.09	74.00	-25.91	Horizontal
3	11027.2534	42.60	7.26	49.86	74.00	-24.14	Horizontal
4	14277.8472	39.61	12.15	51.76	74.00	-22.24	Horizontal
5	17309.9137	37.02	16.97	53.99	74.00	-20.01	Horizontal
6	17726.8409	36.20	18.51	54.71	74.00	-19.29	Horizontal
7	17942.4928	37.69	19.46	57.15	74.00	-16.85	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17726.8409	27.67	18.51	46.18	54.00	-7.82	Horizontal
2	17942.4928	27.38	19.46	46.84	54.00	-7.16	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

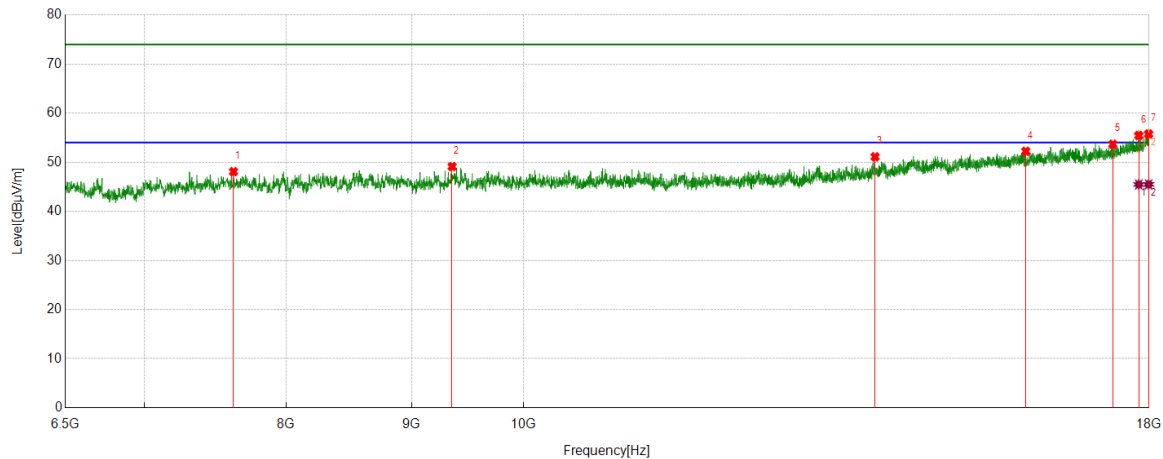

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7614.2018	43.07	5.02	48.09	74.00	-25.91	Vertical
2	9350.9189	42.66	6.46	49.12	74.00	-24.88	Vertical
3	13914.1143	39.73	11.38	51.11	74.00	-22.89	Vertical
4	16031.8165	37.78	14.45	52.23	74.00	-21.77	Vertical
5	17397.6122	36.32	17.35	53.67	74.00	-20.33	Vertical
6	17827.4784	36.38	19.07	55.45	74.00	-18.55	Vertical
7	17992.8116	35.98	19.78	55.76	74.00	-18.24	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17827.4784	26.40	19.07	45.47	54.00	-8.53	Vertical
2	17992.8116	25.71	19.78	45.49	54.00	-8.51	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

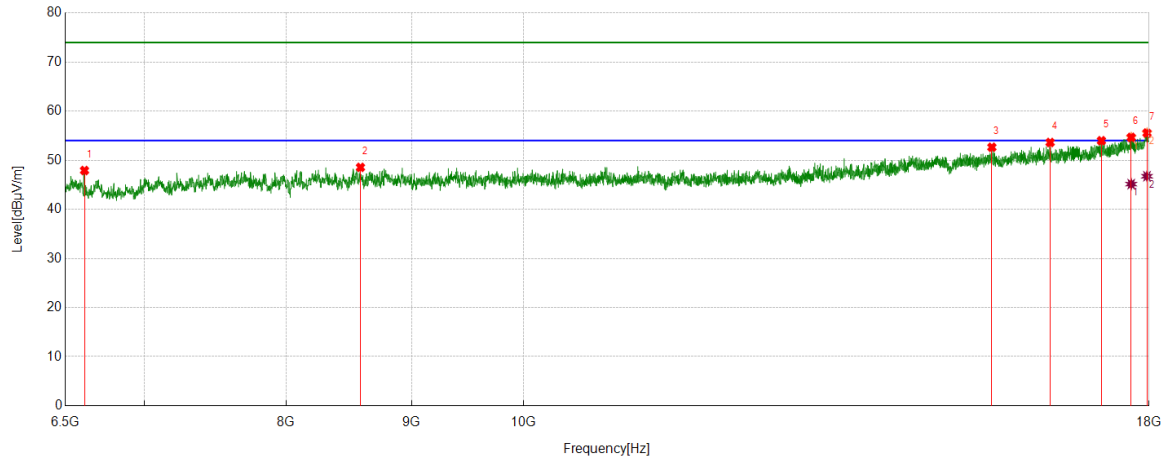

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6619.3274	44.56	3.35	47.91	74.00	-26.09	Horizontal
2	8578.8849	42.13	6.42	48.55	74.00	-25.45	Horizontal
3	15528.6286	38.86	13.79	52.65	74.00	-21.35	Horizontal
4	16402.7378	38.58	15.04	53.62	74.00	-20.38	Horizontal
5	17212.1515	37.21	16.77	53.98	74.00	-20.02	Horizontal
6	17700.9626	36.38	18.28	54.66	74.00	-19.34	Horizontal
7	17965.4957	35.92	19.63	55.55	74.00	-18.45	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17700.9626	26.86	18.28	45.14	54.00	-8.86	Horizontal
2	17965.4957	27.11	19.63	46.74	54.00	-7.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

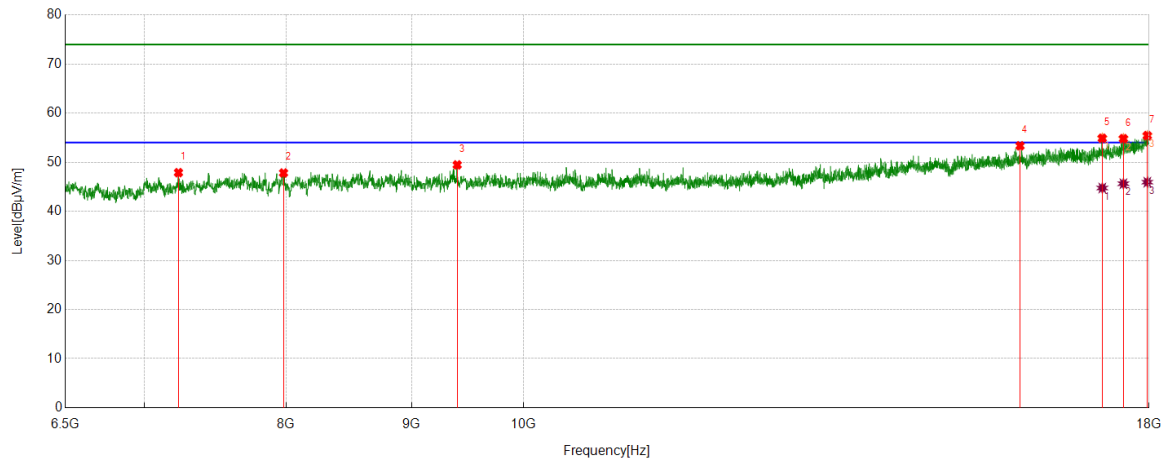

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7230.3413	43.97	3.91	47.88	74.00	-26.12	Vertical
2	7980.8101	42.44	5.38	47.82	74.00	-26.18	Vertical
3	9395.4869	42.88	6.58	49.46	74.00	-24.54	Vertical
4	15945.5557	38.87	14.48	53.35	74.00	-20.65	Vertical
5	17226.5283	38.18	16.71	54.89	74.00	-19.11	Vertical
6	17571.5714	36.91	17.90	54.81	74.00	-19.19	Vertical
7	17971.2464	35.78	19.65	55.43	74.00	-18.57	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17226.5283	28.04	16.71	44.75	54.00	-9.25	Vertical
2	17571.5714	27.73	17.90	45.63	54.00	-8.37	Vertical
3	17971.2464	26.29	19.65	45.94	54.00	-8.06	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

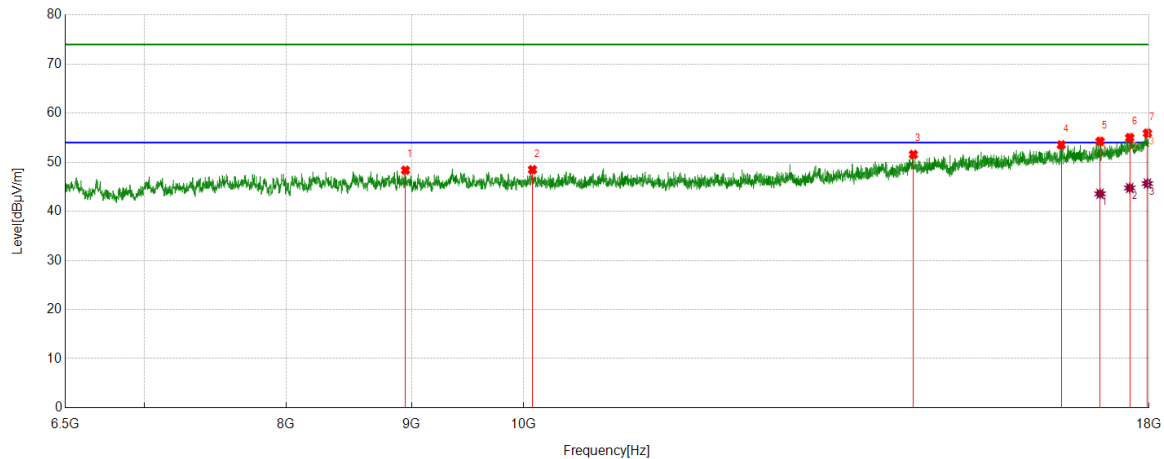

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8949.8062	42.09	6.28	48.37	74.00	-25.63	Horizontal
2	10084.1355	41.84	6.64	48.48	74.00	-25.52	Horizontal
3	14424.4906	38.69	12.89	51.58	74.00	-22.42	Horizontal
4	16575.2594	37.70	15.85	53.55	74.00	-20.45	Horizontal
5	17190.5863	37.66	16.60	54.26	74.00	-19.74	Horizontal
6	17676.5221	36.90	18.10	55.00	74.00	-19.00	Horizontal
7	17972.6841	36.23	19.68	55.91	74.00	-18.09	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17190.5863	26.97	16.60	43.57	54.00	-10.43	Horizontal
2	17676.5221	26.66	18.10	44.76	54.00	-9.24	Horizontal
3	17972.6841	25.98	19.68	45.66	54.00	-8.34	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

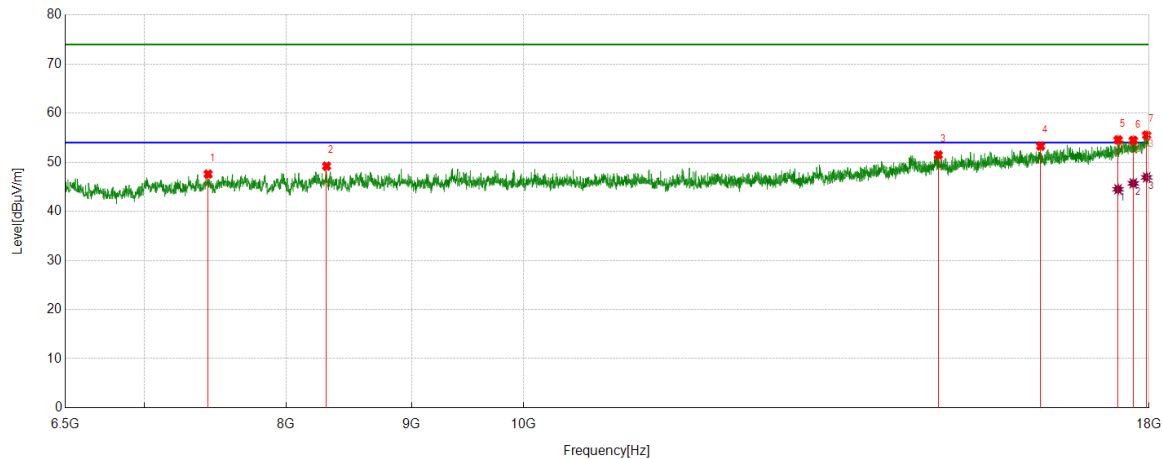

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7434.4918	43.36	4.23	47.59	74.00	-26.41	Vertical
2	8310.0388	42.86	6.34	49.20	74.00	-24.80	Vertical
3	14766.6583	38.55	12.94	51.49	74.00	-22.51	Vertical
4	16256.0945	38.06	15.22	53.28	74.00	-20.72	Vertical
5	17483.8730	36.91	17.65	54.56	74.00	-19.44	Vertical
6	17735.4669	35.93	18.53	54.46	74.00	-19.54	Vertical
7	17959.7450	35.89	19.63	55.52	74.00	-18.48	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17483.8730	26.84	17.65	44.49	54.00	-9.51	Vertical
2	17735.4669	27.17	18.53	45.70	54.00	-8.30	Vertical
3	17959.7450	27.29	19.63	46.92	54.00	-7.08	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

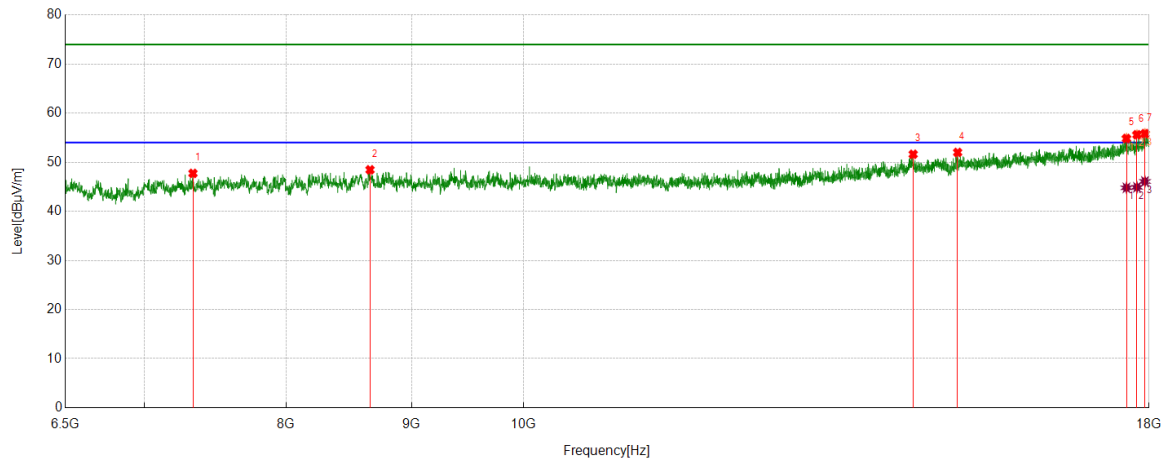

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7329.5412	43.88	3.85	47.73	74.00	-26.27	Horizontal
2	8656.5196	42.12	6.34	48.46	74.00	-25.54	Horizontal
3	14421.6152	38.71	12.91	51.62	74.00	-22.38	Horizontal
4	15036.9421	38.99	13.01	52.00	74.00	-22.00	Horizontal
5	17621.8902	36.78	18.06	54.84	74.00	-19.16	Horizontal
6	17797.2872	36.80	18.80	55.60	74.00	-18.40	Horizontal
7	17930.9914	36.46	19.37	55.83	74.00	-18.17	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17621.8902	26.73	18.06	44.79	54.00	-9.21	Horizontal
2	17797.2872	26.10	18.80	44.90	54.00	-9.10	Horizontal
3	17930.9914	26.72	19.37	46.09	54.00	-7.91	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

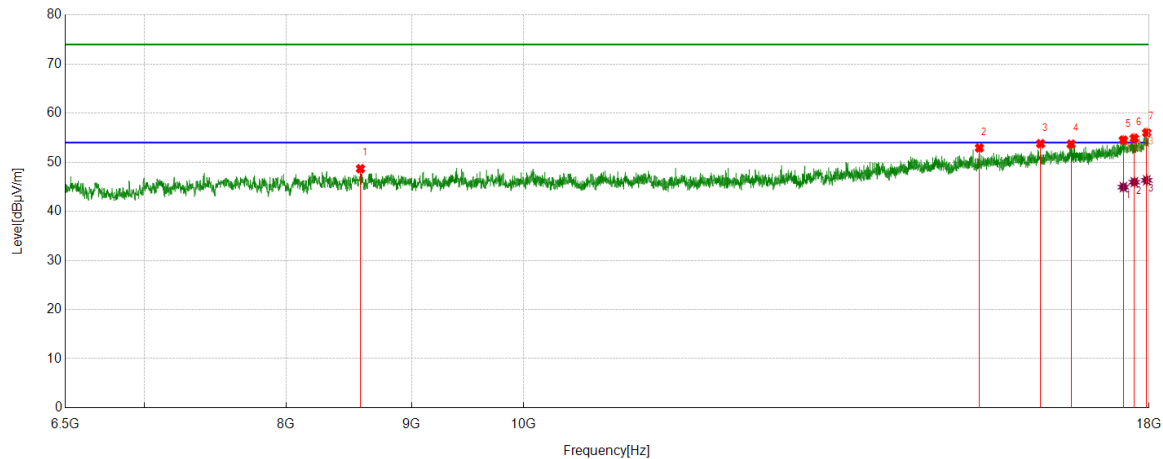

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8578.8849	42.26	6.42	48.68	74.00	-25.32	Vertical
2	15347.4809	39.34	13.58	52.92	74.00	-21.08	Vertical
3	16256.0945	38.56	15.22	53.78	74.00	-20.22	Vertical
4	16729.0911	37.52	16.17	53.69	74.00	-20.31	Vertical
5	17571.5714	36.61	17.90	54.51	74.00	-19.49	Vertical
6	17752.7191	36.31	18.58	54.89	74.00	-19.11	Vertical
7	17961.1826	36.39	19.63	56.02	74.00	-17.98	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17571.5714	27.03	17.90	44.93	54.00	-9.07	Vertical
2	17752.7191	27.37	18.58	45.95	54.00	-8.05	Vertical
3	17961.1826	26.69	19.63	46.32	54.00	-7.68	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

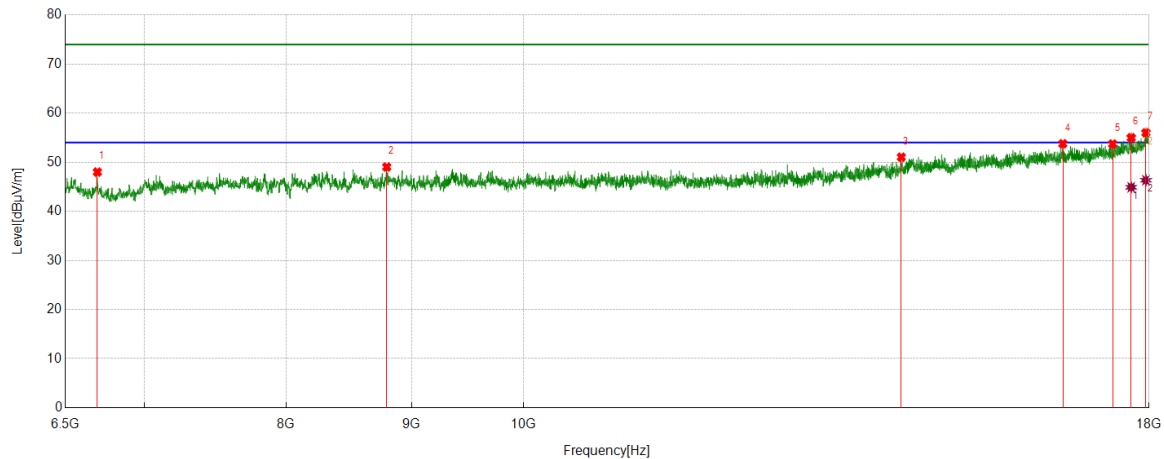

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6699.8375	44.46	3.54	48.00	74.00	-26.00	Horizontal
2	8793.0991	42.80	6.23	49.03	74.00	-24.97	Horizontal
3	14262.0328	38.99	12.05	51.04	74.00	-22.96	Horizontal
4	16599.7000	37.83	15.94	53.77	74.00	-20.23	Horizontal
5	17394.7368	36.37	17.35	53.72	74.00	-20.28	Horizontal
6	17700.9626	36.71	18.28	54.99	74.00	-19.01	Horizontal
7	17948.2435	36.53	19.48	56.01	74.00	-17.99	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17700.9626	26.62	18.28	44.90	54.00	-9.10	Horizontal
2	17948.2435	26.85	19.48	46.33	54.00	-7.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

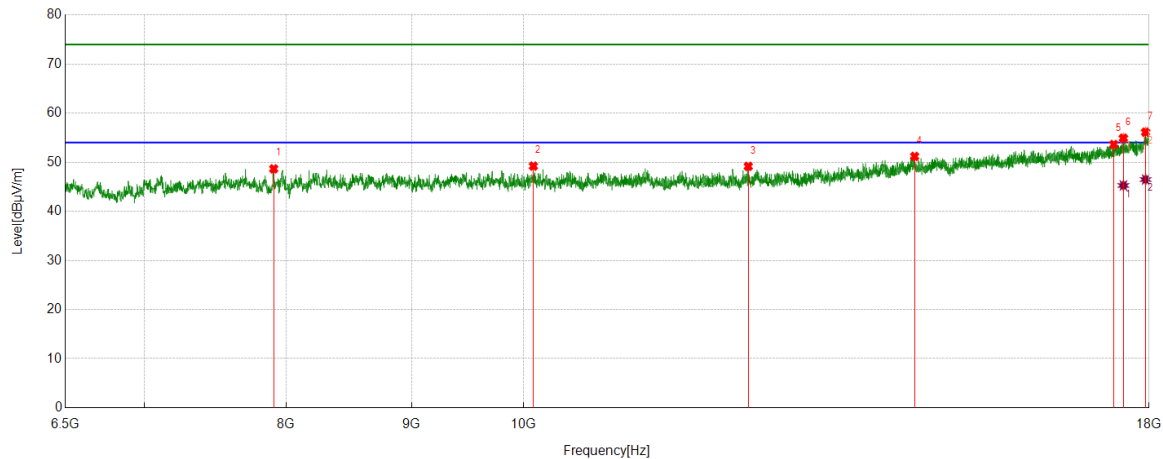

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7907.4884	43.09	5.57	48.66	74.00	-25.34	Vertical
2	10092.7616	42.69	6.52	49.21	74.00	-24.79	Vertical
3	12351.3564	40.73	8.43	49.16	74.00	-24.84	Vertical
4	14441.7427	38.31	12.88	51.19	74.00	-22.81	Vertical
5	17413.4267	36.22	17.40	53.62	74.00	-20.38	Vertical
6	17571.5714	37.01	17.90	54.91	74.00	-19.09	Vertical
7	17942.4928	36.67	19.46	56.13	74.00	-17.87	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17571.5714	27.37	17.90	45.27	54.00	-8.73	Vertical
2	17942.4928	27.02	19.46	46.48	54.00	-7.52	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

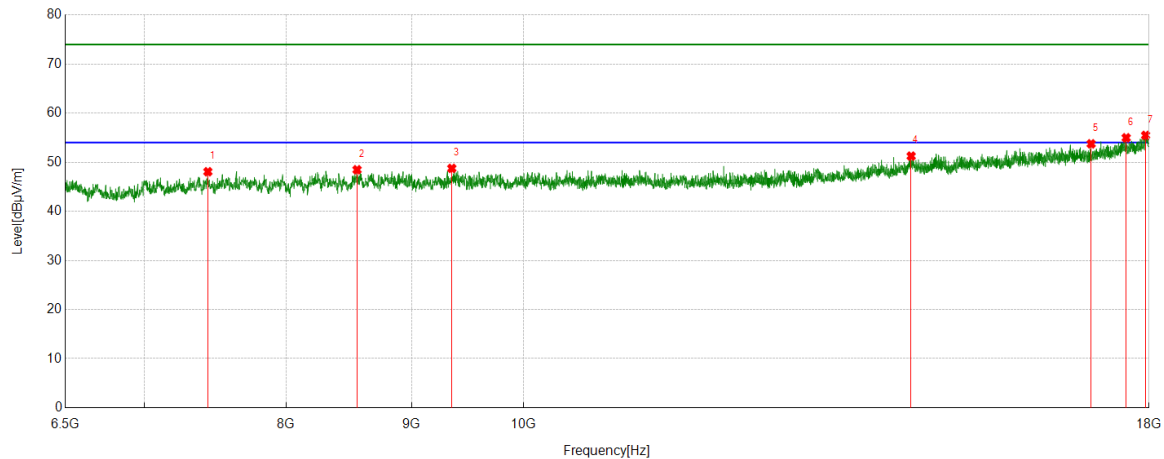

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7433.0541	43.83	4.24	48.07	74.00	-25.93	Horizontal
2	8551.5689	42.05	6.42	48.47	74.00	-25.53	Horizontal
3	9348.0435	42.32	6.43	48.75	74.00	-25.25	Horizontal
4	14394.2993	38.49	12.76	51.25	74.00	-22.75	Horizontal
5	17046.8184	37.50	16.25	53.75	74.00	-20.25	Horizontal
6	17617.5772	36.91	18.07	54.98	74.00	-19.02	Horizontal
7	17942.4928	36.01	19.46	55.47	74.00	-18.53	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17617.5772	26.85	18.07	44.92	54.00	-9.08	Horizontal
2	17942.4928	27.17	19.46	46.63	54.00	-7.37	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

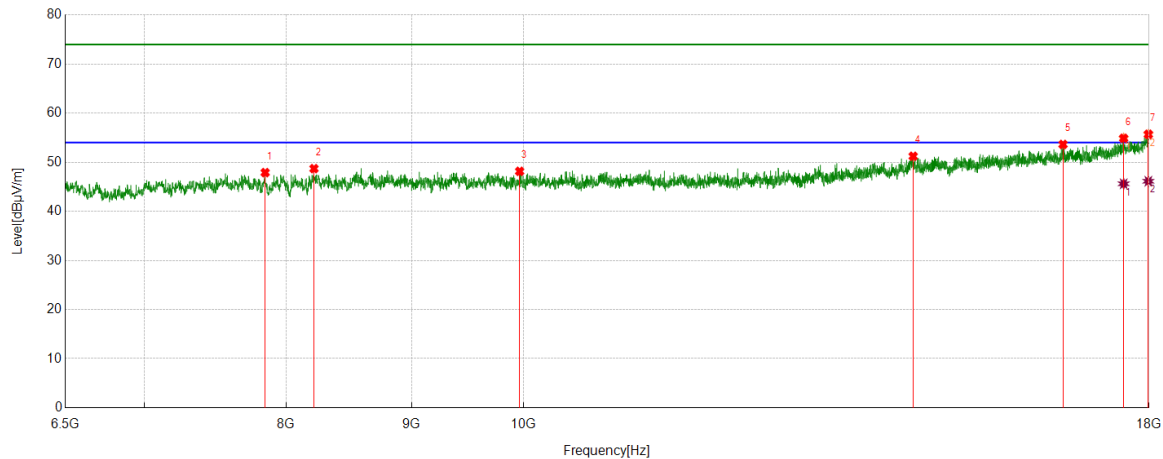

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7844.2305	42.51	5.38	47.89	74.00	-26.11	Vertical
2	8212.2765	42.77	5.93	48.70	74.00	-25.30	Vertical
3	9963.3704	41.51	6.64	48.15	74.00	-25.85	Vertical
4	14421.6152	38.31	12.91	51.22	74.00	-22.78	Vertical
5	16602.5753	37.71	15.92	53.63	74.00	-20.37	Vertical
6	17575.8845	36.95	17.93	54.88	74.00	-19.12	Vertical
7	17988.4986	35.88	19.81	55.69	74.00	-18.31	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17575.8845	27.68	17.93	45.61	54.00	-8.39	Vertical
2	17988.4986	26.32	19.81	46.13	54.00	-7.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

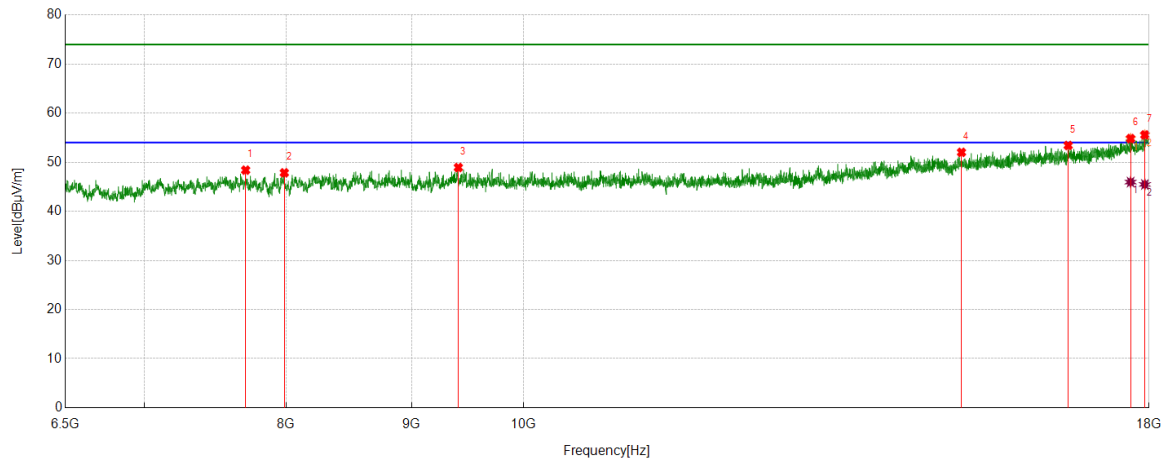

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9002	42.85	5.54	48.39	74.00	-25.61	Horizontal
2	7986.5608	42.33	5.52	47.85	74.00	-26.15	Horizontal
3	9405.5507	42.38	6.55	48.93	74.00	-25.07	Horizontal
4	15091.5739	38.80	13.22	52.02	74.00	-21.98	Horizontal
5	16683.0854	37.75	15.67	53.42	74.00	-20.58	Horizontal
6	17690.8989	36.63	18.19	54.82	74.00	-19.18	Horizontal
7	17929.5537	36.20	19.37	55.57	74.00	-18.43	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17690.8989	27.77	18.19	45.96	54.00	-8.04	Horizontal
2	17929.5537	26.11	19.37	45.48	54.00	-8.52	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

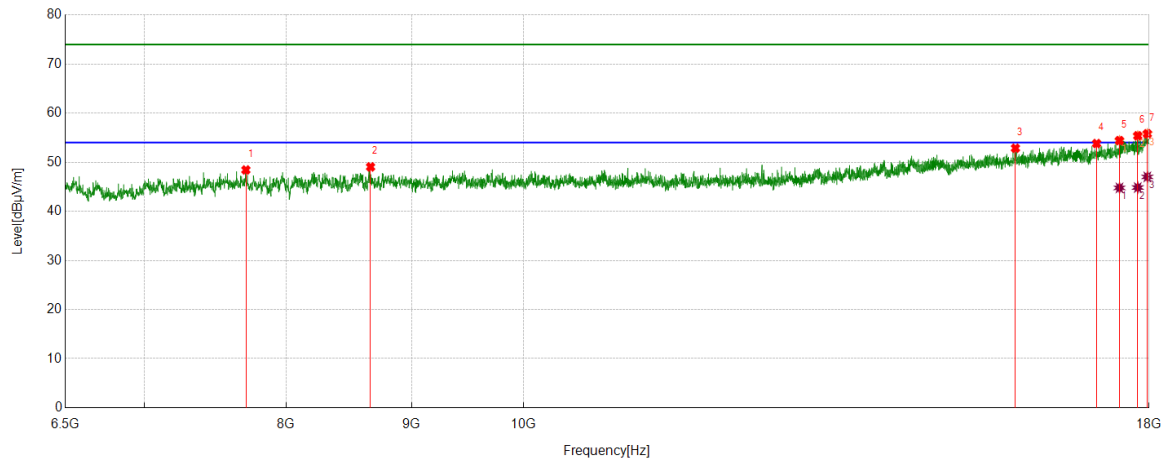

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7703.3379	42.96	5.47	48.43	74.00	-25.57	Vertical
2	8660.8326	42.62	6.43	49.05	74.00	-24.95	Vertical
3	15876.5471	38.15	14.71	52.86	74.00	-21.14	Vertical
4	17134.5168	37.29	16.52	53.81	74.00	-20.19	Vertical
5	17506.8759	36.79	17.62	54.41	74.00	-19.59	Vertical
6	17810.2263	36.45	18.94	55.39	74.00	-18.61	Vertical
7	17971.2464	36.15	19.65	55.80	74.00	-18.20	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17506.8759	27.16	17.62	44.78	54.00	-9.22	Vertical
2	17810.2263	25.91	18.94	44.85	54.00	-9.15	Vertical
3	17971.2464	27.37	19.65	47.02	54.00	-6.98	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

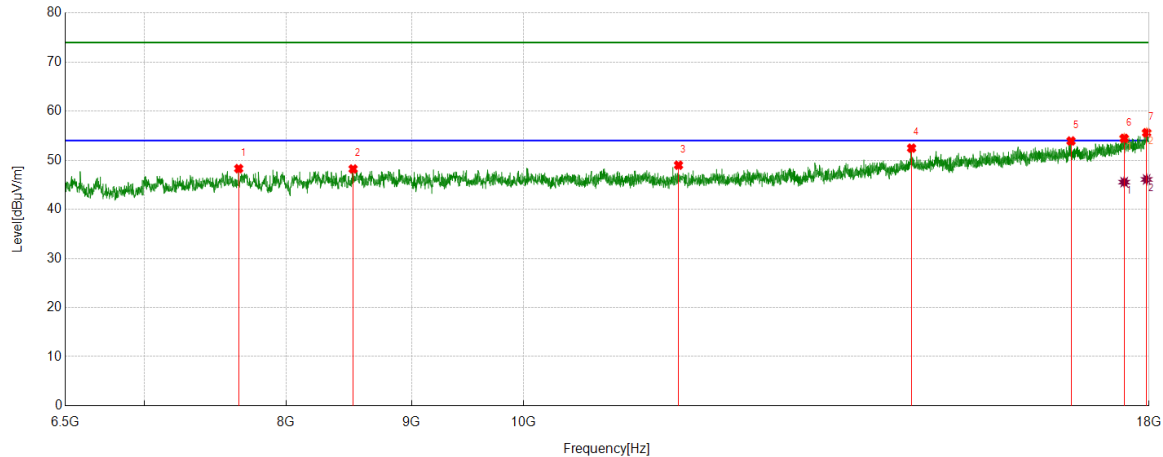

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7651.5814	42.93	5.36	48.29	74.00	-25.71	Horizontal
2	8519.9400	41.68	6.54	48.22	74.00	-25.78	Horizontal
3	11567.8210	41.27	7.72	48.99	74.00	-25.01	Horizontal
4	14400.0500	39.73	12.73	52.46	74.00	-21.54	Horizontal
5	16727.6535	37.73	16.19	53.92	74.00	-20.08	Horizontal
6	17584.5106	36.47	17.99	54.46	74.00	-19.54	Horizontal
7	17959.7450	35.97	19.63	55.60	74.00	-18.40	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17584.5106	27.55	17.99	45.54	54.00	-8.46	Horizontal
2	17959.7450	26.46	19.63	46.09	54.00	-7.91	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

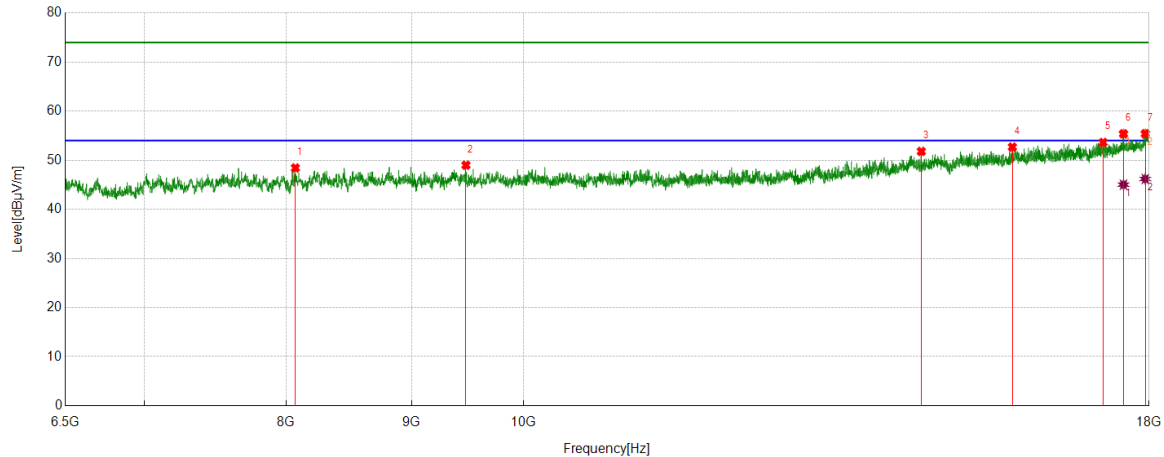

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8069.9462	42.73	5.70	48.43	74.00	-25.57	Vertical
2	9473.1216	42.54	6.45	48.99	74.00	-25.01	Vertical
3	14532.3165	39.09	12.71	51.80	74.00	-22.20	Vertical
4	15830.5413	38.24	14.45	52.69	74.00	-21.31	Vertical
5	17239.4674	36.84	16.78	53.62	74.00	-20.38	Vertical
6	17573.0091	37.47	17.92	55.39	74.00	-18.61	Vertical
7	17936.7421	35.99	19.42	55.41	74.00	-18.59	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17573.0091	27.11	17.92	45.03	54.00	-8.97	Vertical
2	17936.7421	26.77	19.42	46.19	54.00	-7.81	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

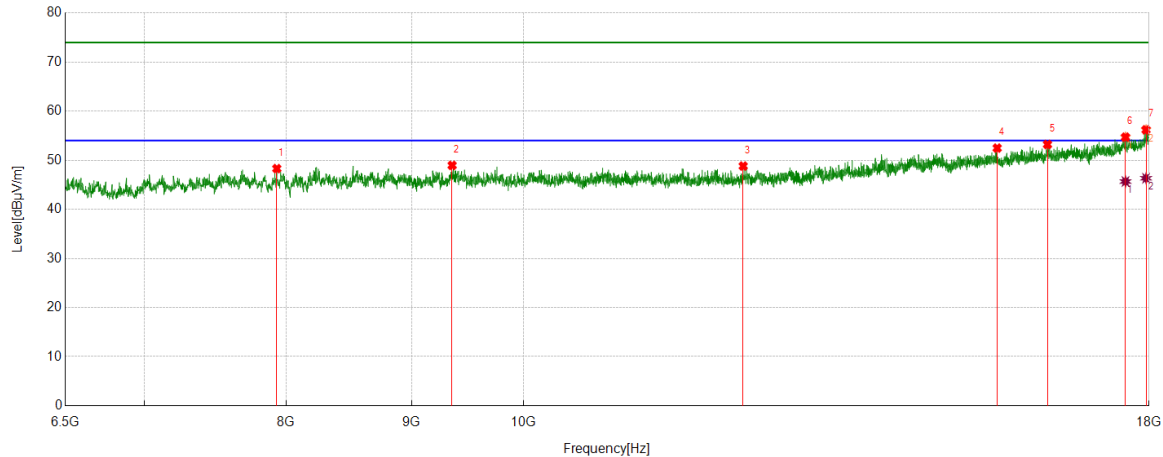

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7930.4913	42.58	5.72	48.30	74.00	-25.70	Horizontal
2	9350.9189	42.49	6.46	48.95	74.00	-25.05	Horizontal
3	12292.4116	40.15	8.66	48.81	74.00	-25.19	Horizontal
4	15606.2633	38.84	13.64	52.48	74.00	-21.52	Horizontal
5	16361.0451	38.19	15.02	53.21	74.00	-20.79	Horizontal
6	17606.0758	36.65	18.05	54.70	74.00	-19.30	Horizontal
7	17949.6812	36.71	19.49	56.20	74.00	-17.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17606.0758	27.62	18.05	45.67	54.00	-8.33	Horizontal
2	17949.6812	26.84	19.49	46.33	54.00	-7.67	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

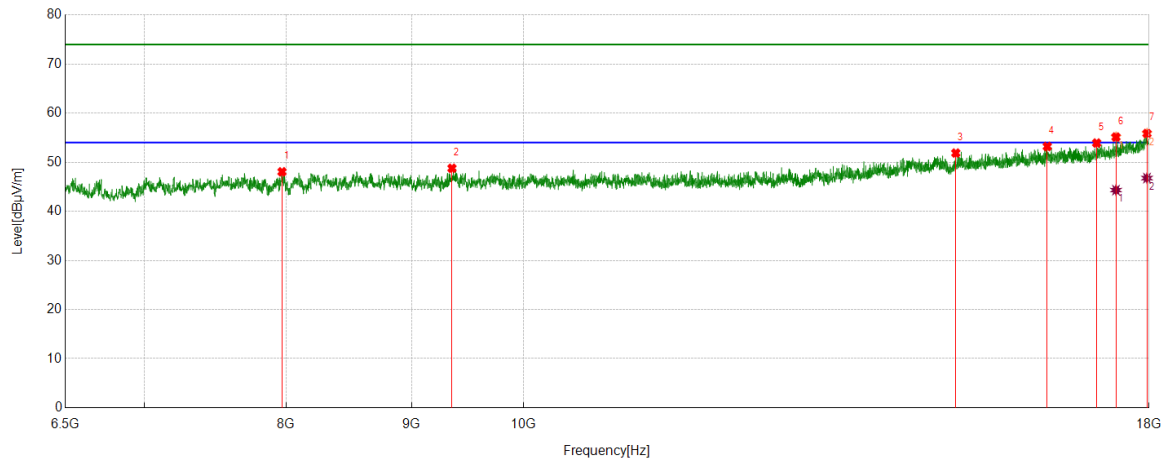

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7969.3087	42.61	5.44	48.05	74.00	-25.95	Vertical
2	9349.4812	42.31	6.46	48.77	74.00	-25.23	Vertical
3	15011.0639	38.95	12.92	51.87	74.00	-22.13	Vertical
4	16358.1698	38.19	15.02	53.21	74.00	-20.79	Vertical
5	17135.9545	37.43	16.48	53.91	74.00	-20.09	Vertical
6	17449.3687	37.54	17.59	55.13	74.00	-18.87	Vertical
7	17965.4957	36.23	19.63	55.86	74.00	-18.14	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17449.3687	26.73	17.59	44.32	54.00	-9.68	Vertical
2	17965.4957	27.14	19.63	46.77	54.00	-7.23	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

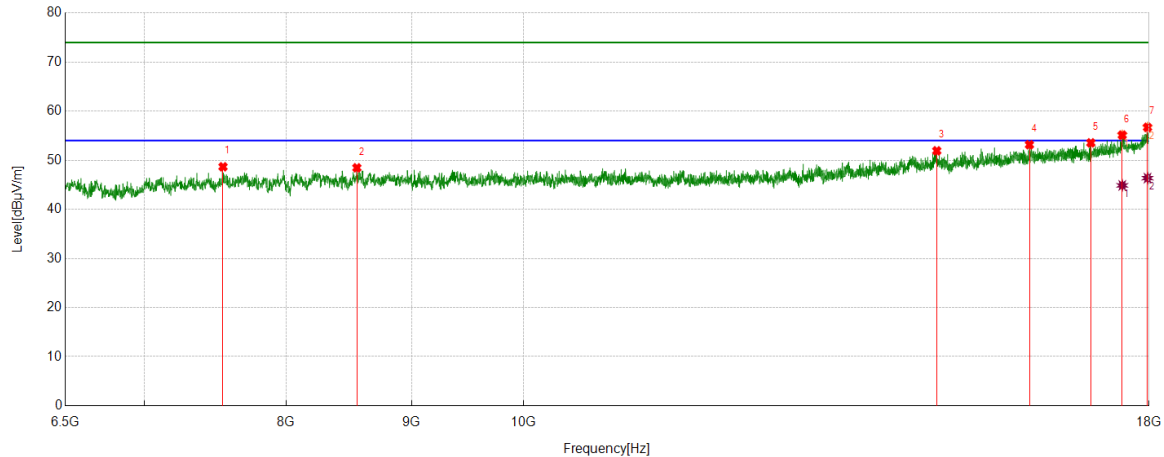

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7539.4424	44.10	4.57	48.67	74.00	-25.33	Horizontal
2	8550.1313	41.95	6.51	48.46	74.00	-25.54	Horizontal
3	14745.0931	39.04	12.88	51.92	74.00	-22.08	Horizontal
4	16086.4483	38.49	14.67	53.16	74.00	-20.84	Horizontal
5	17042.5053	37.29	16.25	53.54	74.00	-20.46	Horizontal
6	17552.8816	37.37	17.75	55.12	74.00	-18.88	Horizontal
7	17974.1218	37.00	19.70	56.70	74.00	-17.30	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17552.8816	27.13	17.75	44.88	54.00	-9.12	Horizontal
2	17974.1218	26.66	19.70	46.36	54.00	-7.64	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

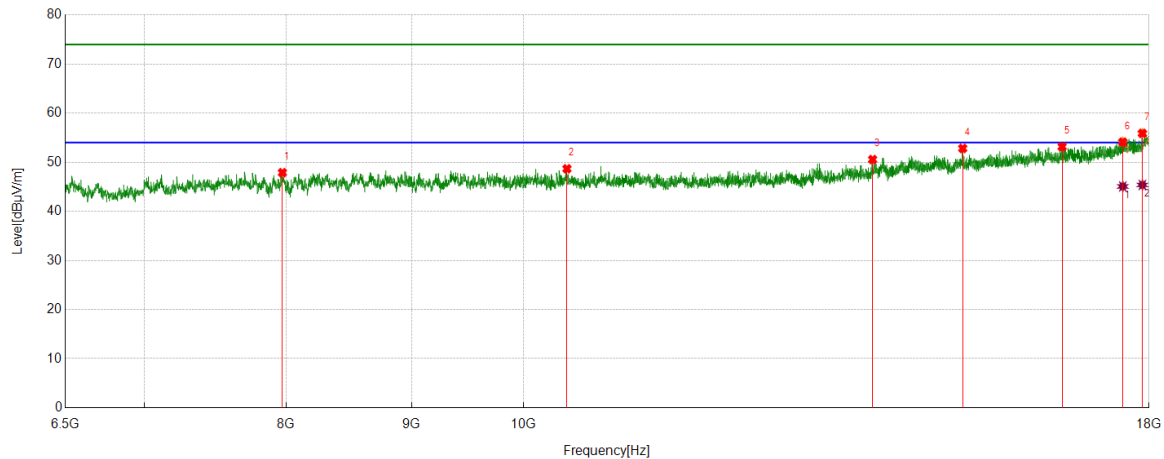

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7972.1840	42.49	5.39	47.88	74.00	-26.12	Vertical
2	10416.2395	42.03	6.64	48.67	74.00	-25.33	Vertical
3	13882.4853	39.06	11.50	50.56	74.00	-23.44	Vertical
4	15108.8261	39.59	13.23	52.82	74.00	-21.18	Vertical
5	16588.1985	37.16	16.00	53.16	74.00	-20.84	Vertical
6	17561.5077	36.32	17.79	54.11	74.00	-19.89	Vertical
7	17887.8610	36.61	19.28	55.89	74.00	-18.11	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17561.5077	27.28	17.79	45.07	54.00	-8.93	Vertical
2	17887.8610	26.10	19.28	45.38	54.00	-8.62	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

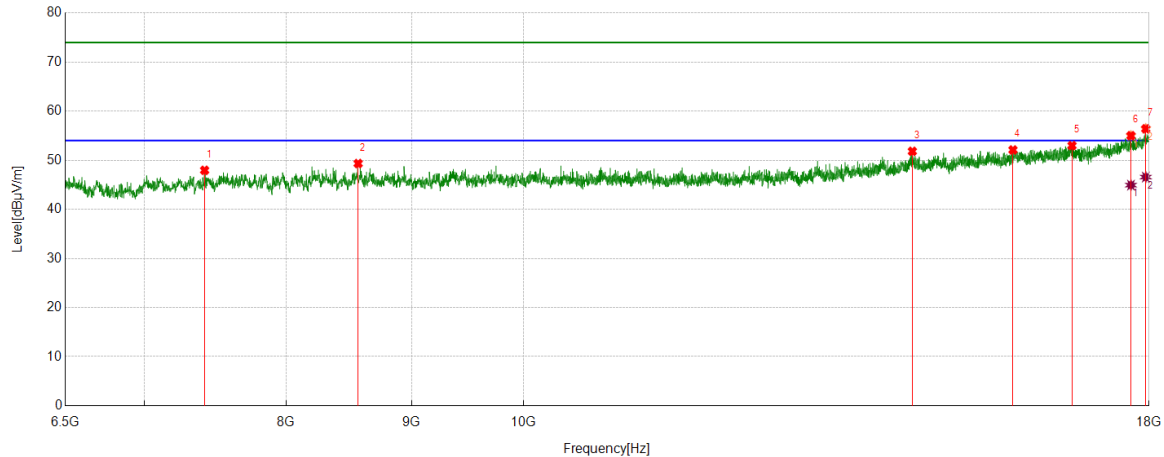

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7410.0513	43.71	4.24	47.95	74.00	-26.05	Horizontal
2	8560.1950	43.41	5.92	49.33	74.00	-24.67	Horizontal
3	14410.1138	38.93	12.89	51.82	74.00	-22.18	Horizontal
4	15839.1674	37.58	14.52	52.10	74.00	-21.90	Horizontal
5	16743.4679	36.91	16.07	52.98	74.00	-21.02	Horizontal
6	17696.6496	36.76	18.24	55.00	74.00	-19.00	Horizontal
7	17945.3682	36.93	19.48	56.41	74.00	-17.59	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17696.6496	26.69	18.24	44.93	54.00	-9.07	Horizontal
2	17945.3682	27.09	19.48	46.57	54.00	-7.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

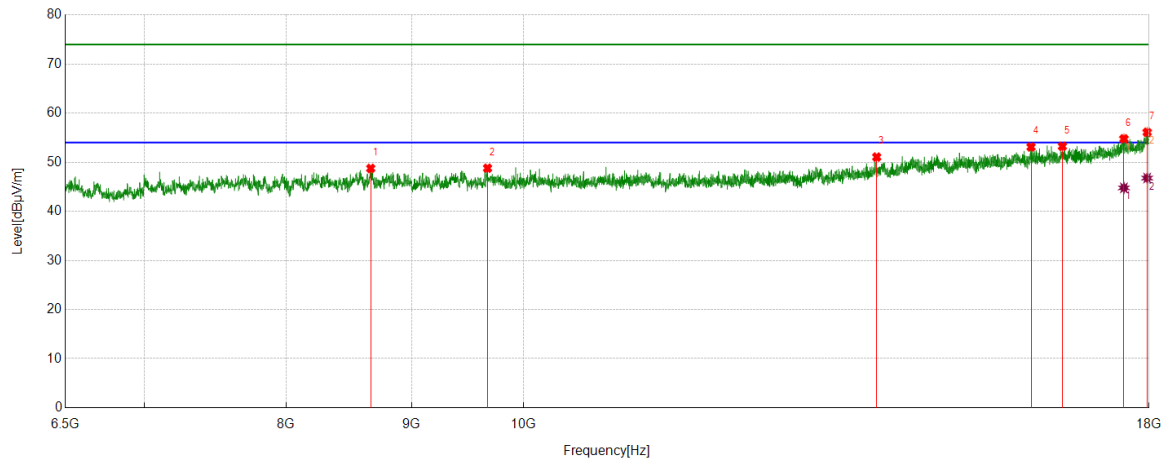

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8662.2703	42.38	6.37	48.75	74.00	-25.25	Vertical
2	9667.2084	42.33	6.46	48.79	74.00	-25.21	Vertical
3	13935.6795	39.68	11.38	51.06	74.00	-22.94	Vertical
4	16110.8889	38.23	14.88	53.11	74.00	-20.89	Vertical
5	16592.5116	37.23	16.02	53.25	74.00	-20.75	Vertical
6	17580.1975	36.82	17.95	54.77	74.00	-19.23	Vertical
7	17968.3710	36.48	19.63	56.11	74.00	-17.89	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1975	26.83	17.95	44.78	54.00	-9.22	Vertical
2	17968.3710	27.15	19.63	46.78	54.00	-7.22	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

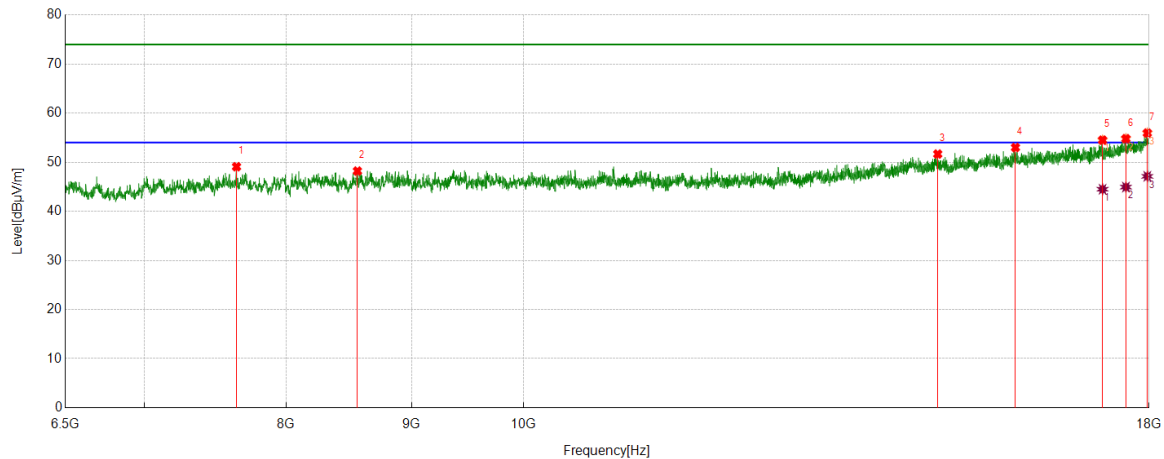

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7635.7670	43.92	5.17	49.09	74.00	-24.91	Horizontal
2	8554.4443	41.96	6.25	48.21	74.00	-25.79	Horizontal
3	14758.0323	38.73	12.94	51.67	74.00	-22.33	Horizontal
4	15876.5471	38.29	14.71	53.00	74.00	-21.00	Horizontal
5	17230.8414	37.79	16.72	54.51	74.00	-19.49	Horizontal
6	17613.2642	36.74	18.06	54.80	74.00	-19.20	Horizontal
7	17971.2464	36.30	19.65	55.95	74.00	-18.05	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17230.8414	27.78	16.72	44.50	54.00	-9.50	Horizontal
2	17613.2642	26.88	18.06	44.94	54.00	-9.06	Horizontal
3	17971.2464	27.48	19.65	47.13	54.00	-6.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

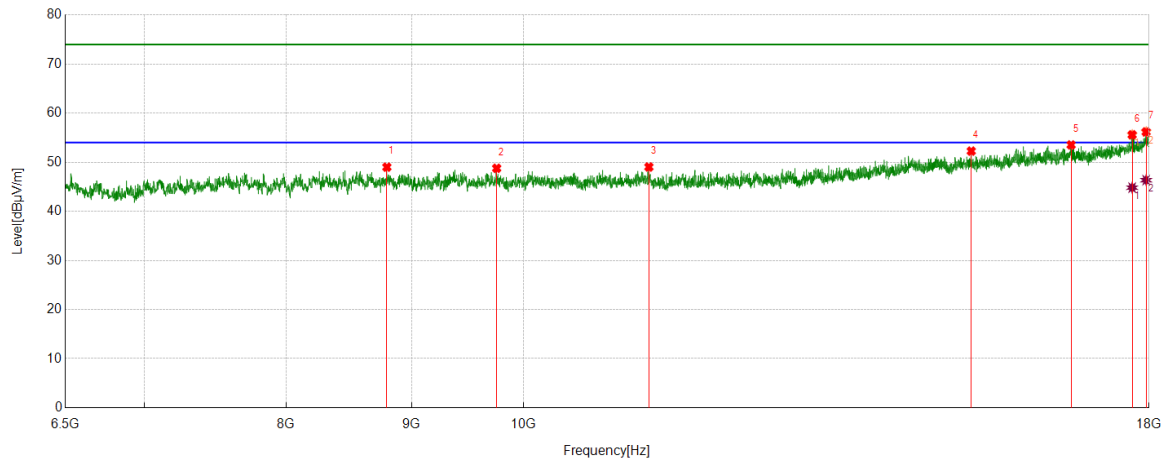

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8794.5368	42.78	6.22	49.00	74.00	-25.00	Vertical
2	9750.5938	42.30	6.47	48.77	74.00	-25.23	Vertical
3	11250.0938	41.90	7.13	49.03	74.00	-24.97	Vertical
4	15231.0289	38.86	13.41	52.27	74.00	-21.73	Vertical
5	16729.0911	37.36	16.17	53.53	74.00	-20.47	Vertical
6	17716.7771	37.15	18.44	55.59	74.00	-18.41	Vertical
7	17951.1189	36.68	19.50	56.18	74.00	-17.82	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17716.7771	26.38	18.44	44.82	54.00	-9.18	Vertical
2	17951.1189	26.85	19.50	46.35	54.00	-7.65	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Horizontal	PASS

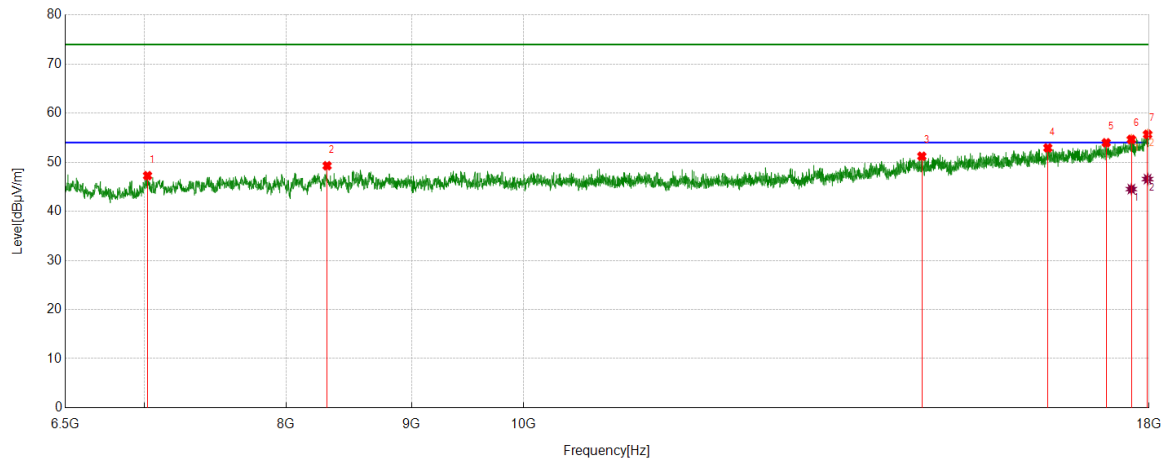

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7023.3154	43.54	3.72	47.26	74.00	-26.74	Horizontal
2	8314.3518	43.14	6.14	49.28	74.00	-24.72	Horizontal
3	14539.5049	38.53	12.69	51.22	74.00	-22.78	Horizontal
4	16366.7958	37.91	15.01	52.92	74.00	-21.08	Horizontal
5	17289.7862	36.96	17.01	53.97	74.00	-20.03	Horizontal
6	17703.8380	36.34	18.31	54.65	74.00	-19.35	Horizontal
7	17975.5594	35.95	19.73	55.68	74.00	-18.32	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17703.8380	26.22	18.31	44.53	54.00	-9.47	Horizontal
2	17975.5594	26.84	19.73	46.57	54.00	-7.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	LCH	Vertical	PASS

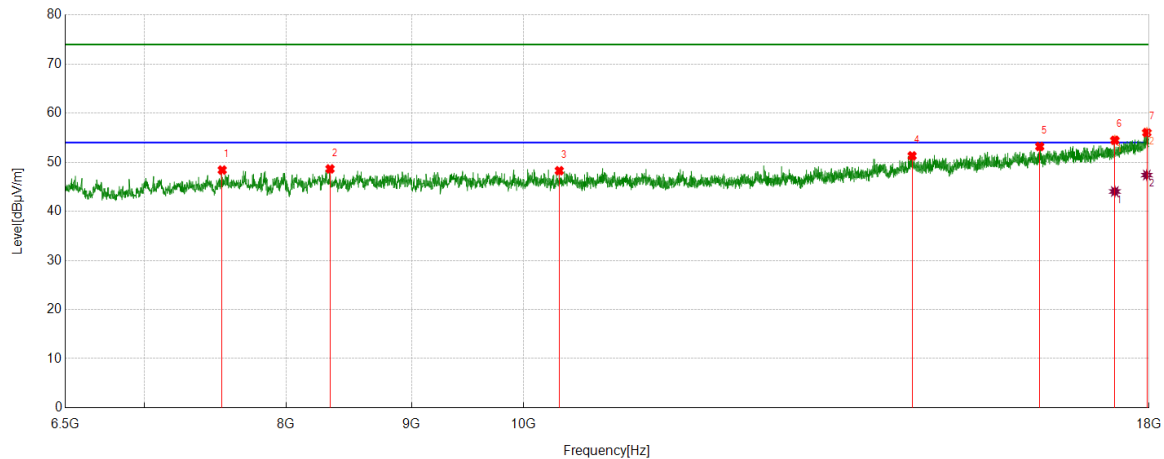

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7533.6917	43.97	4.44	48.41	74.00	-25.59	Vertical
2	8337.3547	42.71	5.93	48.64	74.00	-25.36	Vertical
3	10341.4802	41.50	6.77	48.27	74.00	-25.73	Vertical
4	14407.2384	38.45	12.85	51.30	74.00	-22.70	Vertical
5	16243.1554	37.95	15.25	53.20	74.00	-20.80	Vertical
6	17430.6788	36.91	17.57	54.48	74.00	-19.52	Vertical
7	17962.6203	36.41	19.63	56.04	74.00	-17.96	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17430.6788	26.47	17.57	44.04	54.00	-9.96	Vertical
2	17962.6203	27.76	19.63	47.39	54.00	-6.61	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AX HE20	MCH	Horizontal	PASS

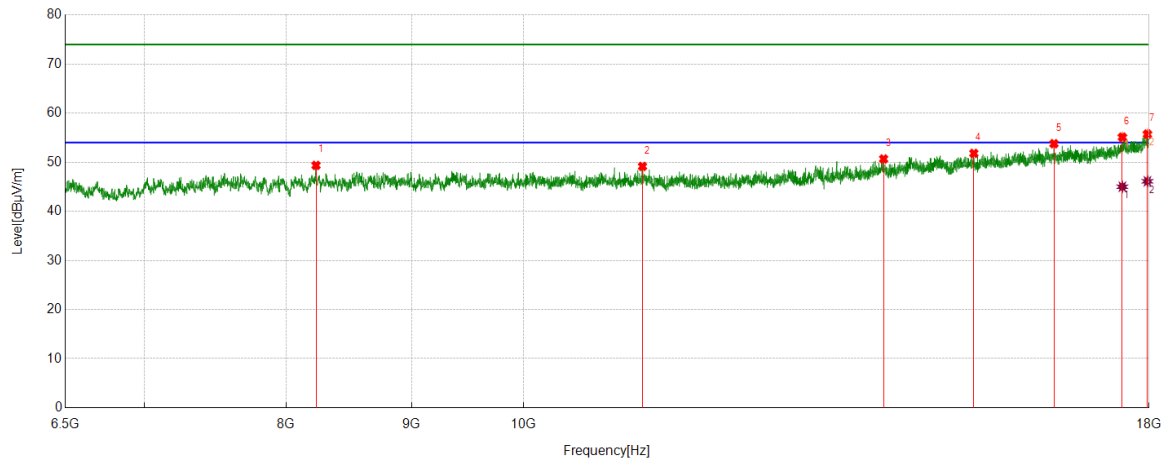

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8228.0910	43.26	6.10	49.36	74.00	-24.64	Horizontal
2	11182.5228	41.80	7.35	49.15	74.00	-24.85	Horizontal
3	14026.2533	38.76	11.91	50.67	74.00	-23.33	Horizontal
4	15268.4086	38.37	13.44	51.81	74.00	-22.19	Horizontal
5	16461.6827	37.97	15.81	53.78	74.00	-20.22	Horizontal
6	17554.3193	37.36	17.75	55.11	74.00	-18.89	Horizontal
7	17972.6841	36.05	19.68	55.73	74.00	-18.27	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17554.3193	27.26	17.75	45.01	54.00	-8.99	Horizontal
2	17972.6841	26.44	19.68	46.12	54.00	-7.88	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.