

TEST REPORT

Applicant: Augury systems Ltd.

Address of Applicant: Haazmaut 39, Haifa 3303320, Israel

Manufacturer: Augury systems Ltd.

Address of Manufacturer: Haazmaut 39, Haifa 3303320, Israel

Equipment Under Test (EUT)

Product Name: Halo R4010

Model No.: AA00005

FCC ID: 2A3XG-R4010

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.225

Date of sample receipt: October 25, 2024

Date of Test: October 25, 2024-January 03, 2025

Date of report issued: January 03, 2025

Test Result : PASS

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo

Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

NVLAP®
TESTING
NVLAP LAB CODE 600179-0

2 Version

Version No.	Date	Description
00	January 03, 2025	Original

Prepared By:




Project Engineer

Date:

January 03, 2025

Check By:



Reviewer

Date:

January 03, 2025

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 TEST FACILITY	6
5.4 TEST LOCATION.....	6
5.5 DESCRIPTION OF SUPPORT UNITS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT:	9
7.2 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	10
7.3 RADIATED EMISSION	12
7.4 CHANNEL BANDWIDTH AND 99% OCCUPIED BANDWIDTH	17
7.5 FREQUENCY STABILITY MEASUREMENT	19
8 TEST SETUP PHOTO	21
9 EUT CONSTRUCTIONAL DETAILS	21

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field Strength of Fundamental Emissions and Mask Measurement	15.225(a)(b)(c)	Pass
Radiated Emission	15.225(d)&15.209	Pass
20dB Emission Bandwidth	15.225&15.215	Pass
Frequency Stability Measurement	15.225(e)	Pass

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. N/A: Not applicable.

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Halo R4010
Model No.:	AA00005
Serial No.:	9352400150
Hardware Version:	1
Software Version:	1
Test sample(s) ID:	GTS2024100273-1
Sample(s) Status	Engineered sample
Operation Frequency:	13.56MHz
Channel Number:	1
Modulation:	ASK
Antenna type:	Internal Antenna
Antenna gain:	0dBi(Declare by applicant)
Power supply:	Battery 1: DC 3V Battery 2: DC 3V

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. Both battery 1 and battery 2 have been tested, and battery 1 is the worst case, so only battery 1 data is recorded in the report.

5.2 Test mode

Transmitter mode	Keep the EUT in continuously transmitting. New battery used in test		
Pre-test mode.			
GTS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	60.16	61.30	60.06
Final Test Mode:			
According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo)			

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

None

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Jun. 22, 2024	Jun. 21, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 11, 2024	Apr. 10, 2025
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Mar. 19, 2023	Mar. 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 17, 2023	Apr. 16, 2025
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Apr. 11, 2024	Apr. 10, 2025
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.12, 2024	Nov.11, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2024	Apr. 10, 2025
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2024	Apr. 10, 2025
10	Horn Antenna (15GH-40GHz)	SCHWARZBECK	01296	GTS691	Mar. 07, 2024	Mar. 06, 2025
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 12, 2024	Mar. 11, 2025
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2024	Apr. 10, 2025
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 07, 2024	Nov. 06, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2024	Apr. 10, 2025
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 18, 2024	Apr. 17, 2025
16	RE cable 1	GTS	N/A	GTS675	Jul. 02, 2024	Jul. 01, 2025
17	RE cable 2	GTS	N/A	GTS676	Jul. 02, 2024	Jul. 01, 2025
18	RE cable 3	GTS	N/A	GTS677	Jul. 02, 2024	Jul. 01, 2025
19	RE cable 4	GTS	N/A	GTS678	Jul. 02, 2024	Jul. 01, 2025
20	RE cable 5	GTS	N/A	GTS679	Jul. 02, 2024	Jul. 01, 2025
21	RE cable 6	GTS	N/A	GTS680	Jul. 02, 2024	Jul. 01, 2025
22	RE cable 7	GTS	N/A	GTS681	Jul. 05, 2024	Jul. 04, 2025
23	RE cable 8	GTS	N/A	GTS682	Jul. 05, 2024	Jul. 04, 2025
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

RF Conducted Test:

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 13, 2024	Apr. 12, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 13, 2024	Apr. 12, 2025
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 13, 2024	Apr. 12, 2025
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 13, 2024	Apr. 12, 2025
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 13, 2024	Apr. 12, 2025
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 13, 2024	Apr. 12, 2025
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 13, 2024	Apr. 12, 2025
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 13, 2024	Apr. 12, 2025
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 18, 2024	Apr. 17, 2025

General used equipment:


Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Apr. 18, 2024	Apr. 17, 2025

7 Test results and Measurement Data

7.1 Antenna requirement:


Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is internal antenna, reference to the appendix II for details	

7.2 Field Strength of Fundamental Emissions and Mask Measurement

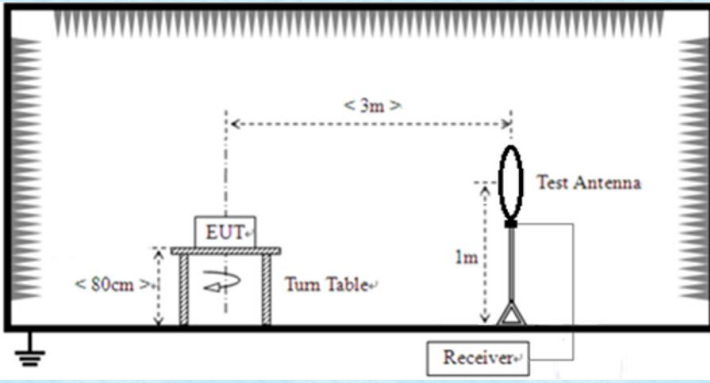Test Requirement:	FCC Part15 C Section 15.225(a)(b)(c)
Test Method:	ANSI C63.10:2013 & ANSI C63.4: 2014
Test site:	Measurement Distance: 3m
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=Auto
limit:	FCC Part 15.225 & 15.209 Distance Extrapolation Factor 30m to 3m Distance extrapolation = $40 \cdot \log(30/3) = 40 \text{ dB}$ 30m to 10m Distance extrapolation = $40 \cdot \log(30/10) = 19.08 \text{ dB}$ 10m to 3m Distance extrapolation = $40 \cdot \log(10/3) = 20.92 \text{ dB}$
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement data:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark
13.56	37.93	22.86	0.51	61.30	124	-62.7	QP

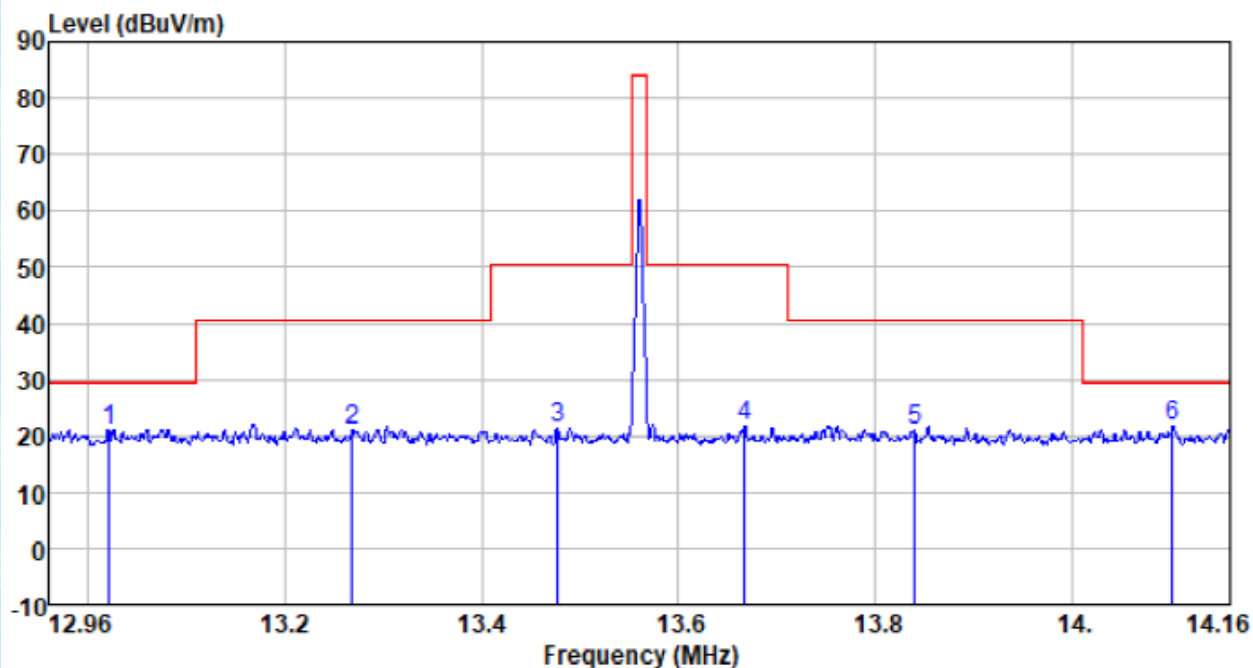

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
13.021	-0.14	20.50	0.65	0.00	21.01	29.50	-8.49	Peak
13.268	-0.02	20.45	0.66	0.00	21.09	40.50	-19.41	Peak
13.477	0.34	20.40	0.66	0.00	21.40	50.50	-29.10	Peak
13.667	0.87	20.37	0.67	0.00	21.91	50.50	-28.59	Peak
13.840	0.05	20.33	0.67	0.00	21.05	40.50	-19.45	Peak
14.101	0.66	20.28	0.68	0.00	21.62	29.50	-7.88	Peak

7.3 Radiated Emission

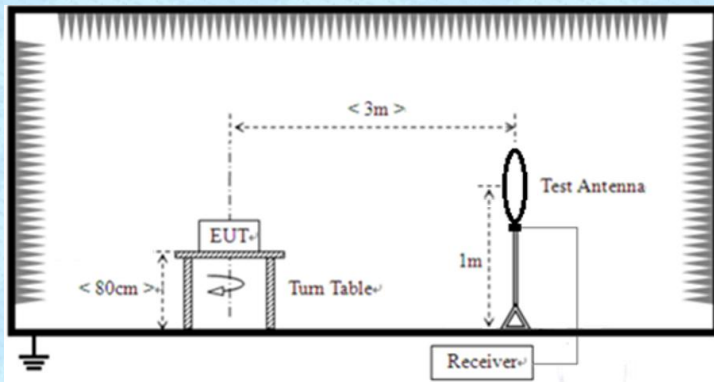
Test Requirement:	FCC Part15 C Section 15.225(d) and 15.209																												
Test Method:	ANSI C63.10: 2013 & ANSI C63.4: 2014																												
Test Frequency Range:	9KHz to 1000MHz																												
Test site:	Measurement Distance: 3m																												
Receiver setup:	Frequency	Detector	RBW	VBW	Remark																								
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
FCC Limit:	<table><thead><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr></thead><tbody><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></tbody></table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																												
Test setup:	Below 30MHz																												
																													
	Above 30MHz																												

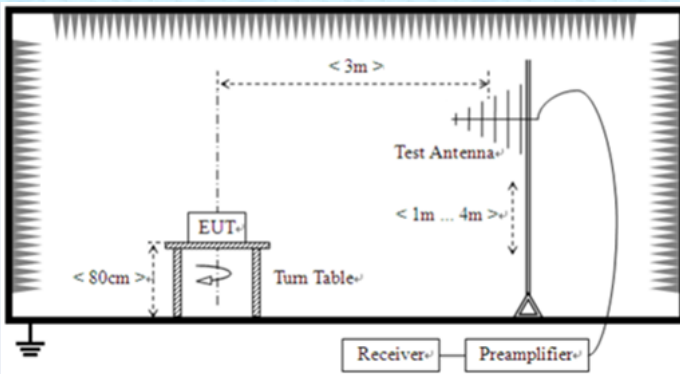						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3V					
Test results:	Pass					

Measurement data:

■ 9kHz~30MHz


Test data combines x, y, z-axis; the radiation emission more than 20dB below the limit

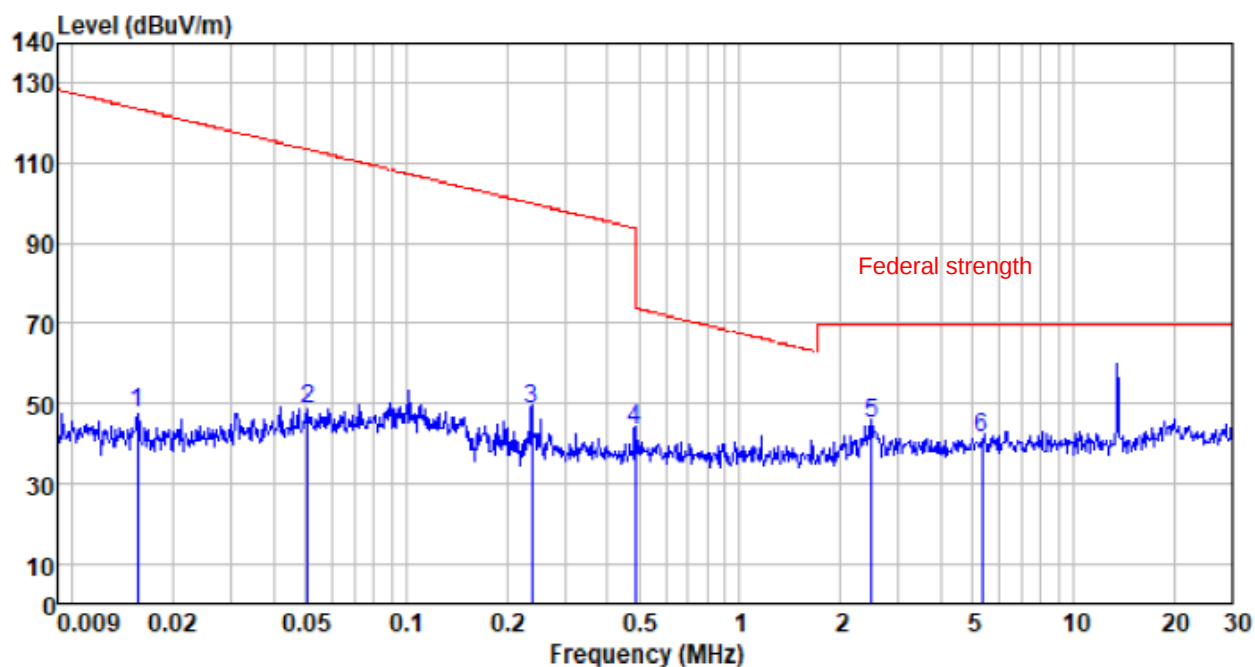

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
0.016	27.55	20.04	0.04	0.00	47.63	123.73	-76.10	QP
0.051	26.97	21.47	0.12	0.00	48.56	113.51	-64.95	QP
0.238	26.38	21.81	0.23	0.00	48.42	100.06	-51.64	QP
0.487	22.40	20.74	0.28	0.00	43.42	93.85	-50.43	QP
2.487	23.66	20.97	0.39	0.00	45.02	69.54	-24.52	QP
5.330	18.27	22.57	0.44	0.00	41.28	69.54	-28.26	QP


■ 30MHz~1GHz

Horizontal:

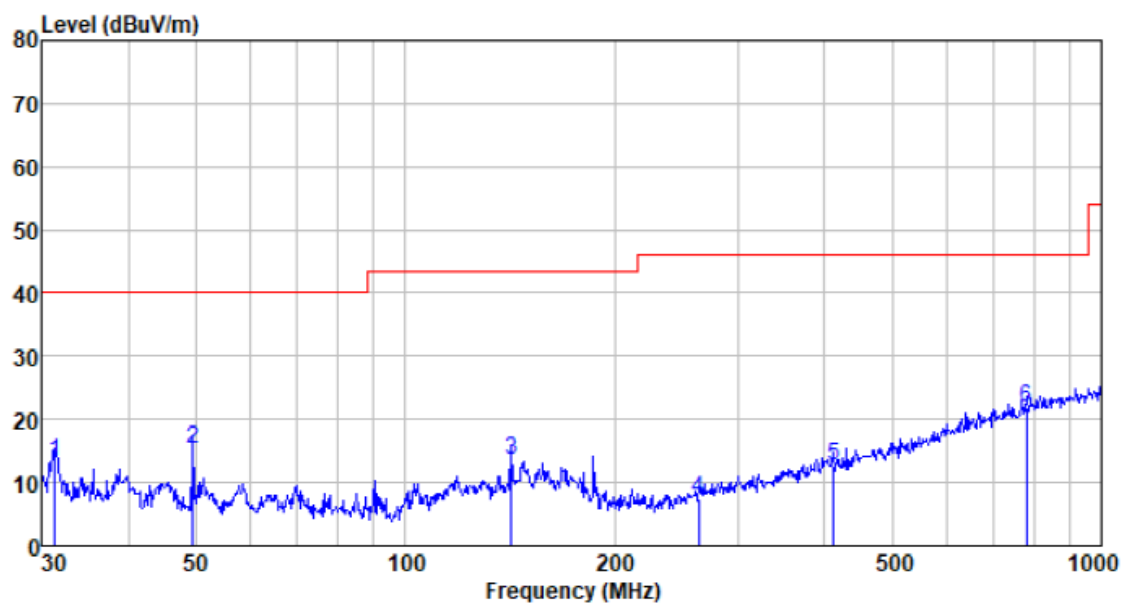


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	31.90	12.50	1.13	32.30	13.23	40.00	-26.77	QP
49.533	33.61	12.69	1.38	32.30	15.38	40.00	-24.62	QP
141.826	29.70	13.88	2.39	32.46	13.51	43.50	-29.99	QP
263.819	25.29	11.13	3.24	32.34	7.32	46.00	-38.68	QP
411.824	26.01	15.04	3.92	32.24	12.73	46.00	-33.27	QP
779.607	25.85	21.69	5.39	31.17	21.76	46.00	-24.24	QP

Vertical:

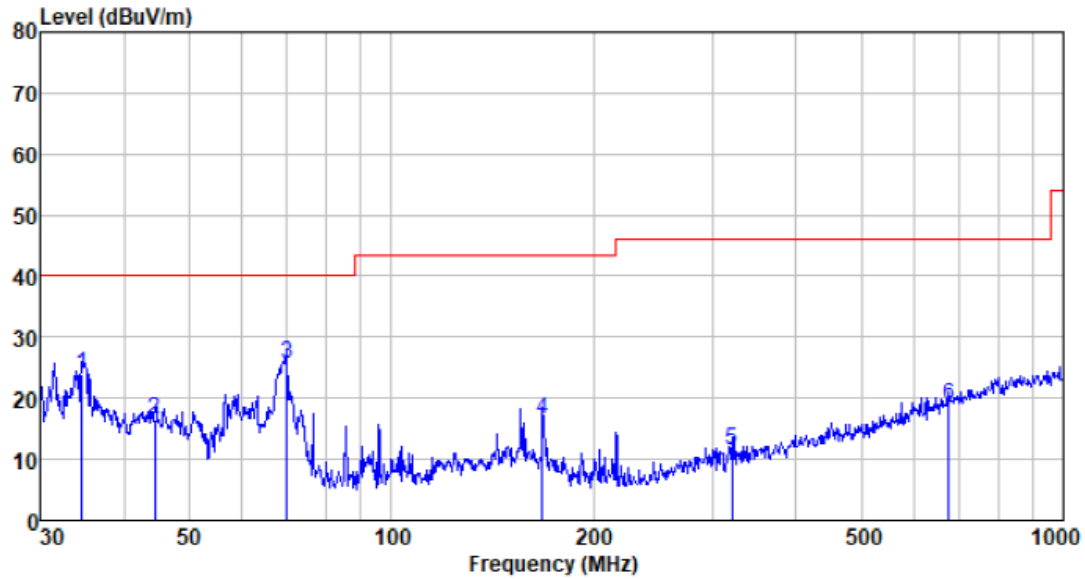

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
34.639	42.02	12.99	1.18	32.30	23.89	40.00	-16.11	QP
44.431	34.31	13.33	1.32	32.30	16.66	40.00	-23.34	QP
69.845	45.59	10.82	1.65	32.38	25.68	40.00	-14.32	QP
167.824	32.73	13.62	2.62	32.43	16.54	43.50	-26.96	QP
321.061	27.36	12.92	3.53	32.29	11.52	46.00	-34.48	QP
675.208	25.26	20.20	4.97	31.56	18.87	46.00	-27.13	QP


7.4 Channel Bandwidth and 99% Occupied Bandwidth

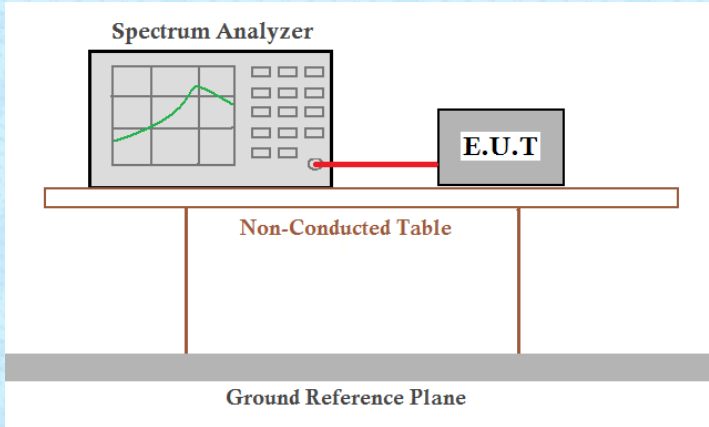Test Requirement:	FCC Part15 C Section 15.225 and 15.215
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth & 99%bandwidth.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test frequency(MHz)	20dB bandwidth(KHz)	99% bandwidth(KHz)	Result
13.56	12.958	10.9497	Pass

Test plot as follows:

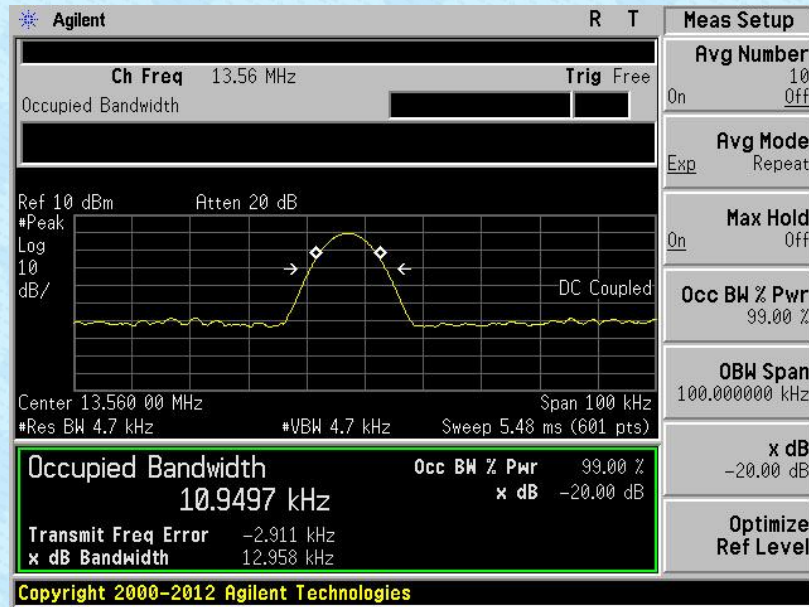

7.5 Frequency Stability Measurement

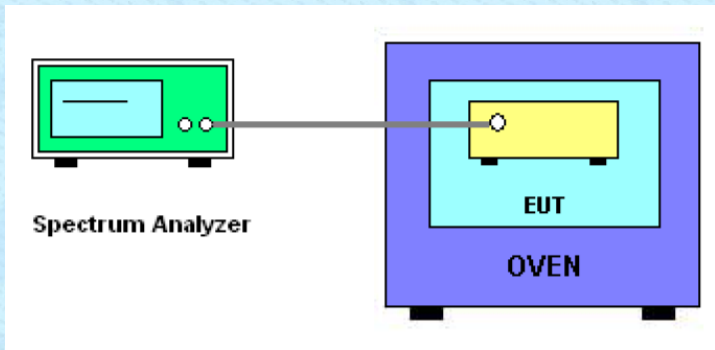Test Requirement:	FCC Part15 C Section 15.225 (e)
Test Method:	ANSI C63.10: 2013
Receiver setup:	RBW=1KHz, VBW=1KHz, Sweep time=Auto
Limit:	The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
Test setup:	 The diagram illustrates the test setup. On the left is a green Spectrum Analyzer. A cable connects its output to a yellow Equipment Under Test (EUT) located inside a blue Oven. The labels 'Spectrum Analyzer', 'EUT', and 'OVEN' are placed below their respective components.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Reference Frequency: 13.56MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit	Result
		Hz	%		
3	-20	16	0.0001	+/- 0.01%	Pass
	-10	15	0.0001		
	0	14	0.0001		
	10	20	0.0002		
	20	19	0.0001		
	30	16	0.0001		
	40	16	0.0001		
	50	13	0.0001		

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

----- End -----