



CERTIFICATION TEST REPORT

Report Number. : 11775548-E2V1

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-10720W

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

August 04, 2017

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-----------------------|------------------|-------------------|
| V1 | 08/04/17 | Initial Review | D. Corona |

TABLE OF CONTENTS

| | |
|-------------------------------------------------|-----------|
| 1. ATTESTATION OF TEST RESULTS..... | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION..... | 5 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 6 |
| 4.2. SAMPLE CALCULATION..... | 6 |
| 4.3. MEASUREMENT UNCERTAINTY | 6 |
| 5. EQUIPMENT UNDER TEST | 7 |
| 5.1. DESCRIPTION OF EUT..... | 7 |
| 6. REUSE OF TEST DATA | 8 |
| 6.1. INTRODUCTION..... | 8 |
| 6.2. DEVICES DIFFERENCES | 8 |
| 6.3. REFERENCE DETAIL..... | 8 |
| 7. SPOT CHECK VERIFICATION..... | 9 |
| 7.1. BASIC DATA RATE GFSK MODULATION..... | 9 |
| 7.1.1. AUTHORIZED BANDEDGE (HIGH CHANNEL) | 9 |
| 7.1.2. HARMONICS AND SPURIOUS EMISSIONS | 11 |
| 8. SETUP PHOTOS..... | 13 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

SERIAL NUMBER: RADIATED: BH9000HG8, BH90009E85
CONDUCTED: BH9000U97W, BH9000TU7W

DATE TESTED: JULY 08 – AUGUST 03, 2017

| APPLICABLE STANDARDS | |
|--------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
WiSE PROJECT LEAD
UL VERIFICATION SERVICES INC.

Prepared By:



KIYA KEDIDA
WiSE LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street | 47266 Benicia Street |
|------------------------------------------------------------|-------------------------------------------------|
| <input type="checkbox"/> Chamber A(IC: 2324B-1) | <input type="checkbox"/> Chamber D(IC: 22541-1) |
| <input checked="" type="checkbox"/> Chamber B(IC: 2324B-2) | <input type="checkbox"/> Chamber E(IC: 22541-2) |
| <input type="checkbox"/> Chamber C(IC: 2324B-3) | <input type="checkbox"/> Chamber F(IC: 22541-3) |
| | <input type="checkbox"/> Chamber G(IC: 22541-4) |
| | <input type="checkbox"/> Chamber H(IC: 22541-5) |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter | Uncertainty |
|-----------------------------------------------------|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.84 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.65 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 3.15 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 5.36 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.32 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC.

6. REUSE OF TEST DATA

6.1. INTRODUCTION

According to the manufacturer, FCC ID:PY7-32042D and PY7-10720W unlicensed radios (WLAN/BT/BLE/NFC) are electrically identical. They share the same chipset, same power and same antenna performance including antenna gain. The FCC ID: PY7-32042D test data shall remain representative of FCC ID: PY7-10720W so, FCC ID: PY7-10720W leverages test data from FCC ID: PY7-32042D.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

6.2. DEVICES DIFFERENCES

Difference between PY7-32042D and PY7-10720W:

Various components were removed from PY7-32042D to establish PY7-10720W; such components are related only to the cellular part and there are no changes in non-cellular (WLAN/BT/BLE/NFC) parts, which are electronically identical.

6.1. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-10720W for radiated harmonic spurious and radiated band-edge. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.


6.2. REFERENCE DETAIL

| Equipment Class | Reference FCC ID | Report Title/Section |
|-----------------|-------------------|------------------------------------|
| DSS (BT) | PY7-32042D | 11760905-E2V1 FCC Report BT |
| DTS (BLE) | PY7-32042D | 11760905-E3V1 FCC Report BLE |
| DTS (WLAN) | PY7-32042D | 11760905-E4V1 FCC Report DTS |
| UNII (WLAN) | PY7-32042D | 11760905-E5V1 FCC Report UNII |

7. SPOT CHECK VERIFICATION

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. AUTHORIZED BANDEDGE (HIGH CHANNEL)

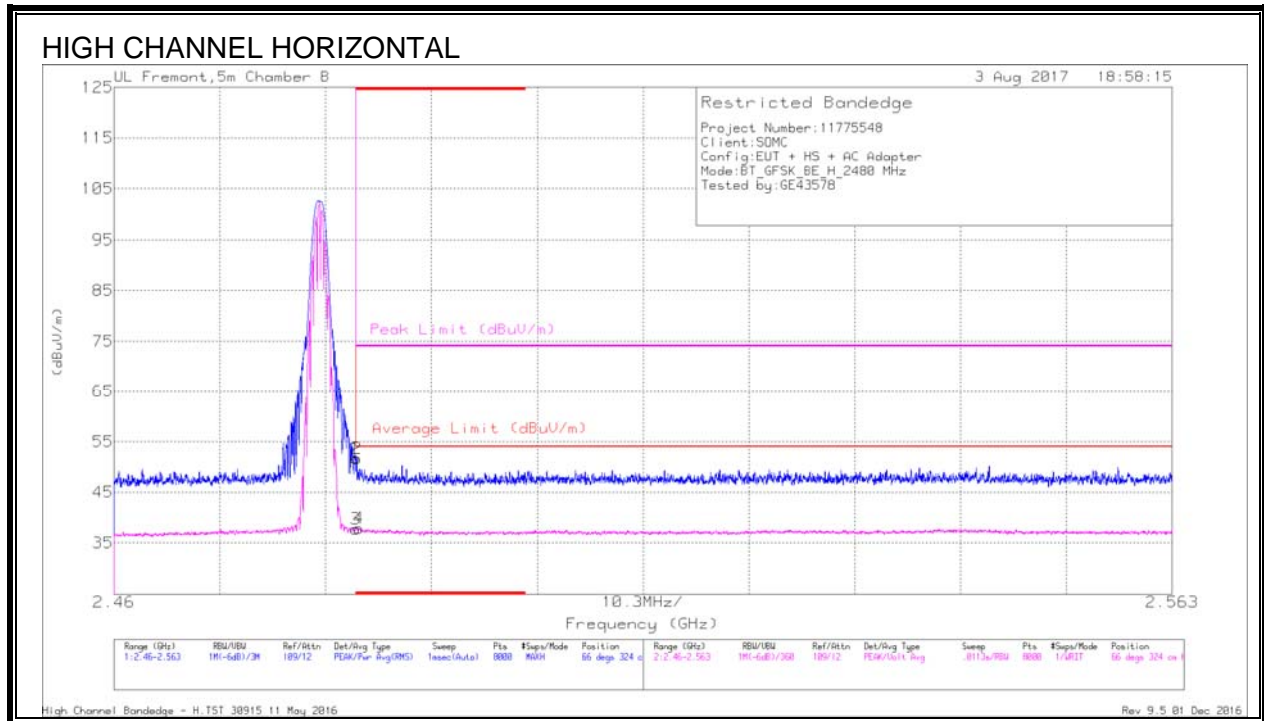


Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T863 (dB/m) | Amp/Cb/Ftr/Pa d (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 40.14 | Pk | 32.5 | -20.9 | 51.74 | - | - | 74 | -22.26 | 66 | 324 | H |
| 2 | * 2.484 | 40.09 | Pk | 32.5 | -20.9 | 51.69 | - | - | 74 | -22.31 | 66 | 324 | H |
| 3 | * 2.484 | 26.15 | VA1T | 32.5 | -20.9 | 37.75 | 54 | -16.25 | - | - | 66 | 324 | H |
| 4 | * 2.484 | 26.26 | VA1T | 32.5 | -20.9 | 37.86 | 54 | -16.14 | - | - | 66 | 324 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

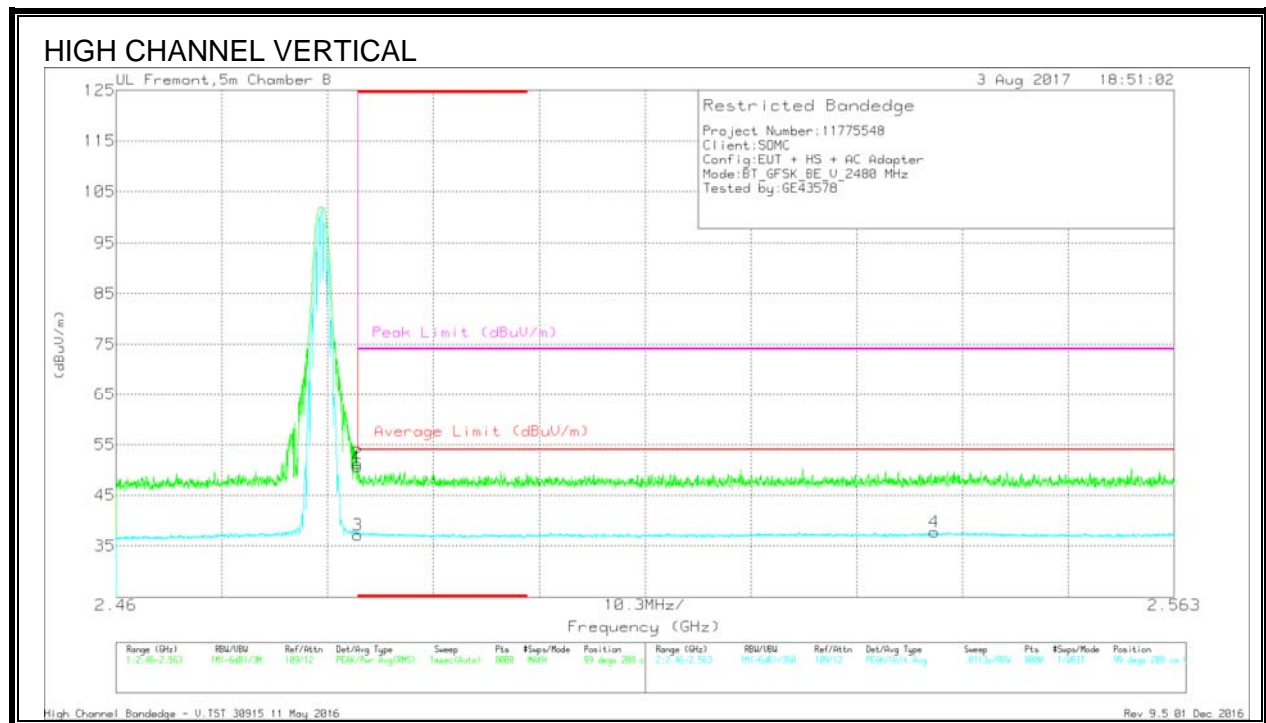

Trace Markers



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T863 (dB/m) | Amp/Cbl/Fitr/Pa d (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 39.09 | Pk | 32.5 | -20.9 | 50.69 | - | - | 74 | -23.31 | 99 | 208 | V |
| 2 | * 2.484 | 39.72 | Pk | 32.5 | -20.9 | 51.32 | - | - | 74 | -22.68 | 99 | 208 | V |
| 3 | * 2.484 | 25.54 | VA1T | 32.5 | -20.9 | 37.14 | 54 | -16.86 | - | - | 99 | 208 | V |
| 4 | 2.54 | 25.98 | VA1T | 32.5 | -20.7 | 37.78 | 54 | -16.22 | - | - | 99 | 208 | V |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B = 1/T_{on}$ where: T_{on} is transmit duration

7.1.2. HARMONICS AND SPURIOUS EMISSIONS

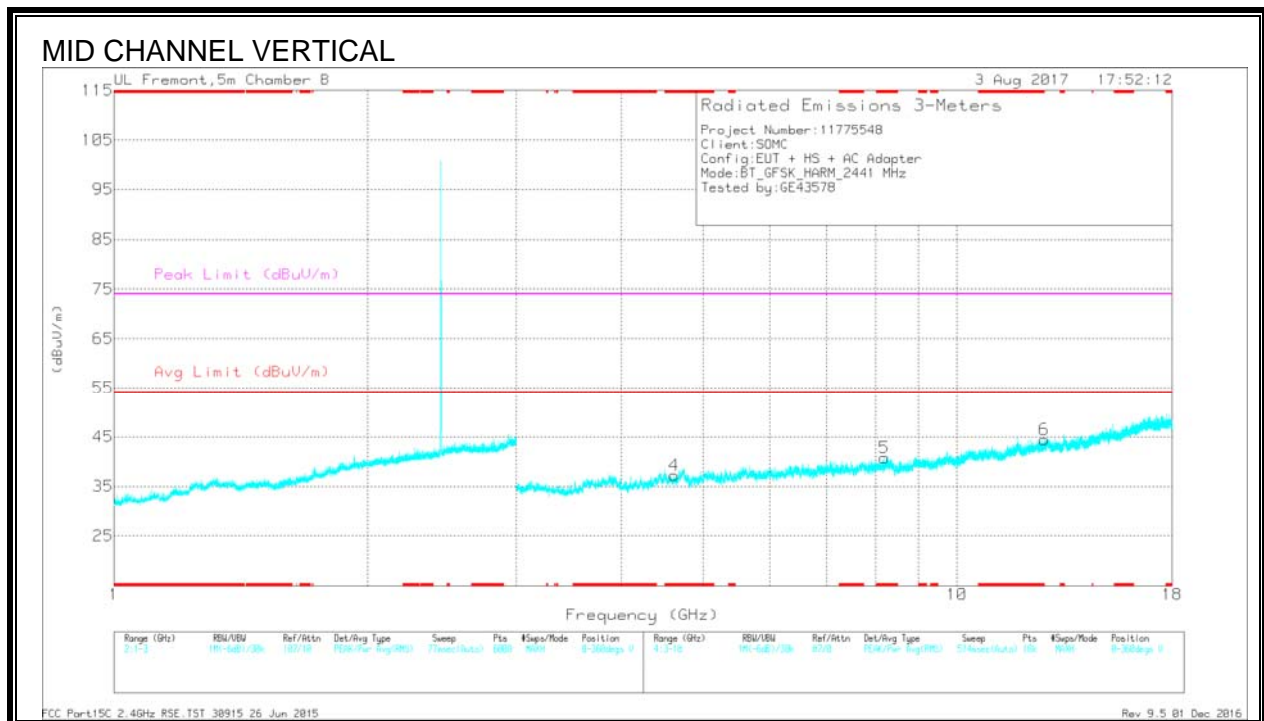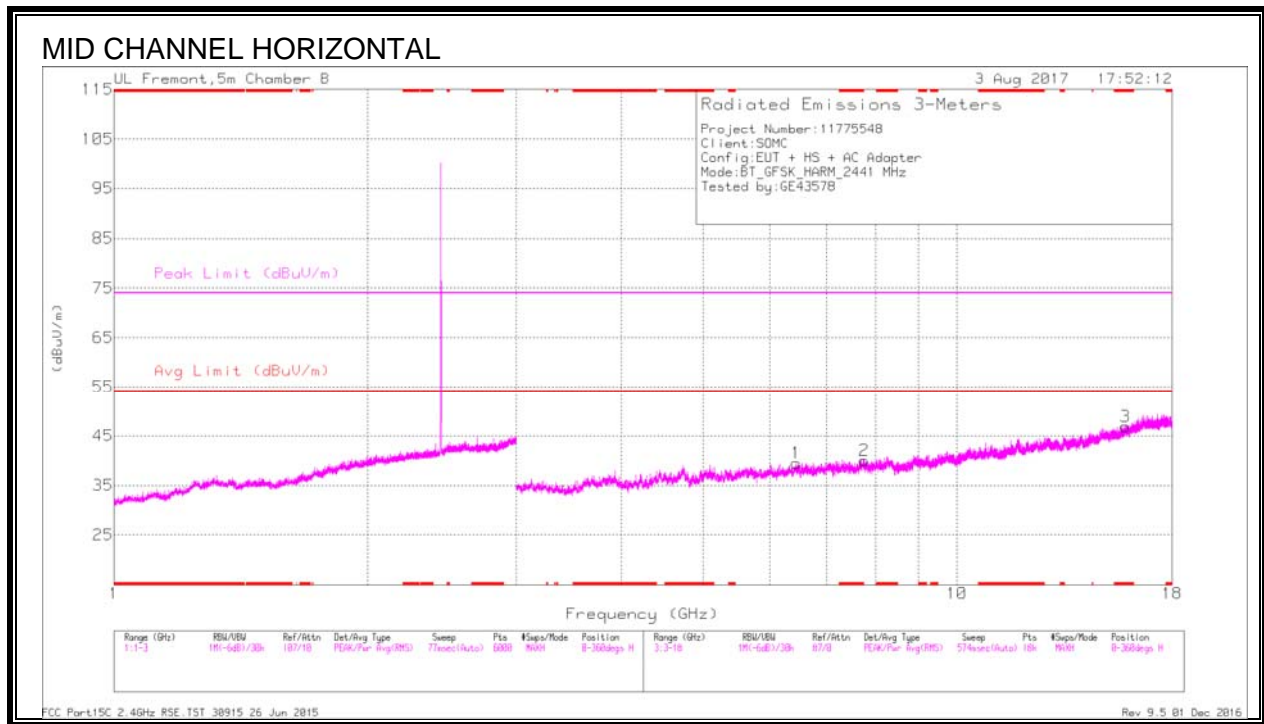

Radiated Emissions

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T863 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 3 | * 15.854 | 29.64 | PKFH | 41 | -19 | 51.64 | - | - | 74 | -22.36 | 244 | 199 | H |
| | * 15.857 | 18.98 | VA1T | 41 | -18.9 | 41.08 | 54 | -12.92 | - | - | 244 | 199 | H |
| 4 | * 4.62 | 38.12 | PKFH | 34.3 | -30.5 | 41.92 | - | - | 74 | -32.08 | 265 | 104 | V |
| | * 4.624 | 27.61 | VA1T | 34.3 | -30.5 | 31.41 | 54 | -22.59 | - | - | 265 | 104 | V |
| 5 | * 8.202 | 35.89 | PKFH | 36 | -26.4 | 45.49 | - | - | 74 | -28.51 | 276 | 104 | V |
| | * 8.204 | 24.28 | VA1T | 36 | -26.6 | 33.68 | 54 | -20.32 | - | - | 276 | 104 | V |
| 6 | * 12.697 | 31.41 | PKFH | 39.3 | -22.4 | 48.31 | - | - | 74 | -25.69 | 115 | 200 | V |
| | * 12.696 | 20.66 | VA1T | 39.3 | -22.4 | 37.56 | 54 | -16.44 | - | - | 115 | 200 | V |
| 1 | 6.448 | 25.34 | VA1T | 35.7 | -27.9 | 33.14 | - | - | - | - | 288 | 101 | H |
| | 6.449 | 37.3 | PKFH | 35.7 | -28 | 45 | - | - | - | - | 288 | 101 | H |
| 2 | 7.767 | 23.42 | VA1T | 36 | -25.8 | 33.62 | - | - | - | - | 37 | 199 | H |
| | 7.768 | 34.53 | PKFH | 36 | -25.8 | 44.73 | - | - | - | - | 37 | 199 | H |

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

APPENDIX A

| PY7-10720W SPOT CHECK RESULTS | | | | | | | | | |
|--------------------------------------|------------|-----------|--------------------|--------------|--------------|--------------|--------------|-------------|--------------|
| Technology | Test Item | Channel | Measured Frequency | PY7-32042D | | PY7-10720W | | Delta (dB) | |
| | | | | Peak | Ave | Peak | Ave | Peak | Ave |
| BT | RBE | 78 | 2480 MHz | 51.59 | 36.38 | 51.74 | 37.86 | 0.15 | 1.48 |
| | RSE | 39 | 15.85 GHz | 54.74 | 42.73 | 51.64 | 41.08 | -3.1 | -1.65 |
| Note: GFSK is the worst mode | | | | | | | | | |
| BLE | RBE | 39 | 2480 | 48.29 | 38.27 | 50.25 | 40.19 | 2.04 | 1.92 |
| | RSE | 19 | 11.495 GHz | 52.83 | 41.19 | 49.56 | 38.38 | -3.27 | -2.81 |
| Note: | | | | | | | | | |
| DTS | RBE | 13 | 2472 MHz | 65.62 | 51.12 | 65.65 | 50.24 | 0.03 | -0.88 |
| | RSE | 6 | 10.99 GHz | 48.96 | 37.89 | 49.22 | 37.17 | 0.26 | -0.72 |
| NOTE: 802.11n HT20 is the worst mode | | | | | | | | | |
| | | | | | | | | | |
| UNII | RBE | 100 | 5500 MHz | 61.67 | 46.11 | 62 | 47.87 | 0.33 | 1.76 |
| (20MHz) | RSE | 100 | 12.48 GHz | 49.12 | 36.28 | 49.99 | 38.7 | 0.87 | 2.42 |
| NOTE: 802.11n HT20 is the worst mode | | | | | | | | | |

END OF REPORT