

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	36.564M	18.424M	18M4D1D	22.176M	17.055M
802.11be EHT20_Nss1,(MCS0)_4TX	39.27M	19.485M	19M5D1D	21.318M	19.158M
802.11be EHT40_Nss1,(MCS0)_4TX	74.976M	38.076M	38M1D1D	40.392M	37.805M
802.11be EHT80_Nss1,(MCS0)_4TX	101.376M	77.491M	77M5D1D	82.104M	77.374M
802.11be EHT160_Nss1,(MCS0)_4TX	81.84M	77.416M	77M4D1D	80.96M	77.342M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.43M	17.19M	17M2D1D	21.186M	16.761M
802.11be EHT20_Nss1,(MCS0)_4TX	27.522M	19.196M	19M2D1D	21.384M	19.059M
802.11be EHT40_Nss1,(MCS0)_4TX	54.384M	37.947M	37M9D1D	40.392M	37.717M
802.11be EHT80_Nss1,(MCS0)_4TX	87.12M	77.464M	77M5D1D	83.952M	77.362M
802.11be EHT160_Nss1,(MCS0)_4TX	81.68M	77.424M	77M4D1D	81.2M	77.327M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.166M	17.175M	17M2D1D	15.75M	13.448M
802.11be EHT20_Nss1,(MCS0)_4TX	28.314M	19.222M	19M2D1D	15.78M	14.564M
802.11be EHT40_Nss1,(MCS0)_4TX	49.632M	37.934M	37M9D1D	35.07M	33.764M
802.11be EHT80_Nss1,(MCS0)_4TX	86.328M	77.376M	77M4D1D	75.9M	73.159M
802.11be EHT160_Nss1,(MCS0)_4TX	165.264M	156.734M	157MD1D	164.208M	156.307M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.368M	19.049M	19M0D1D	3.12M	3.996M
802.11be EHT20_Nss1,(MCS0)_4TX	18.942M	20.697M	20M7D1D	4.4M	4.545M
802.11be EHT40_Nss1,(MCS0)_4TX	37.884M	38.271M	38M3D1D	3.88M	4.046M
802.11be EHT80_Nss1,(MCS0)_4TX	77.616M	77.524M	77M5D1D	3.86M	4.156M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Minimum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	27.39M	17.453M	25.542M	17.082M	22.176M	17.055M	23.562M	17.278M
5200MHz	Pass	Inf	28.776M	17.419M	30.294M	17.221M	31.284M	17.07M	31.02M	17.58M
5240MHz	Pass	Inf	31.02M	17.361M	33.99M	17.686M	36.564M	17.462M	35.904M	18.424M
5260MHz	Pass	Inf	21.186M	16.85M	21.318M	16.782M	21.186M	16.761M	21.318M	16.821M
5300MHz	Pass	Inf	21.516M	16.852M	21.318M	16.794M	21.186M	16.77M	21.78M	16.796M
5320MHz	Pass	Inf	23.43M	17.19M	22.638M	17.046M	22.638M	17.046M	22.902M	17.073M
5500MHz	Pass	Inf	21.978M	17.175M	23.166M	17.051M	21.714M	17.006M	22.242M	17.07M
5580MHz	Pass	Inf	21.384M	16.879M	21.384M	16.782M	21.186M	16.757M	21.186M	16.759M
5700MHz	Pass	Inf	21.516M	16.847M	21.45M	16.797M	21.45M	16.743M	21.384M	16.739M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.9M	13.49M	15.75M	13.51M	15.765M	13.448M	15.81M	13.47M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.22M	4.09M	3.12M	4.095M	3.12M	4.043M	3.12M	3.996M
5745MHz	Pass	500k	16.368M	17.603M	16.302M	18.895M	16.368M	18.639M	16.368M	17.475M
5785MHz	Pass	500k	16.302M	17.806M	16.368M	18.273M	16.302M	18.018M	16.302M	18.05M
5825MHz	Pass	500k	16.302M	19.049M	16.302M	18.771M	16.302M	18.597M	16.302M	18.812M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	29.766M	19.25M	28.644M	19.209M	27.588M	19.205M	28.446M	19.213M
5200MHz	Pass	Inf	27.06M	19.164M	21.318M	19.158M	21.846M	19.161M	22.176M	19.218M
5240MHz	Pass	Inf	36.63M	19.311M	30.492M	19.398M	39.27M	19.346M	31.812M	19.485M
5260MHz	Pass	Inf	21.648M	19.086M	21.516M	19.059M	21.45M	19.103M	21.714M	19.114M
5300MHz	Pass	Inf	21.582M	19.06M	21.384M	19.084M	21.45M	19.076M	21.648M	19.1M
5320MHz	Pass	Inf	26.136M	19.184M	27.522M	19.196M	25.542M	19.191M	25.476M	19.174M
5500MHz	Pass	Inf	24.948M	19.192M	28.314M	19.222M	26.004M	19.183M	25.146M	19.193M
5580MHz	Pass	Inf	21.516M	19.079M	21.516M	19.08M	21.516M	19.057M	21.582M	19.083M
5700MHz	Pass	Inf	21.516M	19.065M	21.648M	19.108M	21.252M	19.081M	21.252M	19.107M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.005M	14.564M	15.885M	14.578M	15.93M	14.572M	15.78M	14.568M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.5M	4.545M	4.54M	4.562M	4.44M	4.552M	4.4M	4.549M
5745MHz	Pass	500k	18.876M	19.315M	18.744M	19.572M	18.744M	19.516M	18.876M	19.337M
5785MHz	Pass	500k	18.942M	19.437M	18.81M	19.604M	18.942M	19.498M	18.81M	19.47M
5825MHz	Pass	500k	18.81M	20.557M	18.876M	20.697M	18.876M	20.024M	18.942M	20.536M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	61.908M	37.932M	44.484M	37.899M	48.18M	37.872M	51.348M	37.954M
5230MHz	Pass	Inf	41.316M	37.822M	40.656M	37.805M	40.392M	37.817M	74.976M	38.076M
5270MHz	Pass	Inf	40.524M	37.736M	40.524M	37.717M	40.392M	37.772M	40.656M	37.835M
5310MHz	Pass	Inf	46.728M	37.903M	54.384M	37.894M	44.748M	37.947M	44.616M	37.868M
5510MHz	Pass	Inf	49.632M	37.924M	44.748M	37.934M	44.484M	37.868M	44.88M	37.926M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5590MHz	Pass	Inf	40.788M	37.743M	40.392M	37.738M	40.656M	37.742M	40.392M	37.775M
5670MHz	Pass	Inf	40.524M	37.776M	40.524M	37.748M	40.26M	37.703M	40.392M	37.762M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.175M	33.789M	35.07M	33.803M	35.35M	33.764M	35.07M	33.782M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4M	4.046M	3.88M	4.067M	3.9M	4.055M	3.9M	4.046M
5755MHz	Pass	500k	37.884M	38.04M	37.62M	38.179M	37.62M	38.138M	37.884M	38.038M
5795MHz	Pass	500k	37.488M	38.271M	37.752M	38.079M	37.752M	37.999M	37.62M	38.243M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	101.376M	77.426M	85.8M	77.374M	83.16M	77.491M	82.104M	77.438M
5290MHz	Pass	Inf	87.12M	77.464M	85.008M	77.389M	85.008M	77.404M	83.952M	77.362M
5530MHz	Pass	Inf	85.8M	77.359M	84.744M	77.349M	86.328M	77.376M	86.064M	77.343M
5610MHz	Pass	Inf	81.576M	77.247M	81.576M	77.118M	82.104M	77.104M	81.312M	77.177M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.9M	73.233M	76.05M	73.226M	76.275M	73.272M	76.05M	73.159M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.96M	4.162M	3.94M	4.254M	3.86M	4.226M	4M	4.156M
5775MHz	Pass	500k	77.616M	77.524M	76.296M	77.474M	76.296M	77.424M	77.352M	77.385M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.84M	77.416M	80.96M	77.342M	81.28M	77.375M	81.12M	77.371M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	81.68M	77.327M	81.36M	77.341M	81.2M	77.424M	81.6M	77.383M
5570MHz	Pass	Inf	164.736M	156.329M	165.264M	156.332M	164.736M	156.307M	164.208M	156.734M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5180MHz

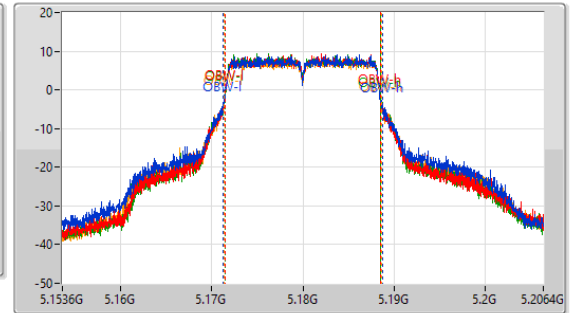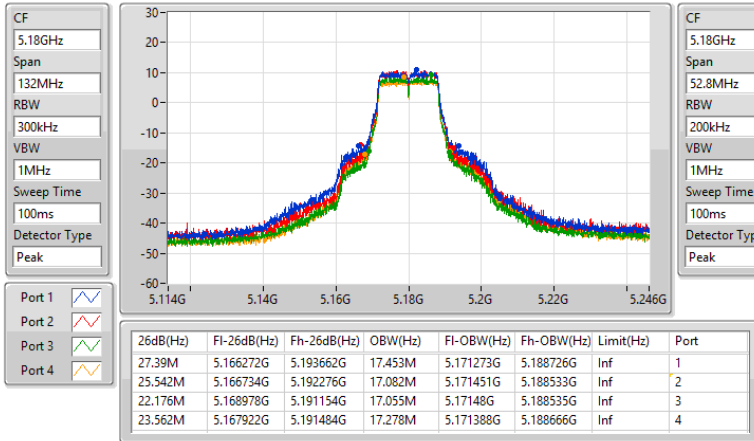

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5200MHz

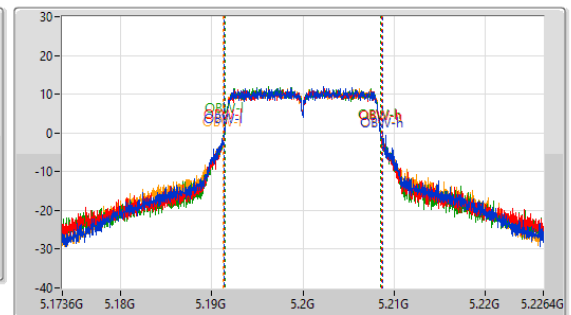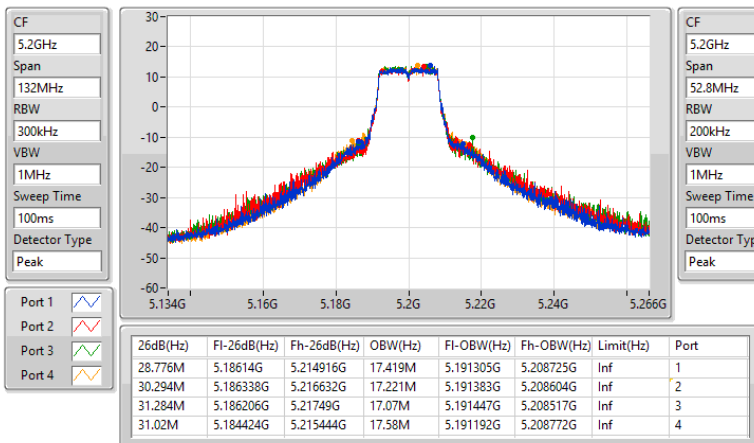

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5240MHz

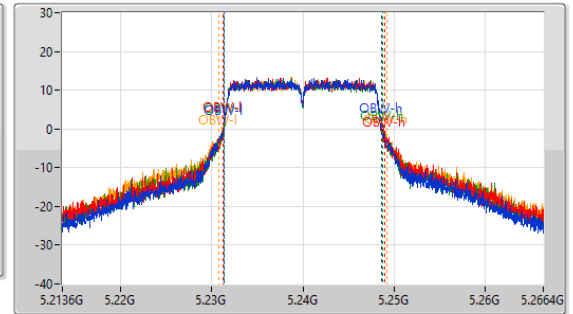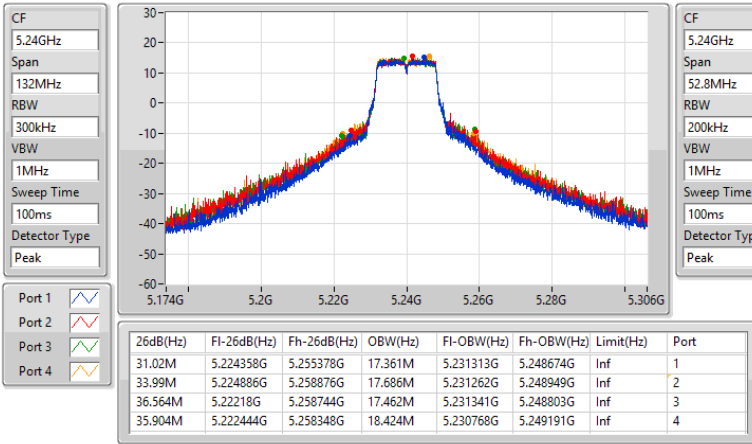

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5260MHz

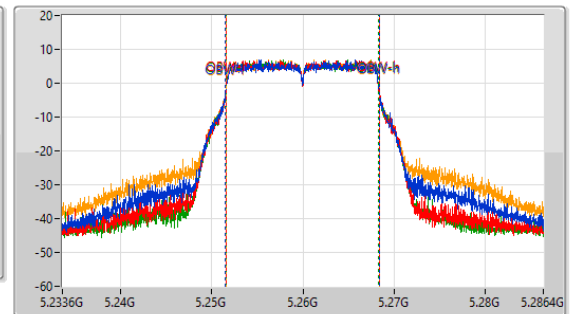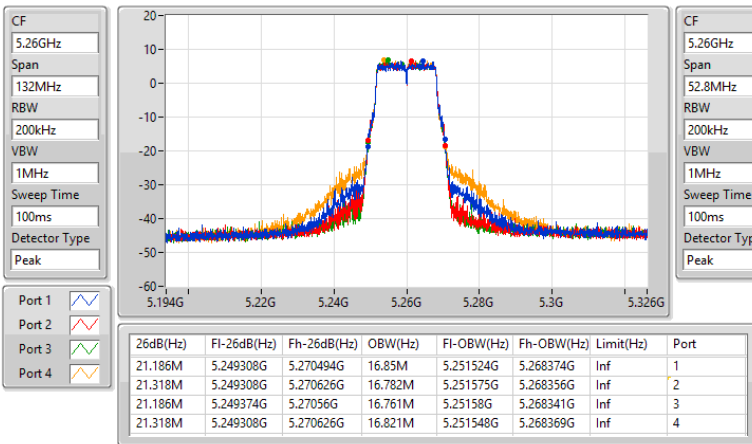

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5300MHz

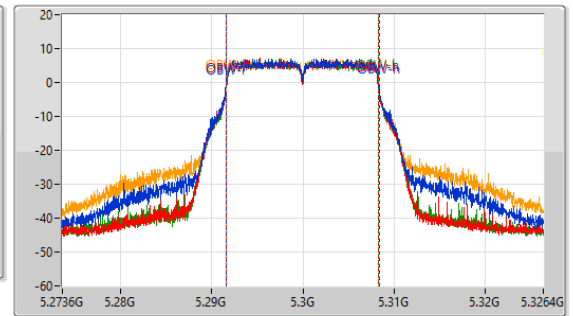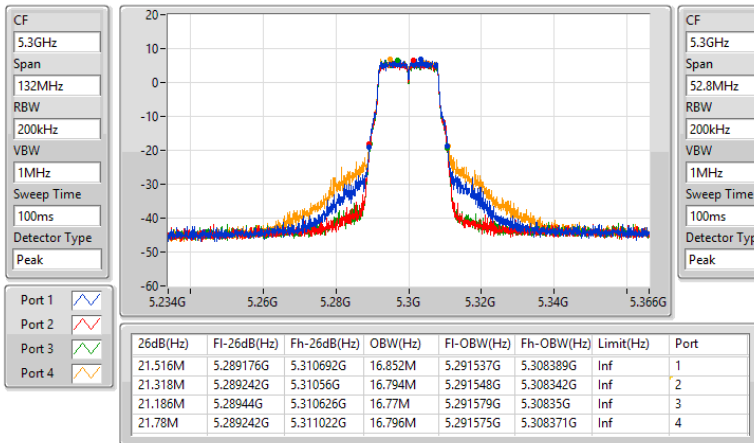

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5320MHz

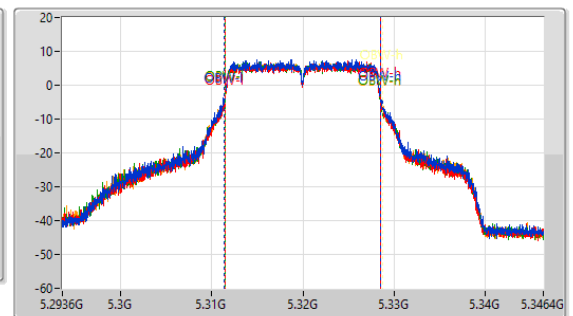
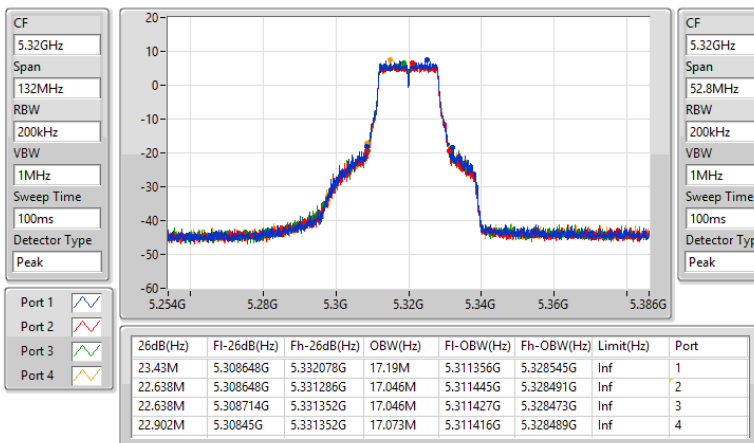




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5500MHz

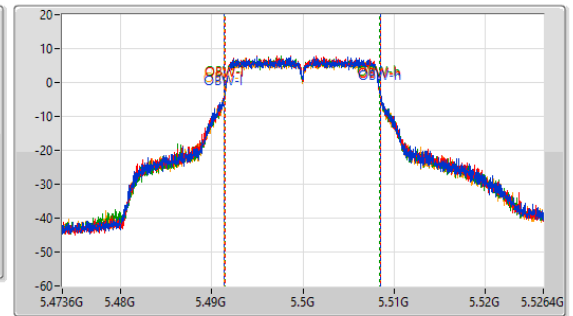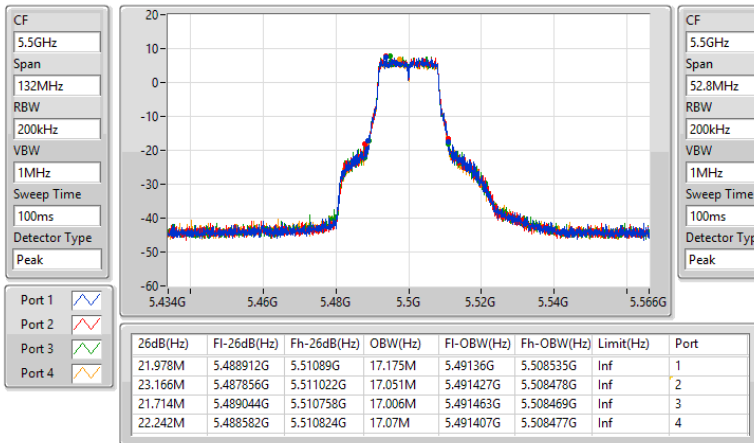

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5580MHz

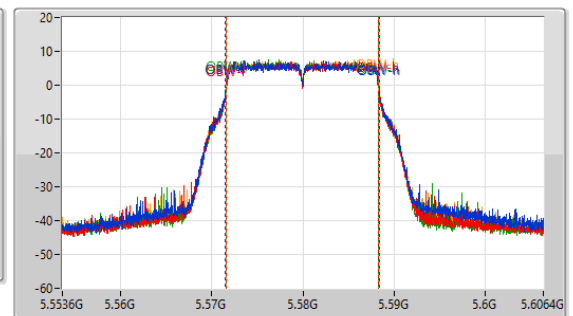
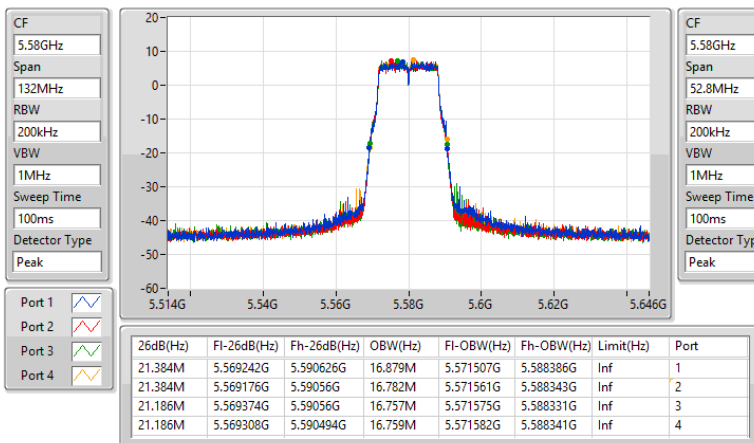




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5700MHz

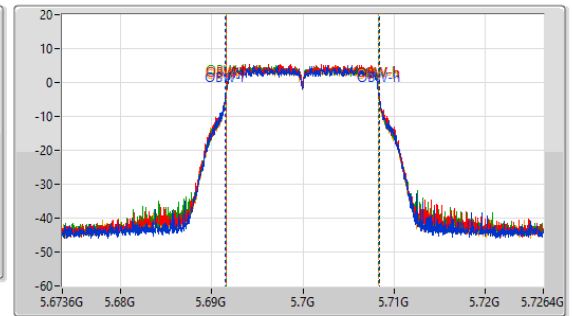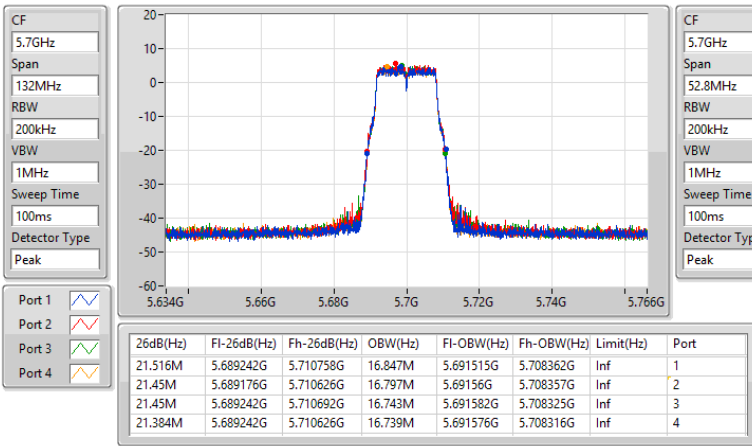

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

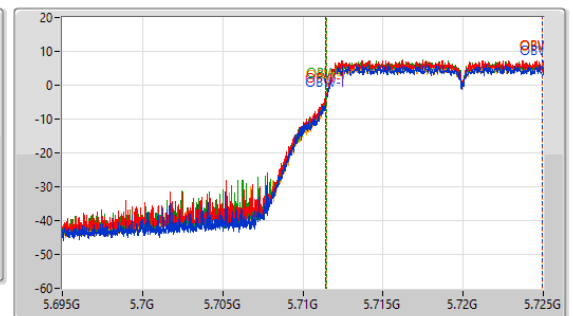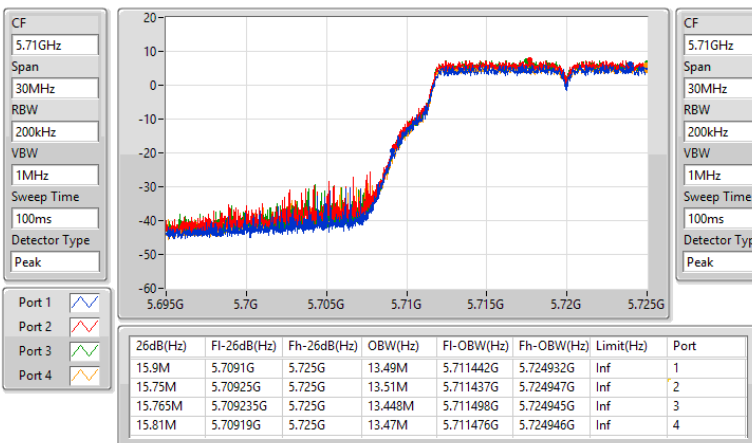




5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5720MHz Straddle 5.725-5.85GHz

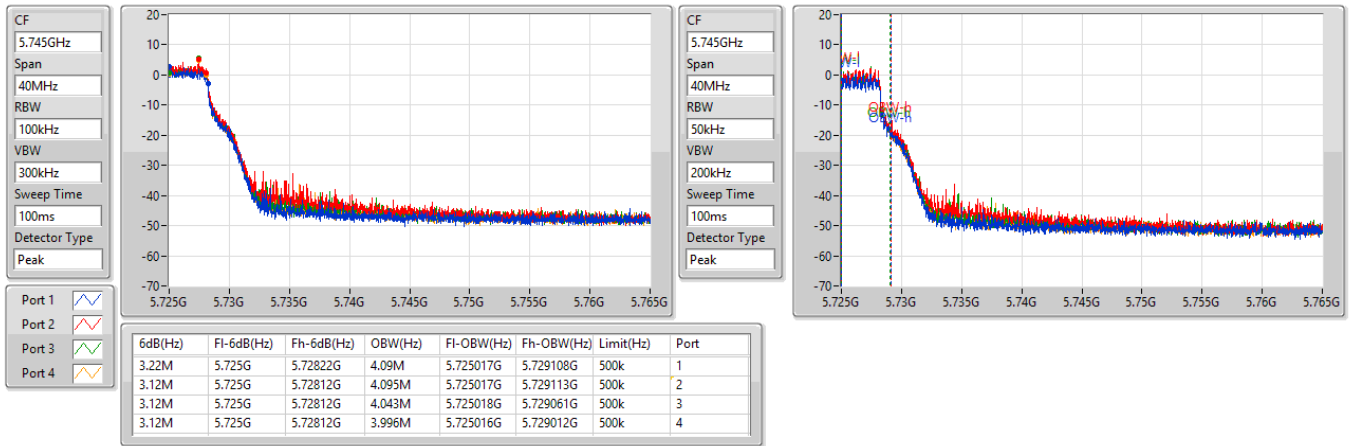

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

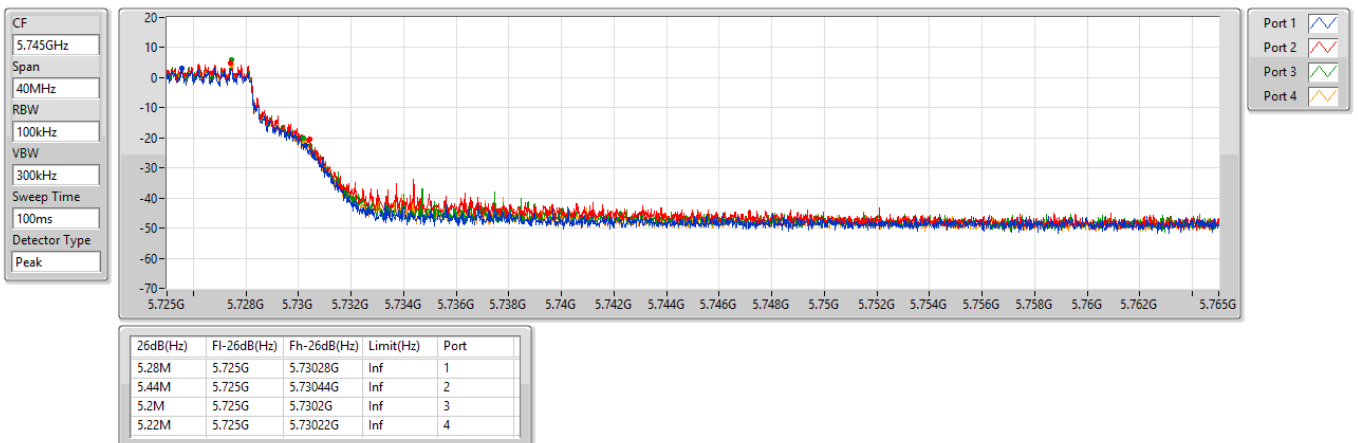




5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5745MHz

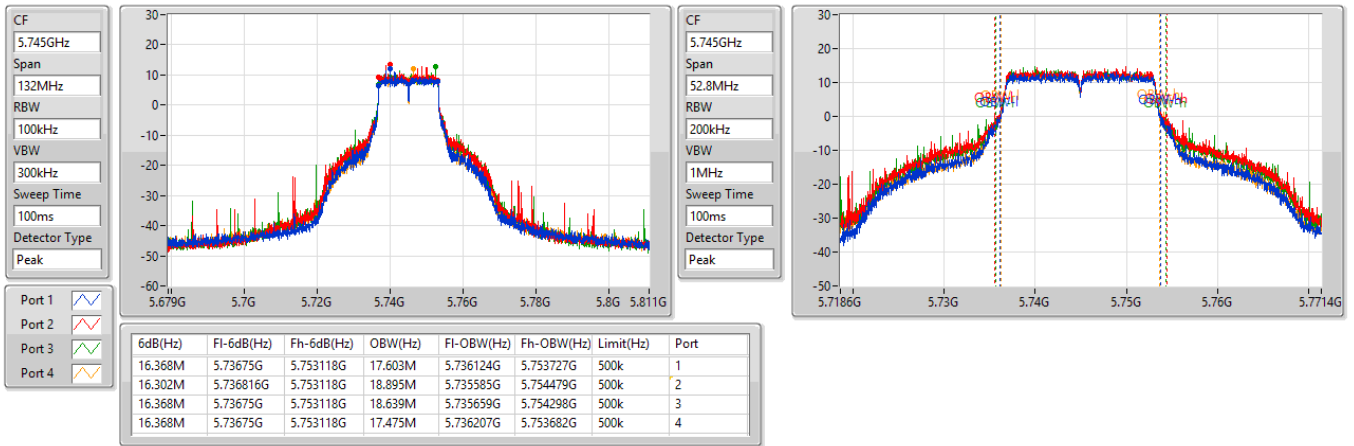

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5745MHz

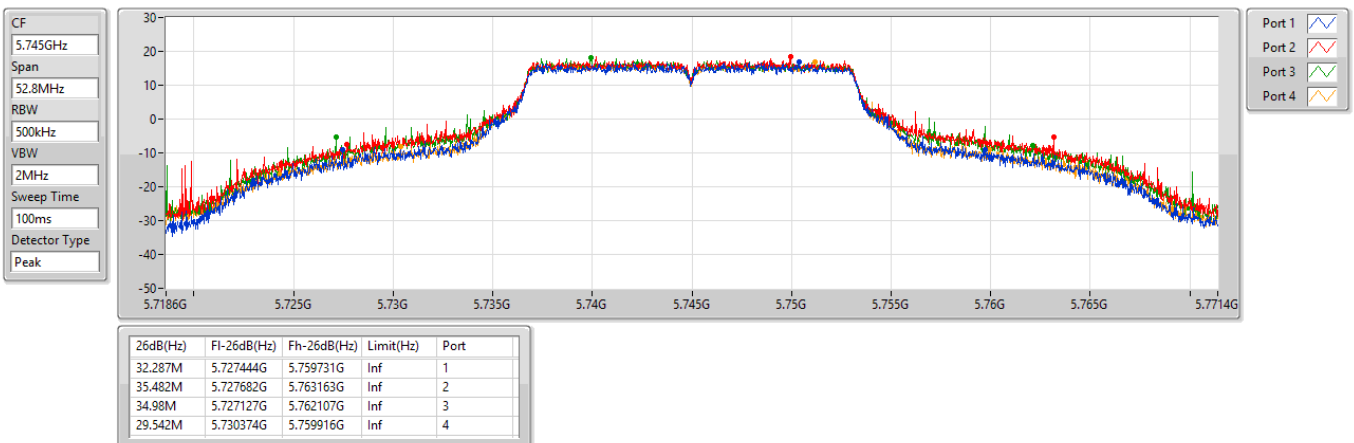

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5785MHz

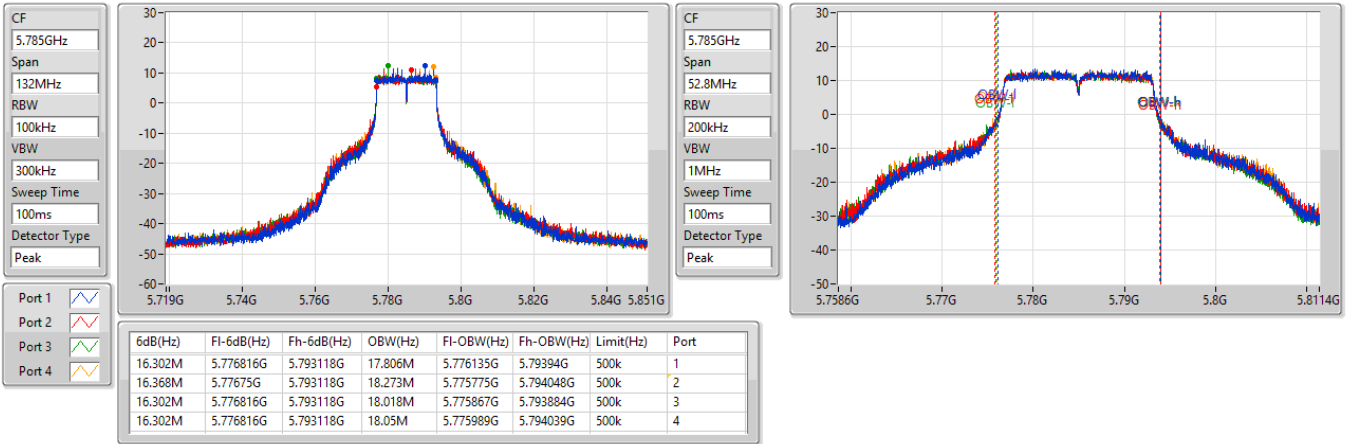

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5785MHz

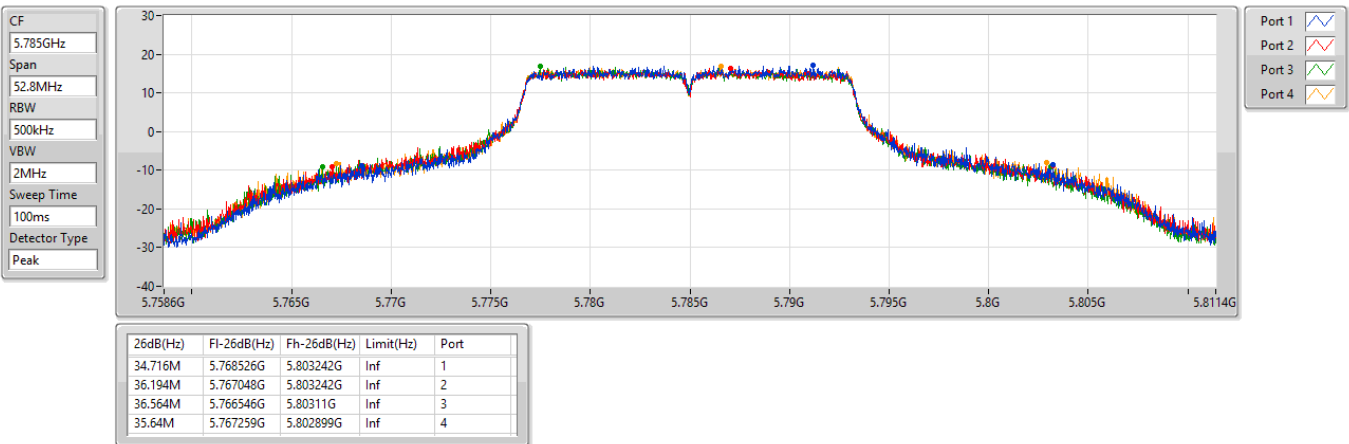




5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5825MHz

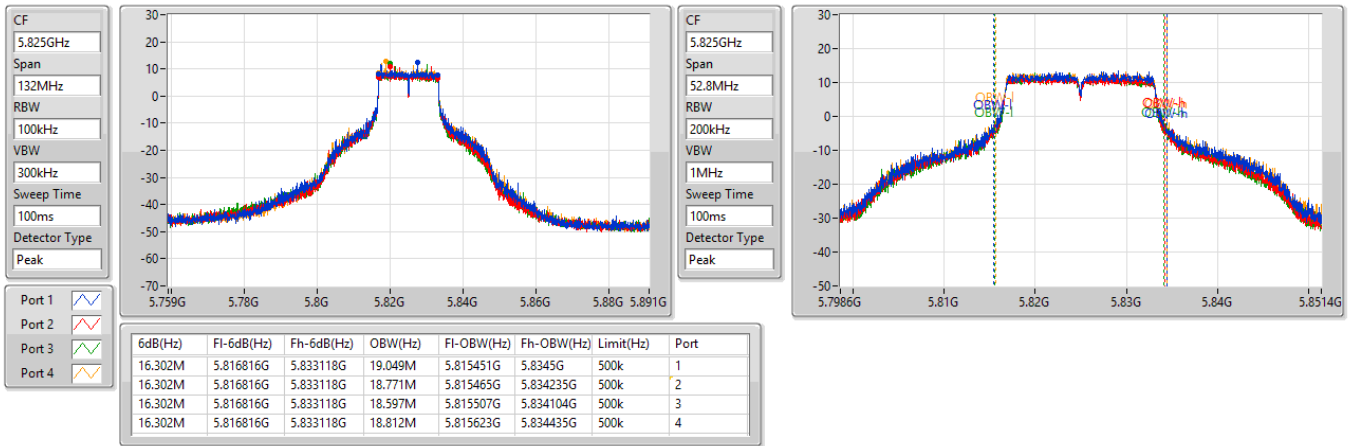

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5825MHz

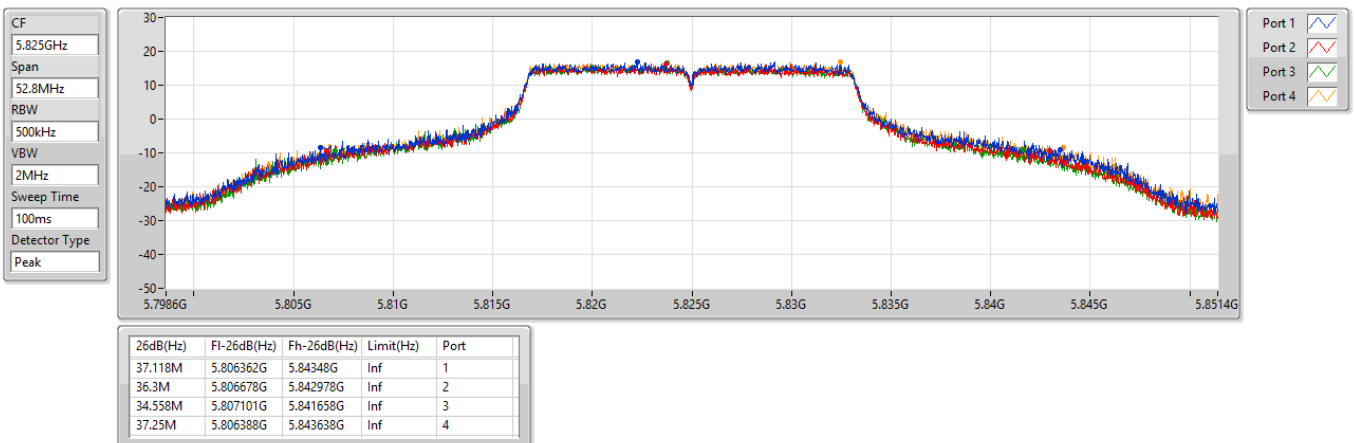

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5180MHz

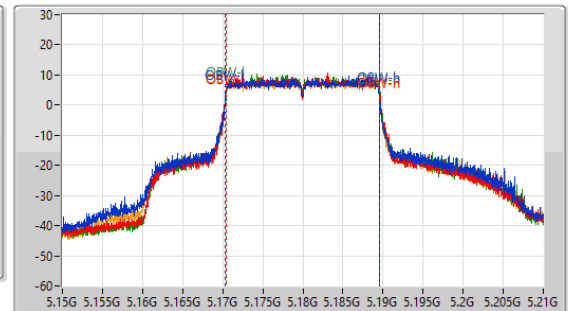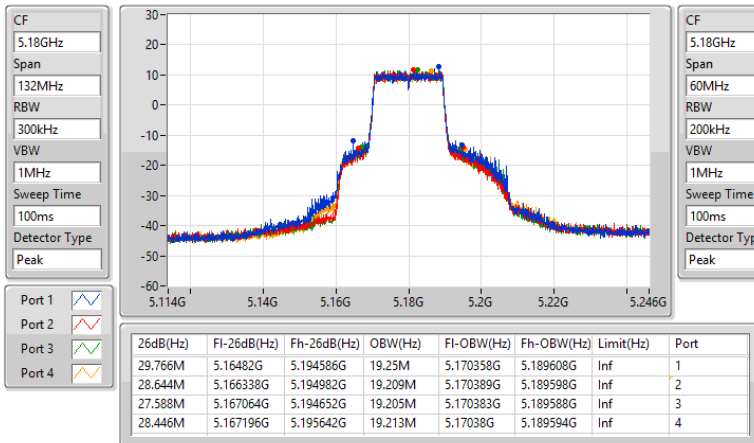

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5200MHz

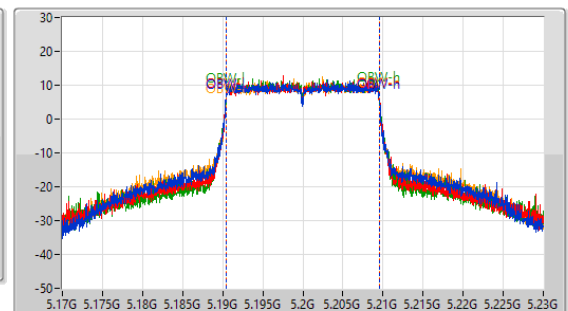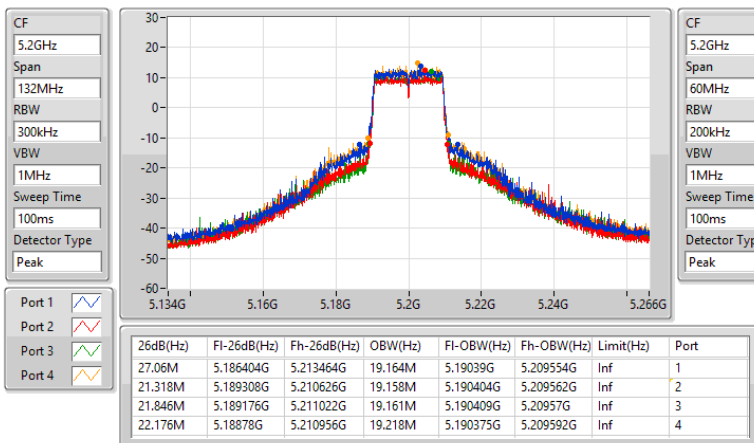

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5240MHz

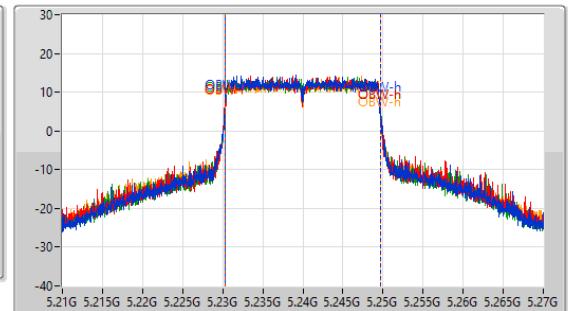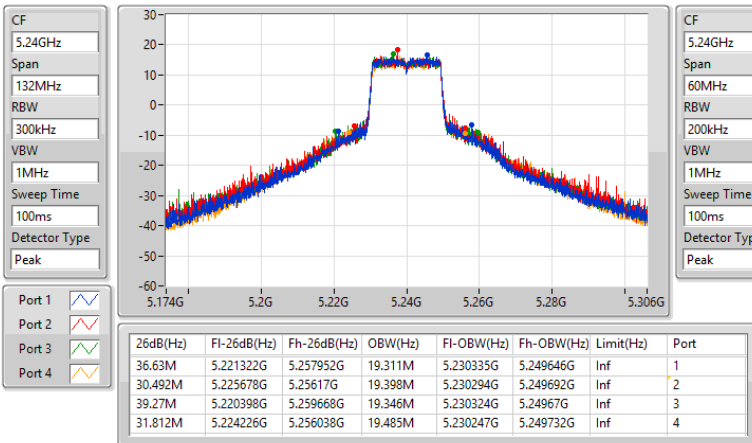

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5260MHz

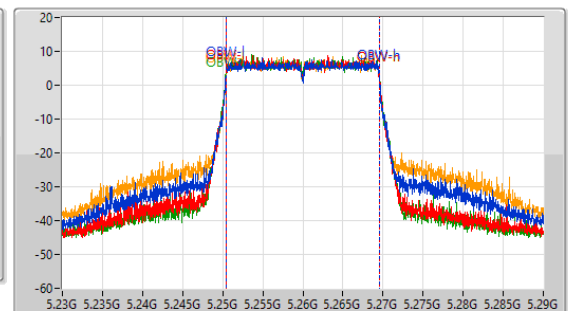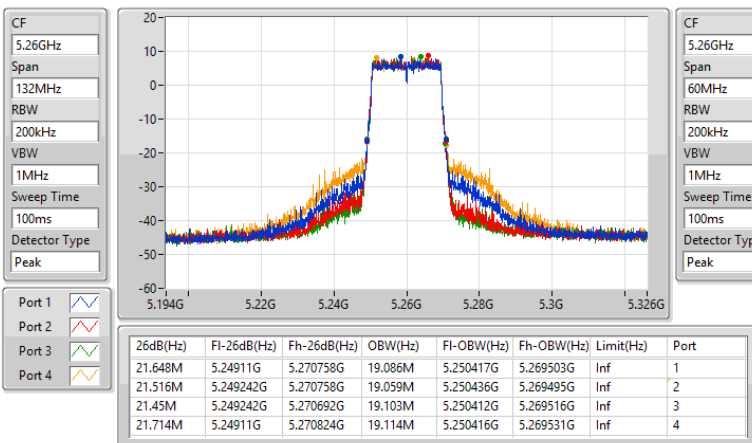

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5300MHz

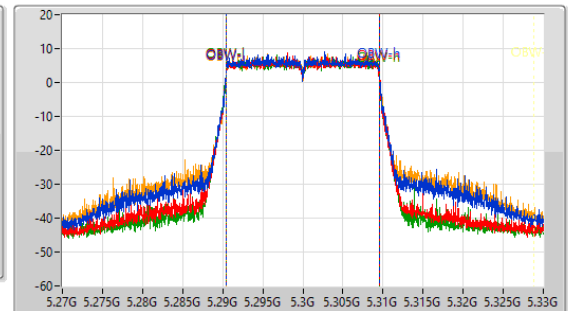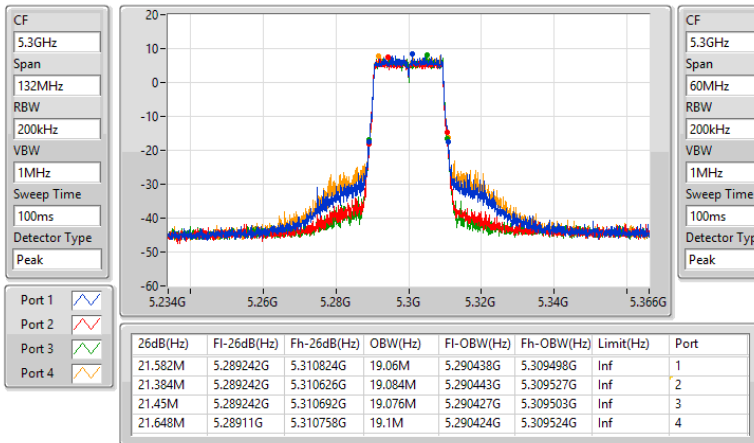

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5320MHz

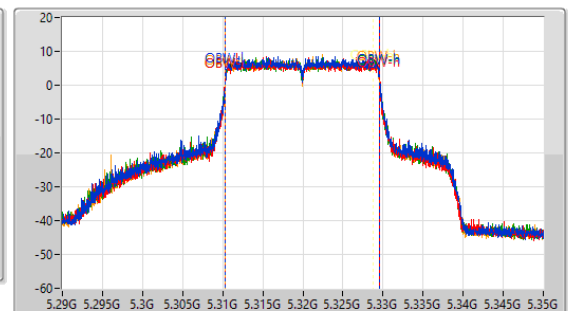
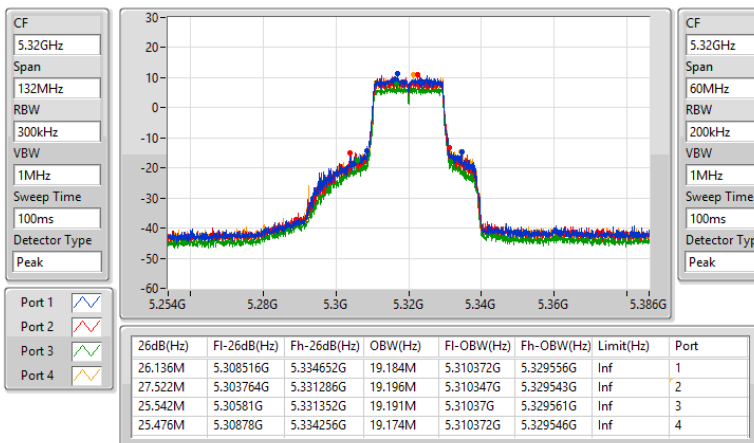




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5500MHz

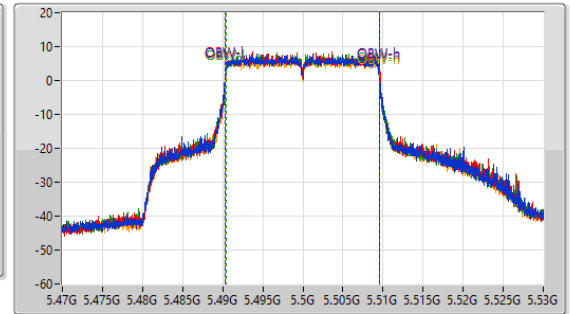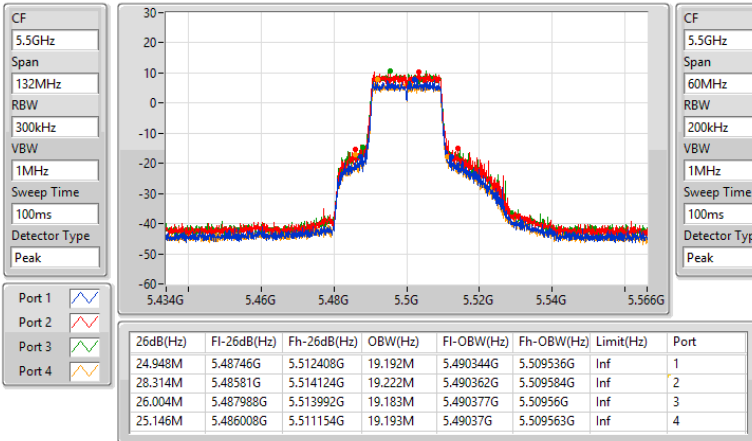

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5580MHz

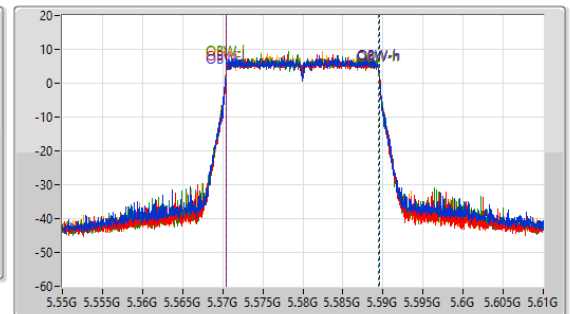
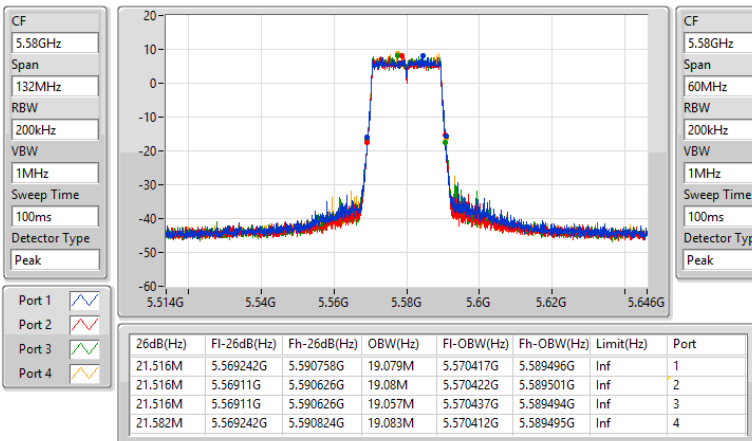




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5700MHz

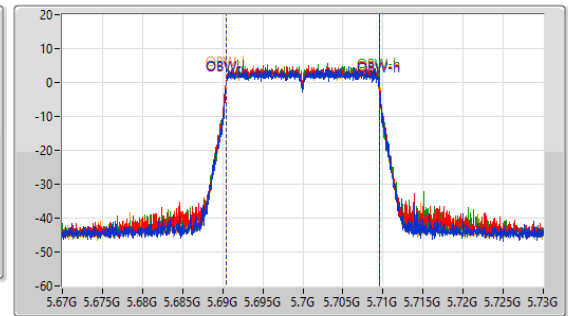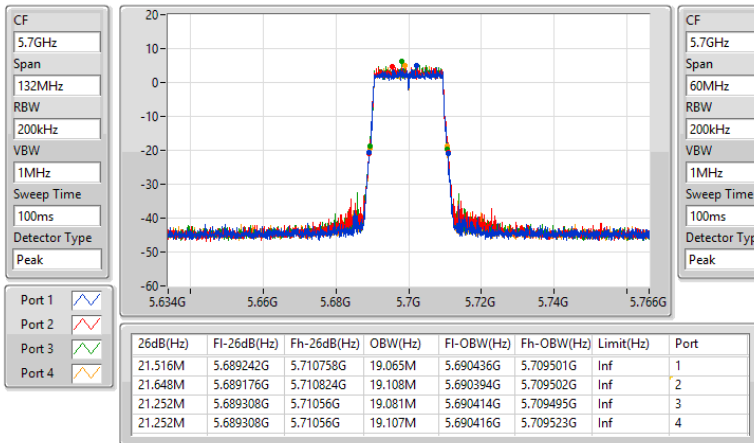

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

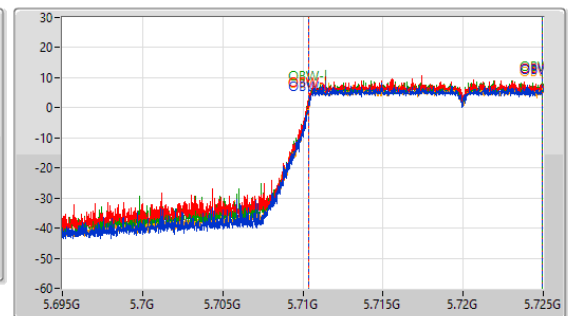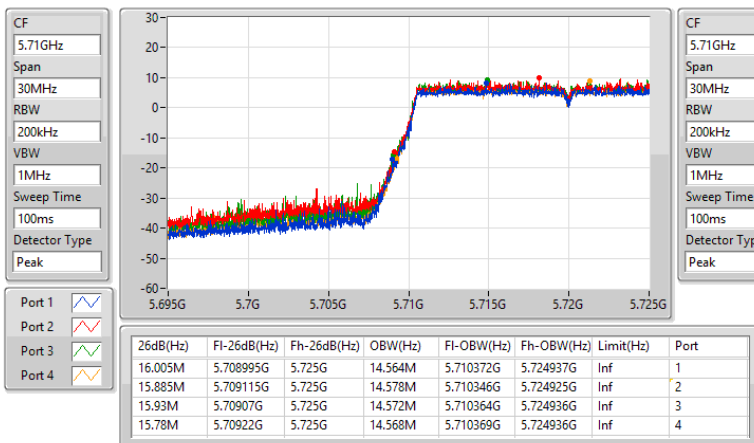




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5720MHz Straddle 5.725-5.85GHz

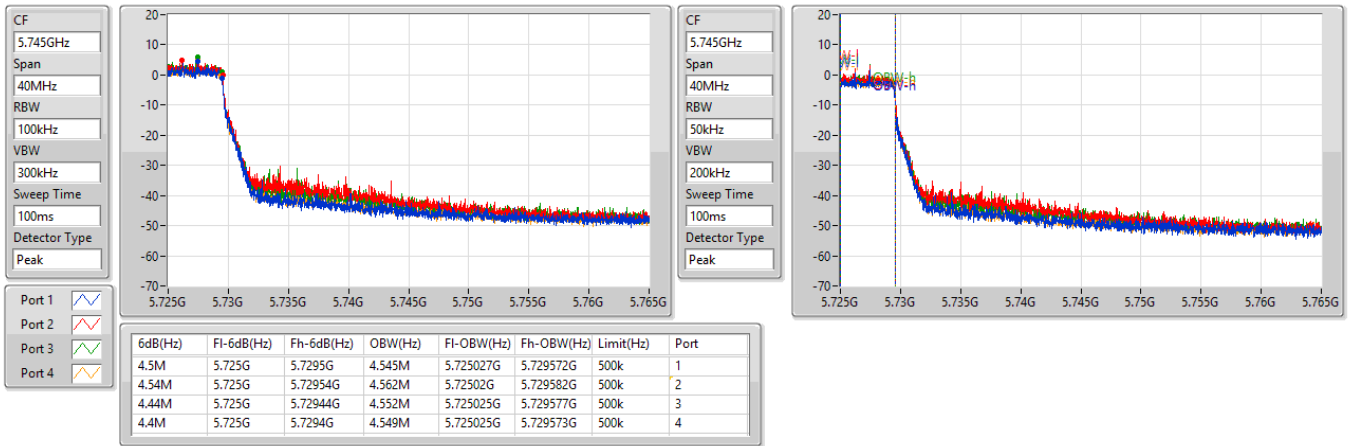

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

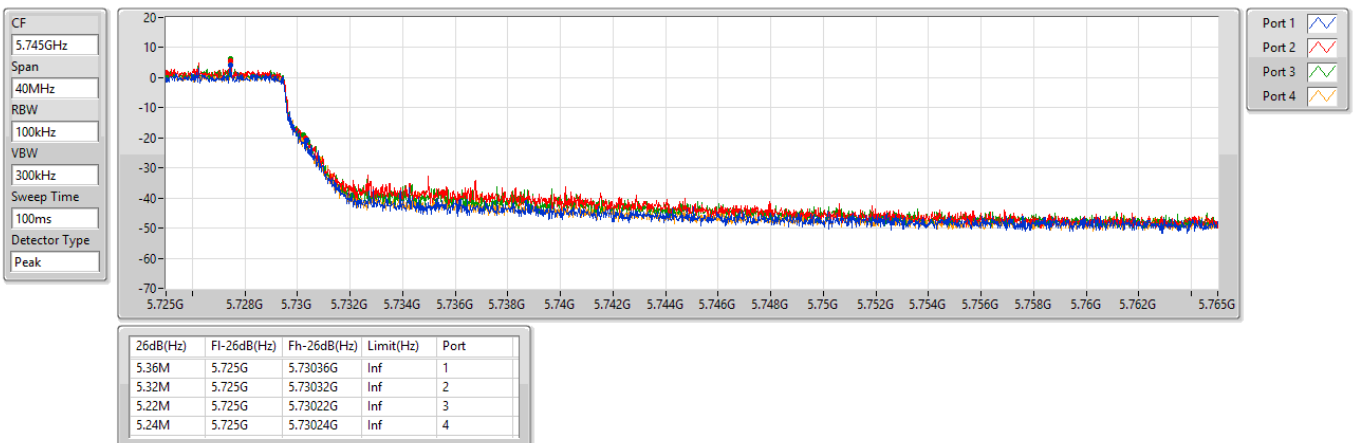




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5745MHz

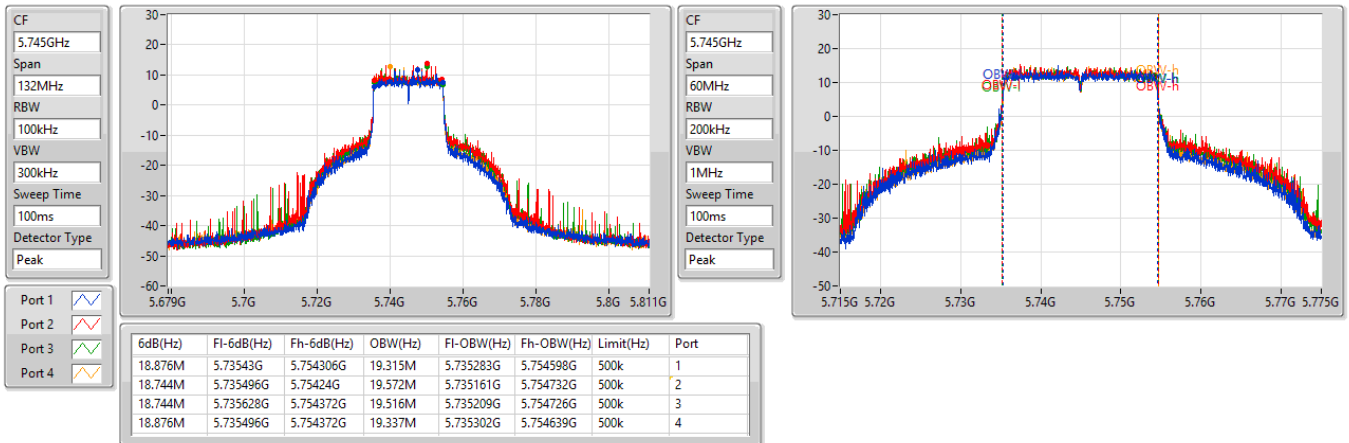

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5745MHz

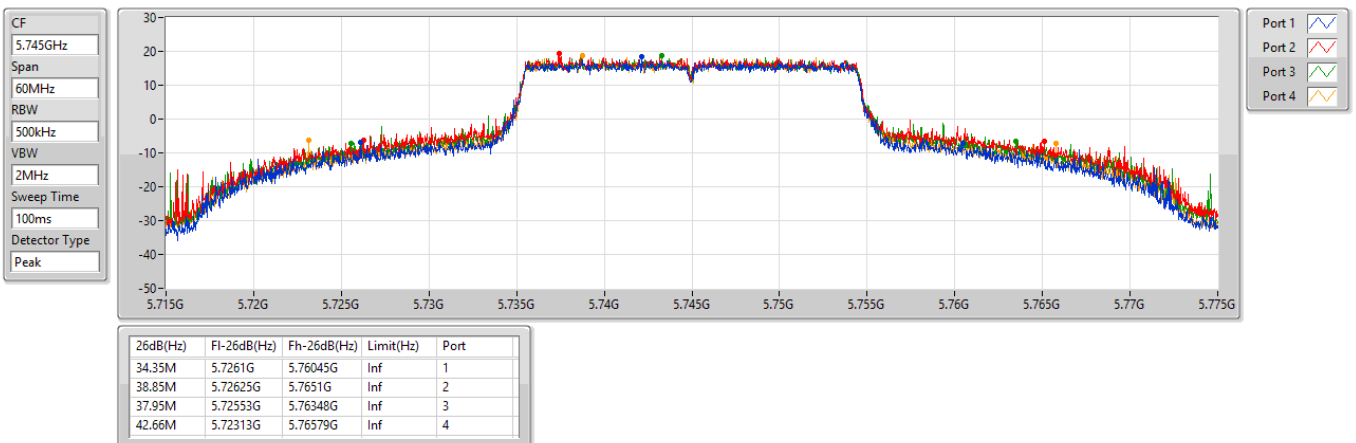

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5785MHz

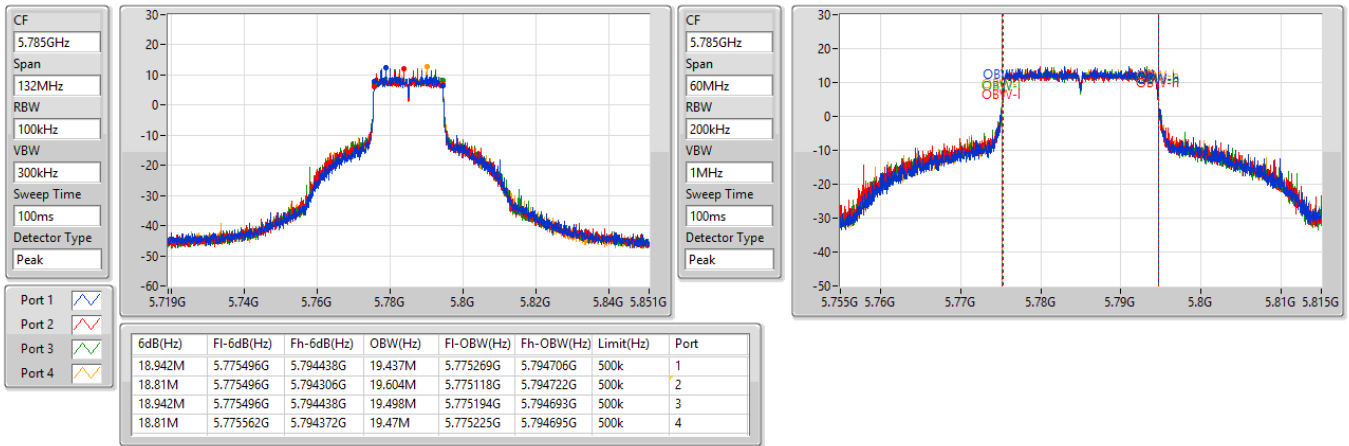

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5785MHz

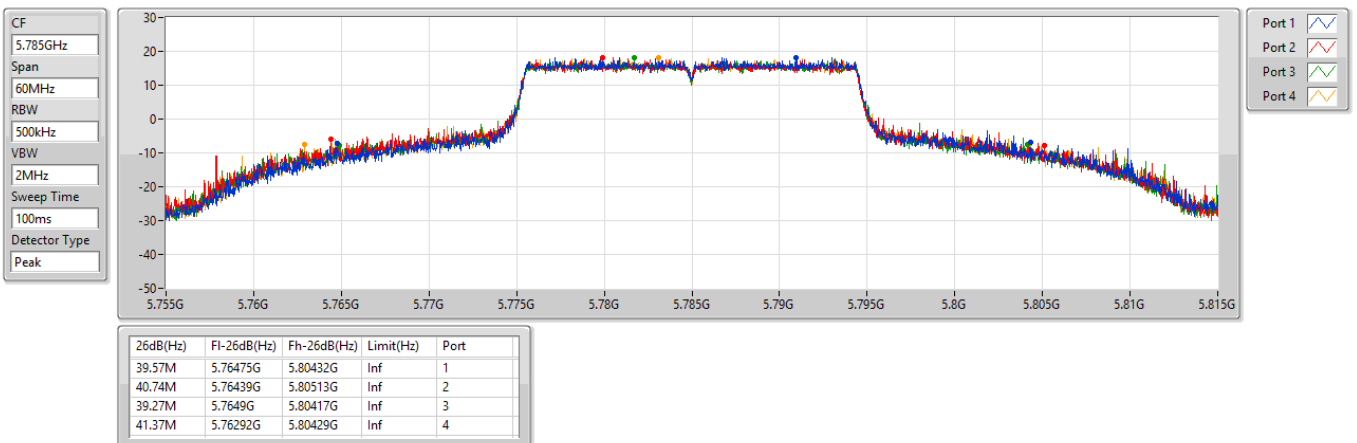




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5825MHz

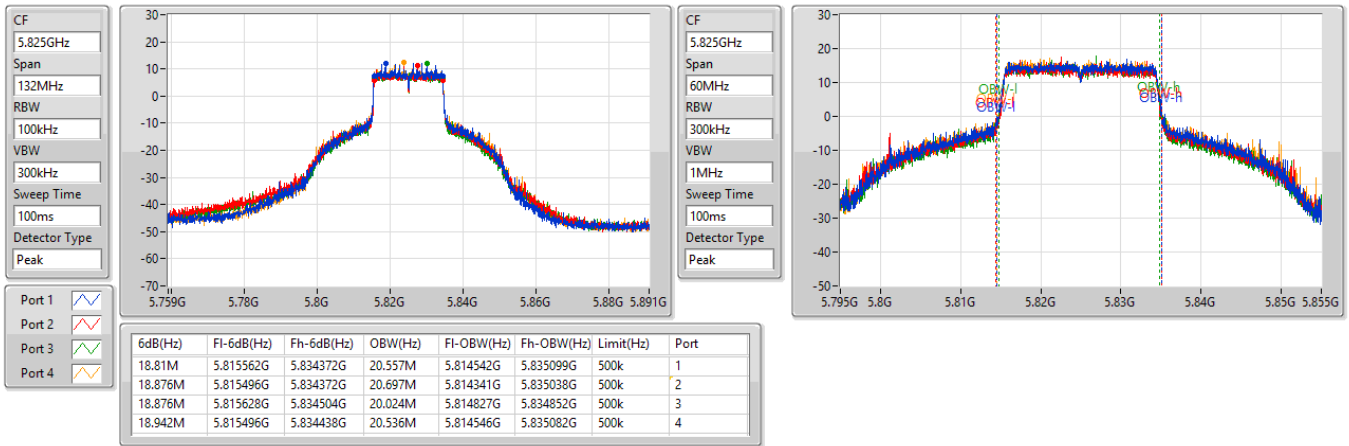

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5825MHz


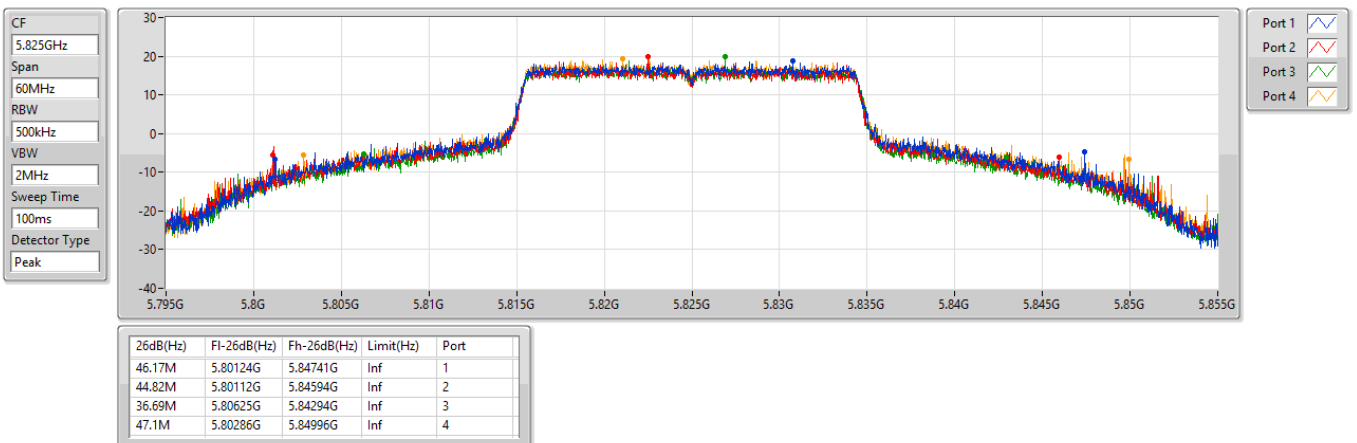




5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5190MHz

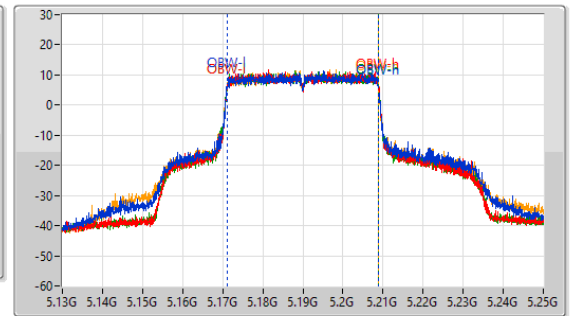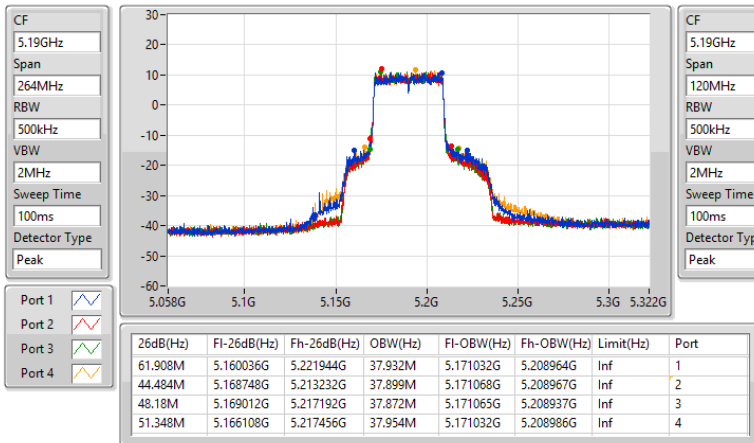

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5230MHz

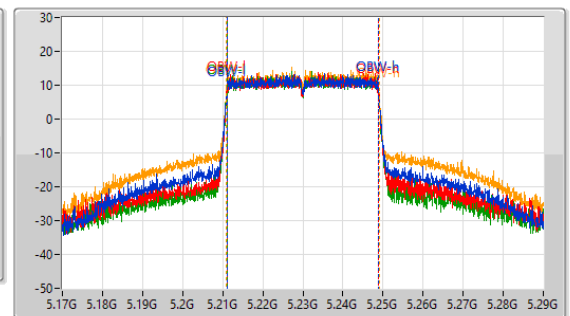
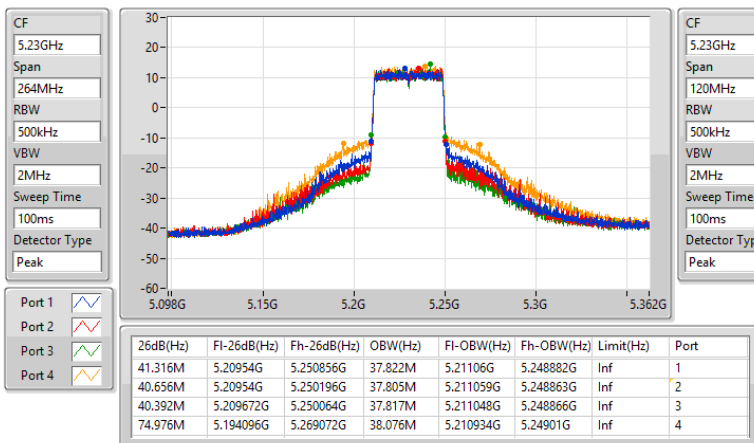




5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5270MHz

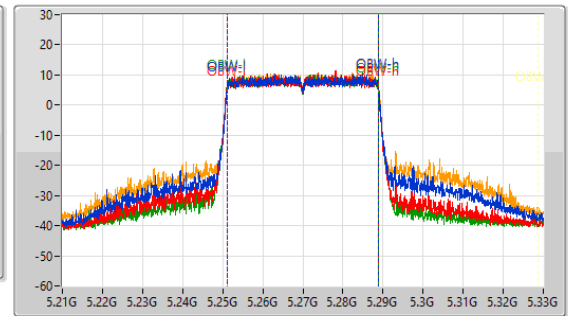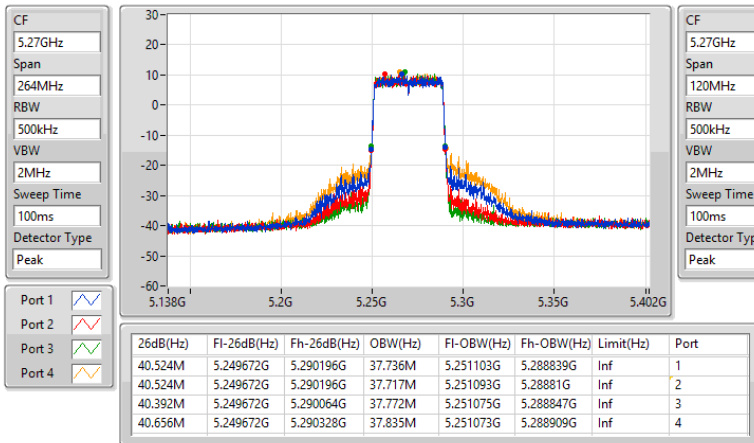

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5310MHz

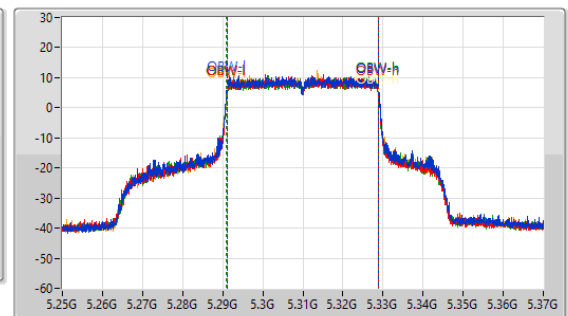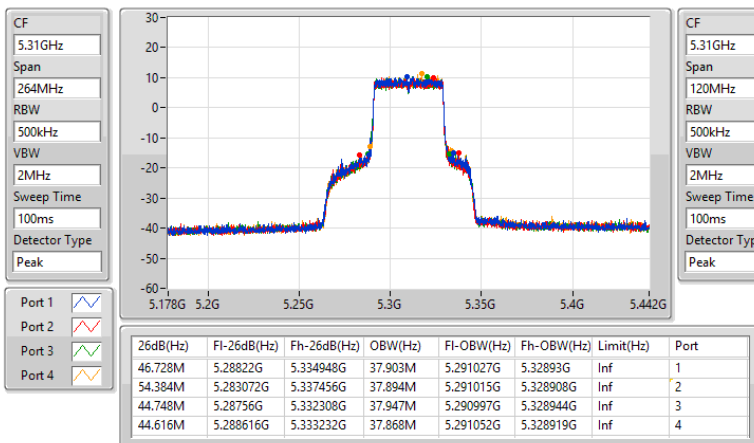




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5510MHz

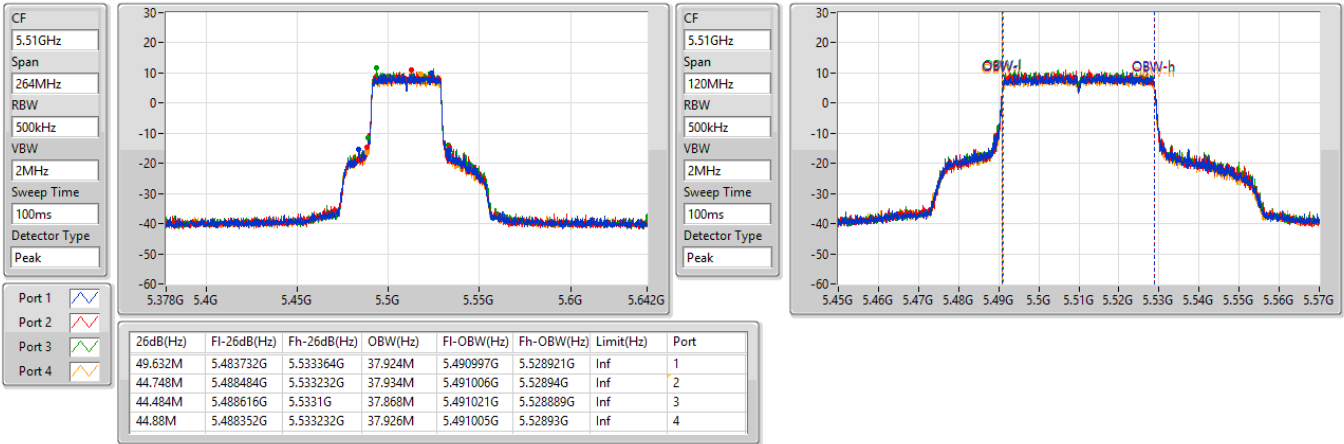

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5590MHz


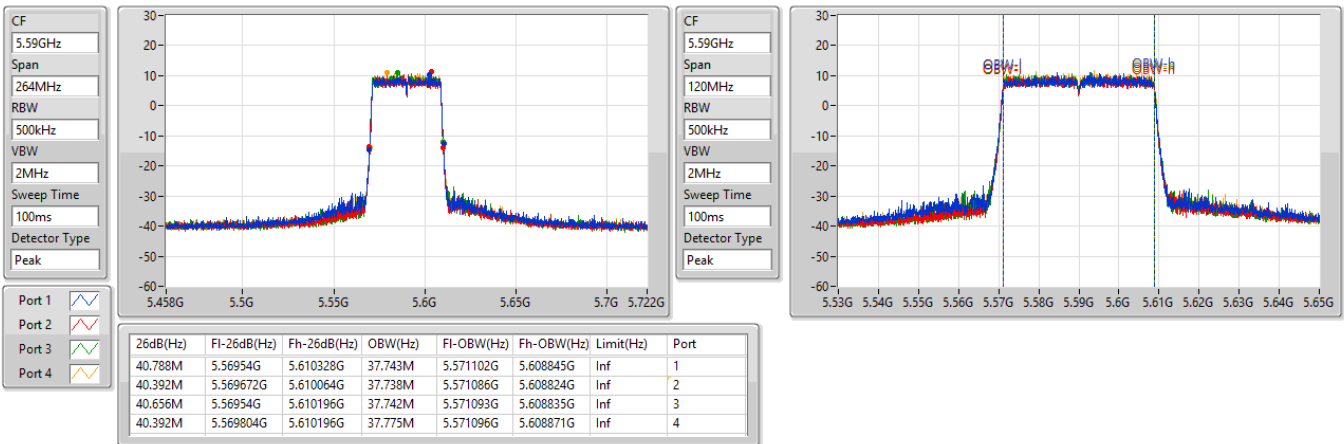




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5670MHz

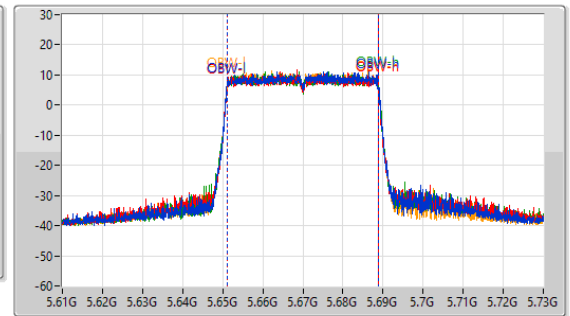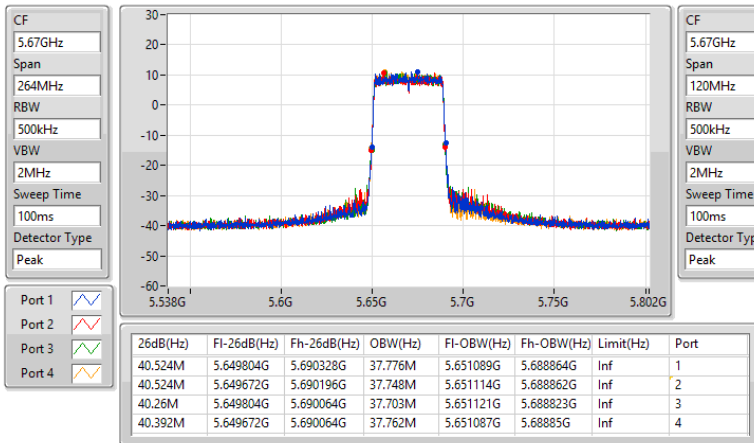

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

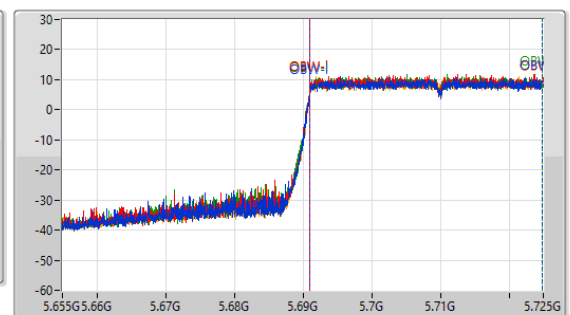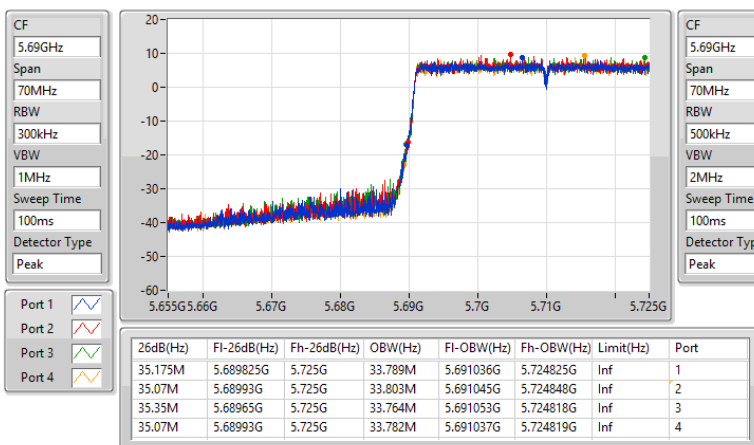




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5710MHz Straddle 5.725-5.85GHz

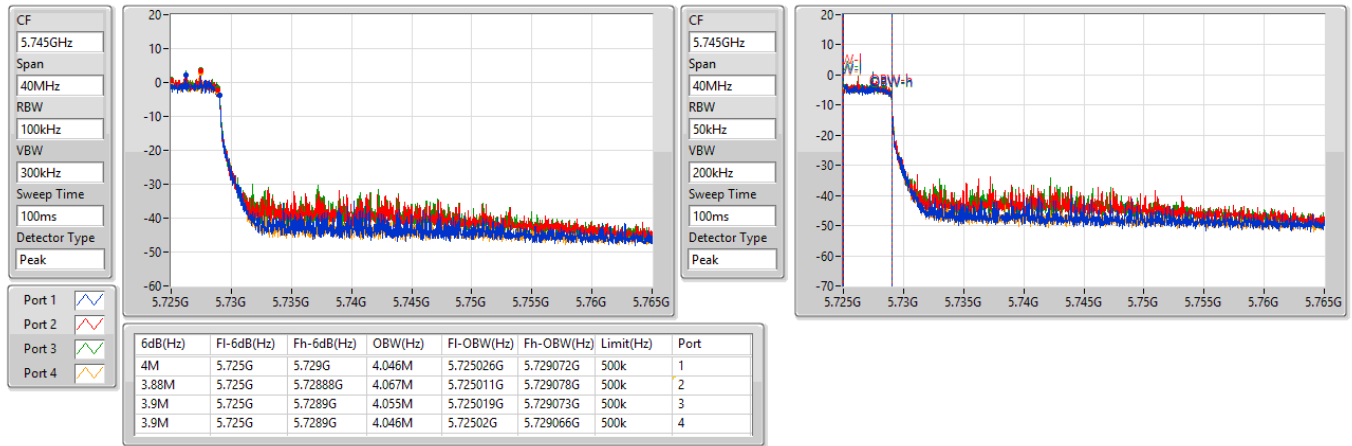

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

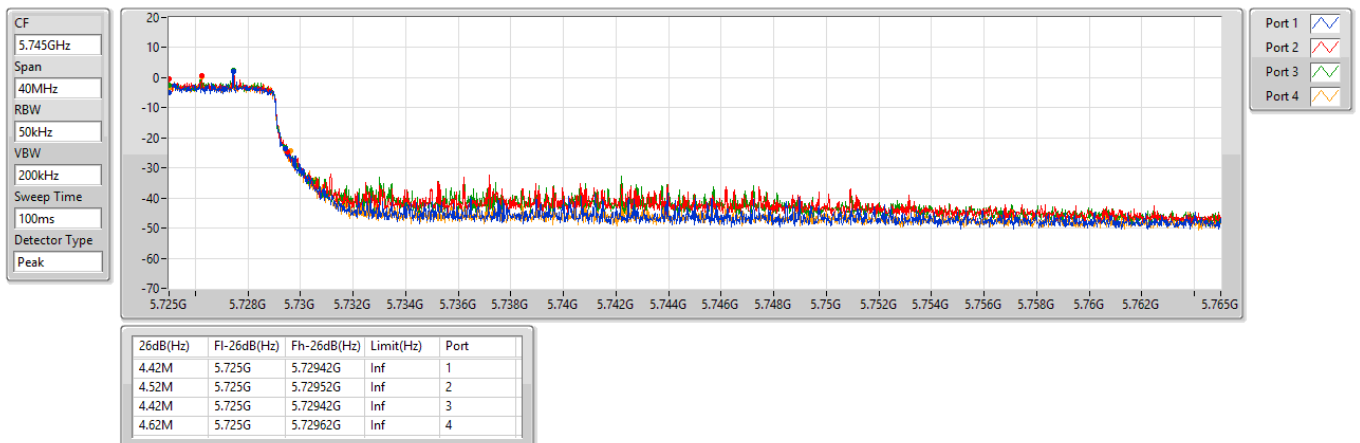




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5755MHz

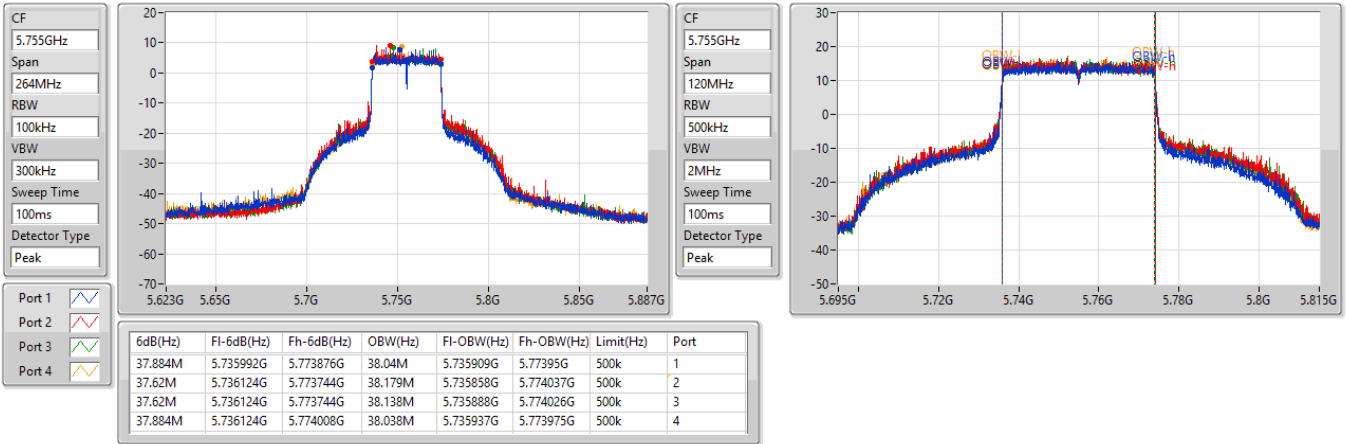

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5755MHz

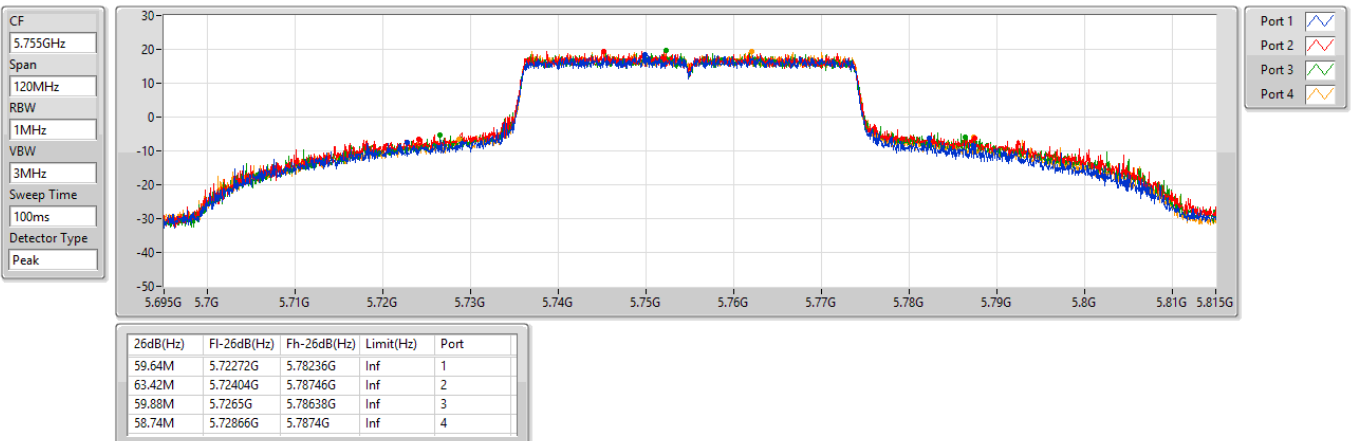




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5795MHz

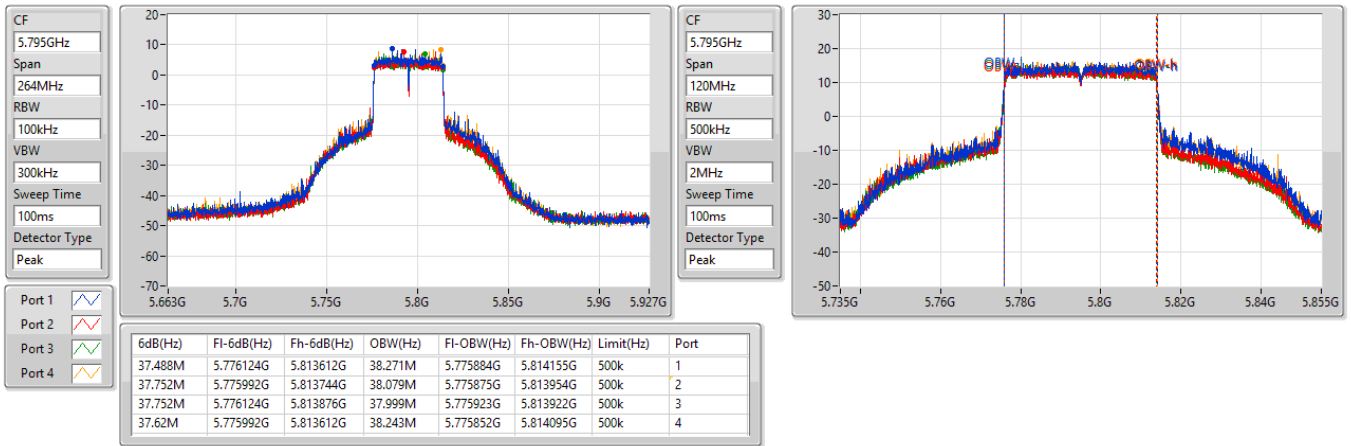

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5795MHz


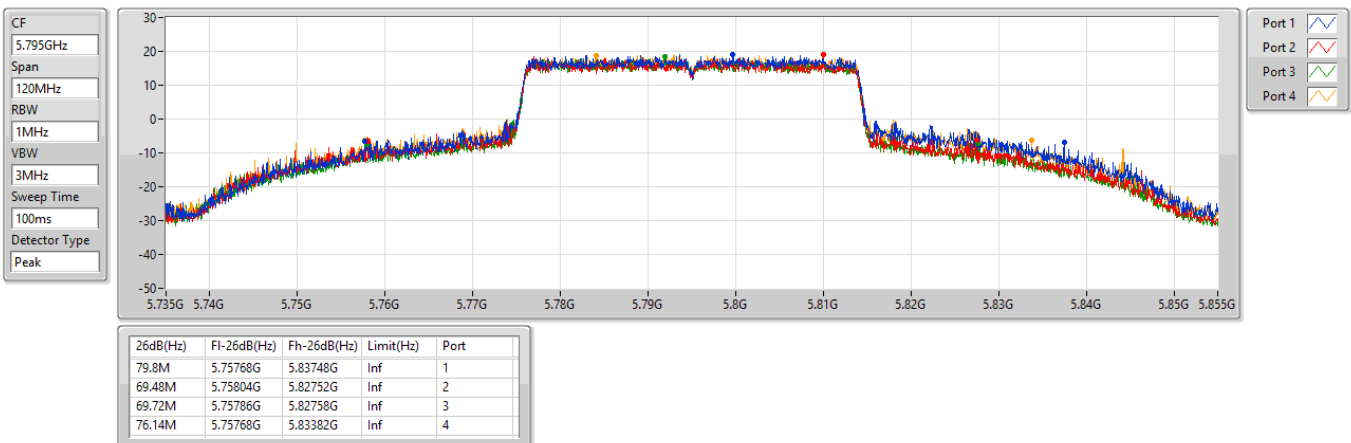




5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



5210MHz

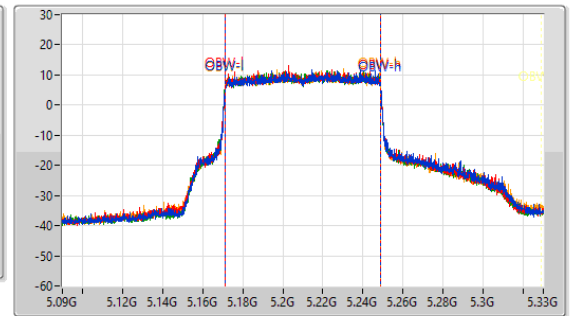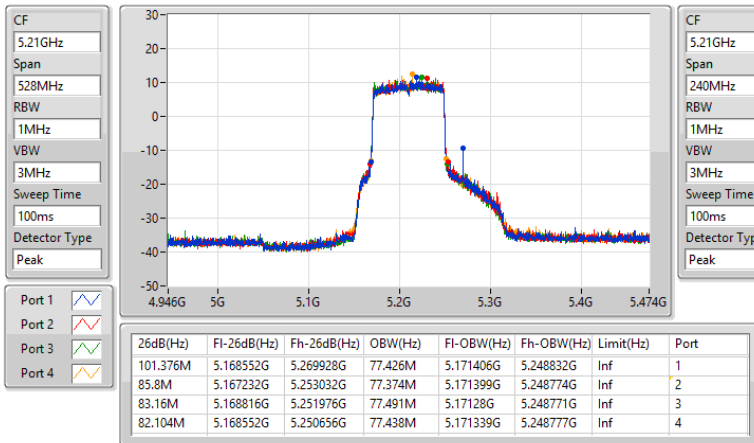

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5290MHz

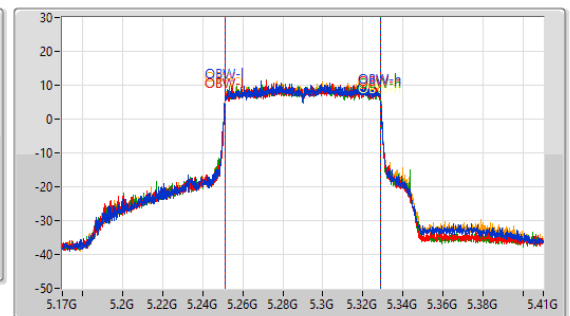
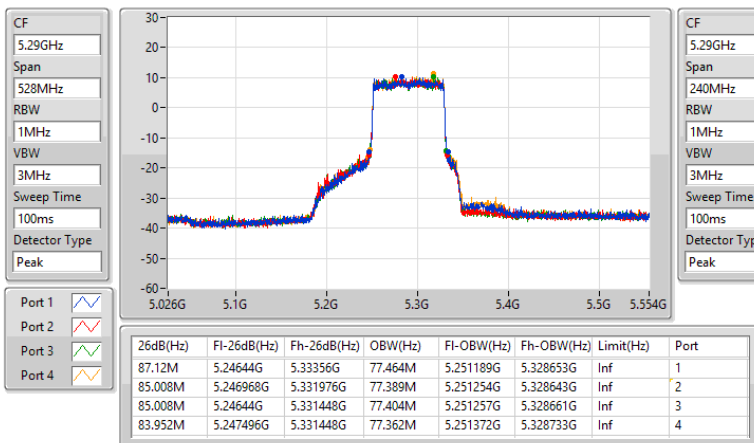




5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



5530MHz

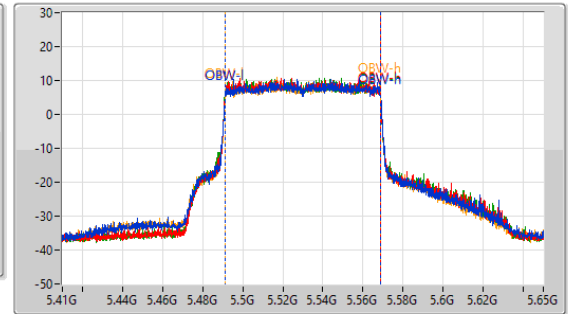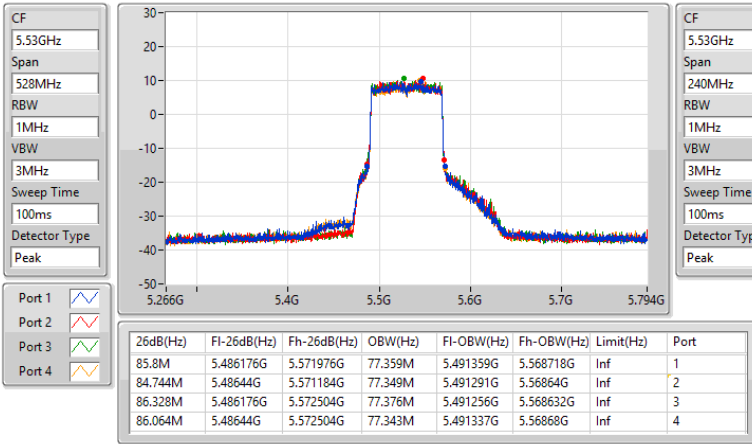

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5610MHz

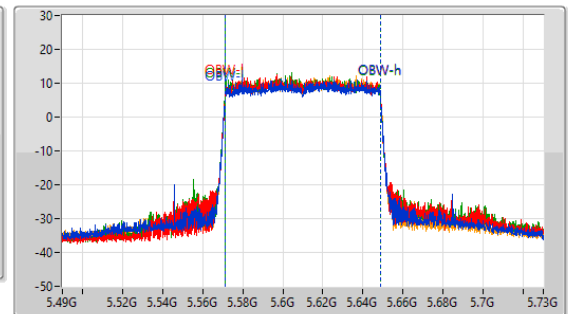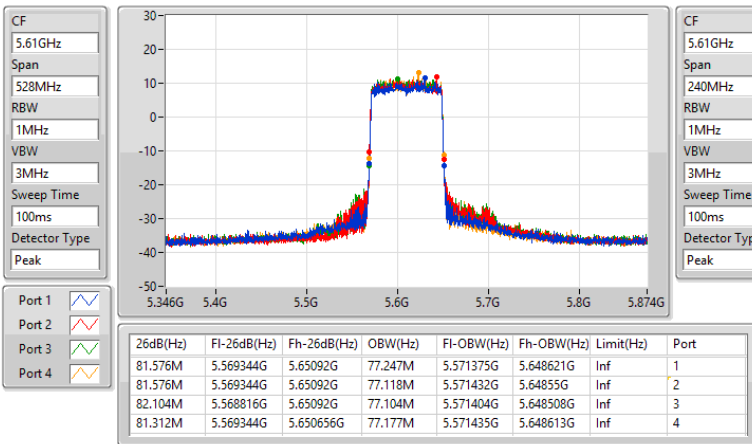




5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5690MHz Straddle 5.47-5.725GHz

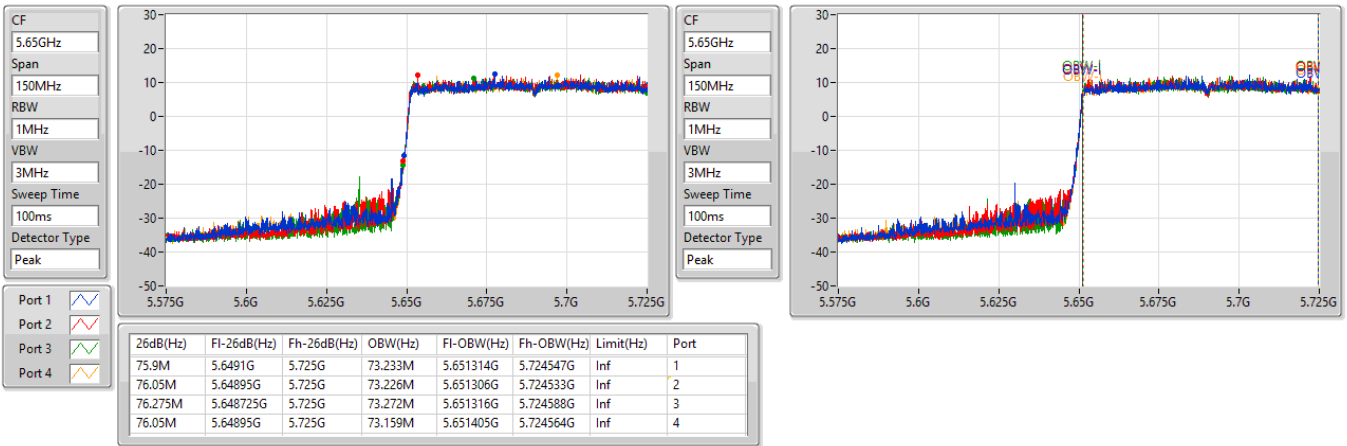

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5690MHz Straddle 5.725-5.85GHz

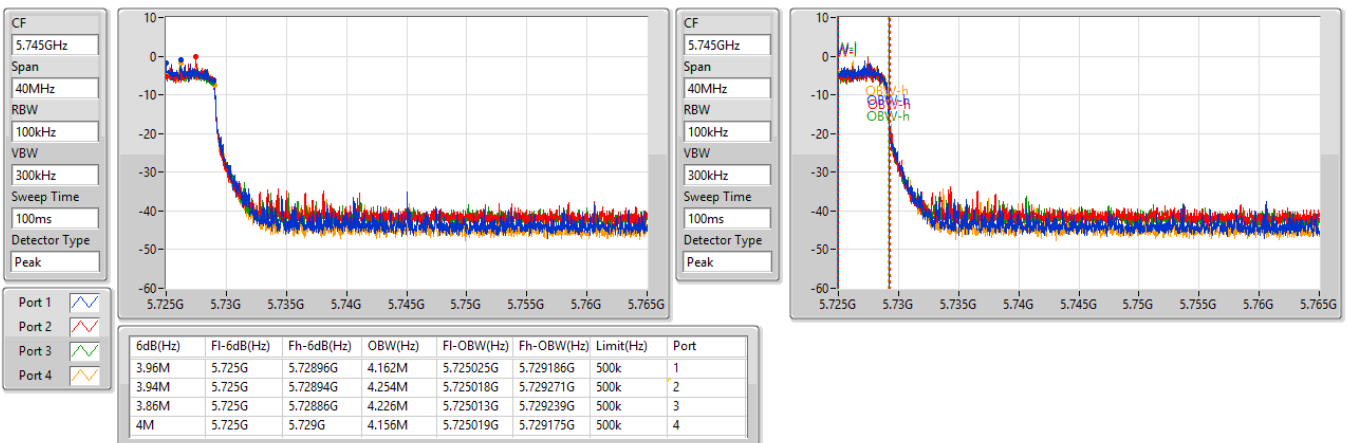

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5690MHz Straddle 5.725-5.85GHz

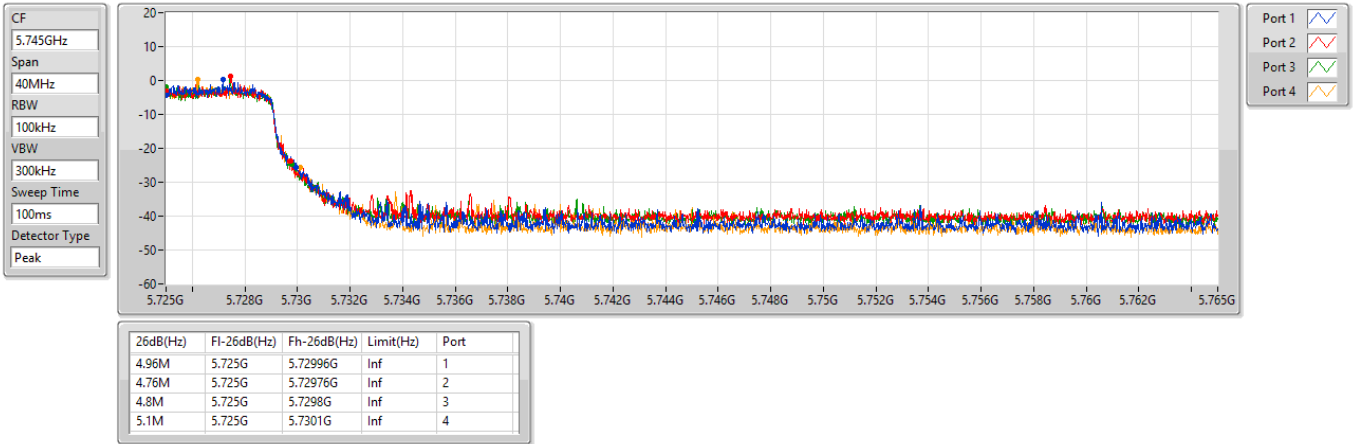

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

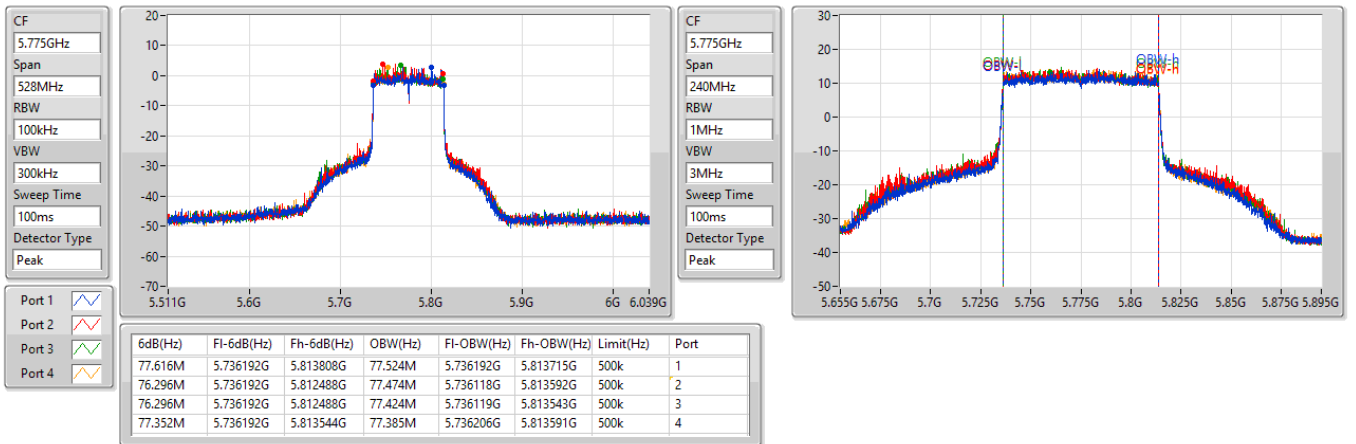




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5775MHz

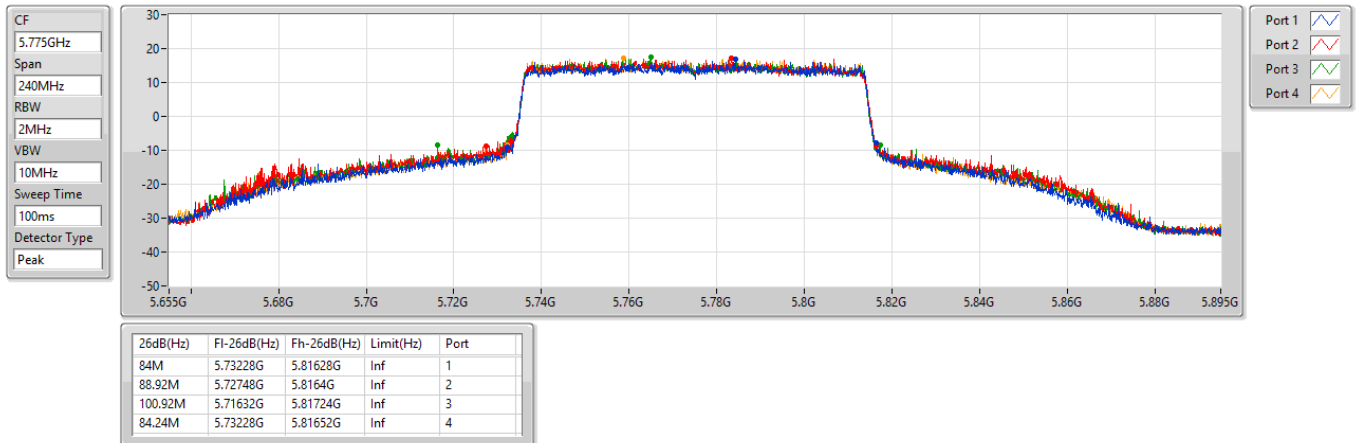

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

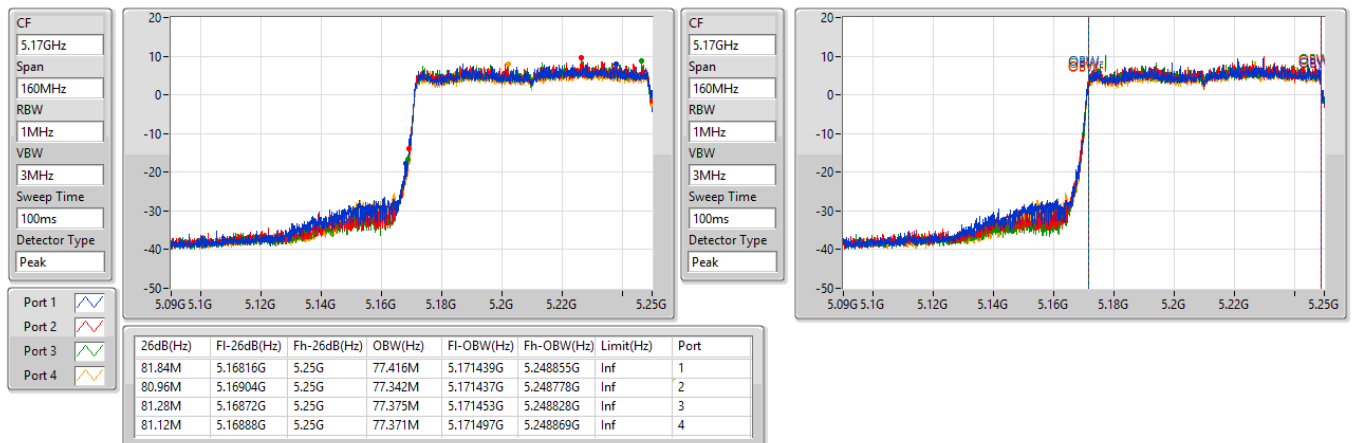




5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


5250MHz Straddle 5.25-5.35GHz

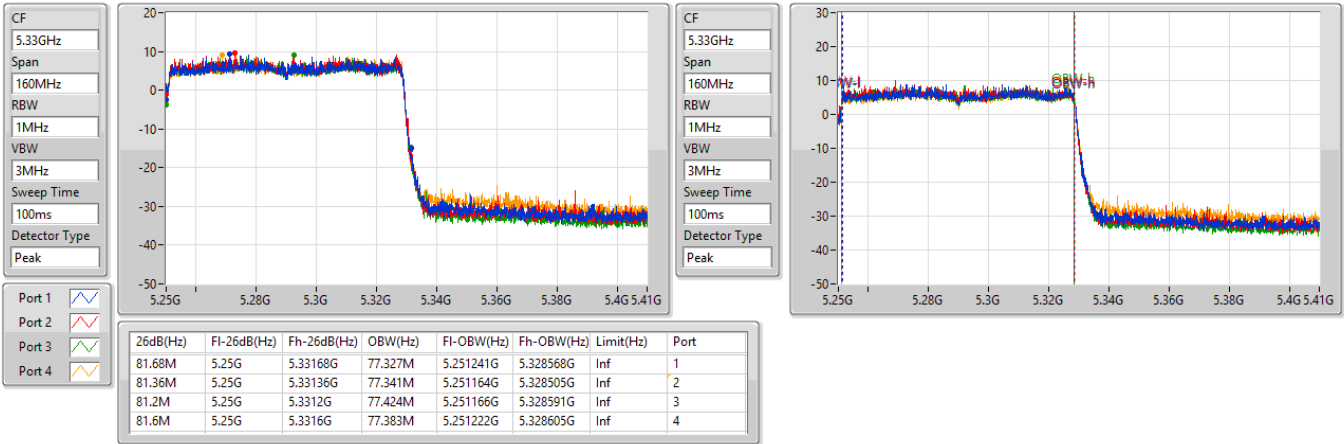

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5570MHz

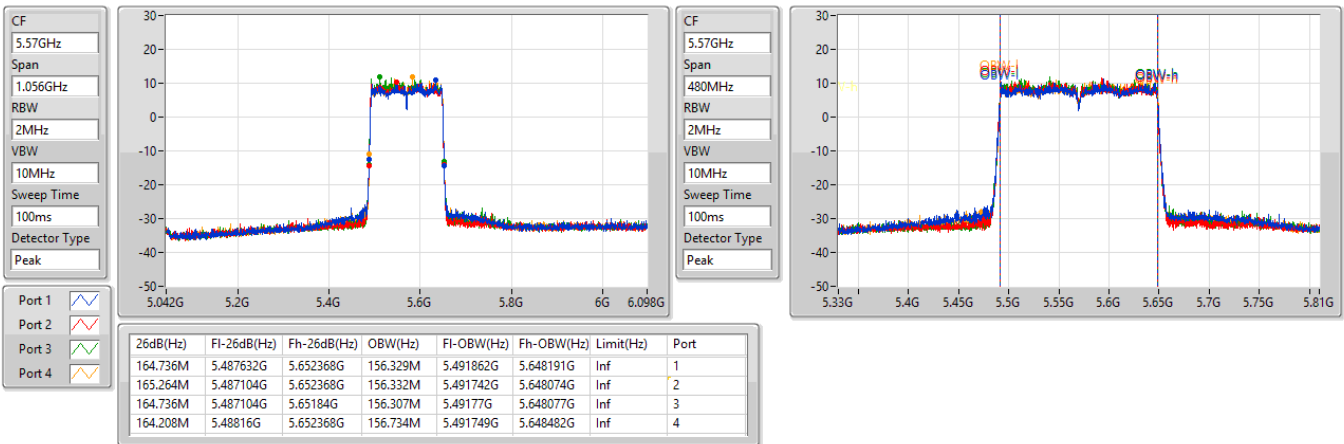

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	29.38	0.86696	33.55	2.26464
802.11be EHT20_Nss1,(MCS0)_4TX	29.68	0.92897	33.85	2.42661
802.11be EHT40_Nss1,(MCS0)_4TX	26.83	0.48195	31.00	1.25893
802.11be EHT80_Nss1,(MCS0)_4TX	23.74	0.23659	27.91	0.61802
802.11be EHT160_Nss1,(MCS0)_4TX	20.26	0.10617	24.43	0.27733
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.66	0.23227	27.12	0.51523
802.11be EHT20_Nss1,(MCS0)_4TX	23.74	0.23659	27.20	0.52481
802.11be EHT40_Nss1,(MCS0)_4TX	23.88	0.24434	27.34	0.54200
802.11be EHT80_Nss1,(MCS0)_4TX	23.26	0.21184	26.72	0.46989
802.11be EHT160_Nss1,(MCS0)_4TX	20.95	0.12445	24.41	0.27606
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.80	0.23988	28.69	0.73961
802.11be EHT20_Nss1,(MCS0)_4TX	23.62	0.23014	28.51	0.70958
802.11be EHT40_Nss1,(MCS0)_4TX	23.83	0.24155	28.72	0.74473
802.11be EHT80_Nss1,(MCS0)_4TX	23.87	0.24378	28.76	0.75162
802.11be EHT160_Nss1,(MCS0)_4TX	22.91	0.19543	27.80	0.60256
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	29.87	0.97051	34.02	2.52348
802.11be EHT20_Nss1,(MCS0)_4TX	29.88	0.97275	34.03	2.52930
802.11be EHT40_Nss1,(MCS0)_4TX	29.55	0.90157	33.70	2.34423
802.11be EHT80_Nss1,(MCS0)_4TX	26.69	0.46666	30.84	1.21339

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.17	19.57	19.72	19.85	18.9	25.55	30.00	29.72	36.00
5200MHz	Pass	4.17	22.34	22.36	22.39	22.01	28.30	30.00	32.47	36.00
5240MHz	Pass	4.17	23.43	23.35	23.3	23.35	29.38	30.00	33.55	36.00
5260MHz	Pass	3.46	17.37	17.67	17.47	17.6	23.55	24.00	27.01	30.00
5300MHz	Pass	3.46	17.53	17.67	17.73	17.61	23.66	24.00	27.12	30.00
5320MHz	Pass	3.46	17.8	17.28	17.43	17.57	23.54	24.00	27.00	30.00
5500MHz	Pass	4.89	17.36	18.04	17.88	17.61	23.75	24.00	28.64	30.00
5580MHz	Pass	4.89	17.72	17.59	17.84	17.96	23.80	24.00	28.69	30.00
5700MHz	Pass	4.89	15.45	15.77	15.74	15.57	21.66	24.00	26.55	30.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.89	15.1	16.75	16.6	15.49	22.06	22.97	26.95	28.97
5720MHz Straddle 5.725-5.85GHz	Pass	4.15	9.07	10.74	10.2	9.71	15.99	30.00	20.14	36.00
5745MHz	Pass	4.15	23.04	24.13	24.15	23.82	29.83	30.00	33.98	36.00
5785MHz	Pass	4.15	23.77	23.91	23.76	23.97	29.87	30.00	34.02	36.00
5825MHz	Pass	4.15	23.95	23.09	23.02	24.02	29.57	30.00	33.72	36.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.17	19.02	19.45	19.35	18.33	25.08	30.00	29.25	36.00
5200MHz	Pass	4.17	20.96	21.32	21.31	20.76	27.11	30.00	31.28	36.00
5240MHz	Pass	4.17	23.67	23.72	23.51	23.75	29.68	30.00	33.85	36.00
5260MHz	Pass	3.46	17.66	17.92	17.75	17.52	23.74	24.00	27.20	30.00
5300MHz	Pass	3.46	17.35	17.61	17.42	17.71	23.55	24.00	27.01	30.00
5320MHz	Pass	3.46	17.72	17.49	17.45	17.56	23.58	24.00	27.04	30.00
5500MHz	Pass	4.89	17.33	17.82	17.83	17.11	23.55	24.00	28.44	30.00
5580MHz	Pass	4.89	17.52	17.53	17.62	17.72	23.62	24.00	28.51	30.00
5700MHz	Pass	4.89	13.84	14.59	14.55	14.25	20.34	24.00	25.23	30.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.89	15.68	17.18	16.83	15.99	22.48	22.98	27.37	28.98
5720MHz Straddle 5.725-5.85GHz	Pass	4.15	10.52	12	11.67	10.84	17.32	30.00	21.47	36.00
5745MHz	Pass	4.15	23.07	23.96	23.78	23.65	29.65	30.00	33.80	36.00
5785MHz	Pass	4.15	23.8	23.72	23.81	24.01	29.86	30.00	34.01	36.00
5825MHz	Pass	4.15	24.16	23.42	23.32	24.45	29.88	30.00	34.03	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.17	18.59	18.75	18.33	18.22	24.50	30.00	28.67	36.00
5230MHz	Pass	4.17	20.54	20.61	20.43	21.55	26.83	30.00	31.00	36.00
5270MHz	Pass	3.46	17.36	17.71	17.54	17.52	23.55	24.00	27.01	30.00
5310MHz	Pass	3.46	18.02	17.64	17.77	18.01	23.88	24.00	27.34	30.00
5510MHz	Pass	4.89	17.42	17.86	18.02	17.14	23.64	24.00	28.53	30.00
5590MHz	Pass	4.89	17.65	17.34	17.64	17.69	23.60	24.00	28.49	30.00


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5670MHz	Pass	4.89	18.07	17.65	17.55	17.93	23.83	24.00	28.72	30.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.89	17.51	18.18	17.99	17.48	23.82	24.00	28.71	30.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.15	7.91	8.55	8.58	8.07	14.31	30.00	18.46	36.00
5755MHz	Pass	4.15	23.21	23.63	23.27	23.81	29.51	30.00	33.66	36.00
5795MHz	Pass	4.15	23.89	23.12	23.11	23.91	29.55	30.00	33.70	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.17	17.82	18.02	17.65	17.36	23.74	30.00	27.91	36.00
5290MHz	Pass	3.46	17.45	17.03	17.09	17.37	23.26	24.00	26.72	30.00
5530MHz	Pass	4.89	16.96	17.29	17.15	16.78	23.07	24.00	27.96	30.00
5610MHz	Pass	4.89	17.31	18.03	18.15	17.85	23.87	24.00	28.76	30.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.89	17.73	17.91	17.56	17.7	23.75	24.00	28.64	30.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.15	4.69	4.38	4.24	4.48	10.47	30.00	14.62	36.00
5775MHz	Pass	4.15	20.42	21.02	20.61	20.61	26.69	30.00	30.84	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.17	14.31	14.52	14.35	13.72	20.26	30.00	24.43	36.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.46	14.96	15.22	14.79	14.71	20.95	24.00	24.41	30.00
5570MHz	Pass	4.89	16.71	16.93	17.16	16.75	22.91	24.00	27.80	30.00

DG = Directional Gain; Port X = Port X output power

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

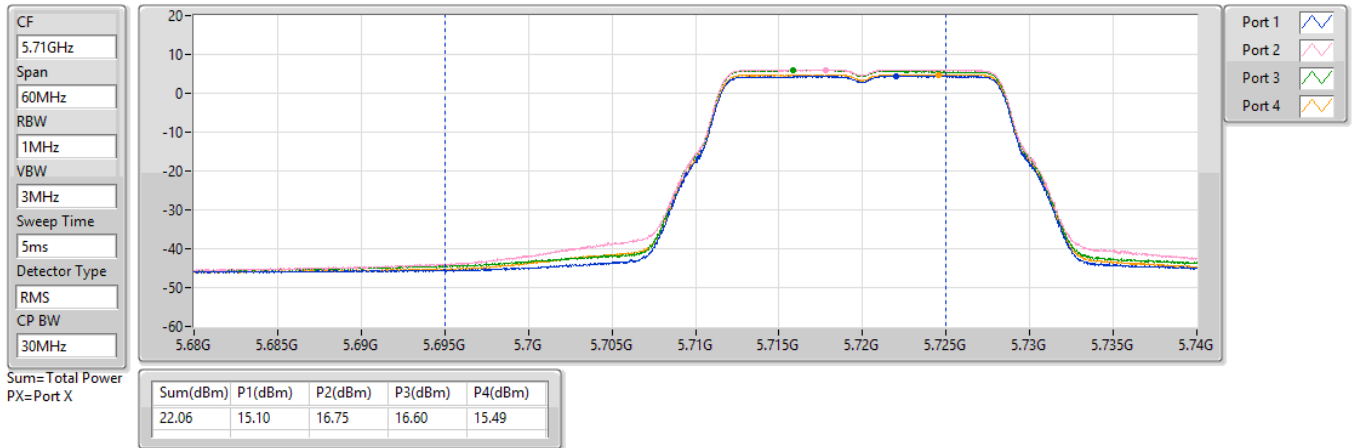

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

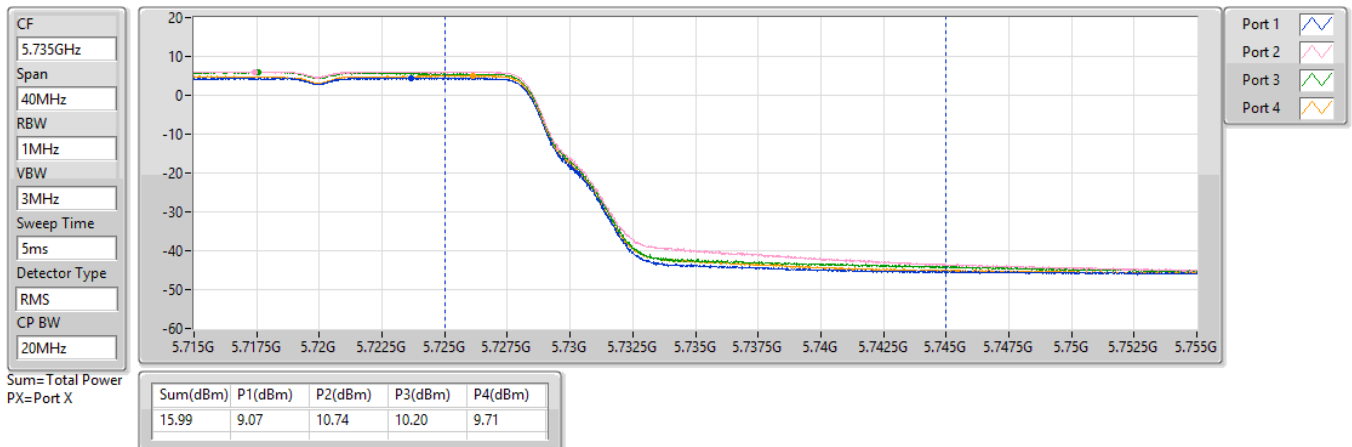

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

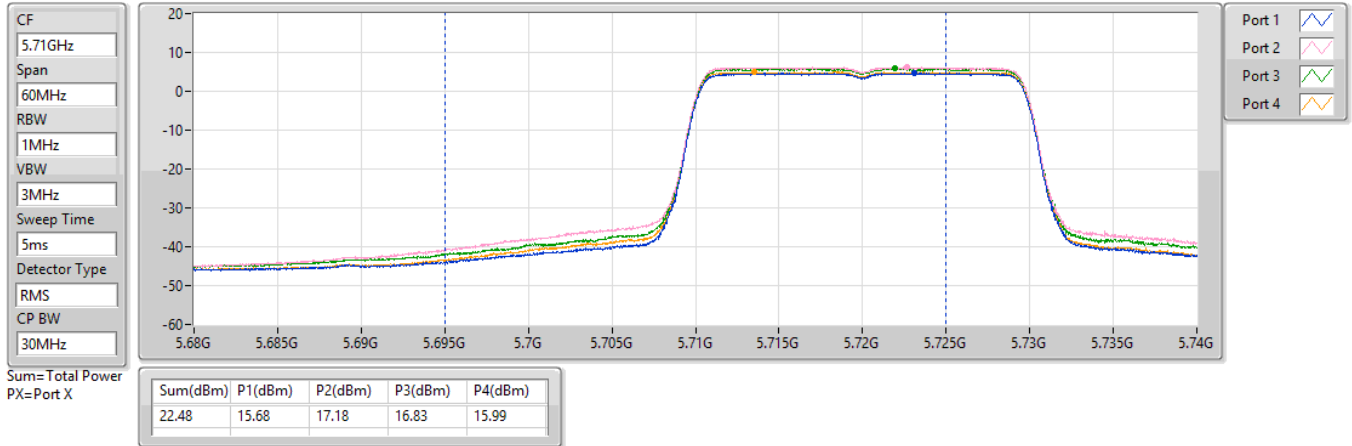

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

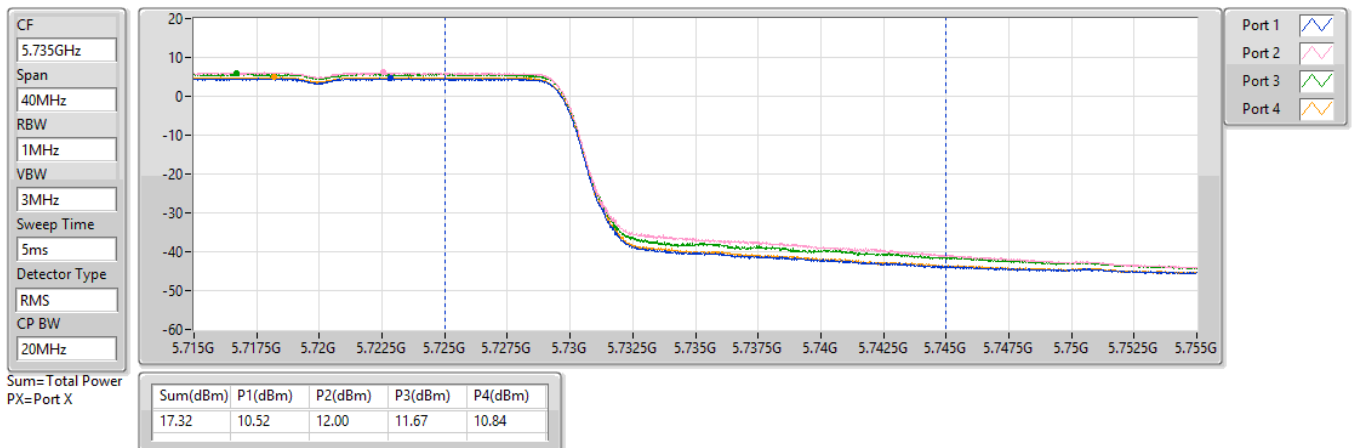

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power


5710MHz Straddle 5.47-5.725GHz_TX

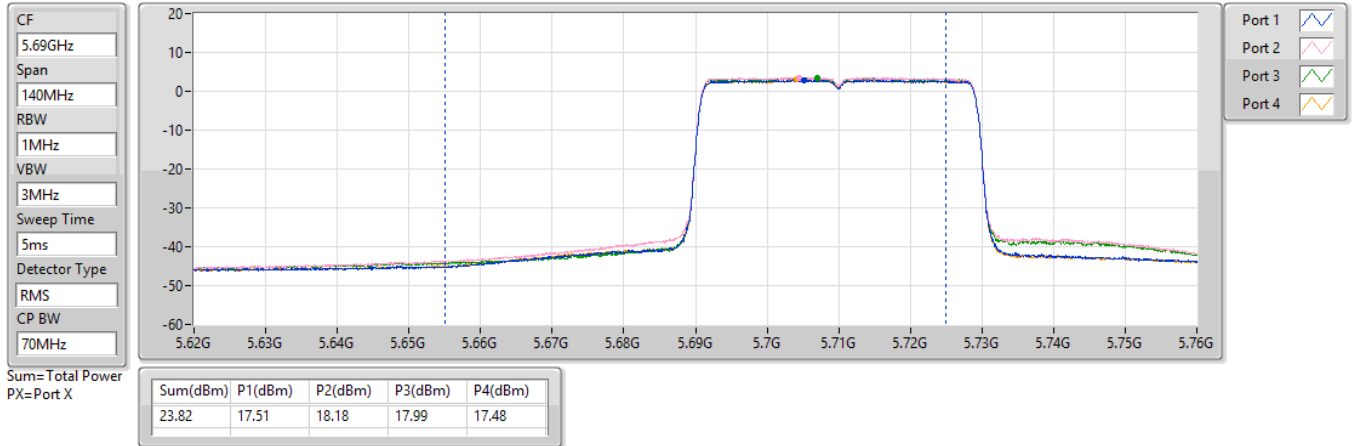

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

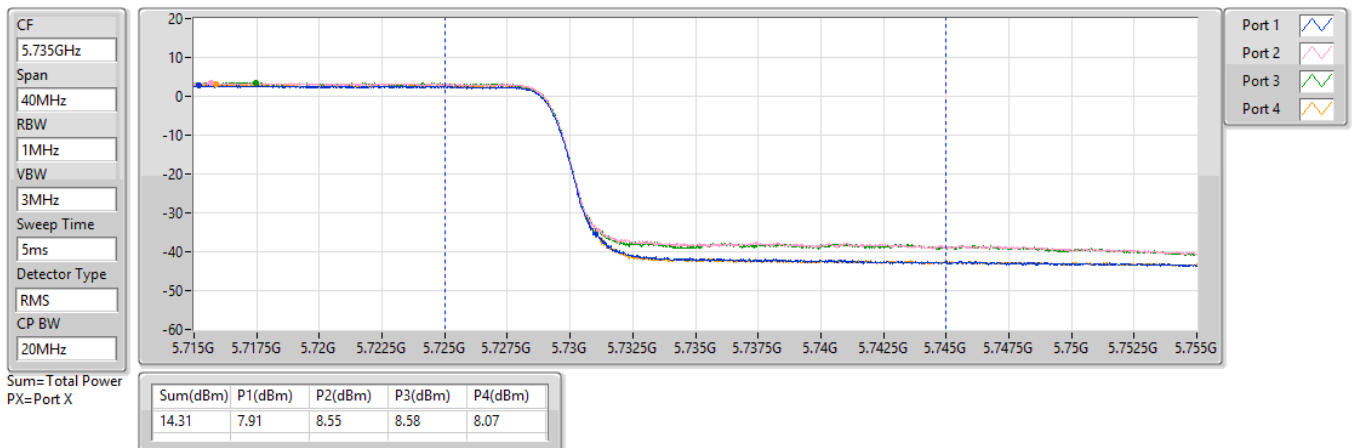




5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

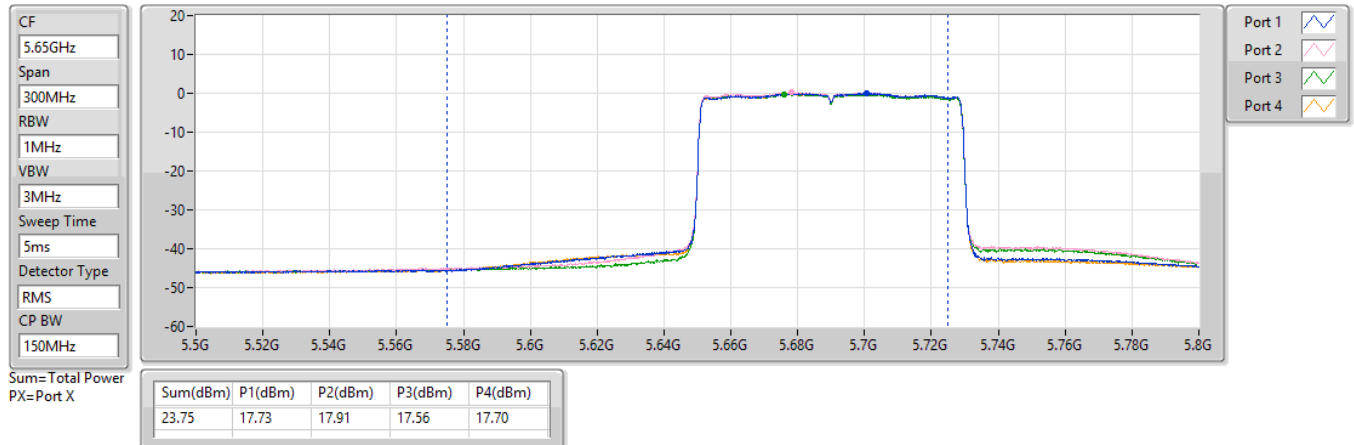

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

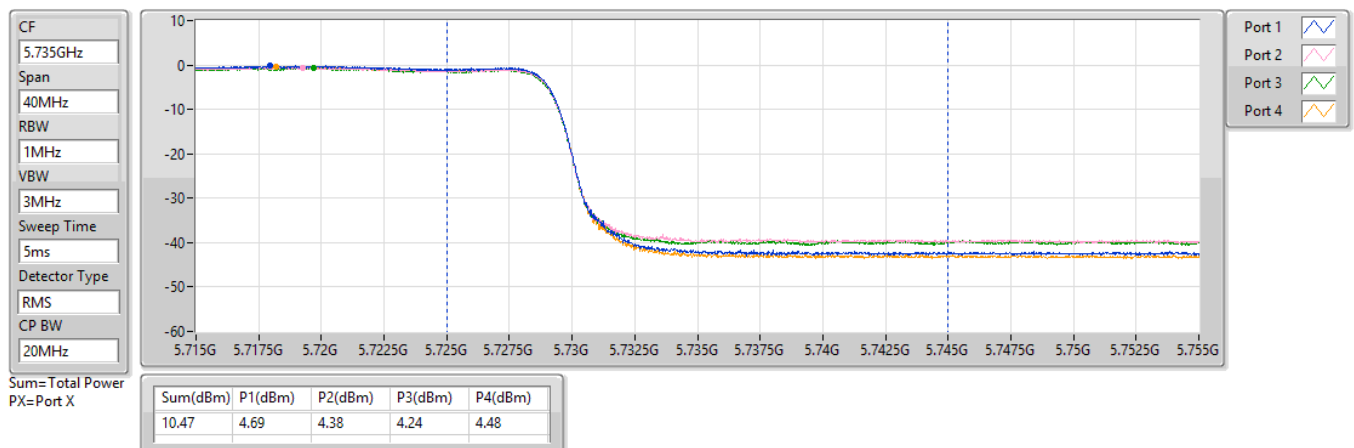




5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

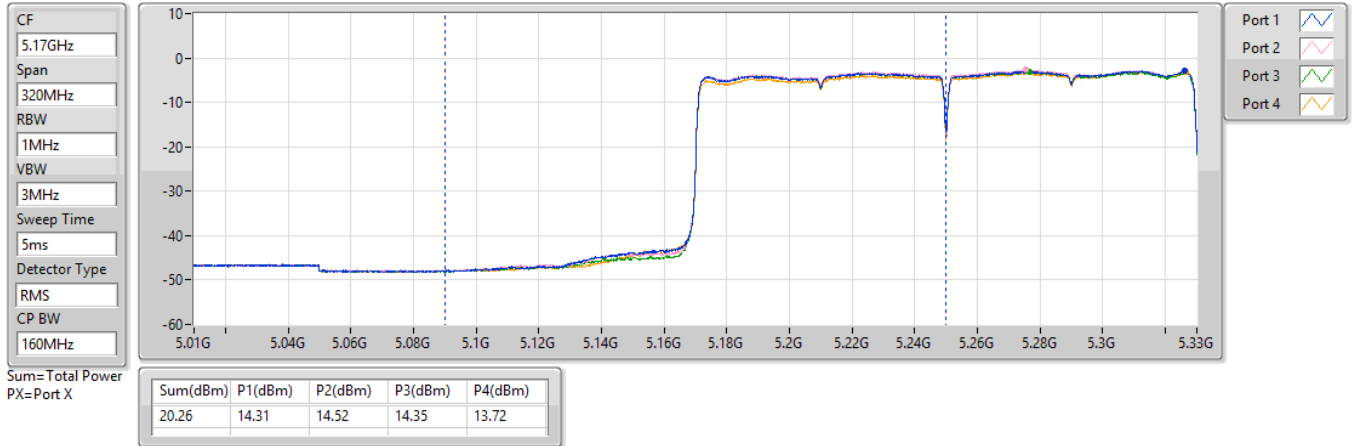

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

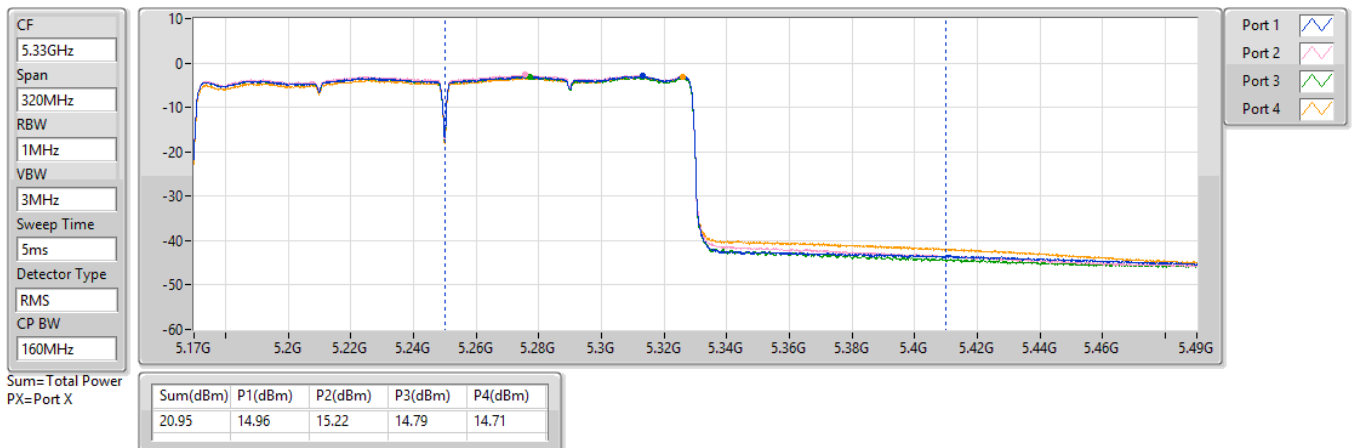

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	29.22	0.83560	33.85	2.42661
802.11be EHT40-BF_Nss1,(MCS0)_4TX	26.37	0.43351	31.00	1.25893
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.28	0.21281	27.91	0.61802
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.06	0.08054	23.69	0.23388
5.25-5.35GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.54	0.17947	27.20	0.52481
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.68	0.18535	27.34	0.54200
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.06	0.16069	26.72	0.46989
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.75	0.09441	24.41	0.27606
5.47-5.725GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.53	0.17906	28.51	0.70958
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.74	0.18793	28.72	0.74473
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.78	0.18967	28.76	0.75162
802.11be EHT160-BF_Nss1,(MCS0)_4TX	21.82	0.15205	27.80	0.60256
5.725-5.85GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.13	0.65013	34.03	2.52930
802.11be EHT40-BF_Nss1,(MCS0)_4TX	27.80	0.60256	33.70	2.34423
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.94	0.31189	30.84	1.21339

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.63	18.56	18.99	18.89	17.87	24.62	30.00	29.25	36.00
5200MHz	Pass	4.63	20.5	20.86	20.85	20.3	26.65	30.00	31.28	36.00
5240MHz	Pass	4.63	23.21	23.26	23.05	23.29	29.22	30.00	33.85	36.00
5260MHz	Pass	4.66	16.46	16.72	16.55	16.32	22.54	24.00	27.20	30.00
5300MHz	Pass	4.66	16.15	16.41	16.22	16.51	22.35	24.00	27.01	30.00
5320MHz	Pass	4.66	16.52	16.29	16.25	16.36	22.38	24.00	27.04	30.00
5500MHz	Pass	5.98	16.24	16.73	16.74	16.02	22.46	24.00	28.44	30.00
5580MHz	Pass	5.98	16.43	16.44	16.53	16.63	22.53	24.00	28.51	30.00
5700MHz	Pass	5.98	12.75	13.5	13.46	13.16	19.25	24.00	25.23	30.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.98	13.93	15.43	15.08	14.24	20.73	22.98	26.71	28.98
5720MHz Straddle 5.725-5.85GHz	Pass	5.90	8.77	10.25	9.92	9.09	15.57	30.00	21.47	36.00
5745MHz	Pass	5.90	21.32	22.21	22.03	21.9	27.90	30.00	33.80	36.00
5785MHz	Pass	5.90	22.05	21.97	22.06	22.26	28.11	30.00	34.01	36.00
5825MHz	Pass	5.90	22.41	21.67	21.57	22.7	28.13	30.00	34.03	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.63	18.13	18.29	17.87	17.76	24.04	30.00	28.67	36.00
5230MHz	Pass	4.63	20.08	20.15	19.97	21.09	26.37	30.00	31.00	36.00
5270MHz	Pass	4.66	16.16	16.51	16.34	16.32	22.35	24.00	27.01	30.00
5310MHz	Pass	4.66	16.82	16.44	16.57	16.81	22.68	24.00	27.34	30.00
5510MHz	Pass	5.98	16.33	16.77	16.93	16.05	22.55	24.00	28.53	30.00
5590MHz	Pass	5.98	16.56	16.25	16.55	16.6	22.51	24.00	28.49	30.00
5670MHz	Pass	5.98	16.98	16.56	16.46	16.84	22.74	24.00	28.72	30.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.98	15.76	16.43	16.24	15.73	22.07	24.00	28.05	30.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.90	6.16	6.8	6.83	6.32	12.56	30.00	18.46	36.00
5755MHz	Pass	5.90	21.46	21.88	21.52	22.06	27.76	30.00	33.66	36.00
5795MHz	Pass	5.90	22.14	21.37	21.36	22.16	27.80	30.00	33.70	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.63	17.36	17.56	17.19	16.9	23.28	30.00	27.91	36.00
5290MHz	Pass	4.66	16.25	15.83	15.89	16.17	22.06	24.00	26.72	30.00
5530MHz	Pass	5.98	15.87	16.2	16.06	15.69	21.98	24.00	27.96	30.00
5610MHz	Pass	5.98	16.22	16.94	17.06	16.76	22.78	24.00	28.76	30.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.98	15.98	16.16	15.81	15.95	22.00	24.00	27.98	30.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.90	2.94	2.63	2.49	2.73	8.72	30.00	14.62	36.00
5775MHz	Pass	5.90	18.67	19.27	18.86	18.86	24.94	30.00	30.84	36.00

**Conducted Output Power(Average)****Appendix B.2**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.63	13.11	13.32	13.15	12.52	19.06	30.00	23.69	36.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.66	13.76	14.02	13.59	13.51	19.75	24.00	24.41	30.00
5570MHz	Pass	5.98	15.62	15.84	16.07	15.66	21.82	24.00	27.80	30.00

DG = Directional Gain; Port X = Port X output power

Refers to antenna test report for DG gain.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	16.10	20.73
802.11be EHT20_Nss1,(MCS0)_4TX	15.86	20.49
802.11be EHT40_Nss1,(MCS0)_4TX	10.10	14.73
802.11be EHT80_Nss1,(MCS0)_4TX	4.47	9.10
802.11be EHT160_Nss1,(MCS0)_4TX	1.04	5.67
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	10.45	15.11
802.11be EHT20_Nss1,(MCS0)_4TX	10.07	14.73
802.11be EHT40_Nss1,(MCS0)_4TX	7.21	11.87
802.11be EHT80_Nss1,(MCS0)_4TX	3.82	8.48
802.11be EHT160_Nss1,(MCS0)_4TX	1.41	6.07
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	10.74	16.72
802.11be EHT20_Nss1,(MCS0)_4TX	9.98	15.96
802.11be EHT40_Nss1,(MCS0)_4TX	7.56	13.54
802.11be EHT80_Nss1,(MCS0)_4TX	4.70	10.68
802.11be EHT160_Nss1,(MCS0)_4TX	0.46	6.44
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	15.42	21.32
802.11be EHT20_Nss1,(MCS0)_4TX	14.64	20.54
802.11be EHT40_Nss1,(MCS0)_4TX	11.23	17.13
802.11be EHT80_Nss1,(MCS0)_4TX	5.80	11.70

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.63	6.36	6.43	6.62	5.96	12.14	17.00	16.77	23.00
5200MHz	Pass	4.63	8.92	9.10	9.30	9.18	14.98	17.00	19.61	23.00
5240MHz	Pass	4.63	10.36	10.27	10.36	10.09	16.10	17.00	20.73	23.00
5260MHz	Pass	4.66	4.20	4.72	4.50	4.48	10.30	11.00	14.96	17.00
5300MHz	Pass	4.66	4.63	4.42	4.64	4.80	10.45	11.00	15.11	17.00
5320MHz	Pass	4.66	4.50	4.36	4.43	4.48	10.25	11.00	14.91	17.00
5500MHz	Pass	5.98	4.76	5.03	5.18	4.19	10.62	11.00	16.60	17.00
5580MHz	Pass	5.98	4.84	4.93	5.04	4.91	10.74	11.00	16.72	17.00
5700MHz	Pass	5.98	2.53	3.06	3.18	2.49	8.66	11.00	14.64	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.98	3.21	4.75	4.63	3.66	9.87	11.00	15.85	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.90	1.52	3.08	2.70	2.03	8.27	30.00	14.17	36.00
5745MHz	Pass	5.90	9.03	9.78	10.05	9.71	15.42	30.00	21.32	36.00
5785MHz	Pass	5.90	9.13	8.99	9.33	9.39	15.04	30.00	20.94	36.00
5825MHz	Pass	5.90	9.20	8.54	8.66	9.36	14.82	30.00	20.72	36.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	4.63	5.37	5.70	5.91	5.18	11.35	17.00	15.98	23.00
5200MHz	Pass	4.63	7.29	7.41	7.68	7.52	13.26	17.00	17.89	23.00
5240MHz	Pass	4.63	10.11	10.21	10.08	9.71	15.86	17.00	20.49	23.00
5260MHz	Pass	4.66	4.01	4.41	4.45	4.21	10.07	11.00	14.73	17.00
5300MHz	Pass	4.66	4.22	3.94	3.99	4.26	9.90	11.00	14.56	17.00
5320MHz	Pass	4.66	4.26	3.97	4.17	4.11	9.91	11.00	14.57	17.00
5500MHz	Pass	5.98	3.90	4.48	4.39	3.71	9.88	11.00	15.86	17.00
5580MHz	Pass	5.98	3.91	4.23	4.28	4.21	9.98	11.00	15.96	17.00
5700MHz	Pass	5.98	0.33	1.15	1.24	0.75	6.64	11.00	12.62	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.98	3.26	4.69	4.40	3.57	9.83	11.00	15.81	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.90	1.61	3.23	2.84	1.93	8.29	30.00	14.19	36.00
5745MHz	Pass	5.90	7.99	8.80	8.88	8.67	14.35	30.00	20.25	36.00
5785MHz	Pass	5.90	8.96	8.67	8.90	9.13	14.64	30.00	20.54	36.00
5825MHz	Pass	5.90	8.79	8.14	8.23	9.13	14.35	30.00	20.25	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	4.63	1.91	2.00	2.12	2.20	7.83	17.00	12.46	23.00
5230MHz	Pass	4.63	3.94	3.93	4.23	5.16	10.10	17.00	14.73	23.00
5270MHz	Pass	4.66	0.81	0.94	1.01	1.38	6.89	11.00	11.55	17.00
5310MHz	Pass	4.66	1.70	1.20	1.12	1.50	7.21	11.00	11.87	17.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5510MHz	Pass	5.98	0.82	1.16	1.63	0.51	6.84	11.00	12.82	17.00
5590MHz	Pass	5.98	1.22	1.02	1.43	1.70	7.13	11.00	13.11	17.00
5670MHz	Pass	5.98	1.72	1.33	1.44	1.77	7.36	11.00	13.34	17.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.98	1.39	1.99	2.04	1.36	7.56	11.00	13.54	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.90	-0.32	0.35	0.29	-0.17	5.85	30.00	11.75	36.00
5755MHz	Pass	5.90	4.89	5.58	5.42	5.78	11.23	30.00	17.13	36.00
5795MHz	Pass	5.90	5.45	4.79	4.71	5.53	10.94	30.00	16.84	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	4.63	-1.41	-1.30	-1.31	-1.37	4.47	17.00	9.10	23.00
5290MHz	Pass	4.66	-2.06	-2.20	-2.12	-1.67	3.82	11.00	8.48	17.00
5530MHz	Pass	5.98	-2.29	-2.14	-2.18	-2.56	3.57	11.00	9.55	17.00
5610MHz	Pass	5.98	-1.50	-1.08	-0.80	-1.08	4.70	11.00	10.68	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.98	-1.35	-1.34	-1.56	-1.44	4.48	11.00	10.46	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.90	-3.37	-3.78	-3.80	-3.72	2.15	30.00	8.05	36.00
5775MHz	Pass	5.90	-0.39	0.62	0.21	-0.05	5.80	30.00	11.70	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.63	-4.94	-4.60	-4.89	-5.40	1.04	17.00	5.67	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.66	-4.40	-4.24	-4.63	-4.57	1.41	11.00	6.07	17.00
5570MHz	Pass	5.98	-5.57	-5.31	-5.10	-4.94	0.46	11.00	6.44	17.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Refers to antenna test report for DG gain.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5180MHz

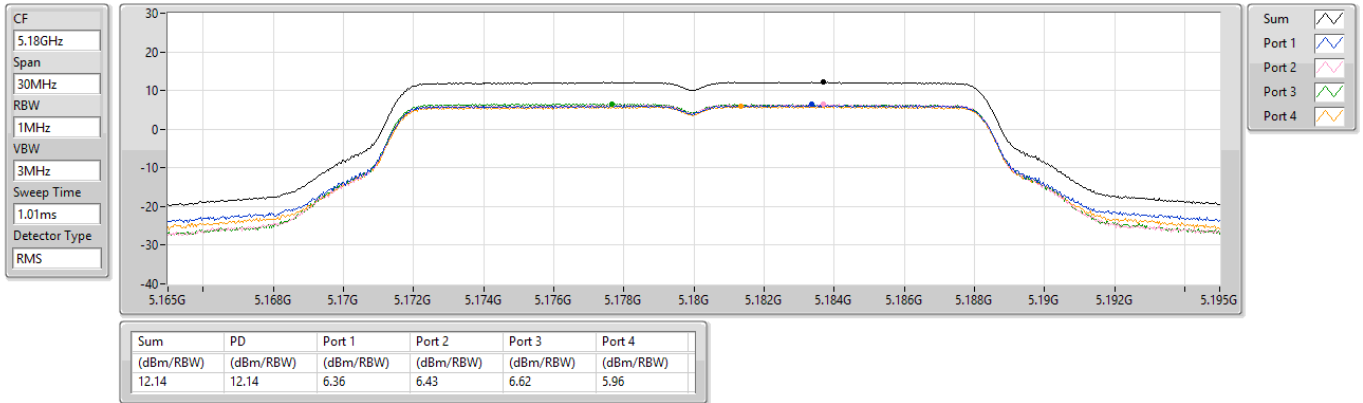

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5200MHz

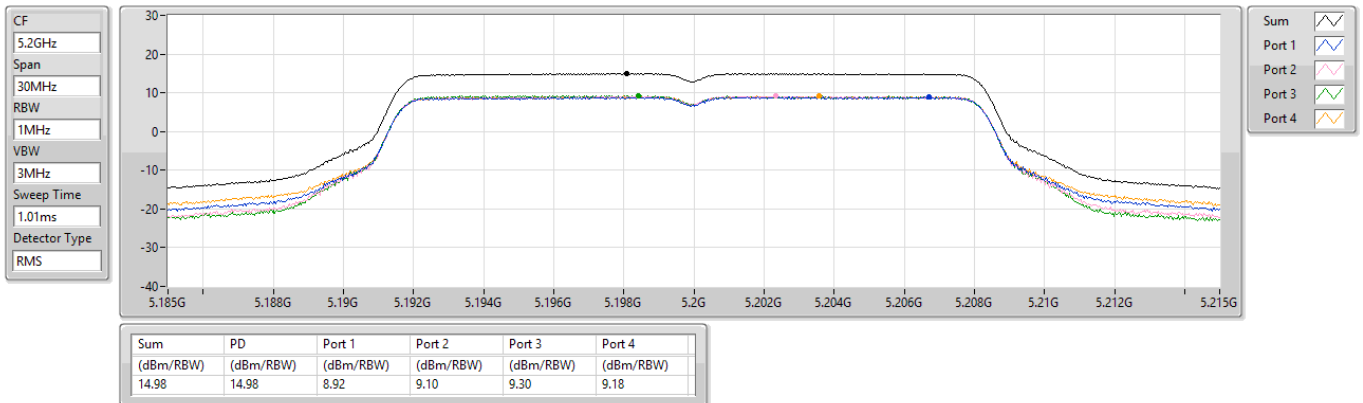

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5240MHz

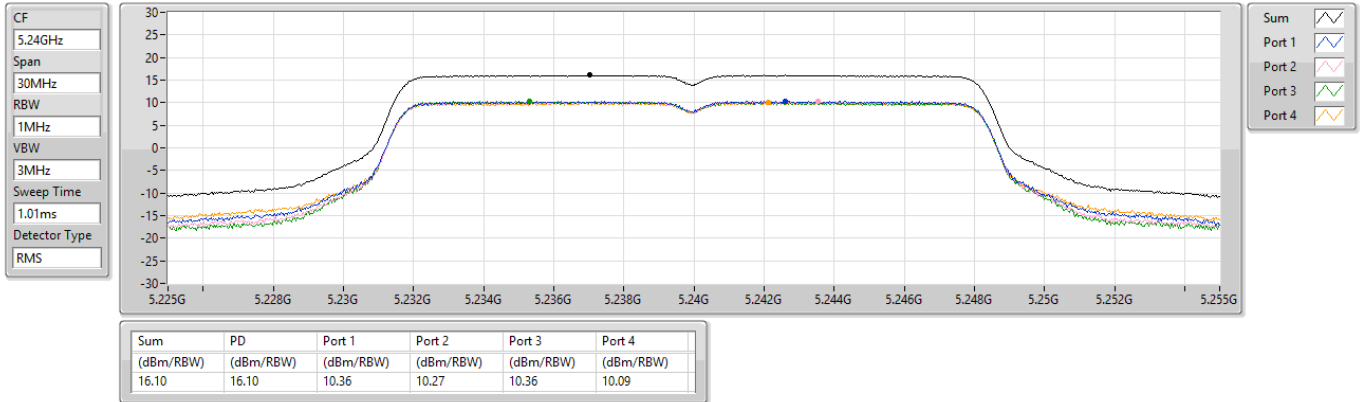

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5260MHz

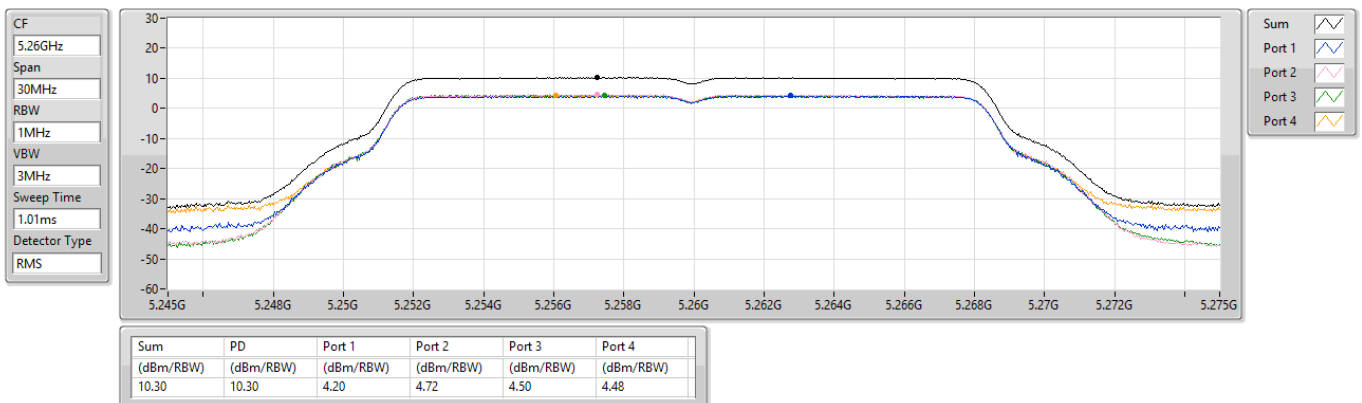

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5300MHz

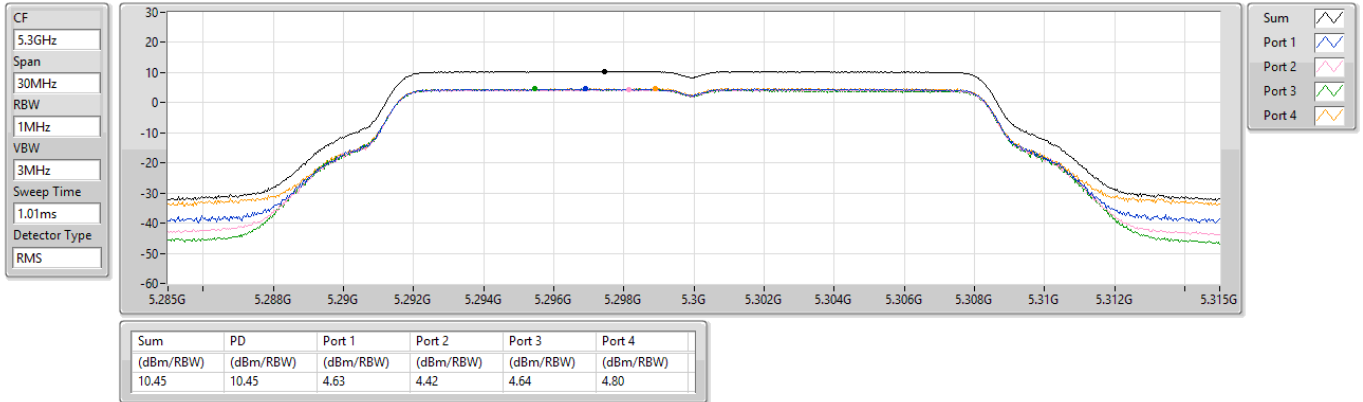

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5320MHz

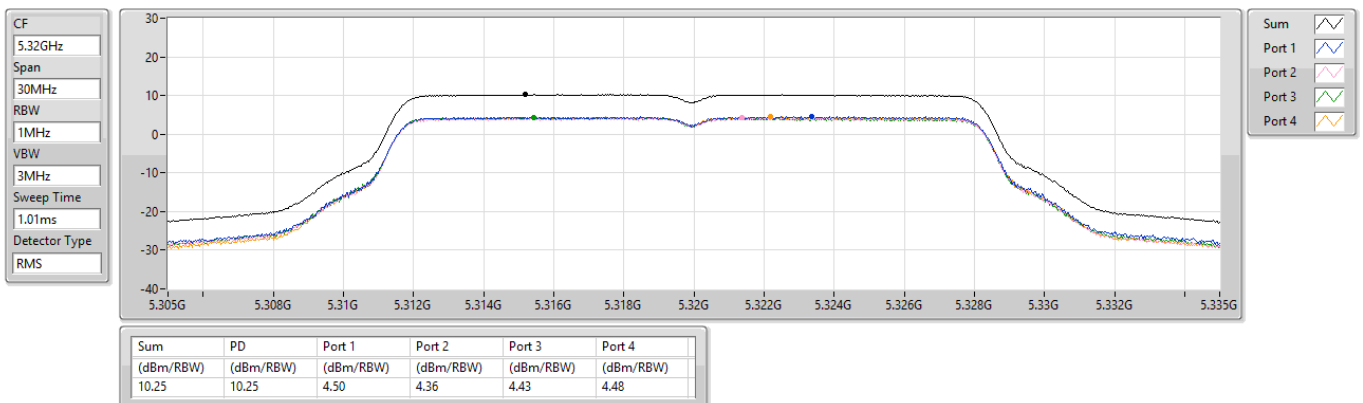

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5500MHz

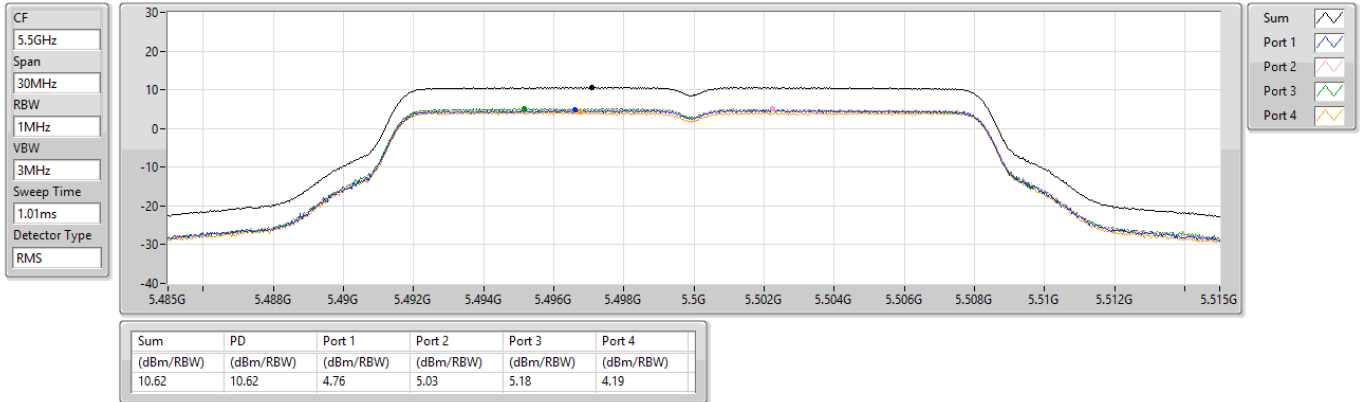

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

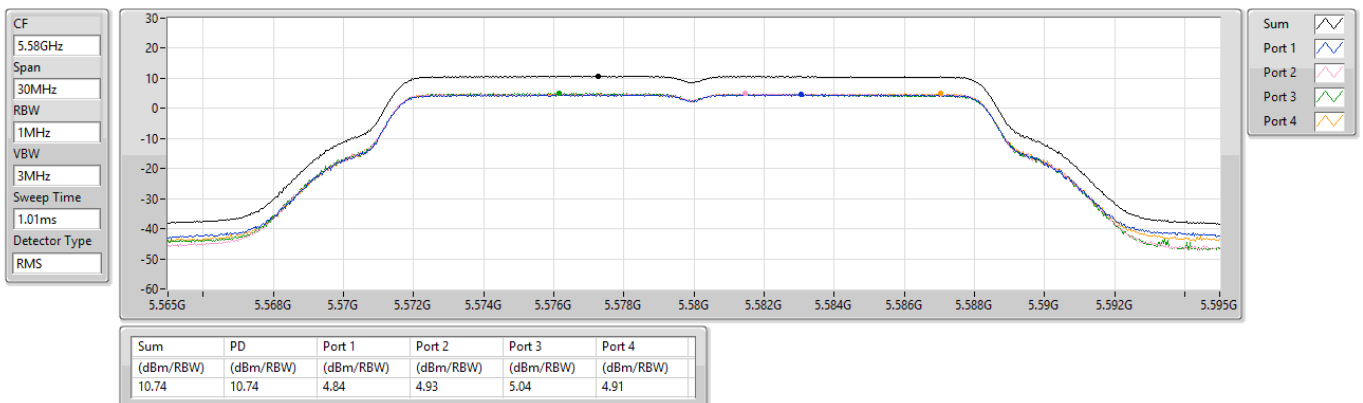


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

CF
5.7GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

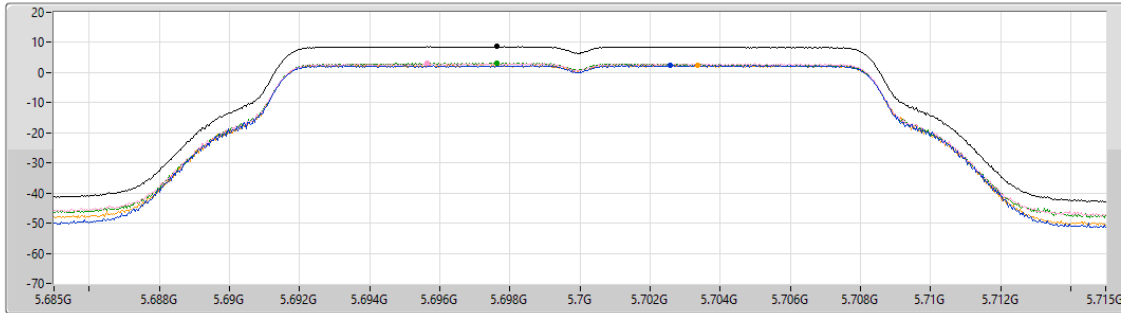

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.66	8.66	2.53	3.06	3.18	2.49

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

CF
5.71GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

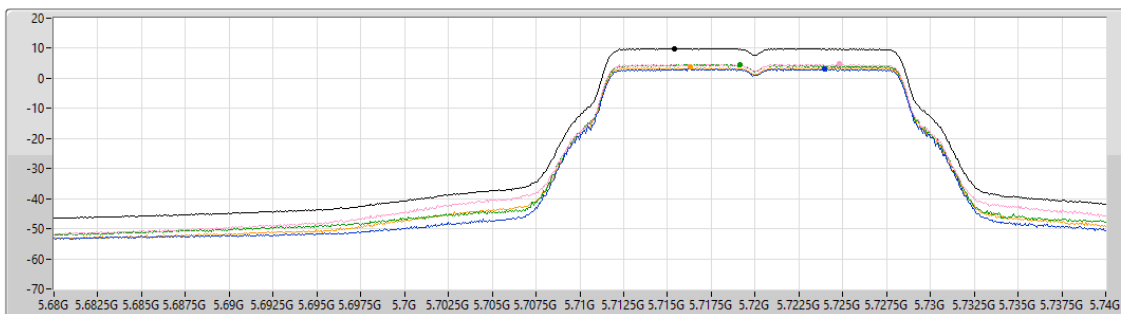


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.87	9.87	3.21	4.75	4.63	3.66

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5720MHz Straddle 5.725-5.85GHz

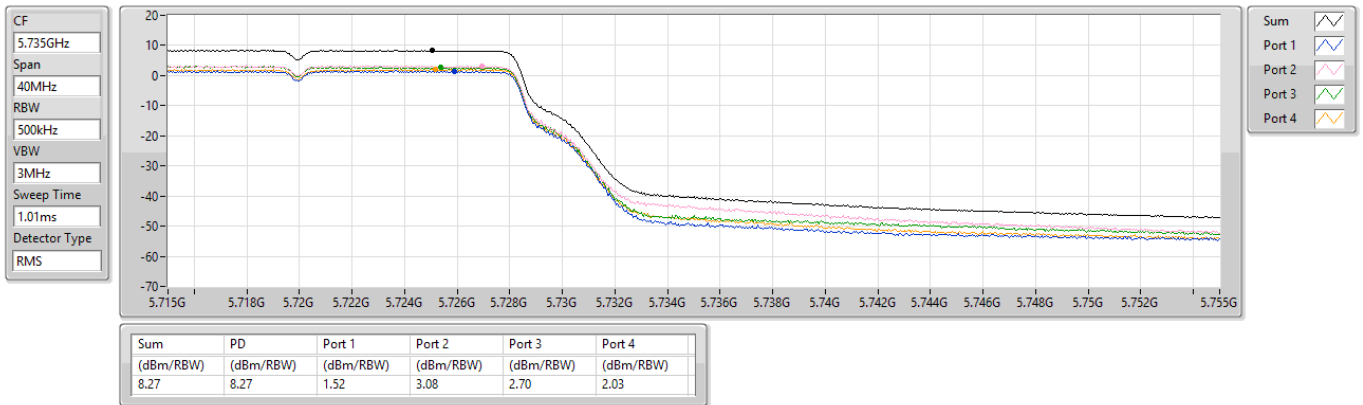

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5745MHz

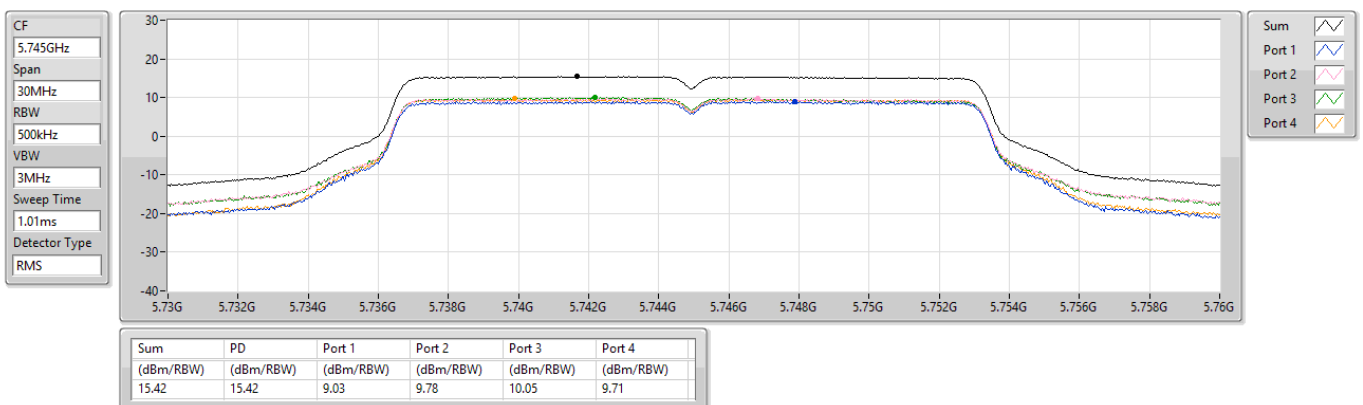

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5785MHz

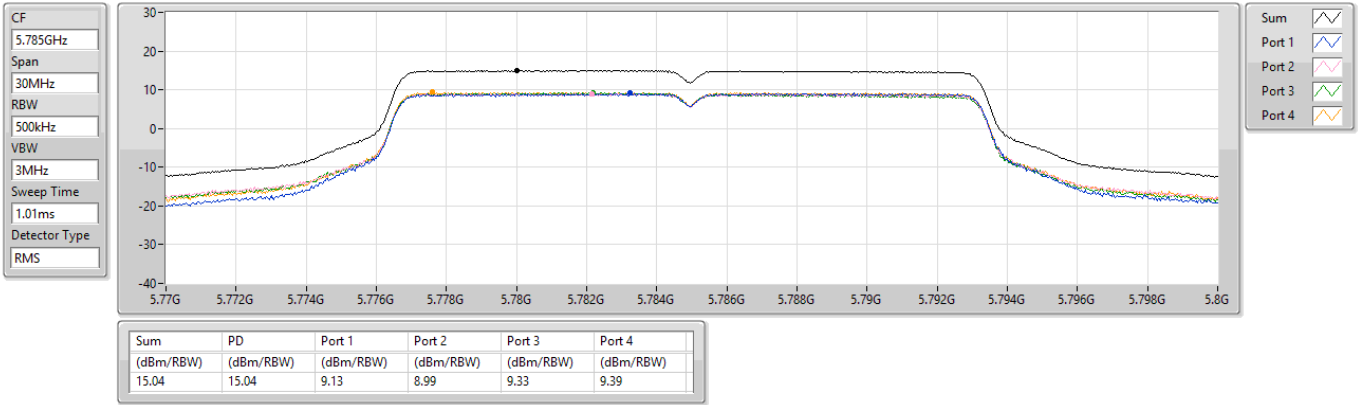

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5825MHz

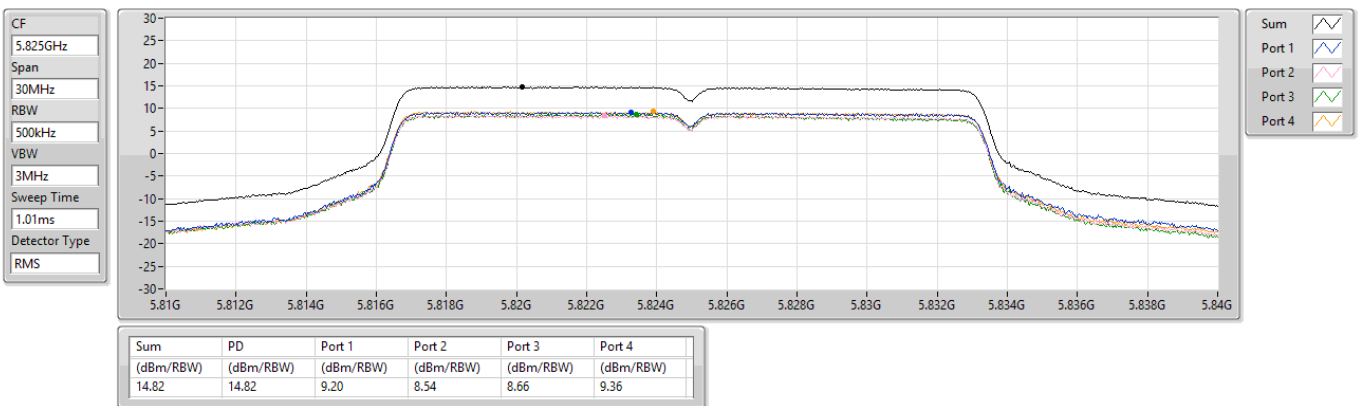

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5180MHz

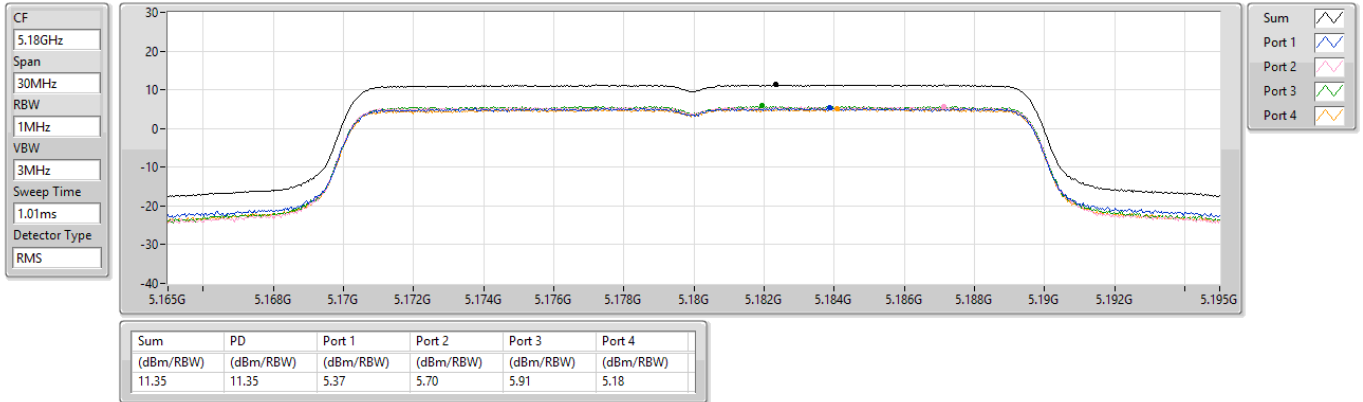

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5200MHz

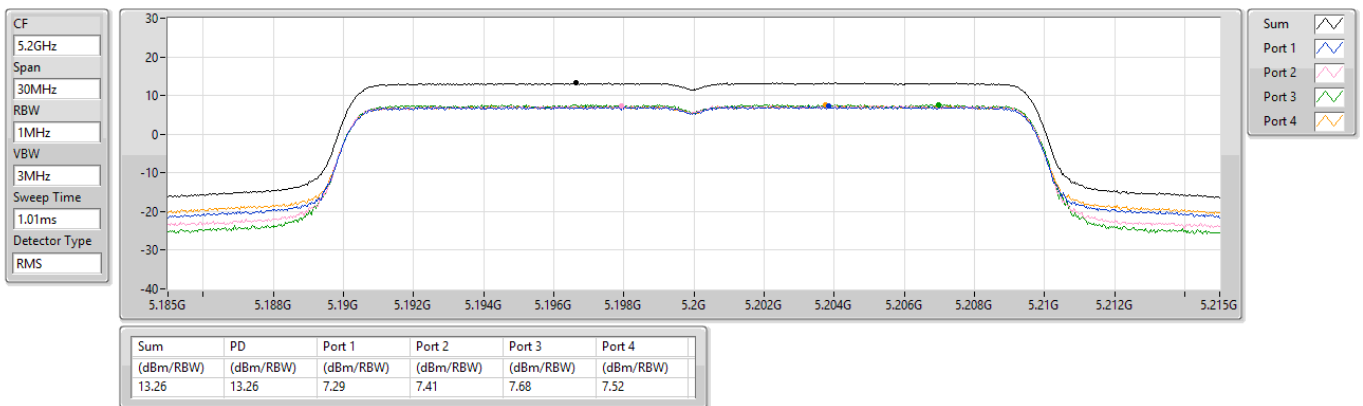

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5240MHz

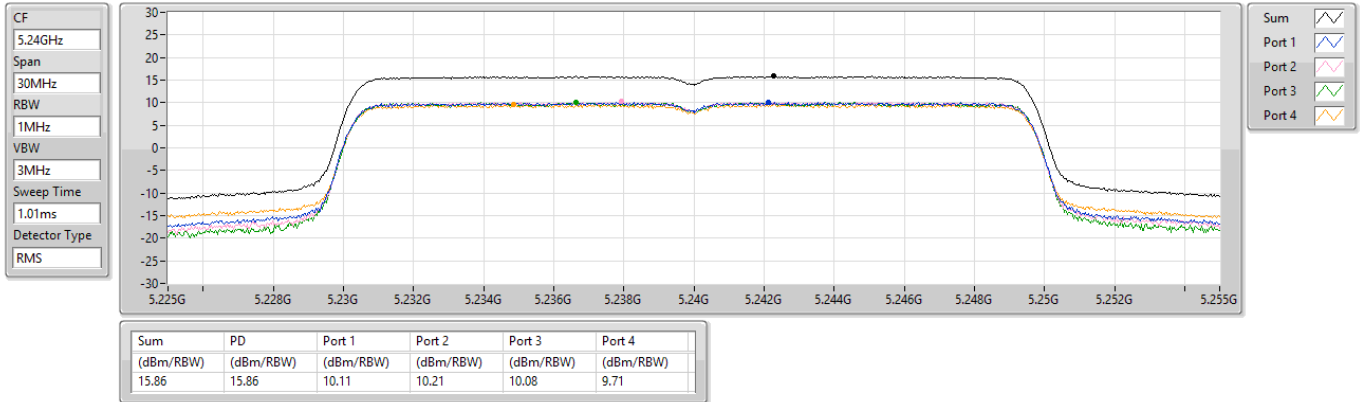

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5260MHz

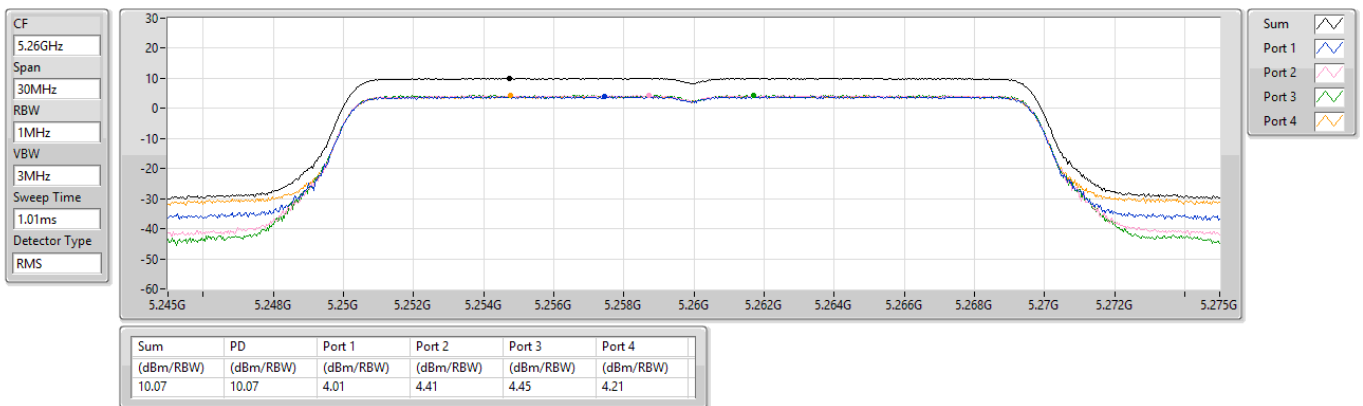

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5300MHz

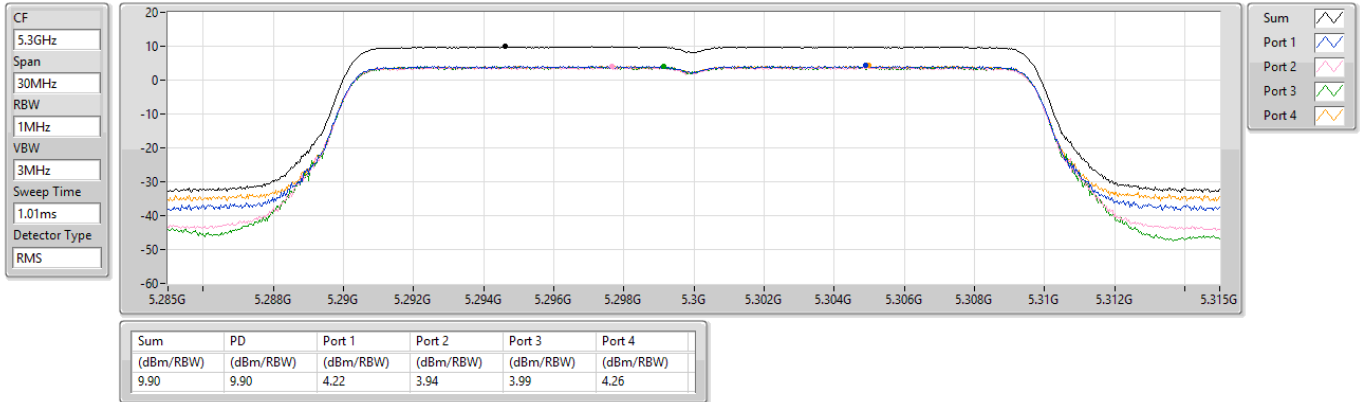

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5320MHz

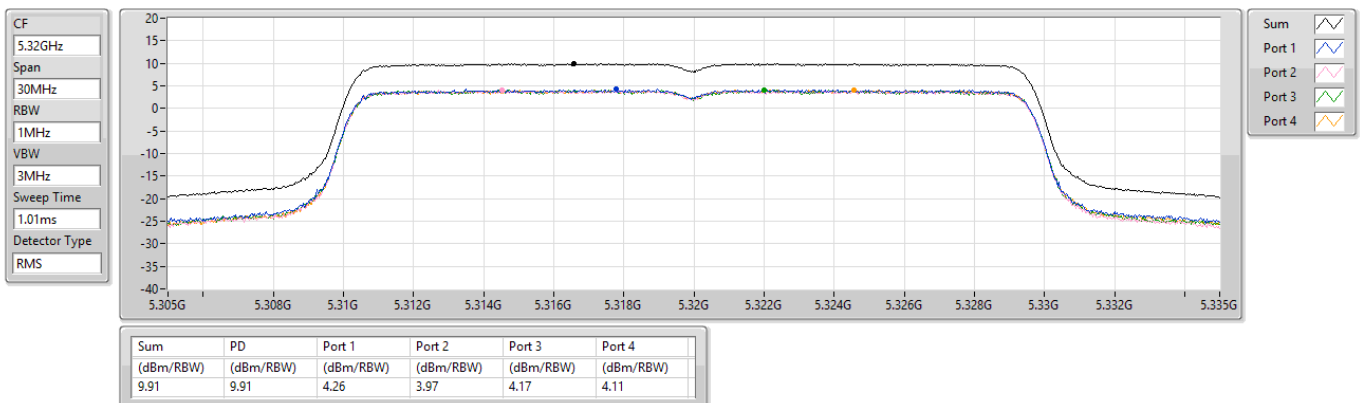

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5500MHz

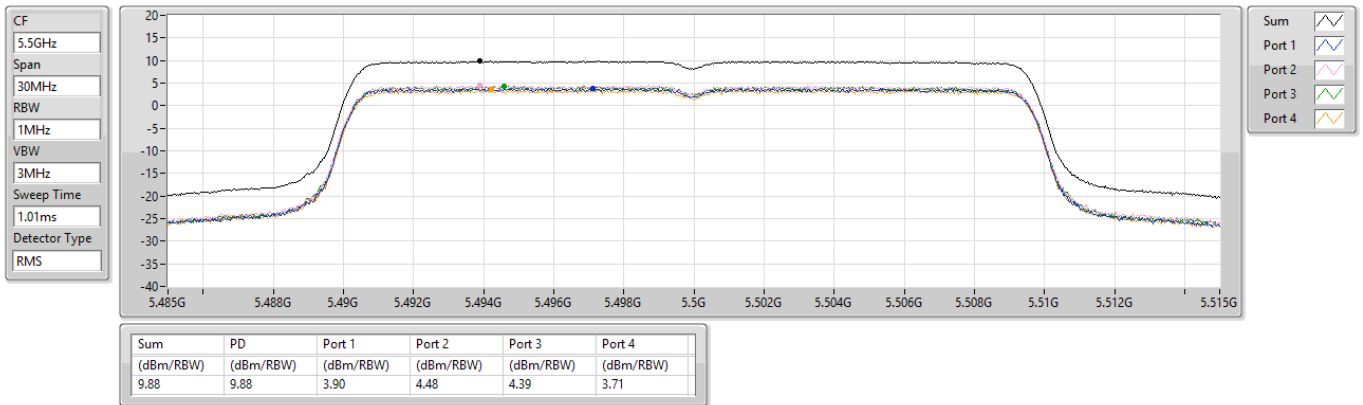

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5580MHz

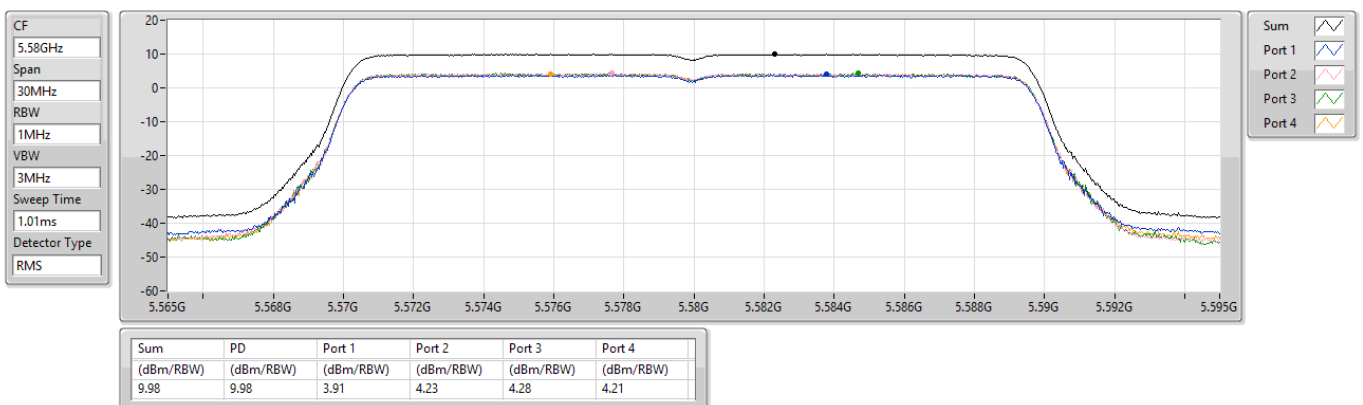

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5700MHz

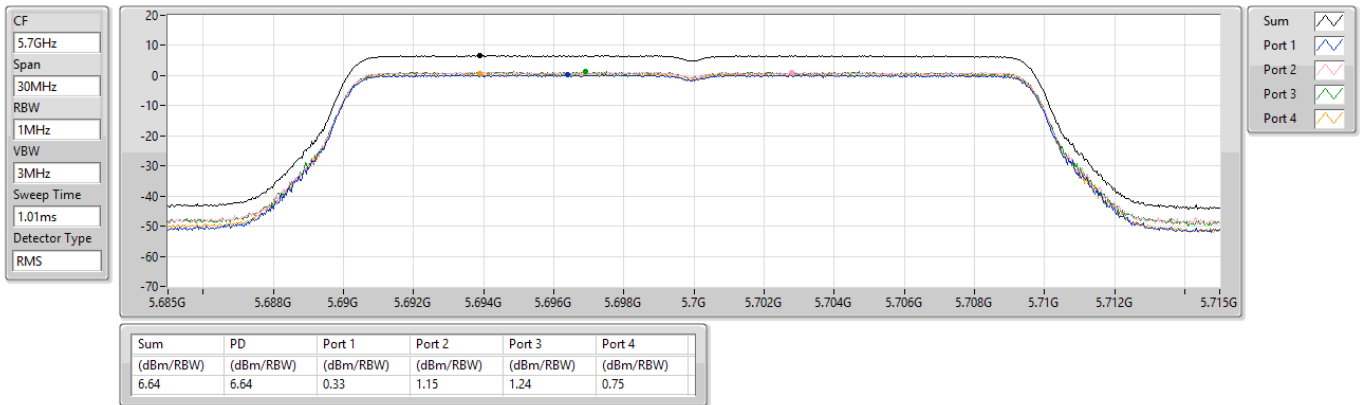

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5720MHz Straddle 5.47-5.725GHz

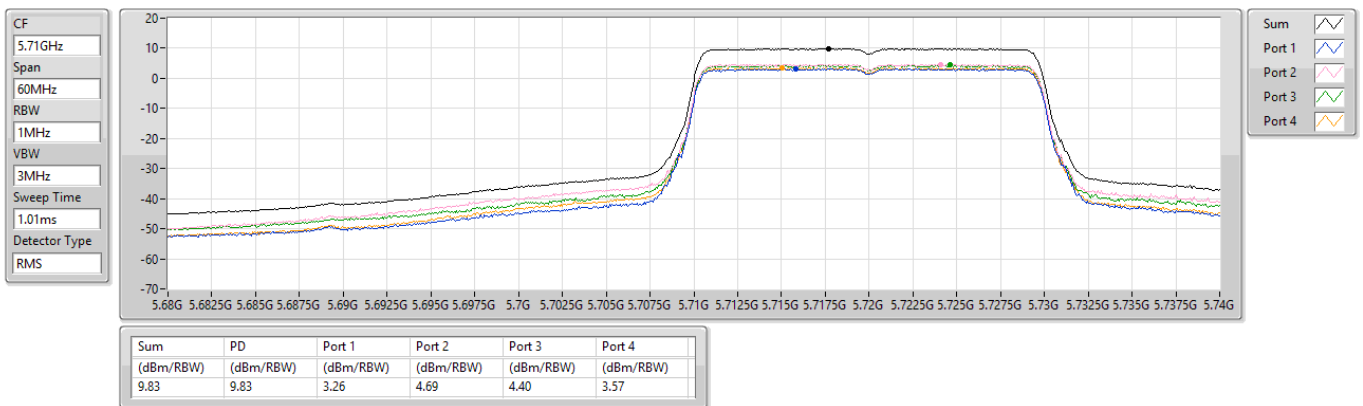

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5720MHz Straddle 5.725-5.85GHz

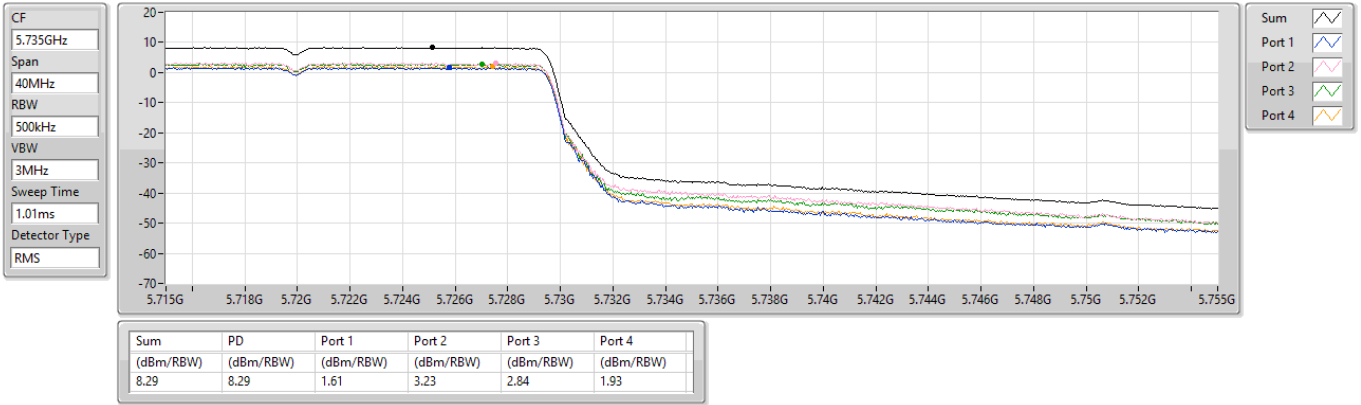

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5745MHz

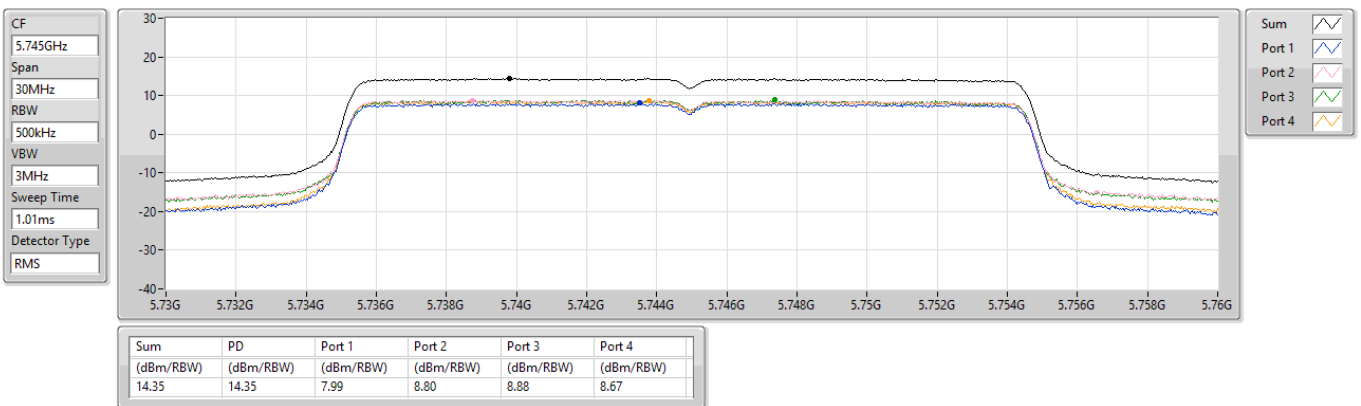

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5785MHz

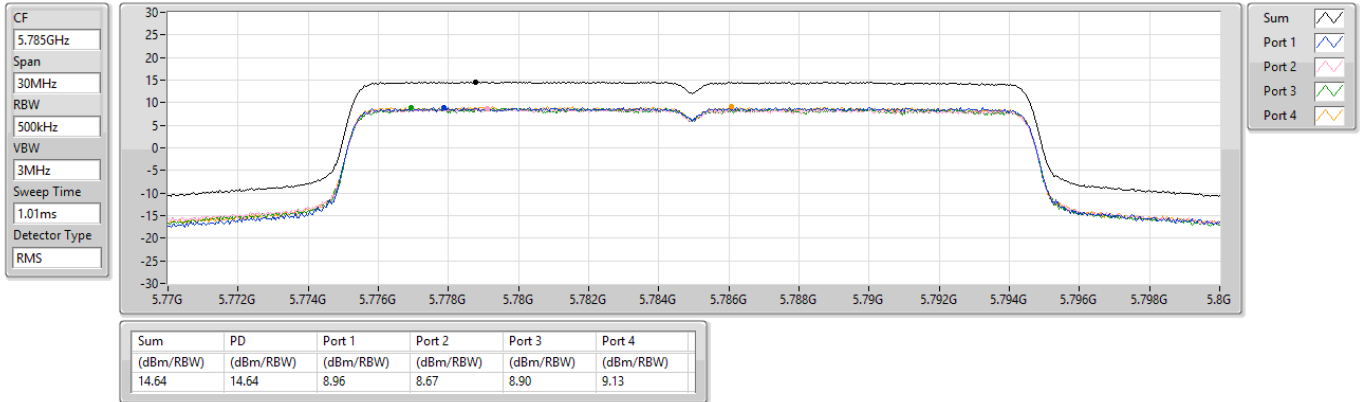

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5825MHz

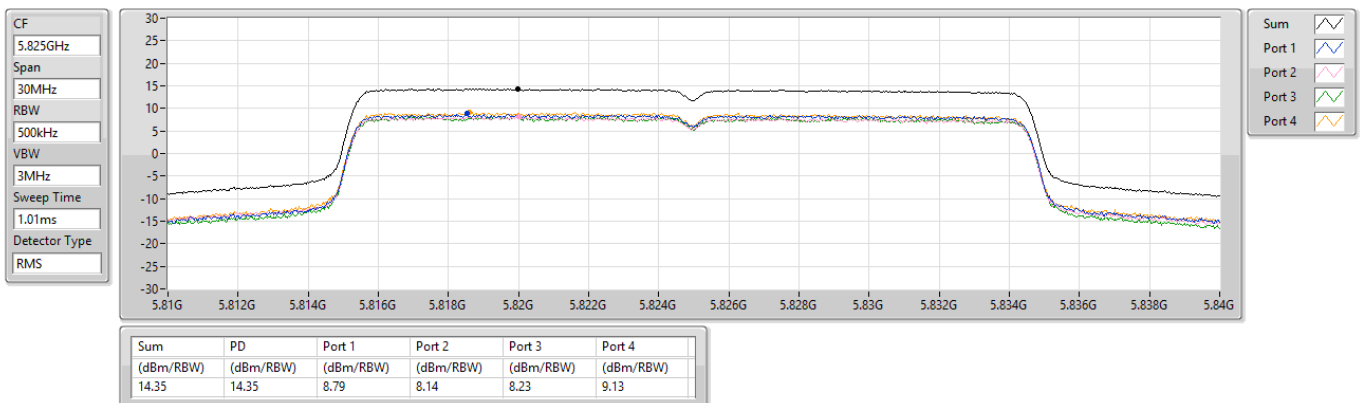

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5190MHz

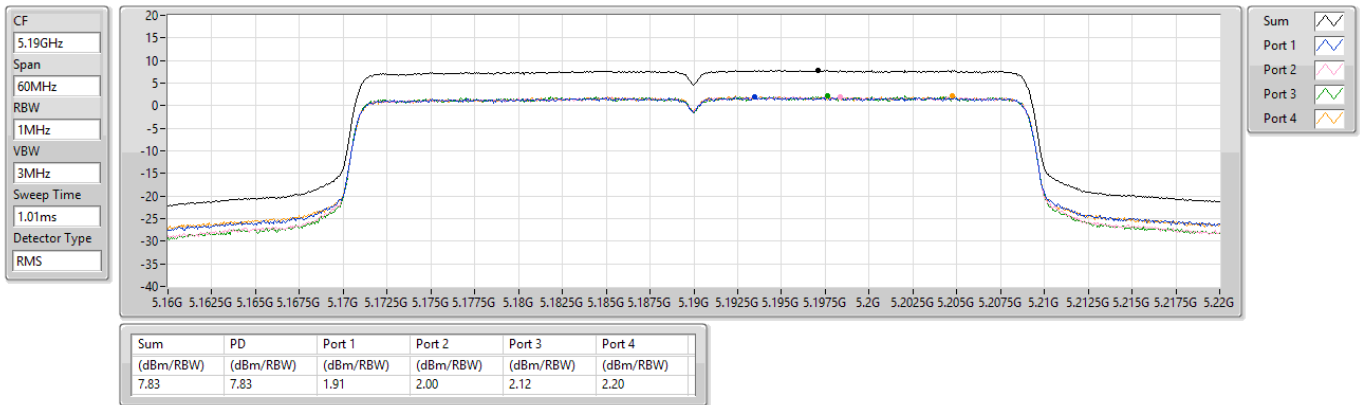

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5230MHz

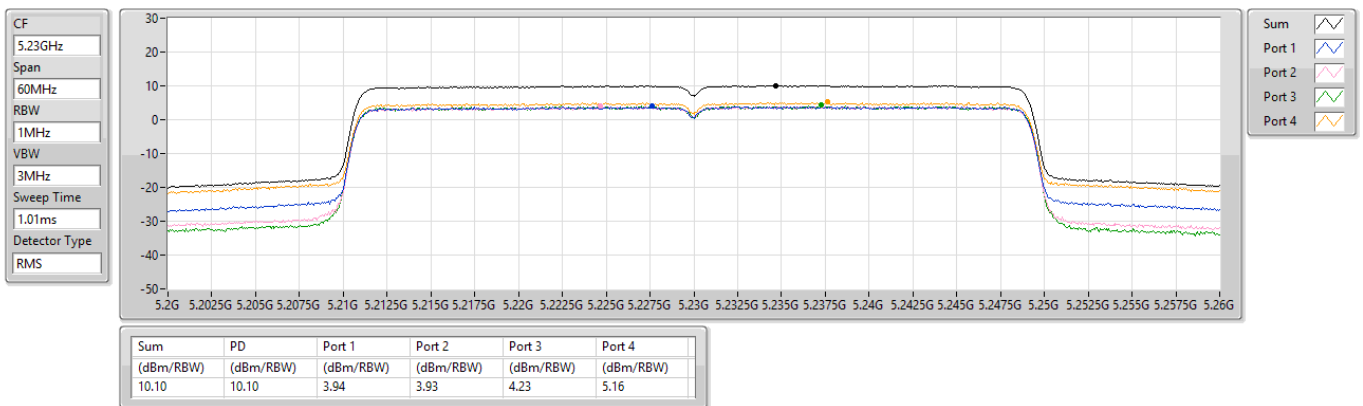

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5270MHz

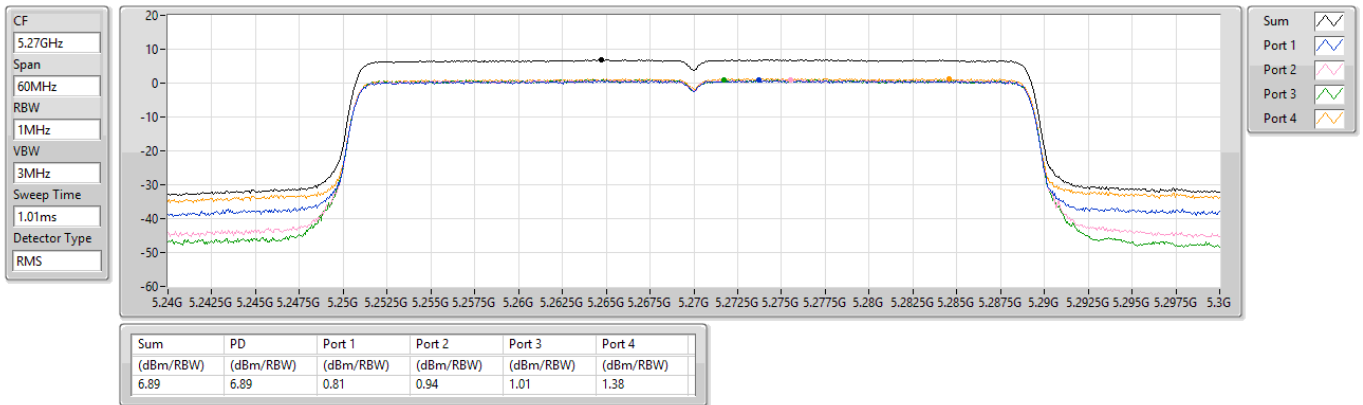

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5310MHz

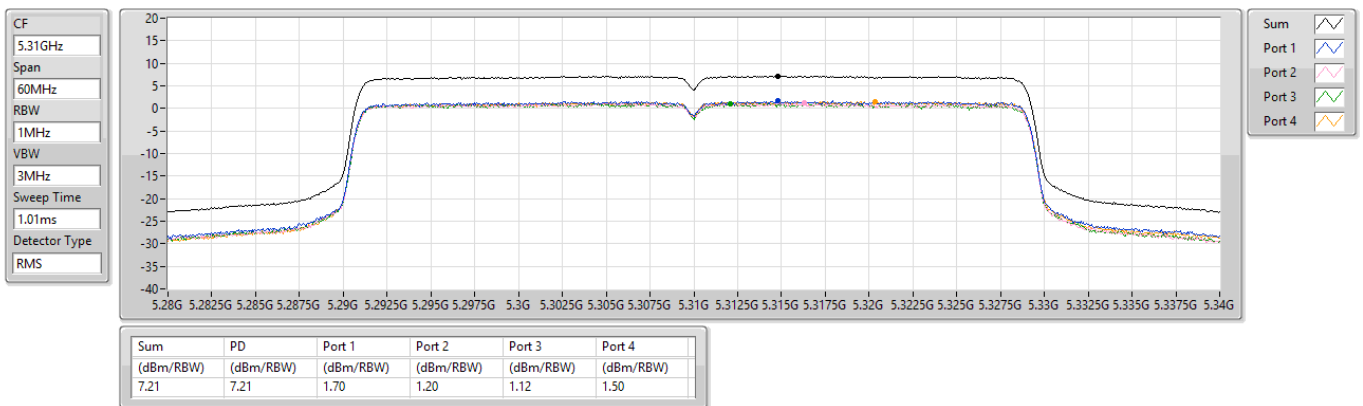


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5510MHz

CF
5.51GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

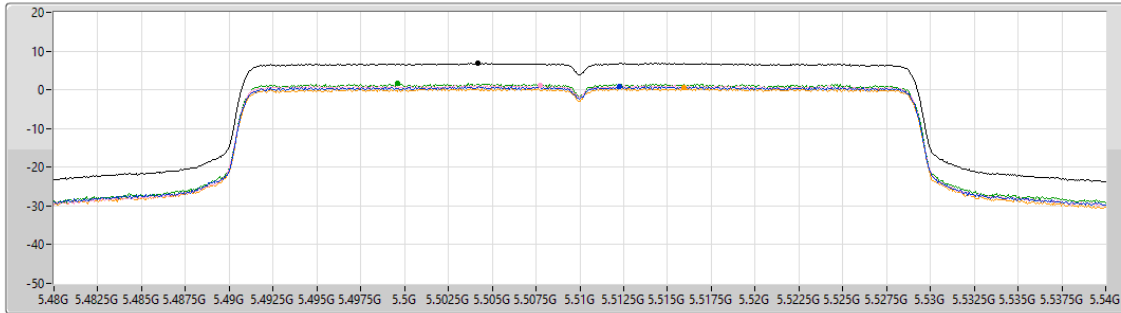

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.84	6.84	0.82	1.16	1.63	0.51

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5590MHz

CF
5.59GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

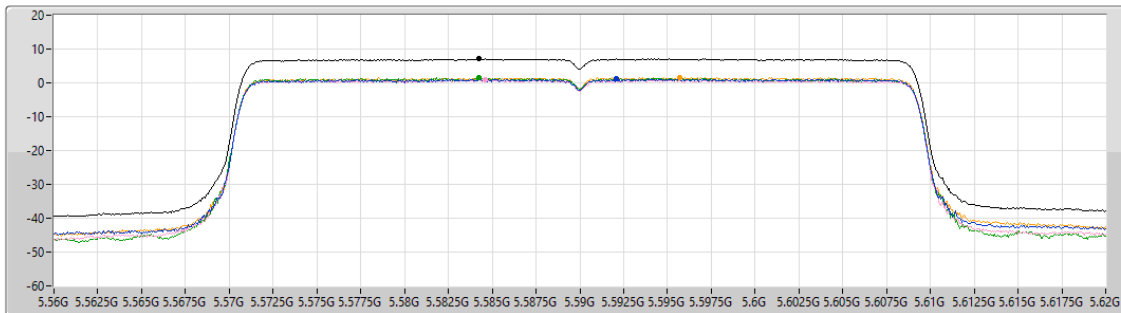


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.13	7.13	1.22	1.02	1.43	1.70

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5670MHz

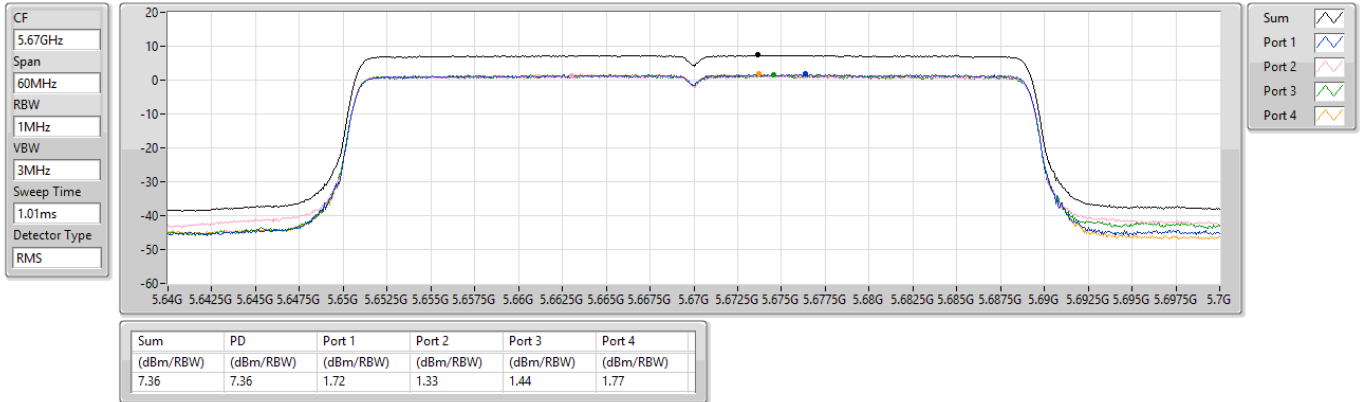

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5710MHz Straddle 5.47-5.725GHz

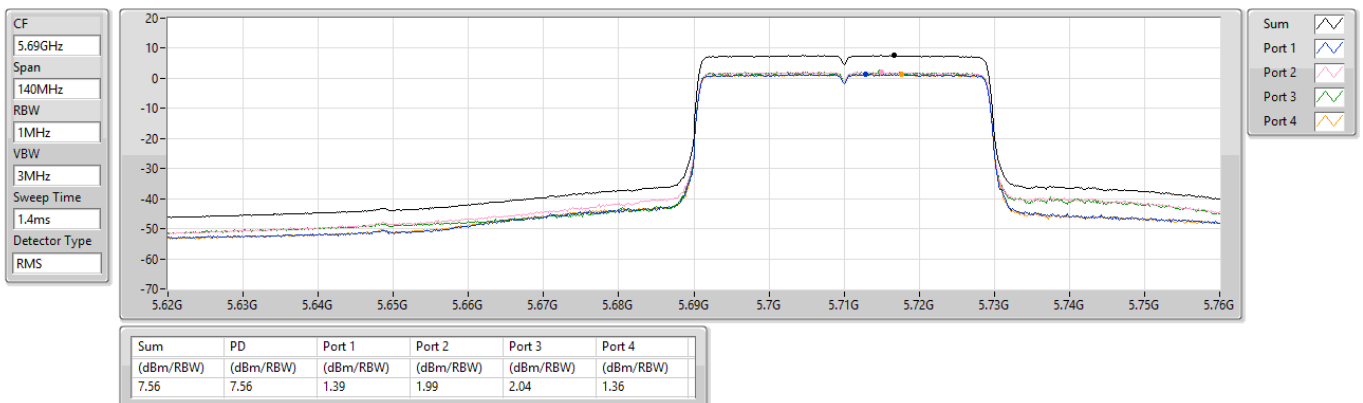

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5710MHz Straddle 5.725-5.85GHz

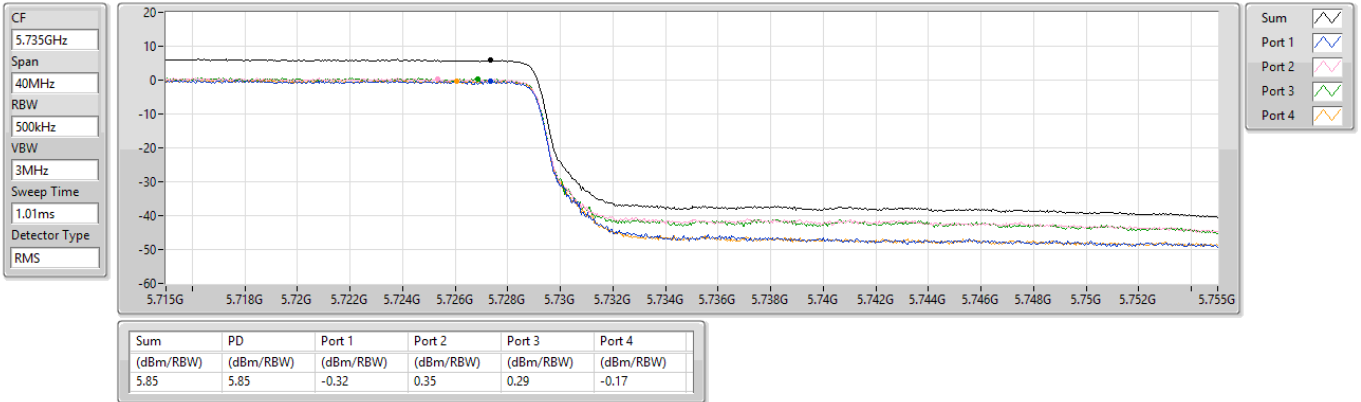

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5755MHz

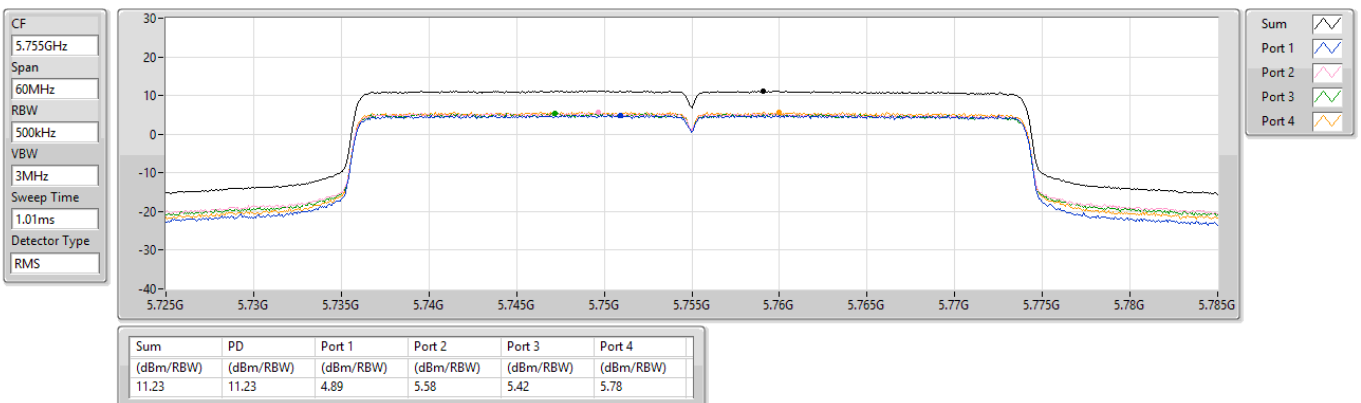

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5795MHz

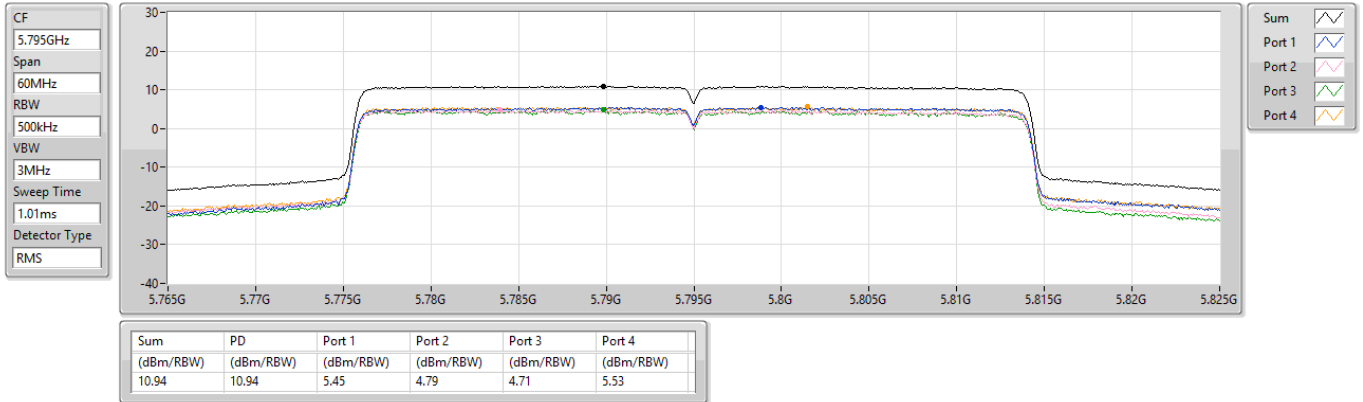

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

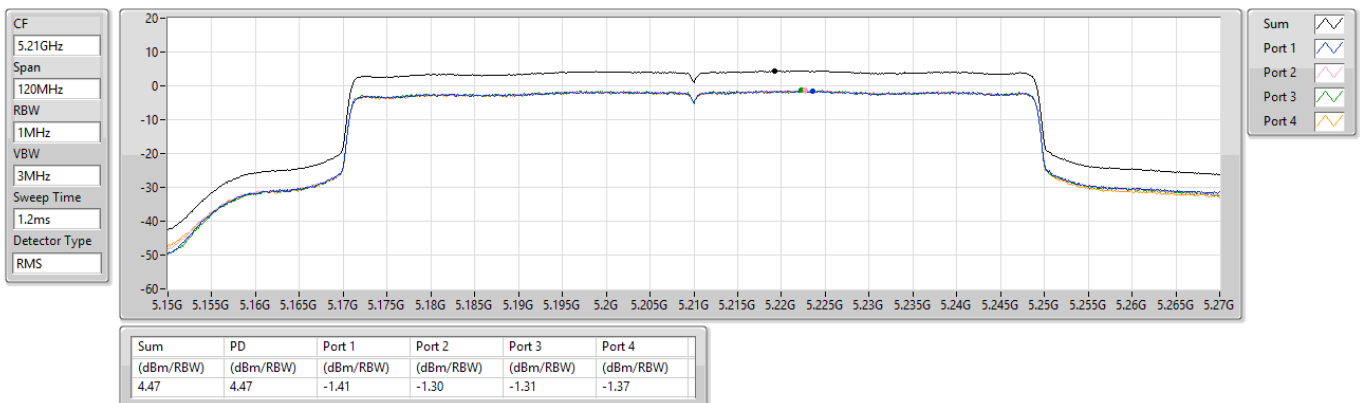


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5290MHz

CF
5.29GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

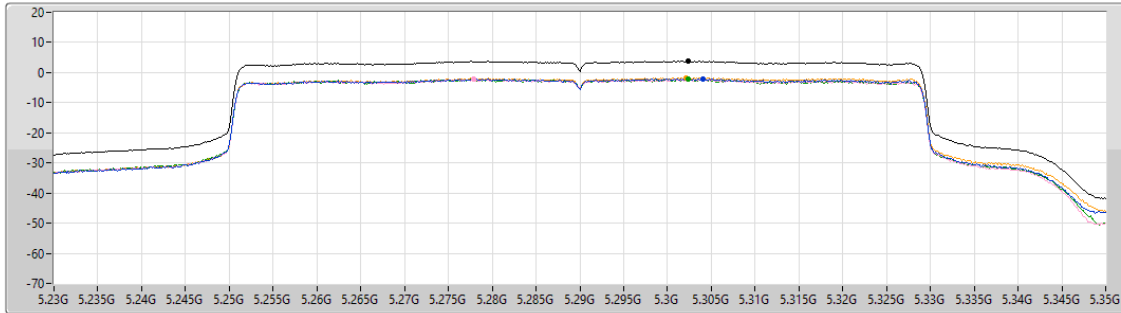

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.82	3.82	-2.06	-2.20	-2.12	-1.67

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5530MHz

CF
5.53GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

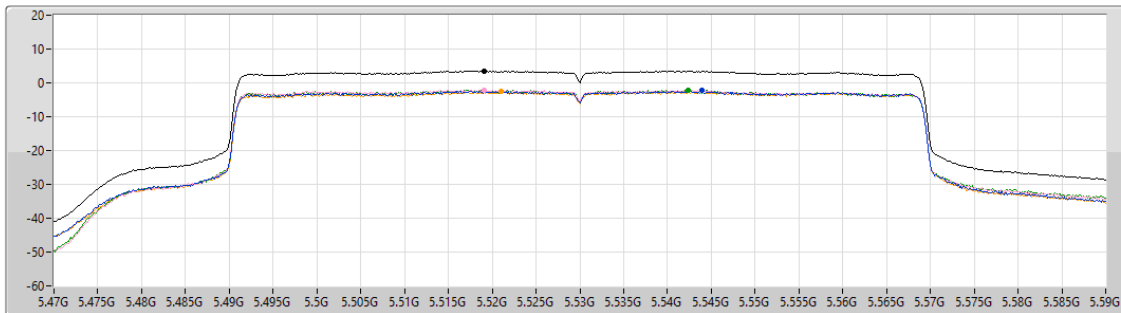


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.57	3.57	-2.29	-2.14	-2.18	-2.56

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5610MHz

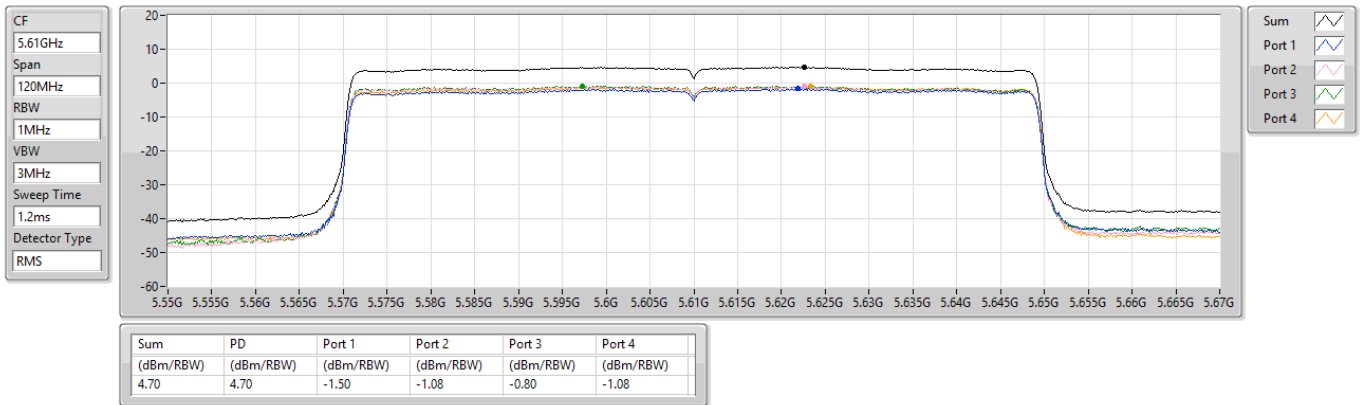

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5690MHz Straddle 5.47-5.725GHz

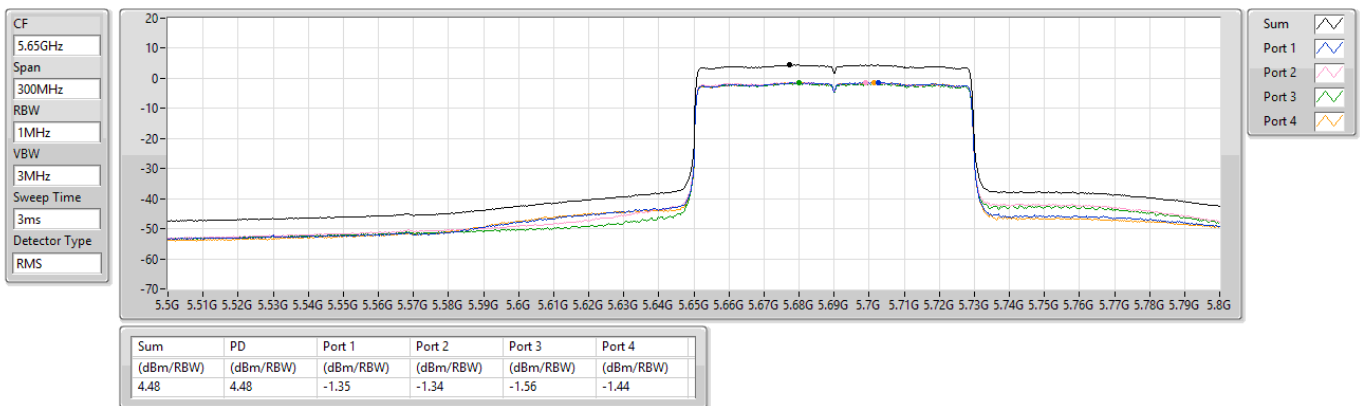

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5690MHz Straddle 5.725-5.85GHz

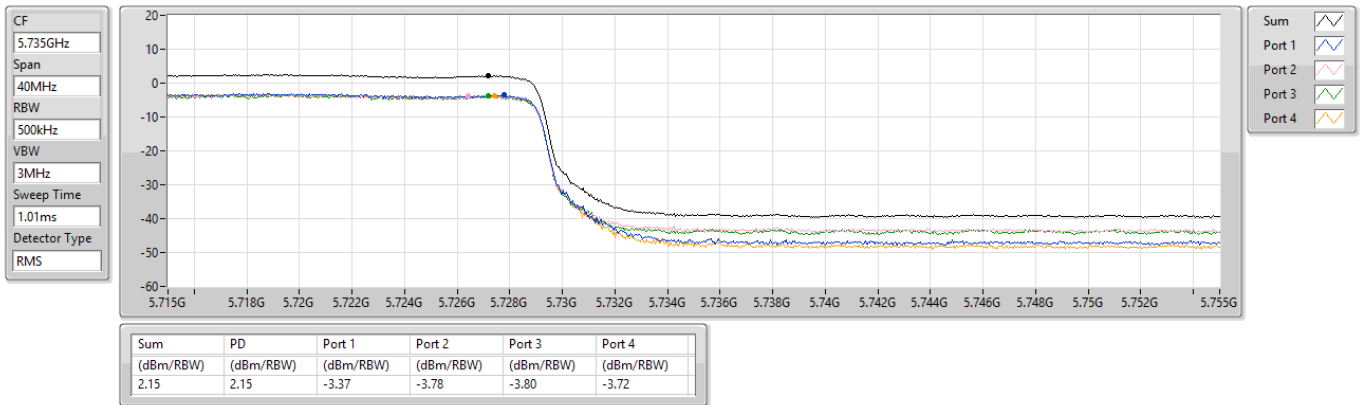

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5775MHz

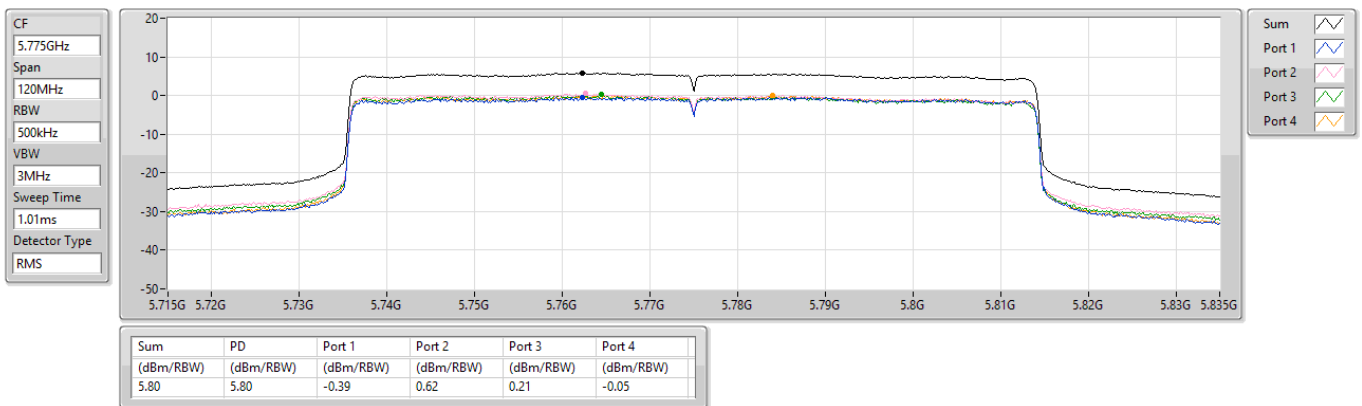

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


5250MHz Straddle 5.15-5.25GHz

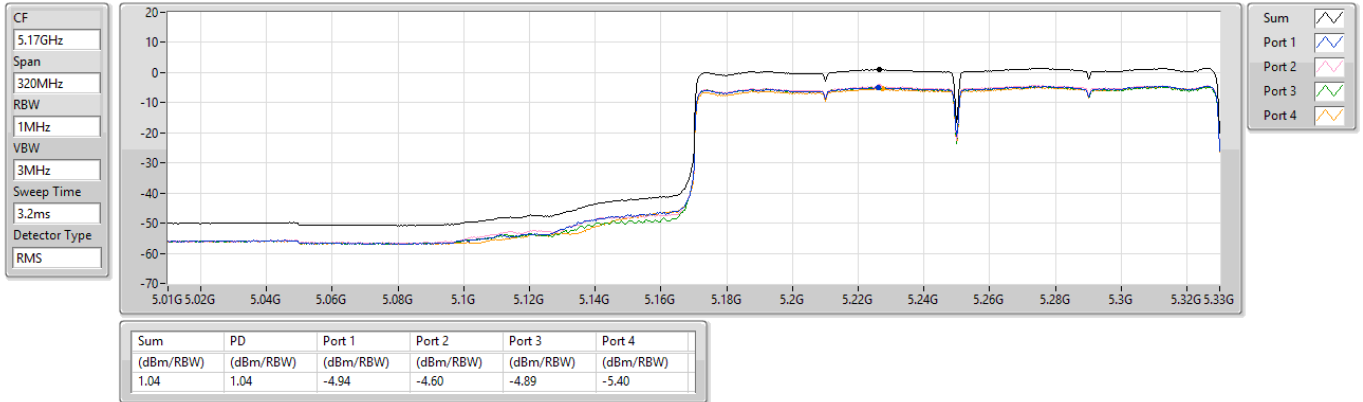

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


5250MHz Straddle 5.25-5.35GHz

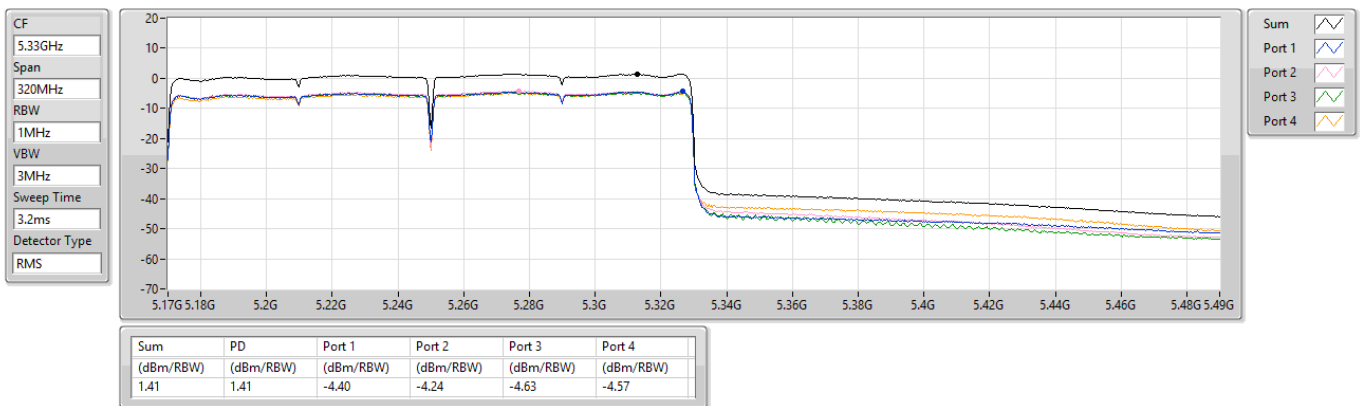

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5570MHz

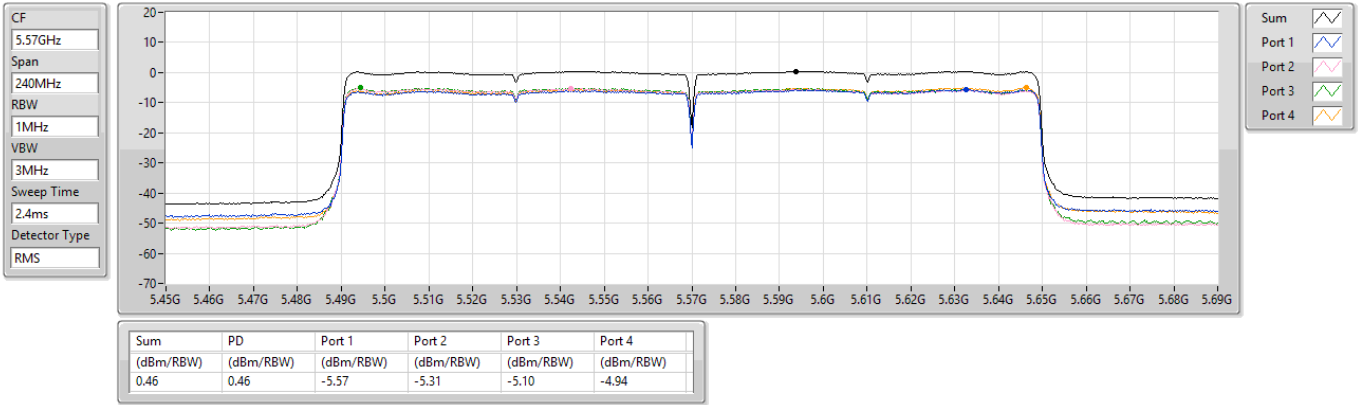



Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																
Polarization	Horizontal																																																																																		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																			
Level (dBUV/m) CLASS-B <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>49.40</td><td>23.62</td><td>40.00</td><td>-16.38</td><td>31.73</td><td>-8.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>100.81</td><td>27.49</td><td>43.50</td><td>-16.01</td><td>40.25</td><td>-12.76</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>130.88</td><td>24.64</td><td>43.50</td><td>-18.86</td><td>34.65</td><td>-10.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>173.56</td><td>24.06</td><td>43.50</td><td>-19.44</td><td>33.37</td><td>-9.31</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>231.76</td><td>25.21</td><td>46.00</td><td>-20.79</td><td>36.23</td><td>-11.02</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>324.88</td><td>27.93</td><td>46.00</td><td>-18.07</td><td>34.87</td><td>-6.94</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	49.40	23.62	40.00	-16.38	31.73	-8.11	Peak	---	---	2	100.81	27.49	43.50	-16.01	40.25	-12.76	Peak	---	---	3	130.88	24.64	43.50	-18.86	34.65	-10.01	Peak	---	---	4	173.56	24.06	43.50	-19.44	33.37	-9.31	Peak	---	---	5	231.76	25.21	46.00	-20.79	36.23	-11.02	Peak	---	---	6	324.88	27.93	46.00	-18.07	34.87	-6.94	Peak	---	---
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																										
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																																																										
1	49.40	23.62	40.00	-16.38	31.73	-8.11	Peak	---	---																																																																										
2	100.81	27.49	43.50	-16.01	40.25	-12.76	Peak	---	---																																																																										
3	130.88	24.64	43.50	-18.86	34.65	-10.01	Peak	---	---																																																																										
4	173.56	24.06	43.50	-19.44	33.37	-9.31	Peak	---	---																																																																										
5	231.76	25.21	46.00	-20.79	36.23	-11.02	Peak	---	---																																																																										
6	324.88	27.93	46.00	-18.07	34.87	-6.94	Peak	---	---																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																			




Modulation	be EHT20	Test Freq. (MHz)	5240																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>33.42</td><td>40.00</td><td>-6.58</td><td>43.07</td><td>-9.65</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>46.49</td><td>35.56</td><td>40.00</td><td>-4.44</td><td>43.63</td><td>-8.07</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>52.31</td><td>34.04</td><td>40.00</td><td>-5.96</td><td>42.19</td><td>-8.15</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>92.08</td><td>32.60</td><td>43.50</td><td>-10.90</td><td>46.91</td><td>-14.31</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>100.81</td><td>28.78</td><td>43.50</td><td>-14.72</td><td>41.54</td><td>-12.76</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>149.31</td><td>24.41</td><td>43.50</td><td>-19.09</td><td>32.88</td><td>-8.47</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	31.94	33.42	40.00	-6.58	43.07	-9.65	Peak	---	---	2	46.49	35.56	40.00	-4.44	43.63	-8.07	Peak	---	---	3	52.31	34.04	40.00	-5.96	42.19	-8.15	Peak	---	---	4	92.08	32.60	43.50	-10.90	46.91	-14.31	Peak	---	---	5	100.81	28.78	43.50	-14.72	41.54	-12.76	Peak	---	---	6	149.31	24.41	43.50	-19.09	32.88	-8.47	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	31.94	33.42	40.00	-6.58	43.07	-9.65	Peak	---	---																																																																
2	46.49	35.56	40.00	-4.44	43.63	-8.07	Peak	---	---																																																																
3	52.31	34.04	40.00	-5.96	42.19	-8.15	Peak	---	---																																																																
4	92.08	32.60	43.50	-10.90	46.91	-14.31	Peak	---	---																																																																
5	100.81	28.78	43.50	-14.72	41.54	-12.76	Peak	---	---																																																																
6	149.31	24.41	43.50	-19.09	32.88	-8.47	Peak	---	---																																																																



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) CLASS-B Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>49.40</td><td>24.27</td><td>40.00</td><td>-15.73</td><td>32.38</td><td>-8.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>99.84</td><td>28.69</td><td>43.50</td><td>-14.81</td><td>41.69</td><td>-13.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>131.85</td><td>24.99</td><td>43.50</td><td>-18.51</td><td>35.08</td><td>-10.09</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>170.65</td><td>24.26</td><td>43.50</td><td>-19.24</td><td>33.35</td><td>-9.09</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>222.06</td><td>24.90</td><td>46.00</td><td>-21.10</td><td>37.04</td><td>-12.14</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>328.76</td><td>27.51</td><td>46.00</td><td>-18.49</td><td>34.35</td><td>-6.84</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	49.40	24.27	40.00	-15.73	32.38	-8.11	Peak	---	---	2	99.84	28.69	43.50	-14.81	41.69	-13.00	Peak	---	---	3	131.85	24.99	43.50	-18.51	35.08	-10.09	Peak	---	---	4	170.65	24.26	43.50	-19.24	33.35	-9.09	Peak	---	---	5	222.06	24.90	46.00	-21.10	37.04	-12.14	Peak	---	---	6	328.76	27.51	46.00	-18.49	34.35	-6.84	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	49.40	24.27	40.00	-15.73	32.38	-8.11	Peak	---	---																																																																
2	99.84	28.69	43.50	-14.81	41.69	-13.00	Peak	---	---																																																																
3	131.85	24.99	43.50	-18.51	35.08	-10.09	Peak	---	---																																																																
4	170.65	24.26	43.50	-19.24	33.35	-9.09	Peak	---	---																																																																
5	222.06	24.90	46.00	-21.10	37.04	-12.14	Peak	---	---																																																																
6	328.76	27.51	46.00	-18.49	34.35	-6.84	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

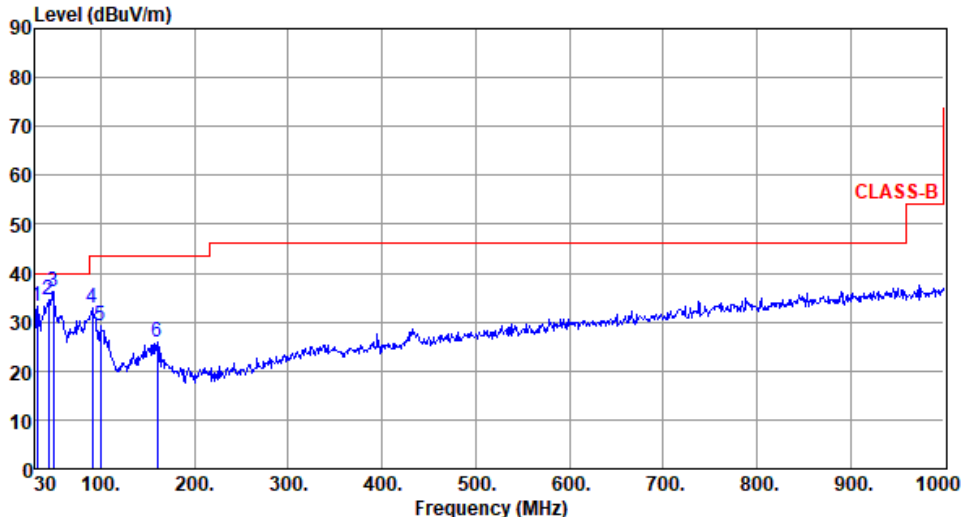

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>31.94</td><td>33.36</td><td>40.00</td><td>-6.64</td><td>43.01</td><td>-9.65</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>44.55</td><td>34.56</td><td>40.00</td><td>-5.44</td><td>42.74</td><td>-8.18</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>49.40</td><td>36.35</td><td>40.00</td><td>-3.65</td><td>44.46</td><td>-8.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>91.11</td><td>32.90</td><td>43.50</td><td>-10.60</td><td>47.15</td><td>-14.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>99.84</td><td>29.36</td><td>43.50</td><td>-14.14</td><td>42.36</td><td>-13.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>159.98</td><td>25.95</td><td>43.50</td><td>-17.55</td><td>34.44</td><td>-8.49</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	31.94	33.36	40.00	-6.64	43.01	-9.65	Peak	---	---	2	44.55	34.56	40.00	-5.44	42.74	-8.18	Peak	---	---	3	49.40	36.35	40.00	-3.65	44.46	-8.11	Peak	---	---	4	91.11	32.90	43.50	-10.60	47.15	-14.25	Peak	---	---	5	99.84	29.36	43.50	-14.14	42.36	-13.00	Peak	---	---	6	159.98	25.95	43.50	-17.55	34.44	-8.49	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	31.94	33.36	40.00	-6.64	43.01	-9.65	Peak	---	---																																																																
2	44.55	34.56	40.00	-5.44	42.74	-8.18	Peak	---	---																																																																
3	49.40	36.35	40.00	-3.65	44.46	-8.11	Peak	---	---																																																																
4	91.11	32.90	43.50	-10.60	47.15	-14.25	Peak	---	---																																																																
5	99.84	29.36	43.50	-14.14	42.36	-13.00	Peak	---	---																																																																
6	159.98	25.95	43.50	-17.55	34.44	-8.49	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									


Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5180																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																			
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>52.94</td><td>0.65</td><td>Average</td><td>198</td><td>93</td></tr><tr><td>2</td><td>5150.00</td><td>70.12</td><td>74.00</td><td>-3.88</td><td>69.47</td><td>0.65</td><td>Peak</td><td>198</td><td>93</td></tr><tr><td>3 *</td><td>5180.00</td><td>107.76</td><td></td><td></td><td>107.16</td><td>0.60</td><td>Average</td><td>198</td><td>114</td></tr><tr><td>4 *</td><td>5180.00</td><td>118.33</td><td></td><td></td><td>117.73</td><td>0.60</td><td>Peak</td><td>198</td><td>114</td></tr><tr><td>5</td><td>10360.00</td><td>54.45</td><td>68.20</td><td>-13.75</td><td>46.33</td><td>8.12</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>6</td><td>15540.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>36.24</td><td>4.92</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>7</td><td>15540.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>50.42</td><td>4.92</td><td>Peak</td><td>100</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.59	54.00	-0.41	52.94	0.65	Average	198	93	2	5150.00	70.12	74.00	-3.88	69.47	0.65	Peak	198	93	3 *	5180.00	107.76			107.16	0.60	Average	198	114	4 *	5180.00	118.33			117.73	0.60	Peak	198	114	5	10360.00	54.45	68.20	-13.75	46.33	8.12	Peak	100	36	6	15540.00	41.16	54.00	-12.84	36.24	4.92	Average	100	21	7	15540.00	55.34	74.00	-18.66	50.42	4.92	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	53.59	54.00	-0.41	52.94	0.65	Average	198	93																																																																										
2	5150.00	70.12	74.00	-3.88	69.47	0.65	Peak	198	93																																																																										
3 *	5180.00	107.76			107.16	0.60	Average	198	114																																																																										
4 *	5180.00	118.33			117.73	0.60	Peak	198	114																																																																										
5	10360.00	54.45	68.20	-13.75	46.33	8.12	Peak	100	36																																																																										
6	15540.00	41.16	54.00	-12.84	36.24	4.92	Average	100	21																																																																										
7	15540.00	55.34	74.00	-18.66	50.42	4.92	Peak	100	21																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																			

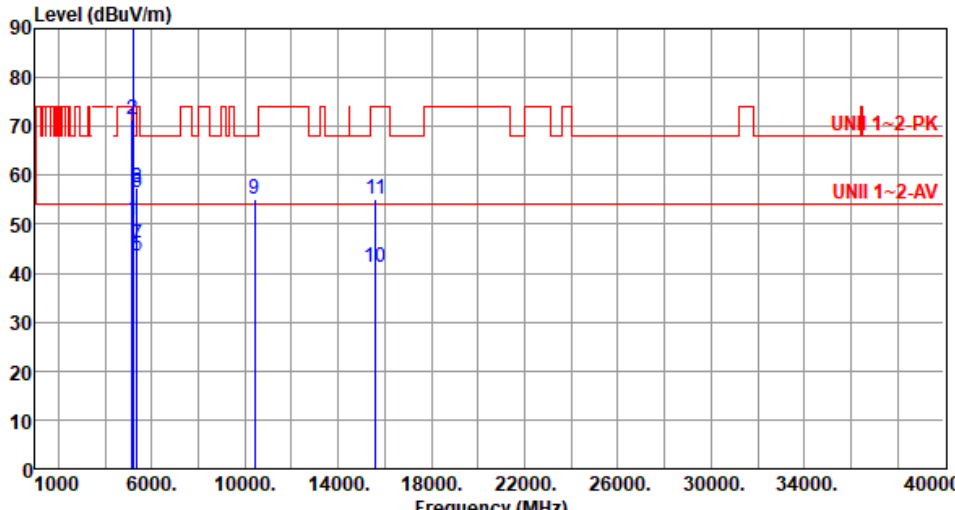

Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.96	54.00	-3.04	50.31	0.65	Average	100	214
2	5150.00	71.24	74.00	-2.76	70.59	0.65	Peak	100	214
3 *	5200.00	106.77			106.21	0.56	Average	100	214
4 *	5200.00	117.81			117.25	0.56	Peak	100	214
5	5350.00	43.41	54.00	-10.59	43.27	0.14	Average	100	214
6	5350.00	56.51	74.00	-17.49	56.37	0.14	Peak	100	214
7	5360.00	45.73	54.00	-8.27	45.58	0.15	Average	100	214
8	5360.00	57.55	74.00	-16.45	57.40	0.15	Peak	100	214
9	10400.00	55.08	68.20	-13.12	46.62	8.46	Peak	100	33
10	15600.00	41.22	54.00	-12.78	36.55	4.67	Average	100	18
11	15600.00	55.15	74.00	-18.85	50.48	4.67	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5200																																																																																																																																												
Polarization	Vertical																																																																																																																																														
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>51.25</td><td>54.00</td><td>-2.75</td><td>50.60</td><td>0.65</td><td>Average</td><td>211</td><td>212</td></tr><tr><td>2</td><td>5150.00</td><td>73.56</td><td>74.00</td><td>-0.44</td><td>72.91</td><td>0.65</td><td>Peak</td><td>211</td><td>212</td></tr><tr><td>3 *</td><td>5200.00</td><td>111.31</td><td></td><td></td><td>110.75</td><td>0.56</td><td>Average</td><td>198</td><td>232</td></tr><tr><td>4 *</td><td>5200.00</td><td>122.57</td><td></td><td></td><td>122.01</td><td>0.56</td><td>Peak</td><td>198</td><td>232</td></tr><tr><td>5</td><td>5350.00</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>43.88</td><td>0.14</td><td>Average</td><td>198</td><td>232</td></tr><tr><td>6</td><td>5350.00</td><td>58.78</td><td>74.00</td><td>-15.22</td><td>58.64</td><td>0.14</td><td>Peak</td><td>198</td><td>232</td></tr><tr><td>7</td><td>5360.00</td><td>47.64</td><td>54.00</td><td>-6.36</td><td>47.49</td><td>0.15</td><td>Average</td><td>196</td><td>168</td></tr><tr><td>8</td><td>5360.00</td><td>59.18</td><td>74.00</td><td>-14.82</td><td>59.03</td><td>0.15</td><td>Peak</td><td>196</td><td>168</td></tr><tr><td>9</td><td>10400.00</td><td>54.94</td><td>68.20</td><td>-13.26</td><td>46.48</td><td>8.46</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>10</td><td>15600.00</td><td>41.09</td><td>54.00</td><td>-12.91</td><td>36.42</td><td>4.67</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>11</td><td>15600.00</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>50.35</td><td>4.67</td><td>Peak</td><td>100</td><td>23</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	51.25	54.00	-2.75	50.60	0.65	Average	211	212	2	5150.00	73.56	74.00	-0.44	72.91	0.65	Peak	211	212	3 *	5200.00	111.31			110.75	0.56	Average	198	232	4 *	5200.00	122.57			122.01	0.56	Peak	198	232	5	5350.00	44.02	54.00	-9.98	43.88	0.14	Average	198	232	6	5350.00	58.78	74.00	-15.22	58.64	0.14	Peak	198	232	7	5360.00	47.64	54.00	-6.36	47.49	0.15	Average	196	168	8	5360.00	59.18	74.00	-14.82	59.03	0.15	Peak	196	168	9	10400.00	54.94	68.20	-13.26	46.48	8.46	Peak	100	19	10	15600.00	41.09	54.00	-12.91	36.42	4.67	Average	100	23	11	15600.00	55.02	74.00	-18.98	50.35	4.67	Peak	100	23
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																																						
		dBuV/m			dBuV			cm	deg																																																																																																																																						
1	5150.00	51.25	54.00	-2.75	50.60	0.65	Average	211	212																																																																																																																																						
2	5150.00	73.56	74.00	-0.44	72.91	0.65	Peak	211	212																																																																																																																																						
3 *	5200.00	111.31			110.75	0.56	Average	198	232																																																																																																																																						
4 *	5200.00	122.57			122.01	0.56	Peak	198	232																																																																																																																																						
5	5350.00	44.02	54.00	-9.98	43.88	0.14	Average	198	232																																																																																																																																						
6	5350.00	58.78	74.00	-15.22	58.64	0.14	Peak	198	232																																																																																																																																						
7	5360.00	47.64	54.00	-6.36	47.49	0.15	Average	196	168																																																																																																																																						
8	5360.00	59.18	74.00	-14.82	59.03	0.15	Peak	196	168																																																																																																																																						
9	10400.00	54.94	68.20	-13.26	46.48	8.46	Peak	100	19																																																																																																																																						
10	15600.00	41.09	54.00	-12.91	36.42	4.67	Average	100	23																																																																																																																																						
11	15600.00	55.02	74.00	-18.98	50.35	4.67	Peak	100	23																																																																																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																															



Modulation	11a	Test Freq. (MHz)	5240						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5150.00	44.26	54.00	-9.74	43.61	0.65	Average	100	213
2	5150.00	58.19	74.00	-15.81	57.54	0.65	Peak	100	213
3 *	5240.00	107.45			107.11	0.34	Average	100	213
4 *	5240.00	118.15			117.81	0.34	Peak	100	213
5	5350.00	44.00	54.00	-10.00	43.86	0.14	Average	100	213
6	5350.00	57.90	74.00	-16.10	57.76	0.14	Peak	100	213
7	5400.00	46.19	54.00	-7.81	46.02	0.17	Average	100	222
8	5400.00	58.79	74.00	-15.21	58.62	0.17	Peak	100	222
9	10480.00	56.45	68.20	-11.75	47.95	8.50	Peak	100	15
10	15720.00	42.36	54.00	-11.64	37.41	4.95	Average	100	19
11	15720.00	54.19	74.00	-19.81	49.24	4.95	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5240						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.53	54.00	-8.47	44.88	0.65	Average	202	235
2	5150.00	61.56	74.00	-12.44	60.91	0.65	Peak	202	235
3 *	5240.00	112.30			111.96	0.34	Average	202	235
4 *	5240.00	123.18			122.84	0.34	Peak	202	235
5	5350.00	44.41	54.00	-9.59	44.27	0.14	Average	202	235
6	5350.00	59.17	74.00	-14.83	59.03	0.14	Peak	202	235
7	5400.00	48.36	54.00	-5.64	48.19	0.17	Average	292	219
8	5400.00	60.98	74.00	-13.02	60.81	0.17	Peak	292	219
9	10480.00	56.48	68.20	-11.72	47.98	8.50	Peak	100	45
10	15720.00	42.41	54.00	-11.59	37.46	4.95	Average	100	24
11	15720.00	54.57	74.00	-19.43	49.62	4.95	Peak	100	24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5260																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>43.71</td><td>54.00</td><td>-10.29</td><td>43.06</td><td>0.65</td><td>Average</td><td>177</td><td>234</td></tr><tr><td>2</td><td>5150.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>55.68</td><td>0.65</td><td>Peak</td><td>177</td><td>234</td></tr><tr><td>3 *</td><td>5260.00</td><td>106.85</td><td></td><td></td><td>106.58</td><td>0.27</td><td>Average</td><td>177</td><td>234</td></tr><tr><td>4 *</td><td>5260.00</td><td>117.42</td><td></td><td></td><td>117.15</td><td>0.27</td><td>Peak</td><td>177</td><td>234</td></tr><tr><td>5</td><td>5350.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>43.84</td><td>0.14</td><td>Average</td><td>177</td><td>234</td></tr><tr><td>6</td><td>5350.00</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>56.41</td><td>0.14</td><td>Peak</td><td>177</td><td>234</td></tr><tr><td>7</td><td>10520.00</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>46.30</td><td>8.38</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>8</td><td>15780.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>36.21</td><td>4.74</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>9</td><td>15780.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>50.20</td><td>4.74</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.71	54.00	-10.29	43.06	0.65	Average	177	234	2	5150.00	56.33	74.00	-17.67	55.68	0.65	Peak	177	234	3 *	5260.00	106.85			106.58	0.27	Average	177	234	4 *	5260.00	117.42			117.15	0.27	Peak	177	234	5	5350.00	43.98	54.00	-10.02	43.84	0.14	Average	177	234	6	5350.00	56.55	74.00	-17.45	56.41	0.14	Peak	177	234	7	10520.00	54.68	68.20	-13.52	46.30	8.38	Peak	100	61	8	15780.00	40.95	54.00	-13.05	36.21	4.74	Average	100	35	9	15780.00	54.94	74.00	-19.06	50.20	4.74	Peak	100	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.71	54.00	-10.29	43.06	0.65	Average	177	234																																																																																														
2	5150.00	56.33	74.00	-17.67	55.68	0.65	Peak	177	234																																																																																														
3 *	5260.00	106.85			106.58	0.27	Average	177	234																																																																																														
4 *	5260.00	117.42			117.15	0.27	Peak	177	234																																																																																														
5	5350.00	43.98	54.00	-10.02	43.84	0.14	Average	177	234																																																																																														
6	5350.00	56.55	74.00	-17.45	56.41	0.14	Peak	177	234																																																																																														
7	10520.00	54.68	68.20	-13.52	46.30	8.38	Peak	100	61																																																																																														
8	15780.00	40.95	54.00	-13.05	36.21	4.74	Average	100	35																																																																																														
9	15780.00	54.94	74.00	-19.06	50.20	4.74	Peak	100	35																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	11a	Test Freq. (MHz)	5300							
Polarization	Horizontal									
Test By :Brad Wu Temperature(°C):26 Humidity(%):61										
Level (dBuV/m) Frequency (MHz)										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level			reading			High	Table	
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	*	5300.00	100.76		100.55	0.21	Average	100	213	
2	*	5300.00	111.46		111.25	0.21	Peak	100	213	
3		5350.00	44.22	54.00	-9.78	44.08	0.14	Average	100	213
4		5350.00	56.80	74.00	-17.20	56.66	0.14	Peak	100	213
5		10600.00	41.92	54.00	-12.08	33.59	8.33	Average	100	11
6		10600.00	54.96	74.00	-19.04	46.63	8.33	Peak	100	11
7		15900.00	42.25	54.00	-11.75	37.53	4.72	Average	100	36
8		15900.00	55.13	74.00	-18.87	50.41	4.72	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency




Modulation	11a	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBUV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5300.00</td><td>105.90</td><td></td><td></td><td>105.69</td><td>0.21</td><td>Average</td><td>183</td><td>234</td></tr><tr><td>2 *</td><td>5300.00</td><td>117.39</td><td></td><td></td><td>117.18</td><td>0.21</td><td>Peak</td><td>183</td><td>234</td></tr><tr><td>3</td><td>5350.00</td><td>46.75</td><td>54.00</td><td>-7.25</td><td>46.61</td><td>0.14</td><td>Average</td><td>183</td><td>234</td></tr><tr><td>4</td><td>5350.00</td><td>59.99</td><td>74.00</td><td>-14.01</td><td>59.85</td><td>0.14</td><td>Peak</td><td>183</td><td>234</td></tr><tr><td>5</td><td>10600.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>33.21</td><td>8.33</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td>10600.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>46.12</td><td>8.33</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>7</td><td>15900.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>37.59</td><td>4.72</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>8</td><td>15900.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>50.54</td><td>4.72</td><td>Peak</td><td>100</td><td>14</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5300.00	105.90			105.69	0.21	Average	183	234	2 *	5300.00	117.39			117.18	0.21	Peak	183	234	3	5350.00	46.75	54.00	-7.25	46.61	0.14	Average	183	234	4	5350.00	59.99	74.00	-14.01	59.85	0.14	Peak	183	234	5	10600.00	41.54	54.00	-12.46	33.21	8.33	Average	100	28	6	10600.00	54.45	74.00	-19.55	46.12	8.33	Peak	100	28	7	15900.00	42.31	54.00	-11.69	37.59	4.72	Average	100	14	8	15900.00	55.26	74.00	-18.74	50.54	4.72	Peak	100	14
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5300.00	105.90			105.69	0.21	Average	183	234																																																																																																								
2 *	5300.00	117.39			117.18	0.21	Peak	183	234																																																																																																								
3	5350.00	46.75	54.00	-7.25	46.61	0.14	Average	183	234																																																																																																								
4	5350.00	59.99	74.00	-14.01	59.85	0.14	Peak	183	234																																																																																																								
5	10600.00	41.54	54.00	-12.46	33.21	8.33	Average	100	28																																																																																																								
6	10600.00	54.45	74.00	-19.55	46.12	8.33	Peak	100	28																																																																																																								
7	15900.00	42.31	54.00	-11.69	37.59	4.72	Average	100	14																																																																																																								
8	15900.00	55.26	74.00	-18.74	50.54	4.72	Peak	100	14																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5320																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5320.00</td><td>99.63</td><td></td><td></td><td>99.44</td><td>0.19</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>2 *</td><td>5320.00</td><td>110.02</td><td></td><td></td><td>109.83</td><td>0.19</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>3</td><td>5350.00</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>43.33</td><td>0.14</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>4</td><td>5350.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>55.44</td><td>0.14</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>5</td><td>10640.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>33.25</td><td>8.39</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>6</td><td>10640.00</td><td>54.59</td><td>74.00</td><td>-19.41</td><td>46.20</td><td>8.39</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>7</td><td>15960.00</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>37.29</td><td>4.63</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>8</td><td>15960.00</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>50.35</td><td>4.63</td><td>Peak</td><td>100</td><td>13</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5320.00	99.63			99.44	0.19	Average	100	210	2 *	5320.00	110.02			109.83	0.19	Peak	100	210	3	5350.00	43.47	54.00	-10.53	43.33	0.14	Average	100	210	4	5350.00	55.58	74.00	-18.42	55.44	0.14	Peak	100	210	5	10640.00	41.64	54.00	-12.36	33.25	8.39	Average	100	35	6	10640.00	54.59	74.00	-19.41	46.20	8.39	Peak	100	35	7	15960.00	41.92	54.00	-12.08	37.29	4.63	Average	100	13	8	15960.00	54.98	74.00	-19.02	50.35	4.63	Peak	100	13
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5320.00	99.63			99.44	0.19	Average	100	210																																																																																																								
2 *	5320.00	110.02			109.83	0.19	Peak	100	210																																																																																																								
3	5350.00	43.47	54.00	-10.53	43.33	0.14	Average	100	210																																																																																																								
4	5350.00	55.58	74.00	-18.42	55.44	0.14	Peak	100	210																																																																																																								
5	10640.00	41.64	54.00	-12.36	33.25	8.39	Average	100	35																																																																																																								
6	10640.00	54.59	74.00	-19.41	46.20	8.39	Peak	100	35																																																																																																								
7	15960.00	41.92	54.00	-12.08	37.29	4.63	Average	100	13																																																																																																								
8	15960.00	54.98	74.00	-19.02	50.35	4.63	Peak	100	13																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>5320.00</td><td>104.61</td><td></td><td></td><td>104.42</td><td>0.19</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>2 *</td><td>5320.00</td><td>115.00</td><td></td><td></td><td>114.81</td><td>0.19</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>3</td><td>5350.00</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>44.43</td><td>0.14</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>4</td><td>5350.00</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>57.43</td><td>0.14</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>5</td><td>10640.00</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>33.19</td><td>8.39</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>10640.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>46.17</td><td>8.39</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>7</td><td>15960.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>37.22</td><td>4.63</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>8</td><td>15960.00</td><td>54.92</td><td>74.00</td><td>-19.08</td><td>50.29</td><td>4.63</td><td>Peak</td><td>100</td><td>48</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5320.00	104.61			104.42	0.19	Average	100	264	2 *	5320.00	115.00			114.81	0.19	Peak	100	264	3	5350.00	44.57	54.00	-9.43	44.43	0.14	Average	100	264	4	5350.00	57.57	74.00	-16.43	57.43	0.14	Peak	100	264	5	10640.00	41.58	54.00	-12.42	33.19	8.39	Average	100	29	6	10640.00	54.56	74.00	-19.44	46.17	8.39	Peak	100	29	7	15960.00	41.85	54.00	-12.15	37.22	4.63	Average	100	48	8	15960.00	54.92	74.00	-19.08	50.29	4.63	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5320.00	104.61			104.42	0.19	Average	100	264																																																																																																								
2 *	5320.00	115.00			114.81	0.19	Peak	100	264																																																																																																								
3	5350.00	44.57	54.00	-9.43	44.43	0.14	Average	100	264																																																																																																								
4	5350.00	57.57	74.00	-16.43	57.43	0.14	Peak	100	264																																																																																																								
5	10640.00	41.58	54.00	-12.42	33.19	8.39	Average	100	29																																																																																																								
6	10640.00	54.56	74.00	-19.44	46.17	8.39	Peak	100	29																																																																																																								
7	15960.00	41.85	54.00	-12.15	37.22	4.63	Average	100	48																																																																																																								
8	15960.00	54.92	74.00	-19.08	50.29	4.63	Peak	100	48																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

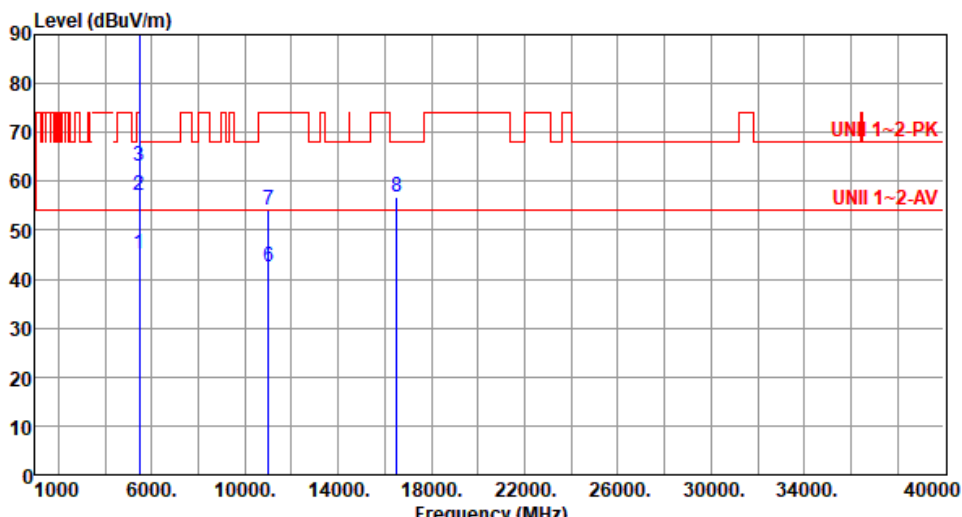Modulation	11a	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.22</td><td>54.00</td><td>-8.78</td><td>44.72</td><td>0.50</td><td>Average</td><td>155</td><td>117</td></tr><tr><td>2</td><td>5460.00</td><td>56.97</td><td>74.00</td><td>-17.03</td><td>56.47</td><td>0.50</td><td>Peak</td><td>155</td><td>117</td></tr><tr><td>3</td><td>5470.00</td><td>63.15</td><td>68.20</td><td>-5.05</td><td>62.63</td><td>0.52</td><td>Peak</td><td>155</td><td>117</td></tr><tr><td>4 *</td><td>5500.00</td><td>102.82</td><td></td><td></td><td>102.23</td><td>0.59</td><td>Average</td><td>155</td><td>117</td></tr><tr><td>5 *</td><td>5500.00</td><td>113.71</td><td></td><td></td><td>113.12</td><td>0.59</td><td>Peak</td><td>155</td><td>117</td></tr><tr><td>6</td><td>11000.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>33.81</td><td>8.70</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>7</td><td>11000.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>45.56</td><td>8.70</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>8</td><td>16500.00</td><td>56.84</td><td>68.20</td><td>-11.36</td><td>50.58</td><td>6.26</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.22	54.00	-8.78	44.72	0.50	Average	155	117	2	5460.00	56.97	74.00	-17.03	56.47	0.50	Peak	155	117	3	5470.00	63.15	68.20	-5.05	62.63	0.52	Peak	155	117	4 *	5500.00	102.82			102.23	0.59	Average	155	117	5 *	5500.00	113.71			113.12	0.59	Peak	155	117	6	11000.00	42.51	54.00	-11.49	33.81	8.70	Average	100	21	7	11000.00	54.26	74.00	-19.74	45.56	8.70	Peak	100	21	8	16500.00	56.84	68.20	-11.36	50.58	6.26	Peak	100	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	45.22	54.00	-8.78	44.72	0.50	Average	155	117																																																																																				
2	5460.00	56.97	74.00	-17.03	56.47	0.50	Peak	155	117																																																																																				
3	5470.00	63.15	68.20	-5.05	62.63	0.52	Peak	155	117																																																																																				
4 *	5500.00	102.82			102.23	0.59	Average	155	117																																																																																				
5 *	5500.00	113.71			113.12	0.59	Peak	155	117																																																																																				
6	11000.00	42.51	54.00	-11.49	33.81	8.70	Average	100	21																																																																																				
7	11000.00	54.26	74.00	-19.74	45.56	8.70	Peak	100	21																																																																																				
8	16500.00	56.84	68.20	-11.36	50.58	6.26	Peak	100	19																																																																																				



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5580																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.05</td><td>54.00</td><td>-10.95</td><td>42.55</td><td>0.50</td><td>Average</td><td>143</td><td>119</td></tr><tr><td>2</td><td>5460.00</td><td>57.52</td><td>74.00</td><td>-16.48</td><td>57.02</td><td>0.50</td><td>Peak</td><td>143</td><td>119</td></tr><tr><td>3</td><td>5470.00</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>57.22</td><td>0.52</td><td>Peak</td><td>143</td><td>119</td></tr><tr><td>4 *</td><td>5580.00</td><td>102.38</td><td></td><td></td><td>101.85</td><td>0.53</td><td>Average</td><td>143</td><td>119</td></tr><tr><td>5 *</td><td>5580.00</td><td>113.37</td><td></td><td></td><td>112.84</td><td>0.53</td><td>Peak</td><td>143</td><td>119</td></tr><tr><td>6</td><td>5725.00</td><td>58.37</td><td>68.20</td><td>-9.83</td><td>57.42</td><td>0.95</td><td>Peak</td><td>143</td><td>119</td></tr><tr><td>7</td><td>11160.00</td><td>43.35</td><td>54.00</td><td>-10.65</td><td>35.08</td><td>8.27</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>8</td><td>11160.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>47.14</td><td>8.27</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>9</td><td>16740.00</td><td>57.02</td><td>68.20</td><td>-11.18</td><td>50.71</td><td>6.31</td><td>Peak</td><td>100</td><td>22</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5460.00	43.05	54.00	-10.95	42.55	0.50	Average	143	119	2	5460.00	57.52	74.00	-16.48	57.02	0.50	Peak	143	119	3	5470.00	57.74	68.20	-10.46	57.22	0.52	Peak	143	119	4 *	5580.00	102.38			101.85	0.53	Average	143	119	5 *	5580.00	113.37			112.84	0.53	Peak	143	119	6	5725.00	58.37	68.20	-9.83	57.42	0.95	Peak	143	119	7	11160.00	43.35	54.00	-10.65	35.08	8.27	Average	100	45	8	11160.00	55.41	74.00	-18.59	47.14	8.27	Peak	100	45	9	16740.00	57.02	68.20	-11.18	50.71	6.31	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level			reading			High	Table																																																																																																																		
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	5460.00	43.05	54.00	-10.95	42.55	0.50	Average	143	119																																																																																																																		
2	5460.00	57.52	74.00	-16.48	57.02	0.50	Peak	143	119																																																																																																																		
3	5470.00	57.74	68.20	-10.46	57.22	0.52	Peak	143	119																																																																																																																		
4 *	5580.00	102.38			101.85	0.53	Average	143	119																																																																																																																		
5 *	5580.00	113.37			112.84	0.53	Peak	143	119																																																																																																																		
6	5725.00	58.37	68.20	-9.83	57.42	0.95	Peak	143	119																																																																																																																		
7	11160.00	43.35	54.00	-10.65	35.08	8.27	Average	100	45																																																																																																																		
8	11160.00	55.41	74.00	-18.59	47.14	8.27	Peak	100	45																																																																																																																		
9	16740.00	57.02	68.20	-11.18	50.71	6.31	Peak	100	22																																																																																																																		



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			




Modulation	11a	Test Freq. (MHz)	5700																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>5700.00</td><td>100.12</td><td></td><td>99.22</td><td>0.90</td><td>Average</td><td>150</td><td>115</td></tr><tr><td>2</td><td>*</td><td>5700.00</td><td>110.70</td><td></td><td>109.80</td><td>0.90</td><td>Peak</td><td>150</td><td>115</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>63.07</td><td>68.20</td><td>-5.13</td><td>62.12</td><td>0.95</td><td>Peak</td><td>150</td></tr><tr><td>4</td><td></td><td>11400.00</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>34.22</td><td>8.06</td><td>Average</td><td>100</td></tr><tr><td>5</td><td></td><td>11400.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>47.10</td><td>8.06</td><td>Peak</td><td>100</td></tr><tr><td>6</td><td></td><td>17100.00</td><td>57.58</td><td>68.20</td><td>-10.62</td><td>51.81</td><td>5.77</td><td>Peak</td><td>100</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	5700.00	100.12		99.22	0.90	Average	150	115	2	*	5700.00	110.70		109.80	0.90	Peak	150	115	3		5725.00	63.07	68.20	-5.13	62.12	0.95	Peak	150	4		11400.00	42.28	54.00	-11.72	34.22	8.06	Average	100	5		11400.00	55.16	74.00	-18.84	47.10	8.06	Peak	100	6		17100.00	57.58	68.20	-10.62	51.81	5.77	Peak	100
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	*	5700.00	100.12		99.22	0.90	Average	150	115																																																																																				
2	*	5700.00	110.70		109.80	0.90	Peak	150	115																																																																																				
3		5725.00	63.07	68.20	-5.13	62.12	0.95	Peak	150																																																																																				
4		11400.00	42.28	54.00	-11.72	34.22	8.06	Average	100																																																																																				
5		11400.00	55.16	74.00	-18.84	47.10	8.06	Peak	100																																																																																				
6		17100.00	57.58	68.20	-10.62	51.81	5.77	Peak	100																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	11a	Test Freq. (MHz)	5700																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5700.00</td><td>104.93</td><td></td><td></td><td>104.03</td><td>0.90</td><td>Average</td><td>209</td><td>268</td></tr><tr><td>2</td><td>5700.00</td><td>116.90</td><td></td><td></td><td>116.00</td><td>0.90</td><td>Peak</td><td>209</td><td>268</td></tr><tr><td>3</td><td>5725.00</td><td>68.06</td><td>68.20</td><td>-0.14</td><td>67.11</td><td>0.95</td><td>Peak</td><td>209</td><td>268</td></tr><tr><td>4</td><td>11400.00</td><td>42.39</td><td>54.00</td><td>-11.61</td><td>34.33</td><td>8.06</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>5</td><td>11400.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>47.22</td><td>8.06</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>6</td><td>17100.00</td><td>57.42</td><td>68.20</td><td>-10.78</td><td>51.65</td><td>5.77</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5700.00	104.93			104.03	0.90	Average	209	268	2	5700.00	116.90			116.00	0.90	Peak	209	268	3	5725.00	68.06	68.20	-0.14	67.11	0.95	Peak	209	268	4	11400.00	42.39	54.00	-11.61	34.33	8.06	Average	100	41	5	11400.00	55.28	74.00	-18.72	47.22	8.06	Peak	100	41	6	17100.00	57.42	68.20	-10.78	51.65	5.77	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5700.00	104.93			104.03	0.90	Average	209	268																																																																
2	5700.00	116.90			116.00	0.90	Peak	209	268																																																																
3	5725.00	68.06	68.20	-0.14	67.11	0.95	Peak	209	268																																																																
4	11400.00	42.39	54.00	-11.61	34.33	8.06	Average	100	41																																																																
5	11400.00	55.28	74.00	-18.72	47.22	8.06	Peak	100	41																																																																
6	17100.00	57.42	68.20	-10.78	51.65	5.77	Peak	100	29																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																									

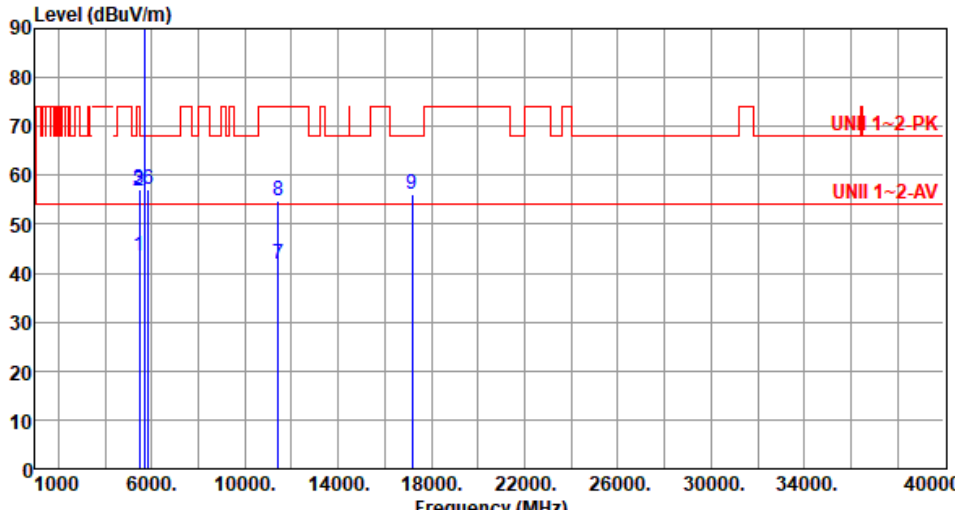


Modulation	11a	Test Freq. (MHz)	5720																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																											
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>43.15</td><td>0.50</td><td>Average</td><td>141</td><td>118</td></tr><tr><td>2</td><td>5460.00</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>56.18</td><td>0.50</td><td>Peak</td><td>141</td><td>118</td></tr><tr><td>3</td><td>5470.00</td><td>57.11</td><td>68.20</td><td>-11.09</td><td>56.59</td><td>0.52</td><td>Peak</td><td>141</td><td>118</td></tr><tr><td>4 *</td><td>5720.00</td><td>103.25</td><td></td><td></td><td>102.31</td><td>0.94</td><td>Average</td><td>141</td><td>118</td></tr><tr><td>5 *</td><td>5720.00</td><td>114.21</td><td></td><td></td><td>113.27</td><td>0.94</td><td>Peak</td><td>141</td><td>118</td></tr><tr><td>6</td><td>5850.00</td><td>57.24</td><td>68.20</td><td>-10.96</td><td>56.16</td><td>1.08</td><td>Peak</td><td>141</td><td>118</td></tr><tr><td>7</td><td>11440.00</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>33.54</td><td>8.14</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>8</td><td>11440.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>46.58</td><td>8.14</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>9</td><td>17160.00</td><td>56.22</td><td>68.20</td><td>-11.98</td><td>50.76</td><td>5.46</td><td>Peak</td><td>100</td><td>14</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	5460.00	43.65	54.00	-10.35	43.15	0.50	Average	141	118	2	5460.00	56.68	74.00	-17.32	56.18	0.50	Peak	141	118	3	5470.00	57.11	68.20	-11.09	56.59	0.52	Peak	141	118	4 *	5720.00	103.25			102.31	0.94	Average	141	118	5 *	5720.00	114.21			113.27	0.94	Peak	141	118	6	5850.00	57.24	68.20	-10.96	56.16	1.08	Peak	141	118	7	11440.00	41.68	54.00	-12.32	33.54	8.14	Average	100	32	8	11440.00	54.72	74.00	-19.28	46.58	8.14	Peak	100	32	9	17160.00	56.22	68.20	-11.98	50.76	5.46	Peak	100	14
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
					dBuV			cm	deg																																																																																																																		
1	5460.00	43.65	54.00	-10.35	43.15	0.50	Average	141	118																																																																																																																		
2	5460.00	56.68	74.00	-17.32	56.18	0.50	Peak	141	118																																																																																																																		
3	5470.00	57.11	68.20	-11.09	56.59	0.52	Peak	141	118																																																																																																																		
4 *	5720.00	103.25			102.31	0.94	Average	141	118																																																																																																																		
5 *	5720.00	114.21			113.27	0.94	Peak	141	118																																																																																																																		
6	5850.00	57.24	68.20	-10.96	56.16	1.08	Peak	141	118																																																																																																																		
7	11440.00	41.68	54.00	-12.32	33.54	8.14	Average	100	32																																																																																																																		
8	11440.00	54.72	74.00	-19.28	46.58	8.14	Peak	100	32																																																																																																																		
9	17160.00	56.22	68.20	-11.98	50.76	5.46	Peak	100	14																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											




Modulation	11a	Test Freq. (MHz)	5720																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																											
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>43.23</td><td>0.50</td><td>Average</td><td>208</td><td>268</td></tr><tr><td>2</td><td>5460.00</td><td>56.74</td><td>74.00</td><td>-17.26</td><td>56.24</td><td>0.50</td><td>Peak</td><td>208</td><td>268</td></tr><tr><td>3</td><td>5470.00</td><td>57.24</td><td>68.20</td><td>-10.96</td><td>56.72</td><td>0.52</td><td>Peak</td><td>208</td><td>268</td></tr><tr><td>4 *</td><td>5720.00</td><td>107.10</td><td></td><td></td><td>106.16</td><td>0.94</td><td>Average</td><td>208</td><td>268</td></tr><tr><td>5 *</td><td>5720.00</td><td>118.45</td><td></td><td></td><td>117.51</td><td>0.94</td><td>Peak</td><td>208</td><td>268</td></tr><tr><td>6</td><td>5850.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>56.19</td><td>1.08</td><td>Peak</td><td>208</td><td>268</td></tr><tr><td>7</td><td>11440.00</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>33.61</td><td>8.14</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>8</td><td>11440.00</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>46.62</td><td>8.14</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>9</td><td>17160.00</td><td>56.12</td><td>68.20</td><td>-12.08</td><td>50.66</td><td>5.46</td><td>Peak</td><td>100</td><td>34</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5460.00	43.73	54.00	-10.27	43.23	0.50	Average	208	268	2	5460.00	56.74	74.00	-17.26	56.24	0.50	Peak	208	268	3	5470.00	57.24	68.20	-10.96	56.72	0.52	Peak	208	268	4 *	5720.00	107.10			106.16	0.94	Average	208	268	5 *	5720.00	118.45			117.51	0.94	Peak	208	268	6	5850.00	57.27	68.20	-10.93	56.19	1.08	Peak	208	268	7	11440.00	41.75	54.00	-12.25	33.61	8.14	Average	100	29	8	11440.00	54.76	74.00	-19.24	46.62	8.14	Peak	100	29	9	17160.00	56.12	68.20	-12.08	50.66	5.46	Peak	100	34
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level			reading			High	Table																																																																																																																		
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	5460.00	43.73	54.00	-10.27	43.23	0.50	Average	208	268																																																																																																																		
2	5460.00	56.74	74.00	-17.26	56.24	0.50	Peak	208	268																																																																																																																		
3	5470.00	57.24	68.20	-10.96	56.72	0.52	Peak	208	268																																																																																																																		
4 *	5720.00	107.10			106.16	0.94	Average	208	268																																																																																																																		
5 *	5720.00	118.45			117.51	0.94	Peak	208	268																																																																																																																		
6	5850.00	57.27	68.20	-10.93	56.19	1.08	Peak	208	268																																																																																																																		
7	11440.00	41.75	54.00	-12.25	33.61	8.14	Average	100	29																																																																																																																		
8	11440.00	54.76	74.00	-19.24	46.62	8.14	Peak	100	29																																																																																																																		
9	17160.00	56.12	68.20	-12.08	50.66	5.46	Peak	100	34																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

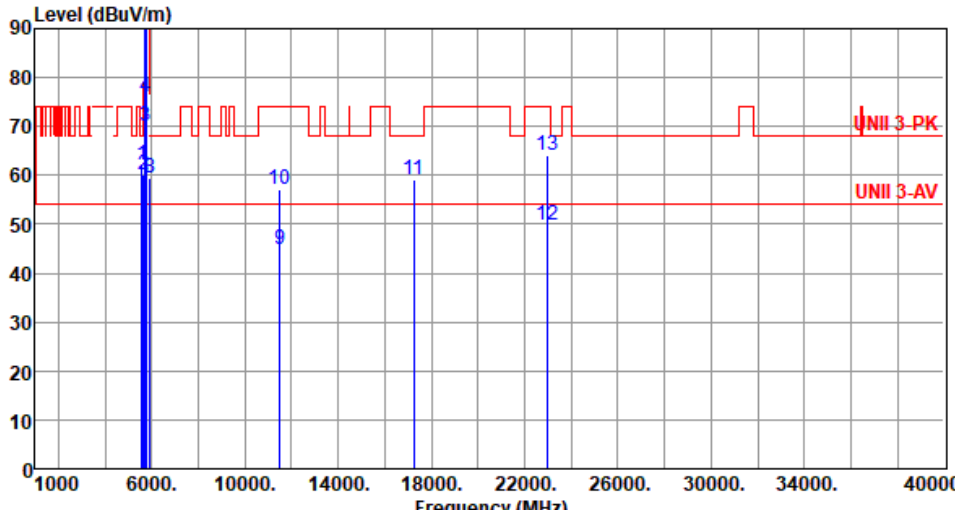


Modulation	11a	Test Freq. (MHz)	5745						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5585.00	62.03	68.20	-6.17	61.50	0.53	Peak	146	117
2	5650.00	60.08	68.20	-8.12	59.42	0.66	Peak	146	117
3	5700.00	70.16	105.20	-35.04	69.26	0.90	Peak	146	117
4	5720.00	75.98	110.80	-34.82	75.04	0.94	Peak	146	117
5	5725.00	90.67	122.20	-31.53	89.72	0.95	Peak	146	117
6 *	5745.00	109.24			108.24	1.00	Average	146	117
7 *	5745.00	119.83			118.83	1.00	Peak	146	117
8	5925.00	59.39	68.20	-8.81	57.95	1.44	Peak	146	117
9	11490.00	44.85	54.00	-9.15	36.46	8.39	Average	100	112
10	11490.00	57.24	74.00	-16.76	48.85	8.39	Peak	100	112
11	17235.00	59.11	68.20	-9.09	53.67	5.44	Peak	100	255
12	22980.00	49.71	54.00	-4.29	42.85	6.86	Average	128	76
13	22980.00	64.11	74.00	-9.89	57.25	6.86	Peak	128	76

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

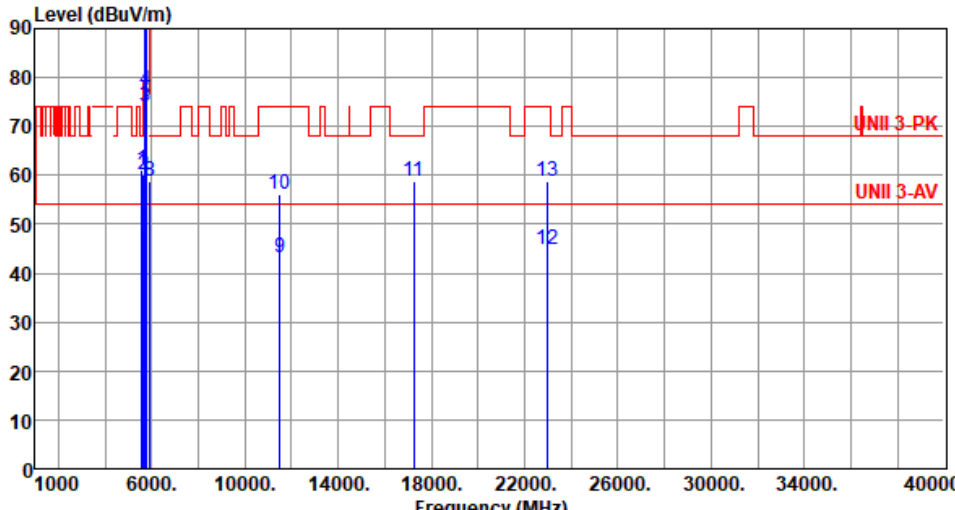


Modulation	11a	Test Freq. (MHz)	5745						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5585.00	61.21	68.20	-6.99	60.68	0.53	Peak	130	6
2	5650.00	60.05	68.20	-8.15	59.39	0.66	Peak	130	6
3	5700.00	73.97	105.20	-31.23	73.07	0.90	Peak	130	6
4	5720.00	77.27	110.80	-33.53	76.33	0.94	Peak	130	6
5	5725.00	92.03	122.20	-30.17	91.08	0.95	Peak	130	6
6 *	5745.00	111.88			110.88	1.00	Average	130	6
7 *	5745.00	122.69			121.69	1.00	Peak	130	6
8	5925.00	58.84	68.20	-9.36	57.40	1.44	Peak	130	6
9	11490.00	43.22	54.00	-10.78	34.83	8.39	Average	100	268
10	11490.00	56.25	74.00	-17.75	47.86	8.39	Peak	100	268
11	17235.00	58.79	68.20	-9.41	53.35	5.44	Peak	100	121
12	22980.00	44.93	54.00	-9.07	38.07	6.86	Average	272	130
13	22980.00	58.89	74.00	-15.11	52.03	6.86	Peak	272	130
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

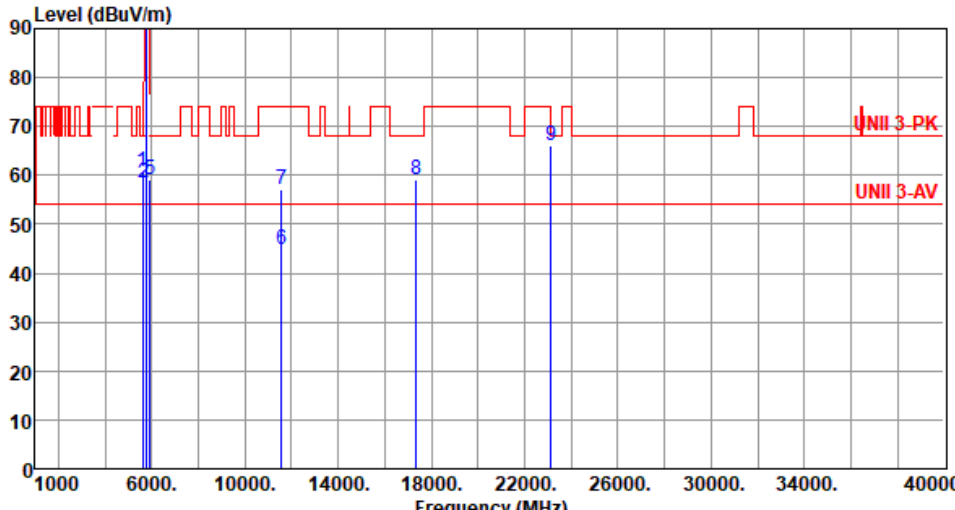


Modulation	11a	Test Freq. (MHz)	5785																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5625.00</td><td>60.66</td><td>68.20</td><td>-7.54</td><td>60.06</td><td>0.60</td><td>Peak</td><td>166</td><td>120</td></tr><tr><td>2</td><td>5650.00</td><td>58.36</td><td>68.20</td><td>-9.84</td><td>57.70</td><td>0.66</td><td>Peak</td><td>166</td><td>120</td></tr><tr><td>3 *</td><td>5785.00</td><td>108.25</td><td></td><td></td><td>107.21</td><td>1.04</td><td>Average</td><td>166</td><td>120</td></tr><tr><td>4 *</td><td>5785.00</td><td>119.00</td><td></td><td></td><td>117.96</td><td>1.04</td><td>Peak</td><td>166</td><td>120</td></tr><tr><td>5</td><td>5925.00</td><td>59.20</td><td>68.20</td><td>-9.00</td><td>57.76</td><td>1.44</td><td>Peak</td><td>166</td><td>120</td></tr><tr><td>6</td><td>11570.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>36.59</td><td>8.33</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>7</td><td>11570.00</td><td>57.27</td><td>74.00</td><td>-16.73</td><td>48.94</td><td>8.33</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>8</td><td>17355.00</td><td>59.05</td><td>68.20</td><td>-9.15</td><td>53.21</td><td>5.84</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>9</td><td>23140.00</td><td>65.98</td><td>68.20</td><td>-2.22</td><td>58.89</td><td>7.09</td><td>Peak</td><td>130</td><td>89</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5625.00	60.66	68.20	-7.54	60.06	0.60	Peak	166	120	2	5650.00	58.36	68.20	-9.84	57.70	0.66	Peak	166	120	3 *	5785.00	108.25			107.21	1.04	Average	166	120	4 *	5785.00	119.00			117.96	1.04	Peak	166	120	5	5925.00	59.20	68.20	-9.00	57.76	1.44	Peak	166	120	6	11570.00	44.92	54.00	-9.08	36.59	8.33	Average	100	109	7	11570.00	57.27	74.00	-16.73	48.94	8.33	Peak	100	109	8	17355.00	59.05	68.20	-9.15	53.21	5.84	Peak	100	254	9	23140.00	65.98	68.20	-2.22	58.89	7.09	Peak	130	89
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5625.00	60.66	68.20	-7.54	60.06	0.60	Peak	166	120																																																																																														
2	5650.00	58.36	68.20	-9.84	57.70	0.66	Peak	166	120																																																																																														
3 *	5785.00	108.25			107.21	1.04	Average	166	120																																																																																														
4 *	5785.00	119.00			117.96	1.04	Peak	166	120																																																																																														
5	5925.00	59.20	68.20	-9.00	57.76	1.44	Peak	166	120																																																																																														
6	11570.00	44.92	54.00	-9.08	36.59	8.33	Average	100	109																																																																																														
7	11570.00	57.27	74.00	-16.73	48.94	8.33	Peak	100	109																																																																																														
8	17355.00	59.05	68.20	-9.15	53.21	5.84	Peak	100	254																																																																																														
9	23140.00	65.98	68.20	-2.22	58.89	7.09	Peak	130	89																																																																																														

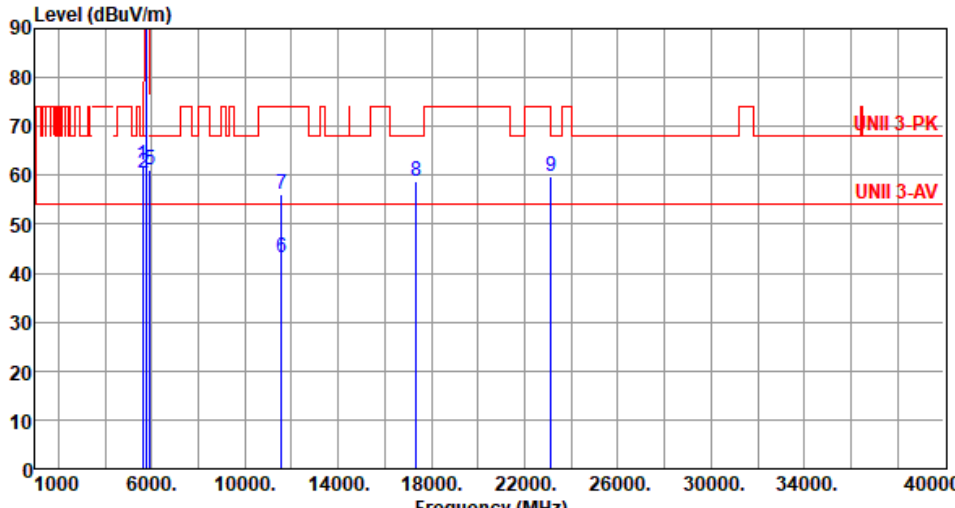


Modulation	11a	Test Freq. (MHz)	5785																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5625.00</td><td>62.23</td><td>68.20</td><td>-5.97</td><td>61.63</td><td>0.60</td><td>Peak</td><td>217</td><td>256</td></tr><tr><td>2</td><td>5650.00</td><td>60.40</td><td>68.20</td><td>-7.80</td><td>59.74</td><td>0.66</td><td>Peak</td><td>217</td><td>256</td></tr><tr><td>3 *</td><td>5785.00</td><td>111.83</td><td></td><td></td><td>110.79</td><td>1.04</td><td>Average</td><td>217</td><td>256</td></tr><tr><td>4 *</td><td>5785.00</td><td>122.73</td><td></td><td></td><td>121.69</td><td>1.04</td><td>Peak</td><td>217</td><td>256</td></tr><tr><td>5</td><td>5925.00</td><td>61.09</td><td>68.20</td><td>-7.11</td><td>59.65</td><td>1.44</td><td>Peak</td><td>217</td><td>256</td></tr><tr><td>6</td><td>11570.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>34.85</td><td>8.33</td><td>Average</td><td>100</td><td>276</td></tr><tr><td>7</td><td>11570.00</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>47.84</td><td>8.33</td><td>Peak</td><td>100</td><td>276</td></tr><tr><td>8</td><td>17355.00</td><td>58.87</td><td>68.20</td><td>-9.33</td><td>53.03</td><td>5.84</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>9</td><td>23140.00</td><td>59.63</td><td>68.20</td><td>-8.57</td><td>52.54</td><td>7.09</td><td>Peak</td><td>268</td><td>129</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5625.00	62.23	68.20	-5.97	61.63	0.60	Peak	217	256	2	5650.00	60.40	68.20	-7.80	59.74	0.66	Peak	217	256	3 *	5785.00	111.83			110.79	1.04	Average	217	256	4 *	5785.00	122.73			121.69	1.04	Peak	217	256	5	5925.00	61.09	68.20	-7.11	59.65	1.44	Peak	217	256	6	11570.00	43.18	54.00	-10.82	34.85	8.33	Average	100	276	7	11570.00	56.17	74.00	-17.83	47.84	8.33	Peak	100	276	8	17355.00	58.87	68.20	-9.33	53.03	5.84	Peak	100	118	9	23140.00	59.63	68.20	-8.57	52.54	7.09	Peak	268	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5625.00	62.23	68.20	-5.97	61.63	0.60	Peak	217	256																																																																																														
2	5650.00	60.40	68.20	-7.80	59.74	0.66	Peak	217	256																																																																																														
3 *	5785.00	111.83			110.79	1.04	Average	217	256																																																																																														
4 *	5785.00	122.73			121.69	1.04	Peak	217	256																																																																																														
5	5925.00	61.09	68.20	-7.11	59.65	1.44	Peak	217	256																																																																																														
6	11570.00	43.18	54.00	-10.82	34.85	8.33	Average	100	276																																																																																														
7	11570.00	56.17	74.00	-17.83	47.84	8.33	Peak	100	276																																																																																														
8	17355.00	58.87	68.20	-9.33	53.03	5.84	Peak	100	118																																																																																														
9	23140.00	59.63	68.20	-8.57	52.54	7.09	Peak	268	129																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							

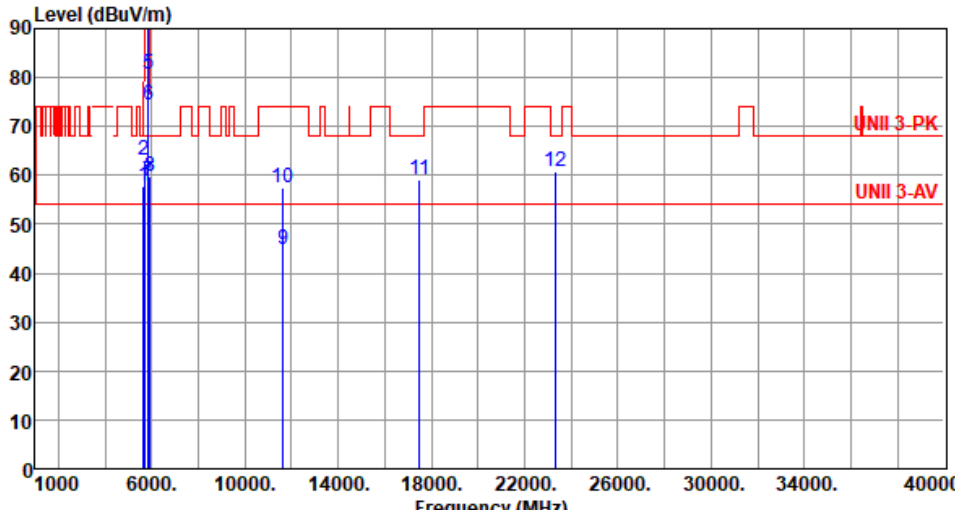

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.94	68.20	-10.26	57.28	0.66	Peak	172	122
2	5665.00	62.94	79.33	-16.39	62.21	0.73	Peak	172	122
3 *	5825.00	109.31			108.25	1.06	Average	172	122
4 *	5825.00	119.69			118.63	1.06	Peak	172	122
5	5850.00	80.58	122.20	-41.62	79.50	1.08	Peak	172	122
6	5855.00	74.46	110.80	-36.34	73.34	1.12	Peak	172	122
7	5875.00	58.90	105.20	-46.30	57.65	1.25	Peak	172	122
8	5925.00	59.74	68.20	-8.46	58.30	1.44	Peak	172	122
9	11650.00	44.98	54.00	-9.02	37.06	7.92	Average	100	104
10	11650.00	57.36	74.00	-16.64	49.44	7.92	Peak	100	104
11	17475.00	59.22	68.20	-8.98	52.90	6.32	Peak	100	258
12	23300.00	60.69	68.20	-7.51	53.52	7.17	Peak	127	75

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

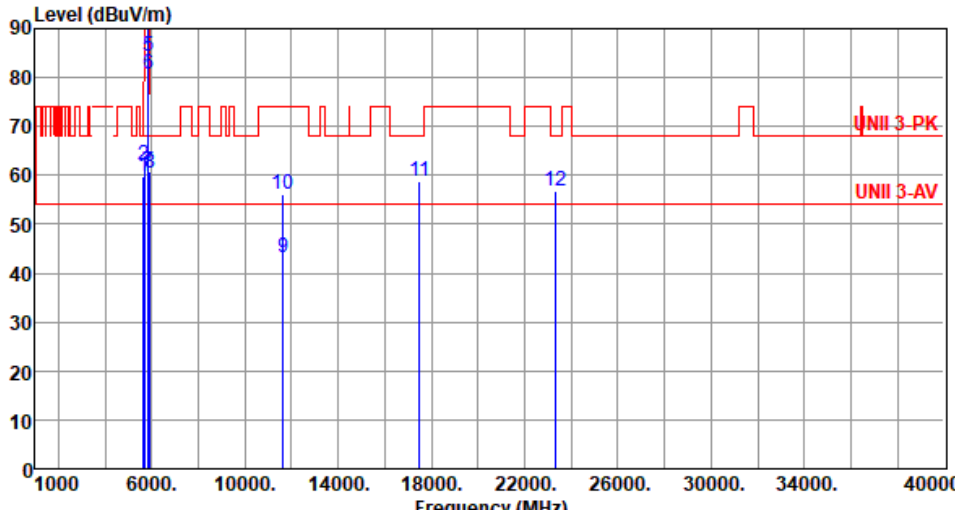

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.92	68.20	-8.28	59.26	0.66	Peak	127	7
2	5665.00	61.94	79.33	-17.39	61.21	0.73	Peak	127	7
3 *	5825.00	111.71			110.65	1.06	Average	127	7
4 *	5825.00	122.14			121.08	1.06	Peak	127	7
5	5850.00	84.21	122.20	-37.99	83.13	1.08	Peak	127	7
6	5855.00	80.69	110.80	-30.11	79.57	1.12	Peak	127	7
7	5875.00	60.66	105.20	-44.54	59.41	1.25	Peak	127	7
8	5925.00	60.33	68.20	-7.87	58.89	1.44	Peak	127	7
9	11650.00	43.15	54.00	-10.85	35.23	7.92	Average	100	288
10	11650.00	56.11	74.00	-17.89	48.19	7.92	Peak	100	288
11	17475.00	58.94	68.20	-9.26	52.62	6.32	Peak	100	122
12	23300.00	56.74	68.20	-11.46	49.57	7.17	Peak	276	131


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m)			




Modulation	be EHT20	Test Freq. (MHz)	5180																																																																																
Polarization	Vertical																																																																																		
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.51</td><td>54.00</td><td>-0.49</td><td>52.86</td><td>0.65</td><td>Average</td><td>199</td><td>165</td></tr><tr><td>2</td><td>5150.00</td><td>66.47</td><td>74.00</td><td>-7.53</td><td>65.82</td><td>0.65</td><td>Peak</td><td>199</td><td>165</td></tr><tr><td>3 *</td><td>5180.00</td><td>105.64</td><td></td><td></td><td>105.04</td><td>0.60</td><td>Average</td><td>199</td><td>94</td></tr><tr><td>4 *</td><td>5180.00</td><td>119.76</td><td></td><td></td><td>119.16</td><td>0.60</td><td>Peak</td><td>199</td><td>94</td></tr><tr><td>5</td><td>10360.00</td><td>54.38</td><td>68.20</td><td>-13.82</td><td>46.26</td><td>8.12</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>6</td><td>15540.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>36.20</td><td>4.92</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>7</td><td>15540.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>50.39</td><td>4.92</td><td>Peak</td><td>100</td><td>25</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.51	54.00	-0.49	52.86	0.65	Average	199	165	2	5150.00	66.47	74.00	-7.53	65.82	0.65	Peak	199	165	3 *	5180.00	105.64			105.04	0.60	Average	199	94	4 *	5180.00	119.76			119.16	0.60	Peak	199	94	5	10360.00	54.38	68.20	-13.82	46.26	8.12	Peak	100	33	6	15540.00	41.12	54.00	-12.88	36.20	4.92	Average	100	25	7	15540.00	55.31	74.00	-18.69	50.39	4.92	Peak	100	25
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	53.51	54.00	-0.49	52.86	0.65	Average	199	165																																																																										
2	5150.00	66.47	74.00	-7.53	65.82	0.65	Peak	199	165																																																																										
3 *	5180.00	105.64			105.04	0.60	Average	199	94																																																																										
4 *	5180.00	119.76			119.16	0.60	Peak	199	94																																																																										
5	10360.00	54.38	68.20	-13.82	46.26	8.12	Peak	100	33																																																																										
6	15540.00	41.12	54.00	-12.88	36.20	4.92	Average	100	25																																																																										
7	15540.00	55.31	74.00	-18.69	50.39	4.92	Peak	100	25																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																			

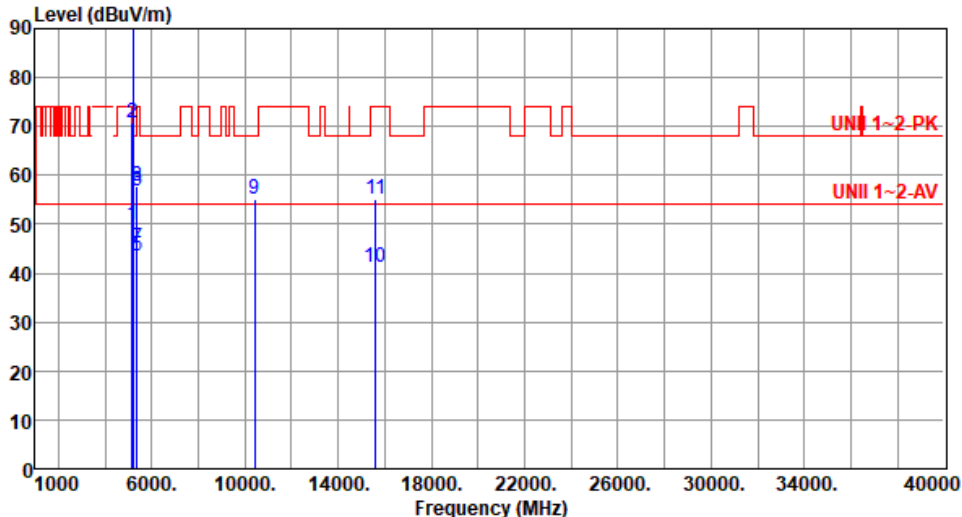
Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.80	54.00	-4.20	49.15	0.65	Average	100	218
2	5150.00	70.62	74.00	-3.38	69.97	0.65	Peak	100	218
3 *	5200.00	103.18			102.62	0.56	Average	100	218
4 *	5200.00	116.69			116.13	0.56	Peak	100	218
5	5350.00	43.41	54.00	-10.59	43.27	0.14	Average	100	218
6	5350.00	56.86	74.00	-17.14	56.72	0.14	Peak	100	218
7	5360.00	45.26	54.00	-8.74	45.11	0.15	Average	100	218
8	5360.00	57.68	74.00	-16.32	57.53	0.15	Peak	100	218
9	10400.00	55.11	68.20	-13.09	46.65	8.46	Peak	100	39
10	15600.00	41.18	54.00	-12.82	36.51	4.67	Average	100	16
11	15600.00	55.12	74.00	-18.88	50.45	4.67	Peak	100	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

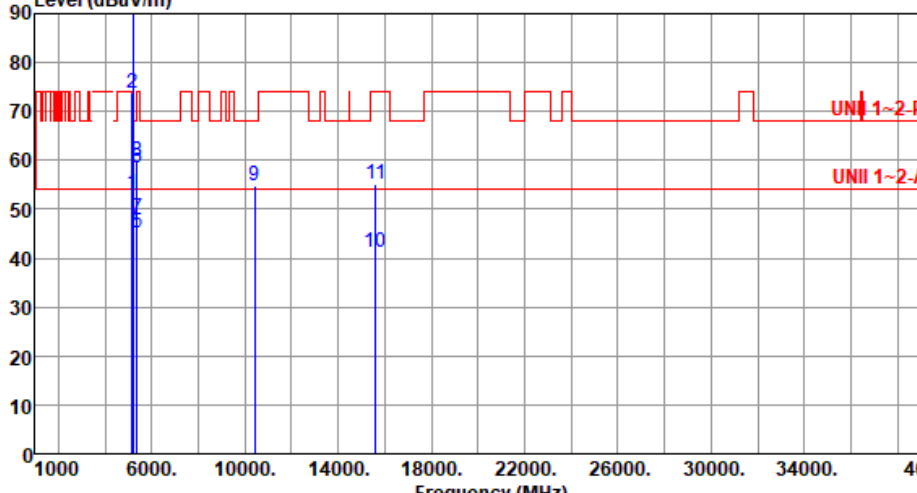

Modulation	be EHT20	Test Freq. (MHz)	5200																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>53.29</td><td>54.00</td><td>-0.71</td><td>52.64</td><td>0.65</td><td>Average</td><td>218</td><td>109</td></tr><tr><td>2</td><td>5150.00</td><td>73.87</td><td>74.00</td><td>-0.13</td><td>73.22</td><td>0.65</td><td>Peak</td><td>218</td><td>109</td></tr><tr><td>3 *</td><td>5200.00</td><td>108.94</td><td></td><td></td><td>108.38</td><td>0.56</td><td>Average</td><td>218</td><td>109</td></tr><tr><td>4 *</td><td>5200.00</td><td>122.00</td><td></td><td></td><td>121.44</td><td>0.56</td><td>Peak</td><td>218</td><td>109</td></tr><tr><td>5</td><td>5350.00</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>45.18</td><td>0.14</td><td>Average</td><td>218</td><td>109</td></tr><tr><td>6</td><td>5350.00</td><td>58.30</td><td>74.00</td><td>-15.70</td><td>58.16</td><td>0.14</td><td>Peak</td><td>218</td><td>109</td></tr><tr><td>7</td><td>5360.00</td><td>48.02</td><td>54.00</td><td>-5.98</td><td>47.87</td><td>0.15</td><td>Average</td><td>202</td><td>172</td></tr><tr><td>8</td><td>5360.00</td><td>59.87</td><td>74.00</td><td>-14.13</td><td>59.72</td><td>0.15</td><td>Peak</td><td>202</td><td>172</td></tr><tr><td>9</td><td>10400.00</td><td>54.88</td><td>68.20</td><td>-13.32</td><td>46.42</td><td>8.46</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>10</td><td>15600.00</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>36.46</td><td>4.67</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>11</td><td>15600.00</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>50.38</td><td>4.67</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.29	54.00	-0.71	52.64	0.65	Average	218	109	2	5150.00	73.87	74.00	-0.13	73.22	0.65	Peak	218	109	3 *	5200.00	108.94			108.38	0.56	Average	218	109	4 *	5200.00	122.00			121.44	0.56	Peak	218	109	5	5350.00	45.32	54.00	-8.68	45.18	0.14	Average	218	109	6	5350.00	58.30	74.00	-15.70	58.16	0.14	Peak	218	109	7	5360.00	48.02	54.00	-5.98	47.87	0.15	Average	202	172	8	5360.00	59.87	74.00	-14.13	59.72	0.15	Peak	202	172	9	10400.00	54.88	68.20	-13.32	46.42	8.46	Peak	100	23	10	15600.00	41.13	54.00	-12.87	36.46	4.67	Average	100	29	11	15600.00	55.05	74.00	-18.95	50.38	4.67	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5150.00	53.29	54.00	-0.71	52.64	0.65	Average	218	109																																																																																																																		
2	5150.00	73.87	74.00	-0.13	73.22	0.65	Peak	218	109																																																																																																																		
3 *	5200.00	108.94			108.38	0.56	Average	218	109																																																																																																																		
4 *	5200.00	122.00			121.44	0.56	Peak	218	109																																																																																																																		
5	5350.00	45.32	54.00	-8.68	45.18	0.14	Average	218	109																																																																																																																		
6	5350.00	58.30	74.00	-15.70	58.16	0.14	Peak	218	109																																																																																																																		
7	5360.00	48.02	54.00	-5.98	47.87	0.15	Average	202	172																																																																																																																		
8	5360.00	59.87	74.00	-14.13	59.72	0.15	Peak	202	172																																																																																																																		
9	10400.00	54.88	68.20	-13.32	46.42	8.46	Peak	100	23																																																																																																																		
10	15600.00	41.13	54.00	-12.87	36.46	4.67	Average	100	29																																																																																																																		
11	15600.00	55.05	74.00	-18.95	50.38	4.67	Peak	100	29																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

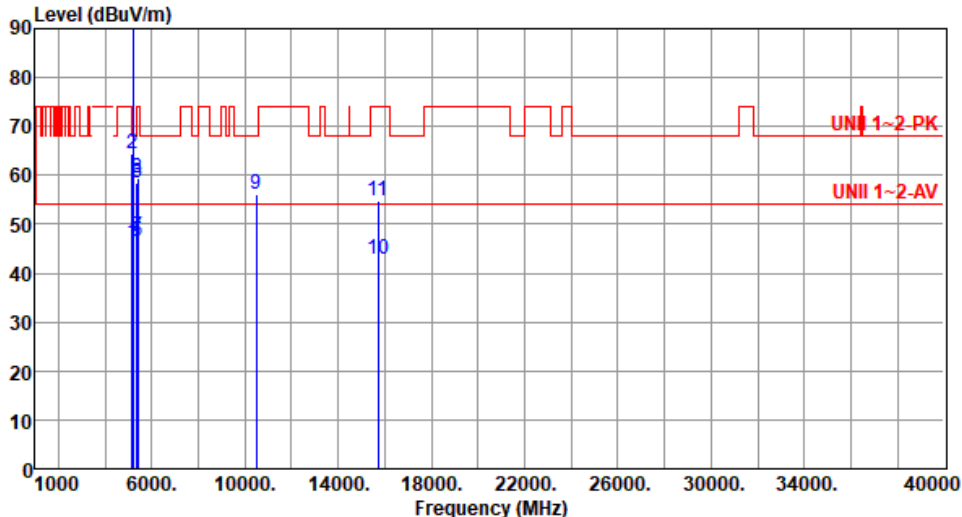

Modulation	be EHT20	Test Freq. (MHz)	5240						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.25	54.00	-7.75	45.60	0.65	Average	155	114
2	5150.00	64.26	74.00	-9.74	63.61	0.65	Peak	155	114
3 *	5240.00	106.30			105.96	0.34	Average	155	114
4 *	5240.00	119.99			119.65	0.34	Peak	155	114
5	5350.00	46.36	54.00	-7.64	46.22	0.14	Average	155	114
6	5350.00	58.48	74.00	-15.52	58.34	0.14	Peak	155	114
7	5400.00	47.50	54.00	-6.50	47.33	0.17	Average	155	114
8	5400.00	59.37	74.00	-14.63	59.20	0.17	Peak	155	114
9	10480.00	56.12	68.20	-12.08	47.62	8.50	Peak	100	126
10	15720.00	42.73	54.00	-11.27	37.78	4.95	Average	100	178
11	15720.00	54.77	74.00	-19.23	49.82	4.95	Peak	100	178

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5240						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.78	54.00	-6.22	47.13	0.65	Average	158	258
2	5150.00	66.36	74.00	-7.64	65.71	0.65	Peak	158	258
3 *	5240.00	109.77			109.43	0.34	Average	158	258
4 *	5240.00	122.67			122.33	0.34	Peak	158	258
5	5350.00	46.61	54.00	-7.39	46.47	0.14	Average	158	258
6	5350.00	63.95	74.00	-10.05	63.81	0.14	Peak	158	258
7	5400.00	47.86	54.00	-6.14	47.69	0.17	Average	139	5
8	5400.00	60.04	74.00	-13.96	59.87	0.17	Peak	139	5
9	10480.00	55.93	68.20	-12.27	47.43	8.50	Peak	100	248
10	15720.00	42.63	54.00	-11.37	37.68	4.95	Average	100	251
11	15720.00	54.81	74.00	-19.19	49.86	4.95	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.88</td><td>54.00</td><td>-10.12</td><td>43.23</td><td>0.65</td><td>Average</td><td>261</td><td>260</td></tr><tr><td>2</td><td>5150.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>55.68</td><td>0.65</td><td>Peak</td><td>261</td><td>260</td></tr><tr><td>3 *</td><td>5260.00</td><td>104.81</td><td></td><td></td><td>104.54</td><td>0.27</td><td>Average</td><td>261</td><td>260</td></tr><tr><td>4 *</td><td>5260.00</td><td>117.80</td><td></td><td></td><td>117.53</td><td>0.27</td><td>Peak</td><td>261</td><td>260</td></tr><tr><td>5</td><td>5350.00</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>43.91</td><td>0.14</td><td>Average</td><td>261</td><td>260</td></tr><tr><td>6</td><td>5350.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>55.94</td><td>0.14</td><td>Peak</td><td>261</td><td>260</td></tr><tr><td>7</td><td>10520.00</td><td>54.62</td><td>68.20</td><td>-13.58</td><td>46.24</td><td>8.38</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>8</td><td>15780.00</td><td>40.91</td><td>54.00</td><td>-13.09</td><td>36.17</td><td>4.74</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>9</td><td>15780.00</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>50.14</td><td>4.74</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.88	54.00	-10.12	43.23	0.65	Average	261	260	2	5150.00	56.33	74.00	-17.67	55.68	0.65	Peak	261	260	3 *	5260.00	104.81			104.54	0.27	Average	261	260	4 *	5260.00	117.80			117.53	0.27	Peak	261	260	5	5350.00	44.05	54.00	-9.95	43.91	0.14	Average	261	260	6	5350.00	56.08	74.00	-17.92	55.94	0.14	Peak	261	260	7	10520.00	54.62	68.20	-13.58	46.24	8.38	Peak	100	68	8	15780.00	40.91	54.00	-13.09	36.17	4.74	Average	100	39	9	15780.00	54.88	74.00	-19.12	50.14	4.74	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.88	54.00	-10.12	43.23	0.65	Average	261	260																																																																																														
2	5150.00	56.33	74.00	-17.67	55.68	0.65	Peak	261	260																																																																																														
3 *	5260.00	104.81			104.54	0.27	Average	261	260																																																																																														
4 *	5260.00	117.80			117.53	0.27	Peak	261	260																																																																																														
5	5350.00	44.05	54.00	-9.95	43.91	0.14	Average	261	260																																																																																														
6	5350.00	56.08	74.00	-17.92	55.94	0.14	Peak	261	260																																																																																														
7	10520.00	54.62	68.20	-13.58	46.24	8.38	Peak	100	68																																																																																														
8	15780.00	40.91	54.00	-13.09	36.17	4.74	Average	100	39																																																																																														
9	15780.00	54.88	74.00	-19.12	50.14	4.74	Peak	100	39																																																																																														



Modulation	be EHT20	Test Freq. (MHz)	5300																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>5300.00</td><td>100.03</td><td></td><td></td><td>99.82</td><td>0.21</td><td>Average</td><td>108</td><td>211</td></tr><tr><td>2 *</td><td>5300.00</td><td>113.42</td><td></td><td></td><td>113.21</td><td>0.21</td><td>Peak</td><td>108</td><td>211</td></tr><tr><td>3</td><td>5350.00</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>44.13</td><td>0.14</td><td>Average</td><td>108</td><td>211</td></tr><tr><td>4</td><td>5350.00</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>57.62</td><td>0.14</td><td>Peak</td><td>108</td><td>211</td></tr><tr><td>5</td><td>10600.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>34.16</td><td>8.33</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>6</td><td>10600.00</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>47.27</td><td>8.33</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>7</td><td>15900.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>37.47</td><td>4.72</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>15900.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>50.41</td><td>4.72</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	5300.00	100.03			99.82	0.21	Average	108	211	2 *	5300.00	113.42			113.21	0.21	Peak	108	211	3	5350.00	44.27	54.00	-9.73	44.13	0.14	Average	108	211	4	5350.00	57.76	74.00	-16.24	57.62	0.14	Peak	108	211	5	10600.00	42.49	54.00	-11.51	34.16	8.33	Average	100	175	6	10600.00	55.60	74.00	-18.40	47.27	8.33	Peak	100	175	7	15900.00	42.19	54.00	-11.81	37.47	4.72	Average	100	208	8	15900.00	55.13	74.00	-18.87	50.41	4.72	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	5300.00	100.03			99.82	0.21	Average	108	211																																																																																				
2 *	5300.00	113.42			113.21	0.21	Peak	108	211																																																																																				
3	5350.00	44.27	54.00	-9.73	44.13	0.14	Average	108	211																																																																																				
4	5350.00	57.76	74.00	-16.24	57.62	0.14	Peak	108	211																																																																																				
5	10600.00	42.49	54.00	-11.51	34.16	8.33	Average	100	175																																																																																				
6	10600.00	55.60	74.00	-18.40	47.27	8.33	Peak	100	175																																																																																				
7	15900.00	42.19	54.00	-11.81	37.47	4.72	Average	100	208																																																																																				
8	15900.00	55.13	74.00	-18.87	50.41	4.72	Peak	100	208																																																																																				




Modulation	be EHT20	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5300.00</td><td>104.35</td><td></td><td></td><td>104.14</td><td>0.21</td><td>Average</td><td>268</td><td>258</td></tr><tr><td>2 *</td><td>5300.00</td><td>118.64</td><td></td><td></td><td>118.43</td><td>0.21</td><td>Peak</td><td>268</td><td>258</td></tr><tr><td>3</td><td>5350.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>45.24</td><td>0.14</td><td>Average</td><td>268</td><td>258</td></tr><tr><td>4</td><td>5350.00</td><td>59.19</td><td>74.00</td><td>-14.81</td><td>59.05</td><td>0.14</td><td>Peak</td><td>268</td><td>258</td></tr><tr><td>5</td><td>10600.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>34.27</td><td>8.33</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>10600.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>47.39</td><td>8.33</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>7</td><td>15900.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>37.52</td><td>4.72</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>8</td><td>15900.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>50.67</td><td>4.72</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	5300.00	104.35			104.14	0.21	Average	268	258	2 *	5300.00	118.64			118.43	0.21	Peak	268	258	3	5350.00	45.38	54.00	-8.62	45.24	0.14	Average	268	258	4	5350.00	59.19	74.00	-14.81	59.05	0.14	Peak	268	258	5	10600.00	42.60	54.00	-11.40	34.27	8.33	Average	100	118	6	10600.00	55.72	74.00	-18.28	47.39	8.33	Peak	100	118	7	15900.00	42.24	54.00	-11.76	37.52	4.72	Average	100	178	8	15900.00	55.39	74.00	-18.61	50.67	4.72	Peak	100	178
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	5300.00	104.35			104.14	0.21	Average	268	258																																																																																																								
2 *	5300.00	118.64			118.43	0.21	Peak	268	258																																																																																																								
3	5350.00	45.38	54.00	-8.62	45.24	0.14	Average	268	258																																																																																																								
4	5350.00	59.19	74.00	-14.81	59.05	0.14	Peak	268	258																																																																																																								
5	10600.00	42.60	54.00	-11.40	34.27	8.33	Average	100	118																																																																																																								
6	10600.00	55.72	74.00	-18.28	47.39	8.33	Peak	100	118																																																																																																								
7	15900.00	42.24	54.00	-11.76	37.52	4.72	Average	100	178																																																																																																								
8	15900.00	55.39	74.00	-18.61	50.67	4.72	Peak	100	178																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	5320						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5320.00	100.21			100.02	0.19	Average	112	215
2 *	5320.00	114.16			113.97	0.19	Peak	112	215
3	5350.00	44.75	54.00	-9.25	44.61	0.14	Average	112	215
4	5350.00	58.62	74.00	-15.38	58.48	0.14	Peak	112	215
5	10640.00	41.68	54.00	-12.32	33.29	8.39	Average	100	39
6	10640.00	54.65	74.00	-19.35	46.26	8.39	Peak	100	39
7	15960.00	41.88	54.00	-12.12	37.25	4.63	Average	100	22
8	15960.00	54.92	74.00	-19.08	50.29	4.63	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

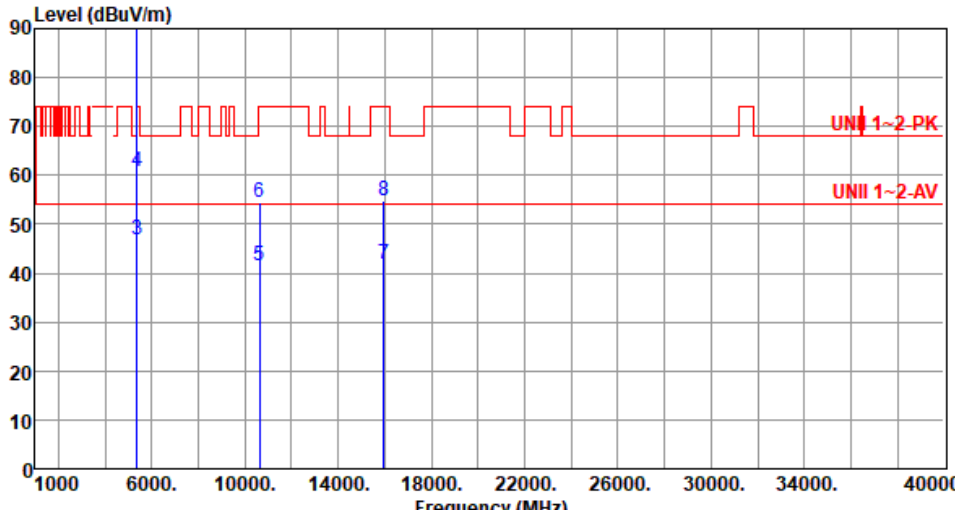

Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																																												
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>102.45</td><td></td><td></td><td>102.26</td><td>0.19</td><td>Average</td><td>202</td><td>278</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>116.29</td><td></td><td></td><td>116.10</td><td>0.19</td><td>Peak</td><td>202</td><td>278</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>46.82</td><td>54.00</td><td>-7.18</td><td>46.68</td><td>0.14</td><td>Average</td><td>202</td><td>278</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>60.74</td><td>74.00</td><td>-13.26</td><td>60.60</td><td>0.14</td><td>Peak</td><td>202</td><td>278</td></tr><tr><td>5</td><td></td><td>10640.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>33.15</td><td>8.39</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>46.10</td><td>8.39</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>7</td><td></td><td>15960.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>37.18</td><td>4.63</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>50.23</td><td>4.63</td><td>Peak</td><td>100</td><td>43</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level			reading			High	Table				dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	5320.00	102.45			102.26	0.19	Average	202	278	2	*	5320.00	116.29			116.10	0.19	Peak	202	278	3		5350.00	46.82	54.00	-7.18	46.68	0.14	Average	202	278	4		5350.00	60.74	74.00	-13.26	60.60	0.14	Peak	202	278	5		10640.00	41.54	54.00	-12.46	33.15	8.39	Average	100	26	6		10640.00	54.49	74.00	-19.51	46.10	8.39	Peak	100	26	7		15960.00	41.81	54.00	-12.19	37.18	4.63	Average	100	43	8		15960.00	54.86	74.00	-19.14	50.23	4.63	Peak	100	43
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level			reading			High	Table																																																																																																																		
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	*	5320.00	102.45			102.26	0.19	Average	202	278																																																																																																																		
2	*	5320.00	116.29			116.10	0.19	Peak	202	278																																																																																																																		
3		5350.00	46.82	54.00	-7.18	46.68	0.14	Average	202	278																																																																																																																		
4		5350.00	60.74	74.00	-13.26	60.60	0.14	Peak	202	278																																																																																																																		
5		10640.00	41.54	54.00	-12.46	33.15	8.39	Average	100	26																																																																																																																		
6		10640.00	54.49	74.00	-19.51	46.10	8.39	Peak	100	26																																																																																																																		
7		15960.00	41.81	54.00	-12.19	37.18	4.63	Average	100	43																																																																																																																		
8		15960.00	54.86	74.00	-19.14	50.23	4.63	Peak	100	43																																																																																																																		



Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.93</td><td>54.00</td><td>-7.07</td><td>46.43</td><td>0.50</td><td>Average</td><td>238</td><td>135</td></tr><tr><td>2</td><td>5460.00</td><td>61.24</td><td>74.00</td><td>-12.76</td><td>60.74</td><td>0.50</td><td>Peak</td><td>238</td><td>135</td></tr><tr><td>3</td><td>5470.00</td><td>61.78</td><td>68.20</td><td>-6.42</td><td>61.26</td><td>0.52</td><td>Peak</td><td>238</td><td>135</td></tr><tr><td>4 *</td><td>5500.00</td><td>101.17</td><td></td><td></td><td>100.58</td><td>0.59</td><td>Average</td><td>238</td><td>135</td></tr><tr><td>5 *</td><td>5500.00</td><td>114.83</td><td></td><td></td><td>114.24</td><td>0.59</td><td>Peak</td><td>238</td><td>135</td></tr><tr><td>6</td><td>11000.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>33.85</td><td>8.70</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>7</td><td>11000.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>45.59</td><td>8.70</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>8</td><td>16500.00</td><td>56.78</td><td>68.20</td><td>-11.42</td><td>50.52</td><td>6.26</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.93	54.00	-7.07	46.43	0.50	Average	238	135	2	5460.00	61.24	74.00	-12.76	60.74	0.50	Peak	238	135	3	5470.00	61.78	68.20	-6.42	61.26	0.52	Peak	238	135	4 *	5500.00	101.17			100.58	0.59	Average	238	135	5 *	5500.00	114.83			114.24	0.59	Peak	238	135	6	11000.00	42.55	54.00	-11.45	33.85	8.70	Average	100	29	7	11000.00	54.29	74.00	-19.71	45.59	8.70	Peak	100	29	8	16500.00	56.78	68.20	-11.42	50.52	6.26	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	46.93	54.00	-7.07	46.43	0.50	Average	238	135																																																																																				
2	5460.00	61.24	74.00	-12.76	60.74	0.50	Peak	238	135																																																																																				
3	5470.00	61.78	68.20	-6.42	61.26	0.52	Peak	238	135																																																																																				
4 *	5500.00	101.17			100.58	0.59	Average	238	135																																																																																				
5 *	5500.00	114.83			114.24	0.59	Peak	238	135																																																																																				
6	11000.00	42.55	54.00	-11.45	33.85	8.70	Average	100	29																																																																																				
7	11000.00	54.29	74.00	-19.71	45.59	8.70	Peak	100	29																																																																																				
8	16500.00	56.78	68.20	-11.42	50.52	6.26	Peak	100	21																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>48.41</td><td>54.00</td><td>-5.59</td><td>47.91</td><td>0.50</td><td>Average</td><td>224</td><td>264</td></tr><tr><td>2</td><td>5460.00</td><td>63.86</td><td>74.00</td><td>-10.14</td><td>63.36</td><td>0.50</td><td>Peak</td><td>224</td><td>264</td></tr><tr><td>3</td><td>5470.00</td><td>64.13</td><td>68.20</td><td>-4.07</td><td>63.61</td><td>0.52</td><td>Peak</td><td>224</td><td>264</td></tr><tr><td>4 *</td><td>5500.00</td><td>104.21</td><td></td><td></td><td>103.62</td><td>0.59</td><td>Average</td><td>224</td><td>264</td></tr><tr><td>5 *</td><td>5500.00</td><td>118.25</td><td></td><td></td><td>117.66</td><td>0.59</td><td>Peak</td><td>224</td><td>264</td></tr><tr><td>6</td><td>11000.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>33.68</td><td>8.70</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>7</td><td>11000.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>45.46</td><td>8.70</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>8</td><td>16500.00</td><td>56.79</td><td>68.20</td><td>-11.41</td><td>50.53</td><td>6.26</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5460.00	48.41	54.00	-5.59	47.91	0.50	Average	224	264	2	5460.00	63.86	74.00	-10.14	63.36	0.50	Peak	224	264	3	5470.00	64.13	68.20	-4.07	63.61	0.52	Peak	224	264	4 *	5500.00	104.21			103.62	0.59	Average	224	264	5 *	5500.00	118.25			117.66	0.59	Peak	224	264	6	11000.00	42.38	54.00	-11.62	33.68	8.70	Average	100	31	7	11000.00	54.16	74.00	-19.84	45.46	8.70	Peak	100	31	8	16500.00	56.79	68.20	-11.41	50.53	6.26	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	5460.00	48.41	54.00	-5.59	47.91	0.50	Average	224	264																																																																																																								
2	5460.00	63.86	74.00	-10.14	63.36	0.50	Peak	224	264																																																																																																								
3	5470.00	64.13	68.20	-4.07	63.61	0.52	Peak	224	264																																																																																																								
4 *	5500.00	104.21			103.62	0.59	Average	224	264																																																																																																								
5 *	5500.00	118.25			117.66	0.59	Peak	224	264																																																																																																								
6	11000.00	42.38	54.00	-11.62	33.68	8.70	Average	100	31																																																																																																								
7	11000.00	54.16	74.00	-19.84	45.46	8.70	Peak	100	31																																																																																																								
8	16500.00	56.79	68.20	-11.41	50.53	6.26	Peak	100	22																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	5580																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>42.68</td><td>0.50</td><td>Average</td><td>231</td><td>138</td></tr><tr><td>2</td><td>5460.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>54.16</td><td>0.50</td><td>Peak</td><td>231</td><td>138</td></tr><tr><td>3</td><td>5470.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>54.33</td><td>0.52</td><td>Peak</td><td>231</td><td>138</td></tr><tr><td>4 *</td><td>5580.00</td><td>100.69</td><td></td><td></td><td>100.16</td><td>0.53</td><td>Average</td><td>231</td><td>138</td></tr><tr><td>5 *</td><td>5580.00</td><td>113.75</td><td></td><td></td><td>113.22</td><td>0.53</td><td>Peak</td><td>231</td><td>138</td></tr><tr><td>6</td><td>5725.00</td><td>55.52</td><td>68.20</td><td>-12.68</td><td>54.57</td><td>0.95</td><td>Peak</td><td>231</td><td>138</td></tr><tr><td>7</td><td>11160.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>34.24</td><td>8.27</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>8</td><td>11160.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>47.41</td><td>8.27</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>9</td><td>16740.00</td><td>57.78</td><td>68.20</td><td>-10.42</td><td>51.47</td><td>6.31</td><td>Peak</td><td>100</td><td>154</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.18	54.00	-10.82	42.68	0.50	Average	231	138	2	5460.00	54.66	74.00	-19.34	54.16	0.50	Peak	231	138	3	5470.00	54.85	68.20	-13.35	54.33	0.52	Peak	231	138	4 *	5580.00	100.69			100.16	0.53	Average	231	138	5 *	5580.00	113.75			113.22	0.53	Peak	231	138	6	5725.00	55.52	68.20	-12.68	54.57	0.95	Peak	231	138	7	11160.00	42.51	54.00	-11.49	34.24	8.27	Average	100	154	8	11160.00	55.68	74.00	-18.32	47.41	8.27	Peak	100	154	9	16740.00	57.78	68.20	-10.42	51.47	6.31	Peak	100	154
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.18	54.00	-10.82	42.68	0.50	Average	231	138																																																																																														
2	5460.00	54.66	74.00	-19.34	54.16	0.50	Peak	231	138																																																																																														
3	5470.00	54.85	68.20	-13.35	54.33	0.52	Peak	231	138																																																																																														
4 *	5580.00	100.69			100.16	0.53	Average	231	138																																																																																														
5 *	5580.00	113.75			113.22	0.53	Peak	231	138																																																																																														
6	5725.00	55.52	68.20	-12.68	54.57	0.95	Peak	231	138																																																																																														
7	11160.00	42.51	54.00	-11.49	34.24	8.27	Average	100	154																																																																																														
8	11160.00	55.68	74.00	-18.32	47.41	8.27	Peak	100	154																																																																																														
9	16740.00	57.78	68.20	-10.42	51.47	6.31	Peak	100	154																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT20	Test Freq. (MHz)	5580																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.75</td><td>54.00</td><td>-10.25</td><td>43.25</td><td>0.50</td><td>Average</td><td>242</td><td>260</td></tr><tr><td>2</td><td>5460.00</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>55.38</td><td>0.50</td><td>Peak</td><td>242</td><td>260</td></tr><tr><td>3</td><td>5470.00</td><td>56.21</td><td>68.20</td><td>-11.99</td><td>55.69</td><td>0.52</td><td>Peak</td><td>242</td><td>260</td></tr><tr><td>4 *</td><td>5580.00</td><td>104.87</td><td></td><td></td><td>104.34</td><td>0.53</td><td>Average</td><td>242</td><td>260</td></tr><tr><td>5 *</td><td>5580.00</td><td>118.71</td><td></td><td></td><td>118.18</td><td>0.53</td><td>Peak</td><td>242</td><td>260</td></tr><tr><td>6</td><td>5725.00</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>56.79</td><td>0.95</td><td>Peak</td><td>242</td><td>260</td></tr><tr><td>7</td><td>11160.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>34.17</td><td>8.27</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>8</td><td>11160.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>47.34</td><td>8.27</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>9</td><td>16740.00</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>50.27</td><td>6.31</td><td>Peak</td><td>100</td><td>204</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.75	54.00	-10.25	43.25	0.50	Average	242	260	2	5460.00	55.88	74.00	-18.12	55.38	0.50	Peak	242	260	3	5470.00	56.21	68.20	-11.99	55.69	0.52	Peak	242	260	4 *	5580.00	104.87			104.34	0.53	Average	242	260	5 *	5580.00	118.71			118.18	0.53	Peak	242	260	6	5725.00	57.74	68.20	-10.46	56.79	0.95	Peak	242	260	7	11160.00	42.44	54.00	-11.56	34.17	8.27	Average	100	177	8	11160.00	55.61	74.00	-18.39	47.34	8.27	Peak	100	177	9	16740.00	56.58	68.20	-11.62	50.27	6.31	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.75	54.00	-10.25	43.25	0.50	Average	242	260																																																																																														
2	5460.00	55.88	74.00	-18.12	55.38	0.50	Peak	242	260																																																																																														
3	5470.00	56.21	68.20	-11.99	55.69	0.52	Peak	242	260																																																																																														
4 *	5580.00	104.87			104.34	0.53	Average	242	260																																																																																														
5 *	5580.00	118.71			118.18	0.53	Peak	242	260																																																																																														
6	5725.00	57.74	68.20	-10.46	56.79	0.95	Peak	242	260																																																																																														
7	11160.00	42.44	54.00	-11.56	34.17	8.27	Average	100	177																																																																																														
8	11160.00	55.61	74.00	-18.39	47.34	8.27	Peak	100	177																																																																																														
9	16740.00	56.58	68.20	-11.62	50.27	6.31	Peak	100	204																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBuV/m) </			