

Product Name: Smart Phone	Report No: FCC022023-00500RF1
Product Model: N50	Security Classification: Open
Version: V1.0	Total Page: 56

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Stone Tang	Randy Lv	Daniel Chen	
Stone Tang	Randy Lv	Daniel Chen	

RF TEST REPORT

FCC ID: 2AX4YN50

According to

47 CFR FCC Part 15, Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

Equipment : Smart Phone
Model No. : N50
Trademark : DOOGEE
Applicant : Shenzhen DOOGEE Hengtong Technology CO.,LTD
B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22,
Longhua New District, Shenzhen, China

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.
- Test date: 2023/02/20~2023/03/11

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street,
Pingshan District, Shenzhen, China

TEL: +86-0755-27087573

TABLE OF CONTENTS

	<u>Description</u>	<u>Page</u>
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA	9
4.1	ANTENNA REQUIREMENT:	9
4.2	CONDUCTED EMISSIONS	10
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	13
4.4	PEAK TRANSMIT POWER	25
4.5	POWER SPECTRAL DENSITY	27
4.6	BAND EDGE	39
4.7	RADIATED EMISSION	49
4.8	FREQUENCY STABILITY	56

History of this test report

Original Report Issue Date: 2023.03.13

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
Peak Transmit Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (9KHz~30MHz)	±2.56dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (Above 1GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

2 General Information

2.1 General Description of EUT

EUT Name : Smart Phone
 Model No. : N50
 DIFF. : N/A
 Power supply : DC 9V from adapter, DC 3.7V from battery

Radio Technology : 5G WIFI

Operation Frequency : 802.11a/n(HT20)/ac(HT20): 5180~5240MHz; 5745~5825MHz
 802.11n(HT40)/ac(HT40): 5190~5230MHz; 5755~5795MHz
 802.11ac(HT80): 5210MHz, 5775MHz

Channel separation : 20MHz for 802.11a/ 802.11ac20/ 802.11n(HT20)
 40MHz for 802.11ac40/ 802.11n(HT40)
 80MHz for 802.11ac80

Modulation technology: : IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna Type : Internal Antenna, max gain 1.0dBi
 Antenna information is provided by applicant.

Software version : DOOGEE-N50-EEA-Android13.0-20230216
 Hardware version : SC6007_MB_V1.1.0

Intend use environment : Residential, commercial and light industrial environment

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
 EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street, Pingshan District, Shenzhen, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Designation Number:	CN1309
Test Firm Registration Number:	825524
Telephone:	+86-0755-27087573

2.4 Description of Support Units

Accessories : /
 Manufacturer : /
 Model : /
 Ratings : /

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

3 Test Instruments list


No.	Equipment	Manufacturer	Type No.	Serial No.	Cal. date (yyyy/mm/dd)	Cal. Due date (yyyy/mm/dd)
1	EMI Receiver	Rohde&Schwarz	ESCI	100718	2022/11/09	2023/11/10
2	AMN	Rohde&Schwarz	ENV216	100075	2022/11/09	2023/11/10
3	AMN	Schwarzbeck	NSLK8127	#829	2022/11/09	2023/11/10
4	ECSI RF IN RF Cable	Rohde&Schwarz	RP-X1	\	2022/11/17	2023/11/16
5	ECSI RF IN RF Cable	Rohde&Schwarz	Sapre sm	\	2022/11/09	2023/11/10
6	EMI Receiver	Rohde&Schwarz	ESR7	102013	2022/11/09	2023/11/10
7	Spectrum analyzer	Rohde&Schwarz	FSV30	103741	2022/11/09	2023/11/10
8	Spectrum analyzer	KEYSIGHT	N9010A	MY51440158	2022/11/09	2023/11/10
9	Integral Antenna	Schwarzbeck	VULB 9163	9163-868	2022/12/25	2023/12/24
10	Integral Antenna	Schwarzbeck	BBHA 9120D	BBHA 9120D 1201	2022/11/09	2023/11/10
11	Integral Antenna	Schwarzbeck	BBHA 9170	9170#685	2022/11/06	2023/11/10
12	Preamplifier	CD Systems Inc	PAP-03036- 30	85060000	2022/11/09	2023/11/10
13	Preamplifier	Schwarzbeck	BBV9721	9721-019	2022/11/09	2023/11/10
14	Preamplifier	emci	EMC012645 SE	980417	2022/11/09	2023/11/10
15	ECSI RF IN RF Cable	Rohde&Schwarz	AP-X1	\	2022/11/09	2023/11/10
16	Spectrum Analyzer	Agilent	N9010A	MY52221119	2022/11/09	2023/11/10
17	Power Collection Unit	Tonscend	JS0806-2	188060134	2022/09/12	2023/09/11
18	Tonscend Test System	Tonscend	2.6.77.0518	NA	NA	NA
19	Power Sensor	Agilent	U2021XA	MY55410011	2022/09/12	2023/09/11
20	Power Sensor	Agilent	U2021XA	MY55410012	2022/09/12	2023/09/11
21	Power Sensor	Agilent	U2021XA	MY55410018	2022/09/12	2023/09/11
22	Power Sensor	Agilent	U2021XA	MY55410019	2022/09/12	2023/09/11
23	Temp&Humidity Recorder	Anymetre	JR900	NA	2022/11/03	2023/11/02
24	Temp&Humidity Chamber	ETOMA	NTH1100- 30A	16080628	2022/09/01	2023/08/30

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is internal antenna. The best case gain of the antenna is 1.0dBi for 5.15~5.25GHz, 5.725~5.85GHz	


4.2 Conducted Emissions

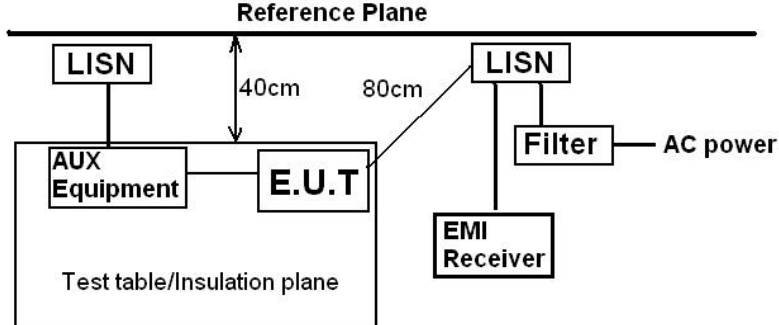Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.10 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

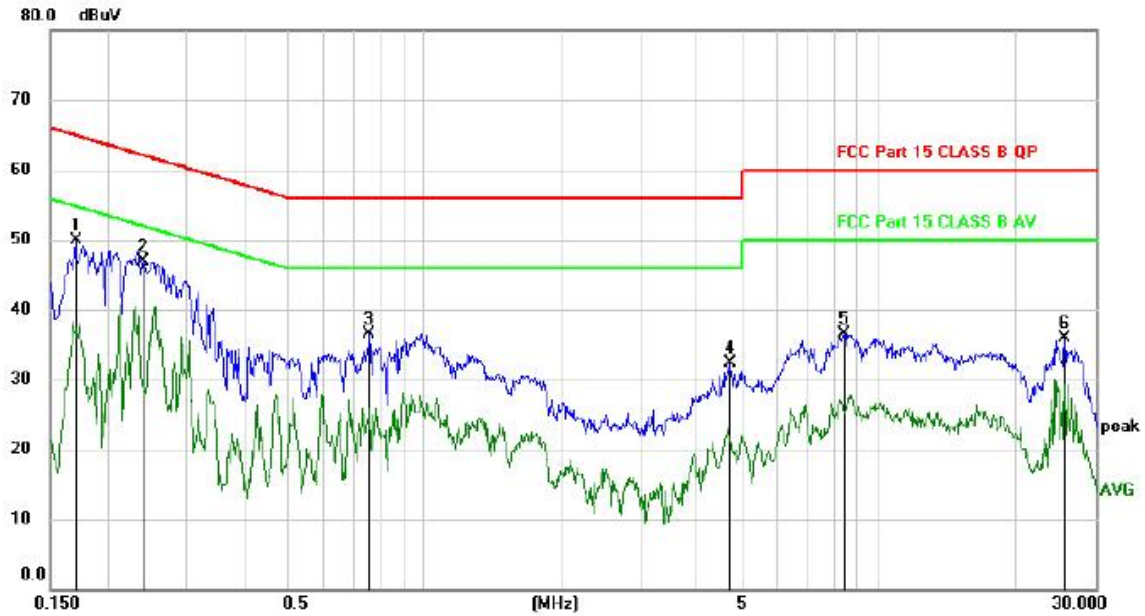


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1710	40.04	9.93	49.97	64.91	-14.94	peak	
2		0.2400	36.98	9.96	46.94	62.10	-15.16	peak	
3		0.7560	26.53	9.94	36.47	56.00	-19.53	peak	
4		4.7008	22.19	10.02	32.21	56.00	-23.79	peak	
5		8.3940	26.34	10.16	36.50	60.00	-23.50	peak	
6		25.6950	25.46	10.47	35.93	60.00	-24.07	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

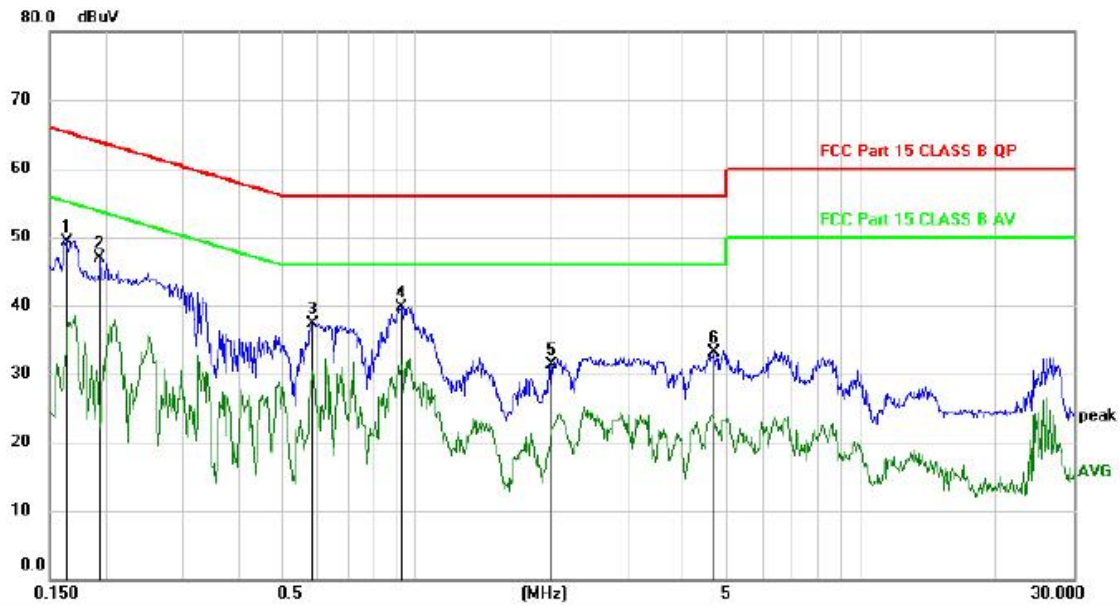Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1633	39.44	9.93	49.37	65.29	-15.92	peak	
2		0.1949	36.98	9.92	46.90	63.83	-16.93	peak	
3		0.5846	27.43	9.93	37.36	56.00	-18.64	peak	
4		0.9240	29.83	9.96	39.79	56.00	-16.21	peak	
5		2.0219	21.46	9.88	31.34	56.00	-24.66	peak	
6		4.6558	23.06	10.02	33.08	56.00	-22.92	peak	


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the A 5240MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

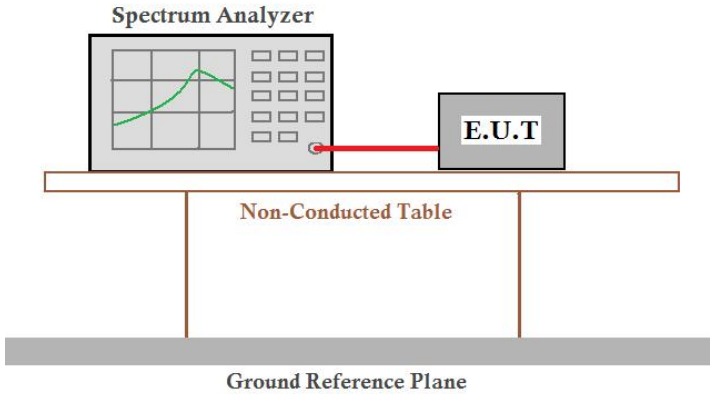Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a Non-Conducted Table, which is supported by two vertical legs. Below the table, a Ground Reference Plane is indicated by a thick grey bar.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:


TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.92	5170.00	5189.92	---	---
		5200	20.04	5189.88	5209.92	---	---
		5240	19.60	5230.12	5249.72	---	---
		5745	24.64	5731.72	5756.36	---	---
		5785	24.28	5771.76	5796.04	---	---
		5825	28.96	5810.24	5839.20	---	---
11N20SISO	Ant1	5180	20.20	5169.96	5190.16	---	---
		5200	20.16	5189.92	5210.08	---	---
		5240	20.16	5229.92	5250.08	---	---
		5745	28.08	5731.72	5759.80	---	---
		5785	28.84	5770.16	5799.00	---	---
		5825	30.24	5808.96	5839.20	---	---
11N40SISO	Ant1	5190	40.56	5169.92	5210.48	---	---
		5230	40.16	5209.92	5250.08	---	---
		5755	64.00	5720.36	5784.36	---	---
		5795	71.44	5759.96	5831.40	---	---
11AC20SISO	Ant1	5180	20.04	5169.96	5190.00	---	---
		5200	20.16	5189.88	5210.04	---	---
		5240	20.24	5229.84	5250.08	---	---
		5745	28.00	5730.24	5758.24	---	---
		5785	28.76	5769.68	5798.44	---	---
		5825	26.80	5812.04	5838.84	---	---
11AC40SISO	Ant1	5190	40.48	5169.92	5210.40	---	---
		5230	40.64	5209.76	5250.40	---	---
		5755	73.36	5715.56	5788.92	---	---
		5795	67.76	5757.00	5824.76	---	---
11AC80SISO	Ant1	5210	79.68	5170.16	5249.84	---	---
		5775	125.92	5711.96	5837.88	---	---

11A_Ant1_5180

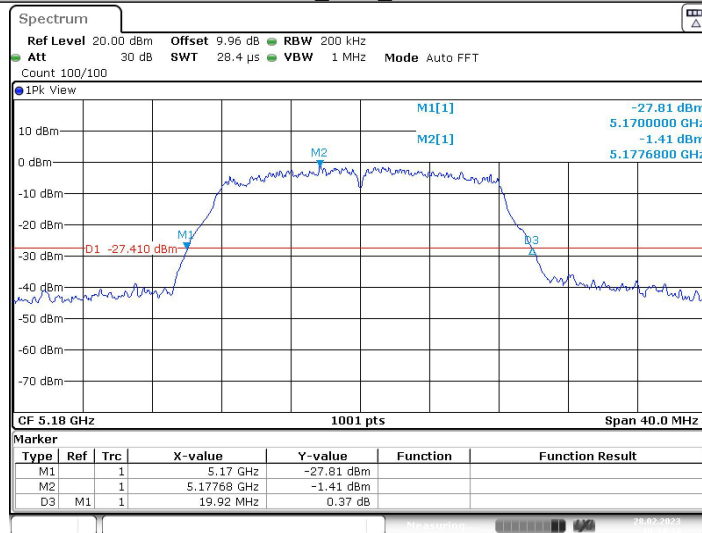


Date: 28.FEB.2023 10:34:34

11A_Ant1_5200

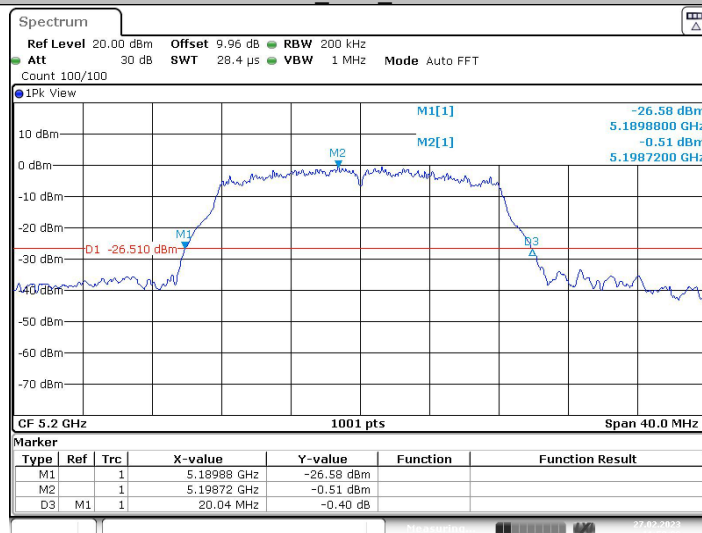


Date: 27.FEB.2023 11:50:00

11A_Ant1_5240

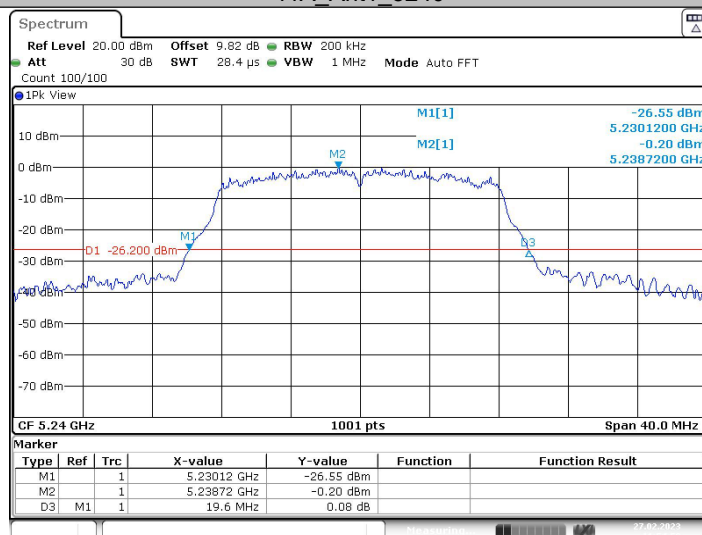


Date: 27.FEB.2023 11:54:58

11A_Ant1_5745

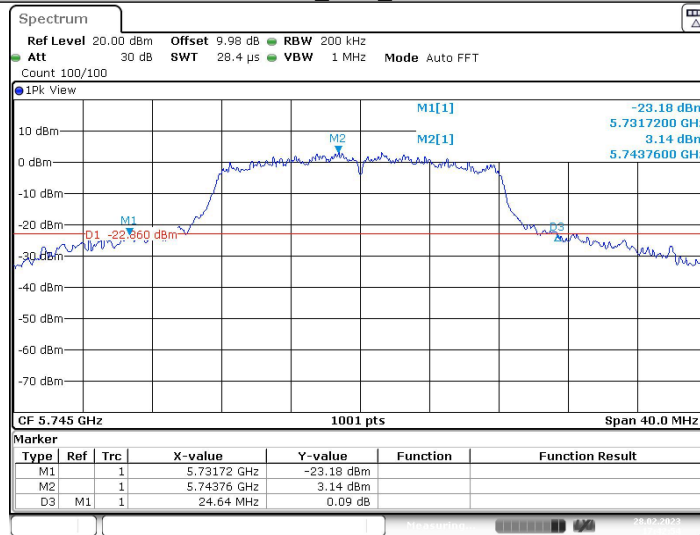


Date: 28.FEB.2023 17:42:53

11A_Ant1_5785

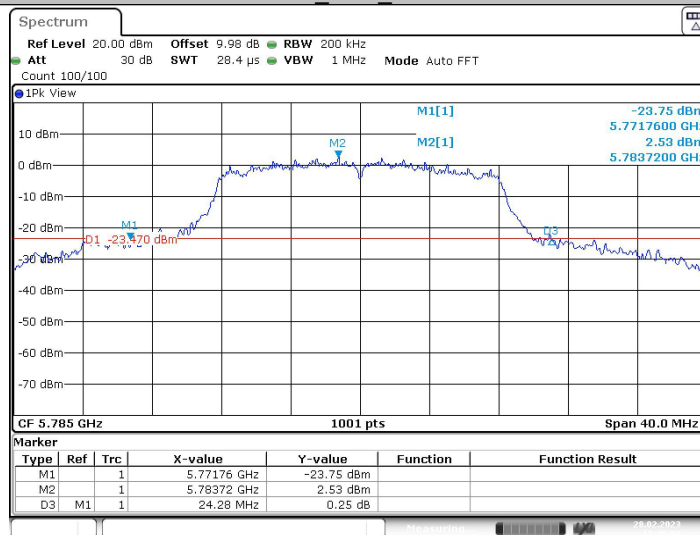


Date: 28.FEB.2023 17:45:58

11A_Ant1_5825

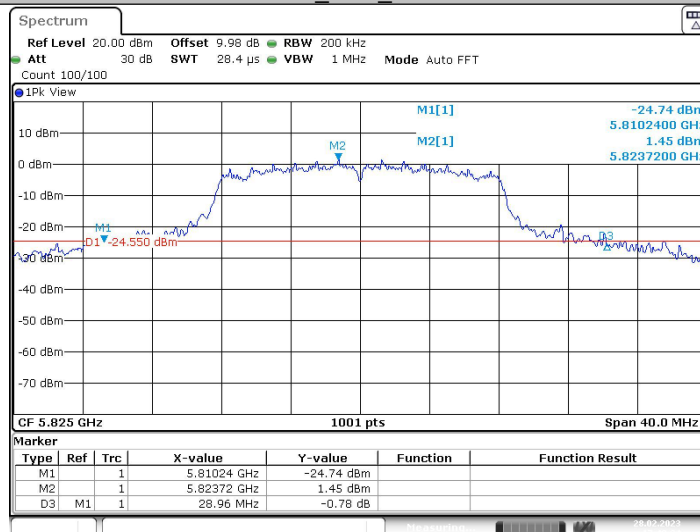


Date: 28.FEB.2023 17:49:25


11N20SISO_Ant1_5180

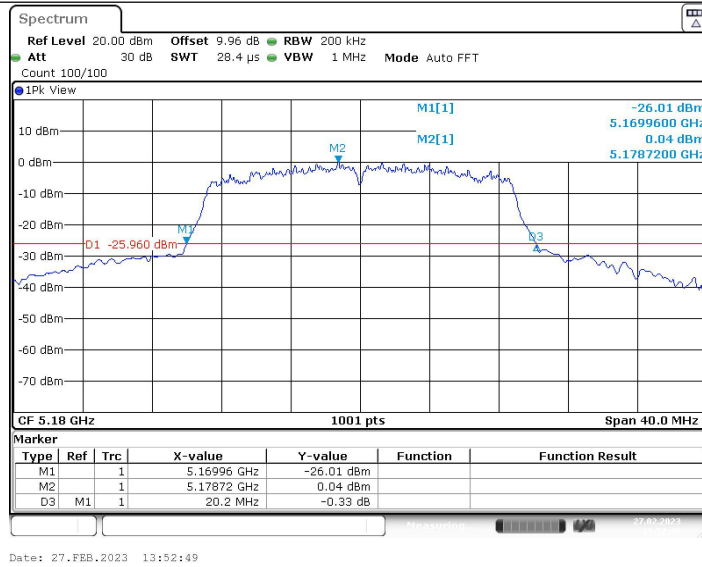

11N20SISO_Ant1_5200

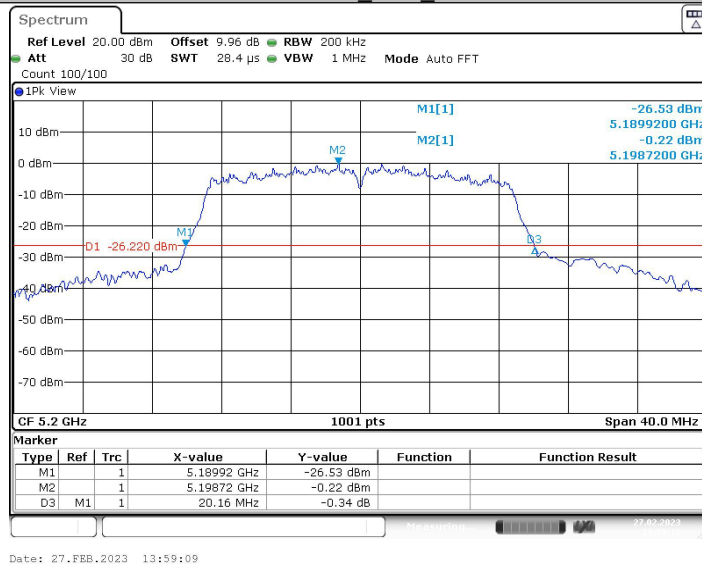


11N20SISO_Ant1_5240

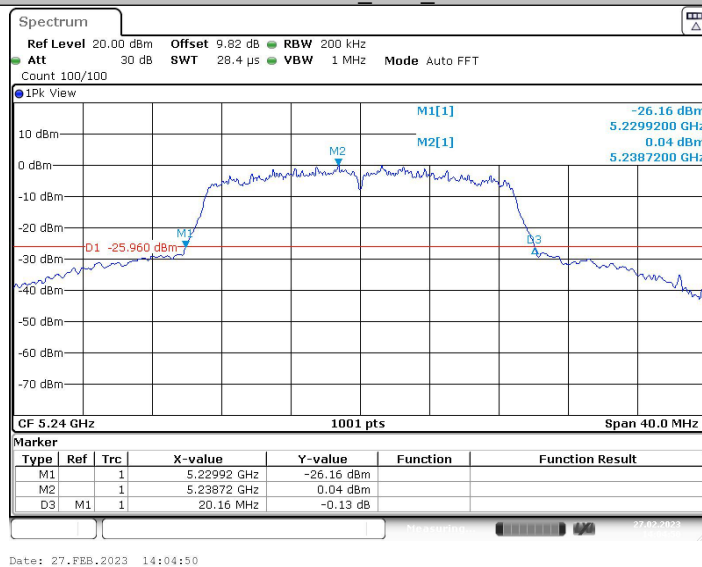


11N20SISO_Ant1_5745




11N20SISO_Ant1_5785

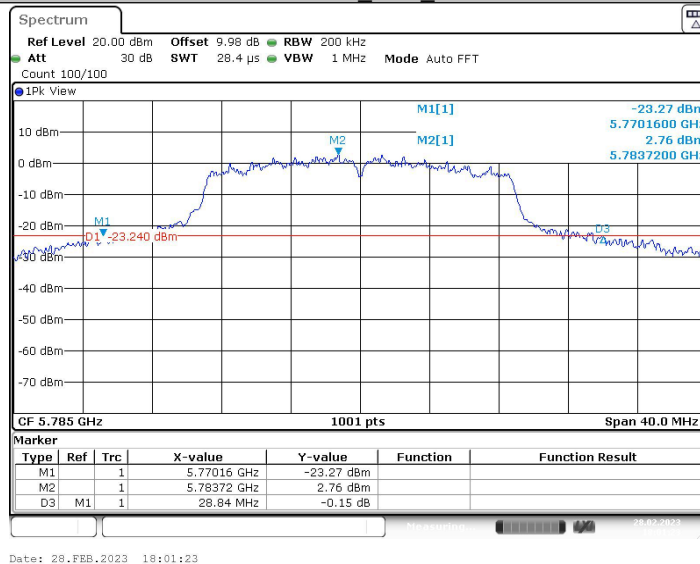


11N20SISO_Ant1_5825

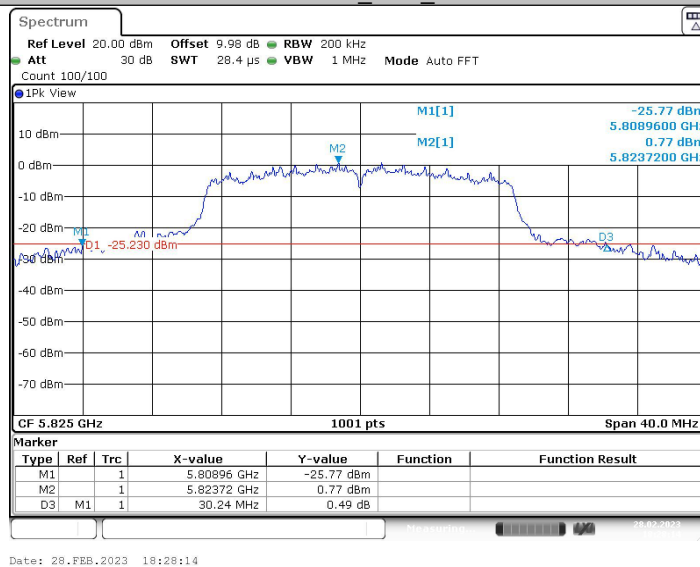


11N40SISO_Ant1_5190

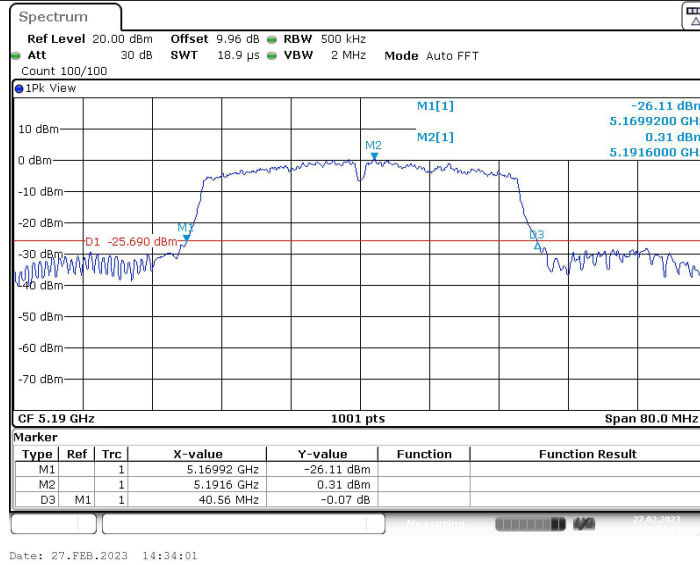


11N40SISO_Ant1_5230

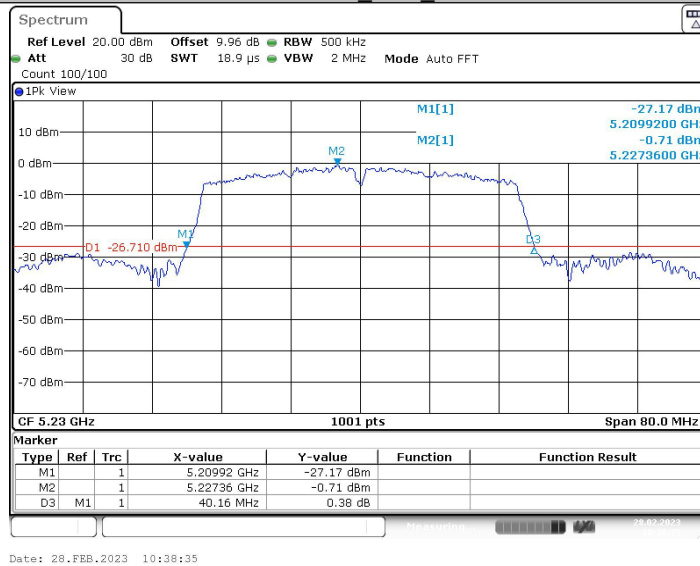


11N40SISO_Ant1_5755

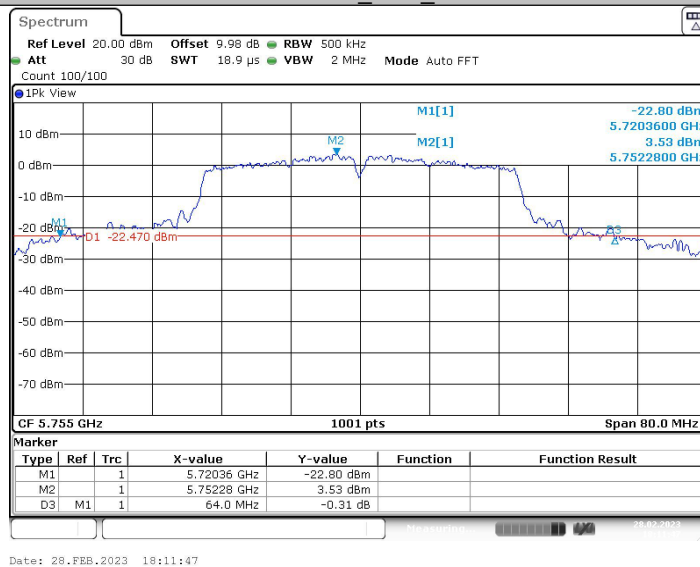


11N40SISO_Ant1_5795

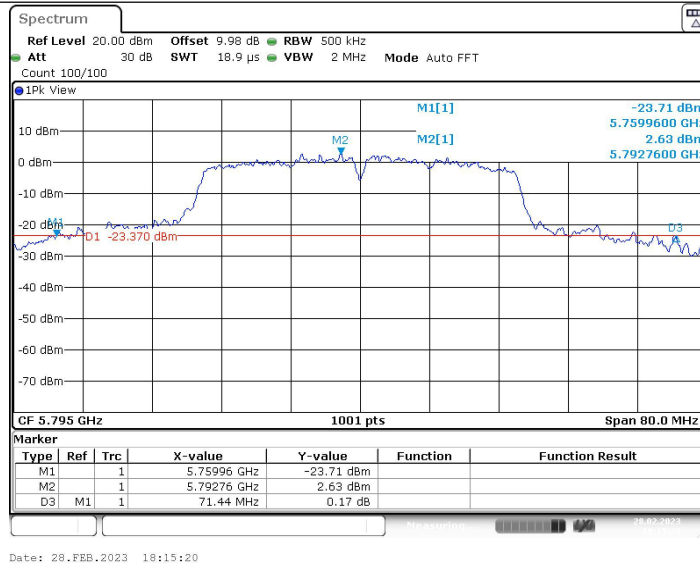


11AC20SISO_Ant1_5180

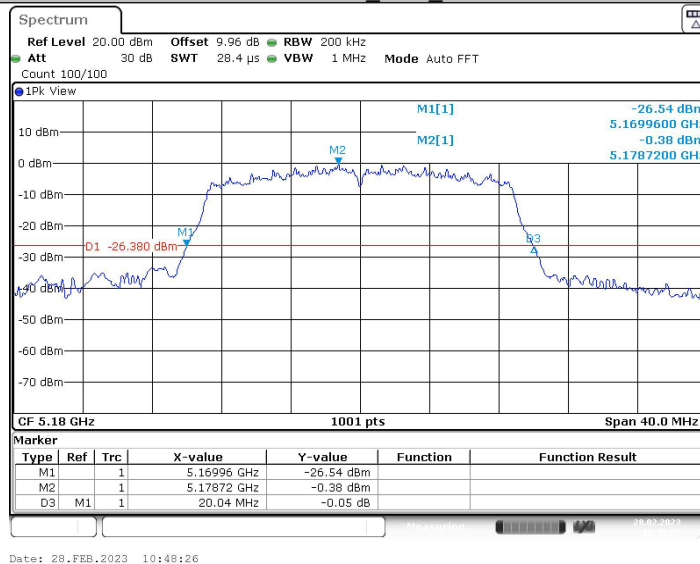


11AC20SISO_Ant1_5200

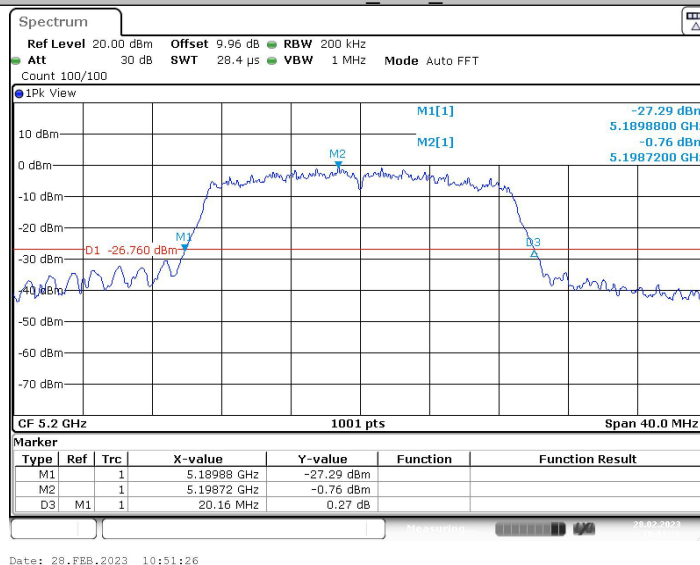


11AC20SISO_Ant1_5240

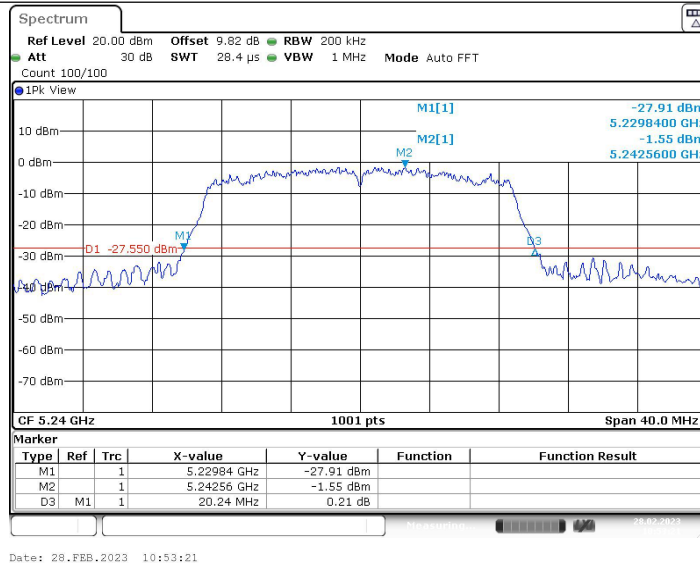


11AC20SISO_Ant1_5745

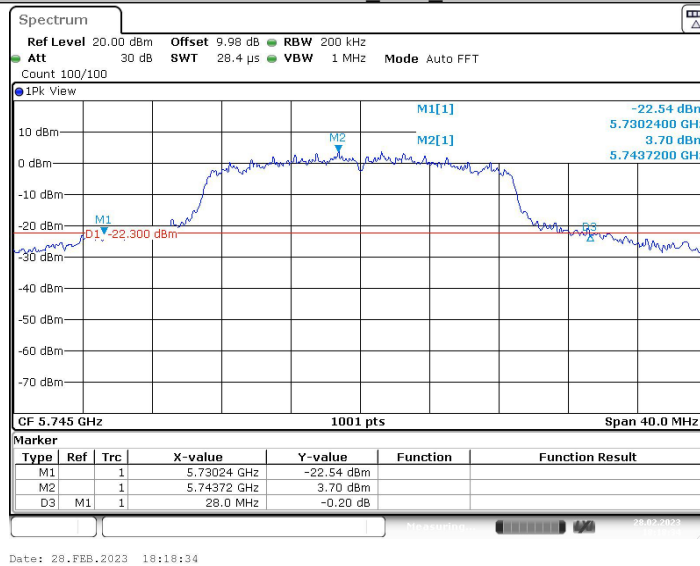


11AC20SISO_Ant1_5785

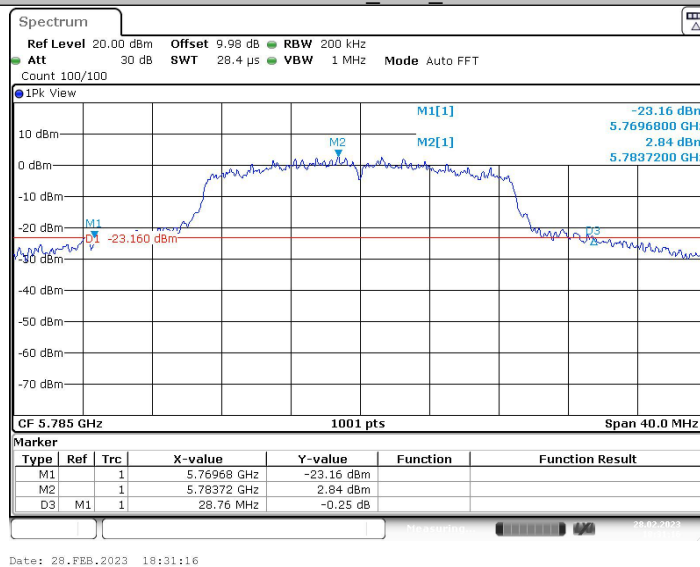


11AC20SISO_Ant1_5825

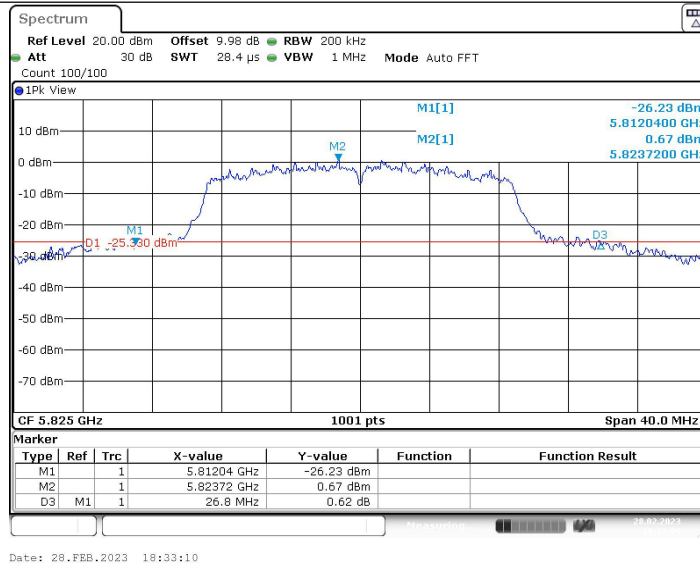

11AC40SISO_Ant1_5190

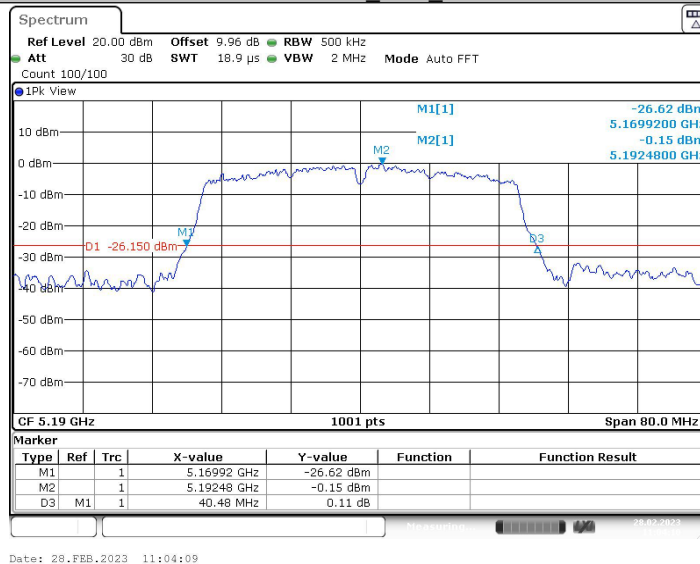

11AC40SISO_Ant1_5230

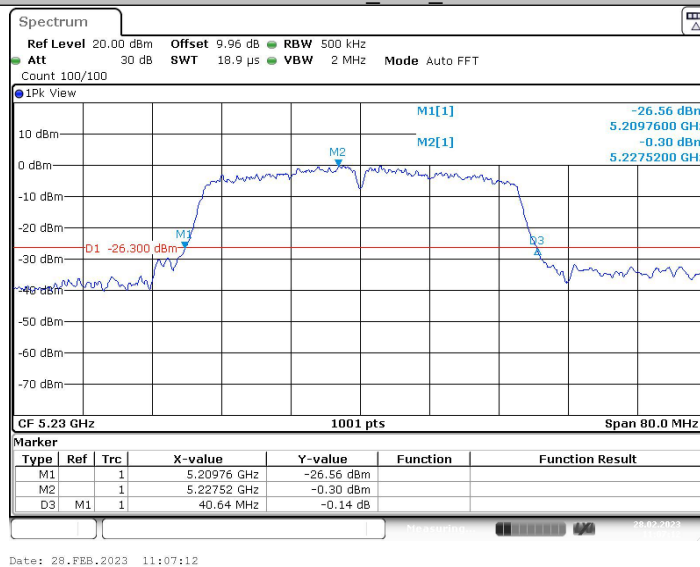

11AC40SISO_Ant1_5755