



Test Report

Product Name : Wireless LAN Card

Model No. : WLL013

FCC ID.: H8N-WLL013



Applicant : ASKEY COMPUTER CORP.

Address : RM 220, BLDG.53, 195-69 SEC. 4, CHUNG HSING
RD., CHUTUNG, HSINCHU, TAIWAN 310, R.O.C

Date of Receipt : June 29, 2001

Date of Test : July 31, 2001

Report No. : 017H011FI

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : July 31, 2001

Report No. : 017H011FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name : Wireless LAN Card
Applicant : ASKEY COMPUTER CORP.
Address : RM 220, BLDG.53, 195-69 SEC. 4, CHUNG HSING
RD., CHUTUNG, HSINCHU, TAIWAN 310, R.O.C
Manufacturer : ASKEY COMPUTER CORP.
Model No. : WLL013
FCC ID. : H8N-WLL013
Rated Voltage : DC 5V
Trade Name : ASKEY
Measurement Standard : FCC Part 15 Subpart C Paragraph 15.247
Measurement Procedure : ANSI C63.4:1992
Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By

:

A handwritten signature in cursive script, appearing to read 'Lisa Chen'.

(Lisa Chen)

Tested By

:

A handwritten signature in cursive script, appearing to read 'Vincent Lin'.

(Vincent Lin)

Approved By

:

A handwritten signature in cursive script, appearing to read 'Gene Chang'.

(Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	5
1.1. EUT Description	5
1.2. EUT Description	5
1.3. Configuration of tested System.....	7
1.4. EUT Exercise Software.....	8
1.5. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment List	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure.....	10
2.5. Test Result of Conducted Emission	11
3. Peak Power Output.....	13
3.1. Test Equipment.....	13
3.2. Test Setup	13
3.3. Test Condition.....	13
3.4. Minimum Standard.....	13
3.5. Test Result of Peak Power Output.....	14
4. RF Exposure Evaluation.....	15
4.1. Friis Formula	15
4.2. EUT Operation condition	15
4.3. Test Result of RF Exposure Evaluation	16
5. Radiated Emission.....	17
5.1. Test Equipment.....	17
5.2. Test Setup	17
5.3. Test Condition.....	18
5.4. Limits	18
5.5. Test Procedure.....	19
5.6. Test Result of Radiated Emission	20
5.7. Test Result of Band Edge	32
6. Occupied Bandwidth	35
6.1. Test Equipment.....	35
6.2. Test Setup	35
6.3. Test Condition.....	35
6.4. Standard Requirement.....	35
6.5. Test Result of Occupied Bandwidth	36
7. Transmitter Power Density.....	39
7.1. Test Equipment.....	39
7.2. Test Setup	39
7.3. Test Condition.....	39
7.4. Standard Requirement.....	39
7.5. Test Result of Transmitter Power Density.....	40

8.	Processing Gain	43
8.1.	Test Condition.....	43
8.2.	Minimum Standard.....	43
8.3.	Method of Measurement	43
8.4.	Calculation of Processing Gain:.....	43
8.5.	Test Result of Processing Gain	44
9.	EMI Reduction Method During Compliance Testing	52
10.	Attachment.....	53

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	: Wireless LAN Card	
Trade Name	: ASKEY	
FCC ID.	: H8N-WLL013	
Model No.	: WLL013	
Frequency Range	: 2400MHz to 2483.5MHz	
Channel Number	: 11	
Frequency of Each	: Channel 01: 2412MHz	Channel 07: 2442MHz
Channel	Channel 02: 2417 MHz	Channel 08: 2447MHz
(Working Frequency)	Channel 03: 2422 MHz	Channel 09: 2452MHz
	Channel 04: 2427MHz	Channel 10: 2457MHz
	Channel 05: 2432MHz	Channel 11: 2462MHz
	Channel 06: 2437MHz	
Type of Modulation	: Direct Sequence Spread Spectrum	
Selection of		
Operating Frequency	: By software	
Antenna type	: Internal permanently on board.	

Note:

1. This device is a 2.4GHz Wireless LAN Card with USB interface included a 2.4GHz receiving function, a 2.4GHz transmitting function.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. This device is a composite device in accordance with Part 15 regulations. The function receiving was measured and made a test report that the report number is 017H012F under Verification.

1.2. EUT Description

EUT is an USB 1.1 interface 2.4GHz wireless LAN with 11 channels. The spreading code of EUT is 11 chip barker sequence. The antenna is soldered on the PCB directly. CCK, DQSK modulation scheme are used to modulate signal. The USB port provides the connection to PC for data transmission.

Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model No.	Serial No.	FCC ID
(1)	PC	IBM	6563-86V	96H6471	DoC
(2)	Monitor	HITACHI	CM752ET-311	T8D003312	DoC
(3)	Keyboard	IBM	KB-9930	0073450	DoC
(4)	Mouse	ACER	M-S34	LZA81451691	DZL211029
(5)	USB Mouse	Logitech	M-UE55	LTC93800397	DoC
(6)	Printer	HP	C2642A	MY75L1D2XN	B94C2642X
(7)	Modem	ACEEX	2814	960018054	IFAXDM2814
(8)	PC	IBM	16W	BNL6767	DoC
(9)	Wireless Lan Card	ASKEY	WLL013	N/A	DoC
(10)	Monitor	NEC	15R128	AWI16600	HSUTRLDH-1570
(11)	Keyboard	IBM	KB-9930	0073438	DoC
(12)	Mouse	IBM	M-SAU-IBM6	23-029334	JNZ211220

Note:

1. The power cord of The device. (2) is Shielded power cord.
2. The power cord of The device. (1),(6),(8),(10) are Non-shielded power cord.

	Signal Cable Type	Signal Cable Description
A.	VGA Cable	Shielded, 1.8m, two ferrite cores bonded.
B.	Keyboard Cable	Shielded, 1.8m
C.	Mouse Cable	Shielded, 1.8m
D.	USB Mouse Cable	Shielded, 1.2m
E.	Printer Cable	Shielded, 1.6m
F.	Modem Cable	Shielded, 1.6m
G.	USB Cable (EUT)	Shielded, 1.8m
H.	VGA Cable	Shielded, 1.8m, two ferrite cores bonded.
I.	Keyboard Cable	Shielded, 1.8m
J.	Mouse Cable	Shielded, 1.8m
K.	USB Cable	Shielded, 1.8m

1.3. Configuration of tested System

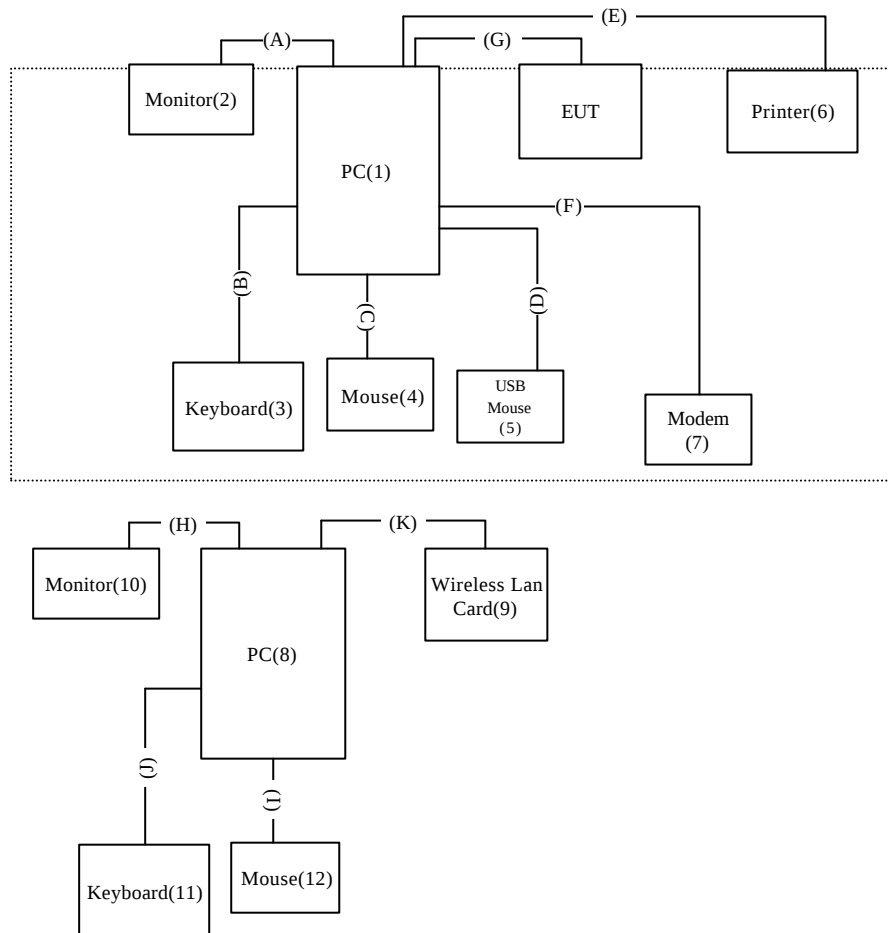

1.4. EUT Exercise Software

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Personal Computer reads data from disk.
- 1.4.4 Data will be transmitted through EUT.
- 1.4.5 The transmission status will be shown on the monitor.
- 1.4.6 Repeat the above procedure 1.4.4 to 1.4.5

1.5. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2
September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: N0.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwa, R.O.C.

2. Conducted Emission


2.1. Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2001	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2001	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2001	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

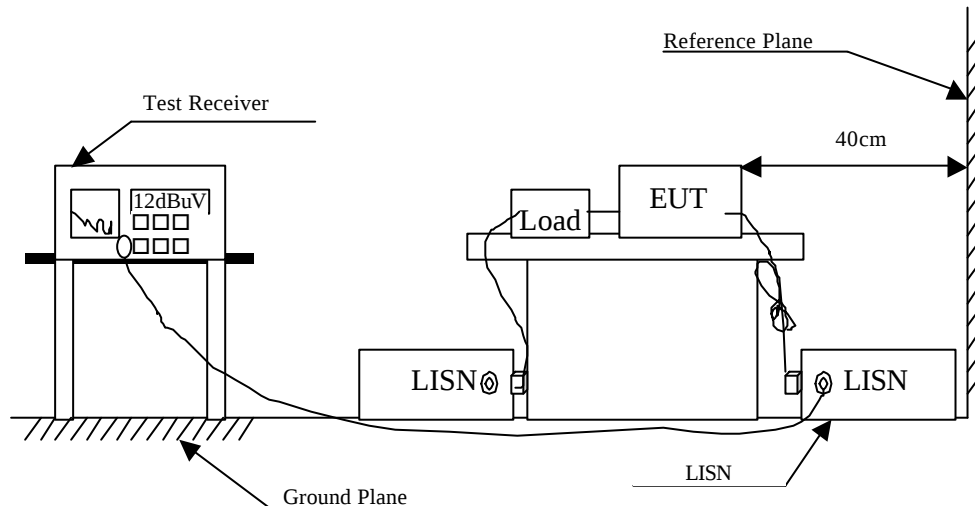

2.3. Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency MHz	Limits	
	uV	dBuV
0.45 - 30	250	48.0

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result of Conducted Emission

Product : Wireless LAN Card
 Test Item : Conducted Emission Test
 Test Mode : Normal Operation (1Mbps)

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
	Loss	Factor			
MHz	dB	dB	dBuV	dBuV	dBuV

Line 1

Quasi-Peak:

*	0.567	0.07	0.10	37.20	37.37	48.00
	0.662	0.08	0.10	36.90	37.08	48.00
	1.041	0.10	0.10	37.00	37.20	48.00
	1.326	0.12	0.11	34.60	34.83	48.00
	1.798	0.14	0.13	35.80	36.06	48.00
	22.431	0.37	0.49	29.10	29.96	48.00

Line 2

Quasi-Peak:

*	0.567	0.07	0.10	36.60	36.77	48.00
	0.662	0.08	0.10	35.40	35.58	48.00
	1.039	0.10	0.10	34.40	34.60	48.00
	1.419	0.12	0.12	34.30	34.54	48.00
	1.891	0.14	0.13	33.90	34.17	48.00
	21.759	0.36	0.48	30.90	31.75	48.00

Remarks :

1. “ * ” means that this data is the worst emission level.
2. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Conducted Emission Test
 Test Mode : Normal Operation (11Mbps)

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	dBuV	dBuV	dBuV
	dB	dB			

=====

Line 1

Quasi-Peak:

*	0.567	0.07	0.10	37.30	37.47	48.00
	0.663	0.08	0.10	36.90	37.08	48.00
	1.041	0.10	0.10	36.90	37.10	48.00
	1.136	0.11	0.11	35.00	35.21	48.00
	1.798	0.14	0.13	35.60	35.86	48.00
	22.048	0.37	0.49	27.90	28.75	48.00

Line 2

Quasi-Peak:

*	0.568	0.07	0.10	36.90	37.07	48.00
	0.664	0.08	0.10	35.70	35.88	48.00
	1.039	0.10	0.10	34.30	34.50	48.00
	1.799	0.14	0.13	33.80	34.06	48.00
	9.899	0.28	0.20	29.90	30.38	48.00
	21.962	0.37	0.49	32.80	33.65	48.00

Remarks :

- 1.“ * ” means that this data is the worst emission level.
2. The average measurement was not performed when the peak measured data under the limit of average detection.

3. Peak Power Output

3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X	Power Meter	HP	EPM-441A	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

Conduction Power Measurement

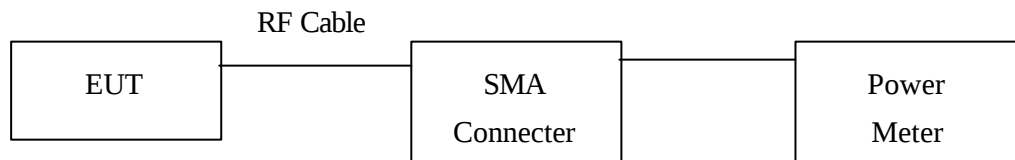

3.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

3.4. Minimum Standard

The maximum peak power shall be less 1 Watt.

3.5. Test Result of Peak Power Output

Product : Wireless LAN Card
 Test Item : Peak Power Output Data
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Data Speed: 1Mbps

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2413	8.83 dBm	1Watt= 30 dBm	Pass
6	2438	7.38 dBm	1Watt= 30 dBm	Pass
11	2463	6.61 dBm	1Watt= 30 dBm	Pass

Data Speed: 11Mbps

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2413	8.54 dBm	1Watt= 30 dBm	Pass
6	2438	7.30dBm	1Watt= 30 dBm	Pass
11	2463	6.42 dBm	1Watt= 30 dBm	Pass

4. RF Exposure Evaluation

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	F/1500	6
1500-100,000	--	--	1	30

F= Frequency in MHz

4.1. Friis Formula

Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

4.2. EUT Operation condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.3. Test Result of RF Exposure Evaluation

Product : Wireless LAN Card
 Test Item : RF Exposure Evaluation Data
 Test Site : No.1 OATS
 Test Mode : Normal Operation

4.3.1 Antenna Gain

Antenna Gain: The maximum Gain measured in fully anechoic chamber is 1.6dBi or 1.45in linear scale.

4.3.2 Output Power Into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum Allowable Distance ®From Skin(cm)
1 (1Mbps)	2413	8.83	1.10
1 (11Mbps)	2413	8.54	1.13
6 (1Mbps)	2438	7.38	0.90
6 (11Mbps)	2438	7.30	0.90
11 (1Mbps)	2463	6.61	0.81
11 (11Mbps)	2463	6.42	0.80

The distance r (4th column) calculated from the Friis transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.

5. Radiated Emission


5.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
		Pre-Amplifier	HP	8447D/3307A01812	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2001
		Pre-Amplifier	HP	8447D/3307A01814	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

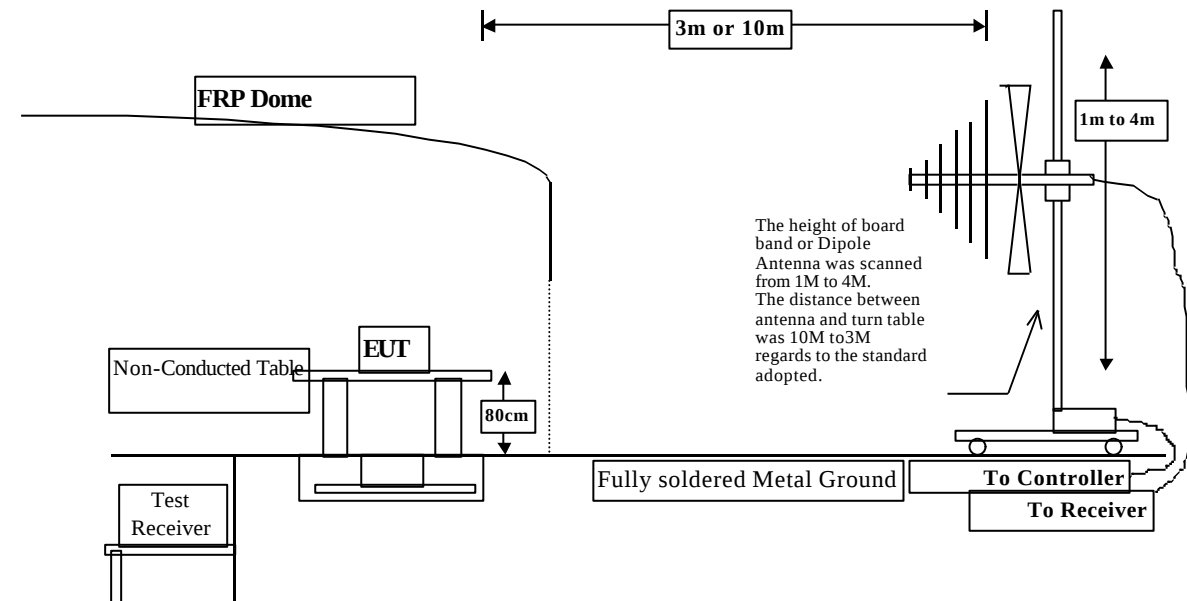

Spurious Emissions
(Band Edge Antenna Radiated)

5.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

5.4. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency MHz	50dB below of the fundamental (dBuV/m @3m)	15.209 Limits (dBuV/m @3m)	General Radiated Limits (dBuV/m @3m)
30-88	40	40	40
88-216	43.5	43.5	43.5
216-960	44	46	46
Above 960	44	54	54

Remarks :

1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5.5. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz, above 1GHz are 1 MHz.

The frequency range from **30MHz to 10th harmonics** is checked.

5.6. Test Result of Radiated Emission

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 1(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP Reading Level	Measurement	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB dBuV/m

=====

Peak Detector (Horizontal)

4826.450	6.27	33.50	0.00	19.79	59.56	14.44	74.00
7238.700	8.32	36.24	0.00	18.54	< 63.10	10.90	74.00
9651.640	10.18	37.43	0.00	18.35	< 65.96	8.04	74.00

Average Detector (Horizontal)

4824.050	6.27	33.50	0.00	7.29	47.06	6.94	54.00
7241.650	8.32	36.24	0.00	5.26	< 49.82	4.18	54.00
9651.140	10.18	37.43	0.00	5.36	< 52.97	1.03	54.00

Peak Detector (Vertical)

4824.020	6.27	33.50	0.00	20.03	59.80	14.20	74.00
7237.120	8.32	36.24	0.00	18.76	< 63.32	10.68	74.00
9649.800	10.18	37.43	0.00	18.62	< 66.23	7.77	74.00

Average Detector (Vertical)

4823.870	6.27	33.50	0.00	8.77	48.54	5.46	54.00
7237.100	8.32	36.24	0.00	5.07	< 49.63	4.37	54.00
9649.800	10.18	37.43	0.00	5.29	< 52.90	1.10	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 6(1Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
MHz	Loss	Factor		Level			
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Peak Detector (Horizontal)

4874.340	6.32	33.56	0.00	19.65	59.53	14.47	74.00
7312.340	8.38	36.31	0.00	19.14	< 63.82	10.18	74.00
9751.400	10.25	37.45	0.00	18.53	< 66.23	7.77	74.00

Average Detector (Horizontal)

4874.340	6.32	33.56	0.00	6.62	46.50	7.50	54.00
7313.340	8.39	36.32	0.00	5.10	< 49.82	4.18	54.00
9753.150	10.25	37.45	0.00	5.52	< 52.22	1.78	54.00

Peak Detector (Vertical)

4873.800	6.32	33.56	0.00	19.60	59.48	14.52	74.00
7311.100	8.38	36.31	0.00	18.56	< 63.24	10.76	74.00
9749.900	10.25	37.45	0.00	18.17	< 65.87	8.13	74.00

Average Detector (Vertical)

4873.900	6.32	33.56	0.00	6.83	46.71	7.29	54.00
7310.520	8.38	36.31	0.00	5.27	< 49.95	4.05	54.00
9750.200	10.25	37.45	0.00	5.52	< 52.22	1.78	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 11(1Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Peak Detector (Horizontal)

4924.550	6.37	33.62	0.00	19.63	59.62	14.38	74.00
7386.050	8.43	36.37	0.00	18.15	< 62.96	11.04	74.00
9874.740	10.34	37.47	0.00	18.82	< 66.64	7.36	74.00

Average Detector (Horizontal)

4923.940	6.37	33.62	0.00	6.52	46.51	7.49	54.00
7386.350	8.43	36.37	0.00	5.26	< 50.07	3.93	54.00
9849.350	10.33	37.47	0.00	5.78	< 52.58	1.42	54.00

Peak Detector (Vertical)

4924.020	6.37	33.62	0.00	20.46	60.45	13.55	74.00
7386.400	8.43	36.37	0.00	18.55	< 63.36	10.64	74.00
9849.700	10.33	37.47	0.00	18.71	< 66.51	7.49	74.00

Average Detector (Vertical)

4924.120	6.37	33.62	0.00	6.58	46.57	7.43	54.00
7386.900	8.43	36.37	0.00	5.26	< 50.07	3.93	54.00
9849.520	10.33	37.47	0.00	5.83	< 52.63	1.37	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 1(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
MHz	Loss	Factor		Level			
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Peak Detector (Horizontal)

4825.250	6.27	33.50	0.00	19.64	59.41	14.59	74.00
7237.250	8.32	36.24	0.00	18.54	< 63.10	10.90	74.00
9649.250	10.18	37.43	0.00	18.28	< 65.89	8.11	74.00

Average Detector (Horizontal)

4824.600	6.27	33.50	0.00	6.61	46.38	7.62	54.00
7236.840	8.32	36.24	0.00	5.11	< 49.67	4.33	54.00
9648.540	10.18	37.43	0.00	5.27	< 52.88	1.12	54.00

Peak Detector (Vertical)

4826.250	6.27	33.50	0.00	19.56	59.33	14.67	74.00
7238.600	8.32	36.24	0.00	18.45	< 63.01	10.99	74.00
9651.600	10.18	37.43	0.00	18.09	< 65.70	8.30	74.00

Average Detector (Vertical)

4825.340	6.27	33.50	0.00	6.79	46.56	7.44	54.00
7240.650	8.32	36.24	0.00	5.26	< 49.82	4.18	54.00
9651.640	10.18	37.43	0.00	5.40	< 52.01	1.99	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 6(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Peak Detector (Horizontal)

4874.700	6.32	33.56	0.00	19.87	59.75	14.25	74.00
7311.840	8.38	36.31	0.00	18.34	< 63.02	10.98	74.00
9750.240	10.25	37.45	0.00	18.08	< 65.78	8.22	74.00

Average Detector (Horizontal)

4875.850	6.32	33.56	0.00	6.58	46.46	7.54	54.00
7310.240	8.38	36.31	0.00	5.25	< 49.93	4.07	54.00
9750.150	10.25	37.45	0.00	5.53	< 52.23	1.77	54.00

Peak Detector (Vertical)

4874.540	6.32	33.56	0.00	19.59	59.47	14.53	74.00
7311.840	8.38	36.31	0.00	18.43	< 63.11	10.89	74.00
9750.540	10.25	37.45	0.00	18.00	< 65.70	8.30	74.00

Average Detector (Vertical)

4874.540	6.32	33.56	0.00	6.54	46.42	7.58	54.00
7312.540	8.38	36.31	0.00	5.15	< 49.83	4.17	54.00
9750.750	10.25	37.45	0.00	5.25	< 52.95	1.05	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Channel 11(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Peak Detector (Horizontal)

4924.350	6.37	33.62	0.00	19.75	59.74	14.26	74.00
7384.500	8.43	36.37	0.00	18.79	< 63.60	10.40	74.00
9848.750	10.33	37.47	0.00	18.36	< 66.16	7.84	74.00

Average Detector (Horizontal)

4923.840	6.37	33.62	0.00	6.55	46.54	7.46	54.00
7386.350	8.43	36.37	0.00	5.33	< 50.14	3.86	54.00
9849.450	10.33	37.47	0.00	5.81	< 52.61	1.39	54.00

Peak Detector (Vertical)

4923.690	6.37	33.62	0.00	20.12	60.11	13.89	74.00
7389.900	8.45	36.39	0.00	18.80	< 63.64	10.36	74.00
9851.790	10.33	37.47	0.00	19.01	< 66.81	7.19	74.00

Average Detector (Vertical)

4923.690	6.37	33.62	0.00	6.27	46.26	7.74	54.00
7389.800	8.45	36.39	0.00	5.31	< 50.15	3.85	54.00
9852.800	10.33	37.47	0.00	5.82	< 52.62	1.38	54.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Mode : Channel 1(1Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Horizontal:

197.810	1.70	12.10	26.91	46.20	33.09	10.41	43.50
483.960	2.88	16.93	26.66	40.20	33.35	12.65	46.00
498.510	2.94	17.26	26.64	39.20	32.77	13.23	46.00
614.910	3.42	19.06	26.45	40.40	36.43	9.57	46.00
*701.240	3.77	20.63	26.32	39.20	37.28	8.72	46.00
745.860	3.96	21.24	26.25	36.20	35.15	10.85	46.00

Vertical:

198.780	1.71	12.06	26.91	46.80	33.65	9.85	43.50
395.690	2.52	14.91	26.80	38.40	29.03	16.97	46.00
525.670	3.05	17.69	26.59	38.80	32.95	13.05	46.00
*614.910	3.42	19.06	26.45	42.20	38.23	7.77	46.00
744.890	3.95	21.23	26.25	37.80	36.73	9.27	46.00
832.190	4.31	22.42	26.11	37.60	38.22	7.78	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Mode : Channel 6(1Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							

Horizontal:

198.780	1.71	12.06	26.91	44.40	31.25	12.25	43.50
482.020	2.87	16.88	26.66	39.80	32.89	13.11	46.00
497.540	2.94	17.24	26.64	37.40	30.94	15.06	46.00
*613.940	3.42	19.05	26.46	42.20	38.21	7.79	46.00
717.730	3.84	20.85	26.29	38.40	36.79	9.21	46.00
833.160	4.32	22.43	26.11	37.00	37.64	8.36	46.00

Vertical:

198.780	1.71	12.06	26.91	42.80	29.65	13.85	43.50
495.600	2.93	17.20	26.64	39.60	33.08	12.92	46.00
525.670	3.05	17.69	26.59	40.00	34.15	11.85	46.00
*700.270	3.77	20.61	26.32	41.60	39.66	6.34	46.00
744.890	3.95	21.23	26.25	38.80	37.73	8.27	46.00
833.160	4.32	22.43	26.11	38.20	38.84	7.16	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Mode : Channel 11(1Mbps)

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Horizontal:

200.720	1.72	12.01	26.91	43.60	30.41	13.09	43.50
482.990	2.88	16.91	26.66	39.00	32.12	13.88	46.00
524.700	3.05	17.68	26.60	36.40	30.53	15.47	46.00
* 612.970	3.41	19.03	26.46	40.80	36.78	9.22	46.00
715.790	3.83	20.83	26.30	37.60	35.97	10.03	46.00
788.540	4.13	21.84	26.18	34.40	34.19	11.81	46.00

Vertical:

199.750	1.71	12.00	26.91	43.00	29.80	13.70	43.50
395.690	2.52	14.91	26.80	39.40	30.03	15.97	46.00
525.670	3.05	17.69	26.59	39.40	33.55	12.45	46.00
*613.940	3.42	19.05	26.46	41.80	37.81	8.19	46.00
744.890	3.95	21.23	26.25	38.00	36.93	9.07	46.00
875.840	4.49	22.99	26.04	33.40	34.84	11.16	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Site : Chamber
 Test Mode : Channel 1(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
MHz	Loss	Factor		Level			
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

=====

Horizontal:

69.770	1.18	7.49	26.86	42.80	24.61	15.39	40.00
175.500	1.61	13.13	26.90	35.60	23.44	20.06	43.50
198.780	1.71	12.06	26.91	43.80	30.65	12.85	43.50
497.540	2.94	17.24	26.64	36.60	30.14	15.86	46.00
717.730	3.84	20.85	26.29	35.80	34.19	11.81	46.00
*745.860	3.96	21.24	26.25	39.40	38.35	7.65	46.00

Vertical:

73.650	1.20	7.61	26.87	47.40	29.34	10.66	40.00
198.780	1.71	12.06	26.91	44.20	31.05	12.45	43.50
240.490	1.88	12.37	26.93	38.80	26.12	19.88	46.00
495.600	2.93	17.20	26.64	36.80	30.28	15.72	46.00
716.760	3.84	20.83	26.29	36.40	34.77	11.23	46.00
*745.860	3.96	21.24	26.25	38.80	37.75	8.25	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Site : Chamber
 Test Mode : Channel 6(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							

Horizontal:

74.620	1.20	7.64	26.87	41.60	23.57	16.43	40.00
145.430	1.49	13.80	26.89	35.60	24.00	19.50	43.50
199.750	1.71	12.00	26.91	44.60	31.40	12.10	43.50
496.570	2.93	17.22	26.64	38.00	31.51	14.49	46.00
574.170	3.25	18.41	26.52	33.20	28.34	17.66	46.00
*745.860	3.96	21.24	26.25	39.40	38.35	7.65	46.00

Vertical:

68.800	1.18	7.46	26.86	46.40	28.17	11.83	40.00
145.430	1.49	13.80	26.89	35.60	24.00	19.50	43.50
200.720	1.72	12.01	26.91	44.20	31.01	12.49	43.50
496.570	2.93	17.22	26.64	36.80	30.31	15.69	46.00
695.420	3.75	20.52	26.33	34.00	31.94	14.06	46.00
* 745.860	3.96	21.24	26.25	37.80	36.75	9.25	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

Product : Wireless LAN Card
 Test Item : General Radiated Emission Data
 Test Site : Chamber
 Test Mode : Channel 11(11Mbps)

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit
	Loss	Factor		Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

75.590	1.20	7.67	26.87	43.40	25.41	14.59	40.00
145.430	1.49	13.80	26.89	36.40	24.80	18.70	43.50
199.750	1.71	12.00	26.91	45.80	32.60	10.90	43.50
696.390	3.75	20.54	26.33	34.80	32.76	13.24	46.00
715.790	3.83	20.83	26.30	35.60	33.97	12.03	46.00
* 744.890	3.95	21.23	26.25	39.40	38.33	7.67	46.00

Vertical:

75.590	1.20	7.67	26.87	47.20	29.21	10.79	40.00
198.780	1.71	12.06	26.91	41.60	28.45	15.05	43.50
495.600	2.93	17.20	26.64	37.20	30.68	15.32	46.00
695.420	3.75	20.52	26.33	33.80	31.74	14.26	46.00
715.790	3.83	20.83	26.30	36.00	34.37	11.63	46.00
* 744.890	3.95	21.23	26.25	36.40	35.33	10.67	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level-Amplifier.
3. Measurement = Reading Level + Probe Factor + Cable loss-Amplifier

5.7. Test Result of Band Edge

Product : Wireless LAN Card
 Test Item : Band Edge Data
 Test Site : No.1 OATS
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (1Mbps)	<2400	>20	Pass
1 (11Mbps)	<2400	>20	Pass

Figure Channel 1: 1Mbps


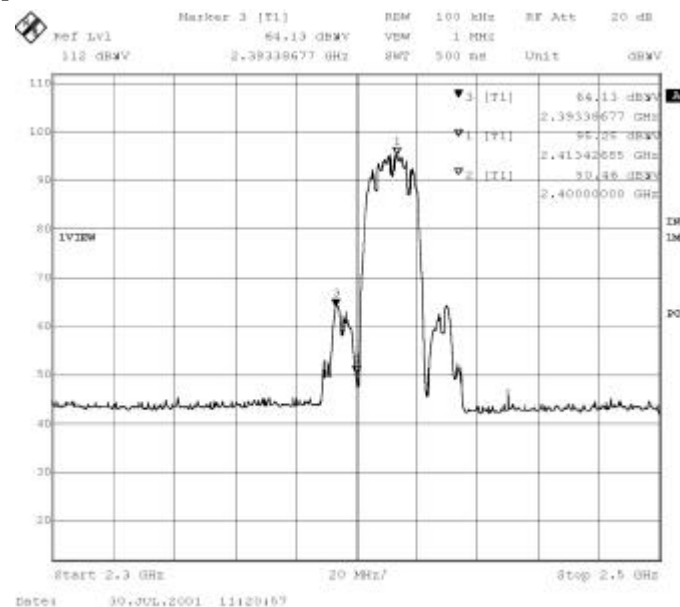



Figure Channel 1:11Mbps

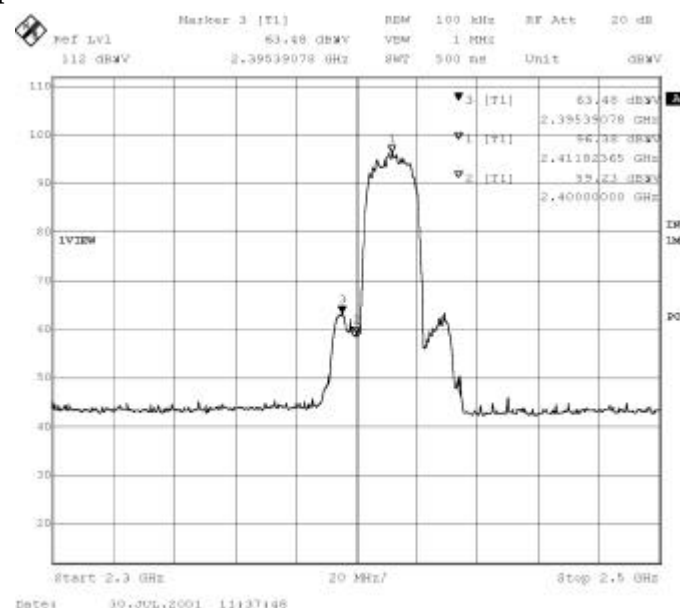

Product : Wireless LAN Card
 Test Item : Band Edge Data
 Test Site : No.1 OATS
 Test Mode : Channel 11


Band Edge-1 Mbps (Horizontal)

Frequency (MHz).	Reading (dBuV)	Measure (dBuV/m)	Result
2498.998	47.51	46.02	Pass

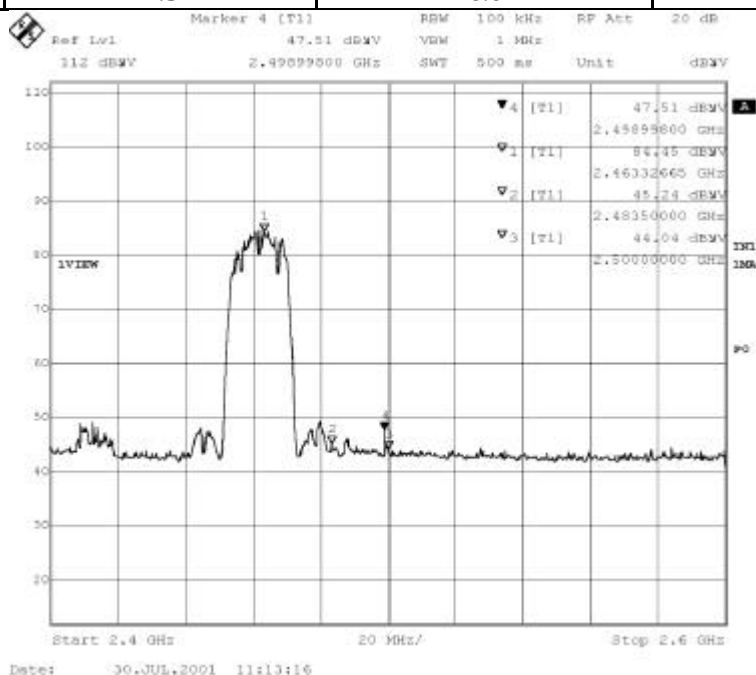


Band Edge-1 Mbps (Vertical)

Frequency (MHz).	Reading (dBuV)	Measure (dBuV/m)	Result
2483.767	48.32	46.77	Pass

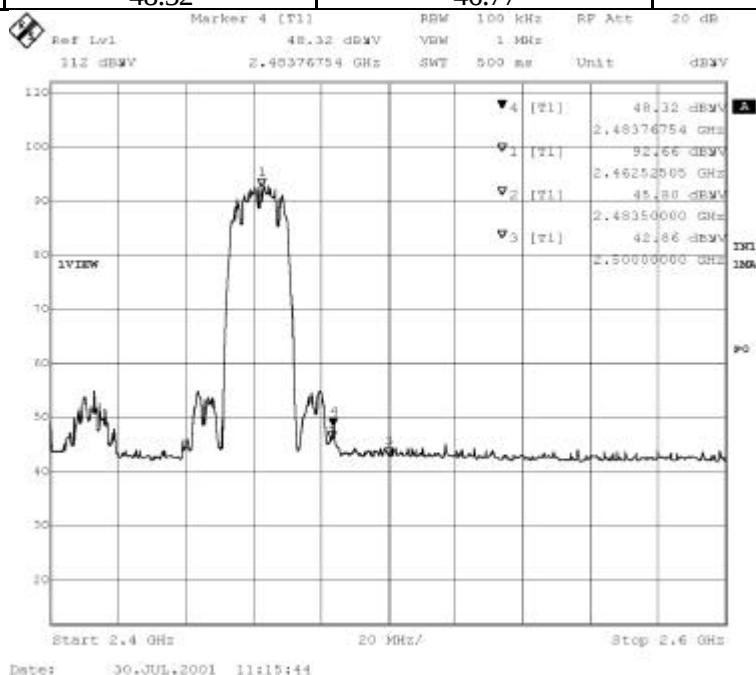


Band Edge-11 Mbps (Horizontal)

Frequency (MHz).	Reading (dBuV)	Measure (dBuV/m)	Result
2487.775	45.62	44.13	Pass

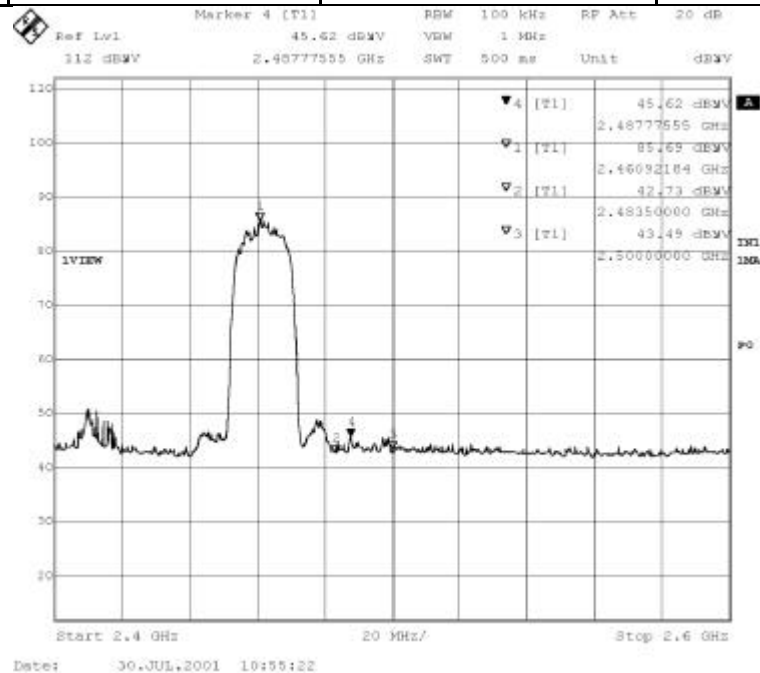

Band Edge-11 Mbps (Vertical)

Frequency (MHz).	Reading (dBuV)	Measure (dBuV/m)	Result
2483.767	47.98	46.43	Pass

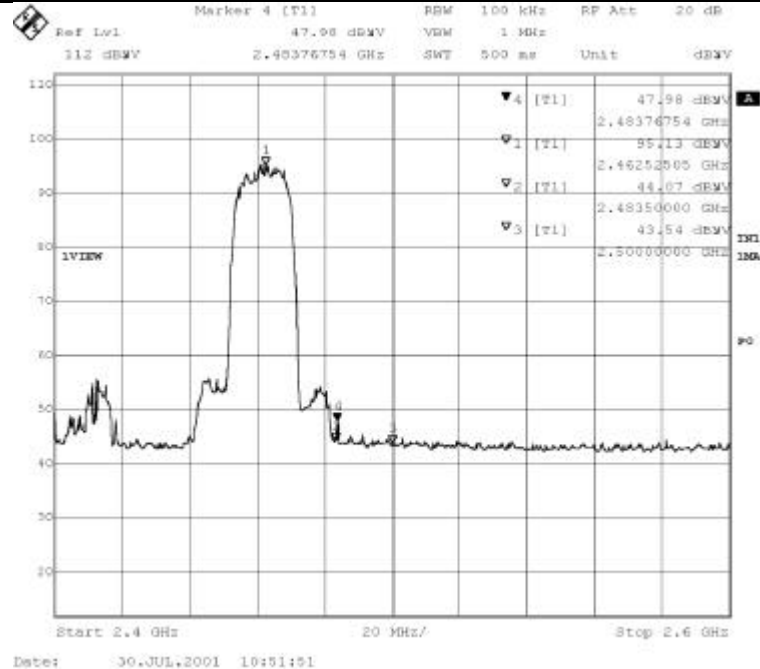

6. Occupied Bandwidth


6.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X	Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

6.2. Test Setup

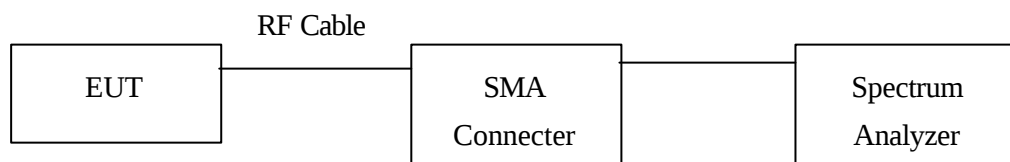

6.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

6.4. Standard Requirement

The minimum bandwidth shall be at least 500kHz.

6.5. Test Result of Occupied Bandwidth

Product : Wireless LAN Card
 Test Item : Occupied Bandwidth Data
 Test Site : No.1 OATS
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1 (1Mbps)	2412	15360	>500	Pass
1 (11Mbps)	2411	14240	>500	Pass

Figure Channel 1: 1Mbps


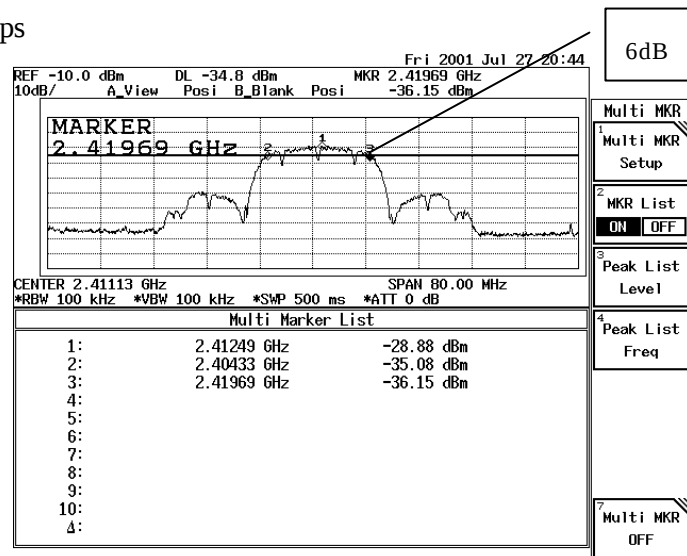


Figure Channel 1: 11Mbps

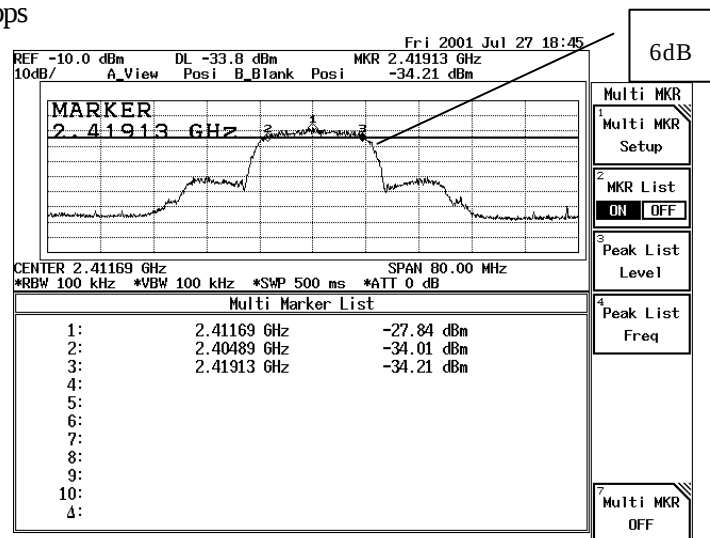

Product : Wireless LAN Card
 Test Item : Occupied Bandwidth Data
 Test Site : No.1 OATS
 Test Mode : Channel 6

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6 (1Mbps)	2437	15680	>500	Pass
6 (11Mbps)	2437	14720	>500	Pass

Figure Channel 6: 1Mbps


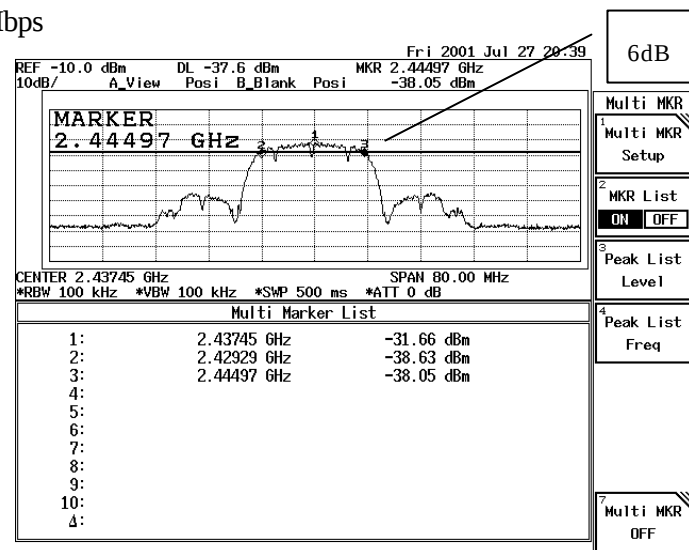


Figure Channel 6: 11Mbps

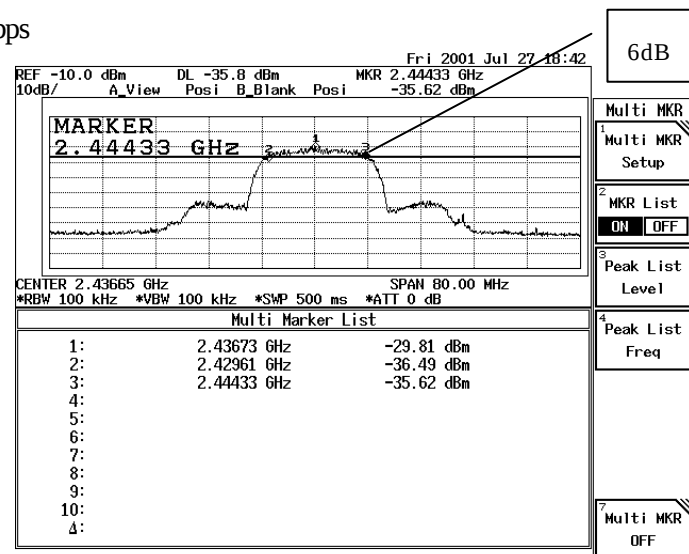

Product : Wireless LAN Card
 Test Item : Occupied Bandwidth Data
 Test Site : No.1 OATS
 Test Mode : Channel 11

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11 (1Mbps)	2462	15520	>500	Pass
11 (11Mbps)	2462	15120	>500	Pass

Figure Channel 11: 1Mbps


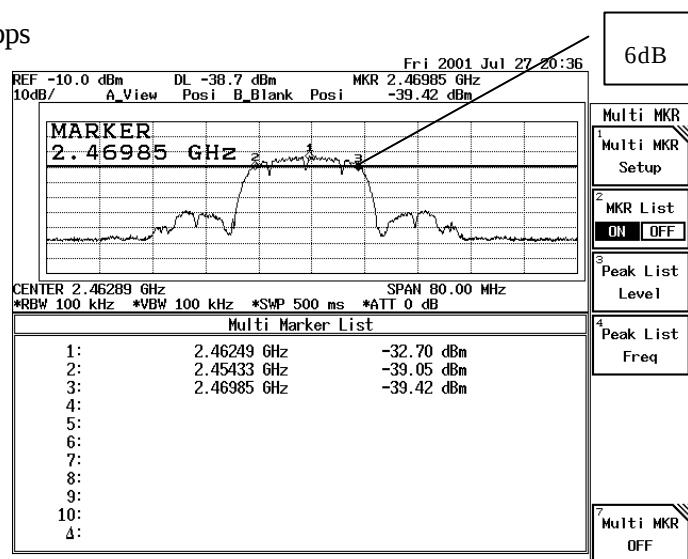


Figure Channel 11: 11Mbps

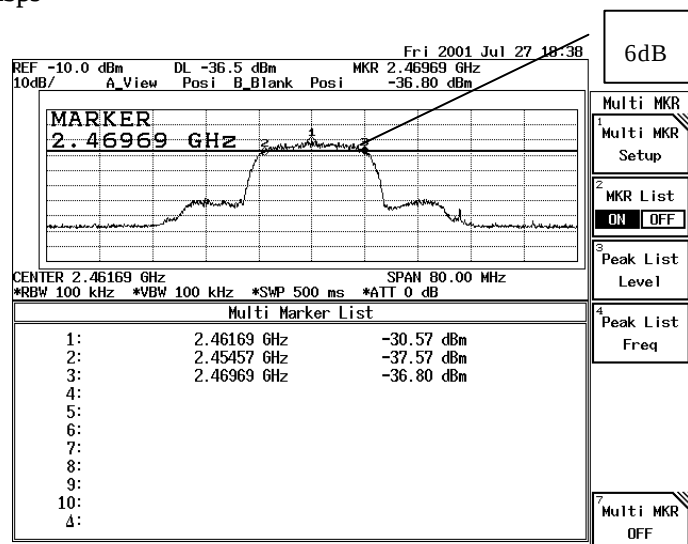

7. Transmitter Power Density


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X	Attenuator	HP		May, 2001
X	Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

7.2. Test Setup

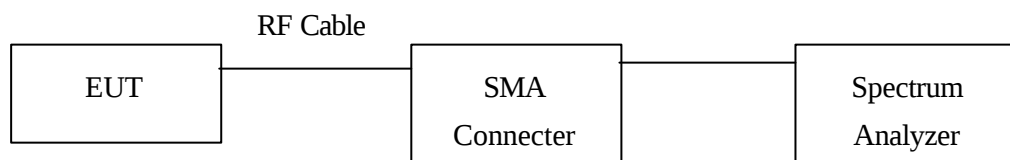

7.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

7.4. Standard Requirement


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.5. Test Result of Transmitter Power Density


Product : Wireless LAN Card
 Test Item : Transmitter Power Density Data
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1 (1Mbps)	2411.977	-49.02dBm	< 8dBm	Pass
1 (11Mbps)	2413.465	-41.77dBm	< 8dBm	Pass

1Mbps

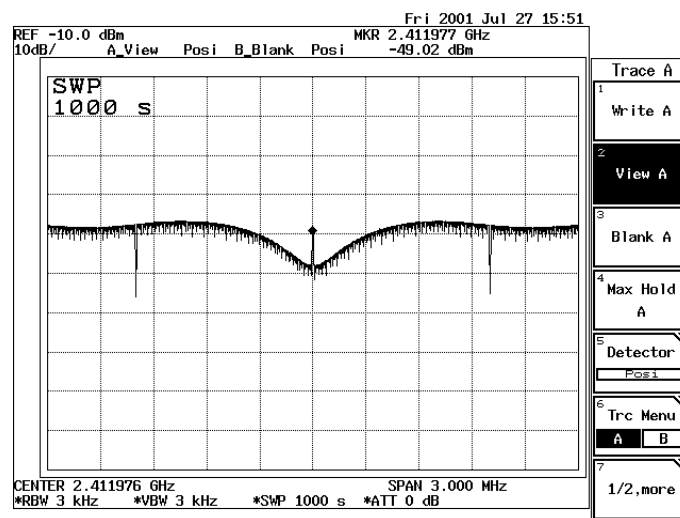


11Mbps

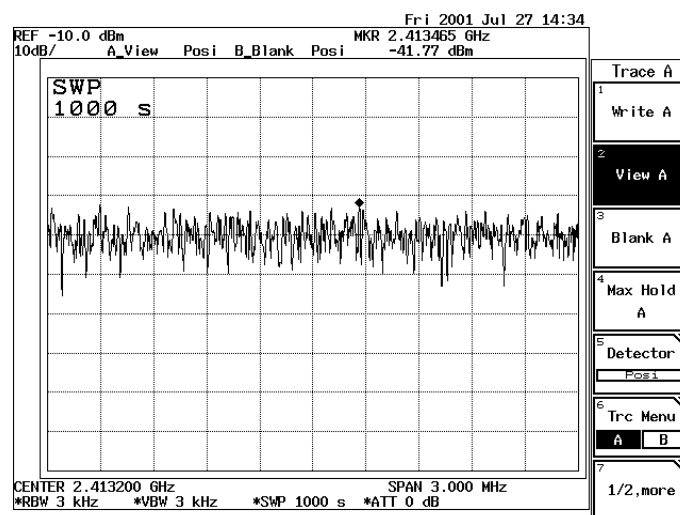

Product : Wireless LAN Card
 Test Item : Transmitter Power Density Data
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6 (1Mbps)	2436.981	-51.16dBm	< 8dBm	Pass
6 (11Mbps)	2435.709	-43.14dBm	< 8dBm	Pass

1Mbps

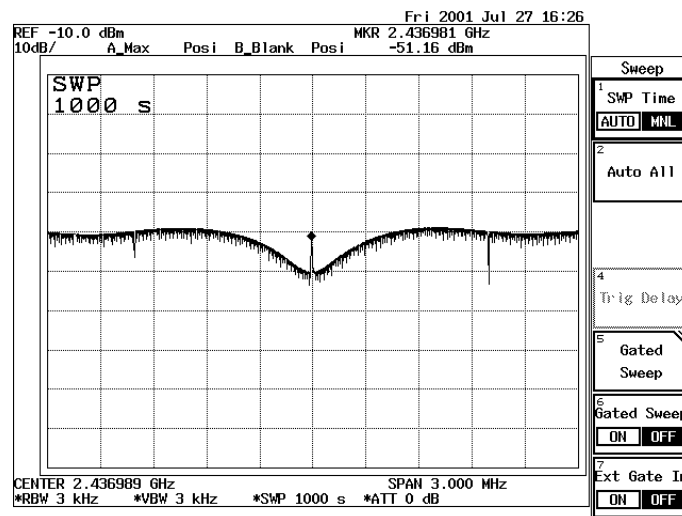

11Mbps

