

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	BLUETOOTH HEADSET
Model No.	:	LIVE FLEX
Trade Mark	:	JBL
FCC ID	:	APIJBLLIVEFLEX
IC	:	6132A-JBLLIVEFLEX
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	Maximum Peak Output Power	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits	11
4.3.	Test procedure	11
4.4.	Test result.....	12
4.5.	Original test data	13
5.	20 dB Bandwidth and 99% Bandwidth.....	19
5.1.	Block diagram of test setup.....	19
5.2.	Limits	19
5.3.	Test procedure	19
5.4.	Test result.....	20
5.5.	Original test data	21
6.	Carrier Frequency Separation.....	27
6.1.	Block diagram of test setup.....	27
6.2.	Limits	27
6.3.	Test procedure	27
6.4.	Test result.....	27
6.5.	Original test data	28
7.	Number of Hopping Channel	30
7.1.	Block diagram of test setup.....	30
7.2.	Limits	30
7.3.	Test procedure	30
7.4.	Test result.....	30
7.5.	Original test data	31
8.	Dwell Time.....	33

8.1.	Block diagram of test setup.....	33
8.2.	Limits	33
8.3.	Test procedure	33
8.4.	Test result.....	34
8.5.	Original test data	35
9.	Band Edge Compliance (Conducted Method)	47
9.1.	Block diagram of test setup.....	47
9.2.	Limit.....	47
9.3.	Test procedure	47
9.4.	Test result.....	47
9.5.	Original test data	48
10.	Radiated Emission	56
10.1.	Block diagram of test setup.....	56
10.2.	Limit.....	57
10.3.	Test Procedure.....	59
10.4.	Test result.....	61
11.	RF Conducted Spurious Emissions	90
11.1.	Block diagram of test setup.....	90
11.2.	Limits	90
11.3.	Test procedure	90
11.4.	Test result.....	91
11.5.	Original test data	91
12.	Band Edge Compliance (Radiated Method)	110
12.1.	Block diagram of test setup.....	110
12.2.	Limit.....	110
12.3.	Test Procedure.....	110
12.4.	Test result.....	110
13.	Power Line Conducted Emission	135
13.1.	Block diagram of test setup.....	135
13.2.	Power line conducted emission limits	135
13.3.	Test procedure	135
13.4.	Test result.....	136
14.	Antenna Requirements	139
14.1.	Limit.....	139
14.2.	Result	139
15.	Test Setup Photograph	140
16.	Photos of the EUT	142

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	BLUETOOTH HEADSET
Model No.	:	LIVE FLEX
Trade Mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R22082911-2E01		
Date of Receipt:	Aug. 29, 2022	Date of Test:	Aug. 29, 2022 ~ Oct. 18, 2022

Prepared By:

Jacky Huang

Jacky Huang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Oct. 20, 2022	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2 RSS-GEN 6.7	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: BLUETOOTH HEADSET
Model Number	: LIVE FLEX
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 3.85V Polymer Li-ion built-in battery or DC 5V from external charging case
Radio Specification	: Bluetooth V5.3
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	: 1 Mbps, 2 Mbps, 3Mbps
Antenna Type	: Left side: LDS antenna, maximum PK gain: -1.2 dBi Right side: LDS antenna, maximum PK gain: -0.46 dBi
Sample Number	: S22082911-15 for conductive, S22082911-21 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
Type-C Cable	Harman International Industries, Inc.	N/A	Length: 20cm	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Adapter	HUAWEI	HW-050450C00	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 4.5V/5A or 5V/4.5A	N/A

2.4. Block diagram of EUT configuration for test

EUT

Test software: BQB.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441
	5	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441
	5	CH78	2480
8DPSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441
	5	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method) 5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.40 dB (3.6 GHz ≤ f < 8 GHz) 1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 2#)					
SPECTRUM ANALYZER	R&S	FSU26	200071	Aug. 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	May 18, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 18, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022*	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	Nov. 29, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug. 17, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ -1.5M+ JCT26S-NJ-NJ -1.5M	4.5M+8M+1.5M +1.5M	Aug.17, 2022	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M	21123964	May. 19,2022	1 Year
RF Cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	21073466	Aug.17, 2022	1 Year
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year
LISN 1	R&S	ENV216	101109	Aug. 26, 2022	1 Year
LISN 2	R&S	ESH2-Z5	100309	Aug. 26, 2022	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Aug. 26, 2022	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Aug. 26, 2022	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

Note:* Radiated Emission 9 kHz - 30 MHz was tested on Sep. 30, 2022.

4. Maximum Peak Output Power

4.1. Block diagram of test setup

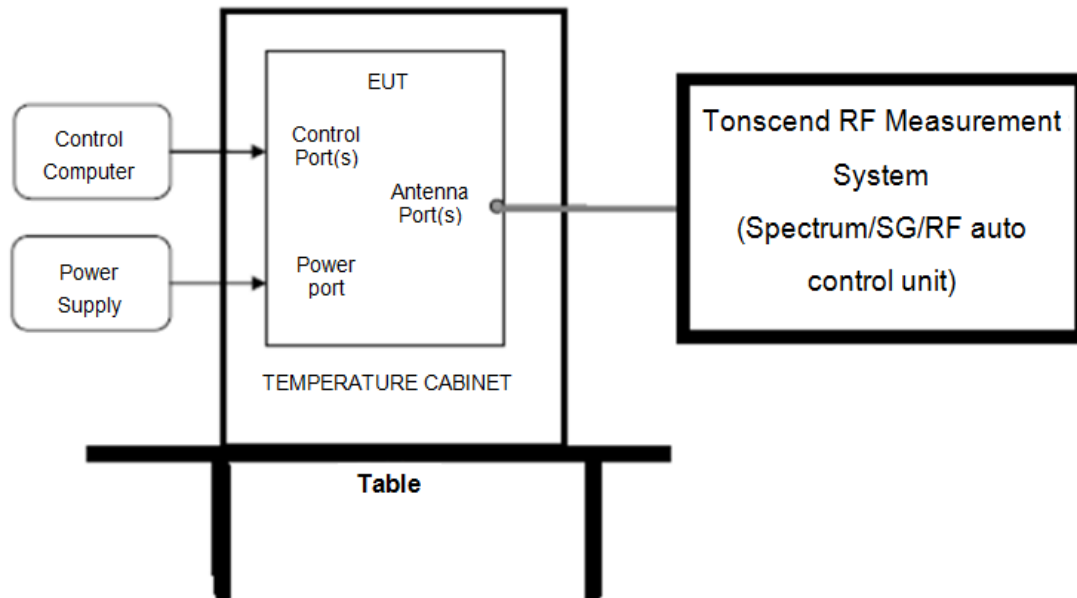

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
 - (2) Measure the maximum conducted output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=10 MHz
- Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Left side:

Mode	Antenna	Freq. (MHz)	Conducted Output Power (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	11.32	30	10.12	36	Pass
	ANT1	2441	11.61	30	10.41	36	Pass
	ANT1	2480	11.71	30	10.51	36	Pass
$\pi/4$ -DQPSK	ANT1	2402	11.16	30	9.96	36	Pass
	ANT1	2441	11.53	30	10.33	36	Pass
	ANT1	2480	11.69	30	10.49	36	Pass
8DPSK	ANT1	2402	11.25	30	10.05	36	Pass
	ANT1	2441	11.55	30	10.35	36	Pass
	ANT1	2480	11.68	30	10.48	36	Pass


Right side:

Mode	Antenna	Freq. (MHz)	Conducted Output Power (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	11.33	30	10.87	36	Pass
	ANT1	2441	11.63	30	11.17	36	Pass
	ANT1	2480	11.94	30	11.48	36	Pass
$\pi/4$ -DQPSK	ANT1	2402	11.39	30	10.93	36	Pass
	ANT1	2441	11.60	30	11.14	36	Pass
	ANT1	2480	11.97	30	11.51	36	Pass
8DPSK	ANT1	2402	11.36	30	10.90	36	Pass
	ANT1	2441	11.61	30	11.15	36	Pass
	ANT1	2480	12.00	30	11.54	36	Pass


Note: EIRP = Measured Highest P_{burst} Values + Antenna Gain

4.5. Original test data

Left side:

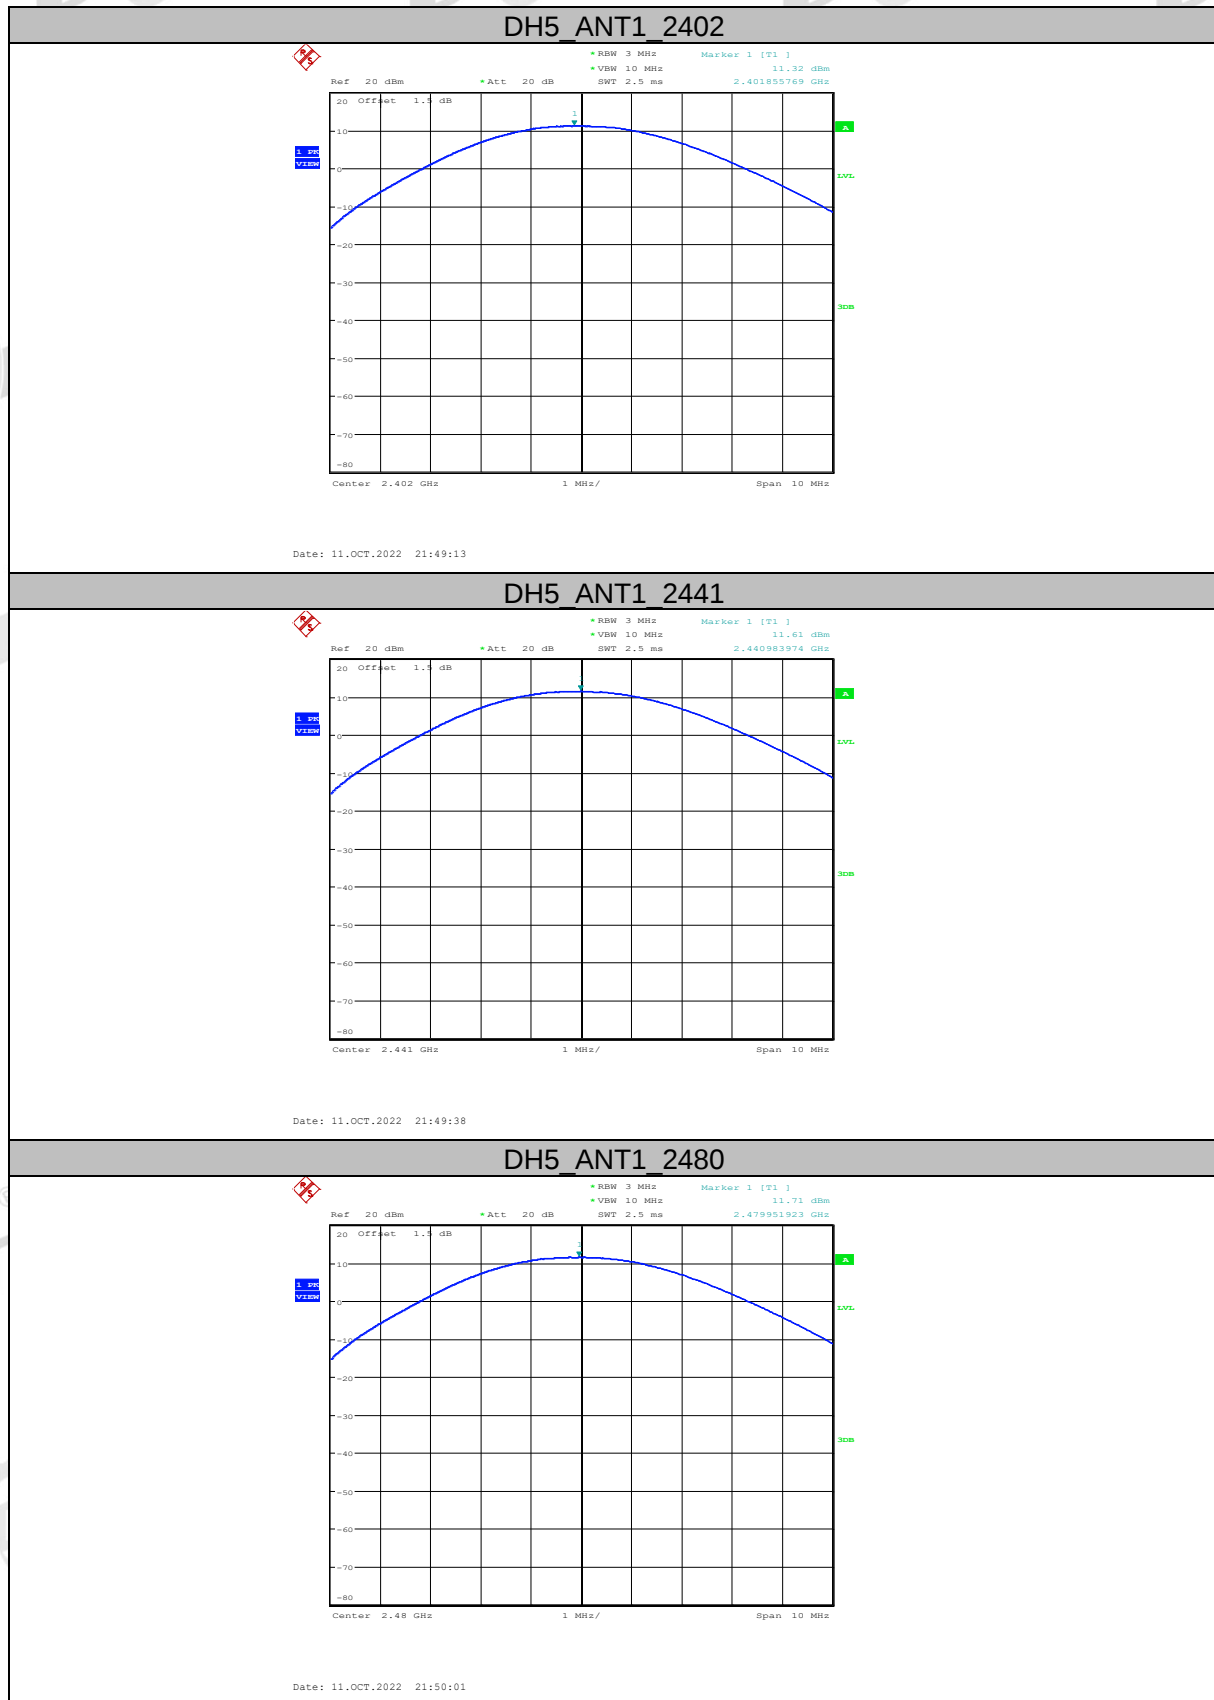


2DH5 ANT1 2402

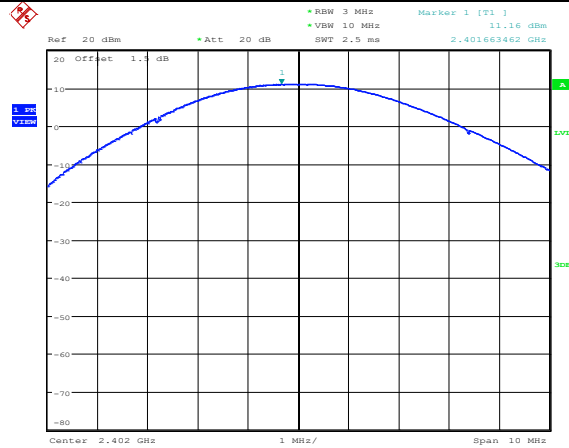


Date: 11.OCT.2022 21:50:23

2DH5 ANT1 2441

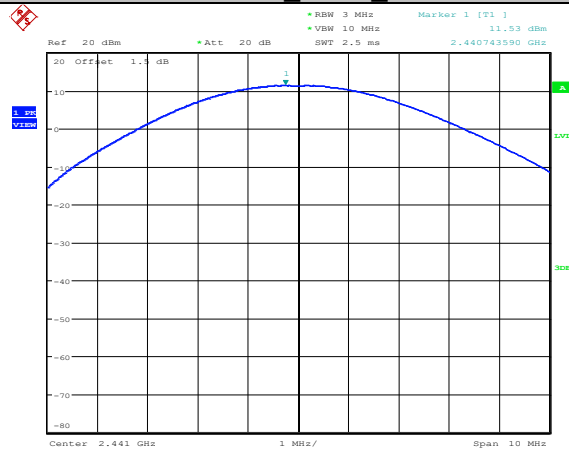


Date: 11.OCT.2022 21:50:46

2DH5 ANT1 2480

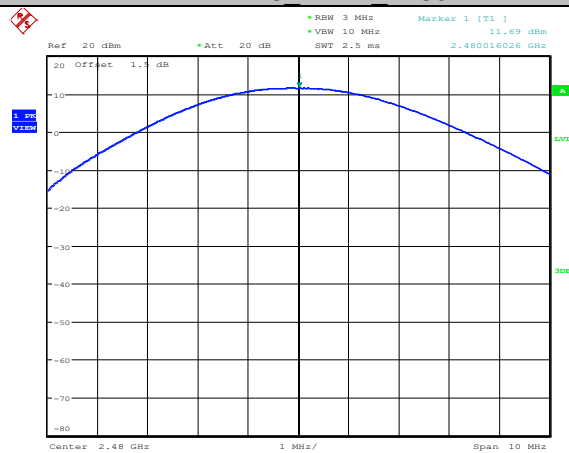


Date: 11.OCT.2022 21:51:21

3DH5 ANT1 2402

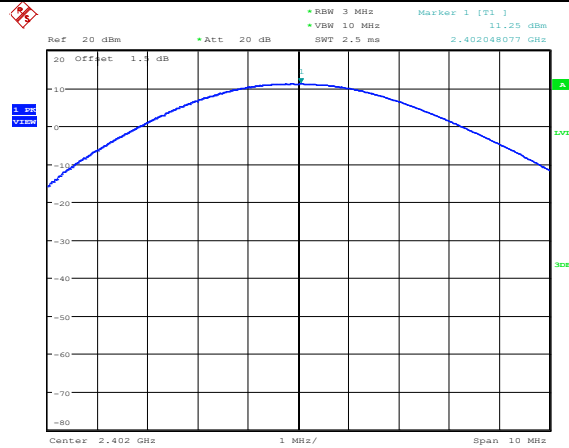


Date: 11.OCT.2022 21:52:17

3DH5 ANT1 2441

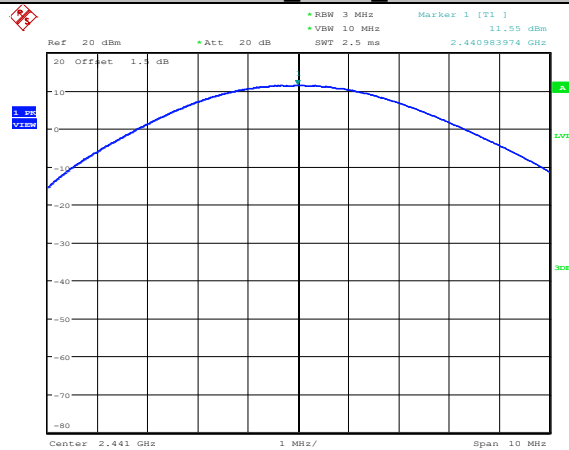


Date: 11.OCT.2022 21:52:47

3DH5 ANT1 2480

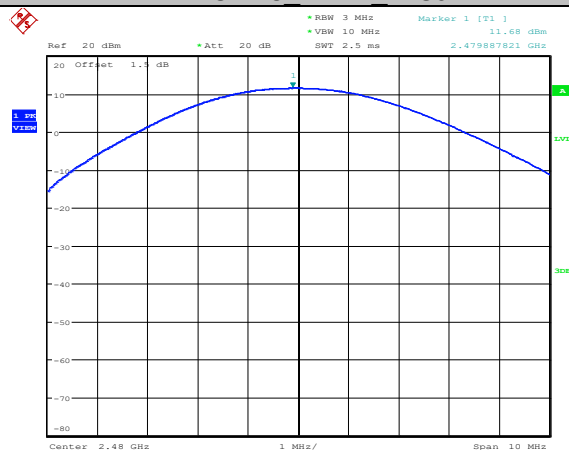


Date: 11.OCT.2022 21:53:12

Right side:

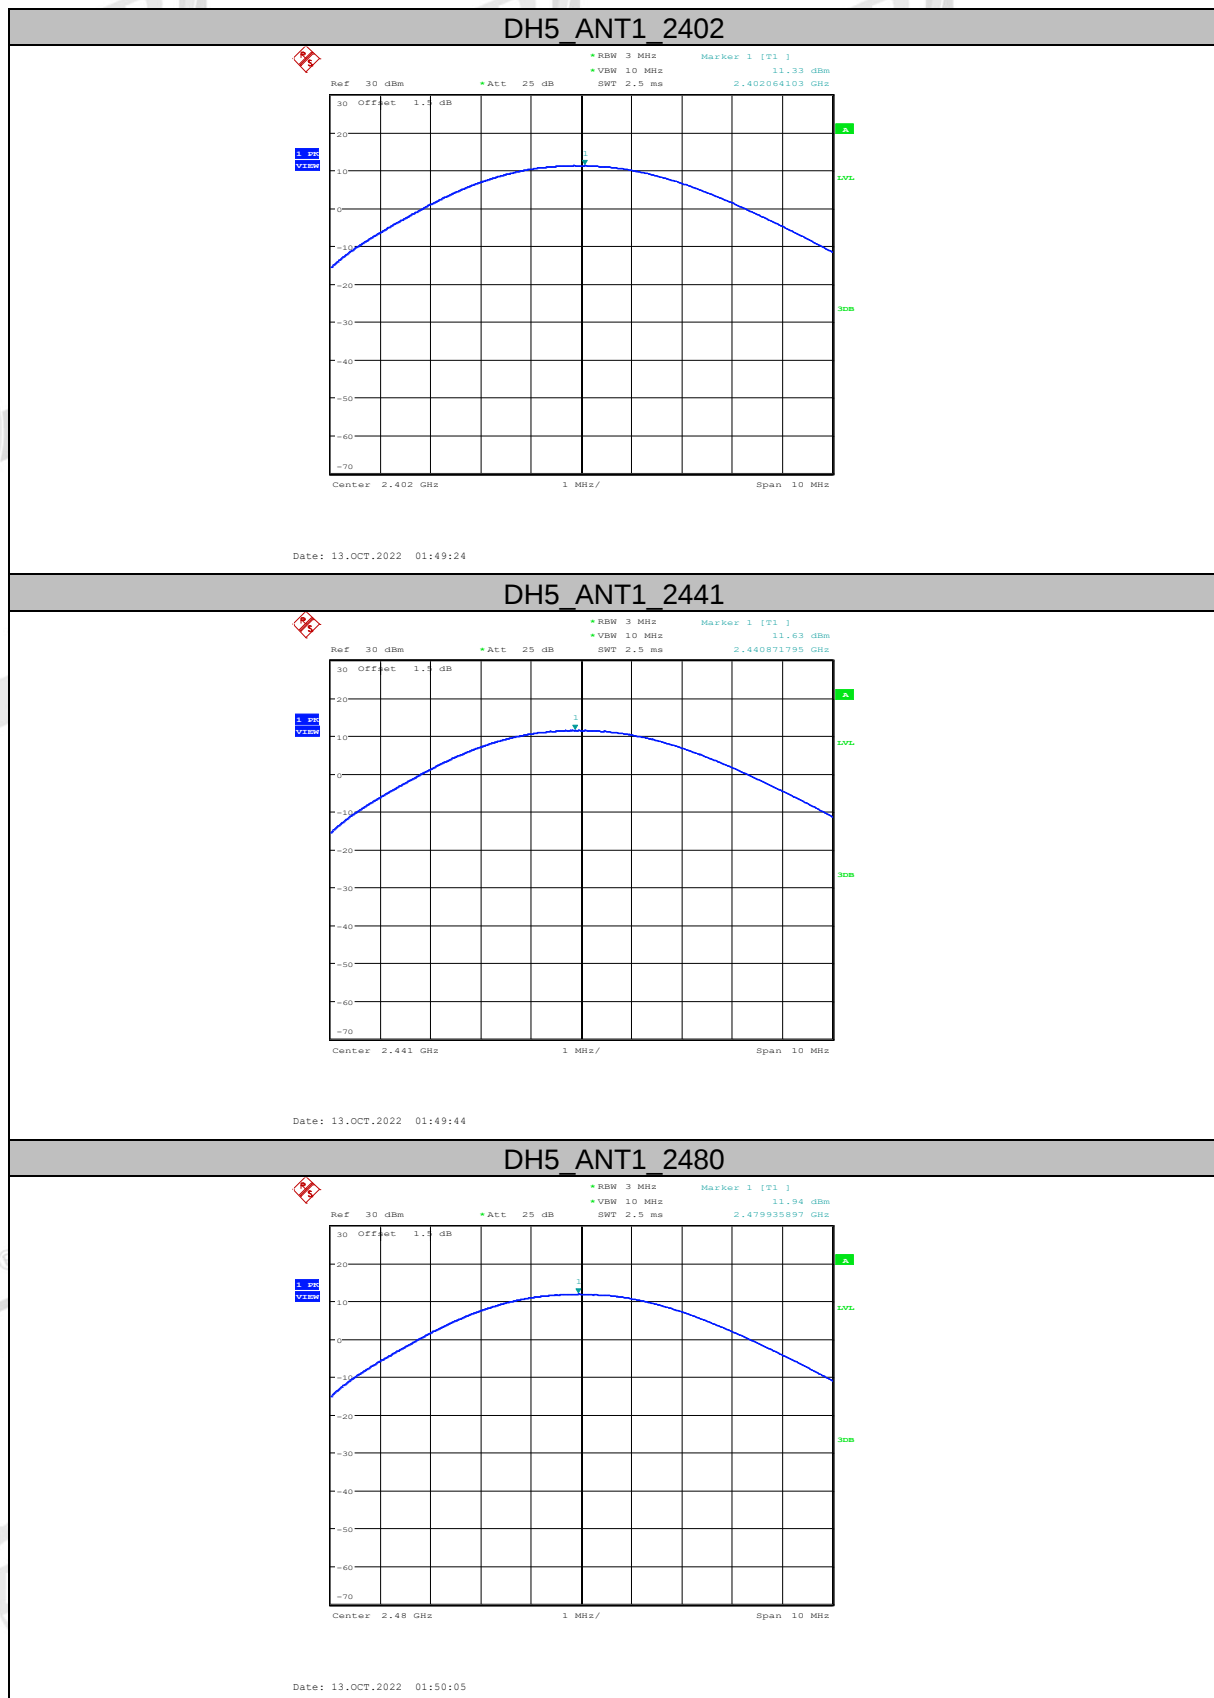


2DH5 ANT1 2402

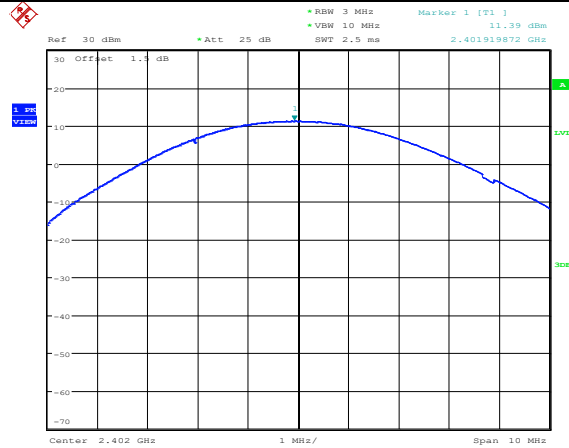


Date: 13.OCT.2022 01:50:51

2DH5 ANT1 2441

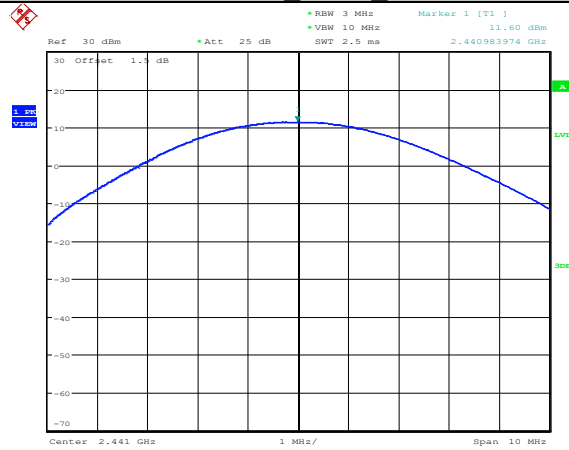


Date: 13.OCT.2022 01:51:12

2DH5 ANT1 2480

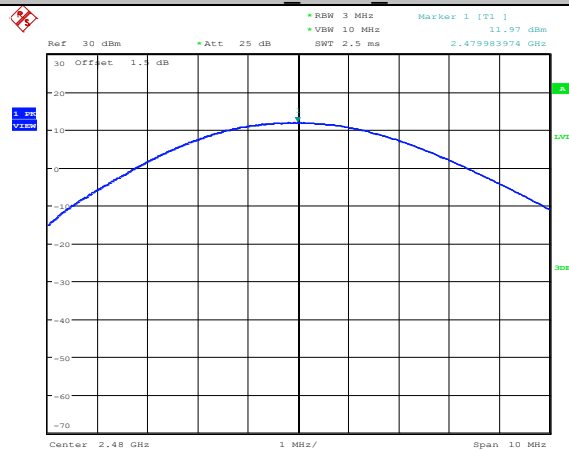


Date: 13.OCT.2022 01:51:34

3DH5 ANT1 2402

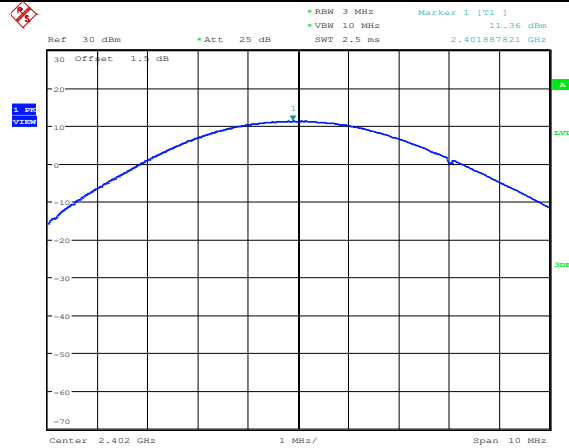


Date: 13.OCT.2022 01:51:56

3DH5 ANT1 2441

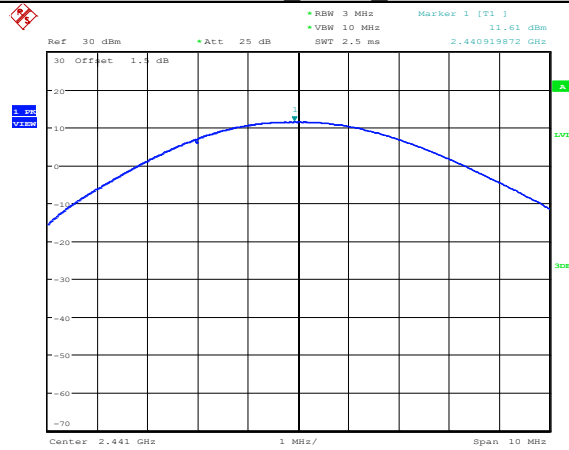

Date: 13.OCT.2022 01:52:21

3DH5 ANT1 2480

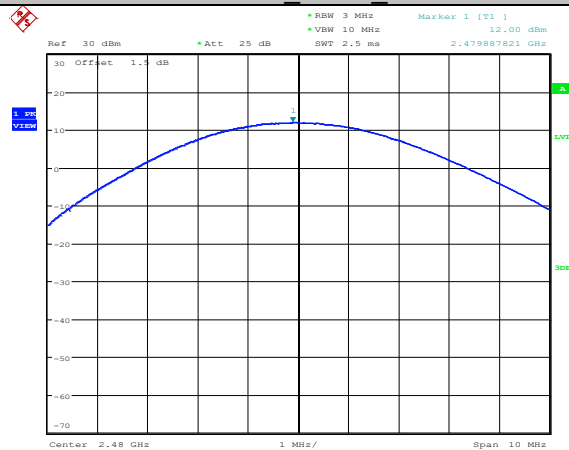

Date: 13.OCT.2022 01:52:44

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Left side:


Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	1.038	0.926	Pass
	2441	1.020	0.906	Pass
	2480	1.034	0.886	Pass
$\pi/4$ -DQPSK	2402	1.182	1.138	Pass
	2441	1.182	1.138	Pass
	2480	1.184	1.150	Pass
8DPSK	2402	1.198	1.144	Pass
	2441	1.198	1.140	Pass
	2480	1.194	1.150	Pass

Right side:


Mode	Freq. (MHz)	20 dB band width Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	1.034	0.878	Pass
	2441	1.044	0.914	Pass
	2480	1.042	0.892	Pass
$\pi/4$ -DQPSK	2402	1.184	1.164	Pass
	2441	1.210	1.162	Pass
	2480	1.180	1.156	Pass
8DPSK	2402	1.194	1.134	Pass
	2441	1.198	1.126	Pass
	2480	1.196	1.134	Pass

5.5. Original test data

Left side:

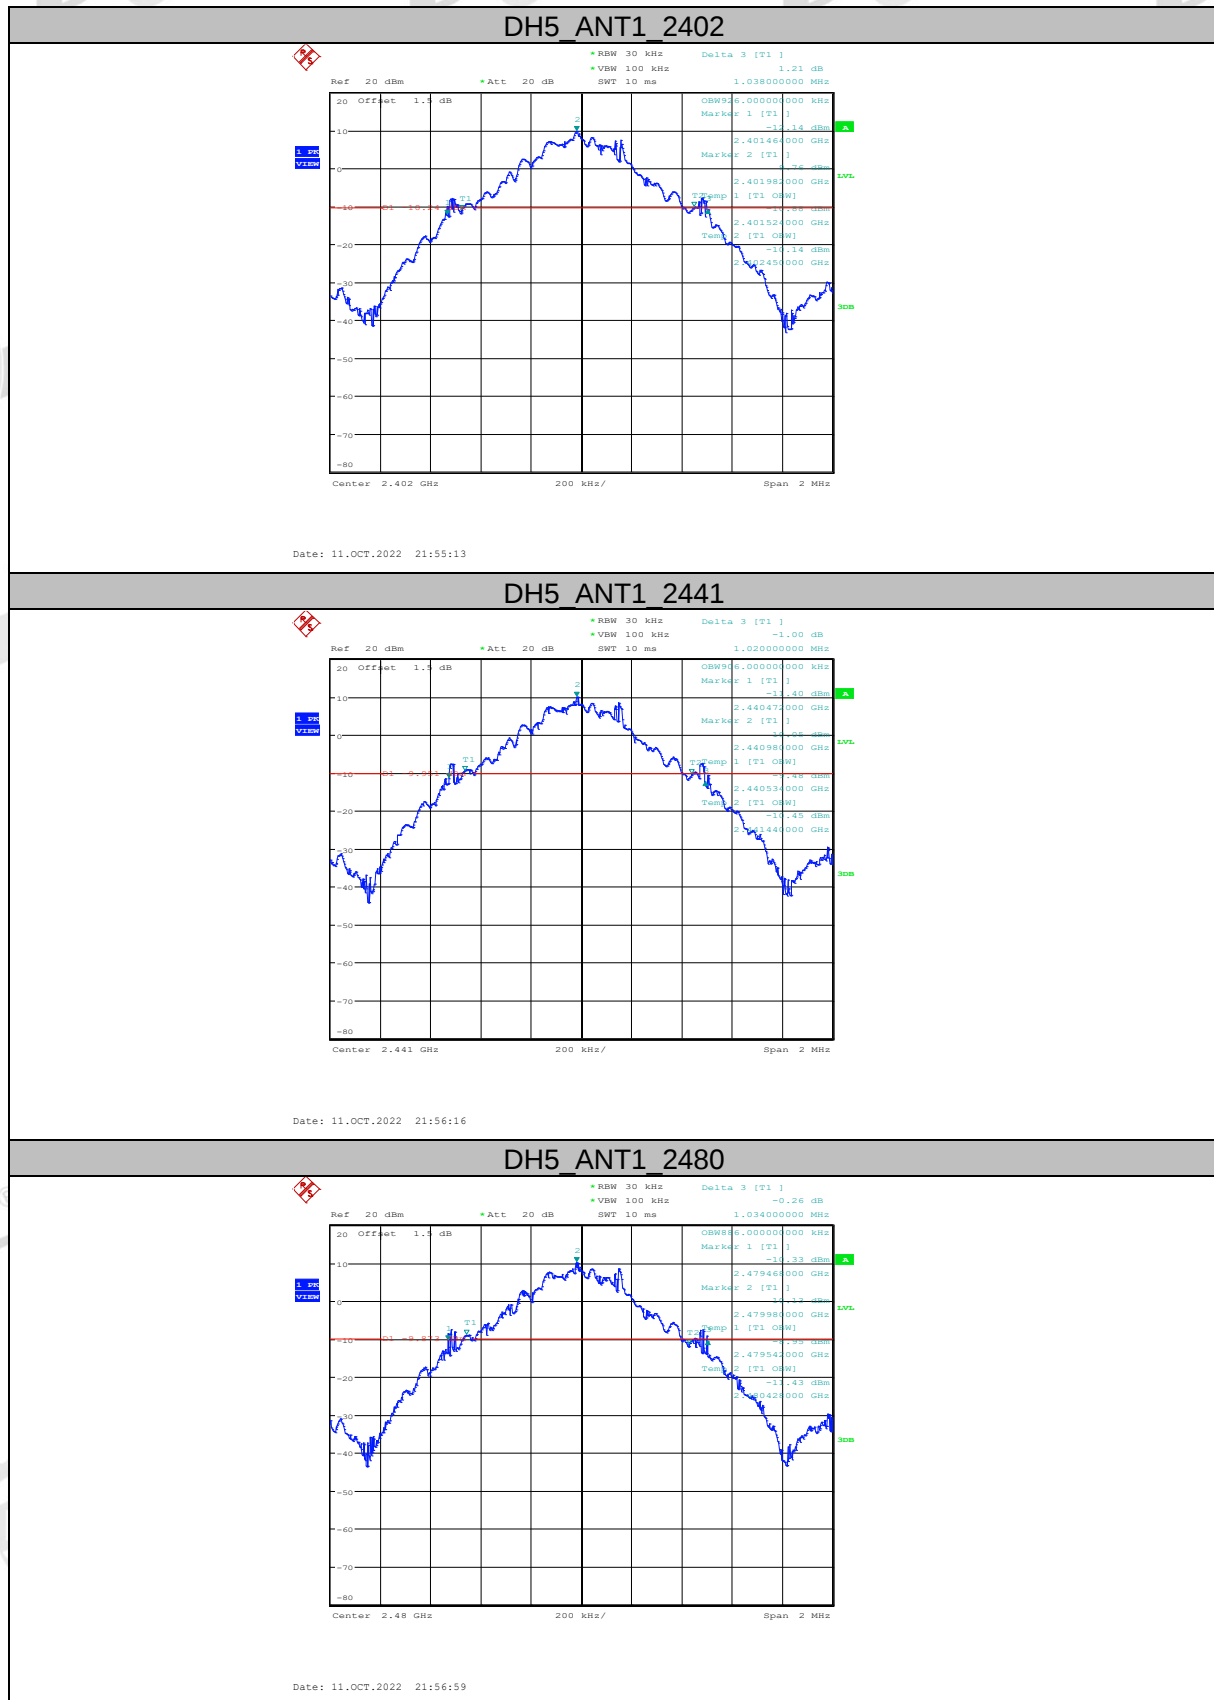


2DH5 ANT1 2402

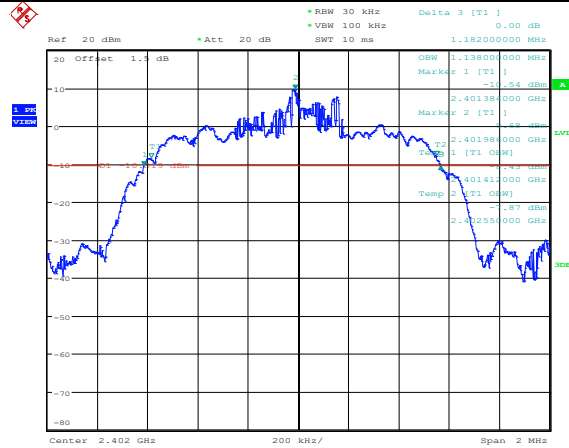


Date: 11.OCT.2022 21:58:08

2DH5 ANT1 2441

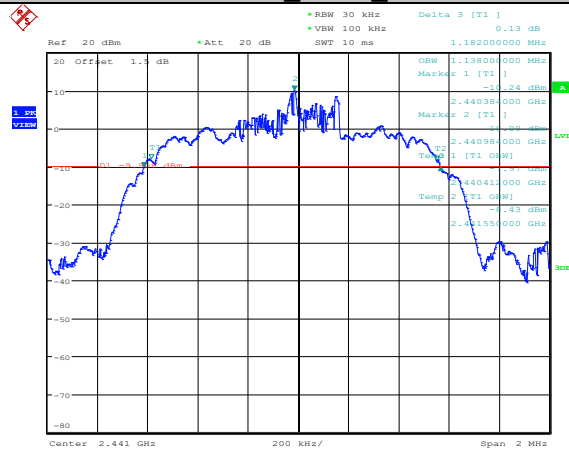


Date: 11.OCT.2022 21:59:19

2DH5 ANT1 2480

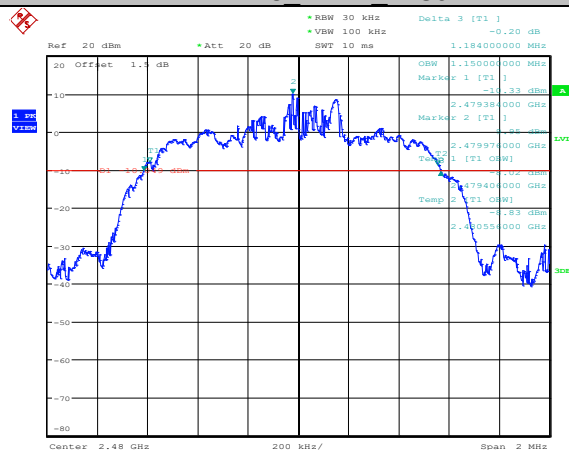


Date: 11.OCT.2022 22:00:04

3DH5 ANT1 2402

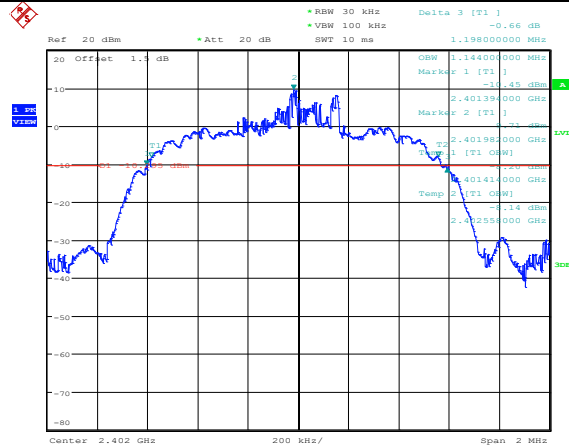


Date: 11.OCT.2022 22:01:06

3DH5 ANT1 2441

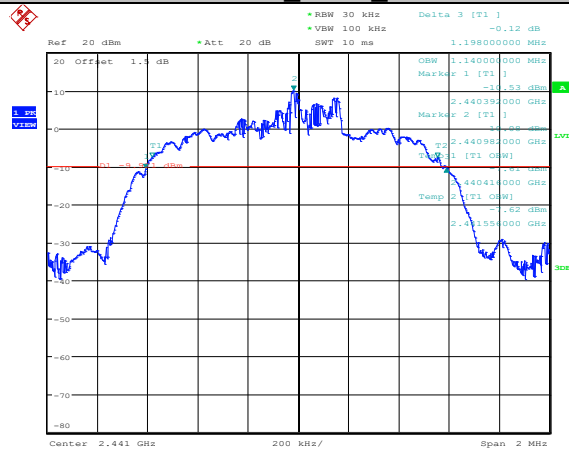


Date: 11.OCT.2022 22:02:12

3DH5 ANT1 2480

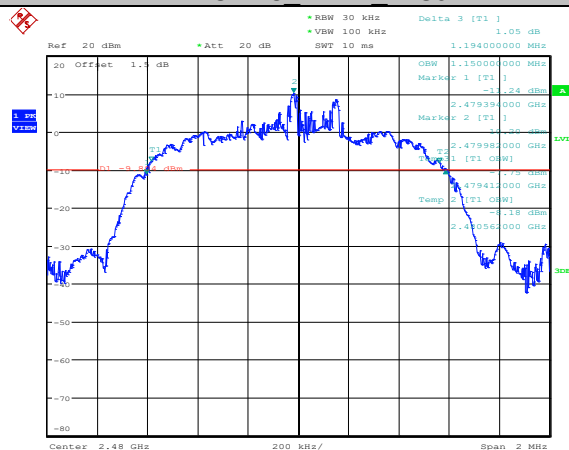


Date: 11.OCT.2022 22:02:57

Right side:

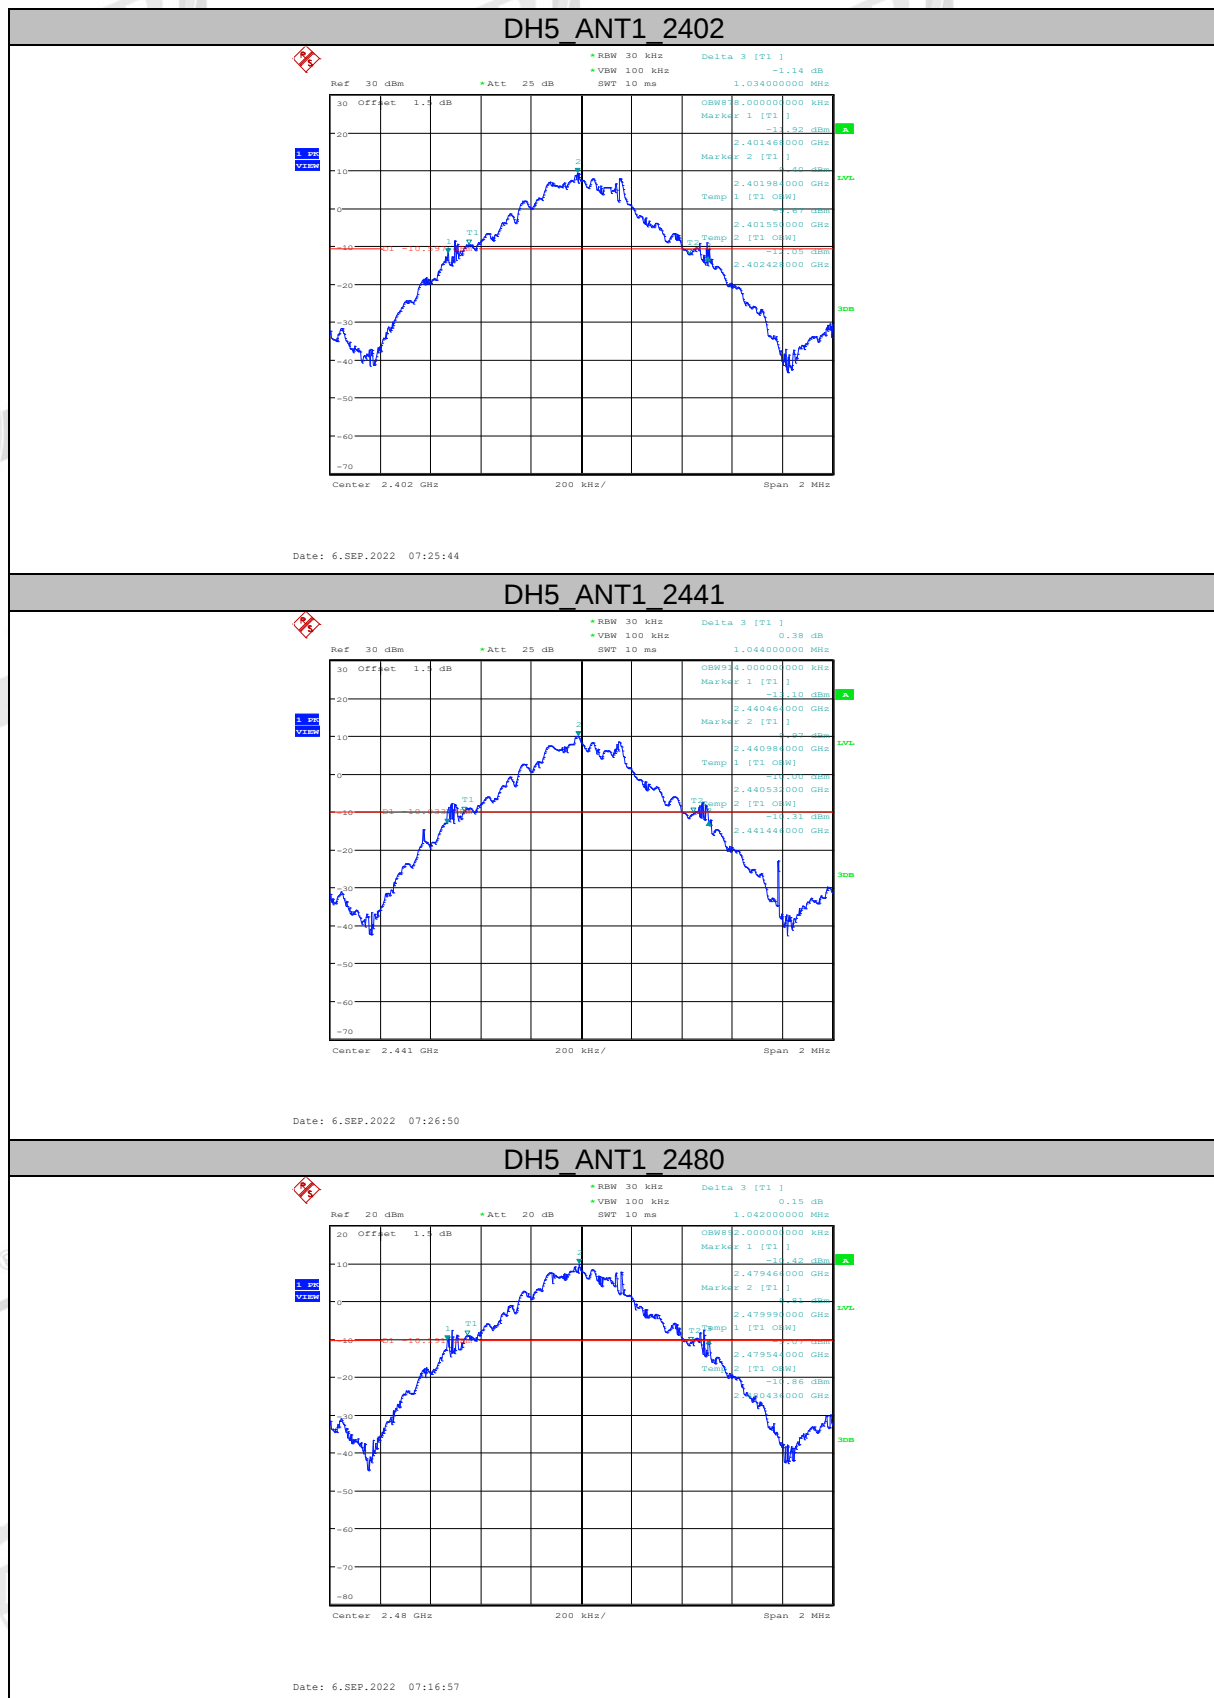


2DH5 ANT1_2402

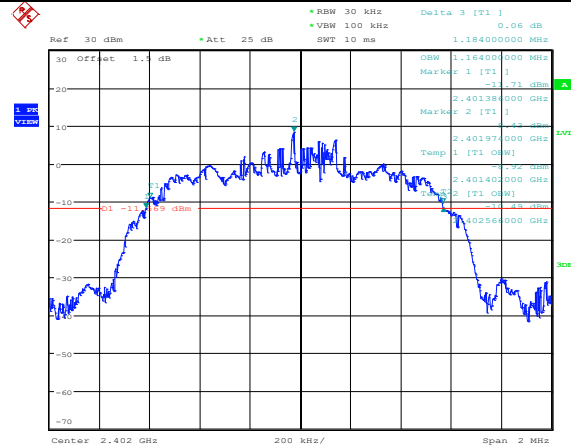


Date: 6.SEP.2022 07:28:28

2DH5 ANT1_2441

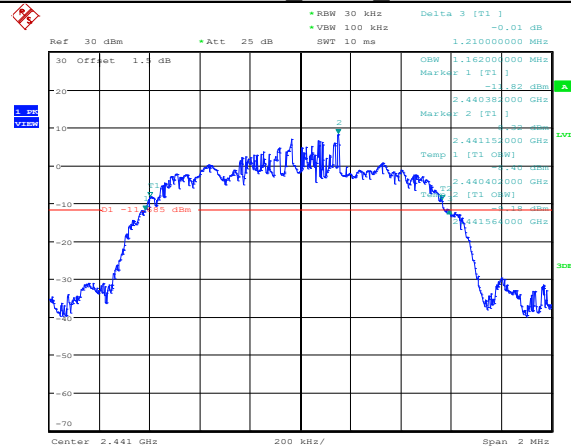


Date: 6.SEP.2022 07:30:34

2DH5 ANT1_2480

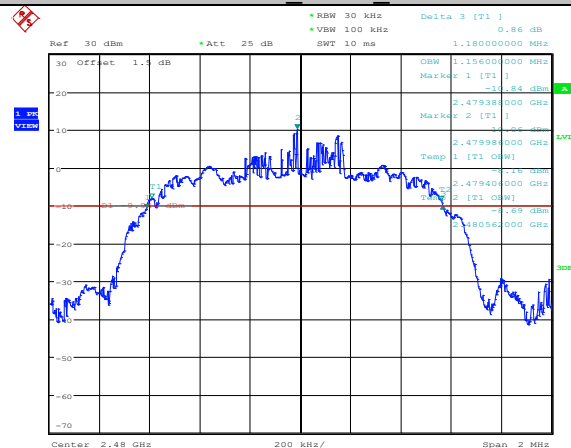


Date: 6.SEP.2022 07:31:59

3DH5 ANT1_2402

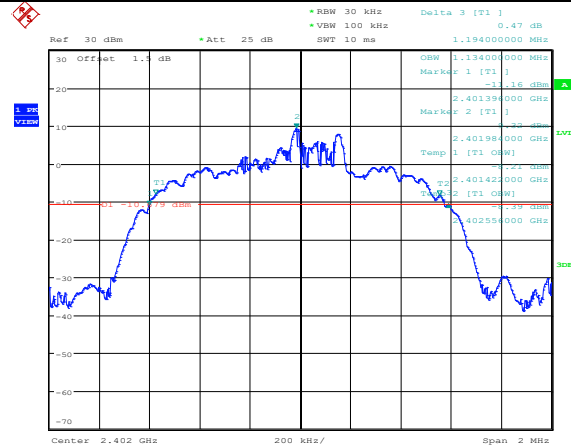


Date: 6.SEP.2022 07:34:18

3DH5 ANT1_2441

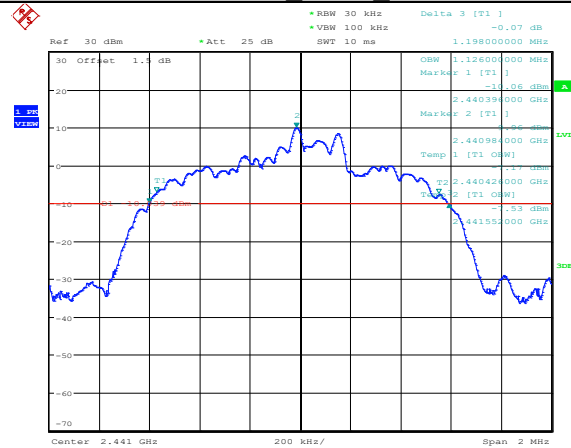

Date: 6.SEP.2022 07:36:57

3DH5 ANT1_2480

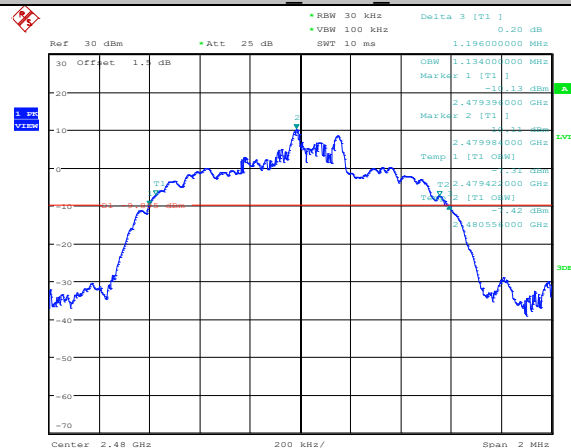

Date: 6.SEP.2022 07:39:47

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Left side:


Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worst case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.003	1.038	≥0.692	Pass
$\pi/4$ -DQPSK	1.006	1.184	≥0.789	Pass
8DPSK	1.003	1.198	≥0.799	Pass

Right side:




Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worst case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.003	1.044	≥0.696	Pass
$\pi/4$ -DQPSK	1.003	1.210	≥0.807	Pass
8DPSK	1.003	1.198	≥0.799	Pass

6.5. Original test data

Left side:

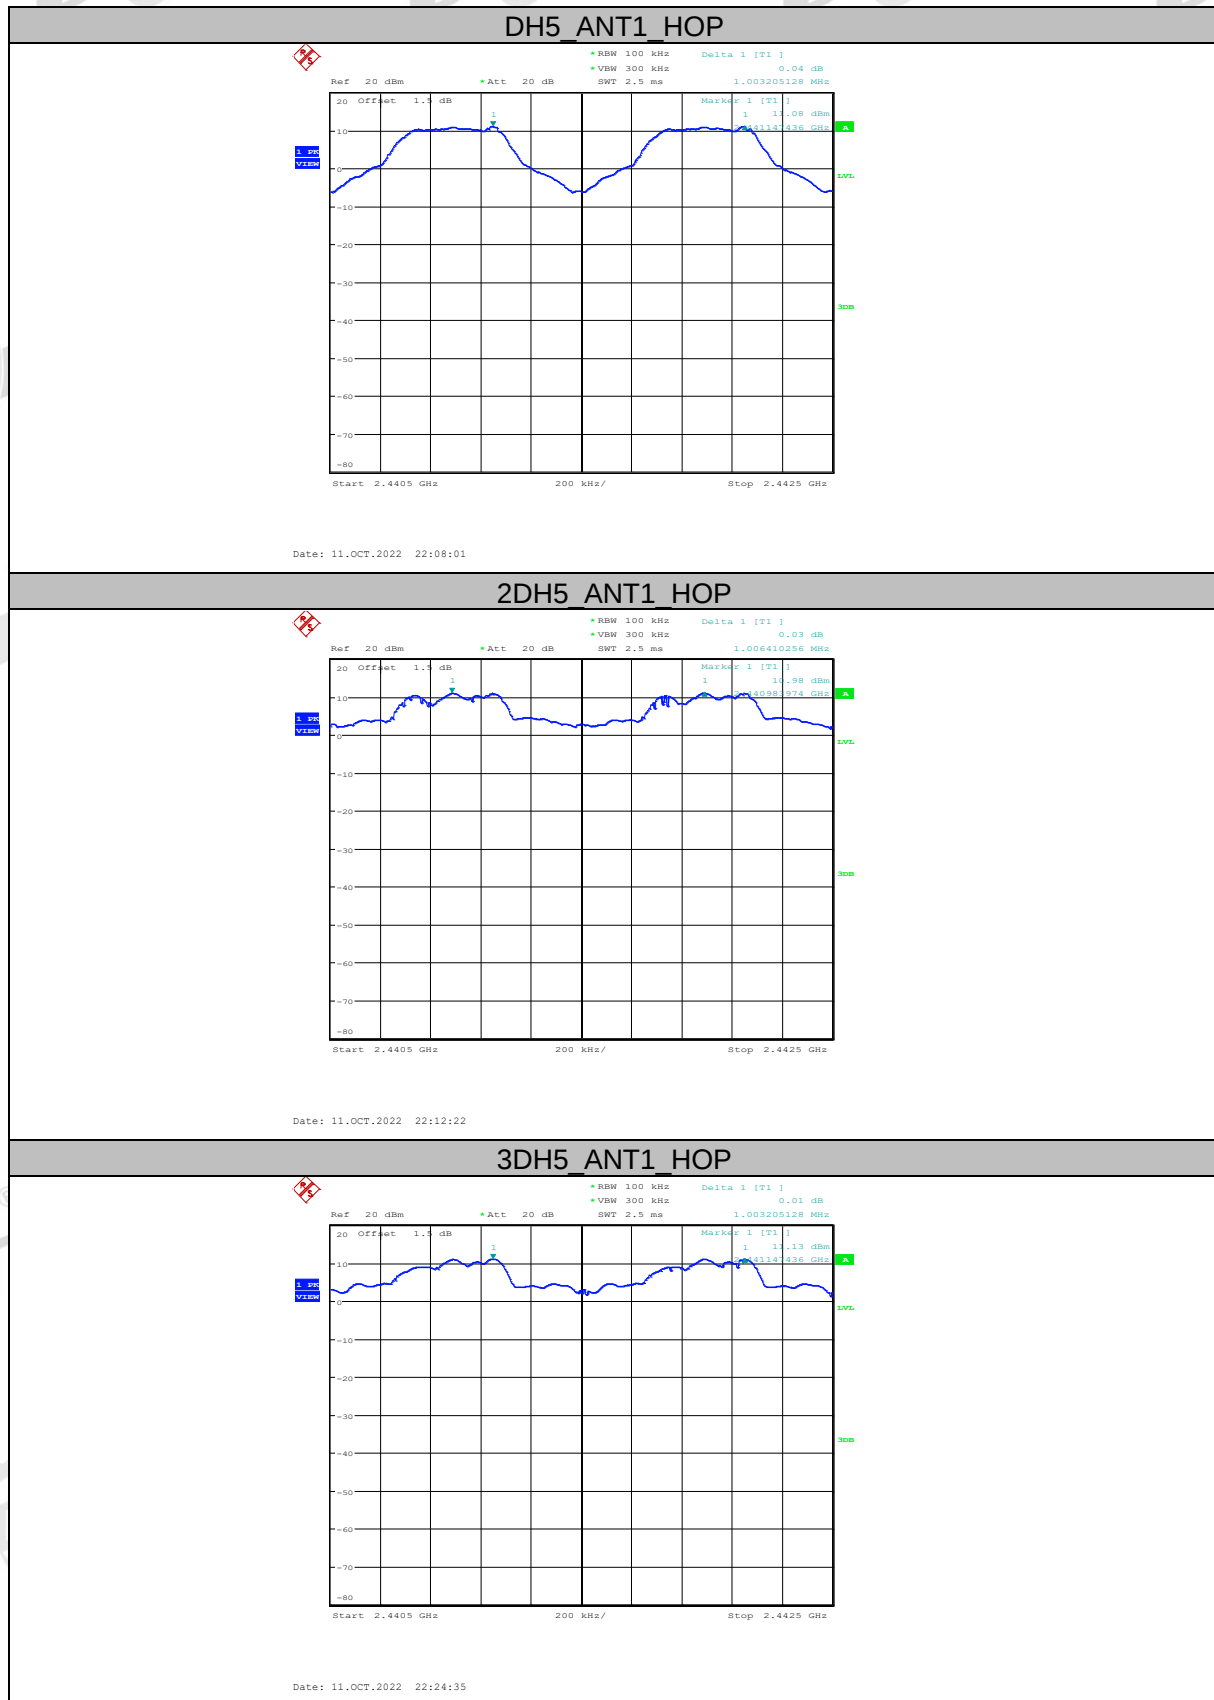

Right side:

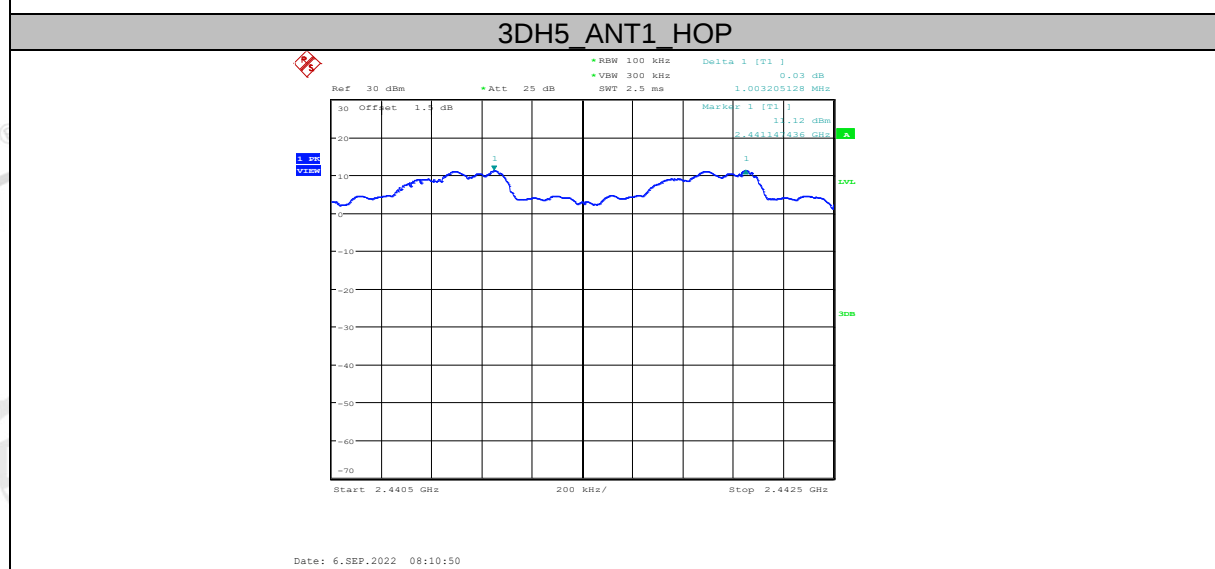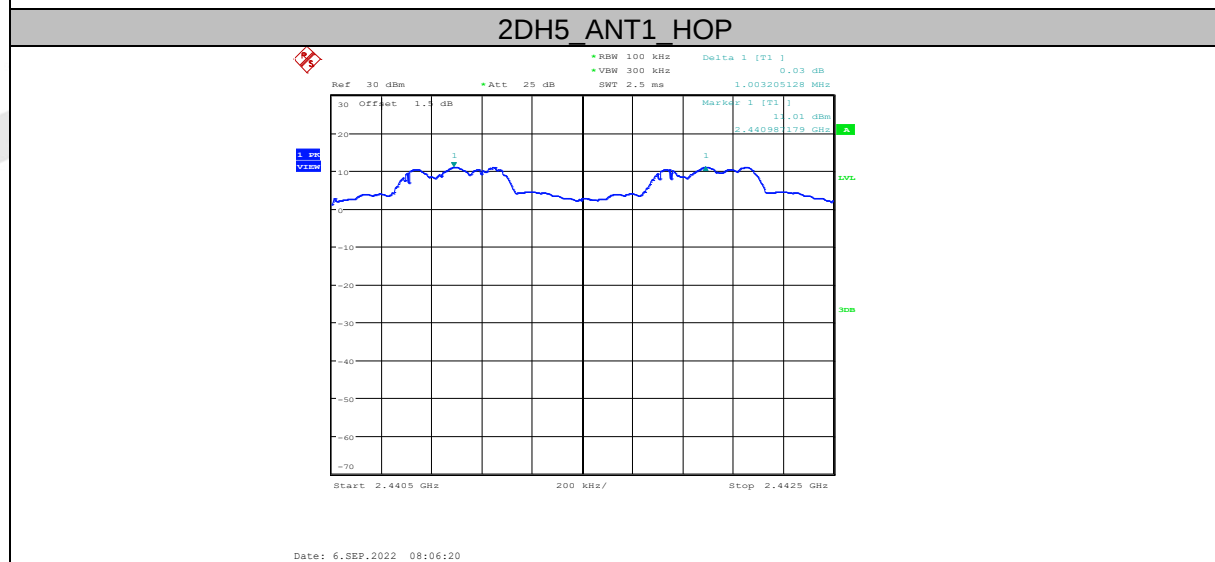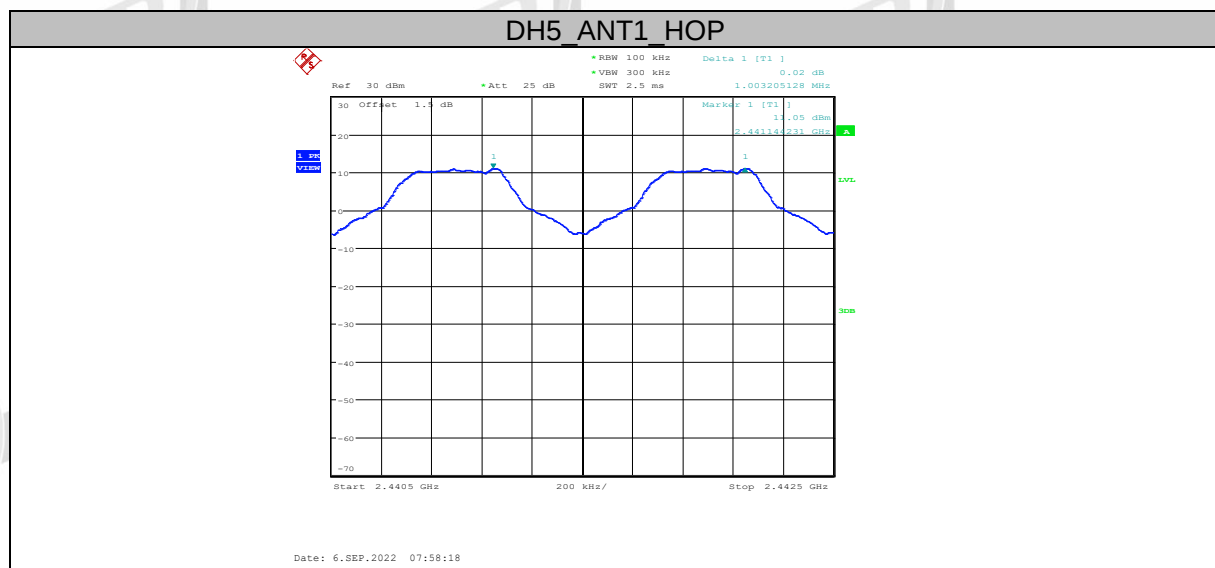

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Left side:

Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

Right side:


Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

7.5. Original test data

Left side:



Right side:

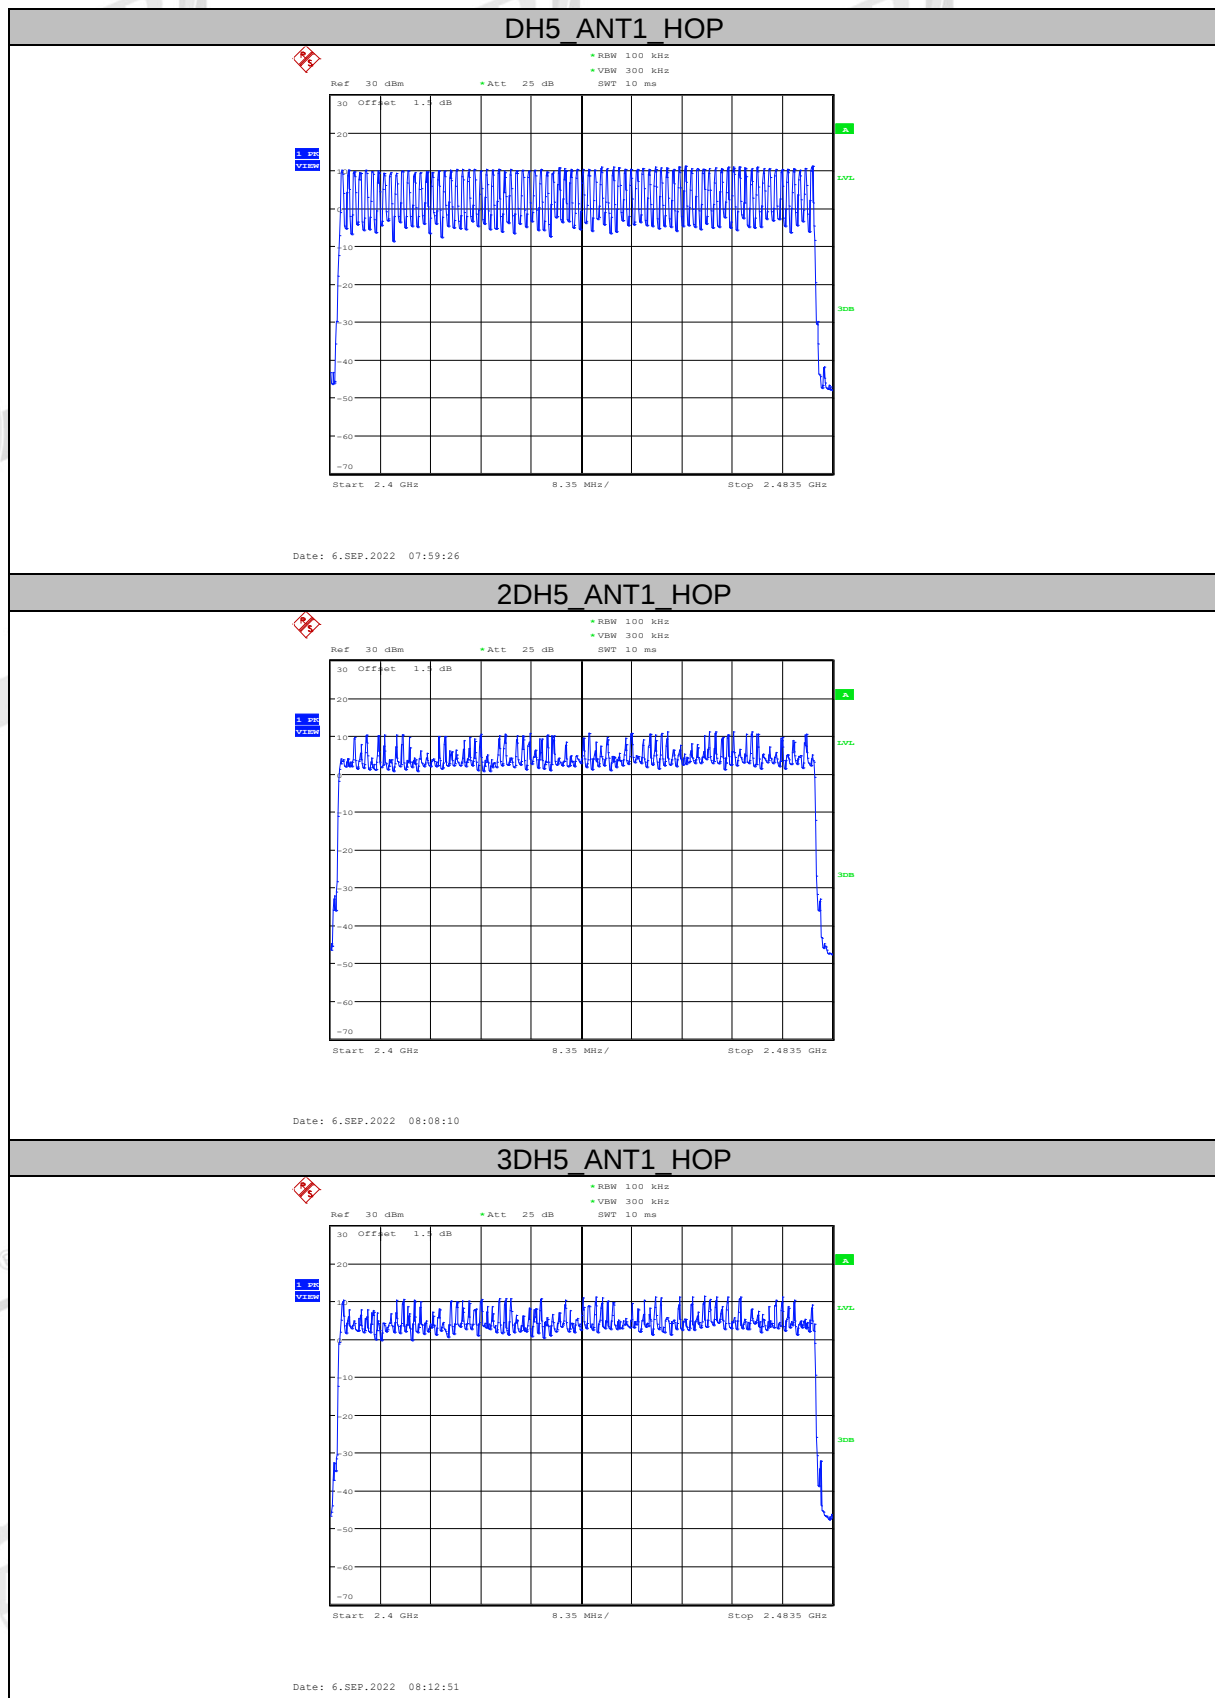

8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.

8.4. Test result

Left side:

Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.057	0.36	157	<400ms	Pass
DH3	0.181	1.62	112	<400ms	Pass
DH5	0.201	2.87	70	<400ms	Pass
2DH1	0.060	0.37	161	<400ms	Pass
2DH3	0.172	1.62	106	<400ms	Pass
2DH5	0.193	2.88	67	<400ms	Pass
3DH1	0.056	0.36	156	<400ms	Pass
3DH3	0.156	1.62	96	<400ms	Pass
3DH5	0.192	2.87	67	<400ms	Pass

Note: Dwell time = total hops *pulse's on time.


Right side:


Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.055	0.36	154	<400ms	Pass
DH3	0.186	1.62	115	<400ms	Pass
DH5	0.253	2.87	88	<400ms	Pass
2DH1	0.062	0.37	167	<400ms	Pass
2DH3	0.183	1.62	113	<400ms	Pass
2DH5	0.241	2.87	84	<400ms	Pass
3DH1	0.062	0.37	167	<400ms	Pass
3DH3	0.183	1.62	113	<400ms	Pass
3DH5	0.242	2.88	84	<400ms	Pass

Note: Dwell time = total hops *pulse's on time.

8.5. Original test data


Left side:

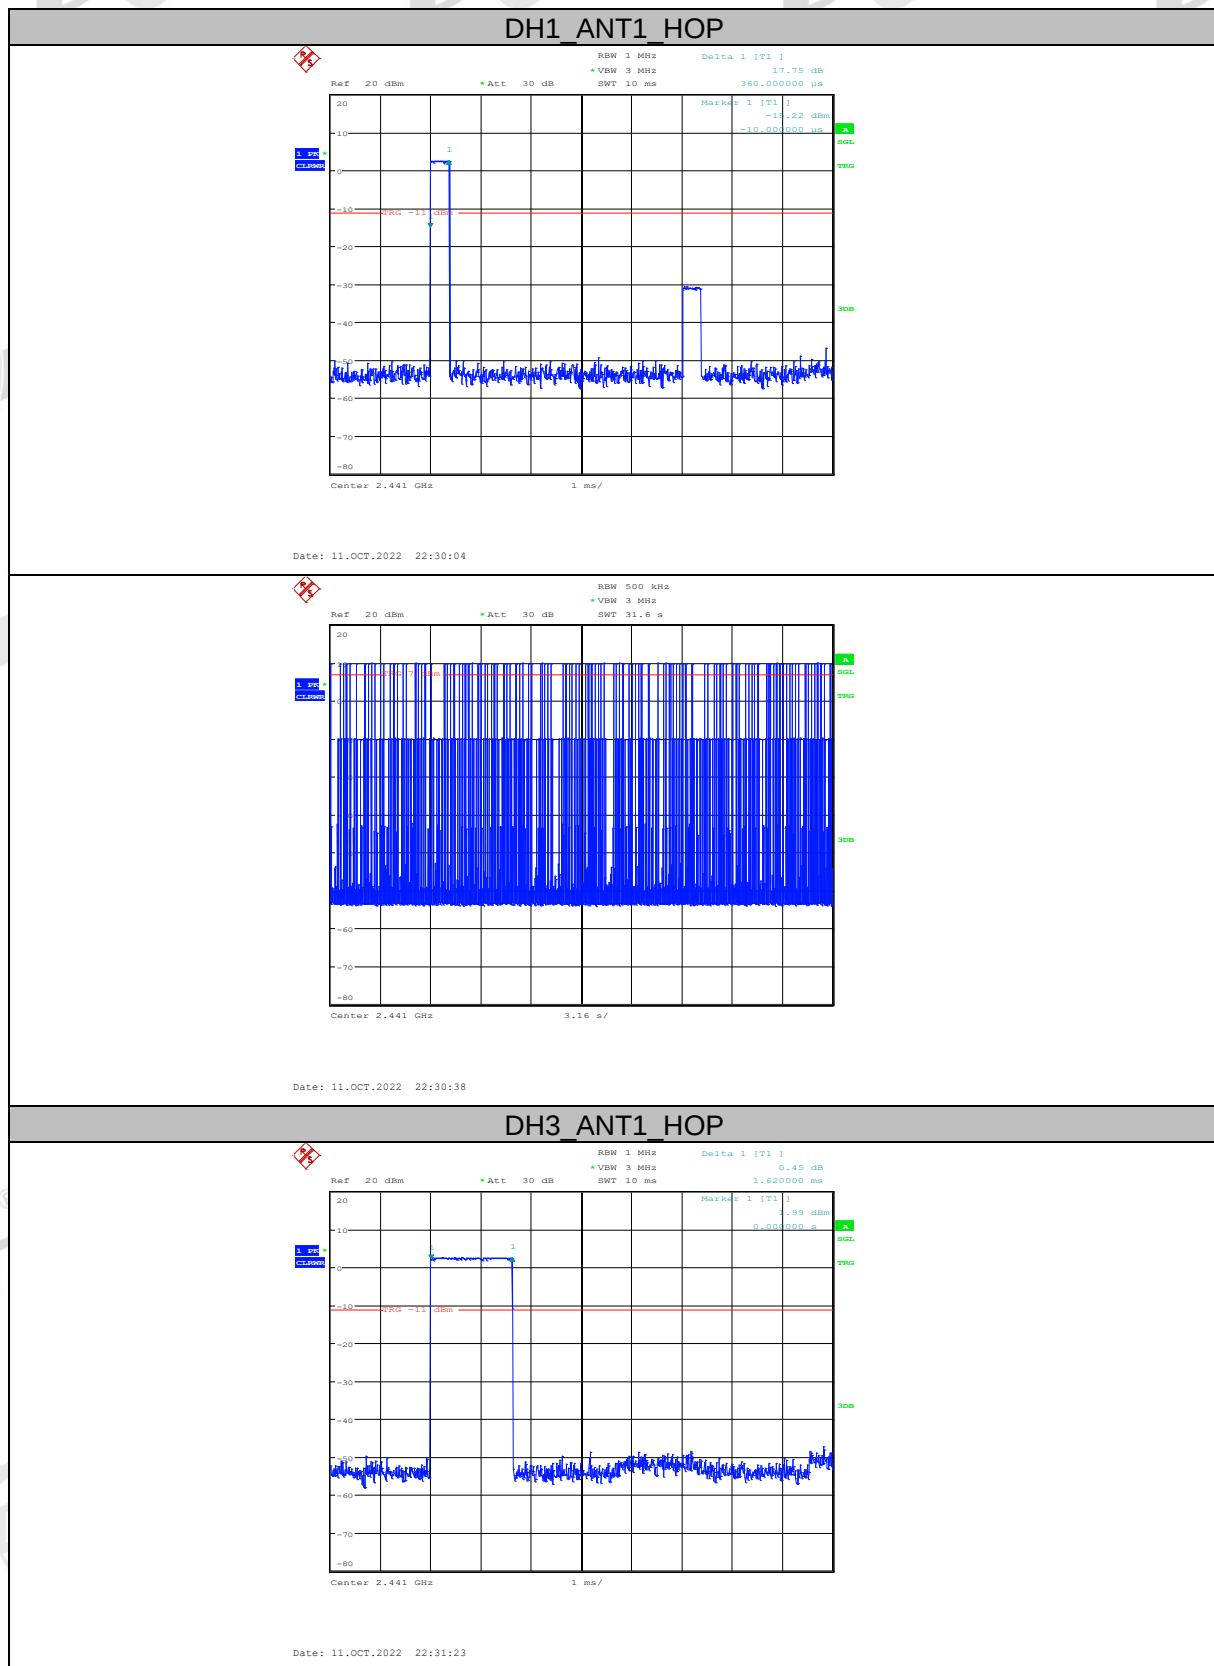

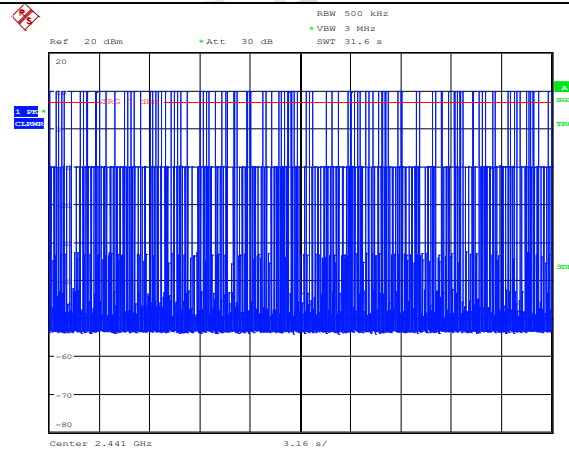


Date: 11.OCT.2022 22:31:58

DH5_ANT1_HOP

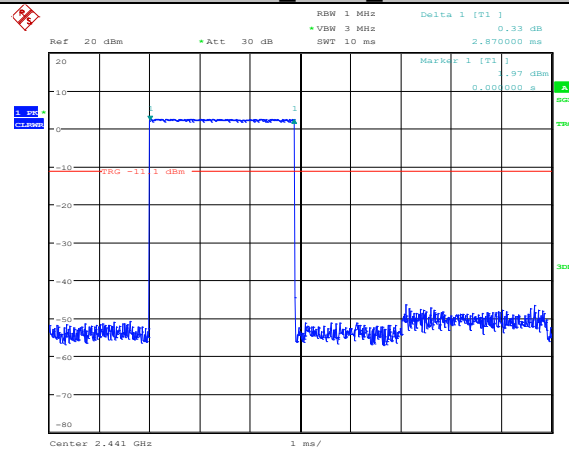


Date: 11.OCT.2022 22:32:35

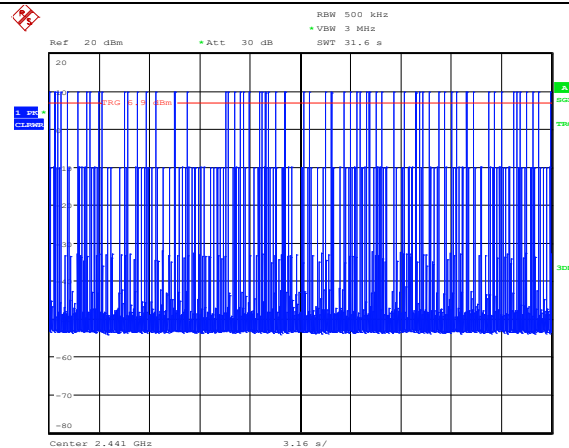


Date: 11.OCT.2022 22:33:10

2DH1 ANT1_HOP

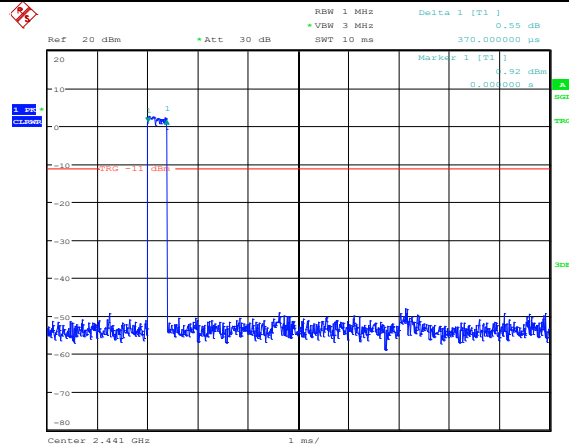


Date: 11.OCT.2022 22:33:52

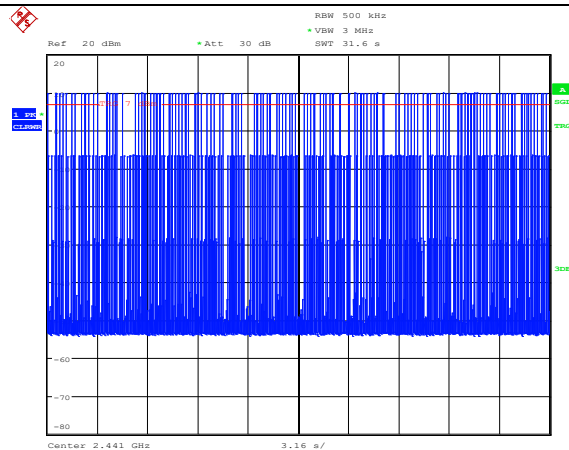


Date: 11.OCT.2022 22:34:28

2DH3 ANT1_HOP

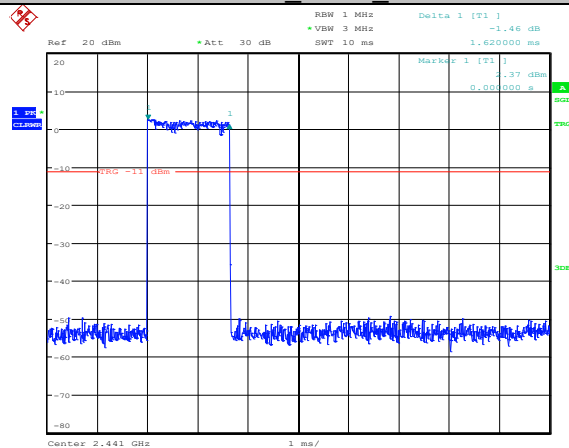


Date: 11.OCT.2022 22:35:15

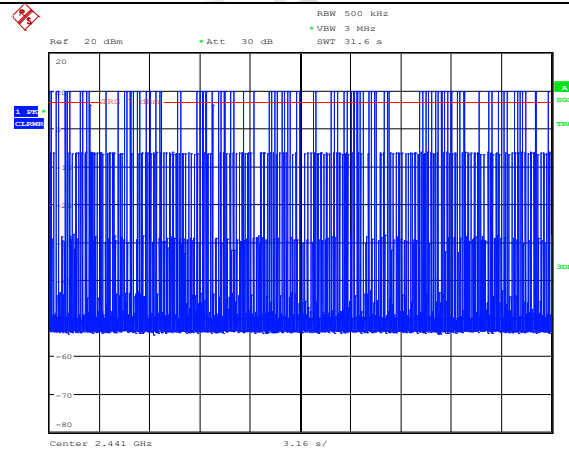


Date: 11.OCT.2022 22:35:49

2DH5_ANT1_HOP

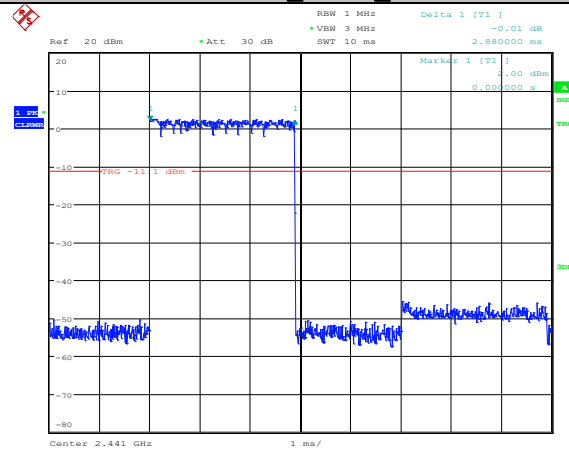


Date: 11.OCT.2022 22:36:19

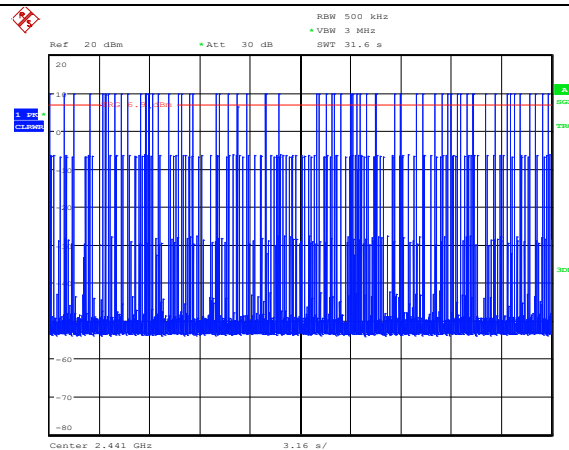


Date: 11.OCT.2022 22:36:54

3DH1 ANT1 HOP

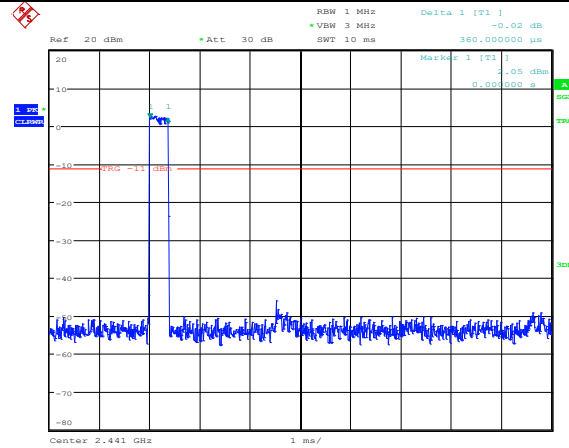


Date: 11.OCT.2022 22:37:34

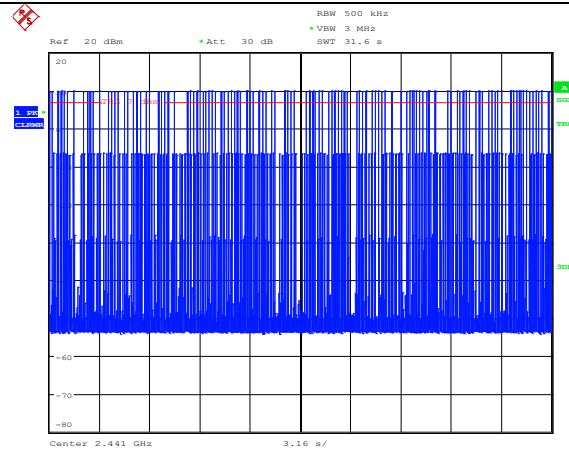


Date: 11.OCT.2022 22:38:09

3DH3 ANT1 HOP

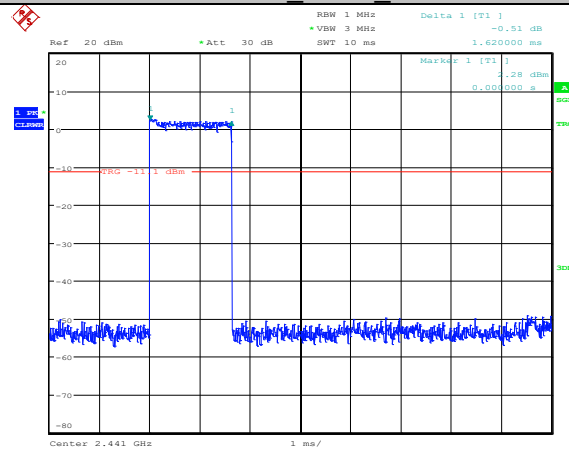


Date: 11.OCT.2022 22:38:44

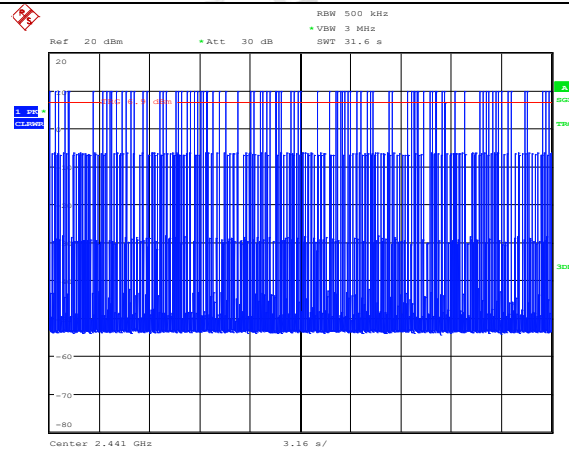


Date: 11.OCT.2022 22:39:18

3DH5_ANT1_HOP

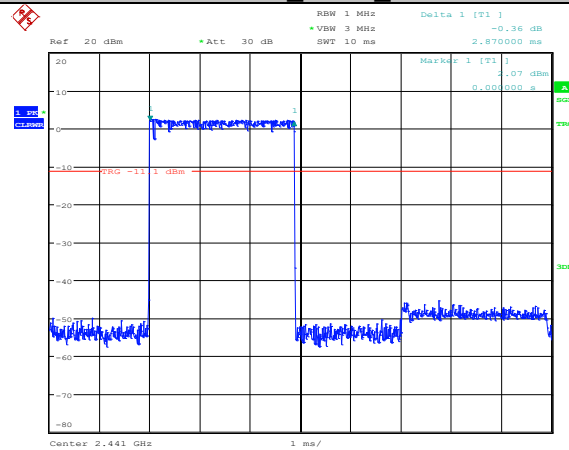



Date: 11.OCT.2022 22:39:50

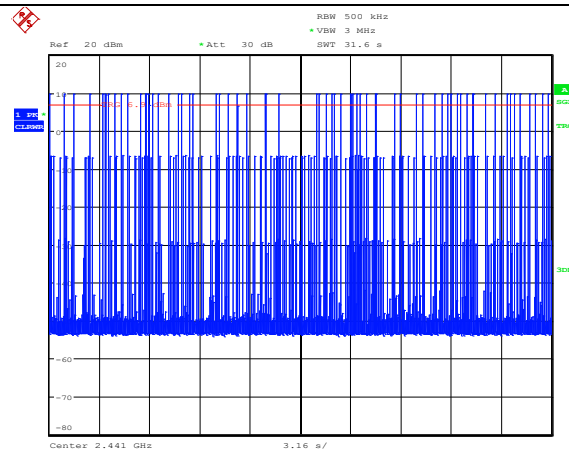



Date: 11.OCT.2022 22:40:25

Right side:

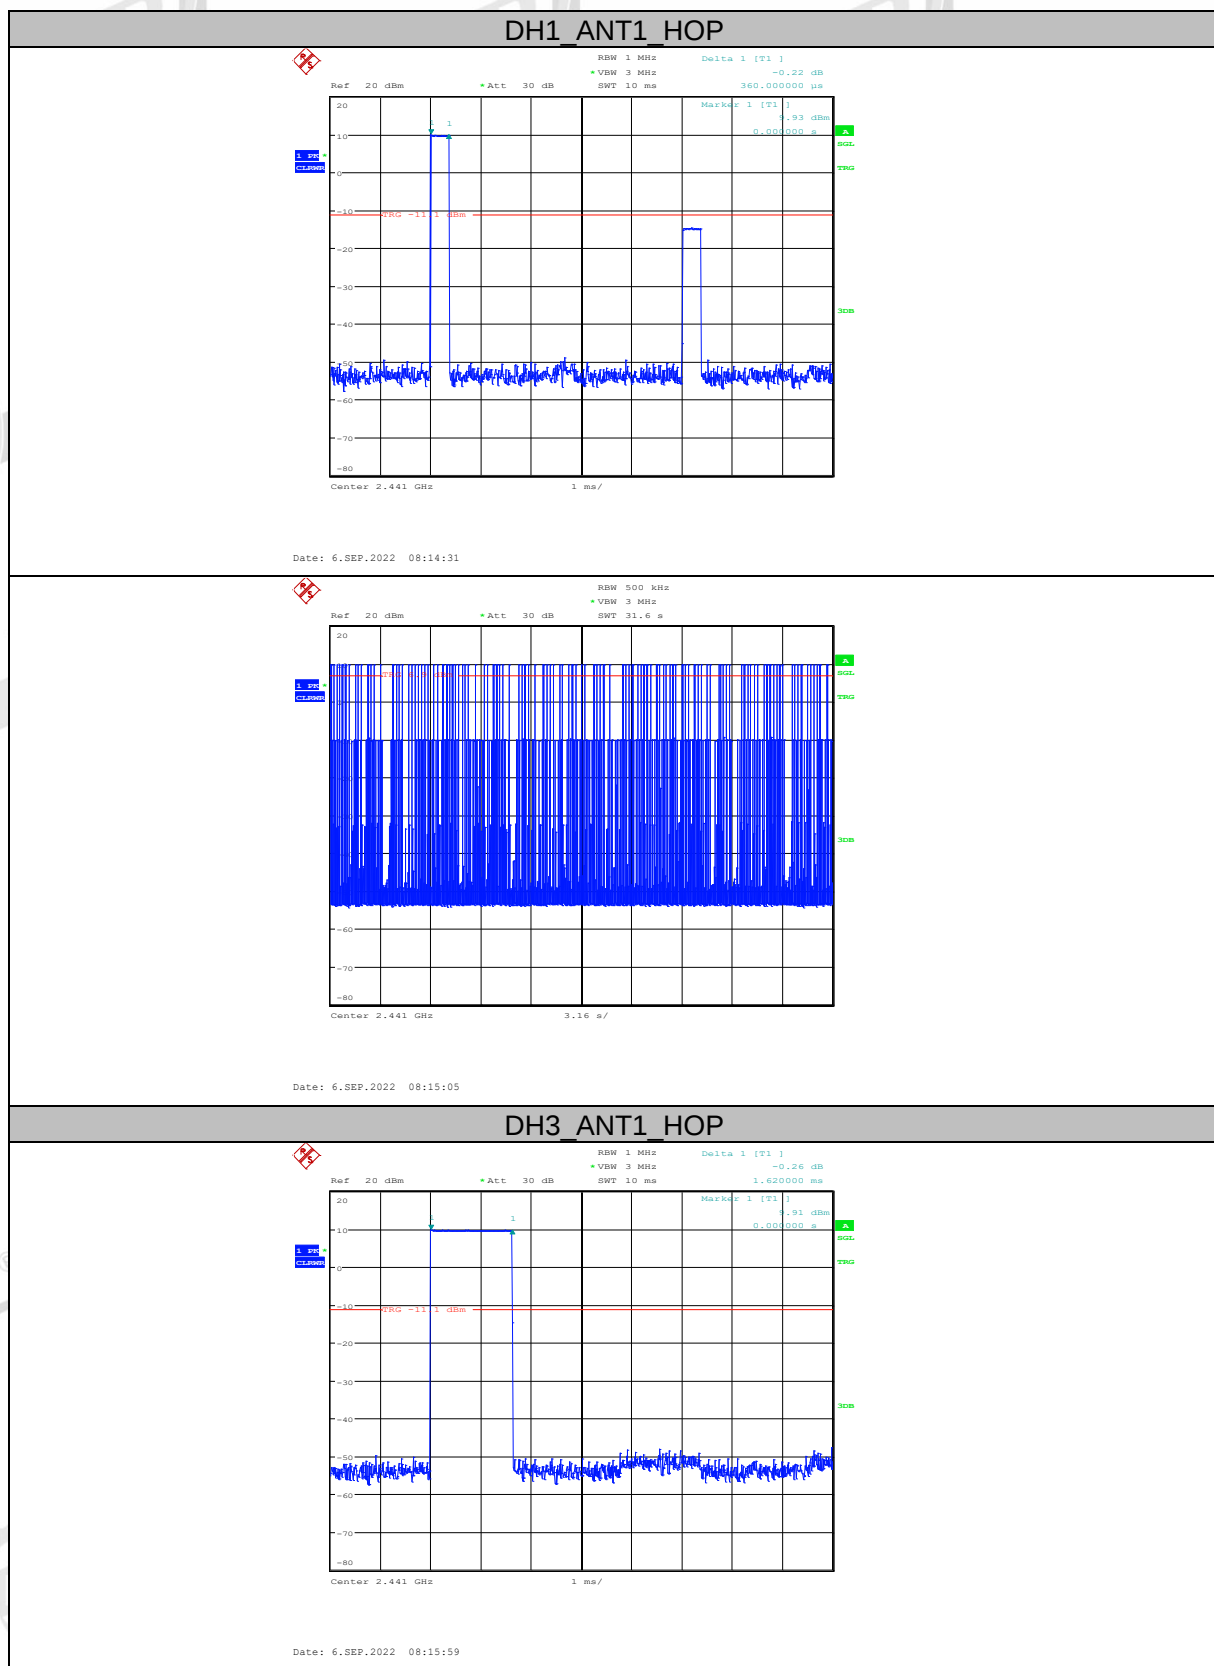


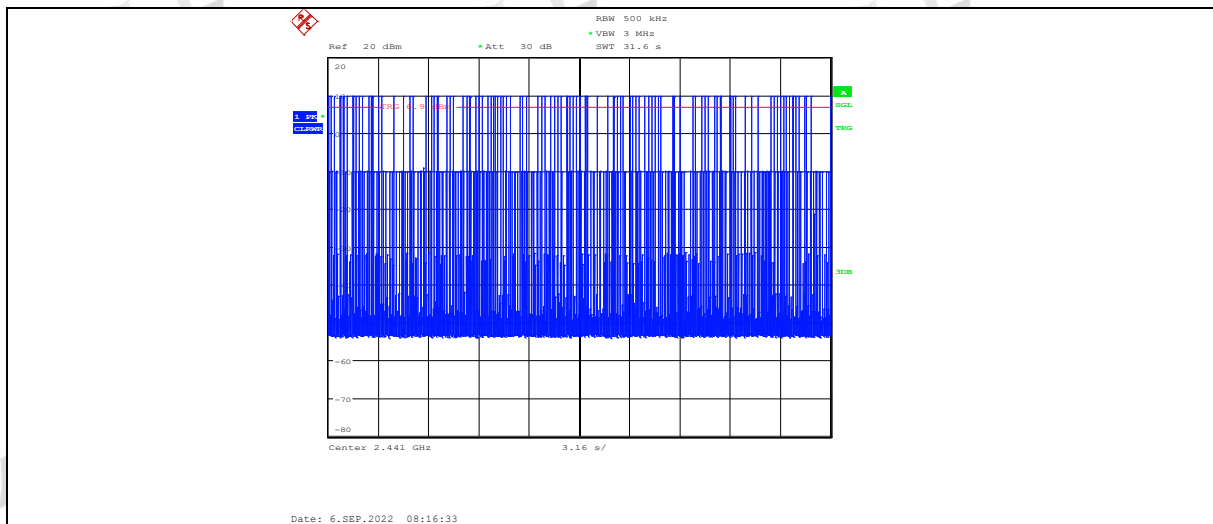


DH5 ANT1 HOP

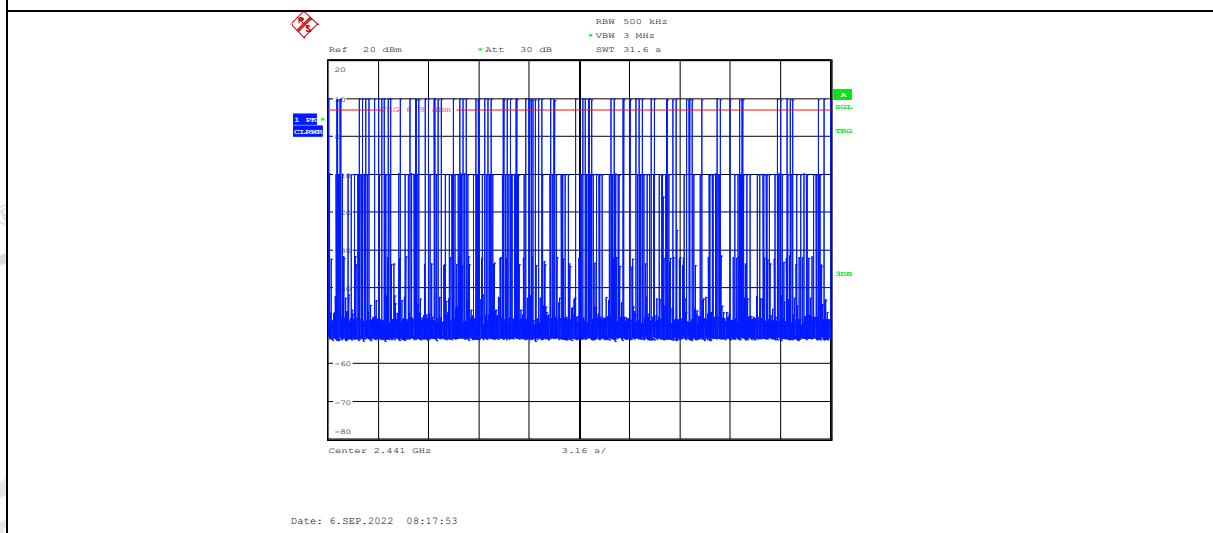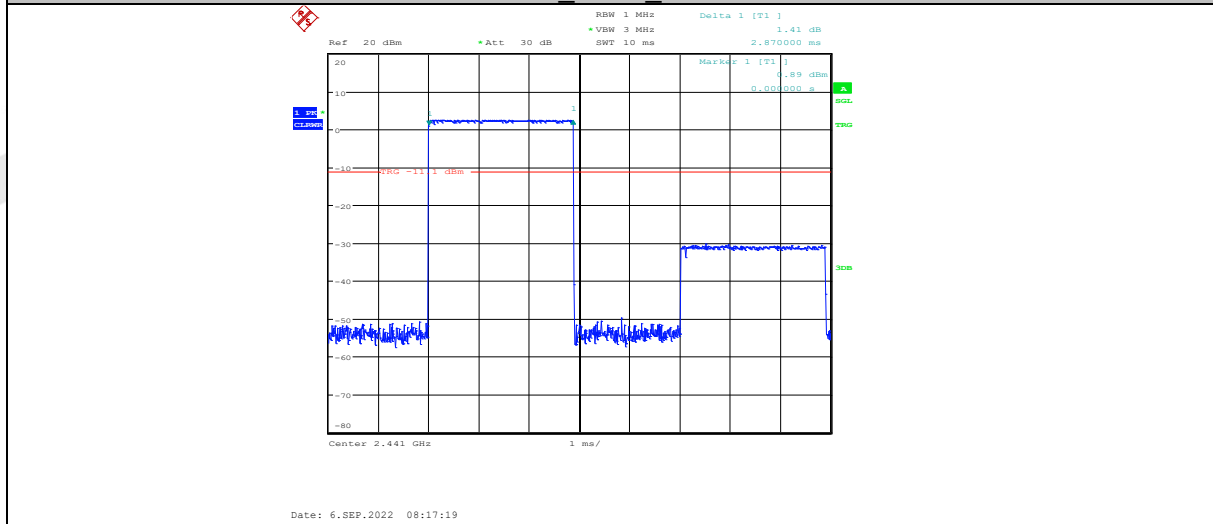

2DH1_ANT1_HOP

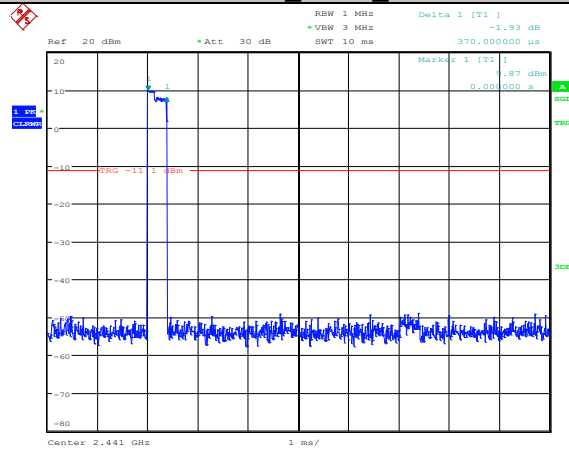


Date: 6.SEP.2022 08:18:30

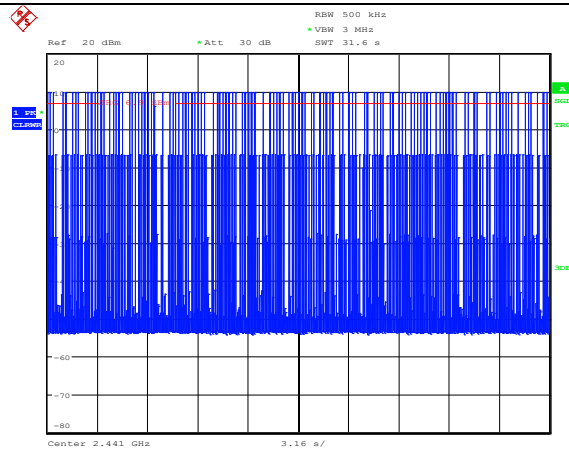


Date: 6.SEP.2022 08:19:05



2DH3_ANT1_HOP

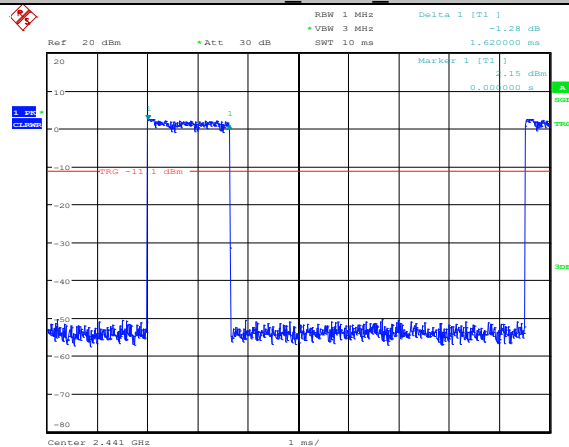


Date: 6.SEP.2022 08:19:49

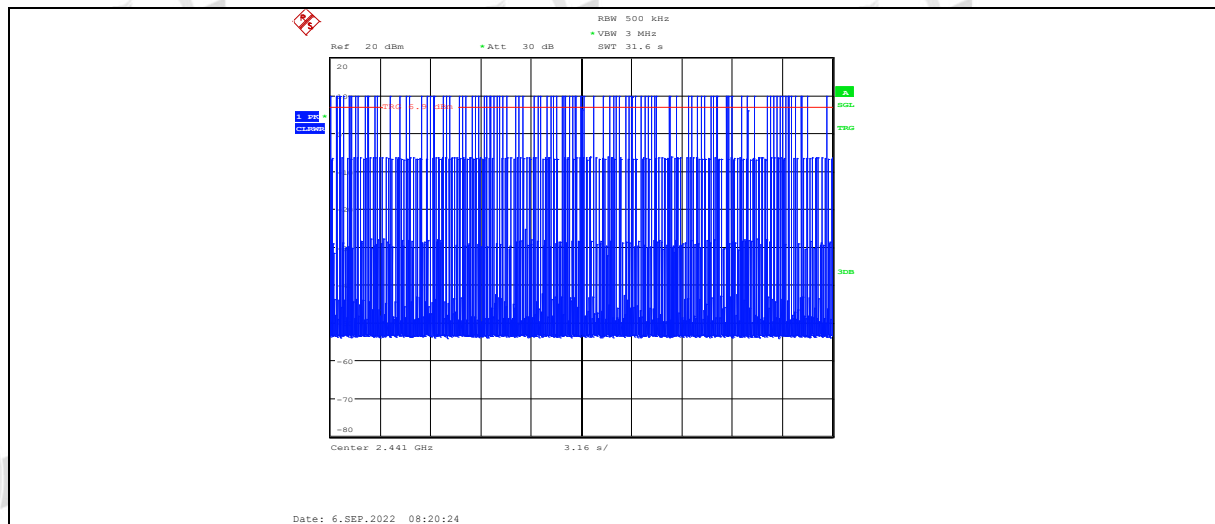


2DH5 ANT1 HOP

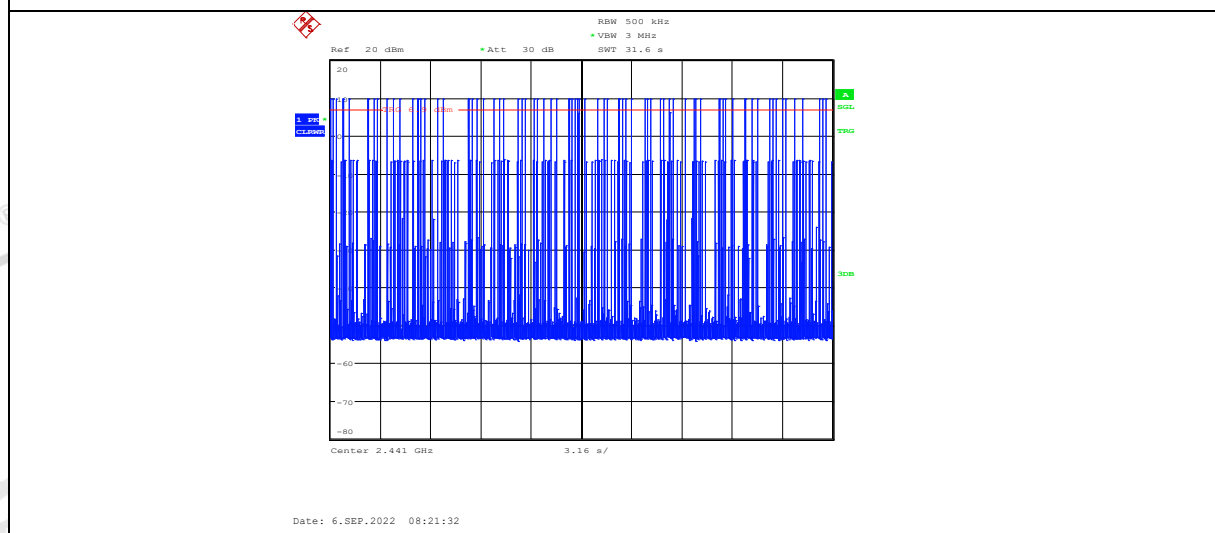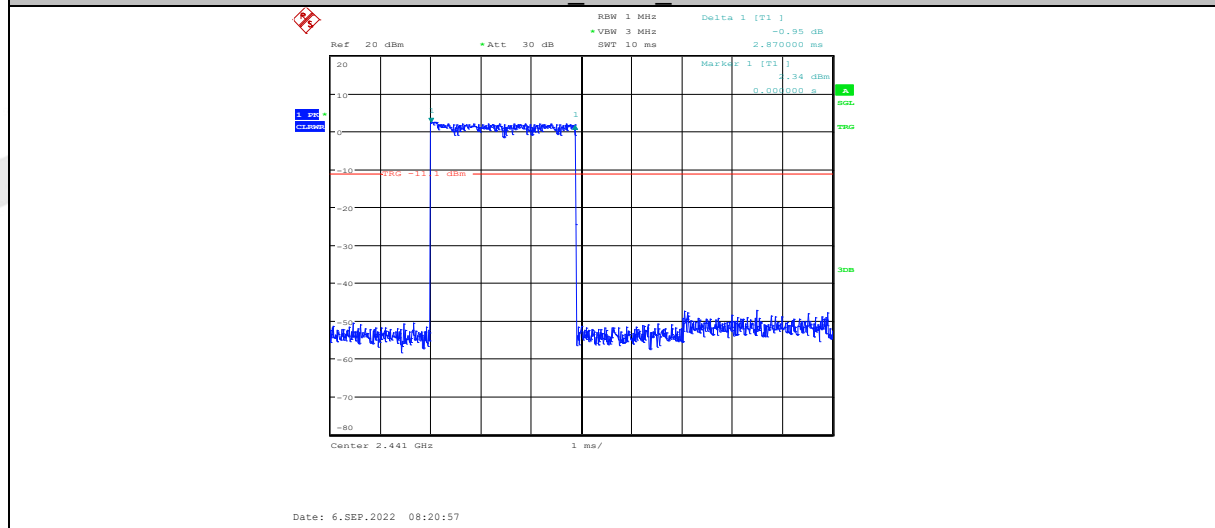

3DH1_ANT1_HOP

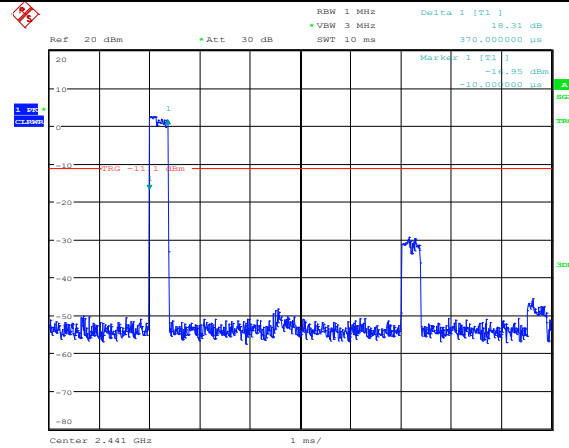


Date: 6.SEP.2022 08:22:06

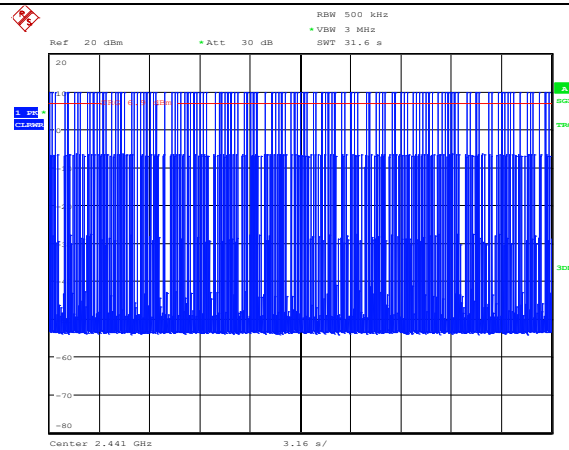


Date: 6.SEP.2022 08:22:40



3DH3_ANT1_HOP

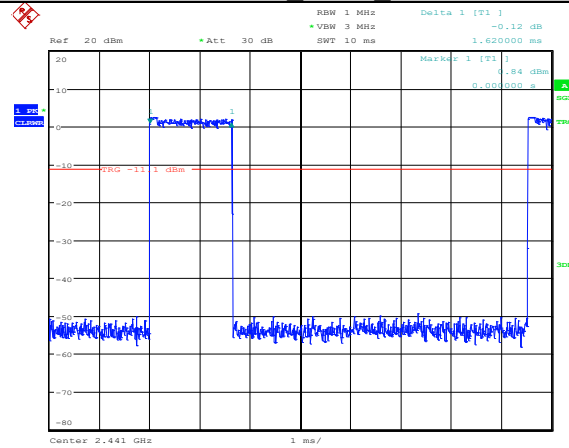

Date: 6.SEP.2022 08:23:16

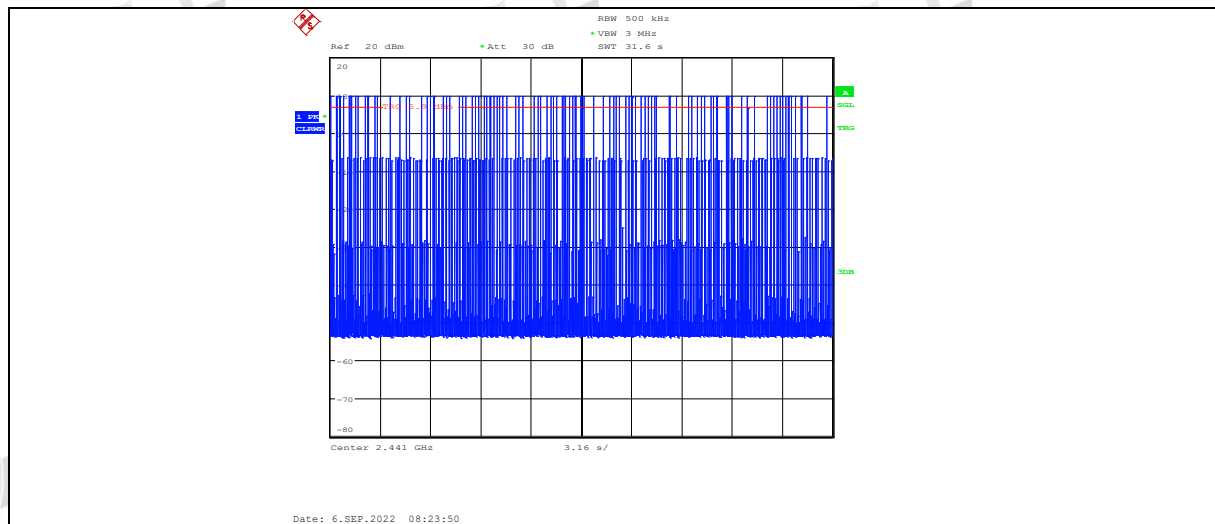

3DH5 ANT1 HOP

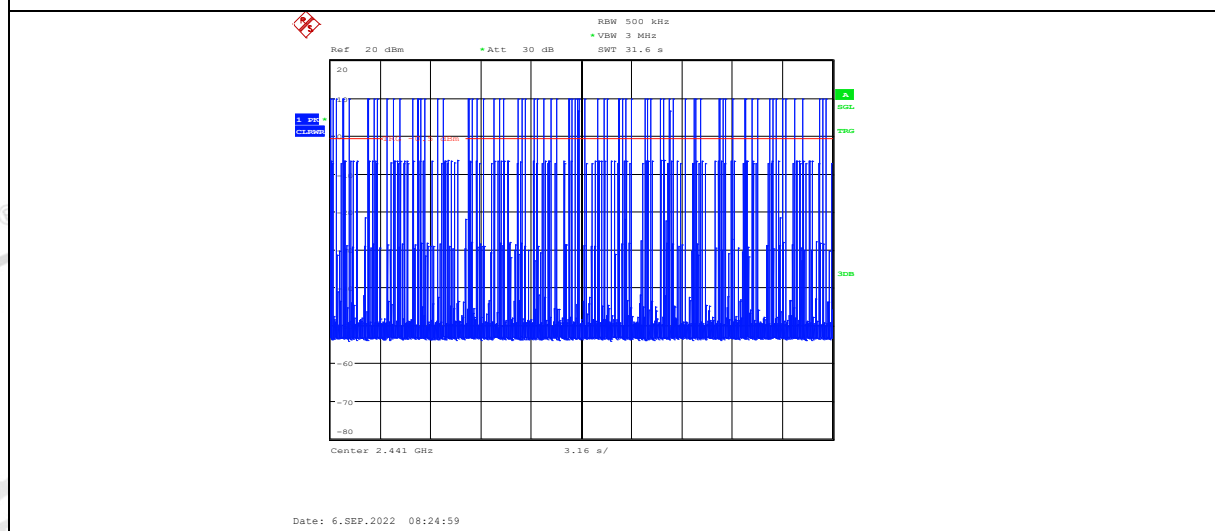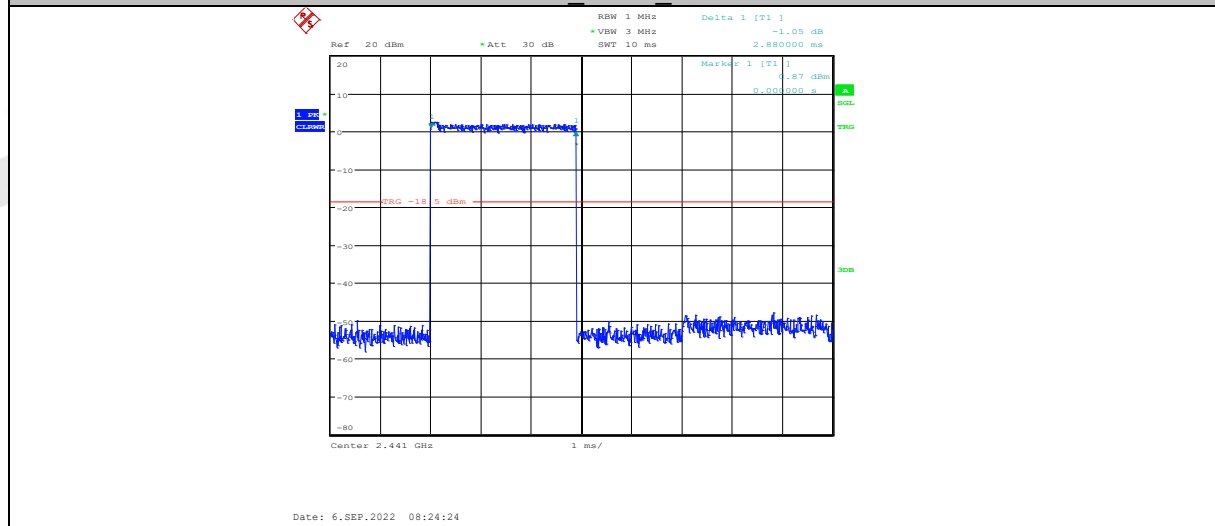

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW: 100 kHz

VBW: 300 kHz

Span Encompass frequency range to be measured

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

9.4. Test result


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

9.5. Original test data

Left side:

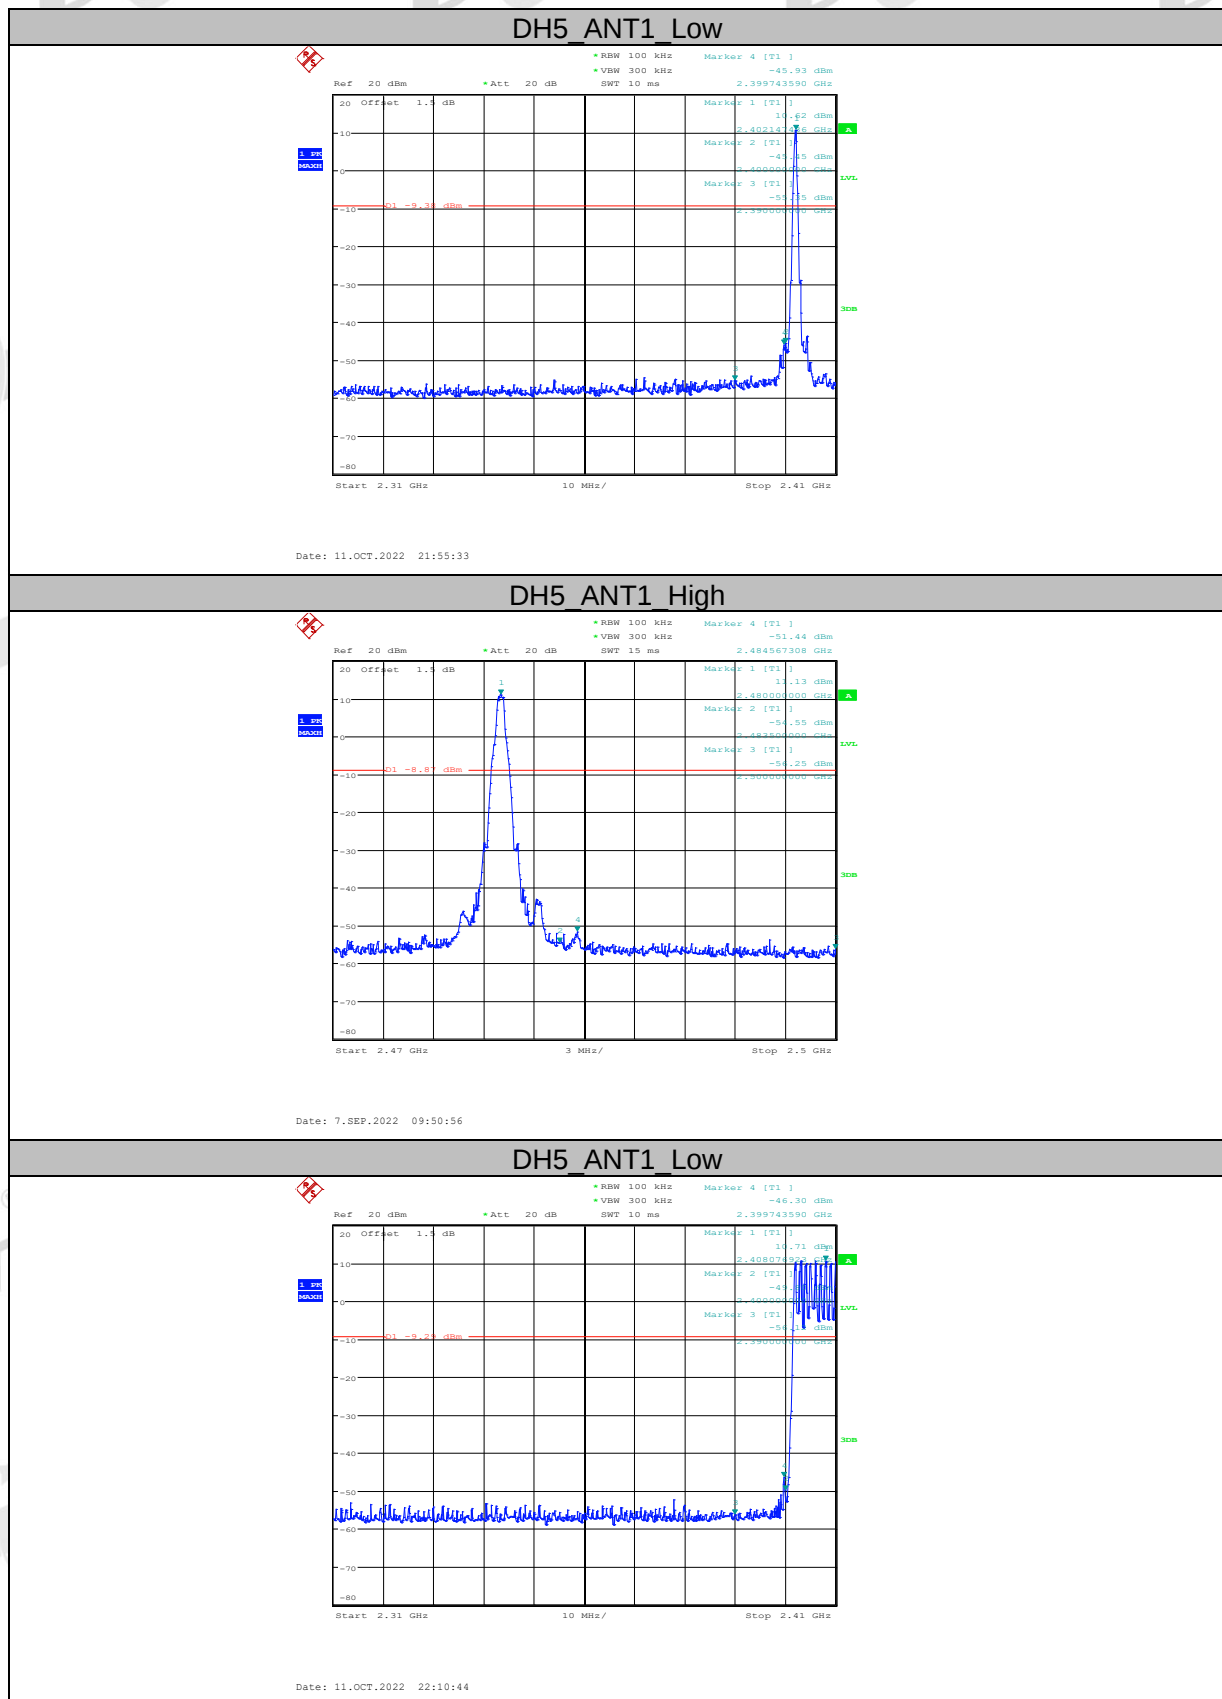


DH5 ANT1_High

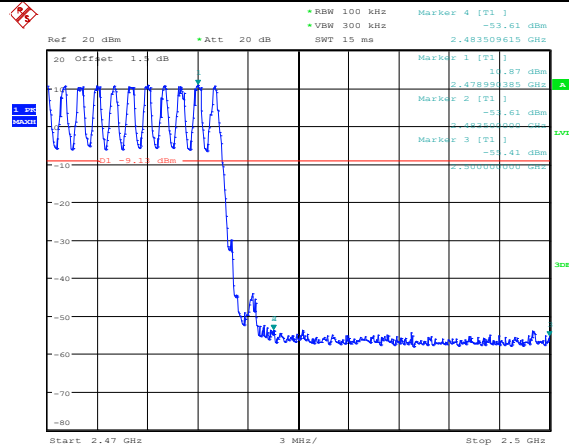


Date: 11.OCT.2022 22:10:02

2DH5 ANT1_Low

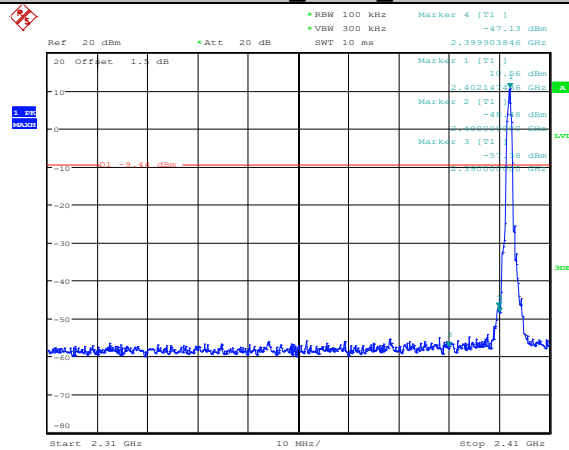


Date: 11.OCT.2022 21:58:39

2DH5 ANT1_High

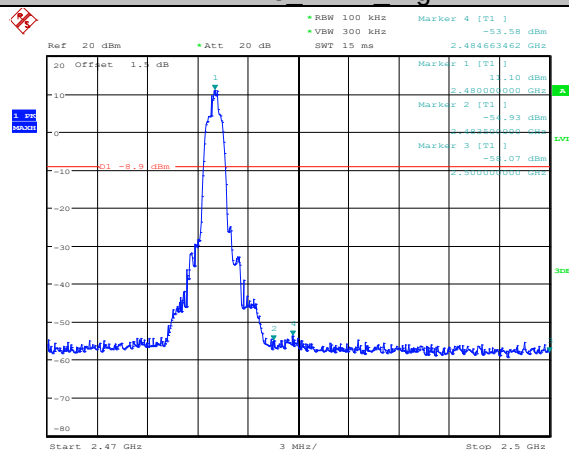


Date: 11.OCT.2022 22:00:28

2DH5_ANT1_Low

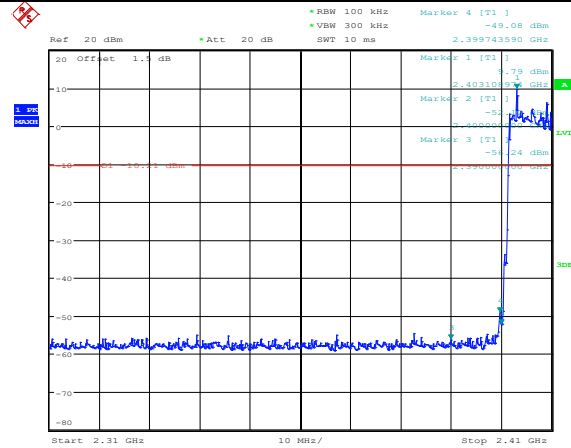


Date: 11.OCT.2022 22:22:06

2DH5_ANT1_High

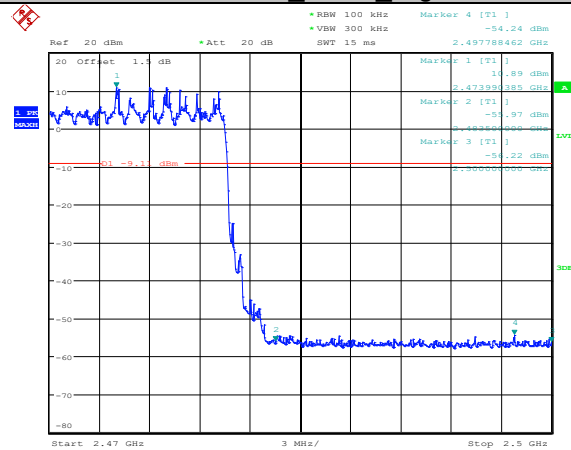


Date: 11.OCT.2022 22:17:31

3DH5_ANT1_Low

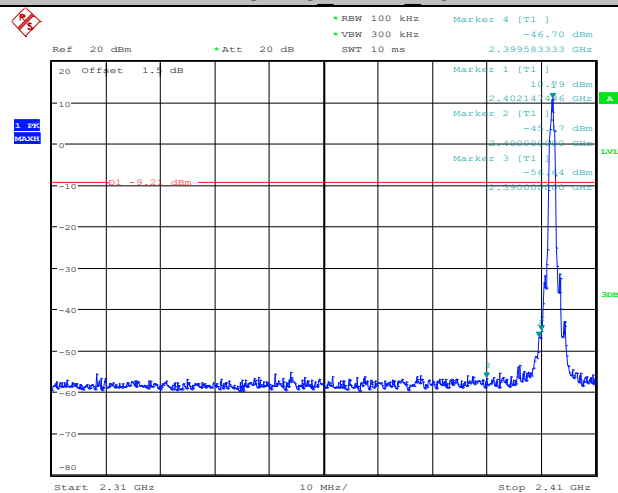


Date: 7.SEP.2022 13:45:59

3DH5 ANT1 High

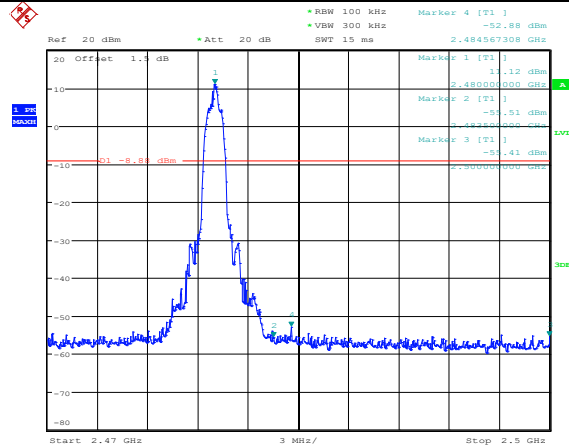


Date: 11.OCT.2022 22:03:22

3DH5 ANT1 Low

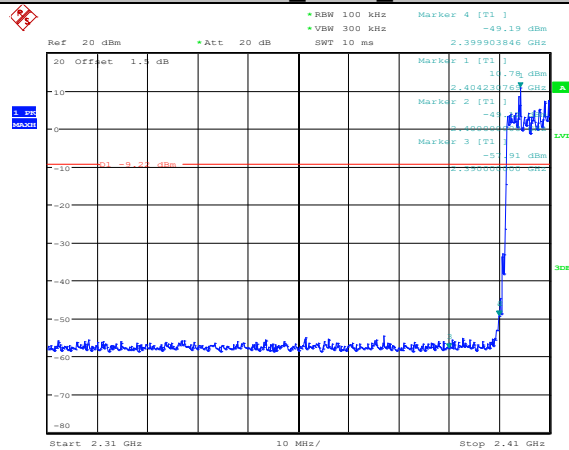


Date: 11.OCT.2022 22:29:22

3DH5 ANT1 High

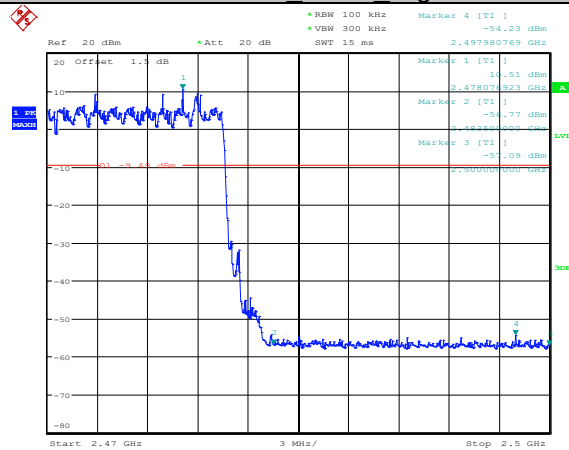


Date: 11.OCT.2022 22:28:53

Right side:

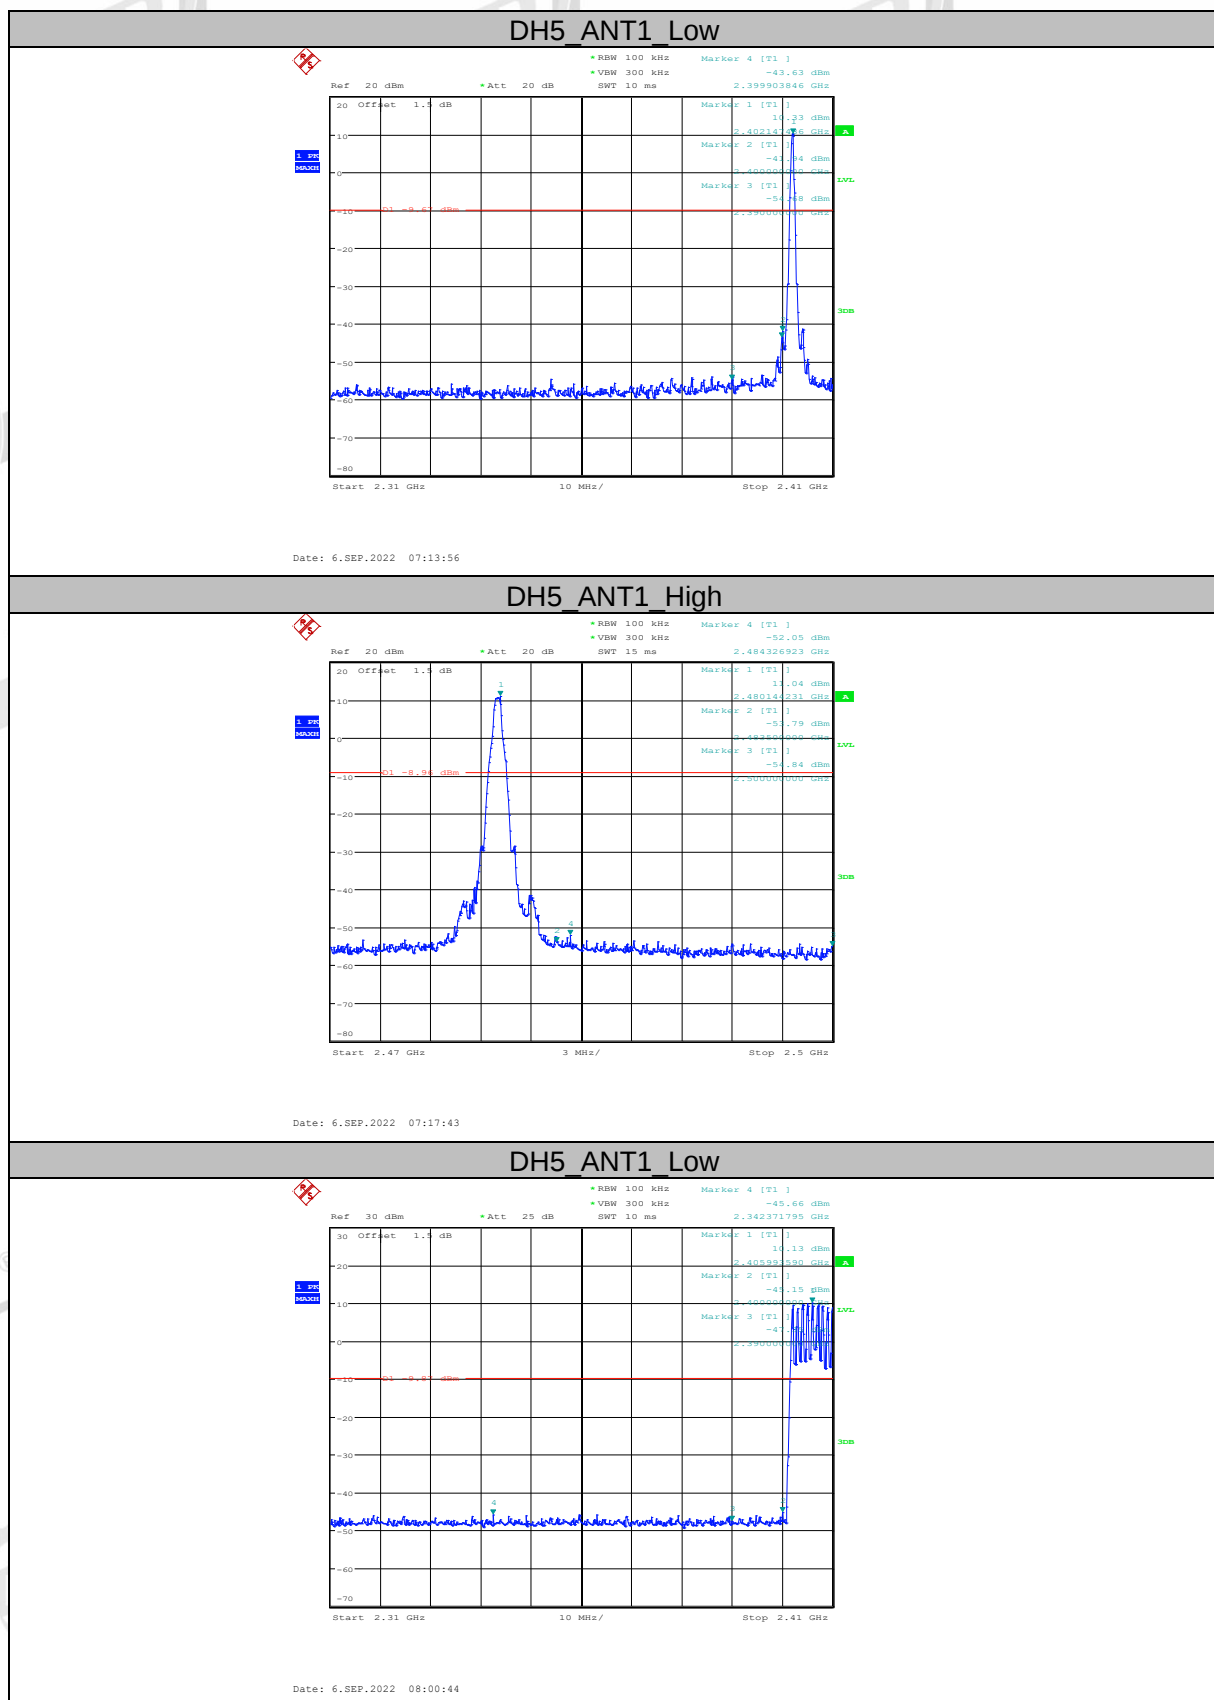


DH5_ANT1_High

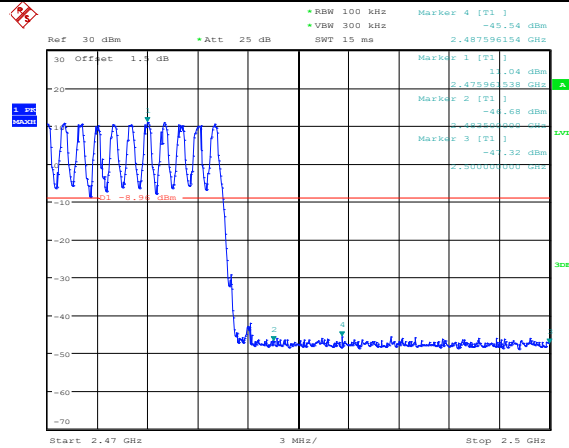


Date: 6.SEP.2022 08:00:14

2DH5_ANT1_Low

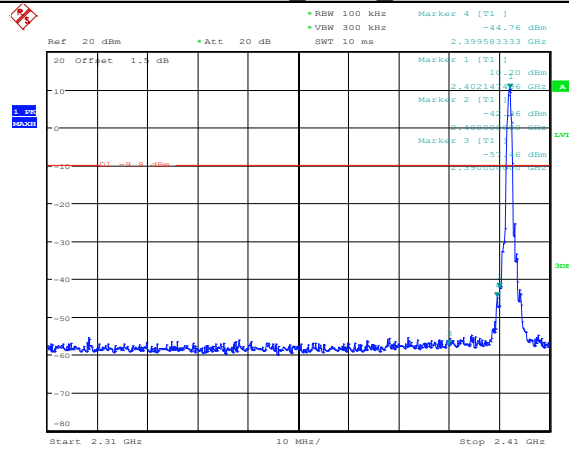


Date: 6.SEP.2022 07:29:18

2DH5_ANT1_High

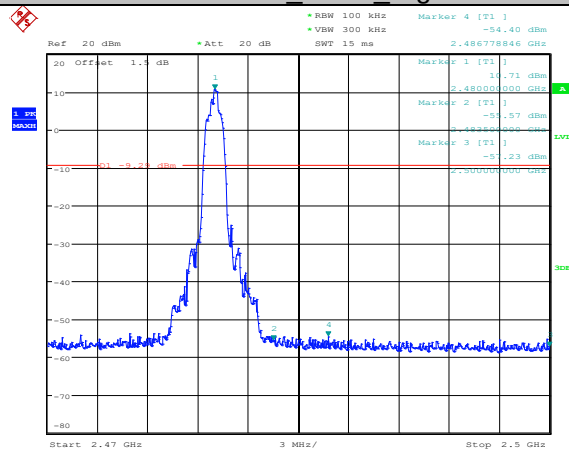


Date: 6.SEP.2022 07:32:49


2DH5 ANT1 Low

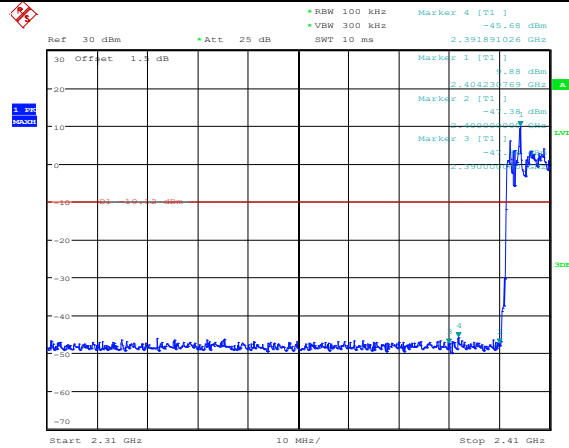


2DH5 ANT1 High

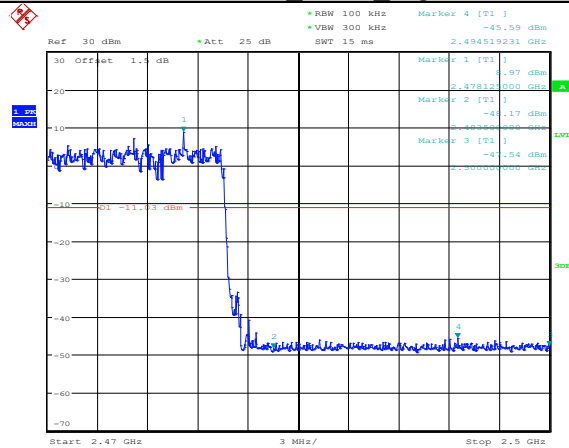

3DH5 ANT1 Low

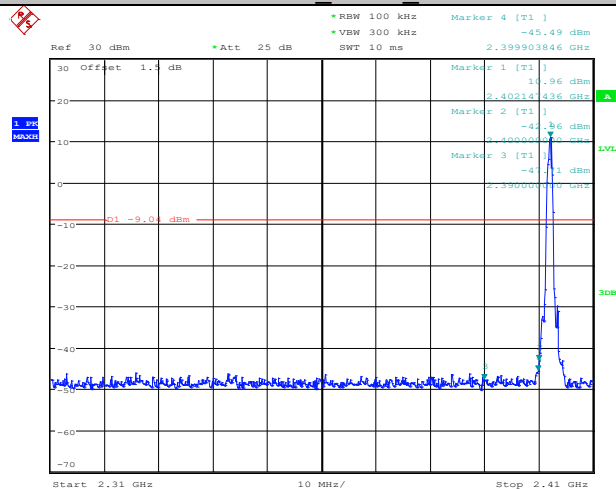


3DH5 ANT1 High

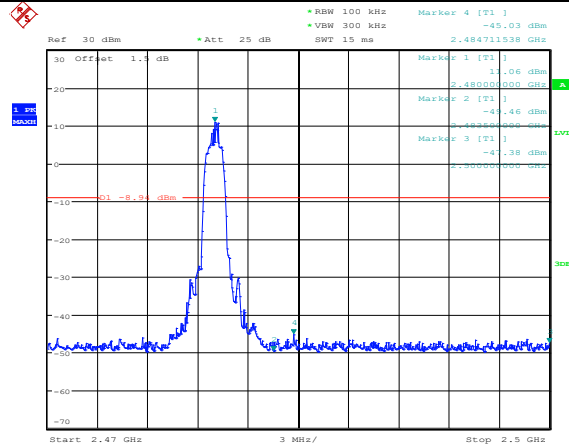


Date: 7.SEP.2022 10:10:12

3DH5 ANT1 Low

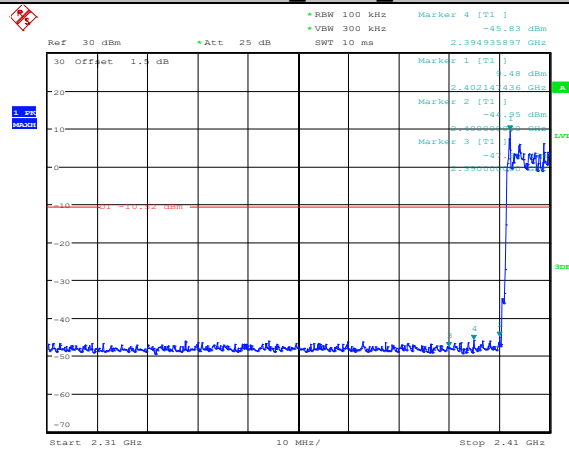

Date: 6.SEP.2022 08:13:53

3DH5 ANT1 High

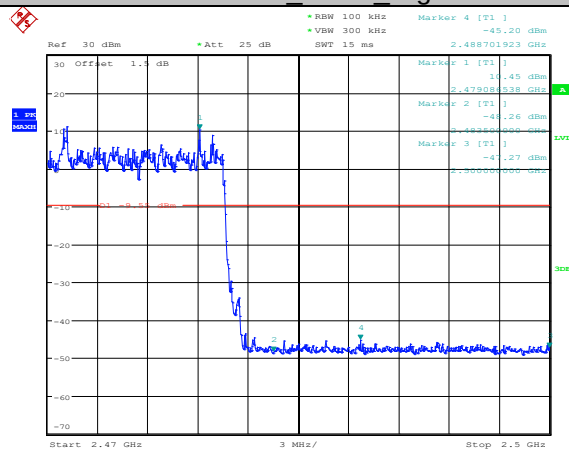


Date: 6.SEP.2022 08:13:28


10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

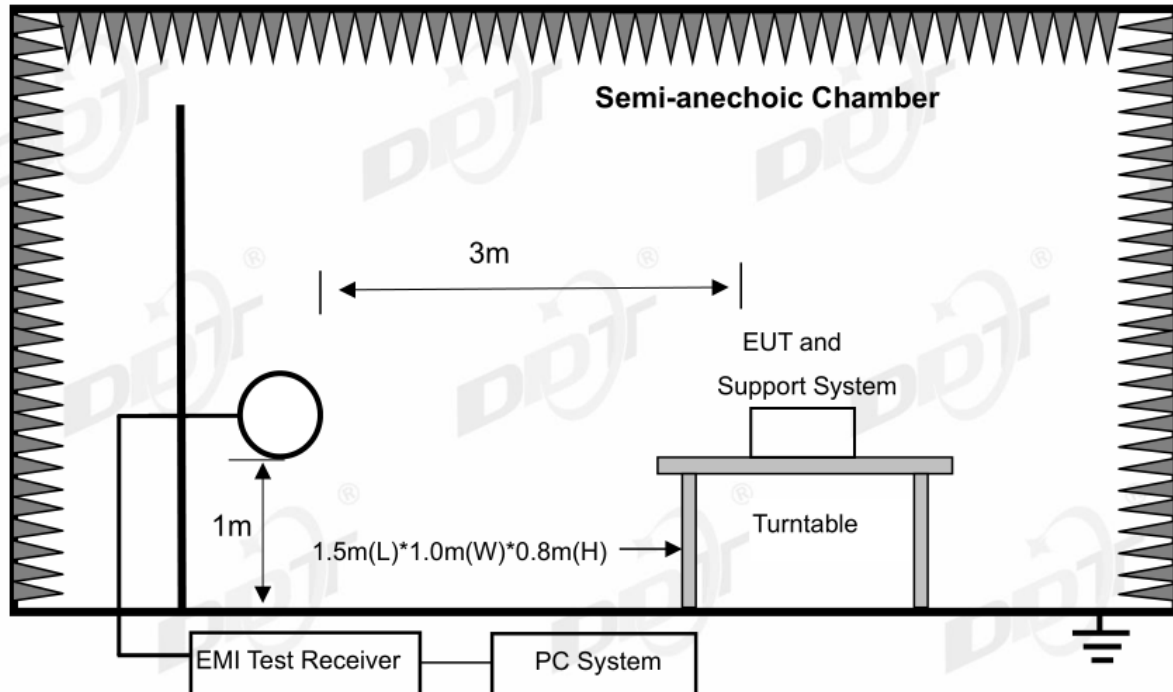

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

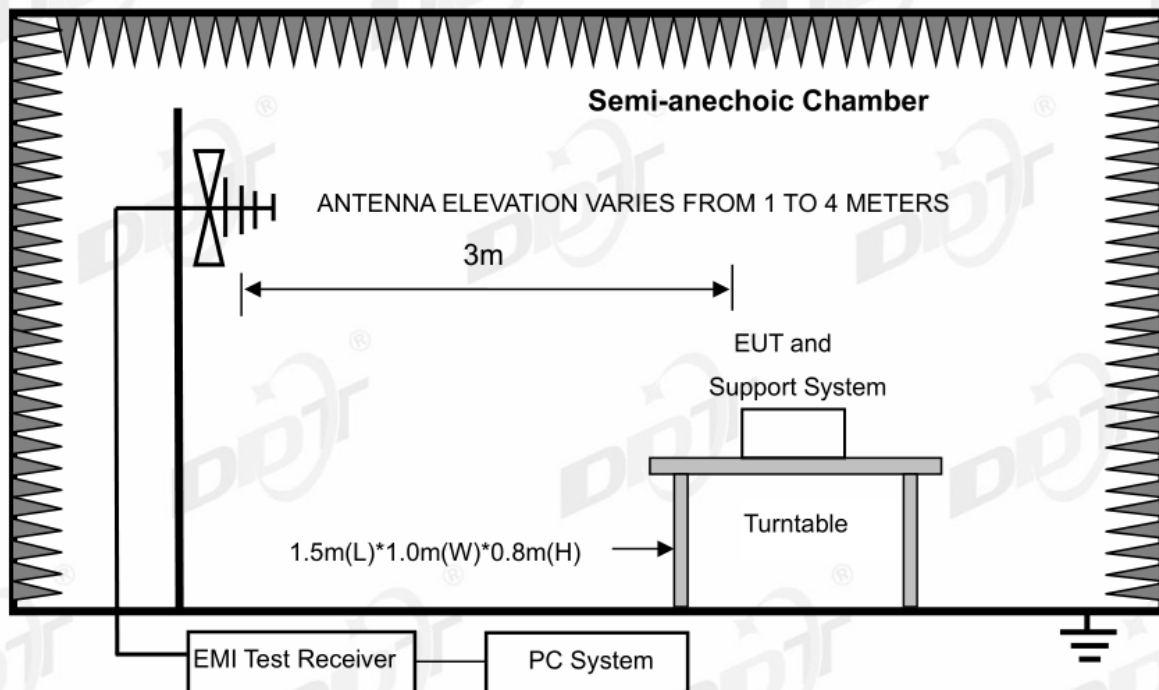

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

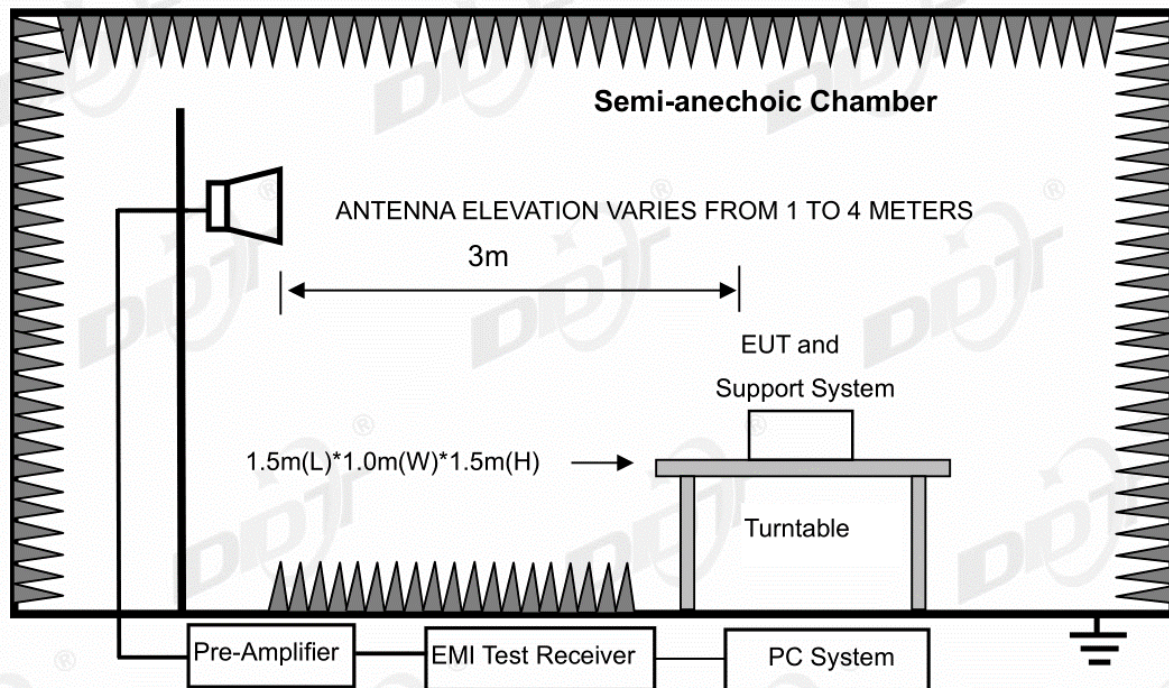

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

10.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)
- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.
- (8) X axis, Y axis, Z axis are tested, and worse setup Y axis is reported.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all side GFSK, $\pi/4$ -DQPSK, the worst case was recorded in this report.)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test were only performed with EUT working in Left side GFSK, Tx 2480 MHz mode and Right side 8DPSK, Tx 2480 MHz mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Note5: For emission above 1GHz that the main frequency over the limit is fundamental. Only record the worst case of both sides in this report.

Radiated Emission test (below 1 GHz)

Left side:

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE

FLEX\LFCC BELOW 1G.EM6

Test Date : 2022-09-14

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery

Test Mode : Tx Mode


Condition : Temp:23.8°C,Humi:58.1%,Press:100.1kPa

Antenna/Distance : 2021 VLUB 9163 #3/3m/HORIZONTAL

Memo : BT

Data:

1

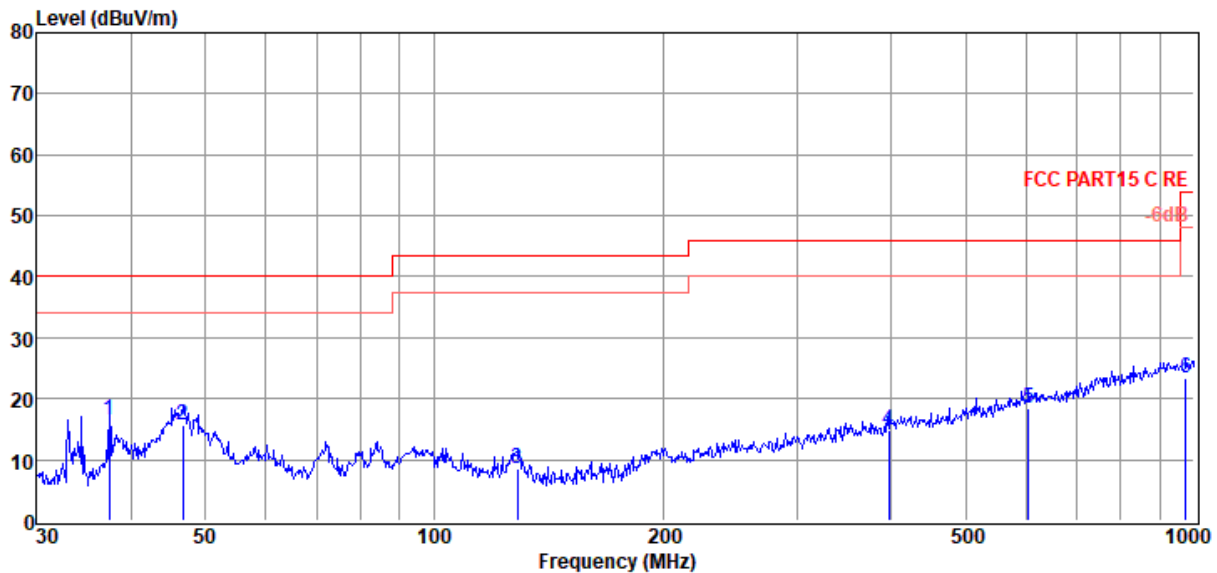

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	37.42	34.47	10.64	3.60	16.43	40.00	-23.57	QP	HORIZONTAL
2	46.67	30.00	14.20	3.65	15.57	40.00	-24.43	QP	HORIZONTAL
3	128.56	27.58	9.00	4.15	8.53	43.50	-34.97	QP	HORIZONTAL
4	396.24	26.52	15.50	5.14	14.77	46.00	-31.23	QP	HORIZONTAL
5	605.66	26.12	19.20	5.75	18.34	46.00	-27.66	QP	HORIZONTAL
6	975.75	25.76	22.30	6.71	23.44	54.00	-30.56	QP	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\L\FCC BELOW 1G.EM6

Test Date : 2022-09-14

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery

Test Mode : Tx Mode


Condition : Temp:23.8°C,Humi:58.1%,Press:100.1kPa

Antenna/Distance : 2021 VLUB 9163 #3/3m/VERTICAL

Memo : BT

Data:

2

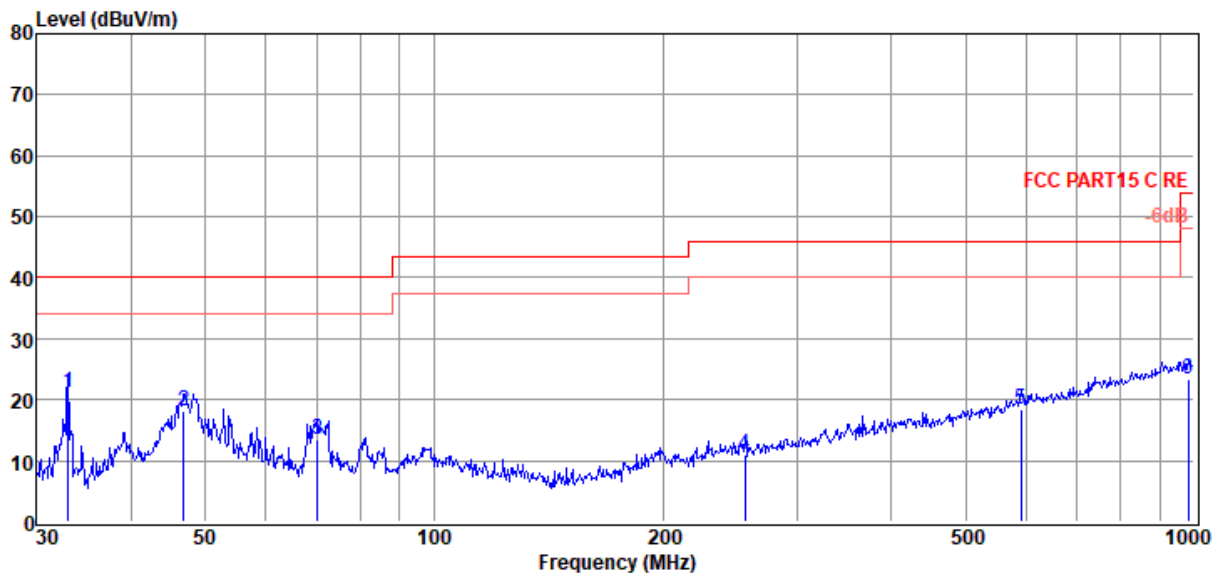

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	32.98	40.92	8.90	3.57	21.10	40.00	-18.90	QP	VERTICAL
2	46.83	32.56	14.10	3.65	18.03	40.00	-21.97	QP	VERTICAL
3	70.34	32.93	8.97	3.82	13.46	40.00	-26.54	QP	VERTICAL
4	256.52	25.91	12.70	4.68	11.06	46.00	-34.94	QP	VERTICAL
5	590.97	26.41	18.94	5.71	18.36	46.00	-27.64	QP	VERTICAL
6	982.62	25.55	22.35	6.75	23.40	54.00	-30.60	QP	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Right side:

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
BELOW 1G.EM6

Test Date : 2022-09-06

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX


Power Supply : Battery

Test Mode : Tx Mode

Condition : Temp:22.8°C,Humi:59.1%,Press:100.1kPa Antenna/Distance : 2022 9161 #3/3m/HORIZONTAL

Memo : BT

Data:1

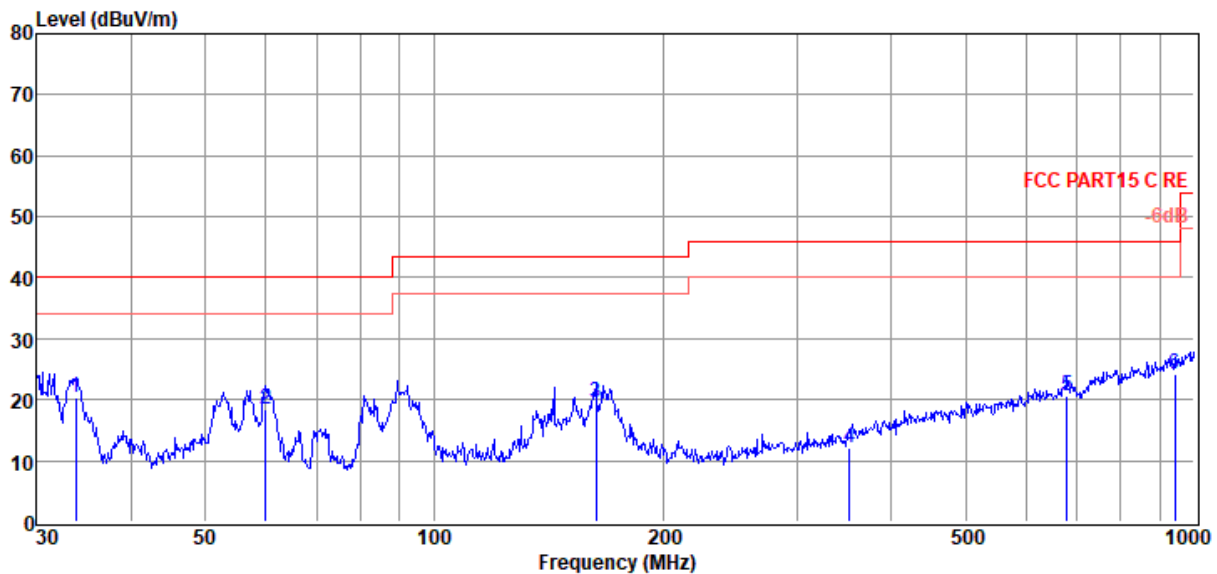

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	33.80	37.70	11.46	3.58	20.45	40.00	-19.55	QP	HORIZONTAL
2	60.07	35.08	11.81	3.75	18.37	40.00	-21.63	QP	HORIZONTAL
3	163.18	27.95	19.50	4.31	19.55	43.50	-23.95	QP	HORIZONTAL
4	351.71	25.36	14.17	5.00	12.17	46.00	-33.83	QP	HORIZONTAL
5	679.96	27.42	20.10	5.94	20.63	46.00	-25.37	QP	HORIZONTAL
6	942.13	25.98	23.24	6.56	24.06	46.00	-21.94	QP	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
BELOW 1G.EM6

Test Date : 2022-09-06

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.8°C,Humi:59.1%,Press:100.1kPa Antenna/Distance : 2022 9161 #3/3m/VERTICAL

Memo : BT

Data:

2

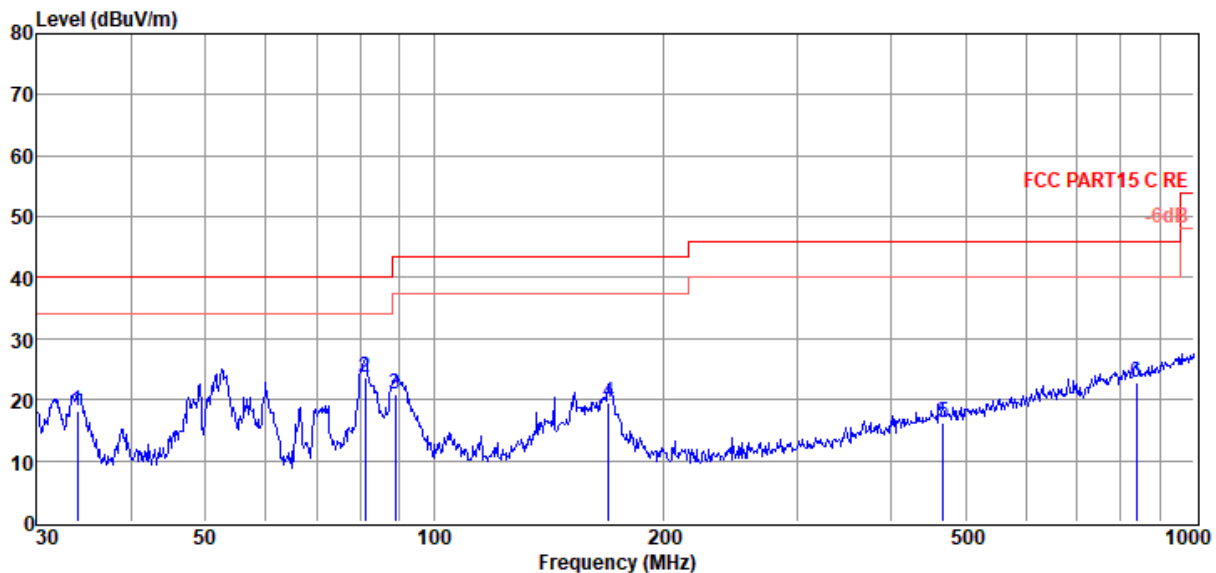


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	33.92	35.42	11.48	3.58	18.19	40.00	-21.81	QP	VERTICAL
2	81.21	42.58	9.54	3.89	23.75	40.00	-16.25	QP	VERTICAL
3	88.96	38.31	10.99	3.93	20.98	43.50	-22.52	QP	VERTICAL
4	169.60	27.89	19.40	4.34	19.41	43.50	-24.09	QP	VERTICAL
5	467.24	26.16	17.20	5.38	16.25	46.00	-29.75	QP	VERTICAL
6	839.18	26.84	22.30	6.31	22.89	46.00	-23.11	QP	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)**Left side:****TR-4-E-009 Radiated Emission Test Result****Test Site** : DDT 3m Chamber 3#D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\L\FCC
ABOVE 1G .EM6**Test Date** : 2022-09-11**Tested By** : James Gan**EUT** : BLUETOOTH HEADSET**Model Number** : LIVE FLEX**Power Supply** : Battery**Test Mode** : Tx Mode**Condition** : Temp:22.1°C,Humi:60.3%,Press:100.3kPa**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL**Memo** : DH5 2402

Data: 1

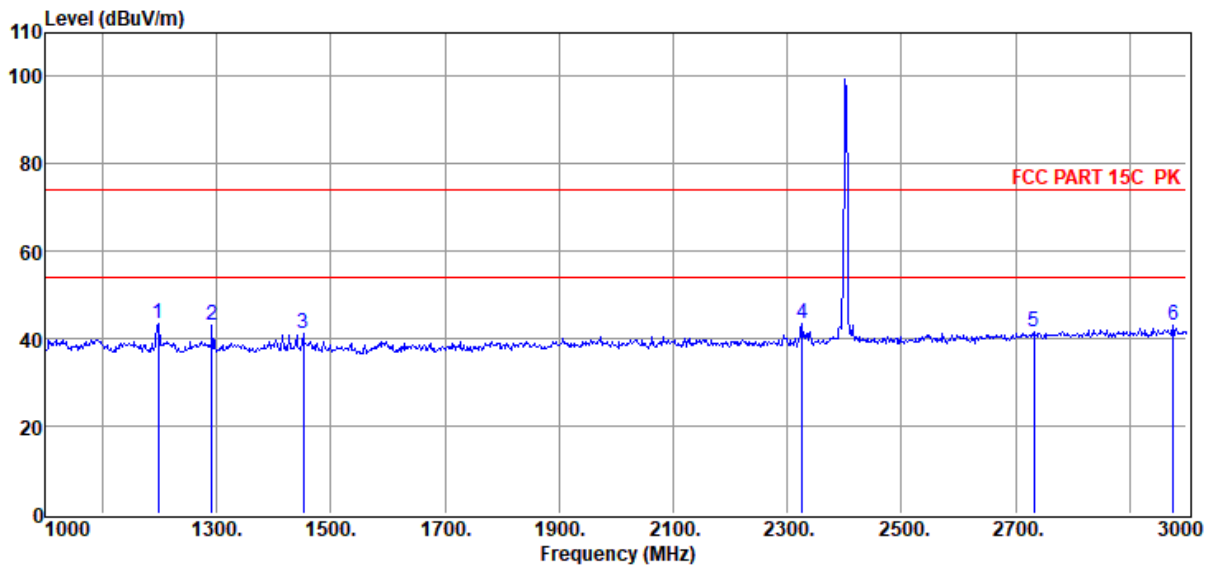

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1198.00	54.55	25.46	38.20	1.21	0.54	43.56	74.00	-30.44	Peak	HORIZONTAL
2	1292.00	54.11	25.44	38.34	1.26	0.55	43.02	74.00	-30.98	Peak	HORIZONTAL
3	1452.00	52.57	25.41	38.58	1.35	0.58	41.33	74.00	-32.67	Peak	HORIZONTAL
4	2326.00	53.42	27.29	39.56	1.69	0.72	43.56	74.00	-30.44	Peak	HORIZONTAL
5	2732.00	50.16	28.48	39.77	1.80	0.76	41.43	74.00	-32.57	Peak	HORIZONTAL
6	2976.00	51.03	29.41	39.89	1.86	0.79	43.20	74.00	-30.80	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 2

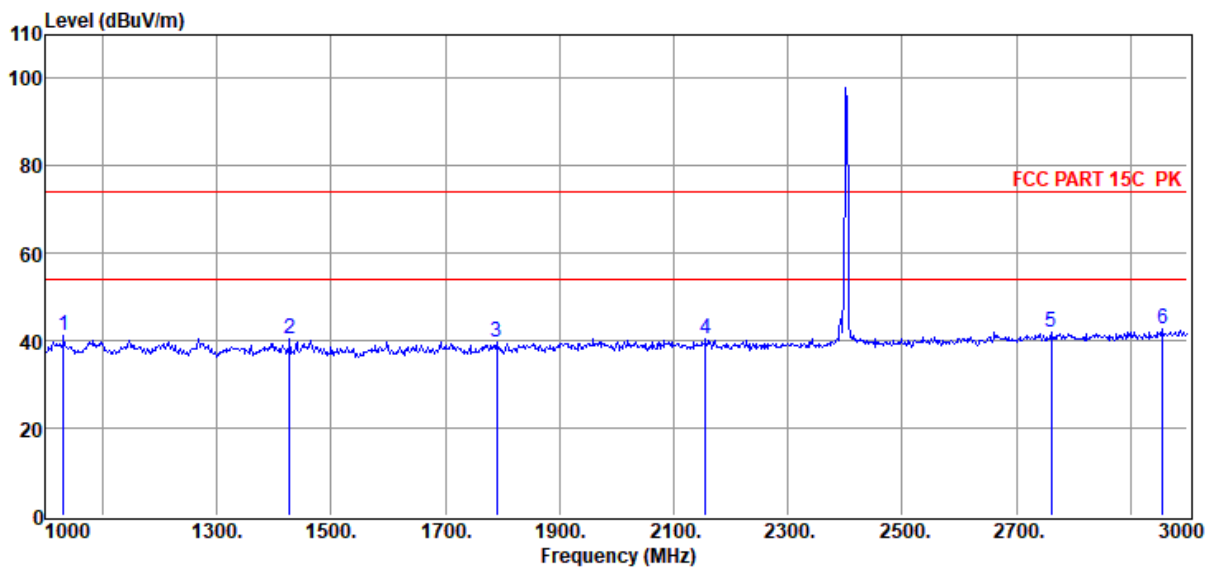

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1032.00	52.04	25.49	37.95	1.12	0.51	41.21	74.00	-32.79	Peak	VERTICAL
2	1428.00	51.54	25.41	38.54	1.34	0.58	40.33	74.00	-33.67	Peak	VERTICAL
3	1790.00	50.64	26.15	39.09	1.51	0.64	39.85	74.00	-34.15	Peak	VERTICAL
4	2156.00	50.66	26.98	39.48	1.64	0.70	40.50	74.00	-33.50	Peak	VERTICAL
5	2762.00	50.41	28.60	39.78	1.81	0.76	41.80	74.00	-32.20	Peak	VERTICAL
6	2956.00	50.44	29.33	39.88	1.86	0.79	42.54	74.00	-31.46	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2441

Data: 3

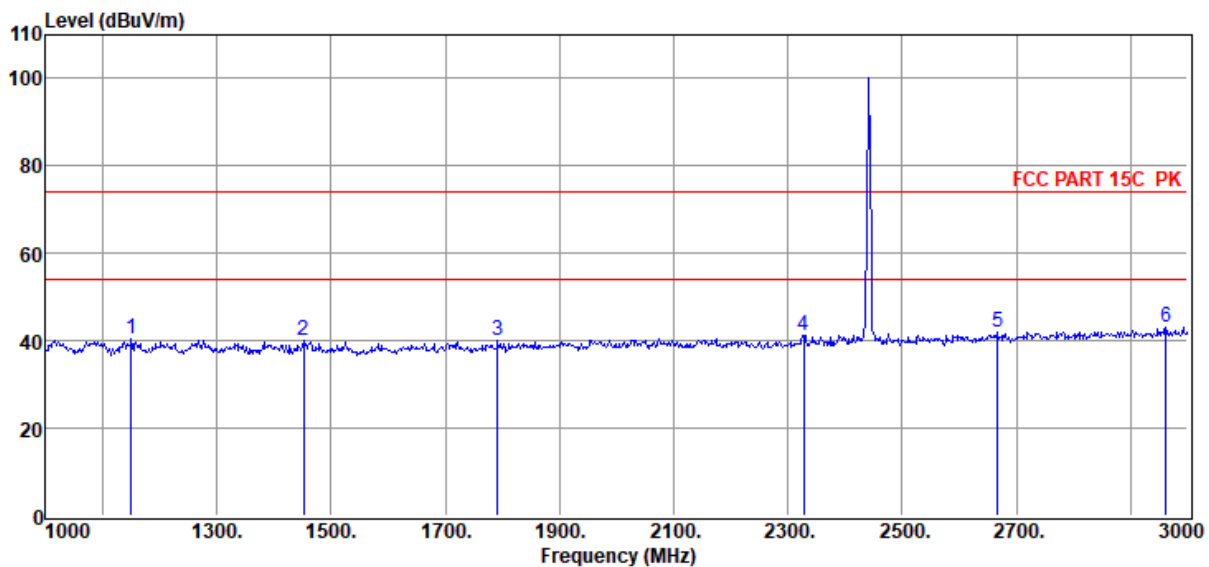

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1150.00	51.34	25.47	38.12	1.18	0.53	40.40	74.00	-33.60	Peak	HORIZONTAL
2	1452.00	51.22	25.41	38.58	1.35	0.58	39.98	74.00	-34.02	Peak	HORIZONTAL
3	1792.00	50.99	26.16	39.09	1.51	0.64	40.21	74.00	-33.79	Peak	HORIZONTAL
4	2328.00	51.17	27.29	39.56	1.69	0.72	41.31	74.00	-32.69	Peak	HORIZONTAL
5	2668.00	51.04	28.24	39.73	1.78	0.75	42.08	74.00	-31.92	Peak	HORIZONTAL
6	2962.00	50.88	29.36	39.88	1.86	0.79	43.01	74.00	-30.99	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2441

Data: 4

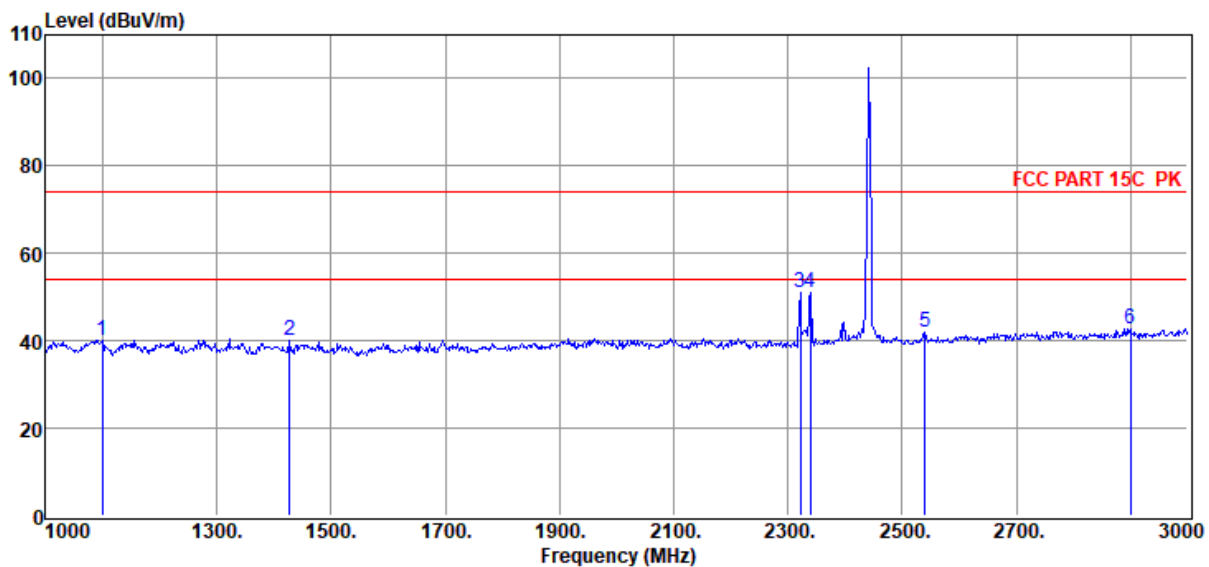

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1100.00	51.10	25.48	38.05	1.16	0.52	40.21	74.00	-33.79	Peak	VERTICAL
2	1428.00	51.40	25.41	38.54	1.34	0.58	40.19	74.00	-33.81	Peak	VERTICAL
3	2322.00	60.94	27.28	39.56	1.69	0.72	51.07	74.00	-22.93	Peak	VERTICAL
4	2340.00	60.98	27.31	39.57	1.70	0.72	51.14	74.00	-22.86	Peak	VERTICAL
5	2540.00	51.21	27.75	39.67	1.75	0.74	41.78	74.00	-32.22	Peak	VERTICAL
6	2900.00	50.83	29.12	39.85	1.84	0.78	42.72	74.00	-31.28	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 5

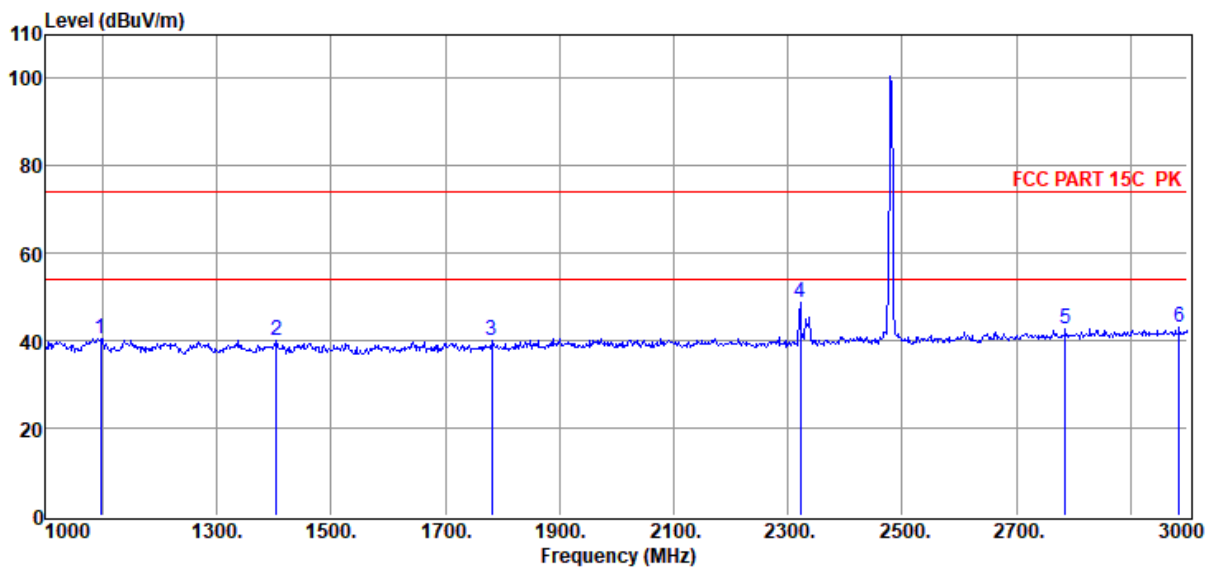

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1096.00	51.31	25.48	38.04	1.15	0.52	40.42	74.00	-33.58	Peak	HORIZONTAL
2	1404.00	51.11	25.42	38.51	1.33	0.57	39.92	74.00	-34.08	Peak	HORIZONTAL
3	1782.00	50.89	26.13	39.07	1.50	0.64	40.09	74.00	-33.91	Peak	HORIZONTAL
4	2322.00	58.82	27.28	39.56	1.69	0.72	48.95	74.00	-25.05	Peak	HORIZONTAL
5	2786.00	51.15	28.69	39.79	1.81	0.77	42.63	74.00	-31.37	Peak	HORIZONTAL
6	2986.00	50.68	29.45	39.89	1.87	0.79	42.90	74.00	-31.10	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 6

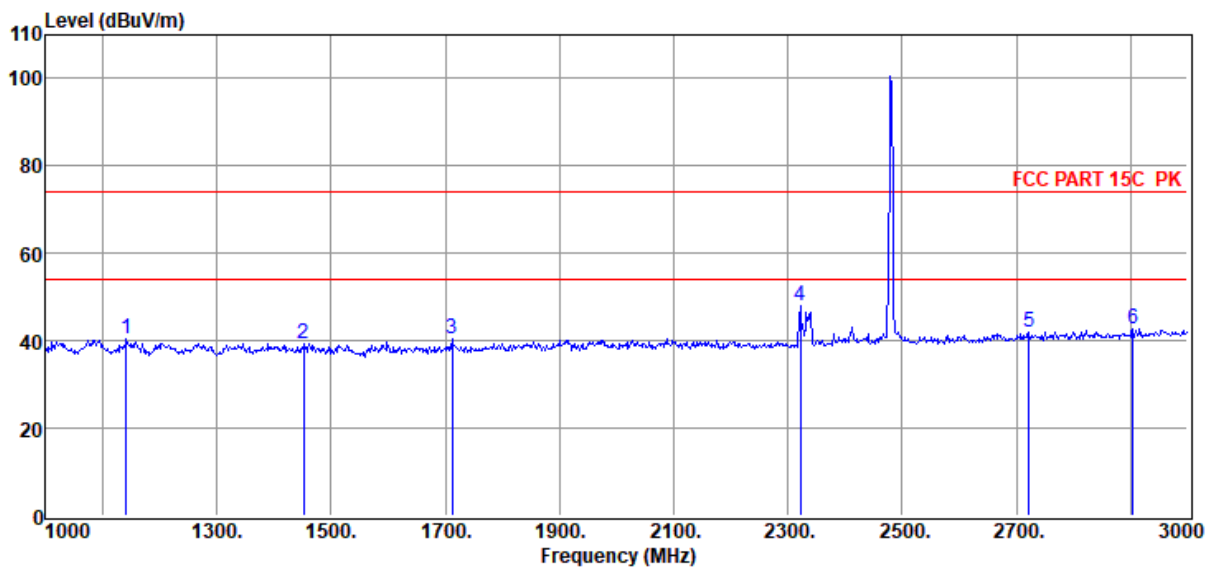

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1142.00	51.42	25.47	38.11	1.18	0.53	40.49	74.00	-33.51	Peak	VERTICAL
2	1452.00	50.60	25.41	38.58	1.35	0.58	39.36	74.00	-34.64	Peak	VERTICAL
3	1712.00	51.24	25.95	38.97	1.47	0.63	40.32	74.00	-33.68	Peak	VERTICAL
4	2322.00	57.81	27.28	39.56	1.69	0.72	47.94	74.00	-26.06	Peak	VERTICAL
5	2722.00	50.77	28.44	39.76	1.80	0.76	42.01	74.00	-31.99	Peak	VERTICAL
6	2904.00	50.83	29.14	39.85	1.85	0.78	42.75	74.00	-31.25	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2402

Data: 7

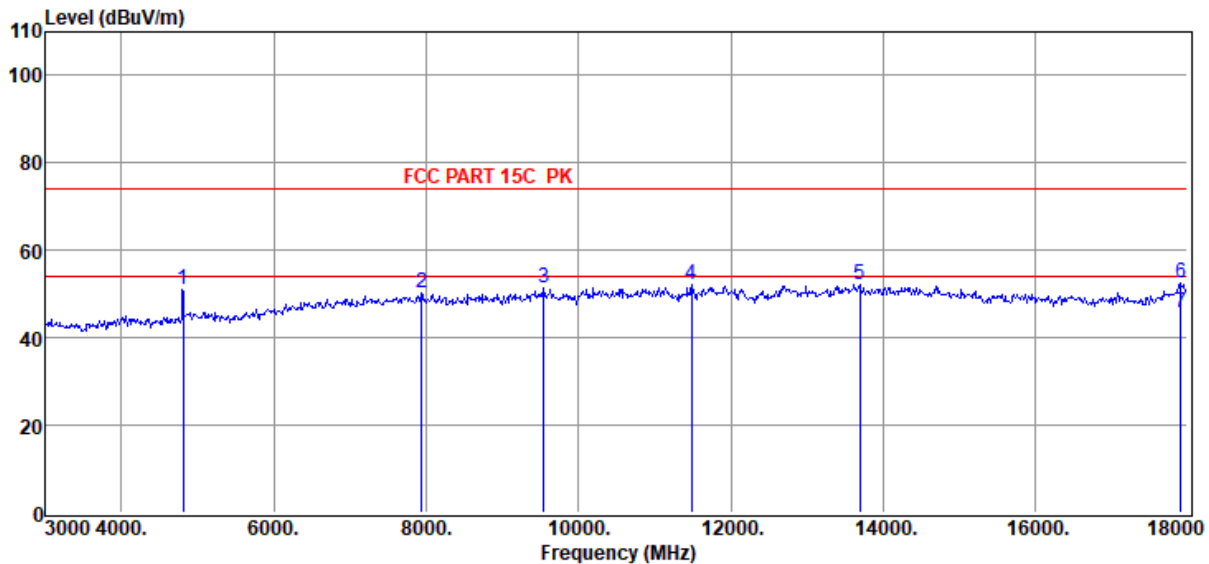

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4804.00	54.13	32.47	40.36	2.47	2.16	50.87	74.00	-23.13	Peak	HORIZONTAL
2	7935.00	47.59	36.92	39.79	3.18	2.28	50.18	74.00	-23.82	Peak	HORIZONTAL
3	9540.00	46.91	38.68	40.28	3.62	2.34	51.27	74.00	-22.73	Peak	HORIZONTAL
4	11490.00	46.78	39.01	40.15	3.97	2.39	52.00	74.00	-22.00	Peak	HORIZONTAL
5	13695.00	45.01	39.96	39.91	4.20	2.92	52.18	74.00	-21.82	Peak	HORIZONTAL
6	17910.00	42.39	41.94	40.65	4.93	3.76	52.37	74.00	-21.63	Peak	HORIZONTAL
7	17910.00	35.68	41.94	40.65	4.93	3.76	45.66	54.00	-8.34	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 8

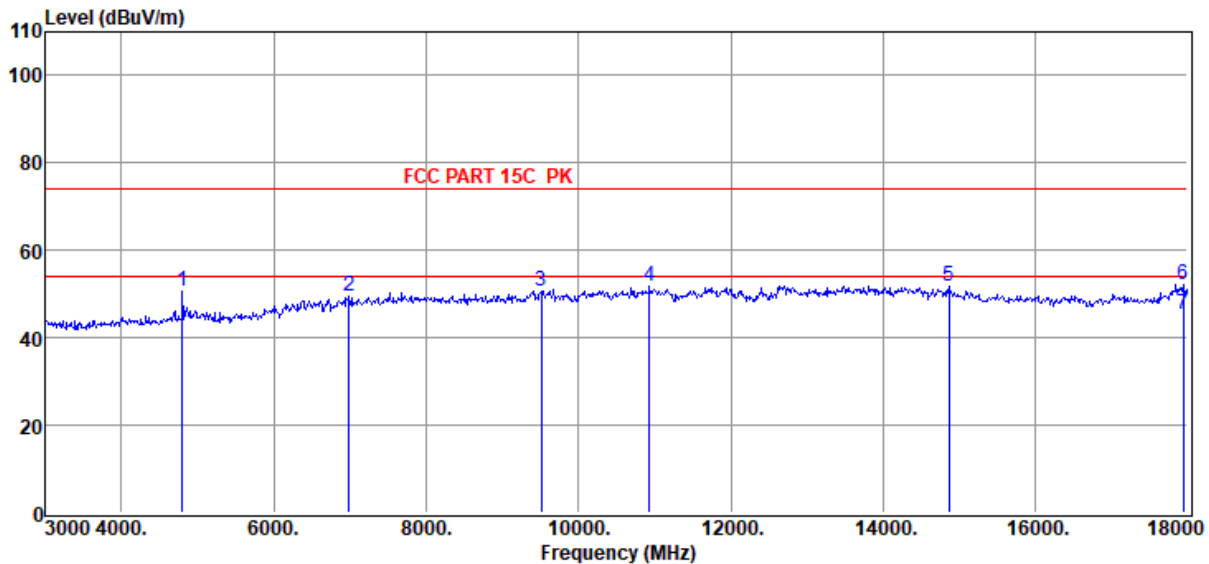

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4800.00	53.86	32.46	40.36	2.47	2.16	50.59	74.00	-23.41	Peak	VERTICAL
2	6990.00	47.88	35.98	39.71	3.03	2.27	49.45	74.00	-24.55	Peak	VERTICAL
3	9510.00	46.33	38.69	40.26	3.62	2.33	50.71	74.00	-23.29	Peak	VERTICAL
4	10935.00	46.50	39.26	40.23	3.78	2.39	51.70	74.00	-22.30	Peak	VERTICAL
5	14865.00	44.78	39.61	39.61	4.44	2.66	51.88	74.00	-22.12	Peak	VERTICAL
6	17940.00	42.13	42.13	40.66	4.94	3.77	52.31	74.00	-21.69	Peak	VERTICAL
7	17940.00	35.29	42.13	40.66	4.94	3.77	45.47	54.00	-8.53	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2441

Data: 9

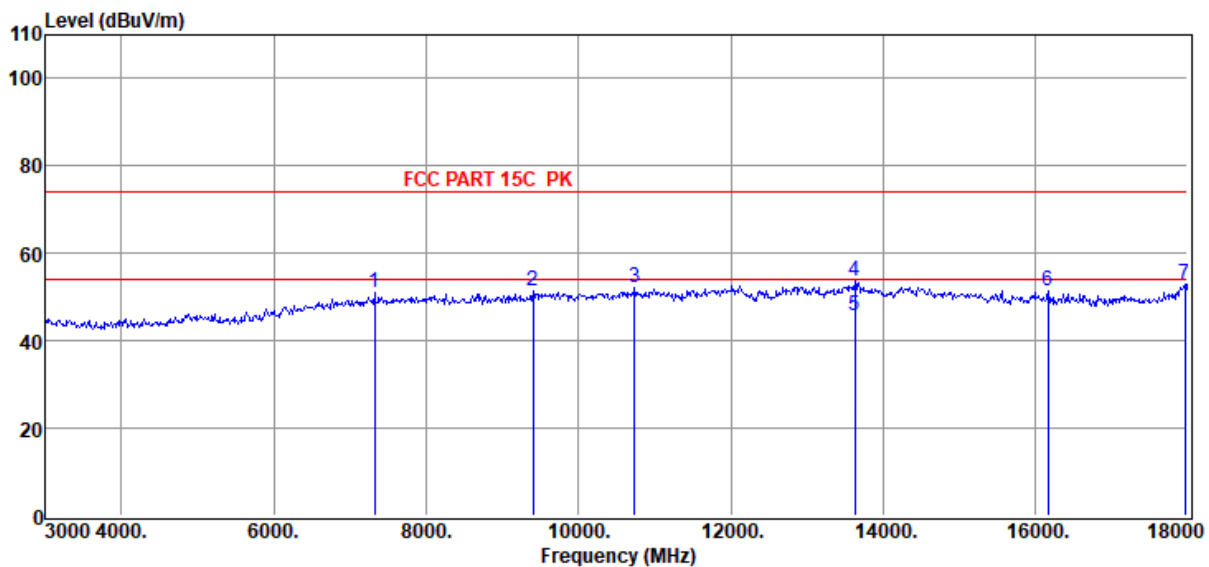

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7320.00	49.24	36.26	39.73	3.10	2.27	51.14	74.00	-22.86	Peak	HORIZONTAL
2	9405.00	47.18	38.62	40.18	3.56	2.30	51.48	74.00	-22.52	Peak	HORIZONTAL
3	10740.00	47.26	39.14	40.30	3.73	2.41	52.24	74.00	-21.76	Peak	HORIZONTAL
4	13635.00	46.50	39.97	39.96	4.14	2.92	53.57	74.00	-20.43	Peak	HORIZONTAL
5	13635.00	38.68	39.97	39.96	4.14	2.92	45.75	54.00	-8.25	Average	HORIZONTAL
6	16170.00	45.49	37.90	39.93	4.64	3.19	51.29	74.00	-22.71	Peak	HORIZONTAL
7	17970.00	42.42	42.31	40.68	4.95	3.78	52.78	74.00	-21.22	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2441

Data: 10

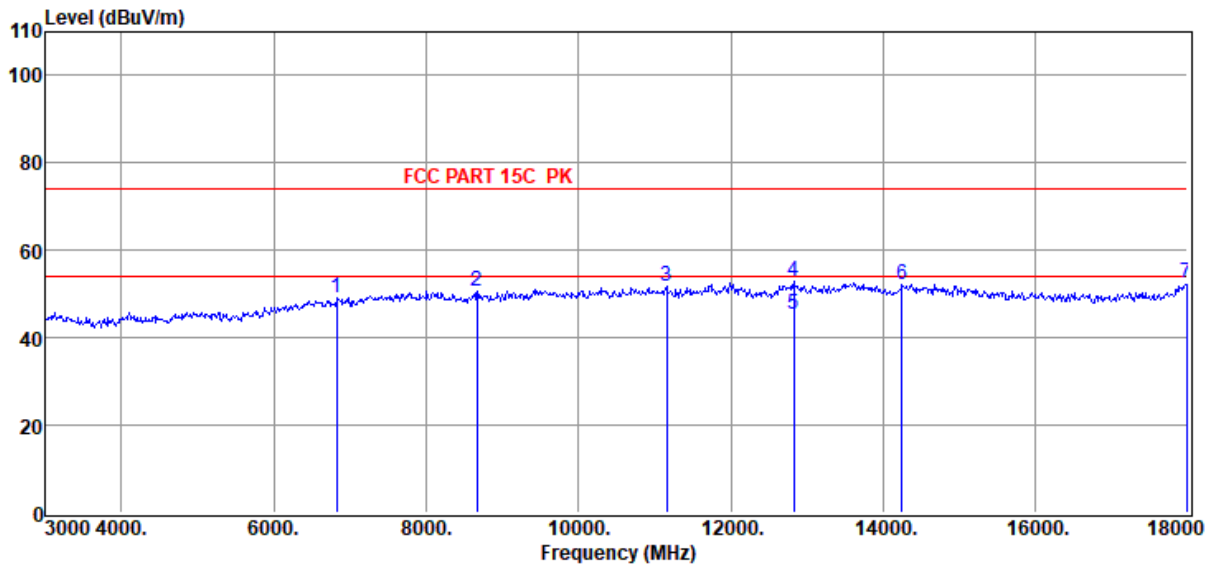

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6825.00	47.63	35.72	39.84	3.11	2.35	48.97	74.00	-25.03	Peak	VERTICAL
2	8670.00	47.11	37.97	39.87	3.26	2.21	50.68	74.00	-23.32	Peak	VERTICAL
3	11160.00	46.67	39.20	40.18	3.85	2.38	51.92	74.00	-22.08	Peak	VERTICAL
4	12825.00	47.03	39.39	40.35	4.16	2.86	53.09	74.00	-20.91	Peak	VERTICAL
5	12825.00	39.27	39.39	40.35	4.16	2.86	45.33	54.00	-8.67	Average	VERTICAL
6	14250.00	44.71	39.90	39.67	4.44	2.83	52.21	74.00	-21.79	Peak	VERTICAL
7	17985.00	42.04	42.41	40.69	4.96	3.79	52.51	74.00	-21.49	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 11

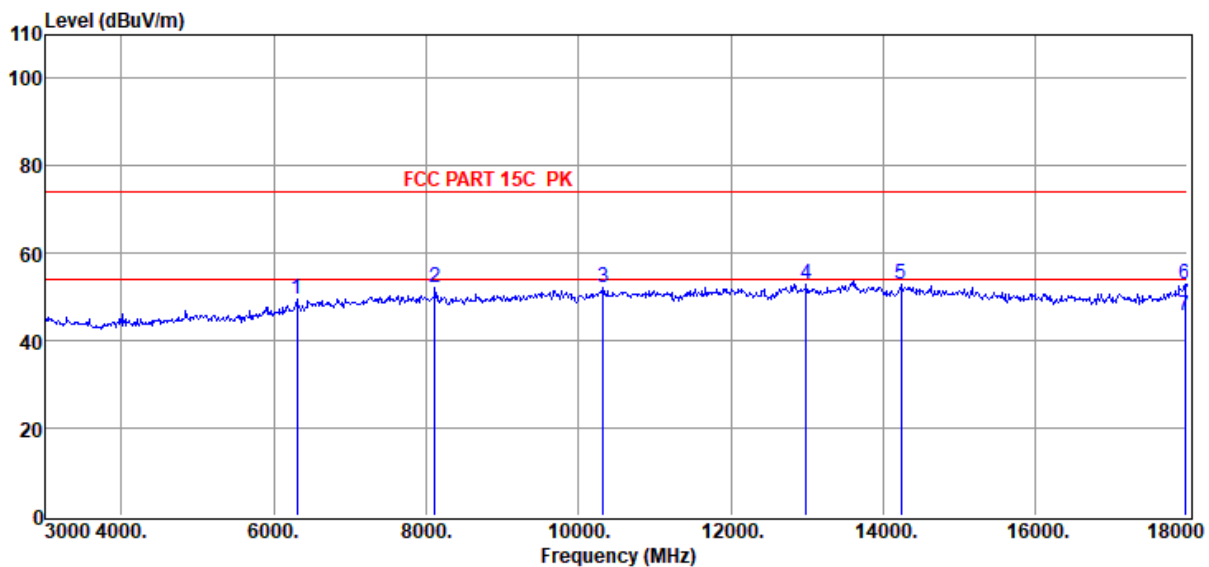

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6300.00	49.38	34.72	40.26	3.17	2.64	49.65	74.00	-24.35	Peak	HORIZONTAL
2	8115.00	49.22	37.18	39.81	3.20	2.27	52.06	74.00	-21.94	Peak	HORIZONTAL
3	10320.00	47.62	38.78	40.47	3.67	2.45	52.05	74.00	-21.95	Peak	HORIZONTAL
4	12990.00	46.24	39.59	40.40	4.39	2.95	52.77	74.00	-21.23	Peak	HORIZONTAL
5	14235.00	45.54	39.90	39.68	4.45	2.83	53.04	74.00	-20.96	Peak	HORIZONTAL
6	17970.00	42.72	42.31	40.68	4.95	3.78	53.08	74.00	-20.92	Peak	HORIZONTAL
7	17970.00	35.25	42.31	40.68	4.95	3.78	45.61	54.00	-8.39	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 12

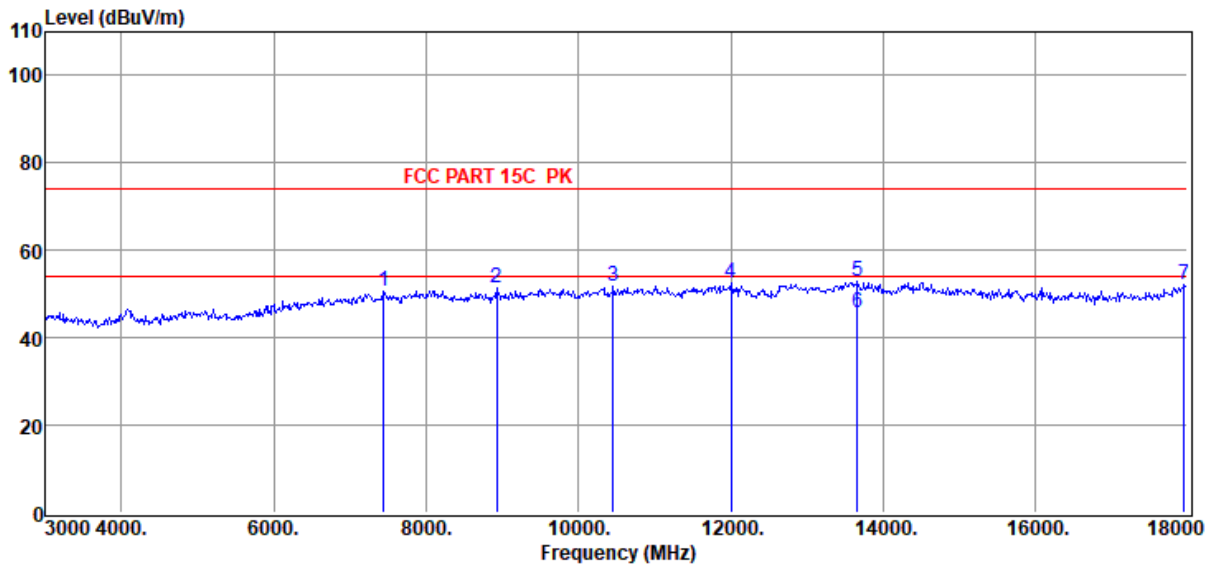

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7440.00	48.49	36.35	39.74	3.13	2.27	50.50	74.00	-23.50	Peak	VERTICAL
2	8925.00	47.72	38.22	39.89	3.31	2.19	51.55	74.00	-22.45	Peak	VERTICAL
3	10455.00	47.14	38.95	40.42	3.67	2.43	51.77	74.00	-22.23	Peak	VERTICAL
4	12000.00	46.87	39.20	40.10	4.05	2.40	52.42	74.00	-21.58	Peak	VERTICAL
5	13665.00	45.60	39.97	39.93	4.17	2.92	52.73	74.00	-21.27	Peak	VERTICAL
6	13665.00	38.60	39.97	39.93	4.17	2.92	45.73	54.00	-8.27	Average	VERTICAL
7	17955.00	41.82	42.22	40.67	4.95	3.78	52.10	74.00	-21.90	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

Right side:

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2402

Data: 1

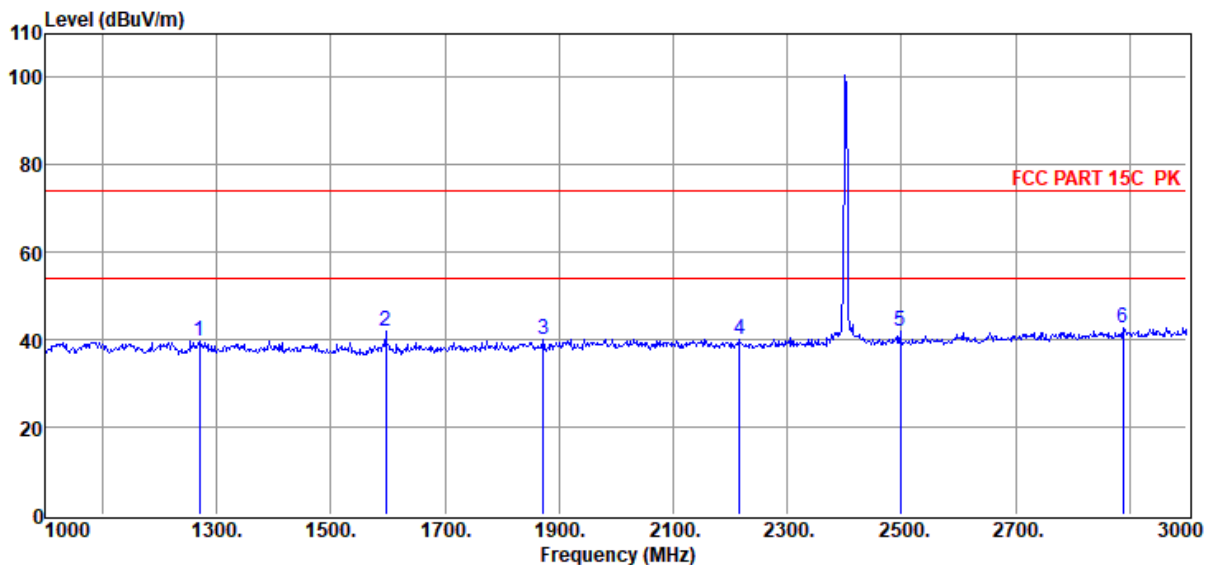

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1270.00	50.92	25.45	38.31	1.25	0.55	39.86	74.00	-34.14	Peak	HORIZONTAL
2	1596.00	53.23	25.65	38.79	1.42	0.61	42.12	74.00	-31.88	Peak	HORIZONTAL
3	1872.00	50.87	26.37	39.21	1.54	0.66	40.23	74.00	-33.77	Peak	HORIZONTAL
4	2216.00	50.12	27.09	39.51	1.66	0.70	40.06	74.00	-33.94	Peak	HORIZONTAL
5	2498.00	51.43	27.60	39.65	1.74	0.73	41.85	74.00	-32.15	Peak	HORIZONTAL
6	2888.00	50.85	29.07	39.84	1.84	0.78	42.70	74.00	-31.30	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 2

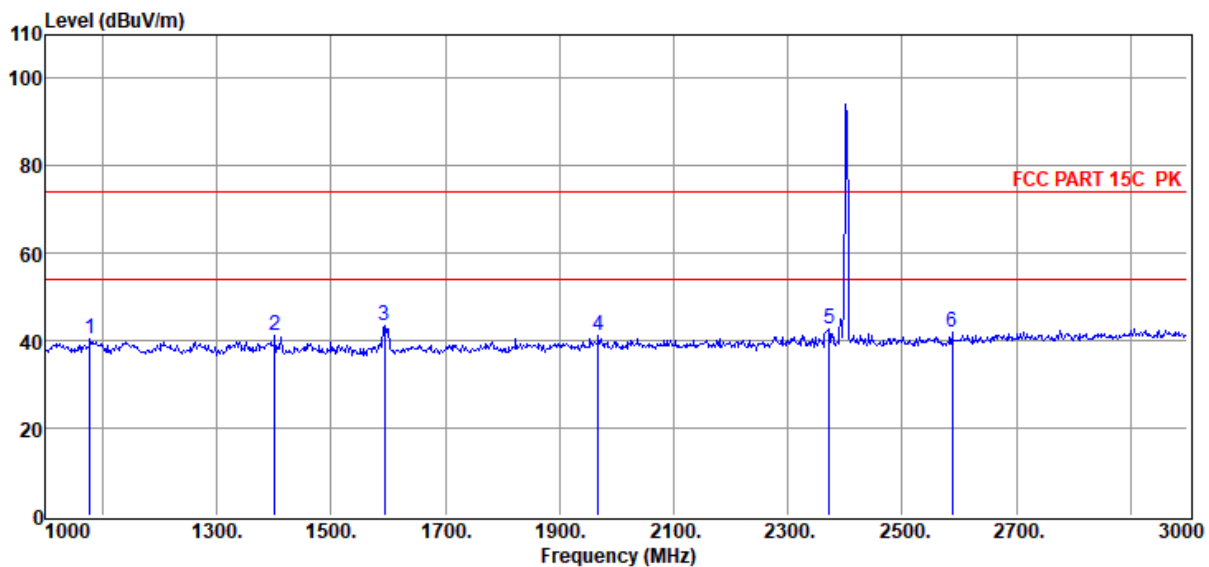

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1078.00	51.17	25.48	38.02	1.14	0.51	40.28	74.00	-33.72	Peak	VERTICAL
2	1402.00	52.25	25.42	38.50	1.33	0.57	41.07	74.00	-32.93	Peak	VERTICAL
3	1594.00	54.76	25.64	38.79	1.42	0.61	43.64	74.00	-30.36	Peak	VERTICAL
4	1968.00	51.51	26.62	39.35	1.59	0.67	41.04	74.00	-32.96	Peak	VERTICAL
5	2372.00	52.65	27.37	39.59	1.70	0.72	42.85	74.00	-31.15	Peak	VERTICAL
6	2588.00	51.34	27.93	39.69	1.76	0.74	42.08	74.00	-31.92	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2402

Data: 3

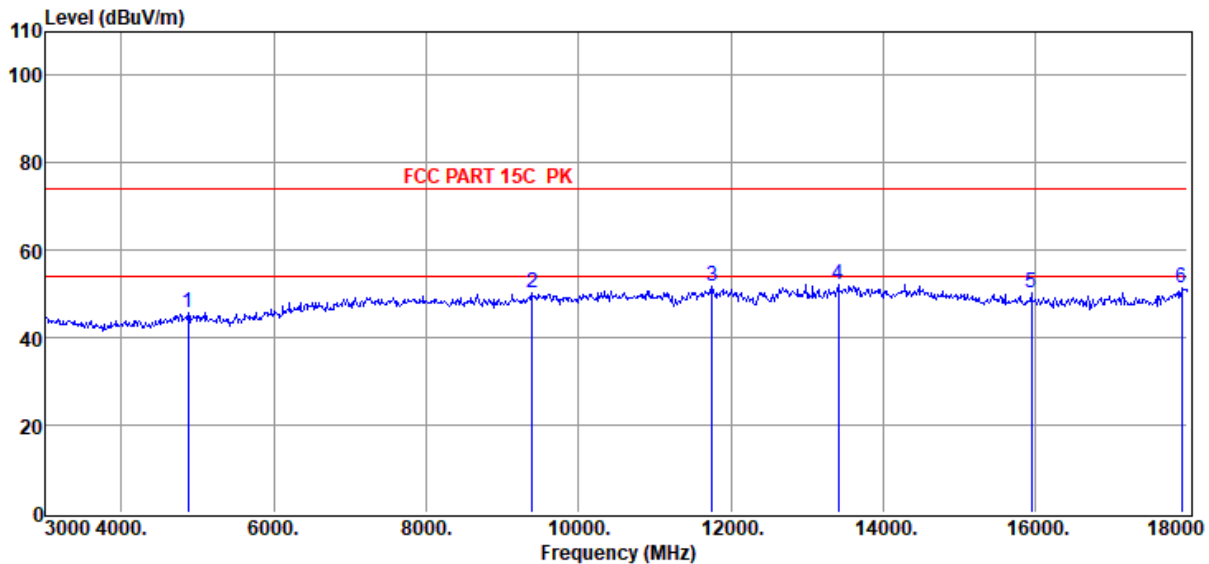

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4875.00	48.91	32.70	40.38	2.49	2.17	45.89	74.00	-28.11	Peak	HORIZONTAL
2	9390.00	45.91	38.61	40.17	3.56	2.30	50.21	74.00	-23.79	Peak	HORIZONTAL
3	11760.00	46.24	39.10	40.12	4.01	2.40	51.63	74.00	-22.37	Peak	HORIZONTAL
4	13410.00	45.47	39.93	40.11	4.06	2.94	52.29	74.00	-21.71	Peak	HORIZONTAL
5	15945.00	44.39	38.00	39.88	4.60	3.09	50.20	74.00	-23.80	Peak	HORIZONTAL
6	17925.00	41.19	42.03	40.65	4.94	3.77	51.28	74.00	-22.72	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 4

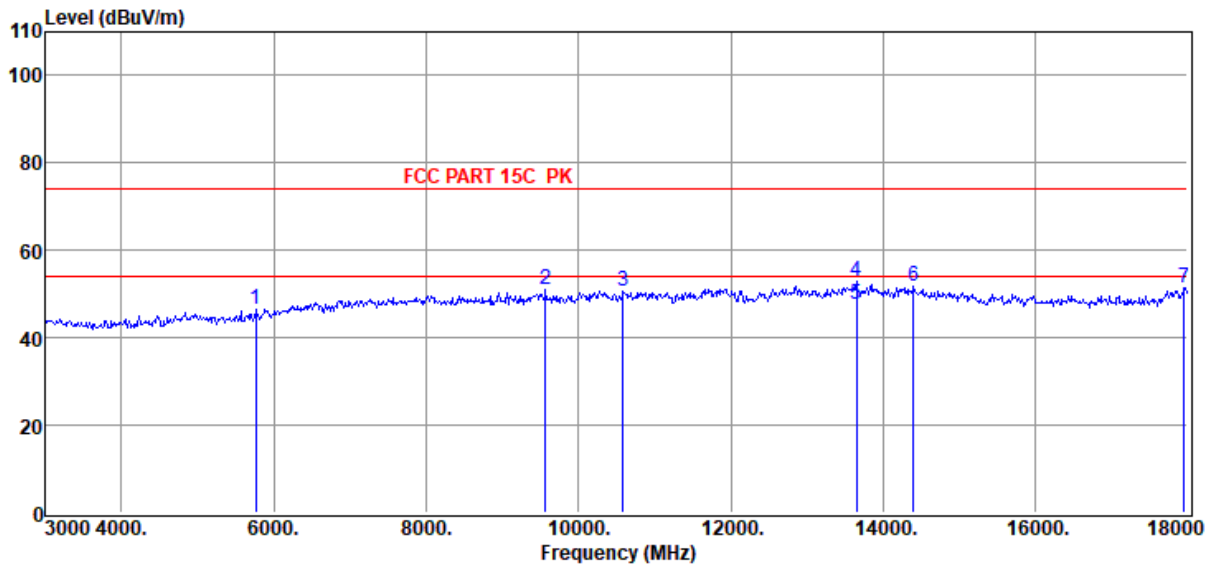

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5760.00	48.23	33.42	40.48	2.81	2.65	46.63	74.00	-27.37	Peak	VERTICAL
2	9570.00	46.80	38.66	40.30	3.63	2.35	51.14	74.00	-22.86	Peak	VERTICAL
3	10590.00	45.97	39.05	40.36	3.69	2.42	50.77	74.00	-23.23	Peak	VERTICAL
4	13650.00	45.76	39.97	39.94	4.15	2.92	52.86	74.00	-21.14	Peak	VERTICAL
5	13650.00	40.67	39.97	39.94	4.15	2.92	47.77	54.00	-6.23	Average	VERTICAL
6	14400.00	44.31	39.90	39.66	4.39	2.79	51.73	74.00	-22.27	Peak	VERTICAL
7	17955.00	41.04	42.22	40.67	4.95	3.78	51.32	74.00	-22.68	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2441

Data: 5

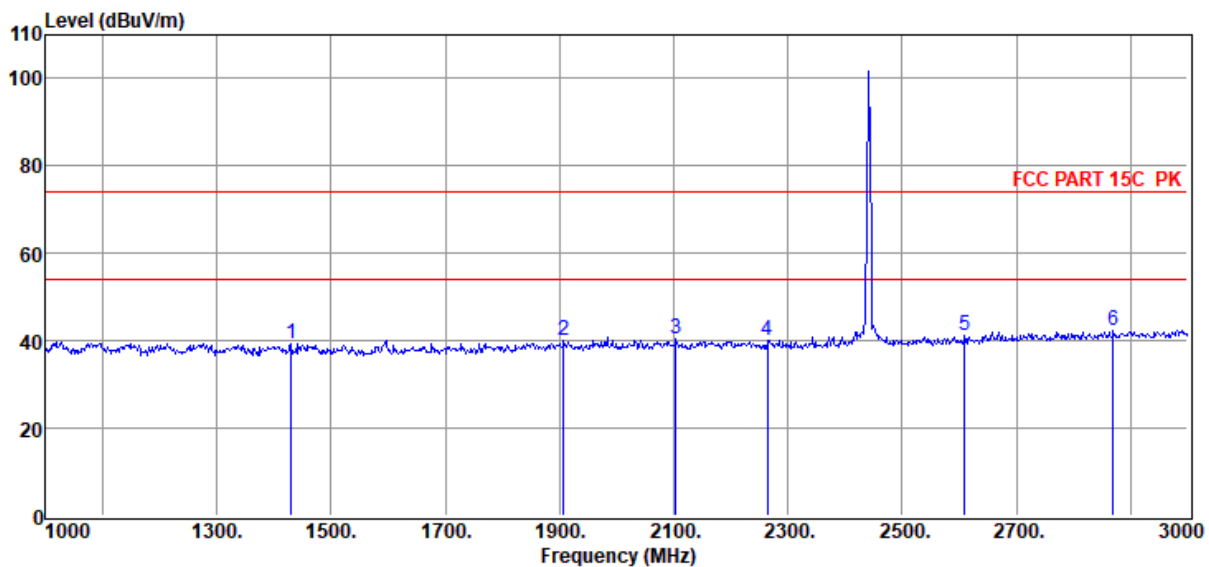

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1430.00	50.48	25.41	38.55	1.34	0.58	39.26	74.00	-34.74	Peak	HORIZONTAL
2	1908.00	50.60	26.46	39.26	1.56	0.66	40.02	74.00	-33.98	Peak	HORIZONTAL
3	2104.00	50.62	26.89	39.45	1.63	0.69	40.38	74.00	-33.62	Peak	HORIZONTAL
4	2264.00	50.11	27.18	39.53	1.67	0.71	40.14	74.00	-33.86	Peak	HORIZONTAL
5	2610.00	50.20	28.02	39.71	1.77	0.75	41.03	74.00	-32.97	Peak	HORIZONTAL
6	2870.00	50.55	29.01	39.84	1.84	0.78	42.34	74.00	-31.66	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2441

Data: 7

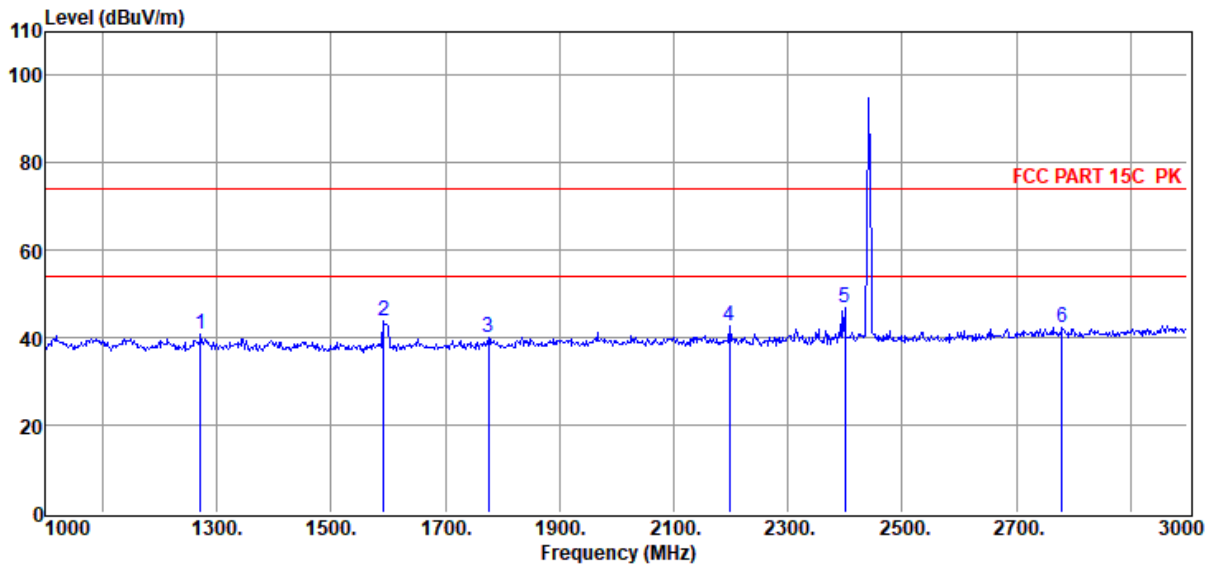

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1272.00	51.70	25.45	38.31	1.25	0.55	40.64	74.00	-33.36	Peak	VERTICAL
2	1592.00	55.03	25.64	38.79	1.42	0.61	43.91	74.00	-30.09	Peak	VERTICAL
3	1776.00	51.01	26.12	39.06	1.50	0.64	40.21	74.00	-33.79	Peak	VERTICAL
4	2198.00	52.65	27.06	39.50	1.66	0.70	42.57	74.00	-31.43	Peak	VERTICAL
5	2400.00	56.63	27.42	39.60	1.71	0.72	46.88	74.00	-27.12	Peak	VERTICAL
6	2780.00	50.98	28.66	39.79	1.81	0.77	42.43	74.00	-31.57	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2441

Data: 6

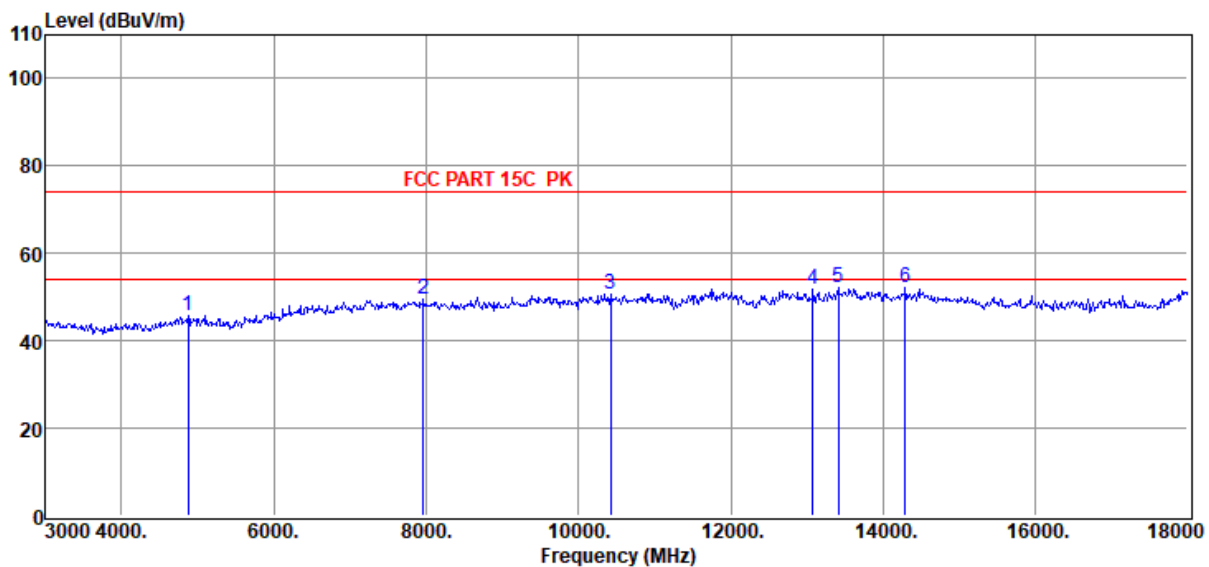

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4875.00	48.91	32.70	40.38	2.49	2.17	45.89	74.00	-28.11	Peak	HORIZONTAL
2	7965.00	46.78	36.96	39.80	3.19	2.28	49.41	74.00	-24.59	Peak	HORIZONTAL
3	10425.00	46.05	38.91	40.43	3.67	2.44	50.64	74.00	-23.36	Peak	HORIZONTAL
4	13080.00	45.32	39.66	40.34	4.33	2.96	51.93	74.00	-22.07	Peak	HORIZONTAL
5	13410.00	45.47	39.93	40.11	4.06	2.94	52.29	74.00	-21.71	Peak	HORIZONTAL
6	14295.00	44.62	39.90	39.67	4.42	2.82	52.09	74.00	-21.91	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2441

Data: 8

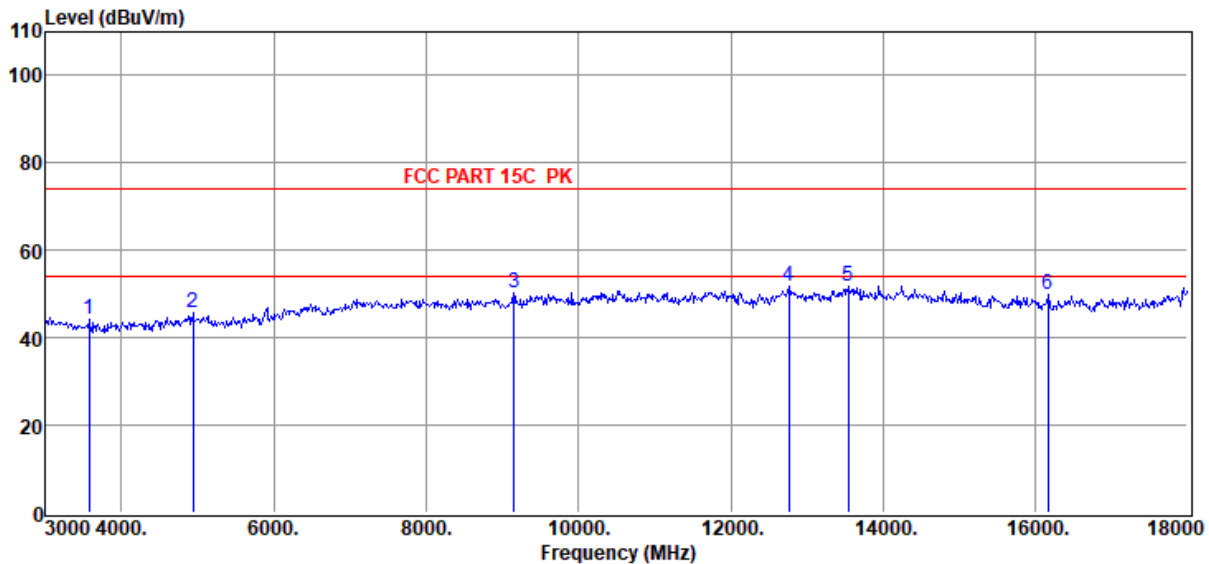

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	3570.00	50.21	29.64	40.07	1.75	2.53	44.06	74.00	-29.94	Peak	VERTICAL
2	4935.00	48.64	32.89	40.39	2.52	2.18	45.84	74.00	-28.16	Peak	VERTICAL
3	9150.00	46.05	38.42	40.01	3.42	2.23	50.11	74.00	-23.89	Peak	VERTICAL
4	12765.00	45.75	39.32	40.33	4.08	2.83	51.65	74.00	-22.35	Peak	VERTICAL
5	13545.00	44.90	39.99	40.02	4.04	2.93	51.84	74.00	-22.16	Peak	VERTICAL
6	16170.00	44.01	37.90	39.93	4.64	3.19	49.81	74.00	-24.19	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 9

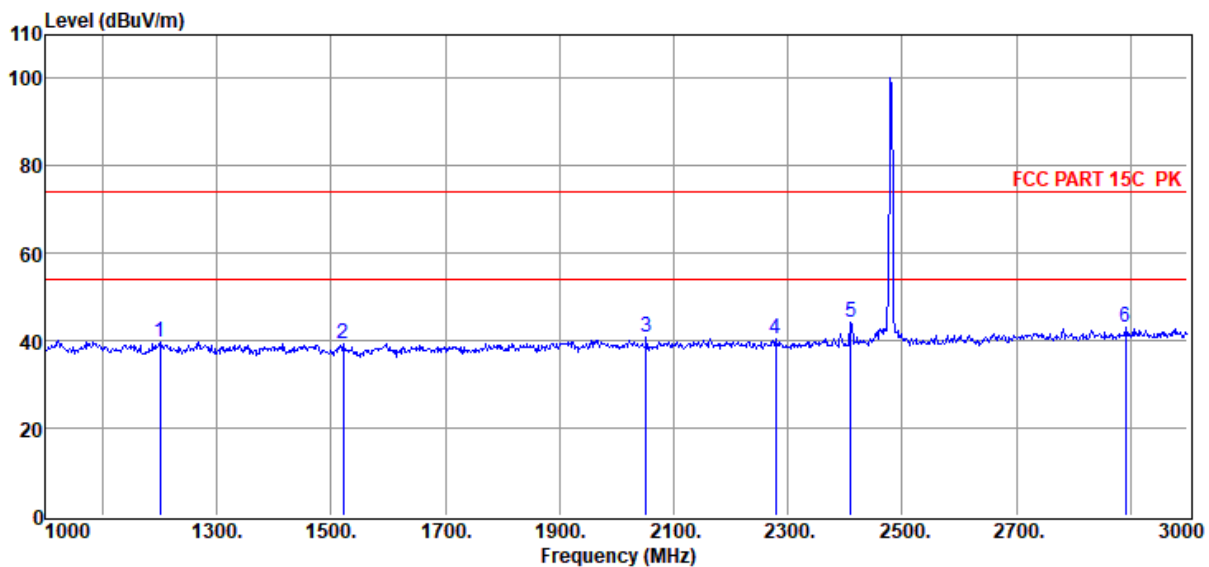

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1200.00	50.70	25.46	38.20	1.21	0.54	39.71	74.00	-34.29	Peak	HORIZONTAL
2	1522.00	50.66	25.46	38.68	1.39	0.59	39.42	74.00	-34.58	Peak	HORIZONTAL
3	2052.00	51.15	26.79	39.43	1.61	0.69	40.81	74.00	-33.19	Peak	HORIZONTAL
4	2278.00	50.42	27.20	39.54	1.68	0.71	40.47	74.00	-33.53	Peak	HORIZONTAL
5	2410.00	54.05	27.44	39.61	1.71	0.73	44.32	74.00	-29.68	Peak	HORIZONTAL
6	2892.00	51.40	29.09	39.85	1.84	0.78	43.26	74.00	-30.74	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 10

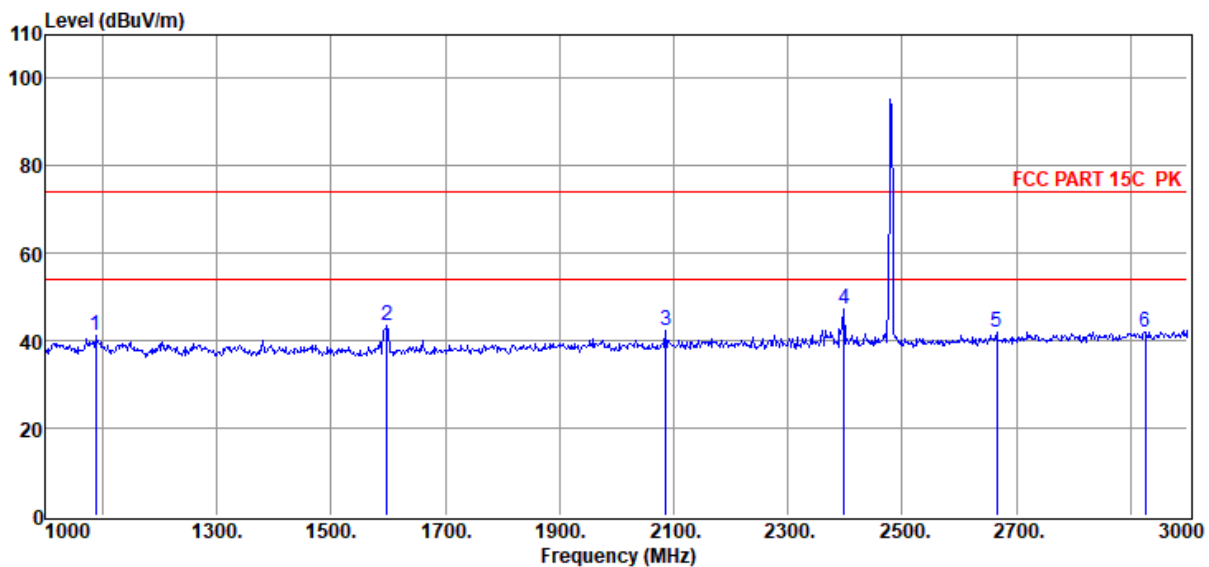

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1088.00	52.13	25.48	38.03	1.15	0.52	41.25	74.00	-32.75	Peak	VERTICAL
2	1598.00	54.61	25.65	38.80	1.42	0.61	43.49	74.00	-30.51	Peak	VERTICAL
3	2086.00	52.52	26.85	39.44	1.62	0.69	42.24	74.00	-31.76	Peak	VERTICAL
4	2398.00	56.87	27.42	39.60	1.71	0.72	47.12	74.00	-26.88	Peak	VERTICAL
5	2666.00	51.00	28.23	39.73	1.78	0.75	42.03	74.00	-31.97	Peak	VERTICAL
6	2926.00	50.06	29.22	39.86	1.85	0.78	42.05	74.00	-31.95	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 11

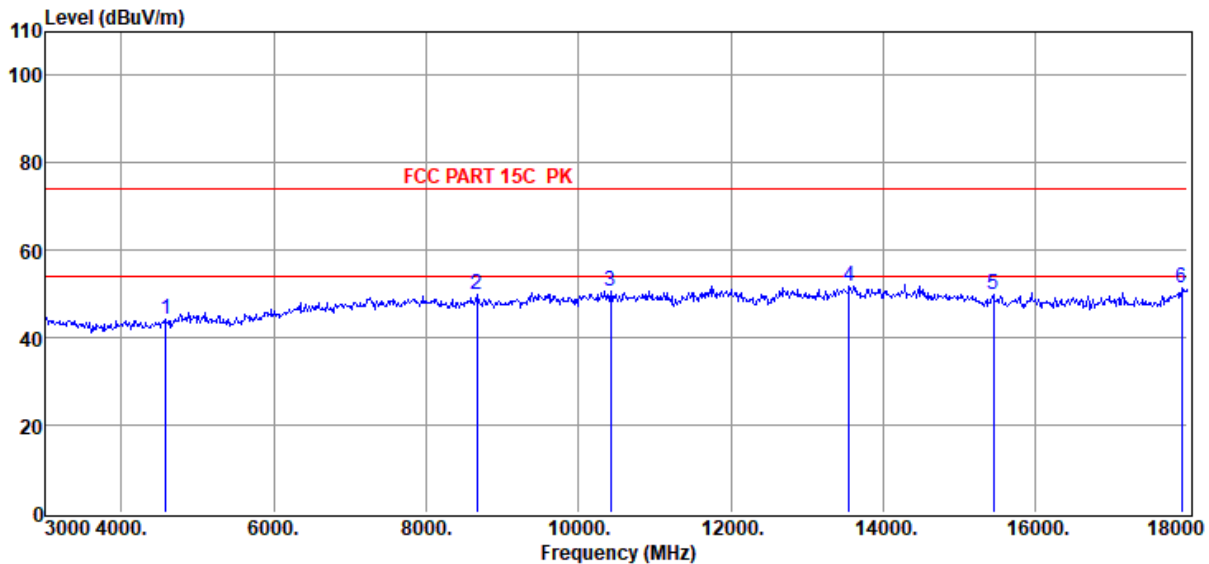

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4575.00	48.42	31.74	40.32	2.39	2.13	44.36	74.00	-29.64	Peak	HORIZONTAL
2	8670.00	46.14	37.97	39.87	3.26	2.21	49.71	74.00	-24.29	Peak	HORIZONTAL
3	10425.00	46.05	38.91	40.43	3.67	2.44	50.64	74.00	-23.36	Peak	HORIZONTAL
4	13560.00	44.91	39.99	40.01	4.05	2.93	51.87	74.00	-22.13	Peak	HORIZONTAL
5	15450.00	43.27	38.87	39.74	4.55	2.84	49.79	74.00	-24.21	Peak	HORIZONTAL
6	17925.00	41.19	42.03	40.65	4.94	3.77	51.28	74.00	-22.72	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 12

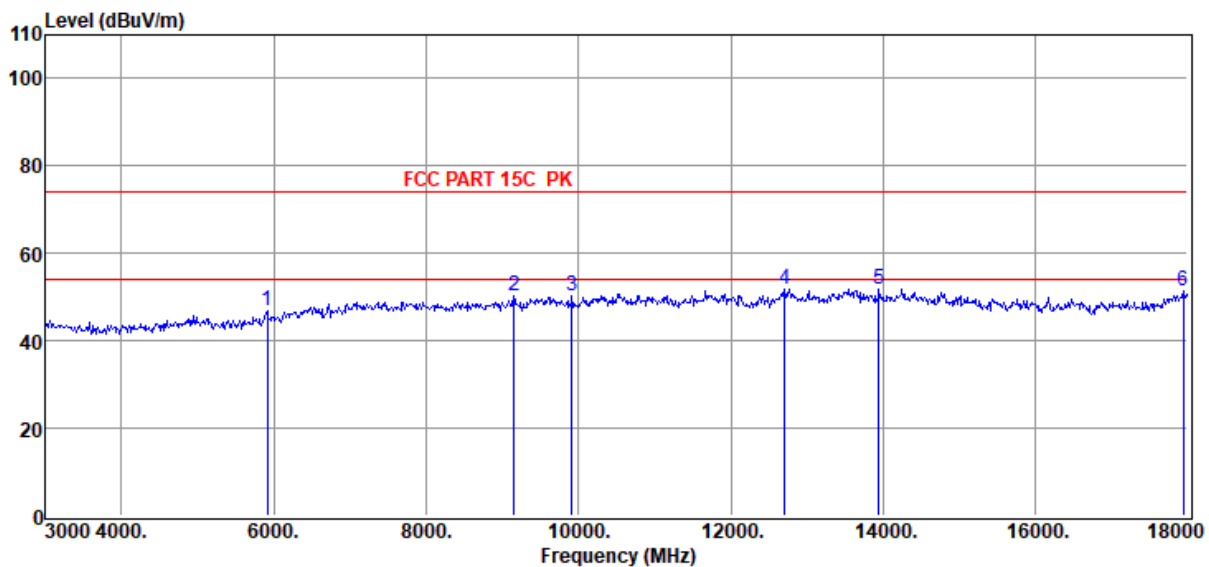

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5910.00	47.69	33.78	40.49	2.95	2.75	46.68	74.00	-27.32	Peak	VERTICAL
2	9150.00	46.05	38.42	40.01	3.42	2.23	50.11	74.00	-23.89	Peak	VERTICAL
3	9915.00	46.12	38.45	40.54	3.66	2.45	50.14	74.00	-23.86	Peak	VERTICAL
4	12705.00	46.24	39.25	40.31	3.99	2.79	51.96	74.00	-22.04	Peak	VERTICAL
5	13950.00	44.22	39.91	39.74	4.48	2.90	51.77	74.00	-22.23	Peak	VERTICAL
6	17940.00	41.24	42.13	40.66	4.94	3.77	51.42	74.00	-22.58	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

Same as section 4.1

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Original test data

Left side:

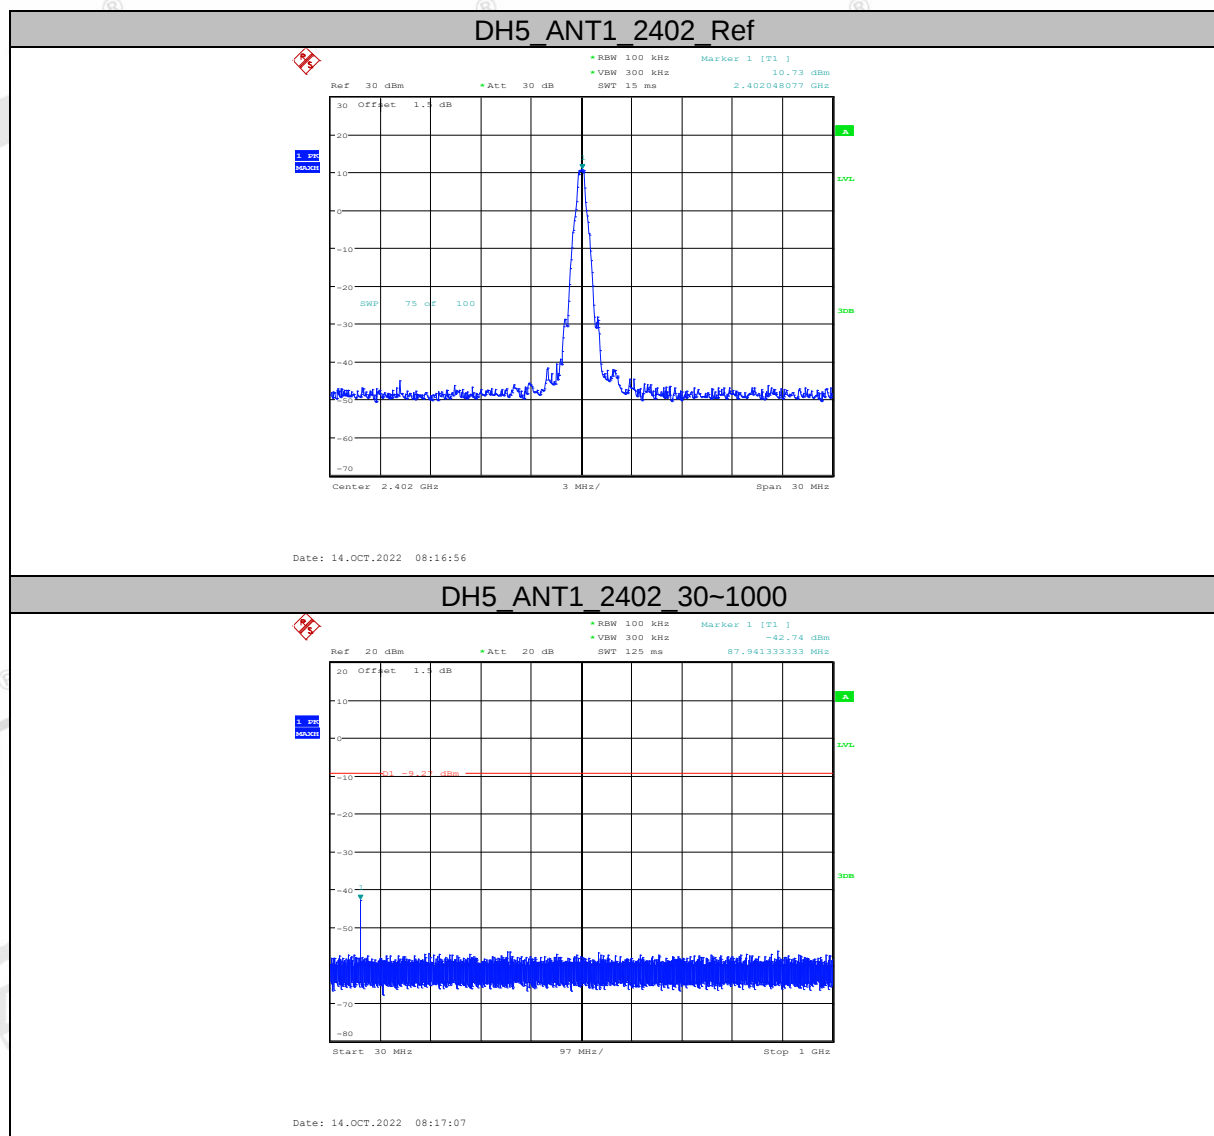


DH5 ANT1 2402 1000~26500

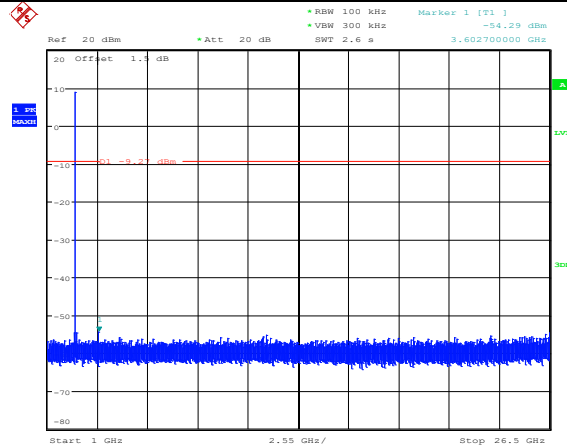


Date: 14.OCT.2022 08:17:24

DH5 ANT1 2441 Ref

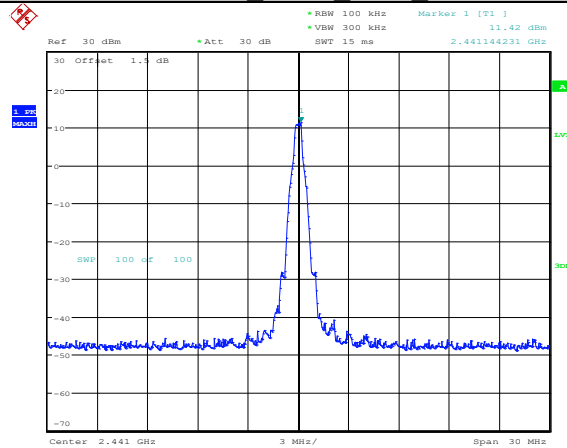


Date: 14.OCT.2022 08:17:53

DH5 ANT1 2441 30~1000

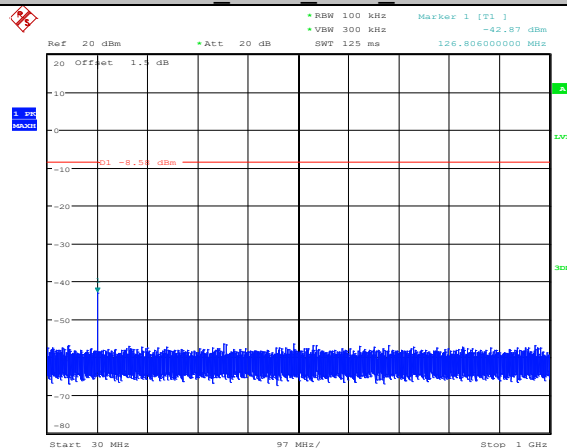


Date: 14.OCT.2022 08:18:02

DH5 ANT1 2441 1000-26500

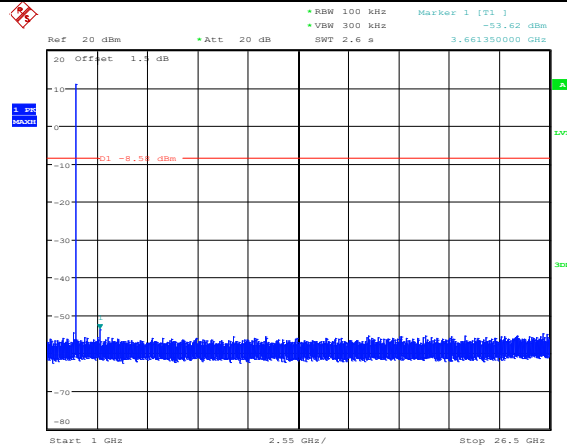


Date: 14.OCT.2022 08:18:30

DH5 ANT1 2480 Ref

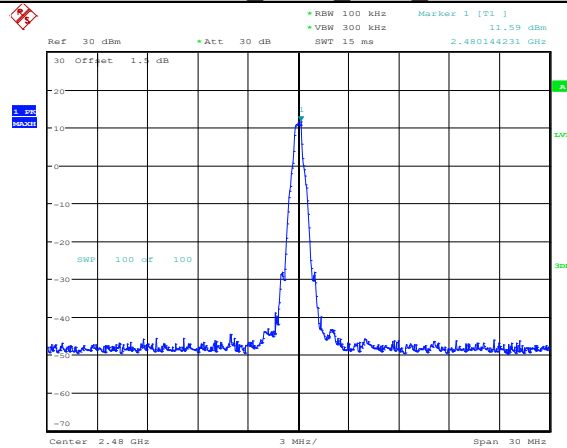


Date: 14.OCT.2022 08:18:48

DH5 ANT1 2480 30~1000

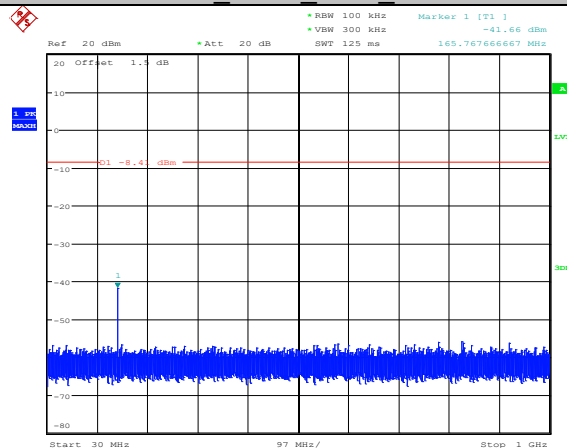


Date: 14.OCT.2022 08:18:57

DH5 ANT1 2480 1000-26500

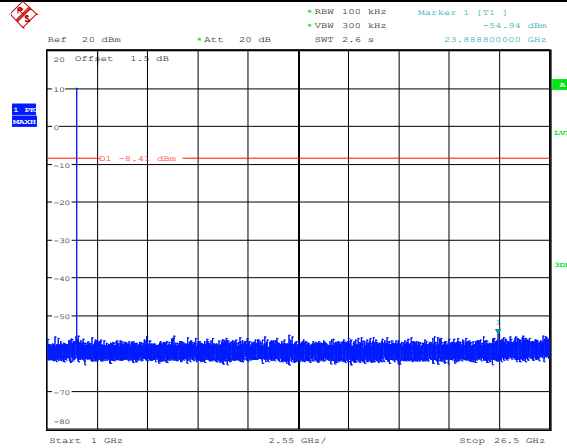


Date: 14.OCT.2022 08:19:20

2DH5 ANT1 2402 Ref

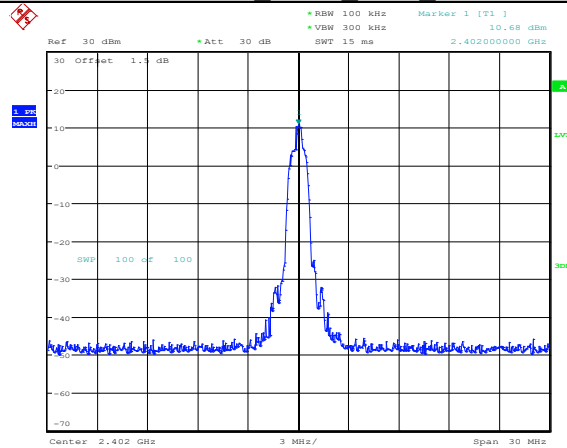


Date: 14.OCT.2022 08:19:37

2DH5 ANT1 2402 30-1000

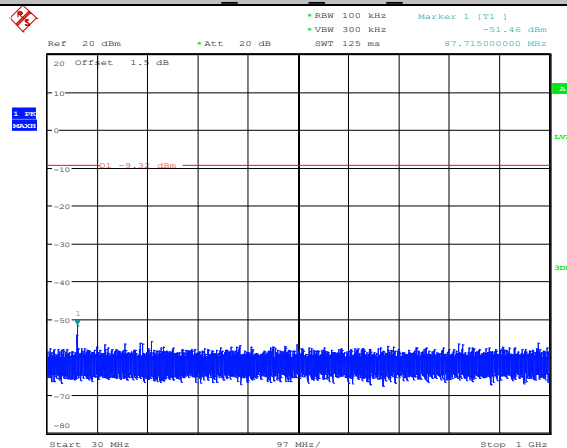


Date: 14.OCT.2022 08:19:47

2DH5 ANT1 2402 1000~26500

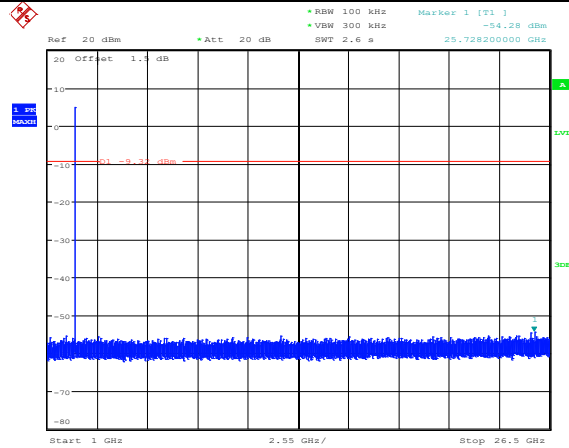


Date: 14.OCT.2022 08:20:23

2DH5 ANT1 2441 Ref

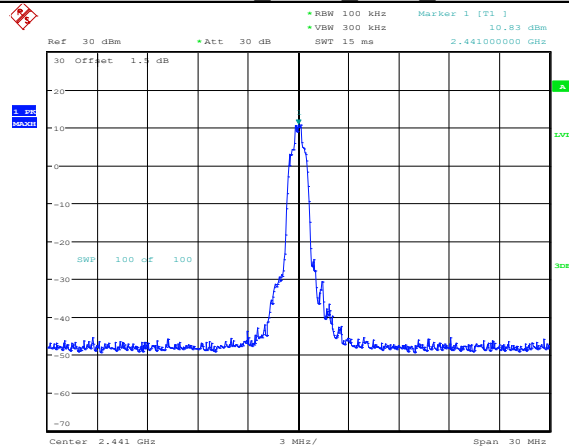


Date: 14.OCT.2022 08:20:43

2DH5 ANT1 2441 30~1000

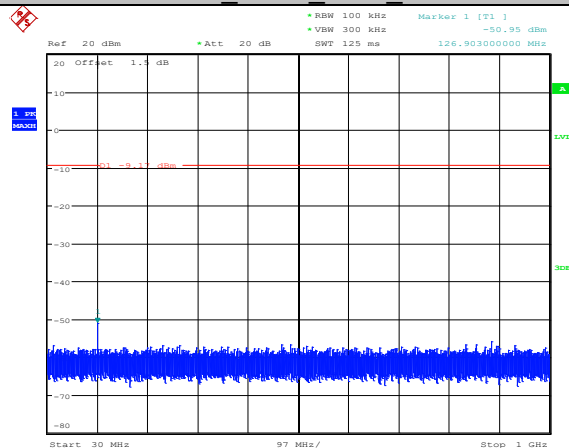


Date: 14.OCT.2022 08:20:53

2DH5 ANT1 2441 1000~26500

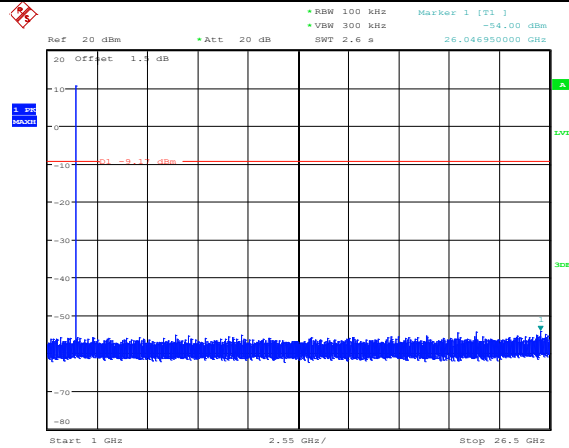


Date: 14.OCT.2022 08:21:26

2DH5 ANT1 2480 Ref

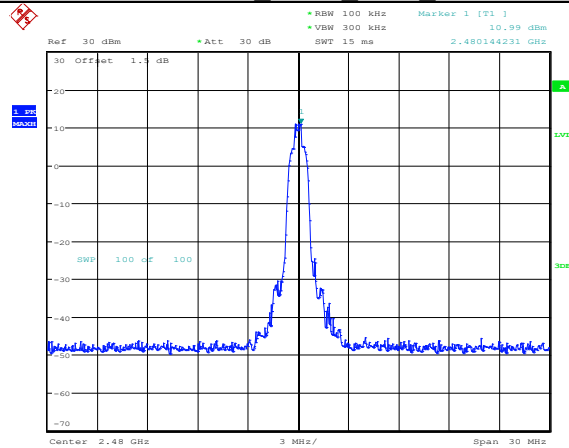


Date: 14.OCT.2022 08:21:42

2DH5 ANT1 2480 30~1000

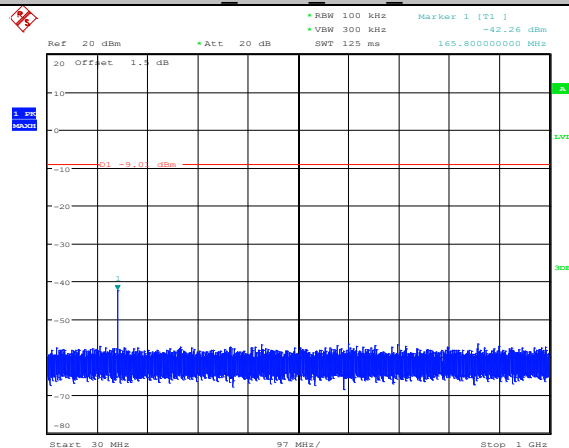


Date: 14.OCT.2022 08:21:51

2DH5 ANT1 2480 1000~26500

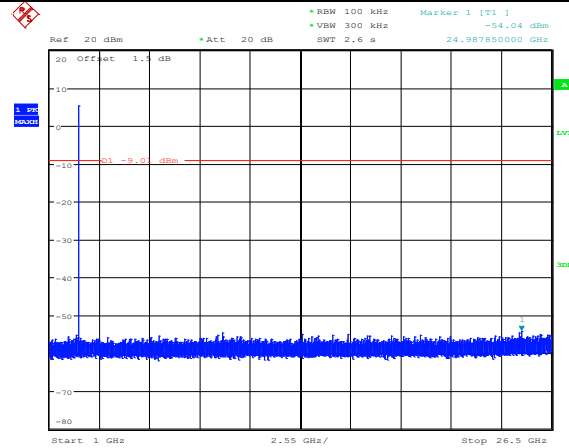


Date: 14.OCT.2022 08:22:40

3DH5 ANT1 2402 Ref

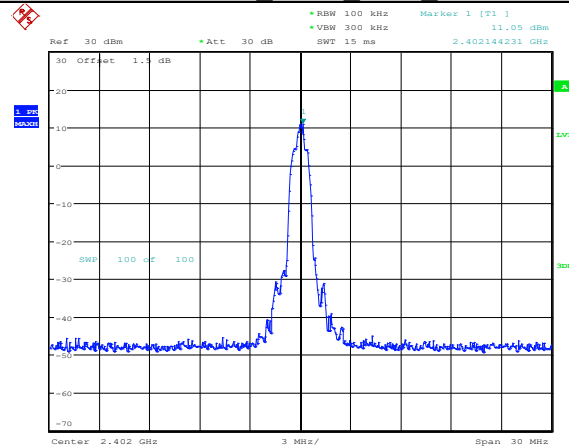


Date: 14.OCT.2022 08:23:09

3DH5 ANT1 2402 30~1000

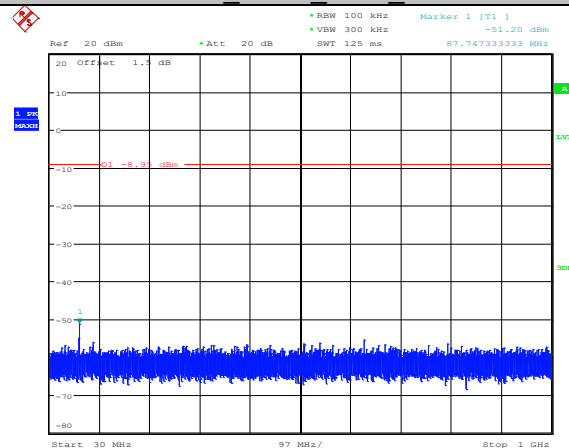


Date: 14.OCT.2022 08:23:19

3DH5 ANT1 2402 1000~26500

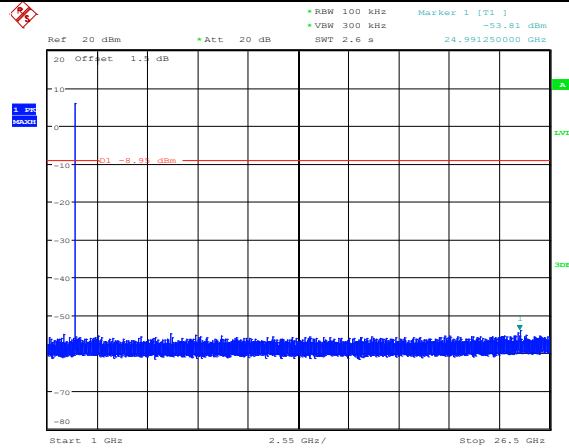


Date: 14.OCT.2022 08:24:18

3DH5 ANT1 2441 Ref

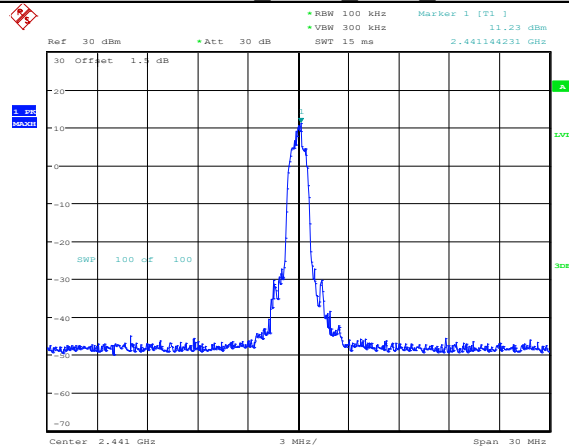


Date: 14.OCT.2022 08:25:04

3DH5 ANT1 2441 30~1000

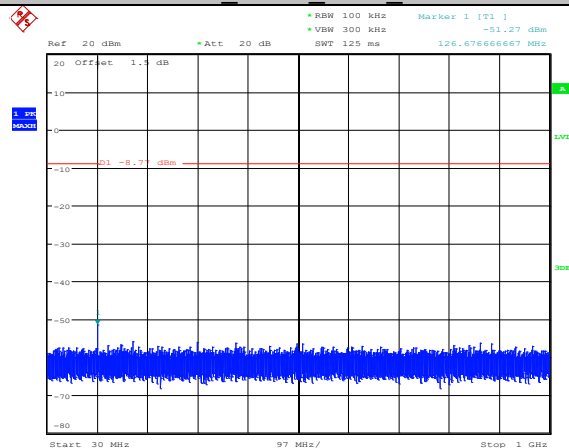


Date: 14.OCT.2022 08:25:13

3DH5 ANT1 2441 1000~26500

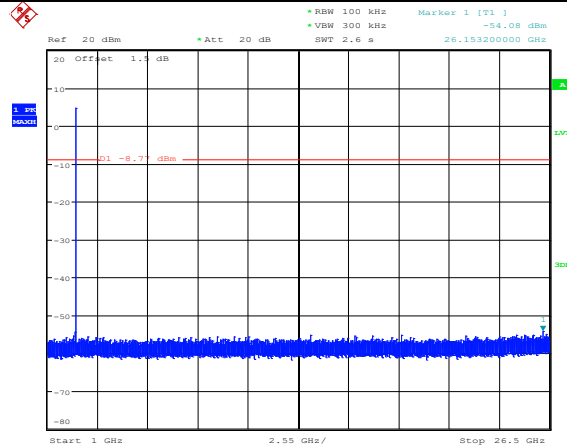


Date: 14.OCT.2022 08:26:04

3DH5 ANT1 2480 Ref

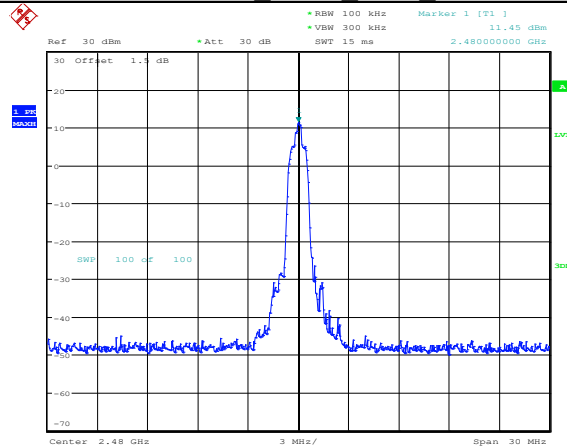


Date: 14.OCT.2022 08:26:17



3DH5 ANT1 2480 30~1000

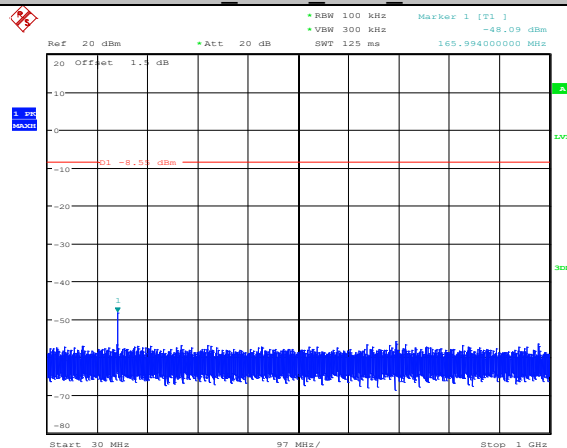


Date: 14.OCT.2022 08:26:27

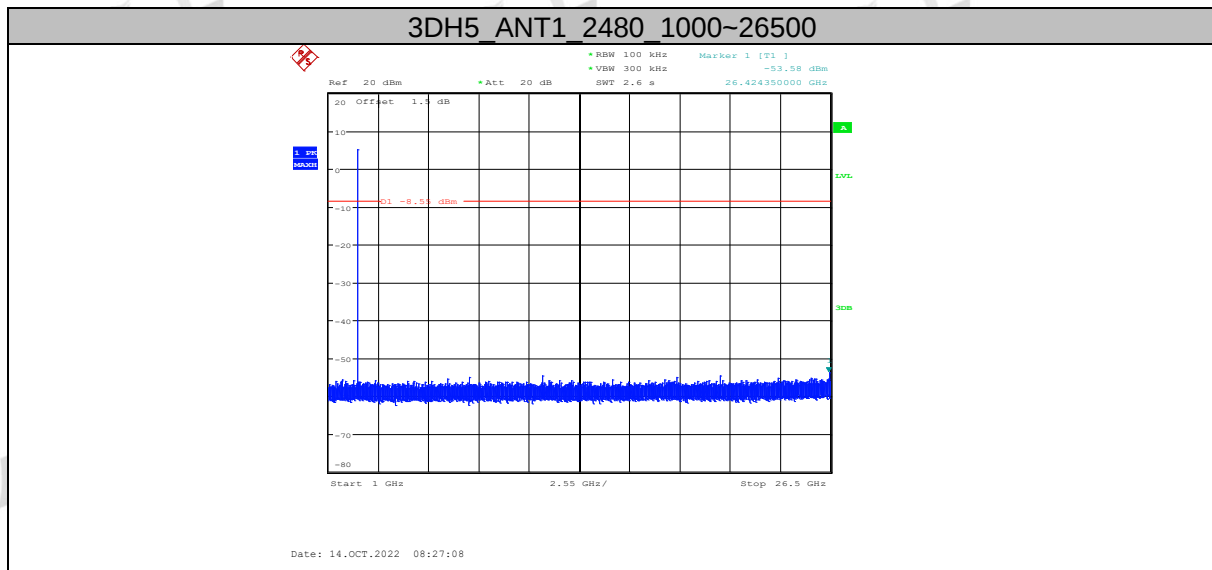

Right side:

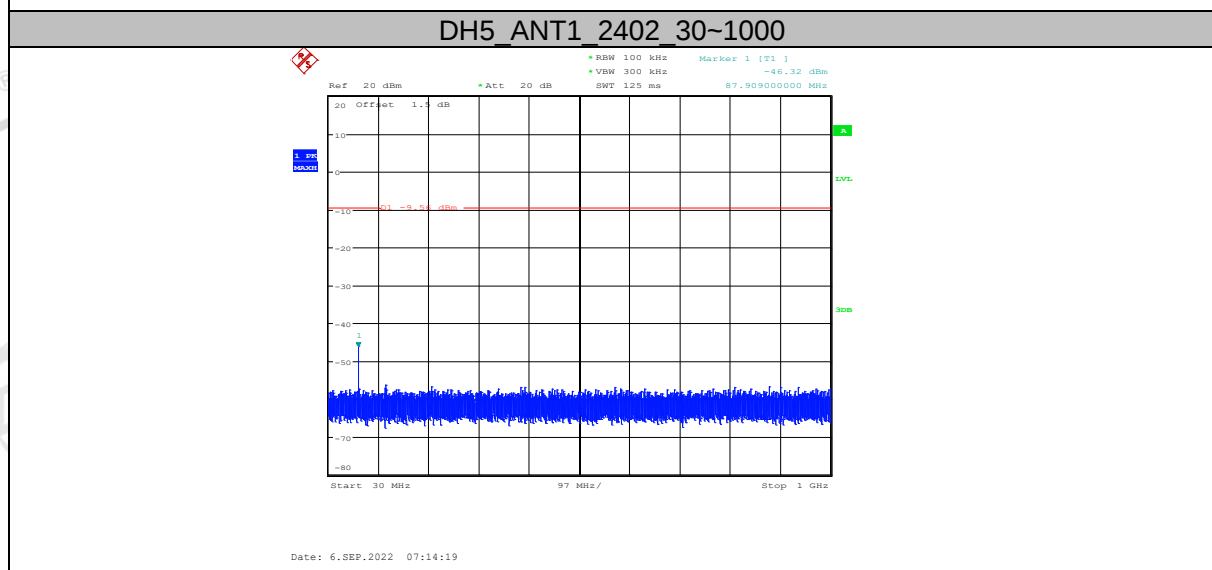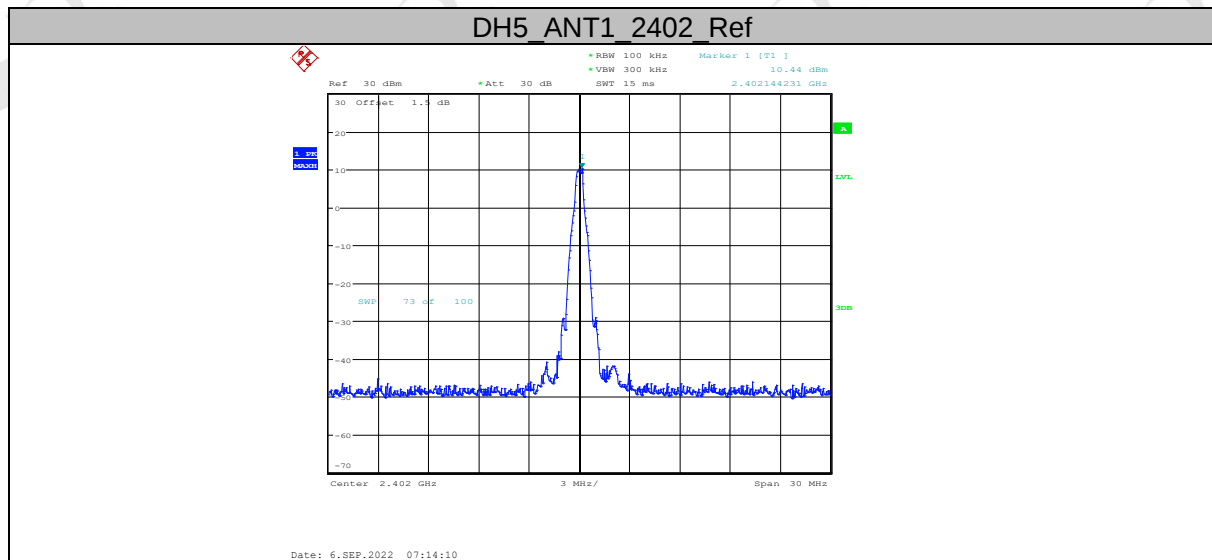


DH5 ANT1 2402 1000~26500

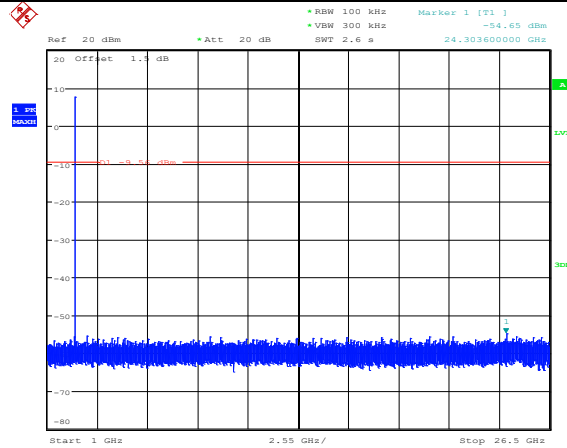


Date: 6.SEP.2022 07:14:31

DH5 ANT1 2441 Ref

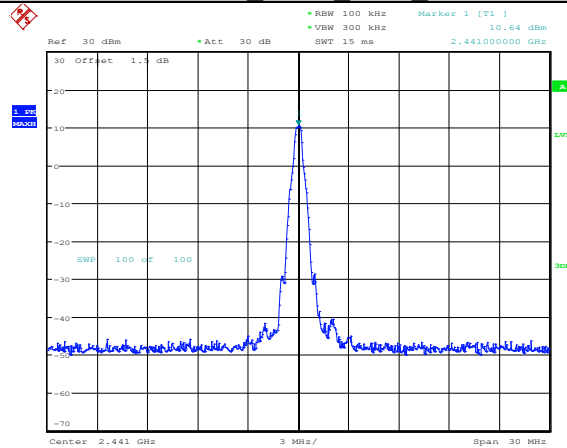


Date: 6.SEP.2022 07:15:43

DH5 ANT1 2441 30~1000

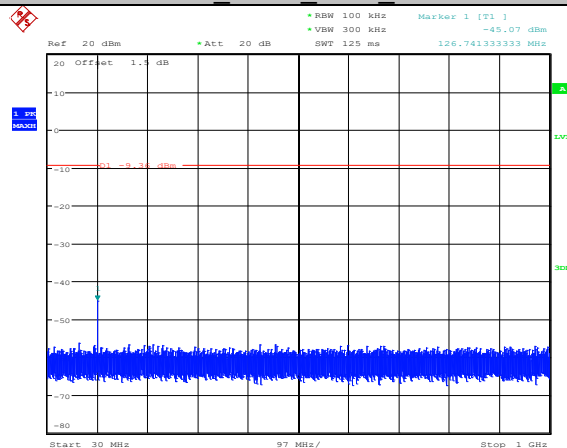


Date: 6.SEP.2022 07:15:52

DH5_ANT1_2441_1000-26500

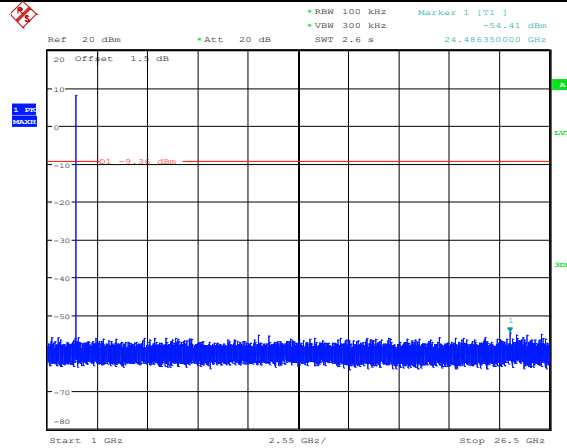


Date: 6.SEP.2022 07:16:05

DH5_ANT1_2480_Ref

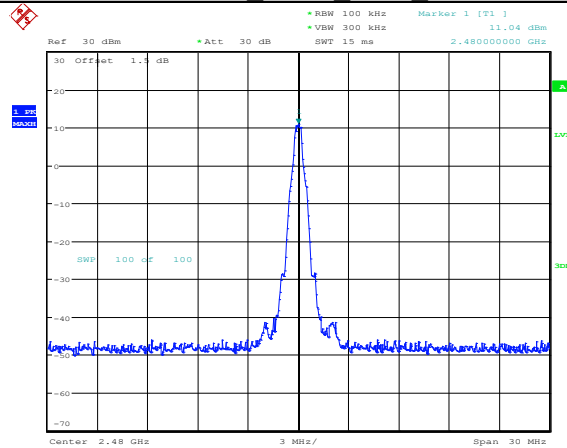


Date: 6.SEP.2022 07:17:57

DH5_ANT1_2480_30~1000

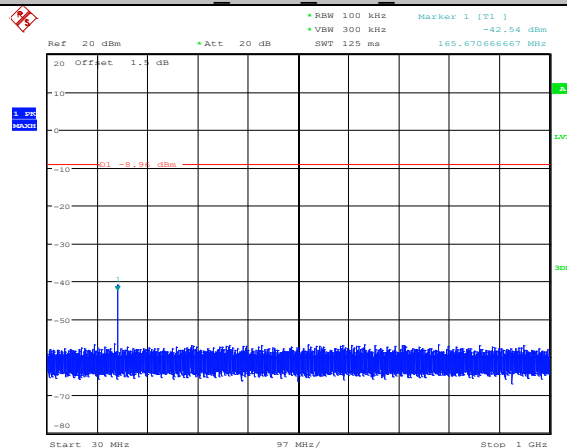


Date: 6.SEP.2022 07:18:09

DH5 ANT1 2480 1000-26500

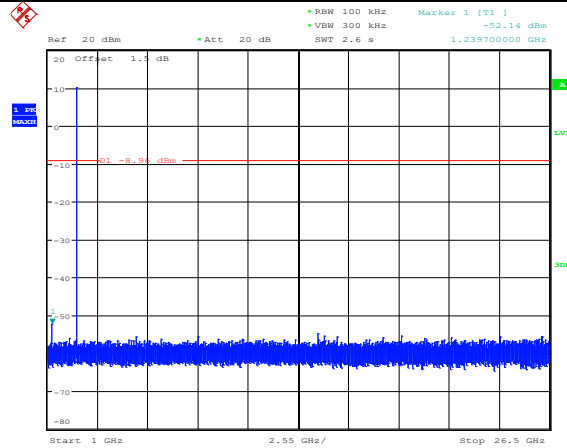


Date: 6.SEP.2022 07:18:22

2DH5 ANT1 2402 Ref

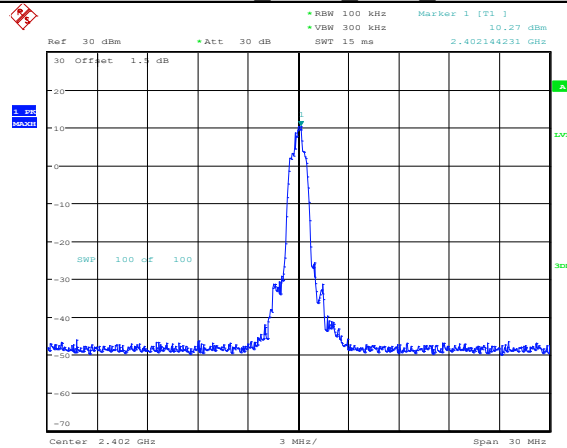


Date: 6.SEP.2022 07:29:35

2DH5 ANT1 2402 30-1000

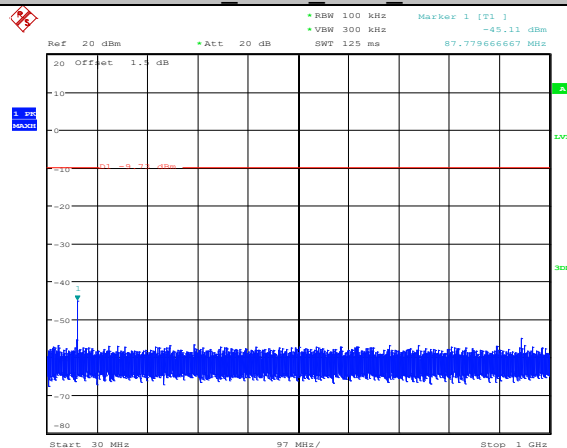


Date: 6.SEP.2022 07:29:44

2DH5 ANT1 2402 1000~26500

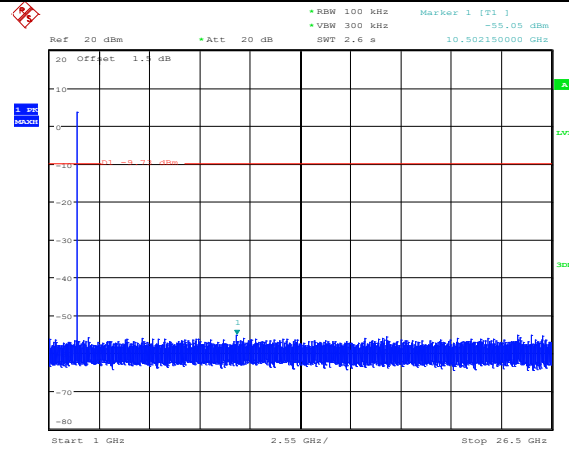


Date: 6.SEP.2022 07:29:56

2DH5 ANT1 2441 Ref

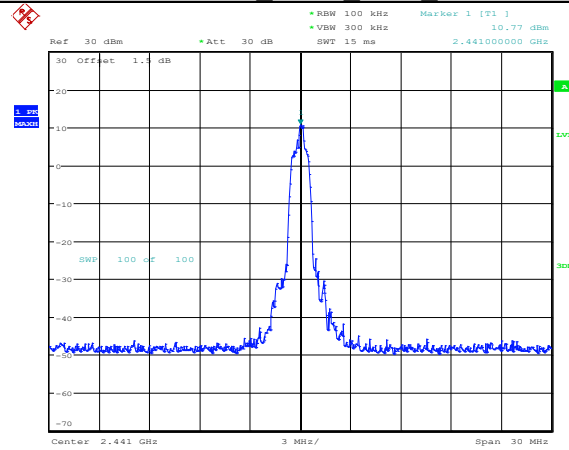


Date: 6.SEP.2022 07:31:10

2DH5 ANT1 2441 30~1000

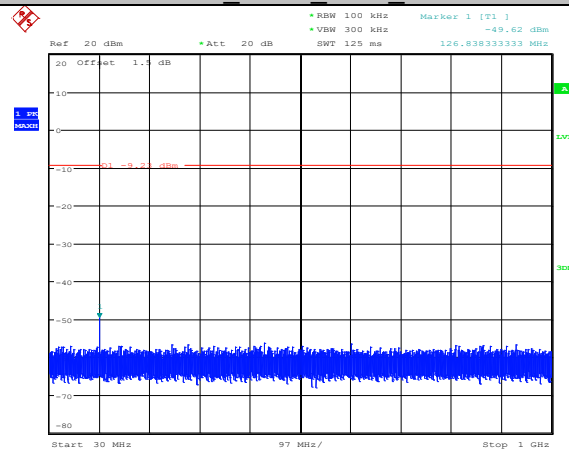


Date: 6.SEP.2022 07:31:19

2DH5 ANT1 2441 1000~26500

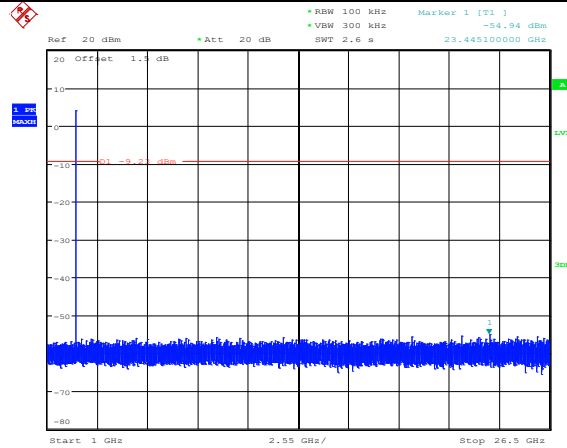


Date: 6.SEP.2022 07:31:32

2DH5 ANT1 2480 Ref

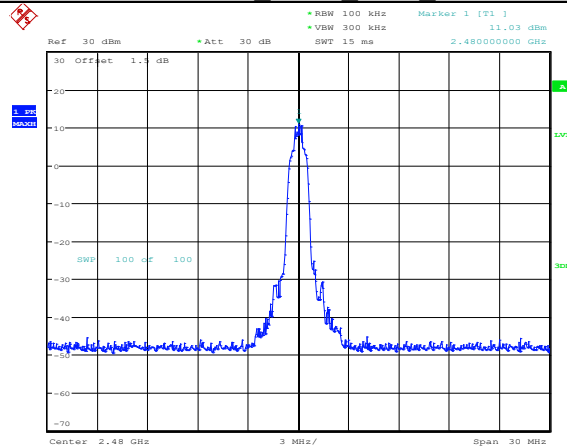


Date: 6.SEP.2022 07:33:08

2DH5 ANT1 2480 30~1000

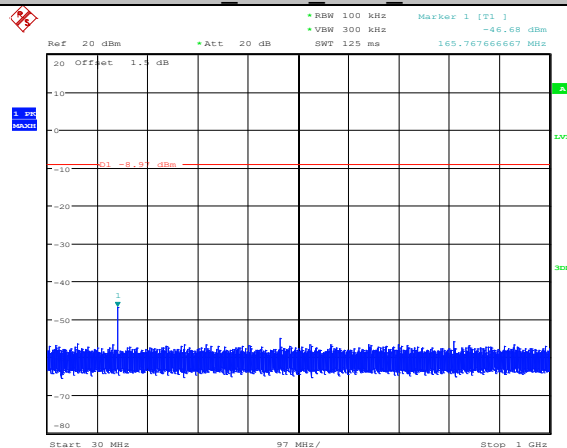


Date: 6.SEP.2022 07:33:25

2DH5 ANT1 2480 1000~26500

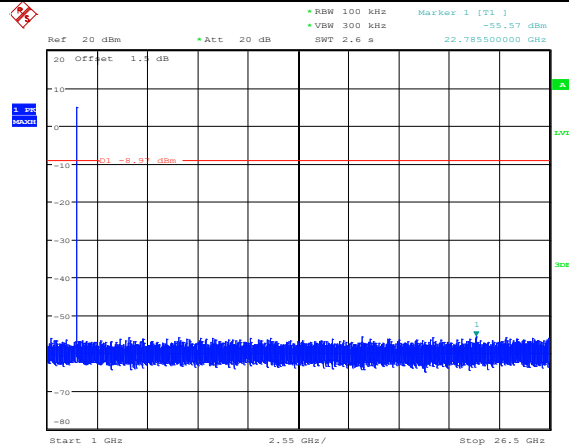


Date: 6.SEP.2022 07:33:38

3DH5 ANT1 2402 Ref

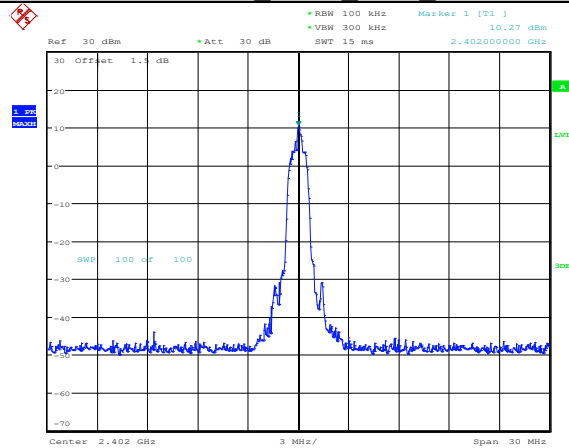


Date: 6.SEP.2022 07:35:21

3DH5 ANT1 2402 30~1000

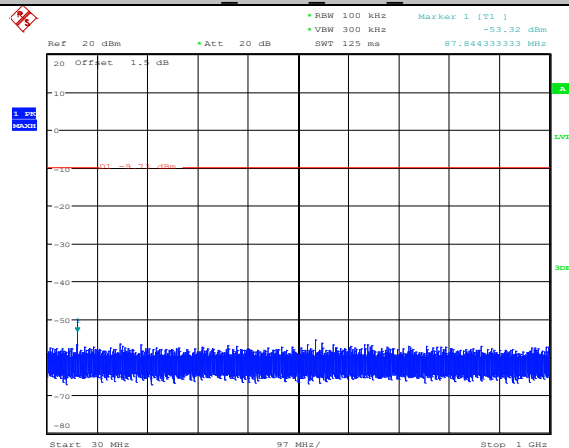


Date: 6.SEP.2022 07:35:31

3DH5 ANT1 2402 1000~26500

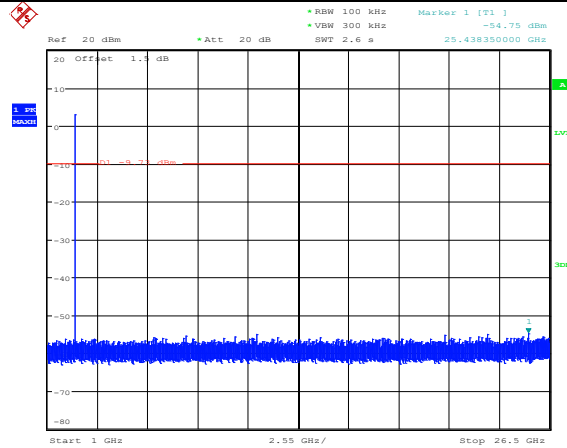


Date: 6.SEP.2022 07:35:52

3DH5 ANT1 2441 Ref

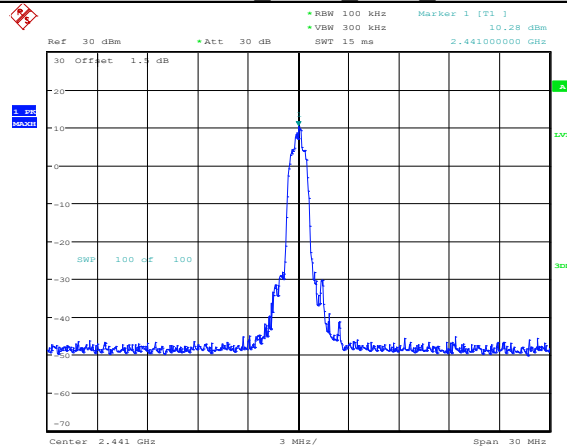


Date: 6.SEP.2022 07:37:33

3DH5 ANT1 2441 30~1000

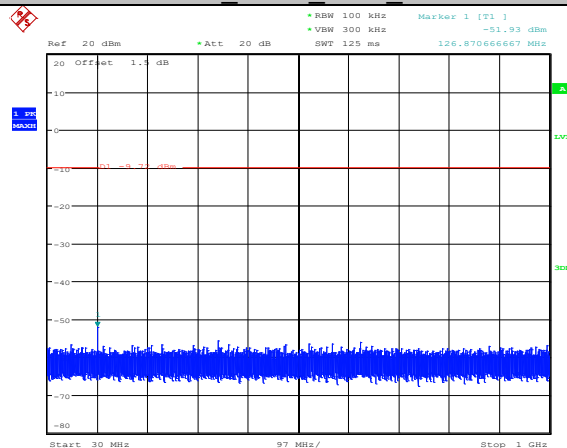


Date: 6.SEP.2022 07:38:52

3DH5 ANT1 2441 1000~26500

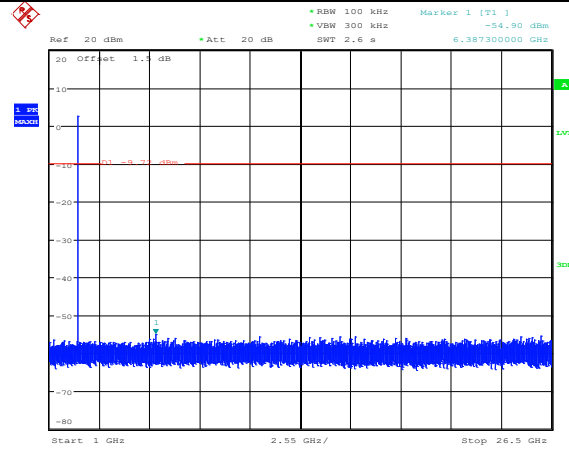


Date: 6.SEP.2022 07:39:04

3DH5 ANT1 2480 Ref

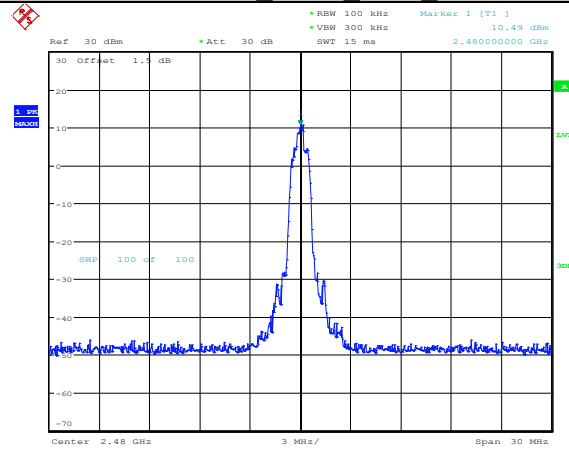


Date: 6.SEP.2022 07:40:50

3DH5 ANT1 2480 30~1000

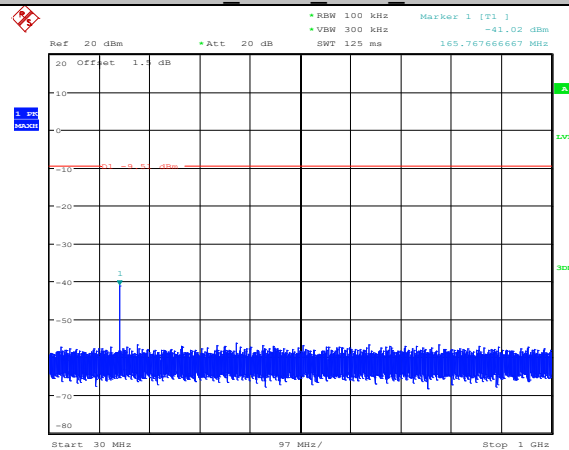


Date: 6.SEP.2022 07:40:59

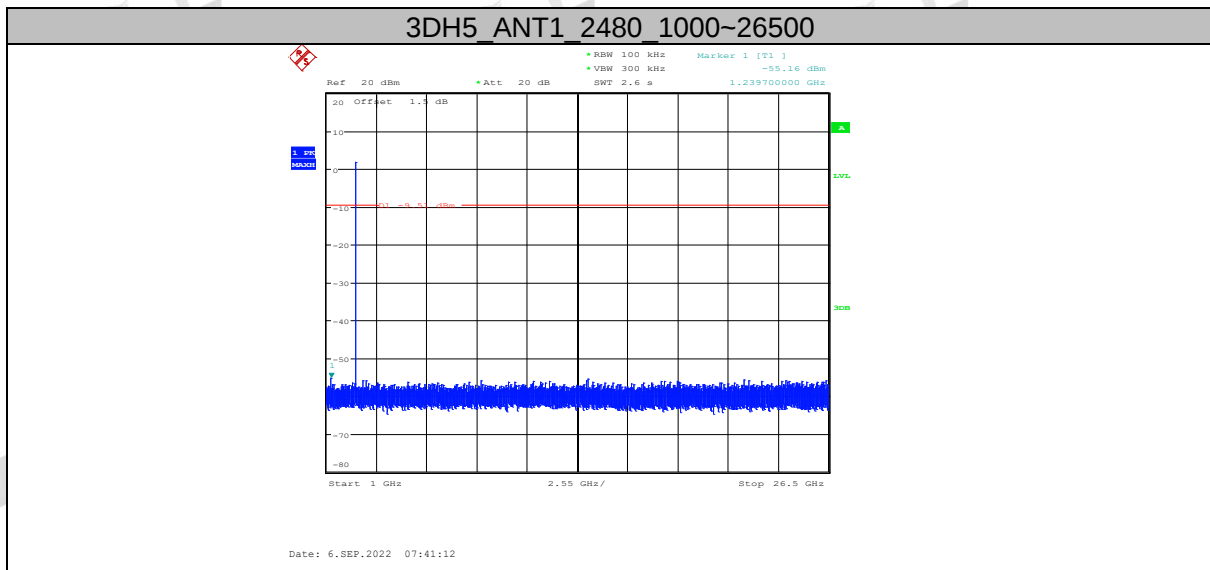

12. Band Edge Compliance (Radiated Method)

12.1. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

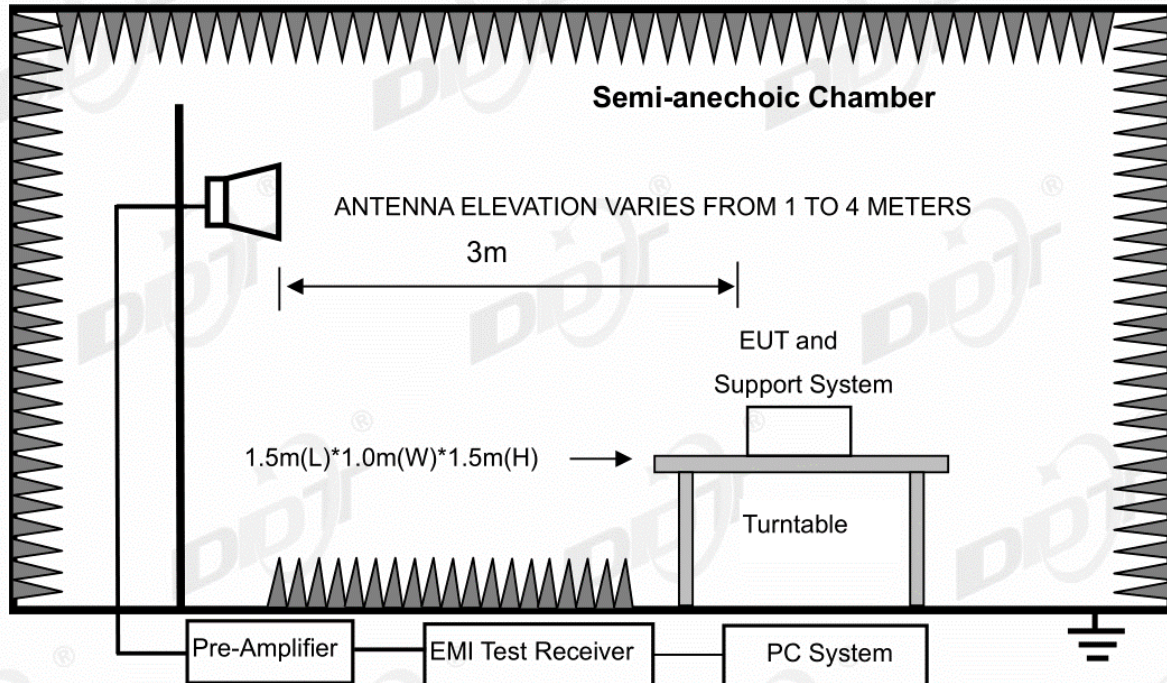

12.2. Limit

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

12.3. Test Procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

12.4. Test result


Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only. Scan with all side and recorded in this report.

Left side:

TR-4-E-009 Radiated Emission Test Result**Test Site** : DDT 3m Chamber 3#D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6**Test Date** : 2022-09-09**Tested By** : James Gan**EUT** : BLUETOOTH HEADSET**Model Number** : LIVE FLEX**Power Supply** : Battery**Test Mode** : Tx Mode**Condition** : Temp:22.1°C,Humi:60.3%,Press:100.3kPa**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL**Memo** : DH5 2402

Data: 13

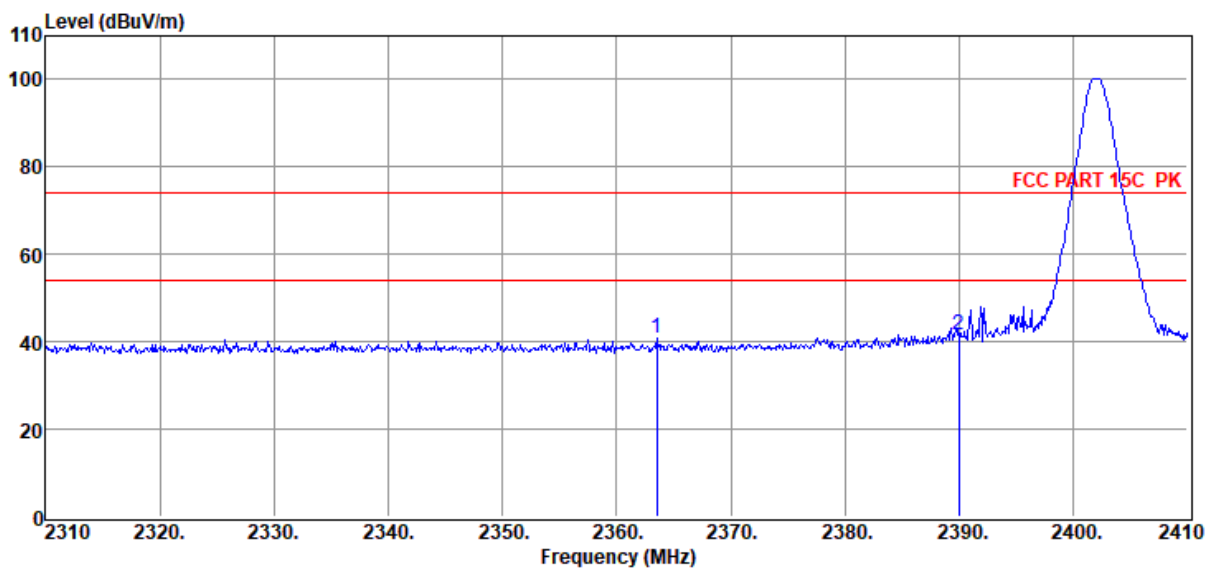

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2363.50	50.58	27.35	39.58	1.70	0.72	40.77	74.00	-33.23	Peak	HORIZONTAL
2	2390.00	51.23	27.40	39.60	1.71	0.72	41.46	74.00	-32.54	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 14

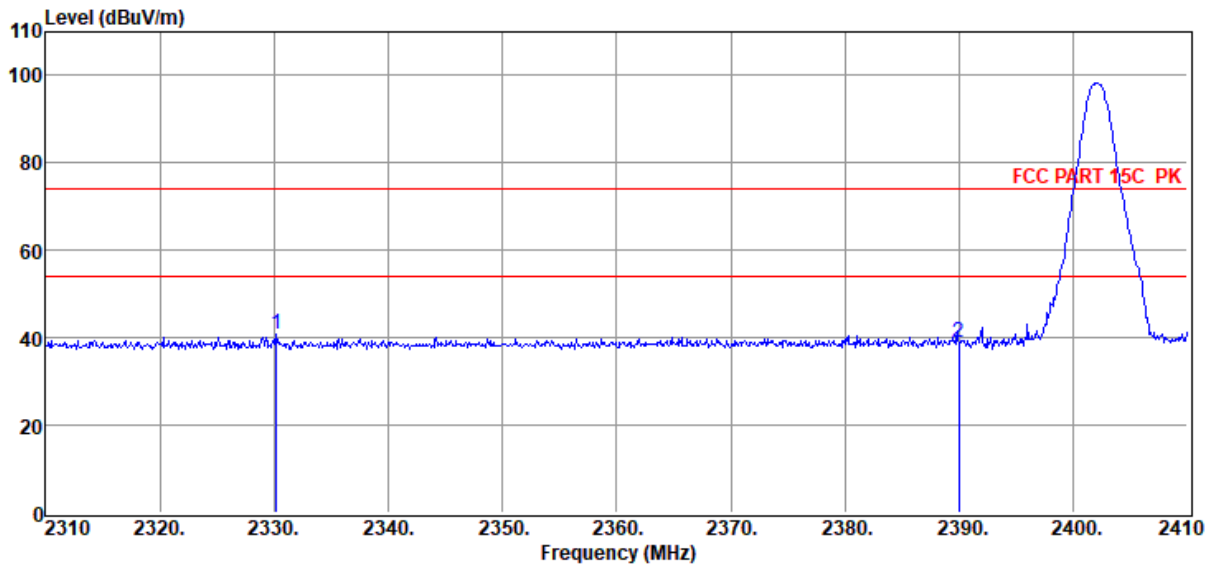

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2330.20	50.62	27.29	39.57	1.69	0.72	40.75	74.00	-33.25	Peak	VERTICAL
2	2390.00	48.69	27.40	39.60	1.71	0.72	38.92	74.00	-35.08	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 15

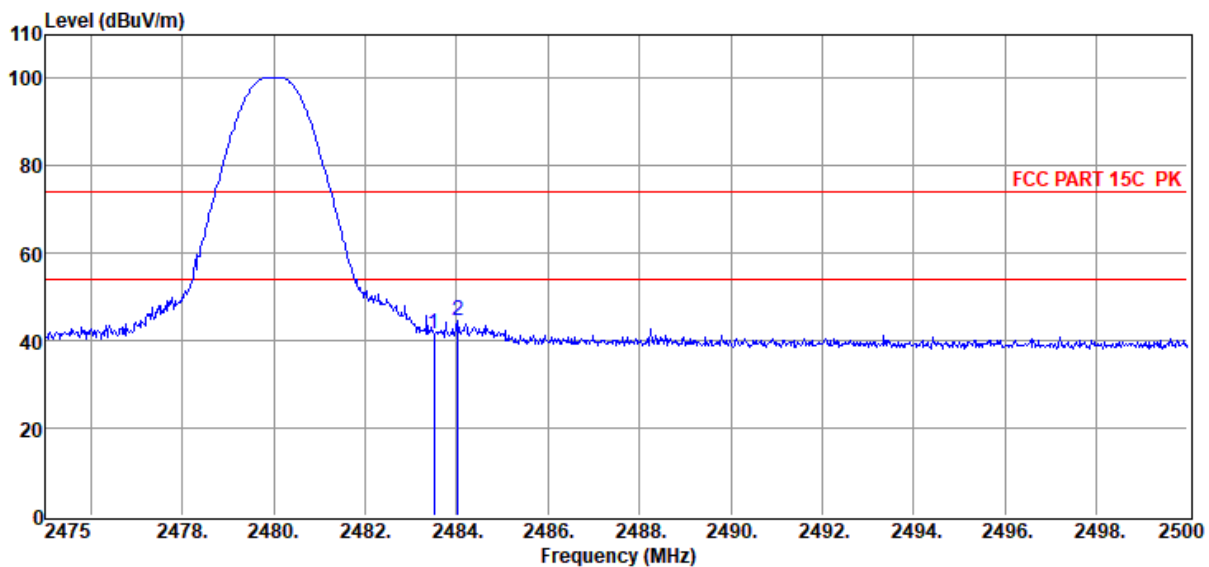

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.22	27.57	39.64	1.74	0.73	41.62	74.00	-32.38	Peak	HORIZONTAL
2	2484.03	54.03	27.57	39.64	1.74	0.73	44.43	74.00	-29.57	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 16

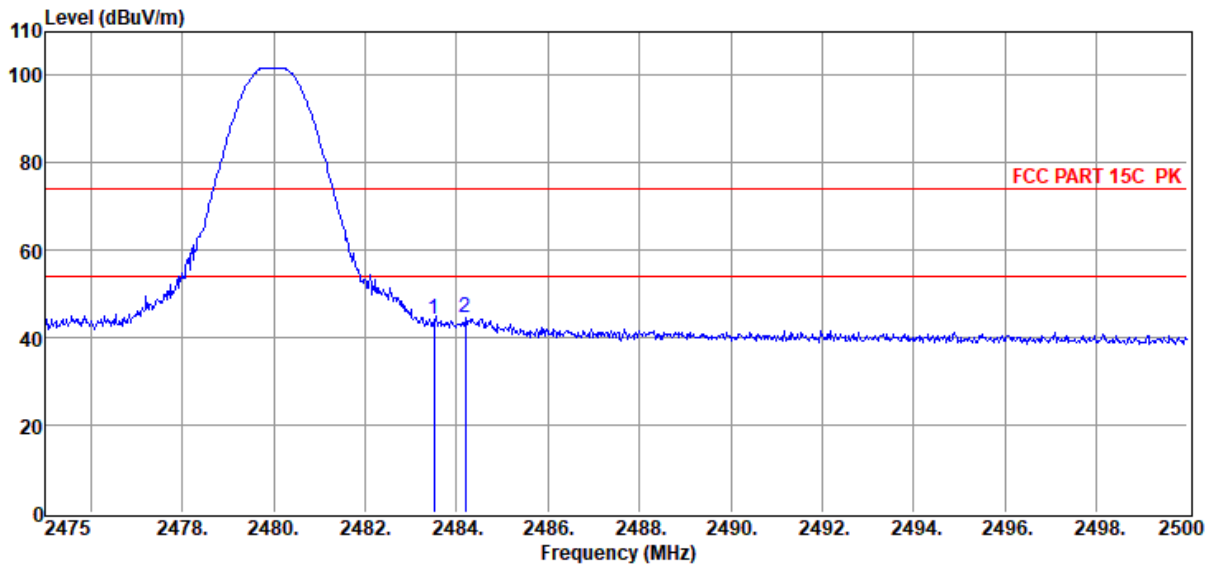

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.83	27.57	39.64	1.74	0.73	44.23	74.00	-29.77	Peak	VERTICAL
2	2484.20	54.36	27.57	39.64	1.74	0.73	44.76	74.00	-29.24	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 2DH5 2402

Data: 17

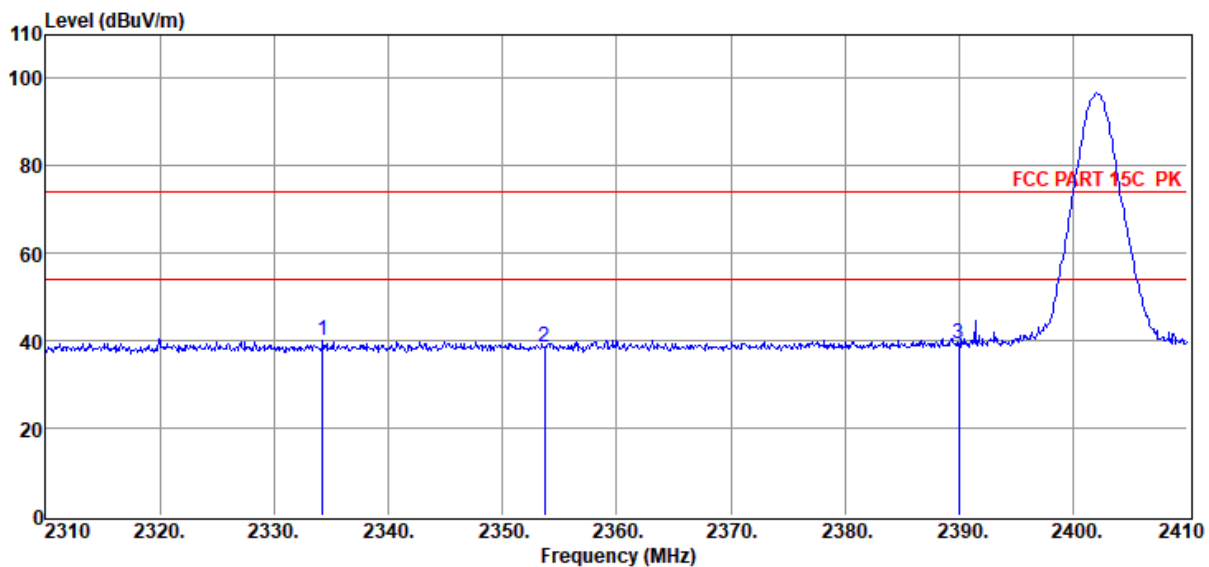

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2334.30	50.01	27.30	39.57	1.69	0.72	40.15	74.00	-33.85	Peak	HORIZONTAL
2	2353.70	48.45	27.34	39.58	1.70	0.72	38.63	74.00	-35.37	Peak	HORIZONTAL
3	2390.00	49.24	27.40	39.60	1.71	0.72	39.47	74.00	-34.53	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 2DH5 2402

Data: 18

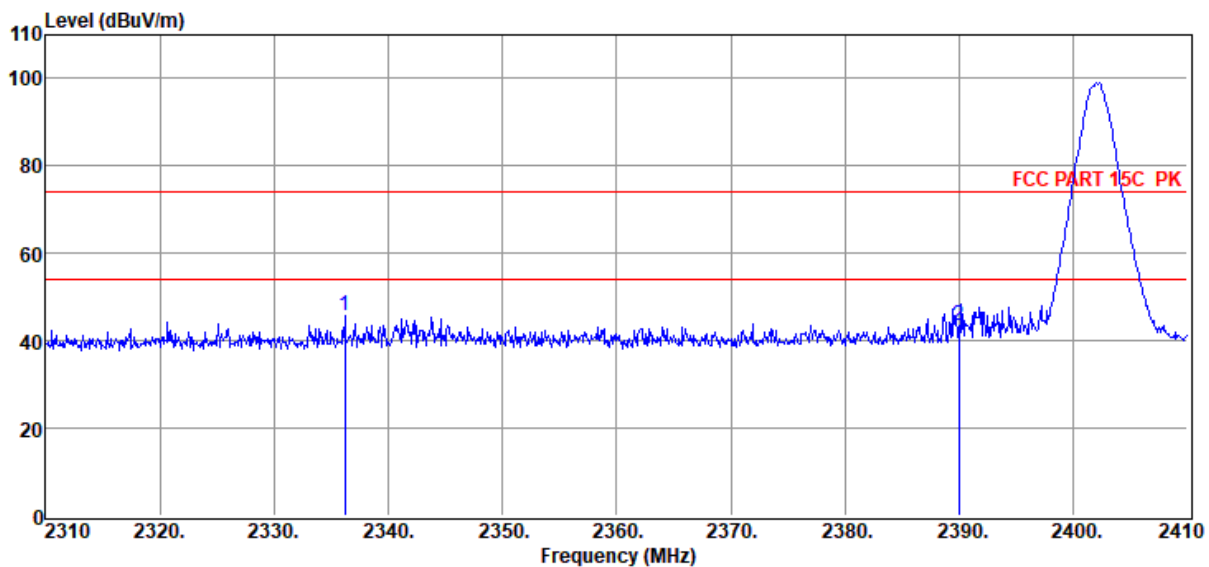

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2336.20	55.65	27.31	39.57	1.69	0.72	45.80	74.00	-28.20	Peak	VERTICAL
2	2390.00	53.33	27.40	39.60	1.71	0.72	43.56	74.00	-30.44	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 2DH5 2480

Data: 19

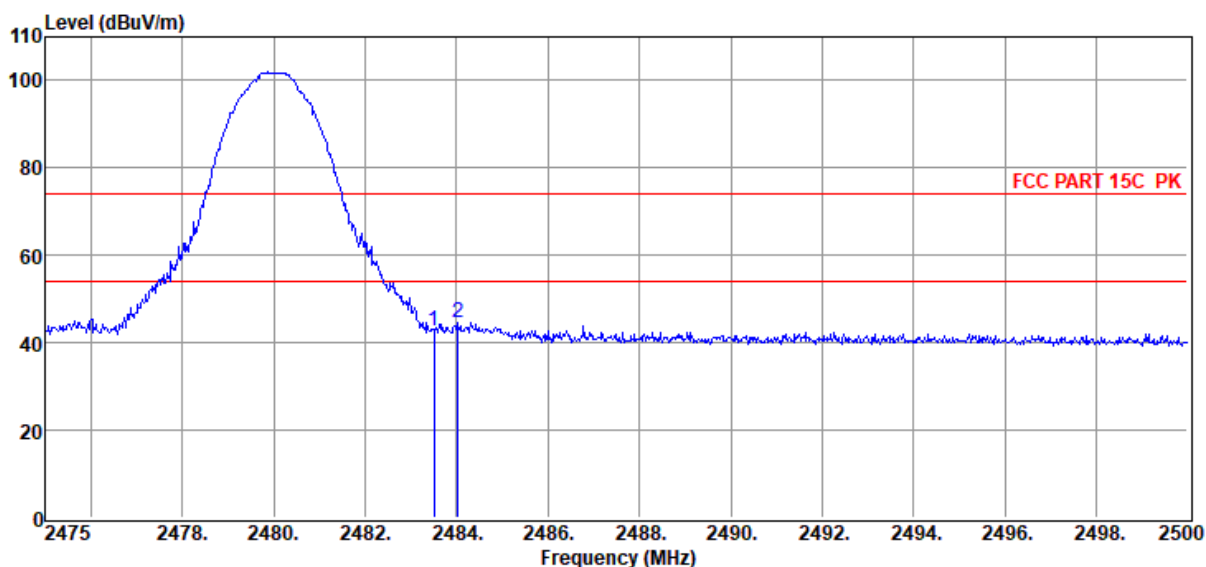

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.28	27.57	39.64	1.74	0.73	42.68	74.00	-31.32	Peak	VERTICAL
2	2484.03	54.37	27.57	39.64	1.74	0.73	44.77	74.00	-29.23	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 2DH5 2480

Data: 20

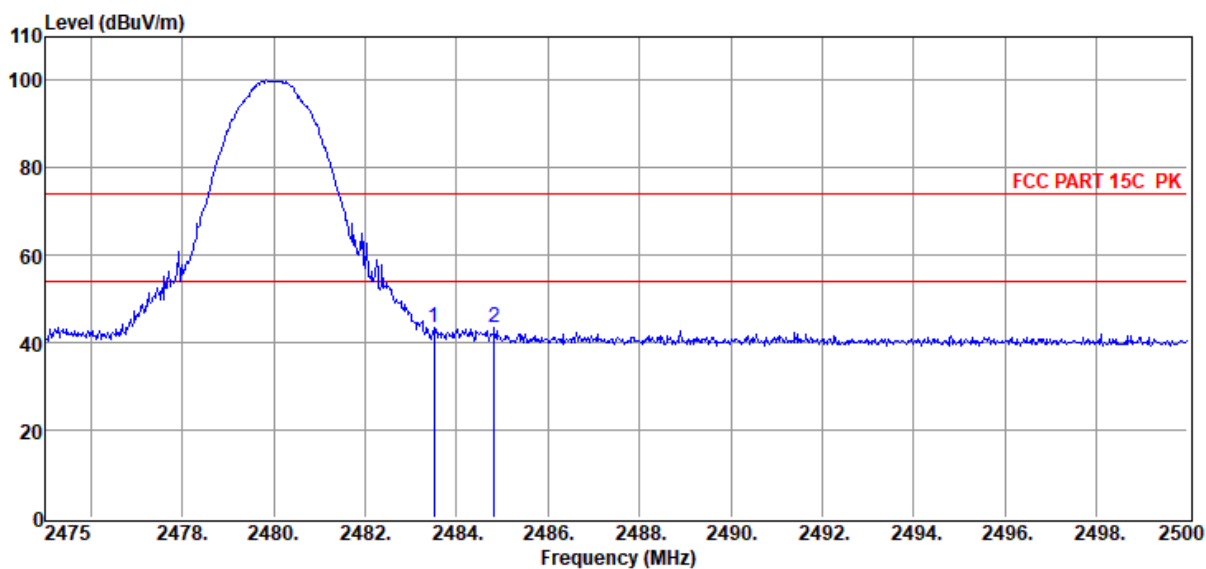

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.91	27.57	39.64	1.74	0.73	43.31	74.00	-30.69	Peak	VERTICAL
2	2484.83	52.89	27.57	39.64	1.74	0.73	43.29	74.00	-30.71	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 3DH5 2402

Data: 21

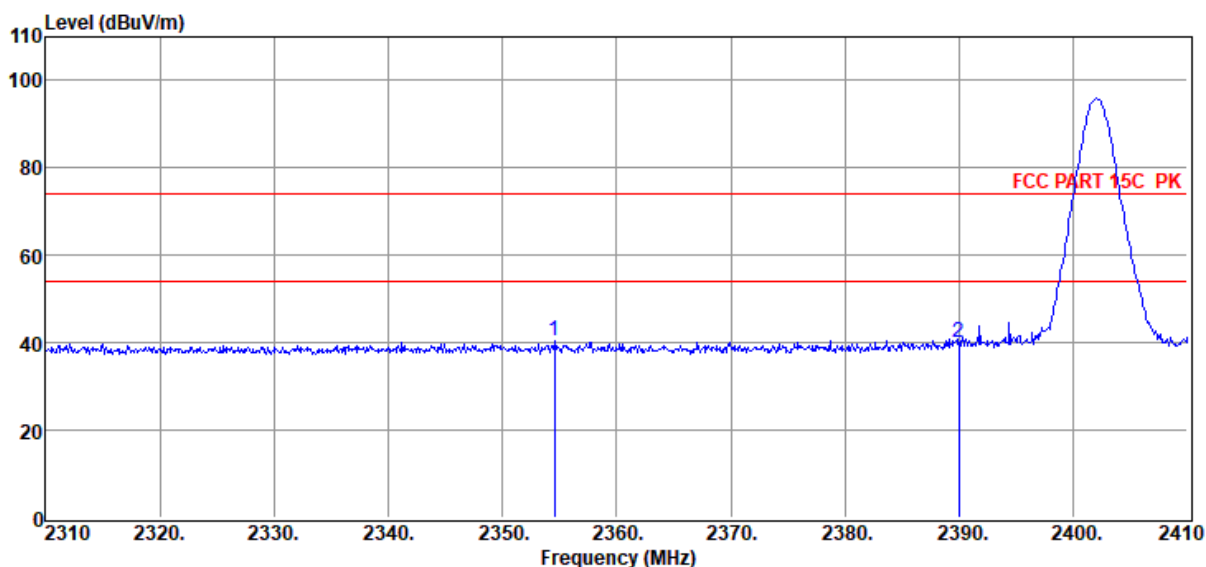

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2354.60	50.31	27.34	39.58	1.70	0.72	40.49	74.00	-33.51	Peak	HORIZONTAL
2	2390.00	50.02	27.40	39.60	1.71	0.72	40.25	74.00	-33.75	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-13

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 3DH5 2402

Data: 22

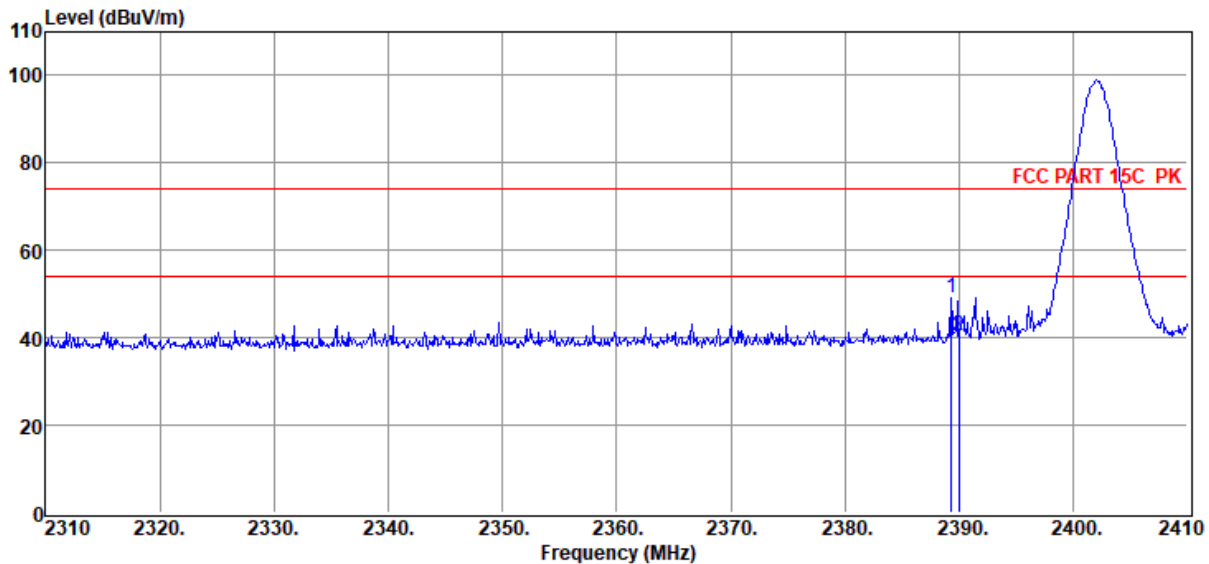

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.30	58.74	27.40	39.59	1.71	0.72	48.98	74.00	-25.02	Peak	VERTICAL
2	2390.00	50.27	27.40	39.60	1.71	0.72	40.50	74.00	-33.50	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\IFCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 3DH5 2480

Data: 23

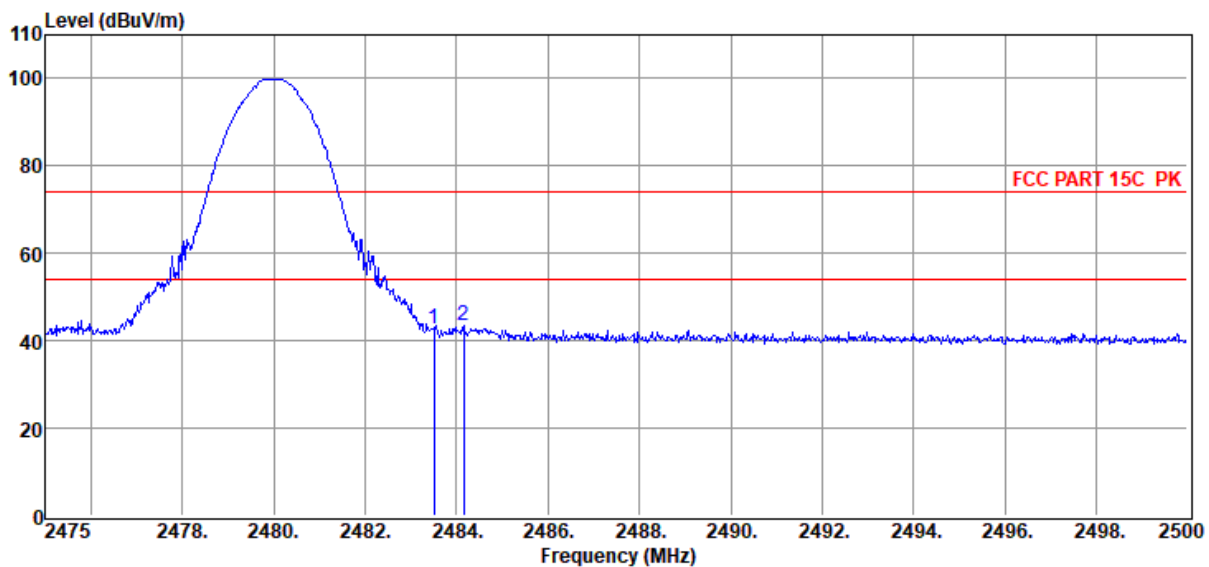

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.46	27.57	39.64	1.74	0.73	42.86	74.00	-31.14	Peak	HORIZONTAL
2	2484.15	53.10	27.57	39.64	1.74	0.73	43.50	74.00	-30.50	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\LI\FCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : James Gan

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.1°C,Humi:60.3%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 3DH5 2480

Data: 24

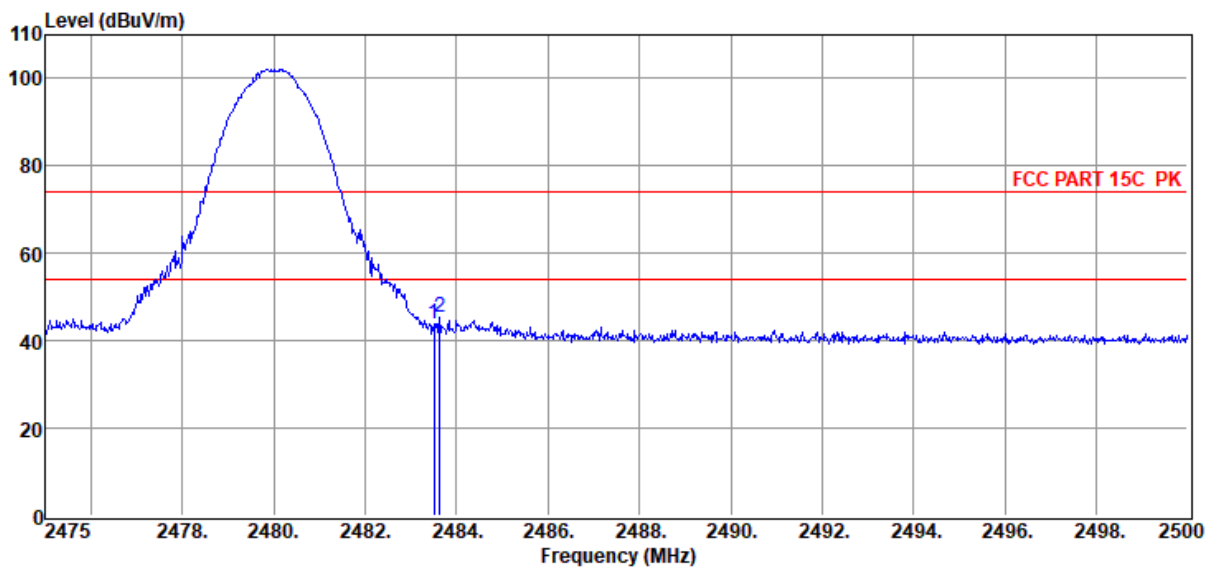

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.50	27.57	39.64	1.74	0.73	43.90	74.00	-30.10	Peak	VERTICAL
2	2483.63	54.93	27.57	39.64	1.74	0.73	45.33	74.00	-28.67	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

Right side

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2402

Data: 37

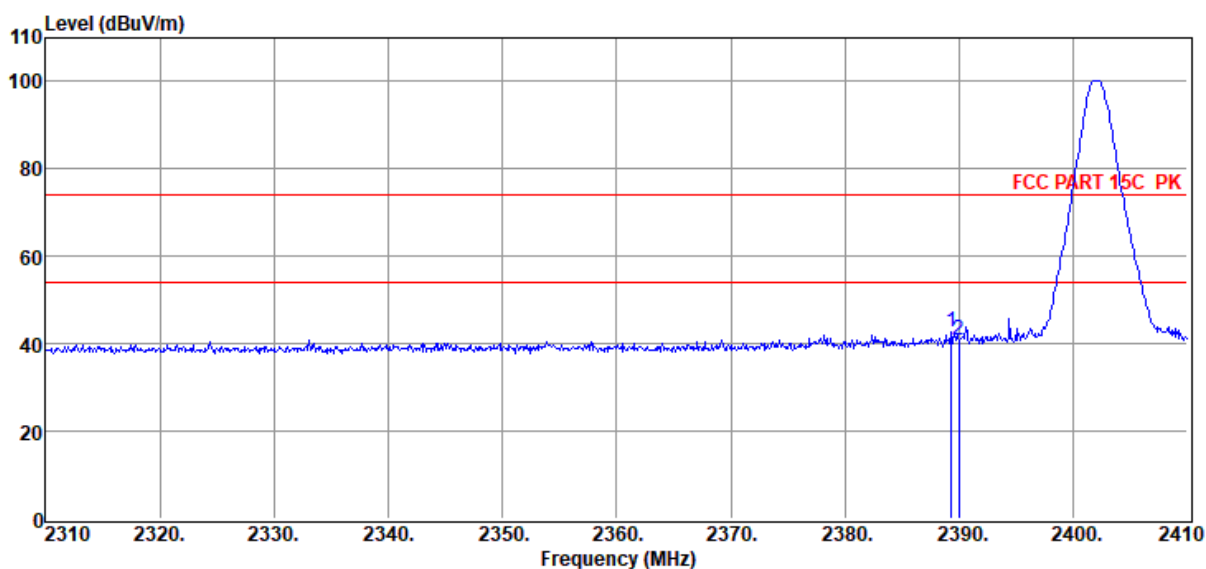

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.30	52.33	27.40	39.59	1.71	0.72	42.57	74.00	-31.43	Peak	HORIZONTAL
2	2390.00	50.62	27.40	39.60	1.71	0.72	40.85	74.00	-33.15	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2402

Data: 38

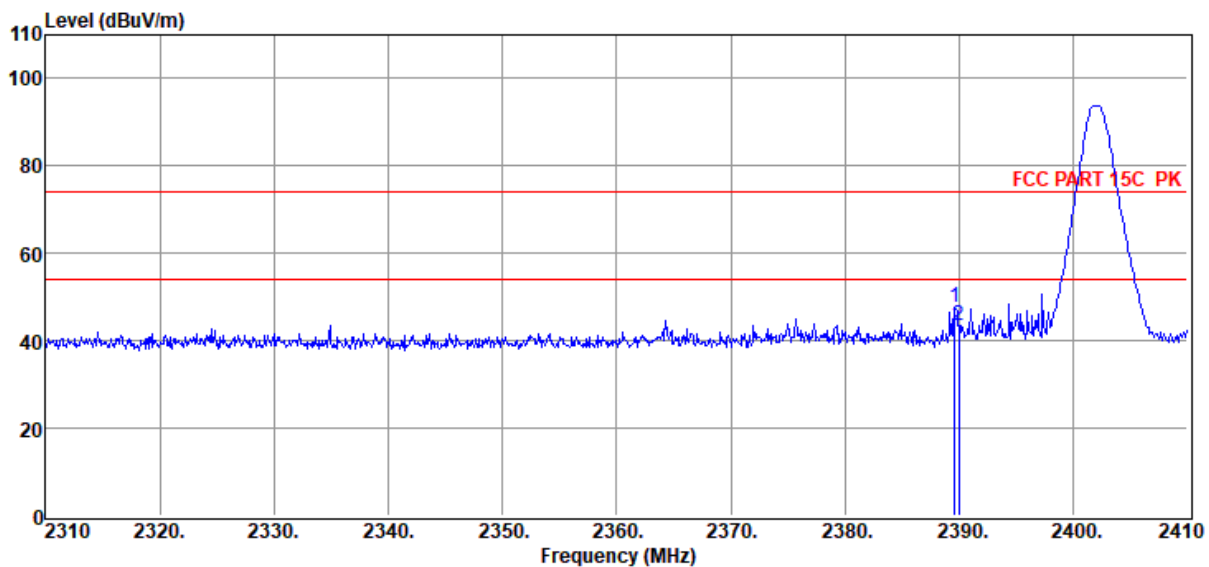

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.60	57.25	27.40	39.59	1.71	0.72	47.49	74.00	-26.51	Peak	VERTICAL
2	2390.00	53.34	27.40	39.60	1.71	0.72	43.57	74.00	-30.43	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 2DH5 2402

Data: 39

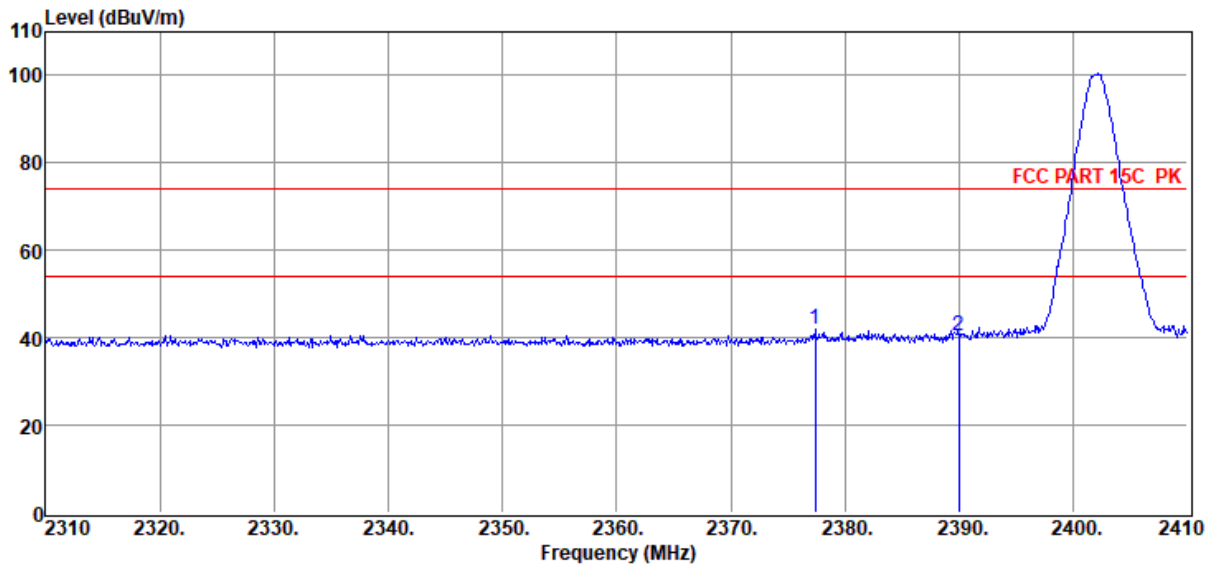

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2377.40	51.64	27.38	39.59	1.71	0.72	41.86	74.00	-32.14	Peak	HORIZONTAL
2	2390.00	50.34	27.40	39.60	1.71	0.72	40.57	74.00	-33.43	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 2DH5 2402

Data: 40

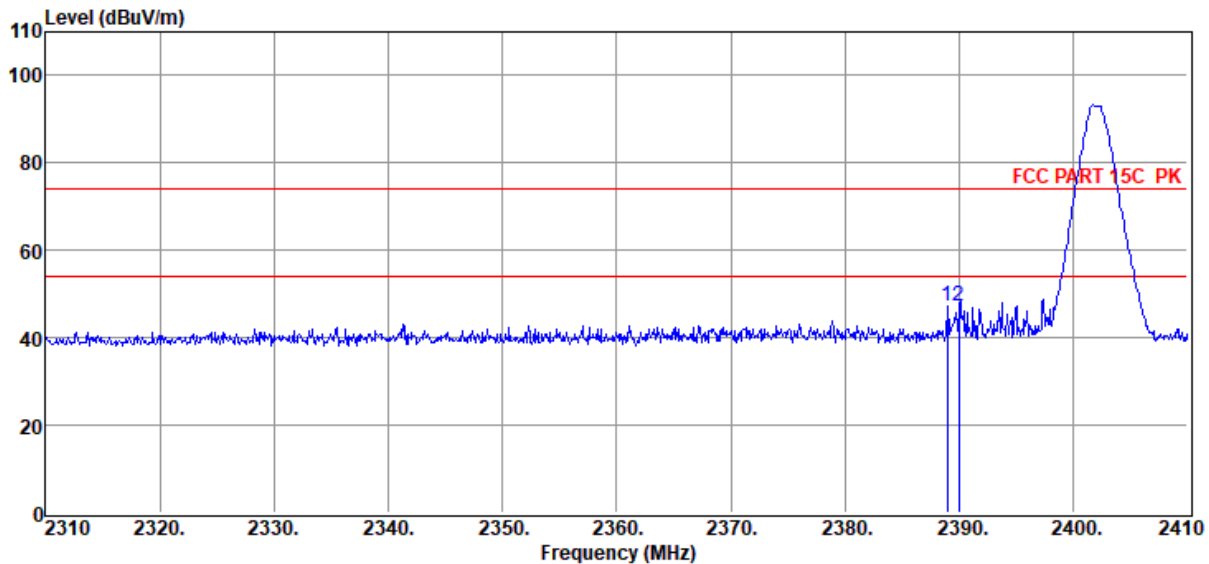

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.00	56.90	27.40	39.59	1.71	0.72	47.14	74.00	-26.86	Peak	VERTICAL
2	2390.00	57.09	27.40	39.60	1.71	0.72	47.32	74.00	-26.68	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 3DH5 2402

Data: 41

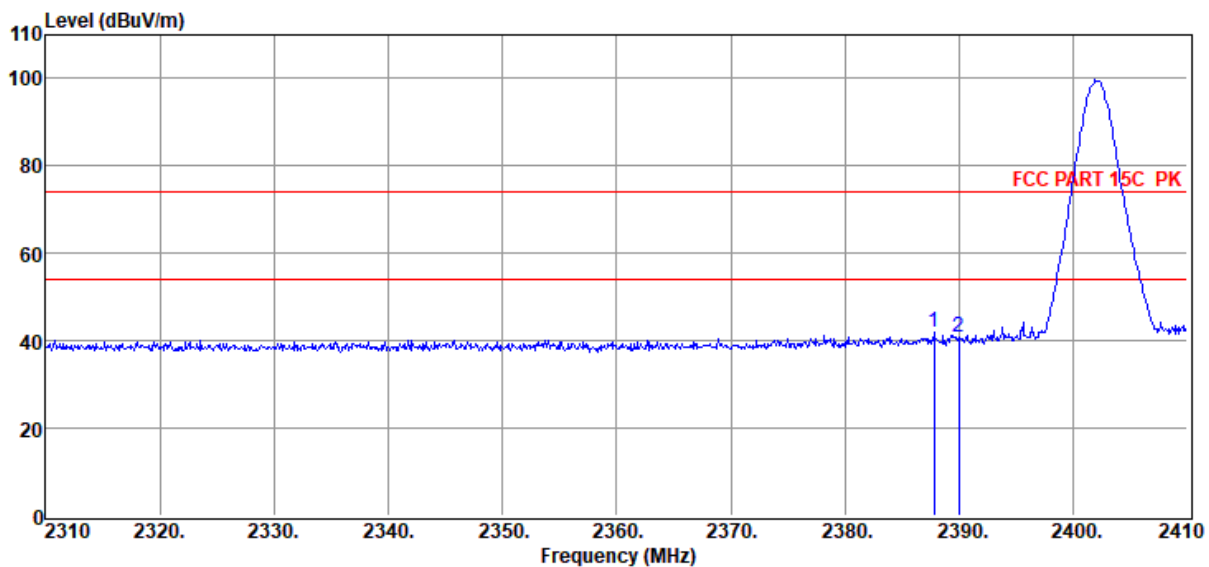

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2387.80	51.80	27.40	39.59	1.71	0.72	42.04	74.00	-31.96	Peak	HORIZONTAL
2	2390.00	50.48	27.40	39.60	1.71	0.72	40.71	74.00	-33.29	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 3DH5 2402

Data: 42

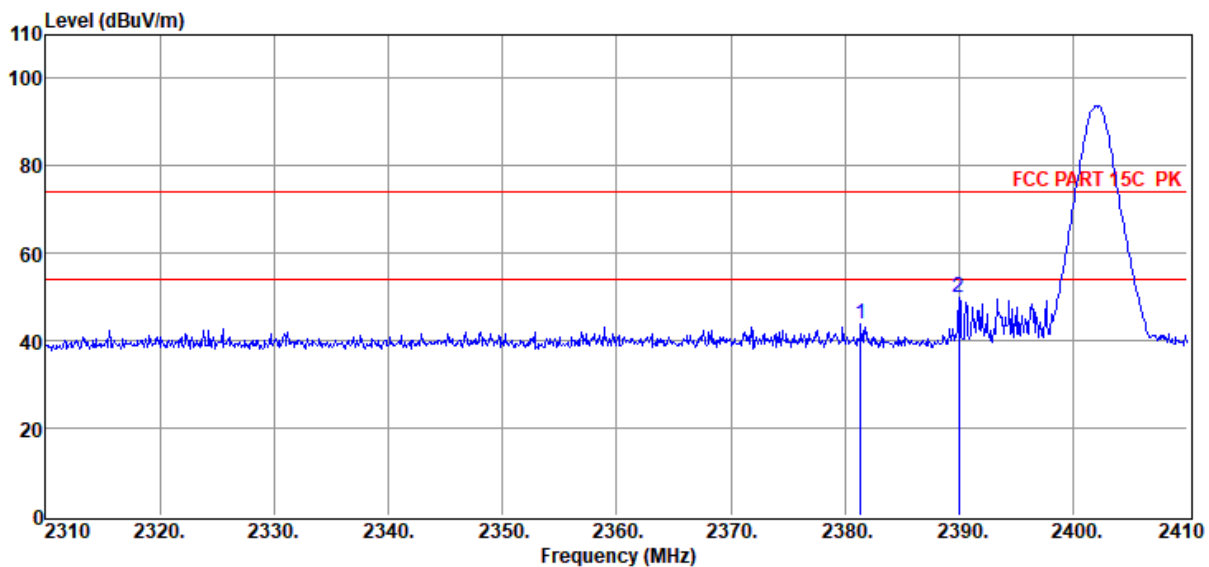

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2381.40	53.47	27.39	39.59	1.71	0.72	43.70	74.00	-30.30	Peak	VERTICAL
2	2390.00	59.51	27.40	39.60	1.71	0.72	49.74	74.00	-24.26	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : DH5 2480

Data: 47

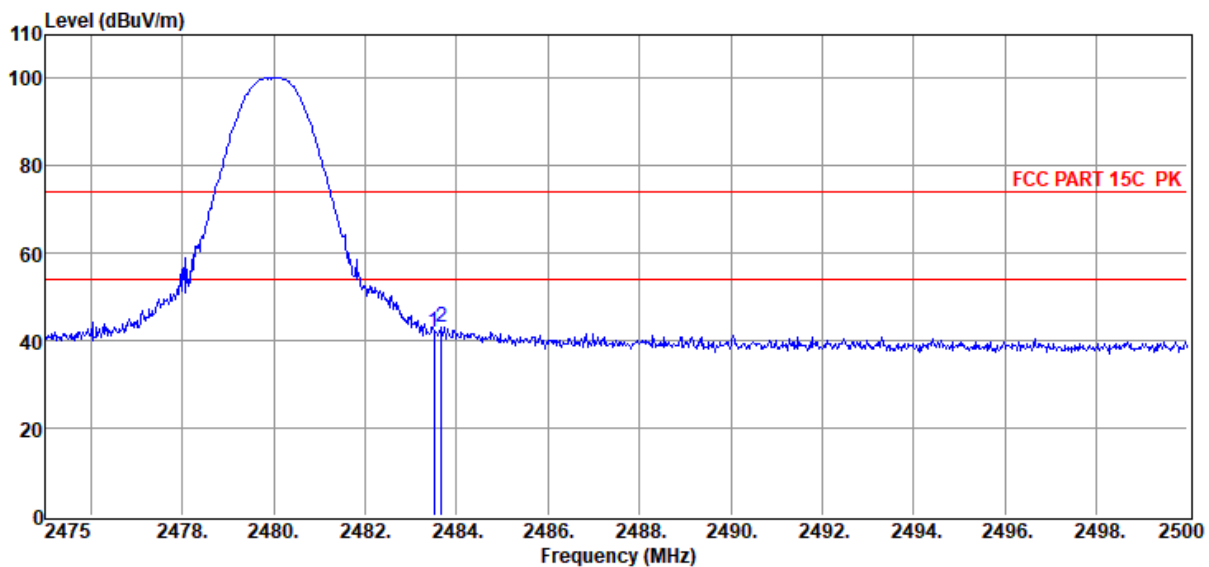

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.59	27.57	39.64	1.74	0.73	41.99	74.00	-32.01	Peak	HORIZONTAL
2	2483.68	52.80	27.57	39.64	1.74	0.73	43.20	74.00	-30.80	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : Bairong

EUT : Bluetooth Speaker

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : DH5 2480

Data: 48

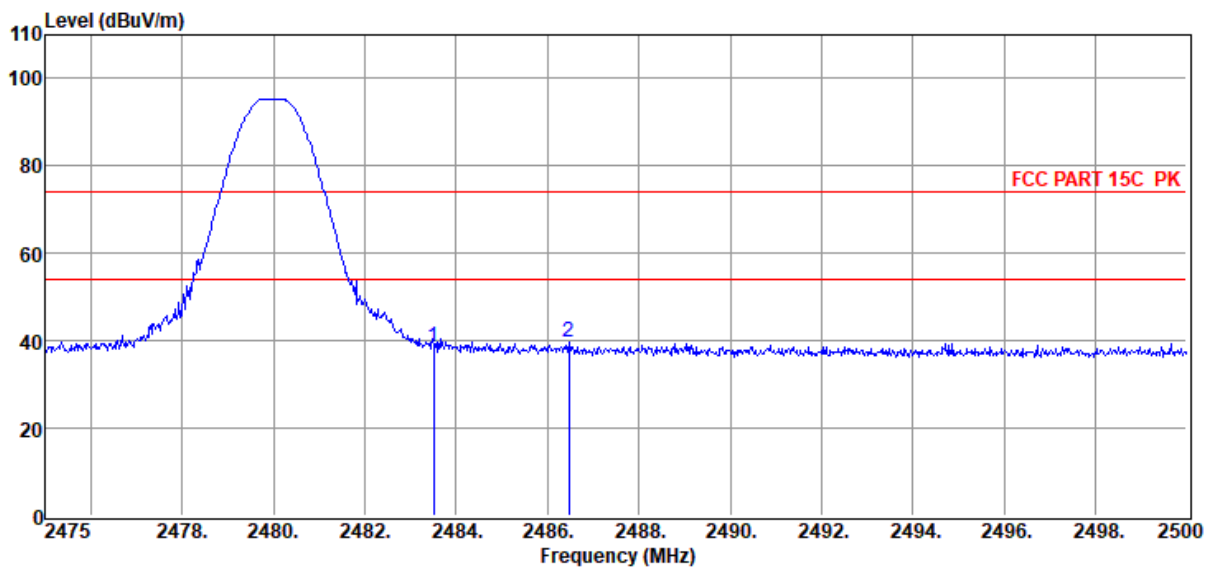

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.23	27.57	39.64	1.74	0.73	38.63	74.00	-35.37	Peak	VERTICAL
2	2486.48	49.38	27.58	39.64	1.74	0.73	39.79	74.00	-34.21	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. For emission above 1GHz that the main frequency over the limit is fundamental.
3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
4. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-11

Tested By : Bairong

EUT : Bluetooth Speaker

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 2DH5 2480

Data: 49

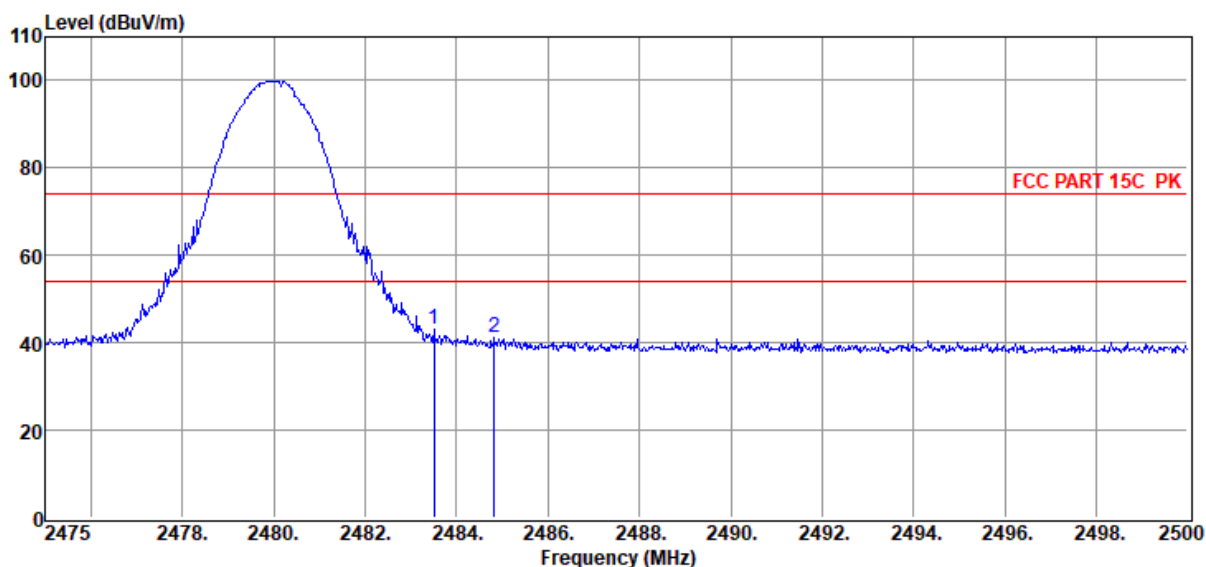

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.69	27.57	39.64	1.74	0.73	43.09	74.00	-30.91	Peak	HORIZONTAL
2	2484.83	50.85	27.57	39.64	1.74	0.73	41.25	74.00	-32.75	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. For emission above 1GHz that the main frequency over the limit is fundamental.
3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
4. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 2DH5 2480

Data: 50

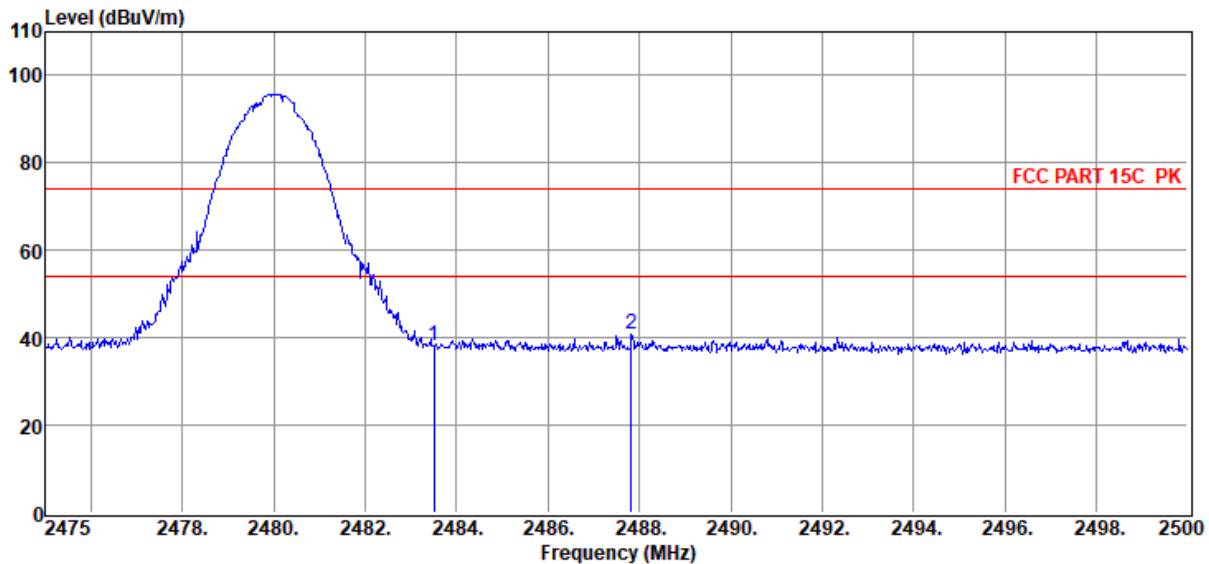

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.71	27.57	39.64	1.74	0.73	38.11	74.00	-35.89	Peak	VERTICAL
2	2487.83	50.56	27.58	39.64	1.74	0.73	40.97	74.00	-33.03	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE FLEX\FCC
ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 3DH5 2480

Data: 51

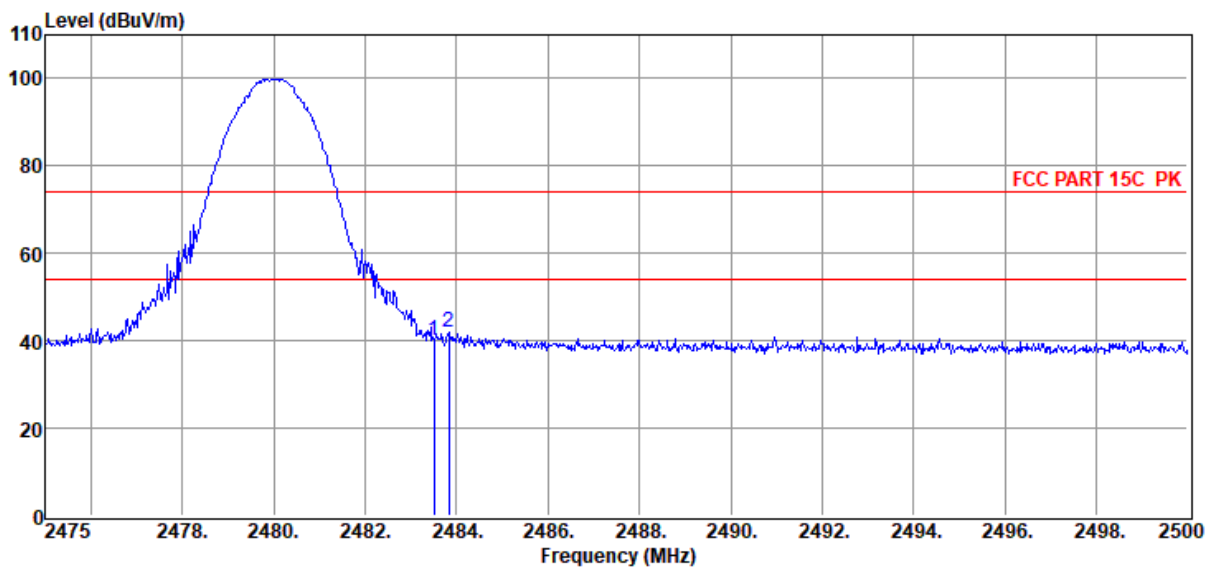

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	49.64	27.57	39.64	1.74	0.73	40.04	74.00	-33.96	Peak	HORIZONTAL
2	2483.83	51.40	27.57	39.64	1.74	0.73	41.80	74.00	-32.20	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22082911-2E LIVE
FLEX\FCC ABOVE 1G .EM6

Test Date : 2022-09-05

Tested By : Bairong

EUT : BLUETOOTH HEADSET

Model Number : LIVE FLEX

Power Supply : Battery


Test Mode : Tx Mode

Condition : Temp:22.5°C,Humi:60.4%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 3DH5 2480

Data: 52

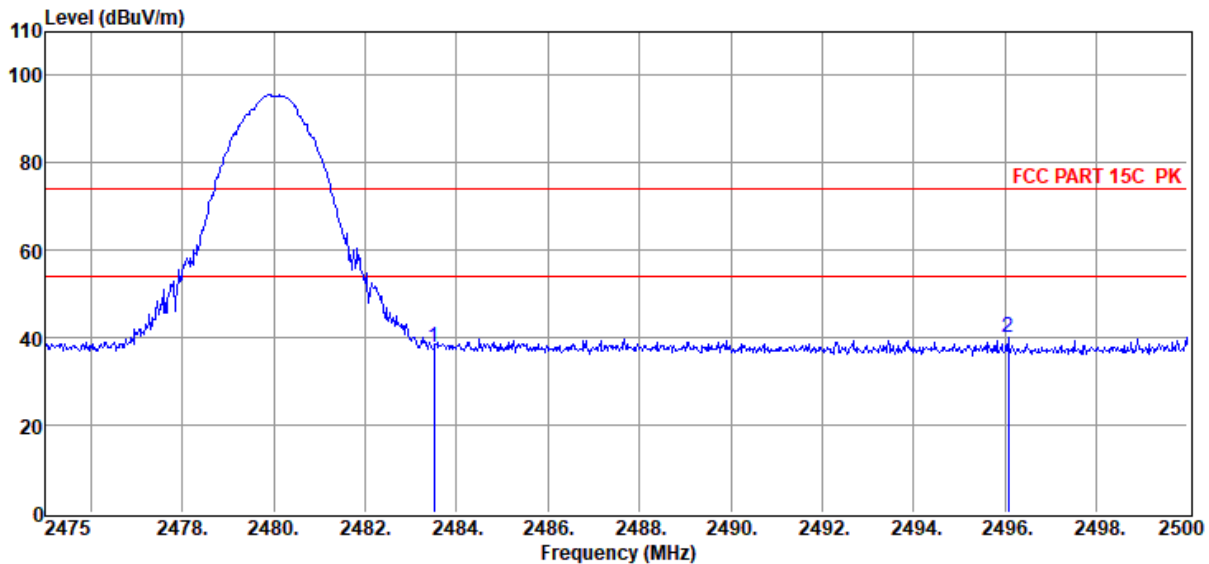


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.44	27.57	39.64	1.74	0.73	37.84	74.00	-36.16	Peak	VERTICAL
2	2496.08	49.61	27.59	39.65	1.74	0.73	40.02	74.00	-33.98	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. For emission above 1GHz that the main frequency over the limit is fundamental.

13. Power Line Conducted Emission

13.1. Block diagram of test setup

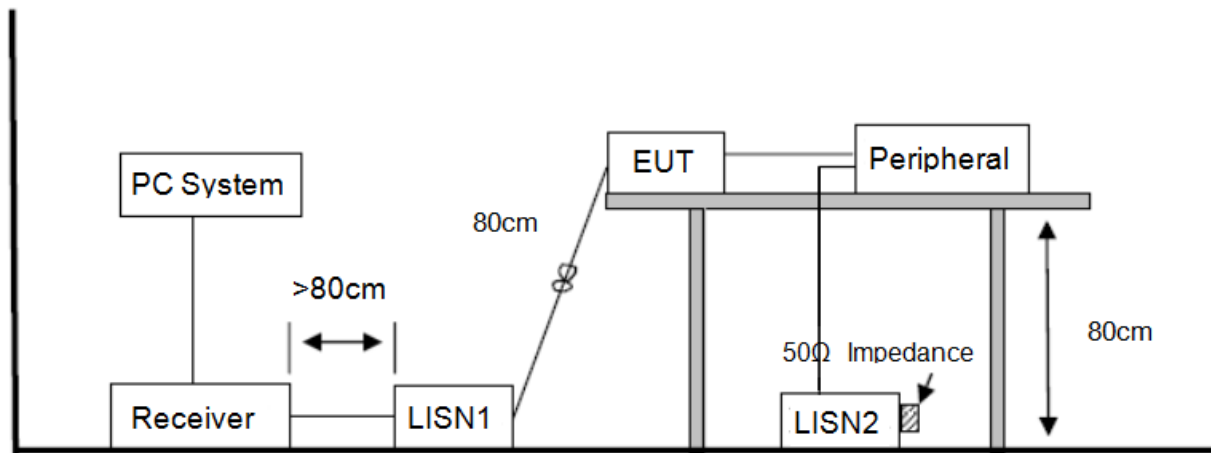

13.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

13.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test setup as described in clause 13.1 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

13.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22082911-2E\FCC.EM6**
Test Date : 2022-09-07 **Tested By** : Bairong
EUT : BLUETOOTH HEADSET **Model Number** : LIVE FLEX
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/NEUTRAL
Memo : BT

Data: 2

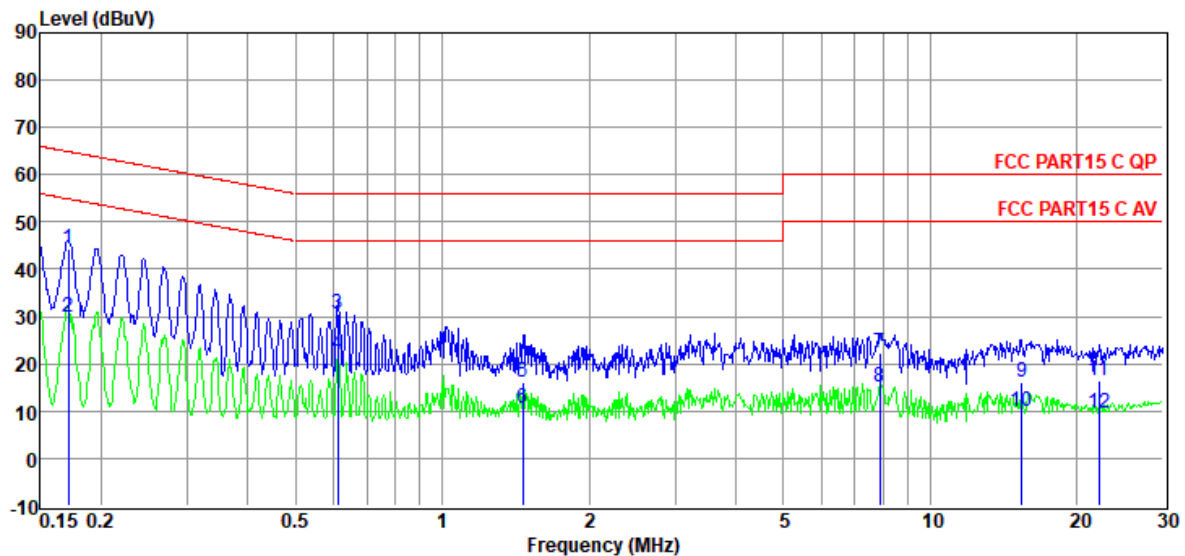

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	24.46	9.80	0.01	9.92	44.19	64.90	-20.71	QP	NEUTRAL
2	0.17	10.14	9.80	0.01	9.92	29.87	54.90	-25.03	Average	NEUTRAL
3	0.61	11.04	9.68	0.02	9.91	30.65	56.00	-25.35	QP	NEUTRAL
4	0.61	2.28	9.68	0.02	9.91	21.89	46.00	-24.11	Average	NEUTRAL
5	1.46	-3.36	9.65	0.04	9.89	16.22	56.00	-39.78	QP	NEUTRAL
6	1.46	-8.93	9.65	0.04	9.89	10.65	46.00	-35.35	Average	NEUTRAL
7	7.89	2.68	9.67	0.09	9.94	22.38	60.00	-37.62	QP	NEUTRAL
8	7.89	-4.72	9.67	0.09	9.94	14.98	50.00	-35.02	Average	NEUTRAL
9	15.39	-3.48	9.62	0.15	9.93	16.22	60.00	-43.78	QP	NEUTRAL
10	15.39	-9.89	9.62	0.15	9.93	9.81	50.00	-40.19	Average	NEUTRAL
11	22.18	-3.50	9.83	0.18	9.97	16.48	60.00	-43.52	QP	NEUTRAL
12	22.18	-10.30	9.83	0.18	9.97	9.68	50.00	-40.32	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22082911-2E\FCC.EM6**
Test Date : 2022-09-07 **Tested By** : Bairong
EUT : BLUETOOTH HEADSET **Model Number** : LIVE FLEX
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/LINE
Memo : BT

Data: 4

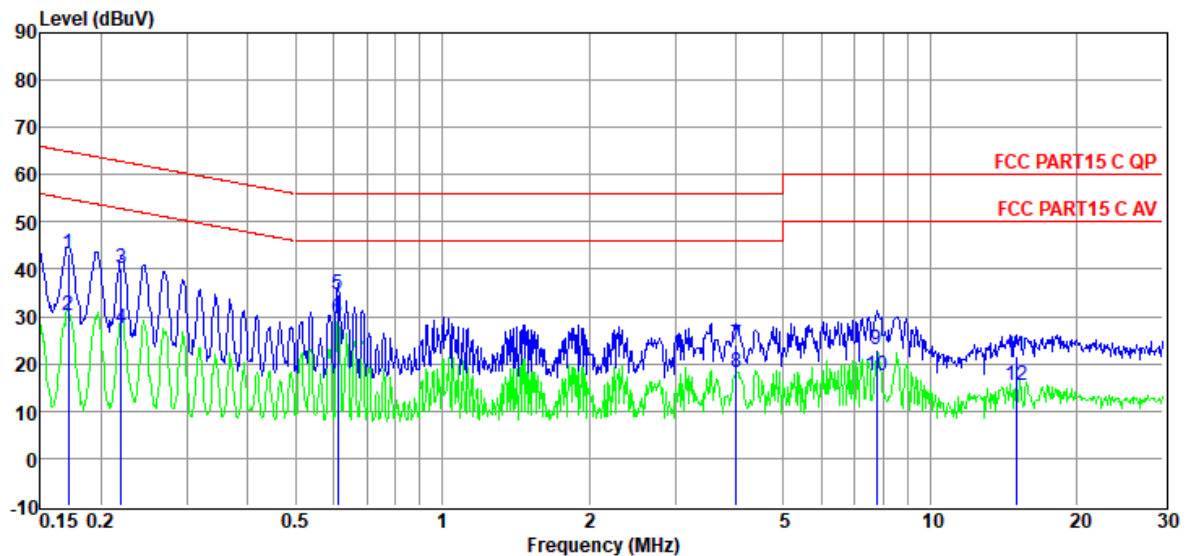

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	23.80	9.69	0.01	9.92	43.42	64.90	-21.48	QP	LINE
2	0.17	10.63	9.69	0.01	9.92	30.25	54.90	-24.65	Average	LINE
3	0.22	20.53	9.78	0.01	9.92	40.24	62.83	-22.59	QP	LINE
4	0.22	7.86	9.78	0.01	9.92	27.57	52.83	-25.26	Average	LINE
5	0.61	15.10	9.54	0.02	9.91	34.57	56.00	-21.43	QP	LINE
6	0.61	10.06	9.54	0.02	9.91	29.53	46.00	-16.47	Average	LINE
7	4.01	4.33	9.60	0.06	9.92	23.91	56.00	-32.09	QP	LINE
8	4.01	-1.53	9.60	0.06	9.92	18.05	46.00	-27.95	Average	LINE
9	7.77	3.53	9.50	0.09	9.94	23.06	60.00	-36.94	QP	LINE
10	7.77	-1.91	9.50	0.09	9.94	17.62	50.00	-32.38	Average	LINE
11	14.99	1.88	9.80	0.15	9.93	21.76	60.00	-38.24	QP	LINE
12	14.99	-4.45	9.80	0.15	9.93	15.43	50.00	-34.57	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

14.2. Result

The antenna used for this product is LDS antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the left side transmit antenna is -1.2 dBi and right side is -0.46 dBi.