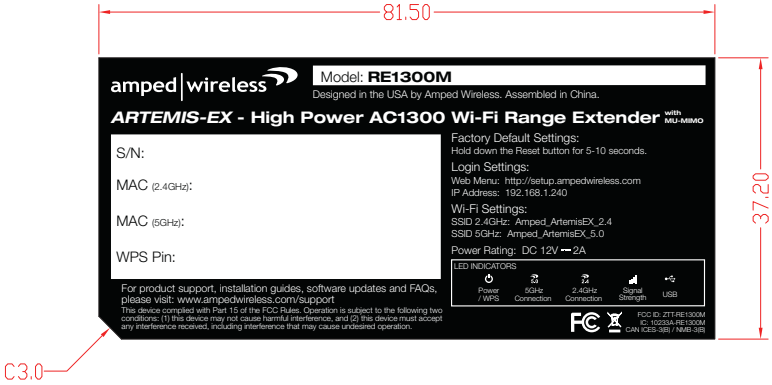
81.50
37.20
C3.0
amped | wireless
Model: RE1300M
Designed in the USA by Amped Wireless. Assembled in China.
ARTEMIS-EX - High Power AC1300 Wi-Fi Range Extender with MU-MIMO
S/N:
MAC (2.4GHz):
MAC (5GHz):
WPS Pin:
Factory Default Settings:
Hold down the Reset button for 5-10 seconds.
Login Settings:
Web Menu: http://setup.ampedwireless.com
IP Address: 192.168.1.240
Wi-Fi Settings:
SSID 2.4GHz: Amped_ArtemisEX_2.4
SSID 5GHz: Amped_ArtemisEX_5.0
Power Rating: DC 12V ⎓ 2A
LED INDICATORS
Power / WPS
5GHz Connection
2.4GHz Connection
Signal Strength
USB
For product support, installation guides, software updates and FAQs, please visit: www.ampedwireless.com/support
This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
FCC ID: ZTT-RE1300M
IC: 10293A-RE1300M
CAN ICES-3(B) / NMB-3(B)

amped | wireless
Model: RE1300M
Designed in the USA by Amped Wireless. Assembled in China.
ARTEMIS-EX - High Power AC1300 Wi-Fi Range Extender with MU-MIMO
S/N:
MAC (2.4GHz):
MAC (5GHz):
WPS Pin:
Factory Default Settings:
Hold down the Reset button for 5-10 seconds.
Login Settings:
Web Menu: http://setup.ampedwireless.com
IP Address: 192.168.1.240
Wi-Fi Settings:
SSID 2.4GHz: Amped_ArtemisEX_2.4
SSID 5GHz: Amped_ArtemisEX_5.0
Power Rating: DC 12V ⎓ 2A
LED INDICATORS
Power / WPS
5GHz Connection
2.4GHz Connection
Signal Strength
USB
For product support, installation guides, software updates and FAQs, please visit: www.ampedwireless.com/support
This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
FCC ID: ZTT-RE1300M
IC: 10293A-RE1300M
CAN ICES-3(B) / NMB-3(B)

amped|wireless
label location