


EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

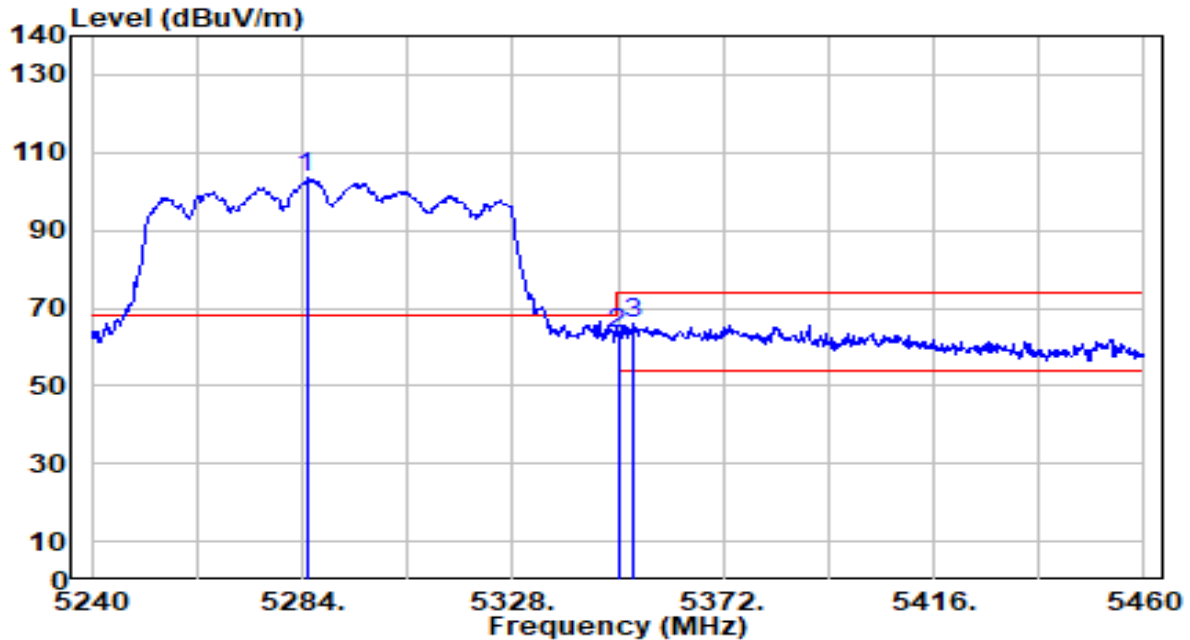


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.880	102.86	0.58	103.44	N/A	N/A	100	89	Peak
2	5350.000	63.06	0.51	63.57	-10.43	74.00	100	89	Peak
3	* 5353.300	65.31	0.50	65.81	-8.19	74.00	100	89	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

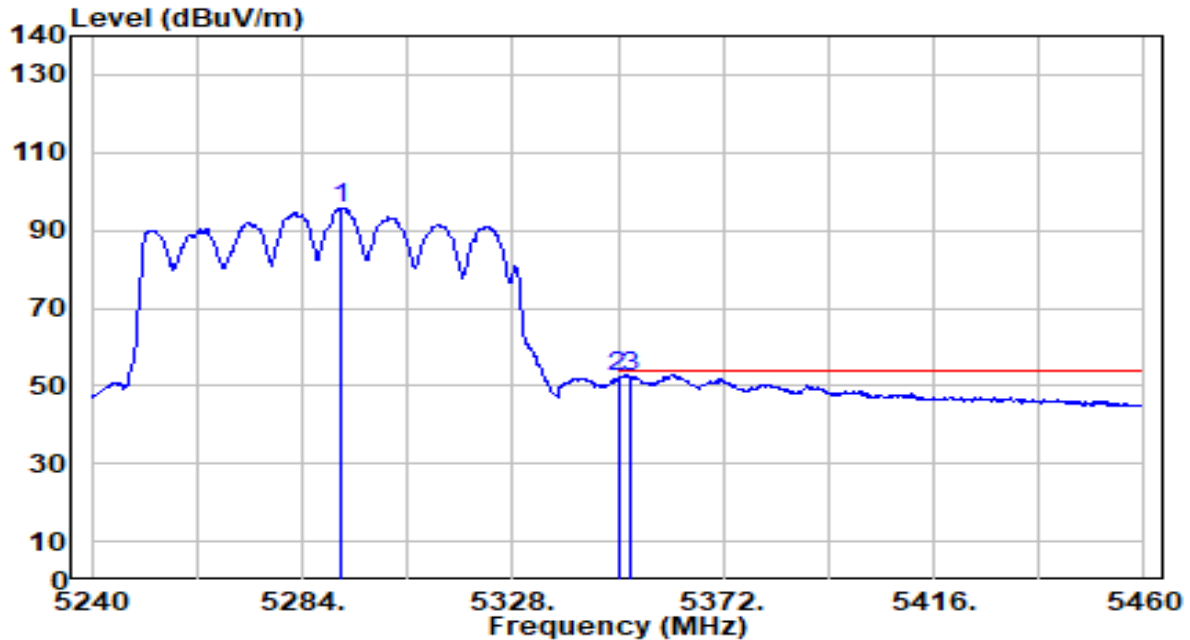


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.920	95.16	0.57	95.73	N/A	N/A	115	200	Average
2	5350.000	51.70	0.51	52.21	-1.79	54.00	115	200	Average
3	* 5352.860	51.80	0.50	52.30	-1.70	54.00	115	200	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

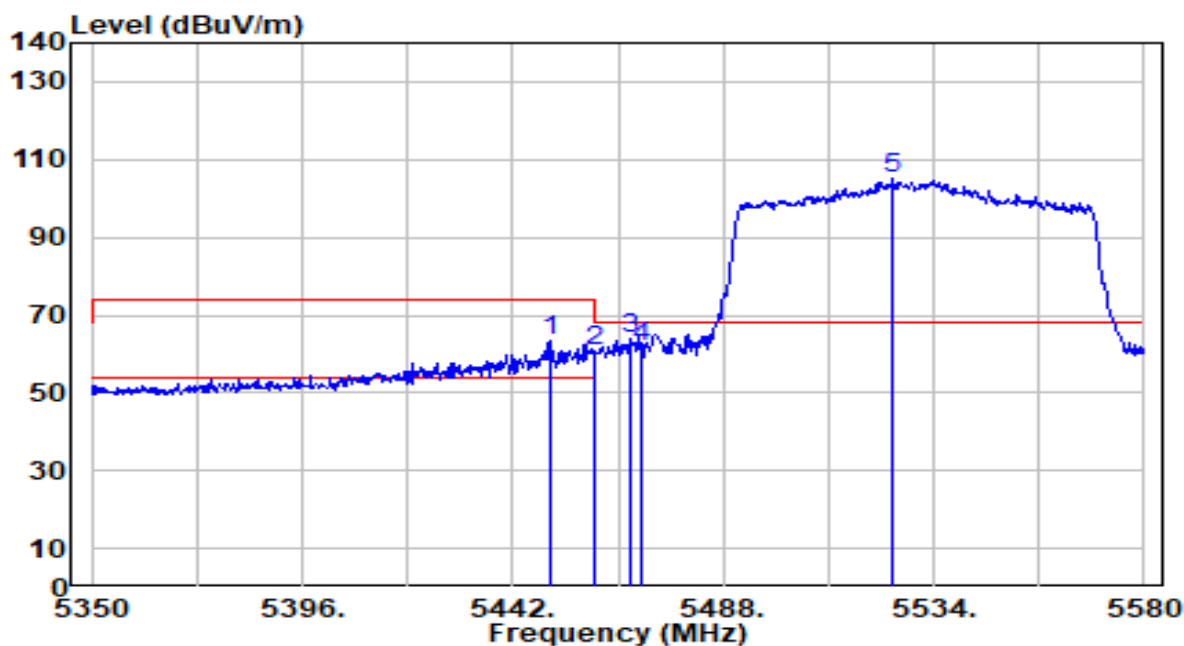


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.280	63.03	0.62	63.65	-10.35	74.00	182	76	Peak
2	5460.000	60.23	0.65	60.88	-13.12	74.00	182	76	Peak
3	* 5467.760	63.46	0.68	64.14	-4.06	68.20	182	76	Peak
4	5470.000	61.06	0.69	61.75	-6.45	68.20	182	76	Peak
5	5525.030	104.26	0.88	105.14	N/A	N/A	182	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

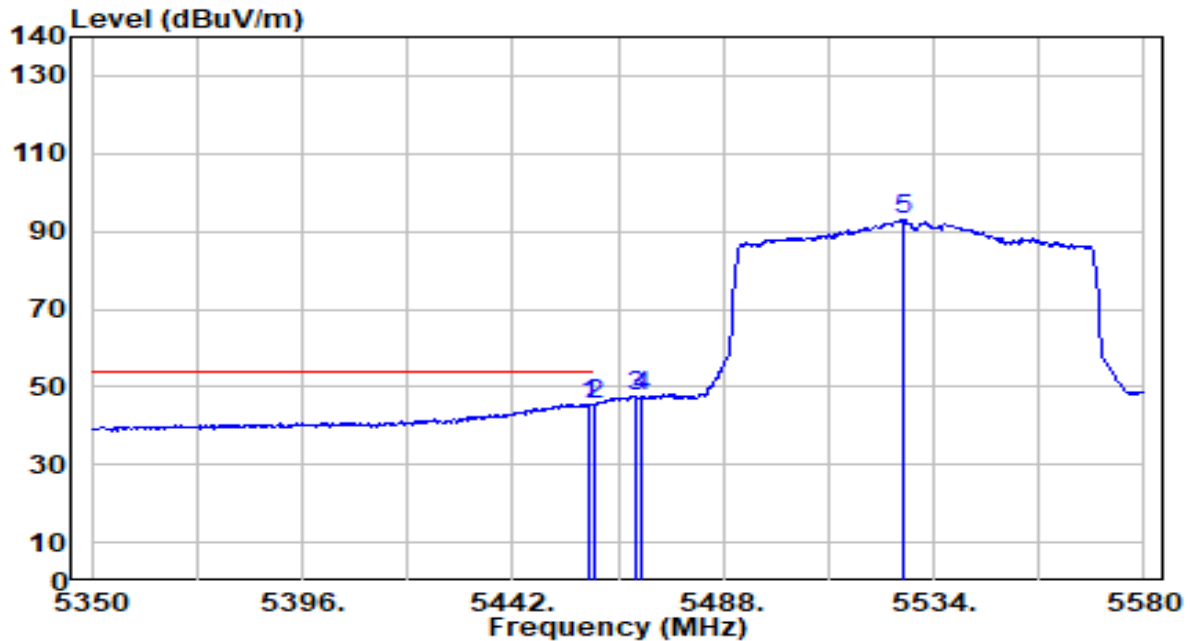


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	44.89	0.65	45.54	-8.46	54.00	182	76	Average
2		5460.000	44.72	0.65	45.37	-8.63	54.00	182	76	Average
3		5468.680	46.89	0.68	47.58	N/A	N/A	182	76	Average
4		5470.000	46.61	0.69	47.30	N/A	N/A	182	76	Average
5		5527.100	92.27	0.89	93.16	N/A	N/A	182	76	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

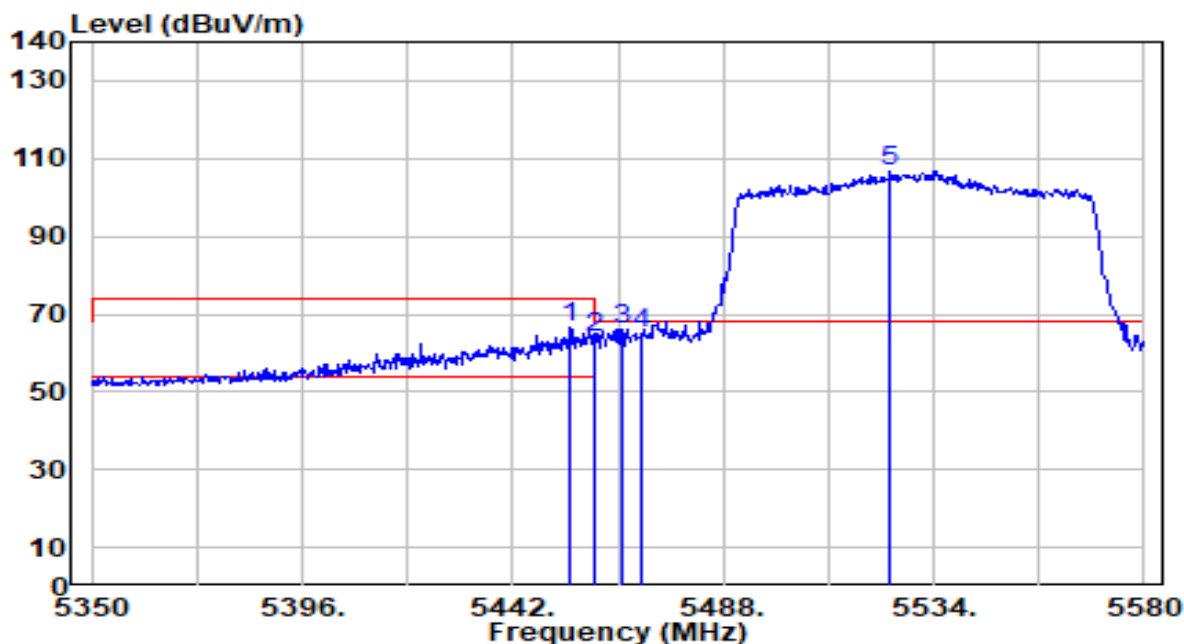


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.650	65.94	0.64	66.57	-7.43	74.00	191	114	Peak
2	5460.000	63.42	0.65	64.07	-9.93	74.00	191	114	Peak
3	* 5465.690	65.62	0.67	66.29	-1.91	68.20	191	114	Peak
4	5470.000	64.05	0.69	64.73	-3.47	68.20	191	114	Peak
5	5524.570	106.00	0.88	106.88	N/A	N/A	191	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

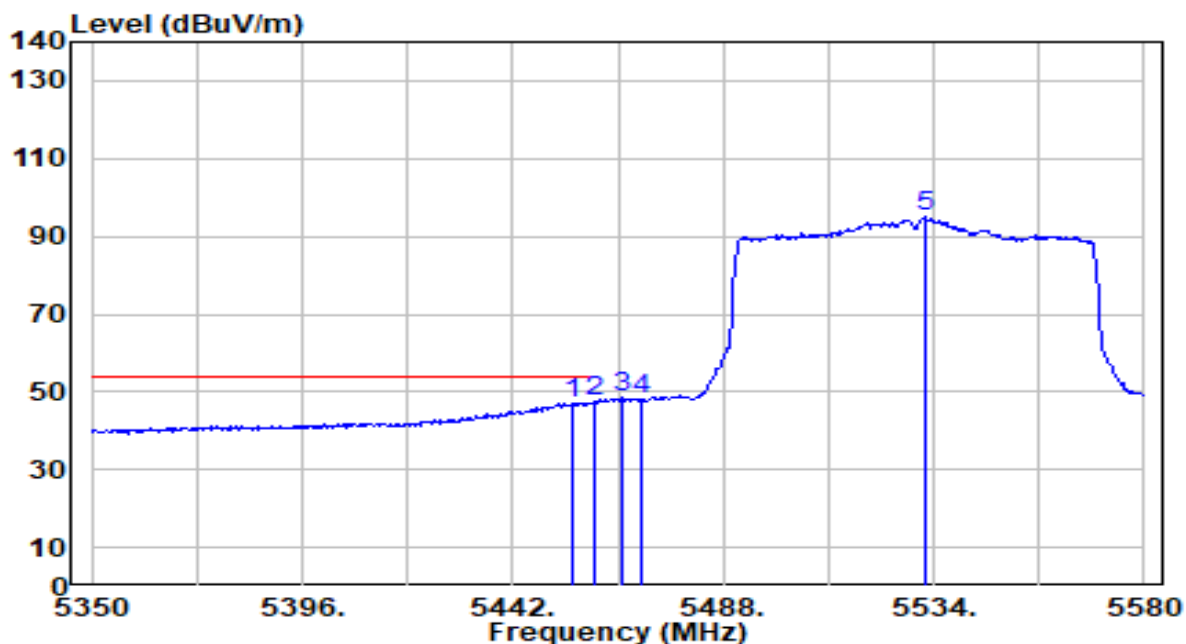


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.340	46.56	0.64	47.20	-6.80	54.00	191	114	Average
2	* 5460.000	46.68	0.65	47.34	-6.66	54.00	191	114	Average
3	5465.690	47.67	0.67	48.34	N/A	N/A	191	114	Average
4	5470.000	47.29	0.69	47.98	N/A	N/A	191	114	Average
5	5531.930	94.03	0.91	94.94	N/A	N/A	191	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

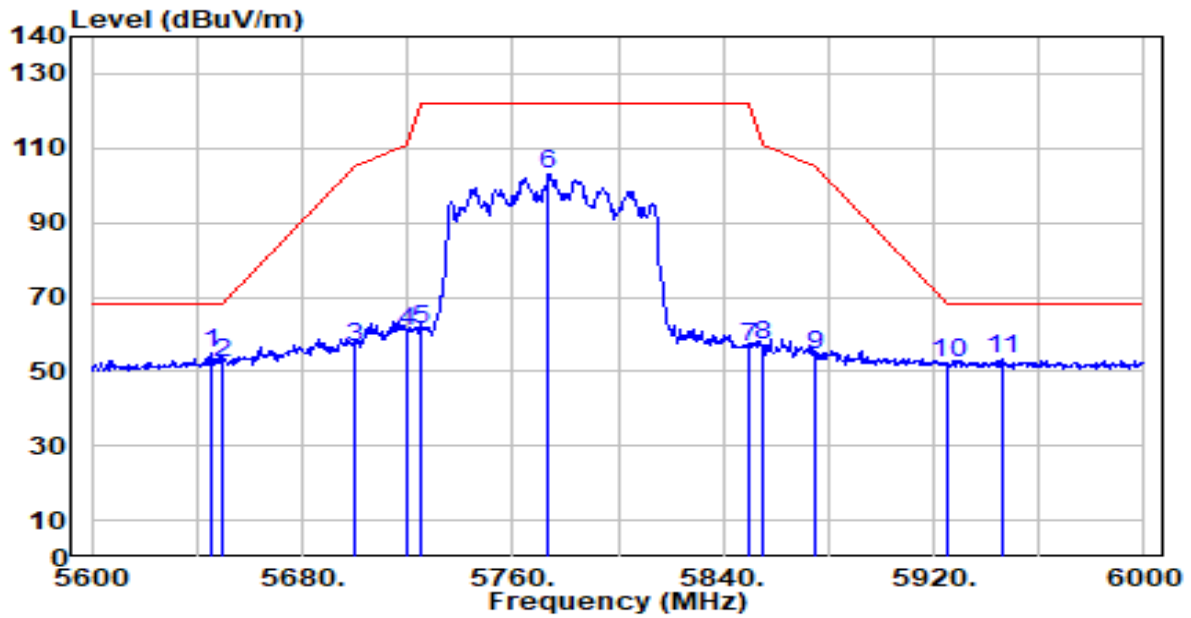


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.200	53.30	1.41	54.71	-13.49	68.20	100	260	Peak
2		5650.000	50.82	1.44	52.26	-15.94	68.20	100	260	Peak
3		5700.000	55.01	1.72	56.73	-48.47	105.20	100	260	Peak
4		5720.000	59.06	1.84	60.90	-49.90	110.80	100	260	Peak
5		5725.000	59.66	1.86	61.52	-60.68	122.20	100	260	Peak
6		5773.200	100.81	2.14	102.95	N/A	N/A	100	260	Peak
7		5850.000	54.48	2.27	56.75	-65.45	122.20	100	260	Peak
8		5855.000	54.79	2.27	57.06	-53.74	110.80	100	260	Peak
9		5875.000	52.17	2.26	54.43	-50.77	105.20	100	260	Peak
10		5925.000	49.95	2.25	52.19	-16.01	68.20	100	260	Peak
11		5946.000	50.93	2.24	53.17	-15.03	68.20	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

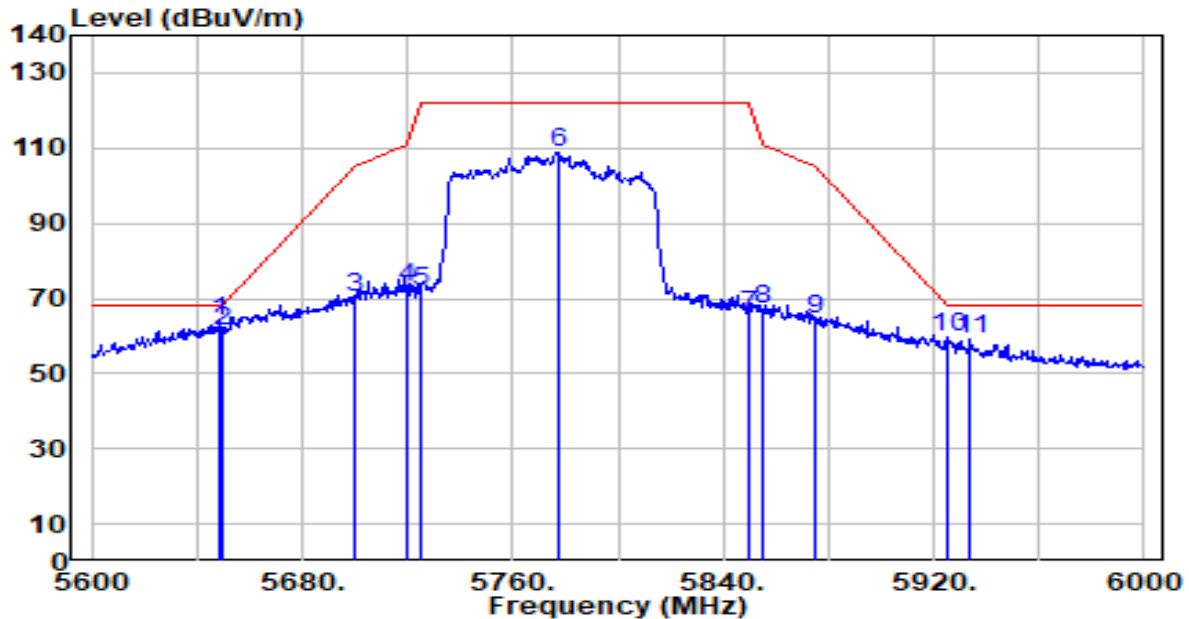


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	62.60	1.43	64.03	-4.17	68.20	121	87	Peak
2		5650.000	59.81	1.44	61.25	-6.95	68.20	121	87	Peak
3		5700.000	68.57	1.72	70.29	-34.91	105.20	121	87	Peak
4		5720.000	71.28	1.84	73.11	-37.69	110.80	121	87	Peak
5		5725.000	69.87	1.86	71.74	-50.46	122.20	121	87	Peak
6		5777.200	106.59	2.16	108.75	N/A	N/A	121	87	Peak
7		5850.000	63.27	2.27	65.54	-56.66	122.20	121	87	Peak
8		5855.000	65.06	2.27	67.33	-43.47	110.80	121	87	Peak
9		5875.000	62.38	2.26	64.65	-40.55	105.20	121	87	Peak
10		5925.000	57.65	2.25	59.89	-8.31	68.20	121	87	Peak
11		5934.000	56.73	2.24	58.98	-9.22	68.20	121	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

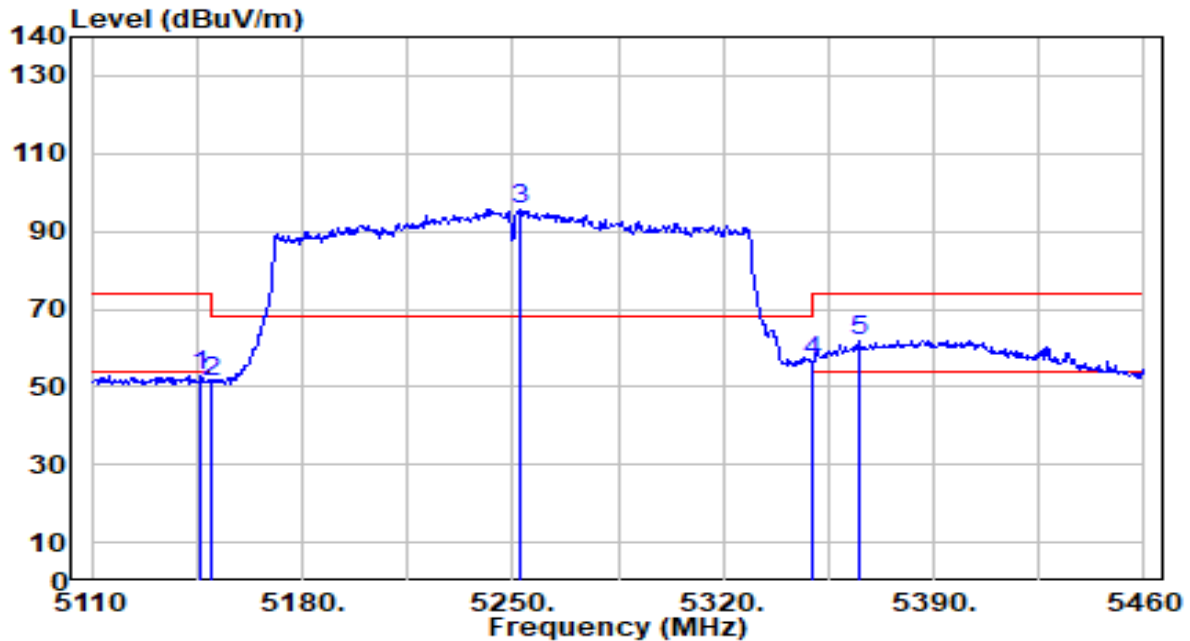


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.050	52.32	0.68	52.99	-21.01	74.00	179	80	Peak
2	5150.000	50.62	0.68	51.29	-22.71	74.00	179	80	Peak
3	5252.100	95.00	0.61	95.61	N/A	N/A	179	80	Peak
4	5350.000	56.25	0.51	56.75	-17.25	74.00	179	80	Peak
5	* 5365.150	61.54	0.49	62.03	-11.97	74.00	179	80	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

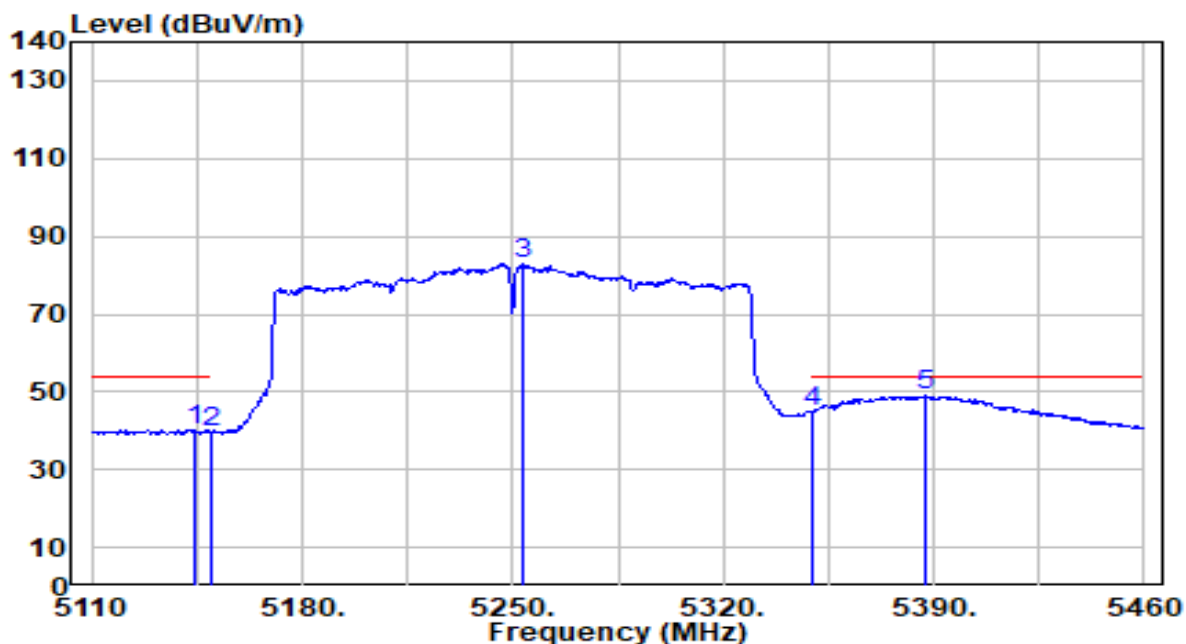


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.950	39.52	0.68	40.19	-13.81	54.00	179	80	Average
2	5150.000	38.98	0.68	39.66	-14.34	54.00	179	80	Average
3	5253.500	82.12	0.61	82.73	N/A	N/A	179	80	Average
4	5350.000	44.62	0.51	45.13	-8.87	54.00	179	80	Average
5	* 5387.550	48.61	0.46	49.07	-4.93	54.00	179	80	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

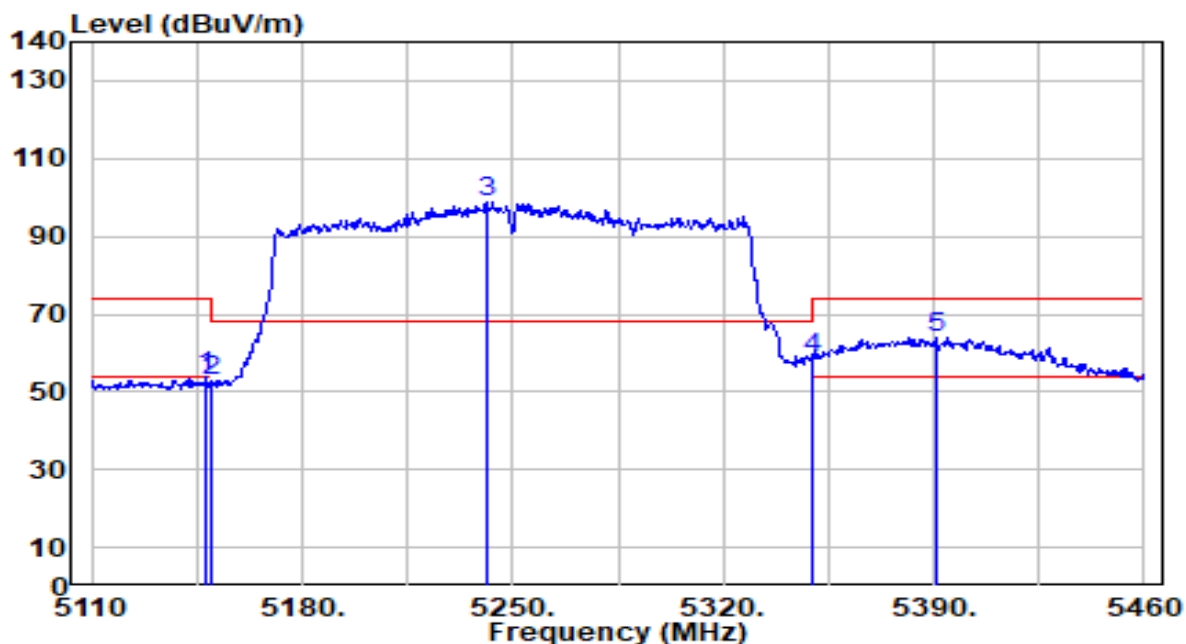


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.150	53.34	0.68	54.02	-19.98	74.00	221	119	Peak
2	5150.000	52.36	0.68	53.03	-20.97	74.00	221	119	Peak
3	5241.600	98.21	0.62	98.83	N/A	N/A	221	119	Peak
4	5350.000	58.14	0.51	58.64	-15.36	74.00	221	119	Peak
5	* 5390.700	63.61	0.46	64.07	-9.93	74.00	221	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

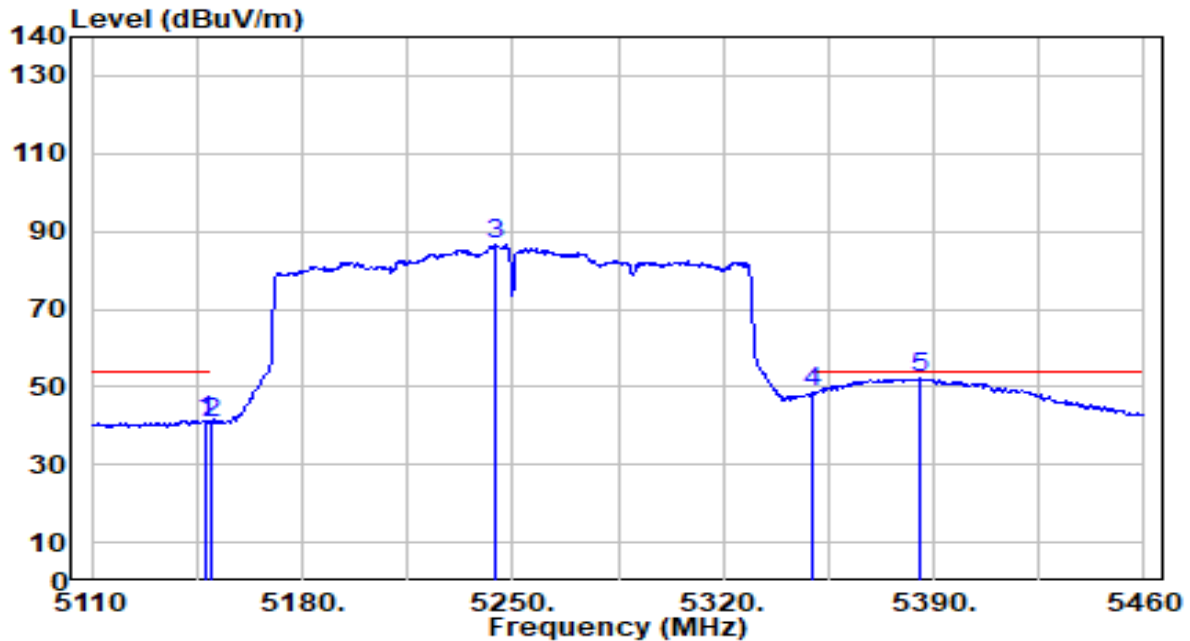


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.800	40.65	0.68	41.32	-12.68	54.00	221	119	Average
2	5150.000	40.16	0.68	40.84	-13.16	54.00	221	119	Average
3	5244.050	85.83	0.62	86.45	N/A	N/A	221	119	Average
4	5350.000	47.90	0.51	48.40	-5.60	54.00	221	119	Average
5	* 5385.800	51.58	0.47	52.04	-1.96	54.00	221	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

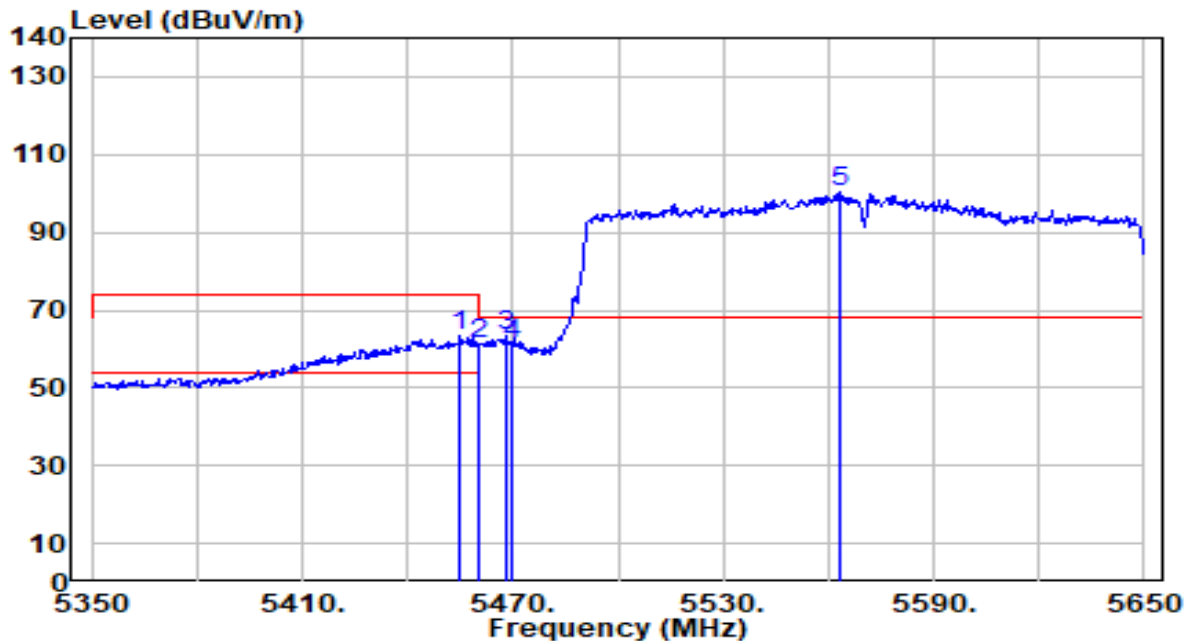


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.000	62.59	0.64	63.22	-10.78	74.00	173	85	Peak
2	5460.000	60.48	0.65	61.13	-12.87	74.00	173	85	Peak
3	* 5468.200	62.60	0.68	63.28	-4.92	68.20	173	85	Peak
4	5470.000	60.69	0.69	61.38	-6.82	68.20	173	85	Peak
5	5563.600	99.12	1.02	100.14	N/A	N/A	173	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

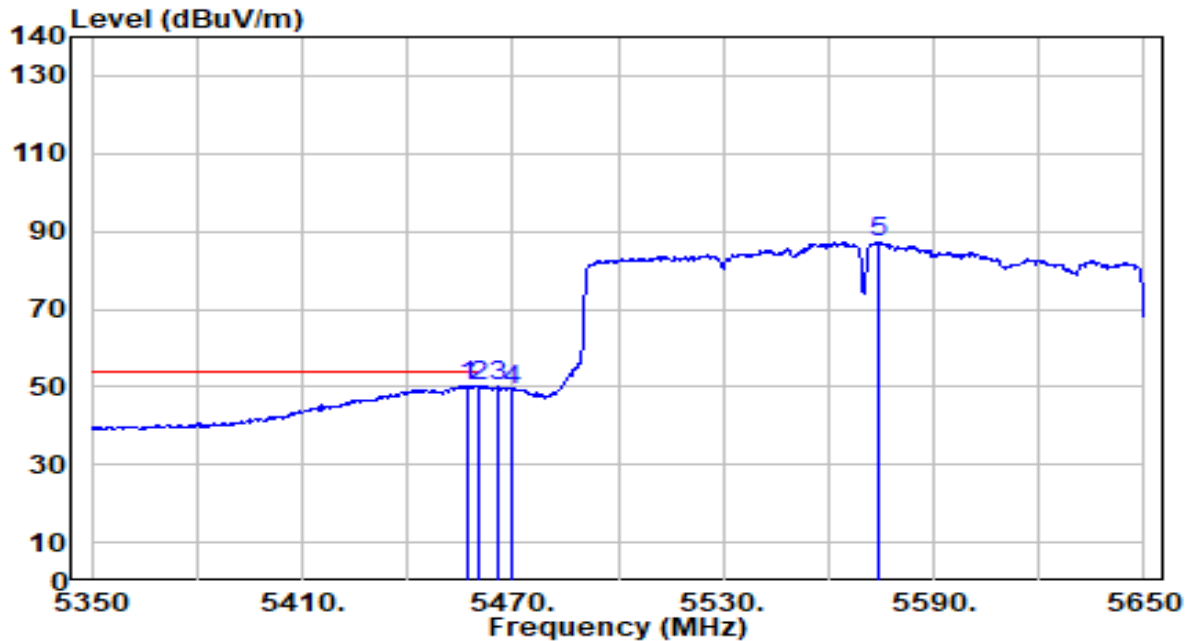


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.400	49.62	0.65	50.27	-3.73	54.00	173	85	Average
2		5460.000	49.47	0.65	50.13	-3.87	54.00	173	85	Average
3		5465.800	49.36	0.67	50.03	N/A	N/A	173	85	Average
4		5470.000	48.37	0.69	49.06	N/A	N/A	173	85	Average
5		5574.400	86.28	1.06	87.34	N/A	N/A	173	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

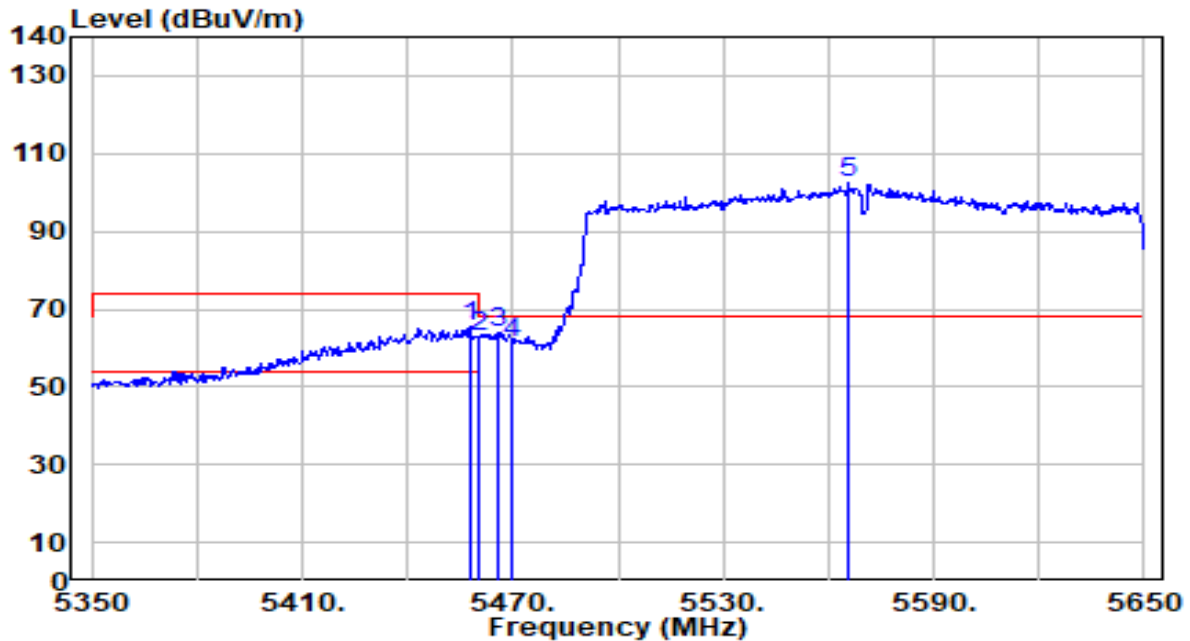


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.700	65.02	0.65	65.67	-8.33	74.00	190	122	Peak
2	5460.000	62.09	0.65	62.75	-11.25	74.00	190	122	Peak
3	* 5465.500	63.23	0.67	63.90	-4.30	68.20	190	122	Peak
4	5470.000	60.68	0.69	61.37	-6.83	68.20	190	122	Peak
5	5566.000	101.31	1.03	102.34	N/A	N/A	190	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

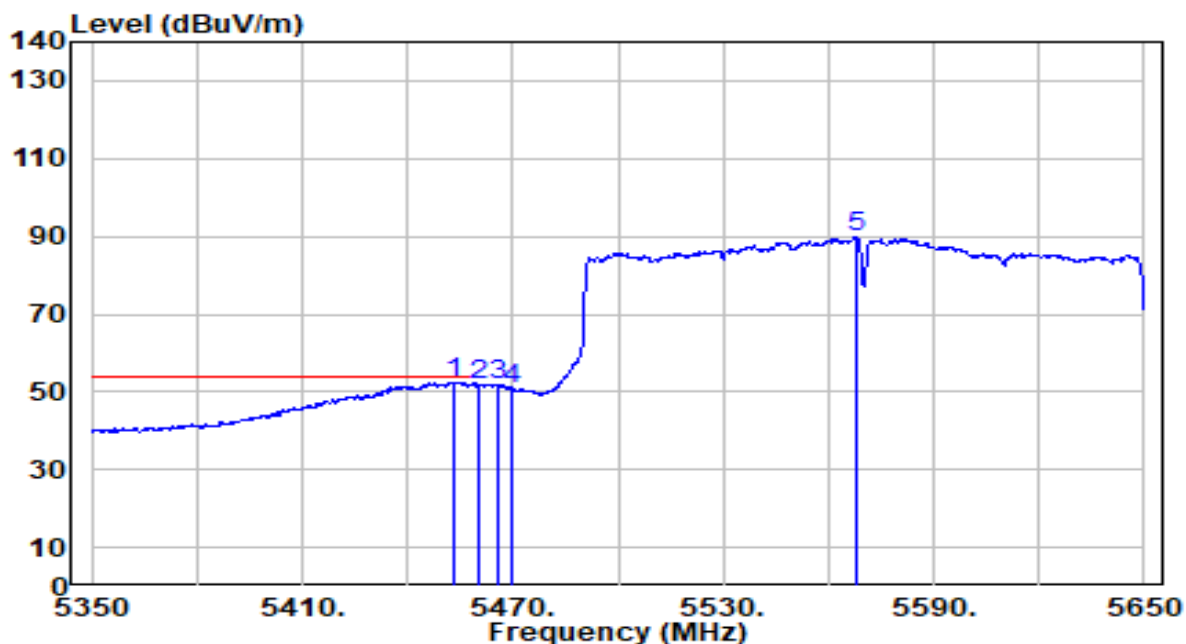


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.200	51.71	0.63	52.34	-1.66	54.00	190	122	Average
2		5460.000	51.25	0.65	51.90	-2.10	54.00	190	122	Average
3		5465.500	51.24	0.67	51.91	N/A	N/A	190	122	Average
4		5470.000	49.77	0.69	50.46	N/A	N/A	190	122	Average
5		5567.800	88.64	1.04	89.68	N/A	N/A	190	122	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

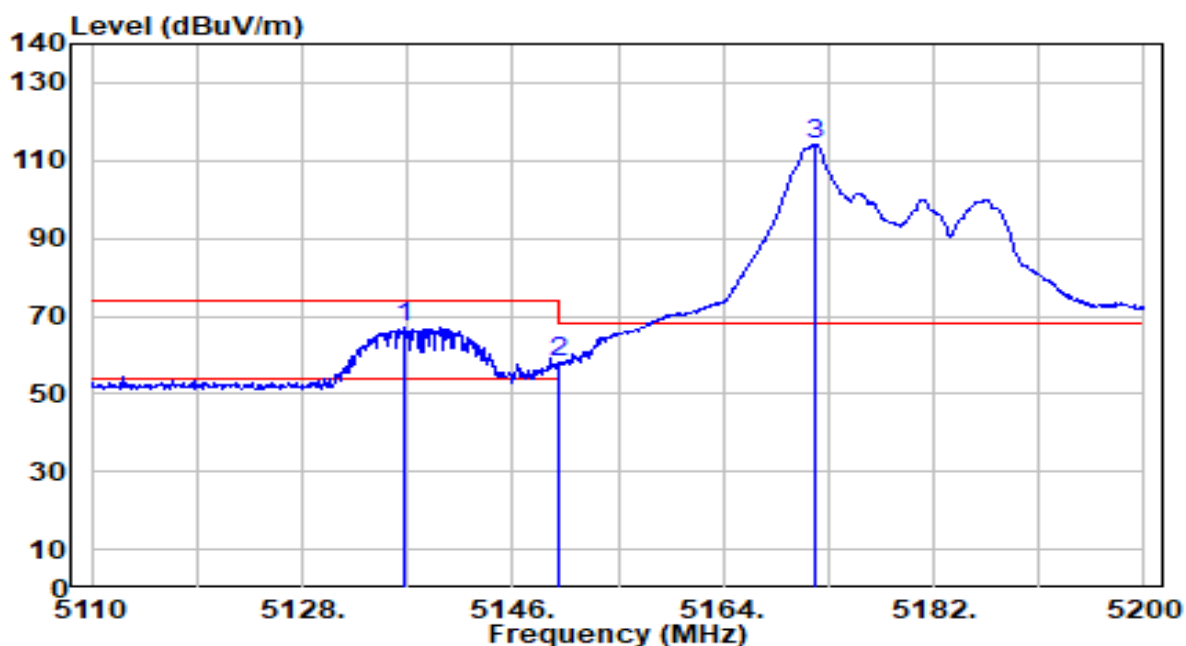


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.640	66.19	0.68	66.87	-7.13	74.00	352	67	Peak
2		5150.000	57.59	0.68	58.27	-15.73	74.00	352	67	Peak
3		5171.830	113.43	0.67	114.11	N/A	N/A	352	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

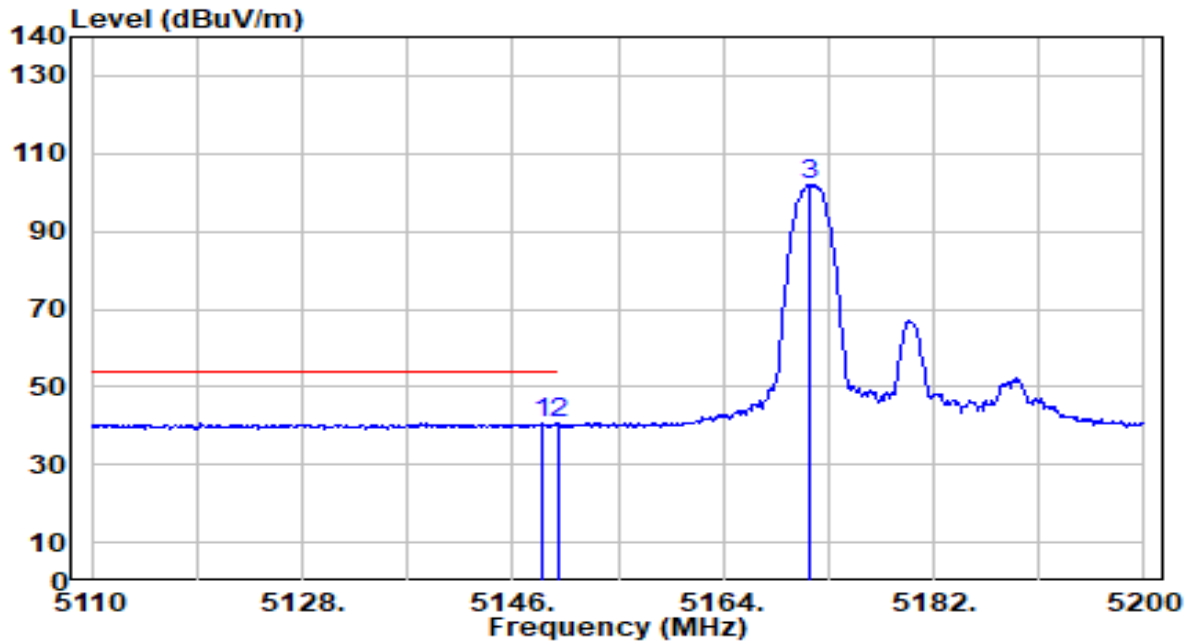


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	39.84	0.68	40.51	-13.49	54.00	352	67	Average
2		5150.000	39.80	0.68	40.48	-13.52	54.00	352	67	Average
3		5171.380	101.46	0.67	102.13	N/A	N/A	352	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

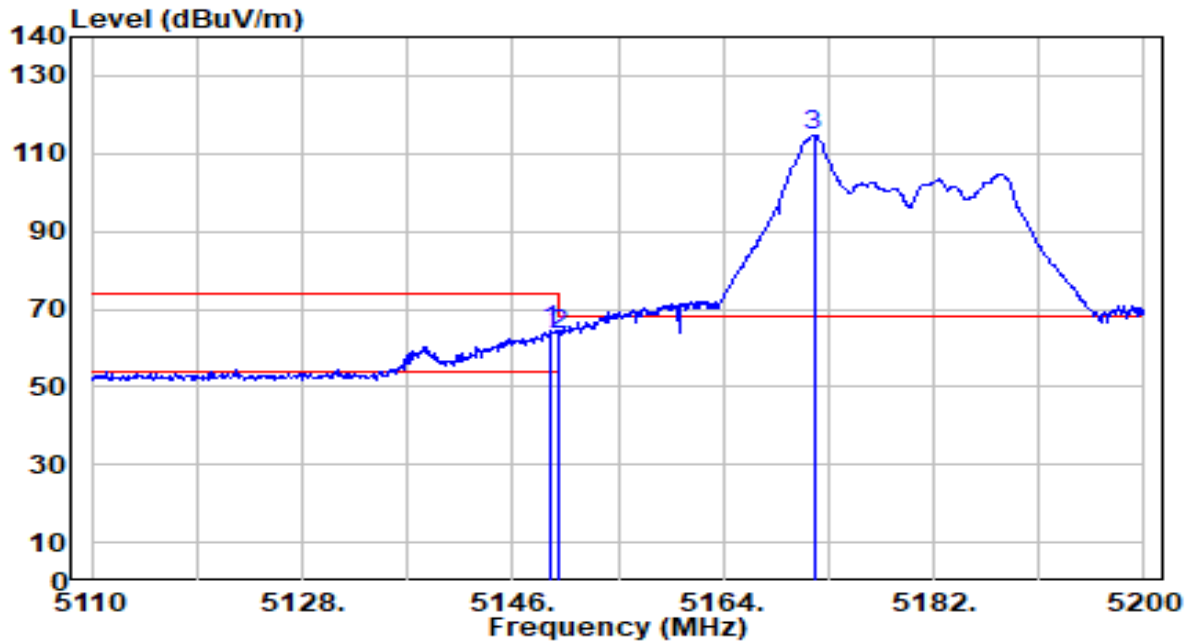


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	63.57	0.68	64.24	-9.76	74.00	198	85	Peak
2		5150.000	62.84	0.68	63.51	-10.49	74.00	198	85	Peak
3		5171.740	114.14	0.67	114.81	N/A	N/A	198	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

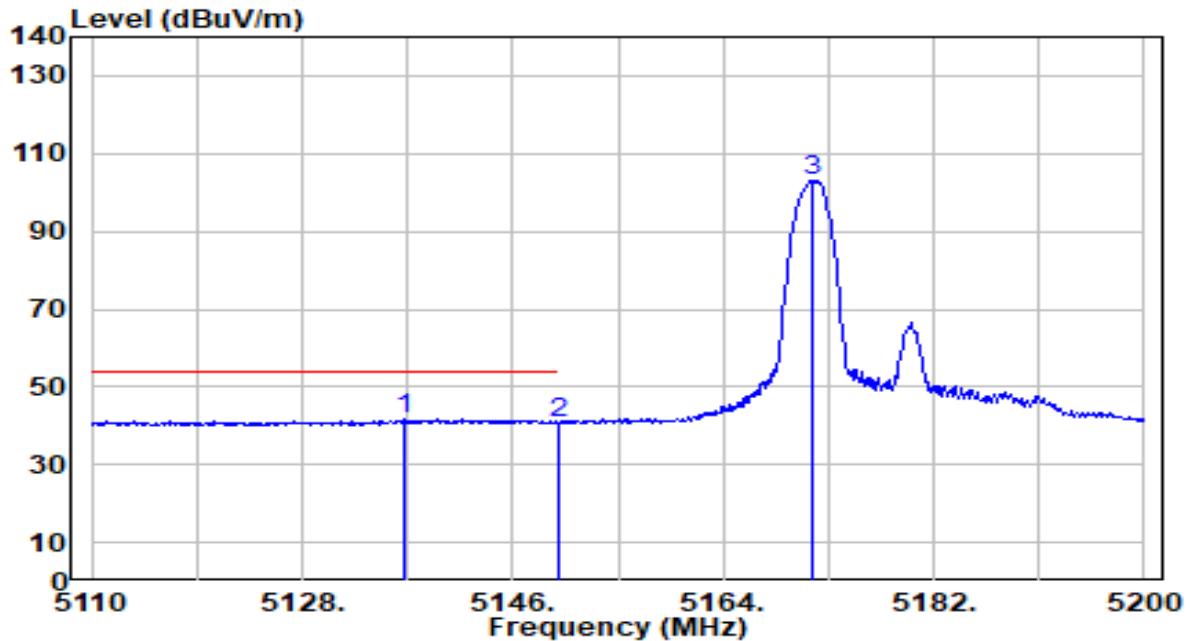


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.640	40.91	0.68	41.58	-12.42	54.00	198	85	Average
2		5150.000	39.85	0.68	40.53	-13.47	54.00	198	85	Average
3		5171.650	102.50	0.67	103.18	N/A	N/A	198	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

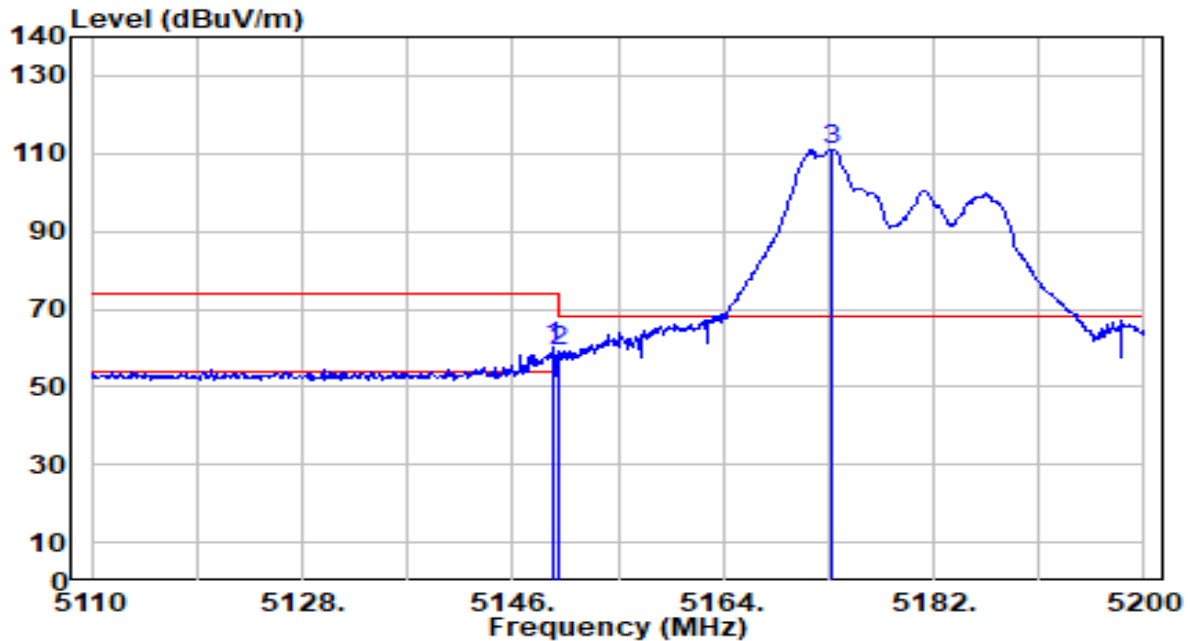


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	59.31	0.68	59.98	-14.02	74.00	352	67	Peak
2		5150.000	58.38	0.68	59.05	-14.95	74.00	352	67	Peak
3		5173.270	110.50	0.67	111.18	N/A	N/A	352	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

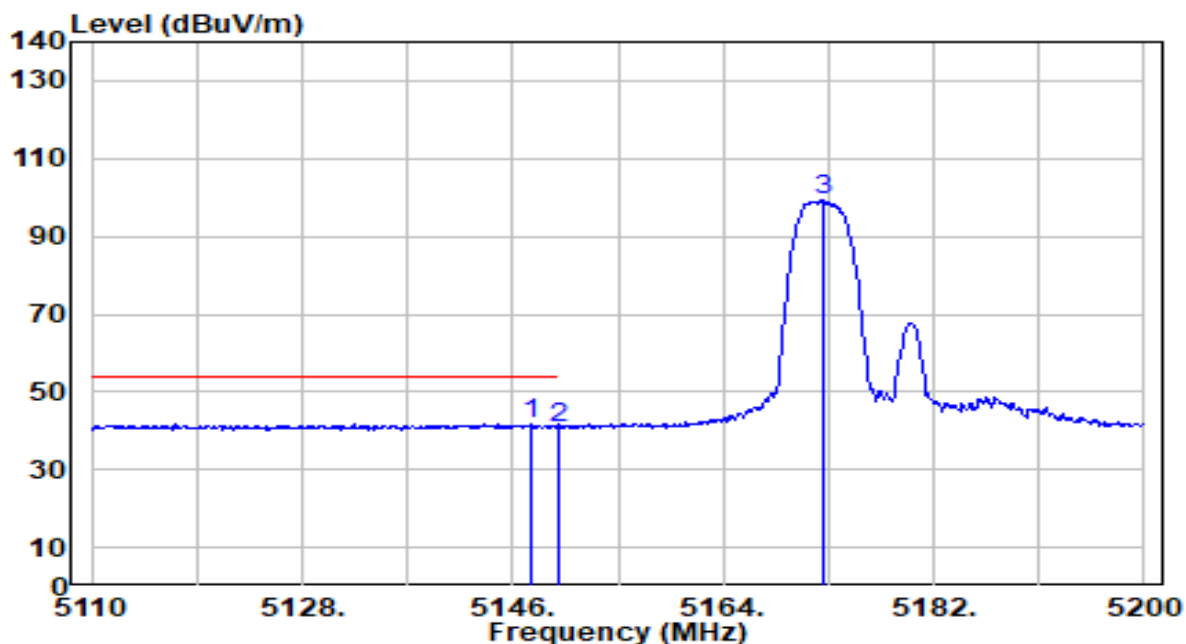


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.530	40.90	0.68	41.58	-12.42	54.00	352	67	Average
2		5150.000	40.16	0.68	40.83	-13.17	54.00	352	67	Average
3		5172.460	98.46	0.67	99.13	N/A	N/A	352	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

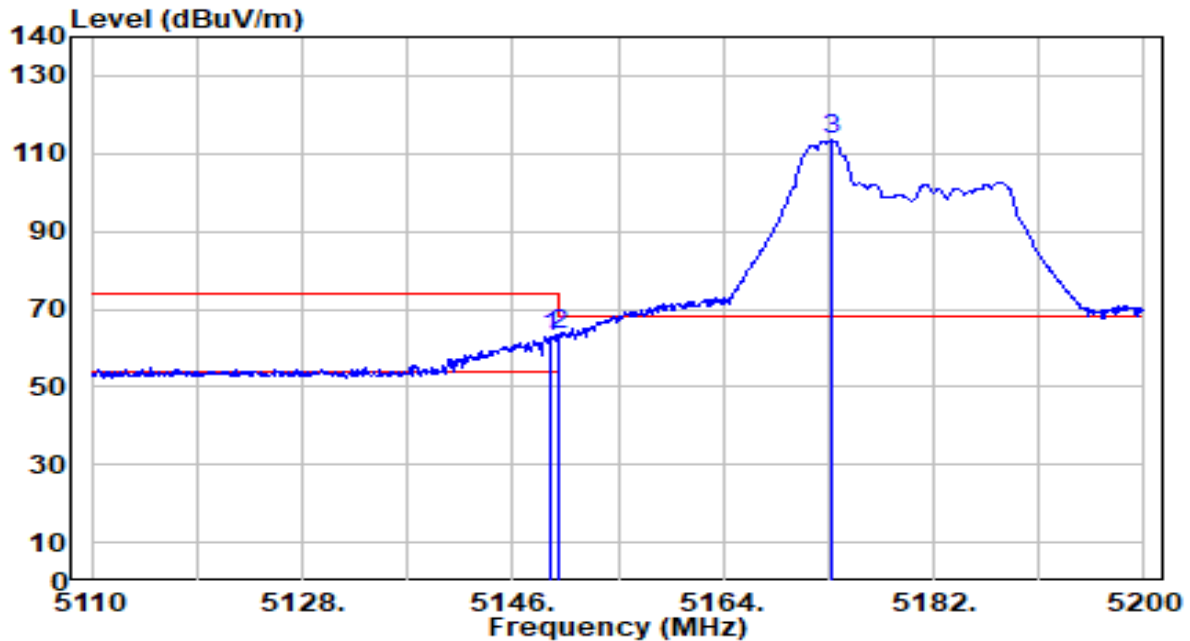


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	62.26	0.68	62.93	-11.07	74.00	231	59	Peak
2	*	5150.000	62.60	0.68	63.28	-10.72	74.00	231	59	Peak
3		5173.270	112.66	0.67	113.33	N/A	N/A	231	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

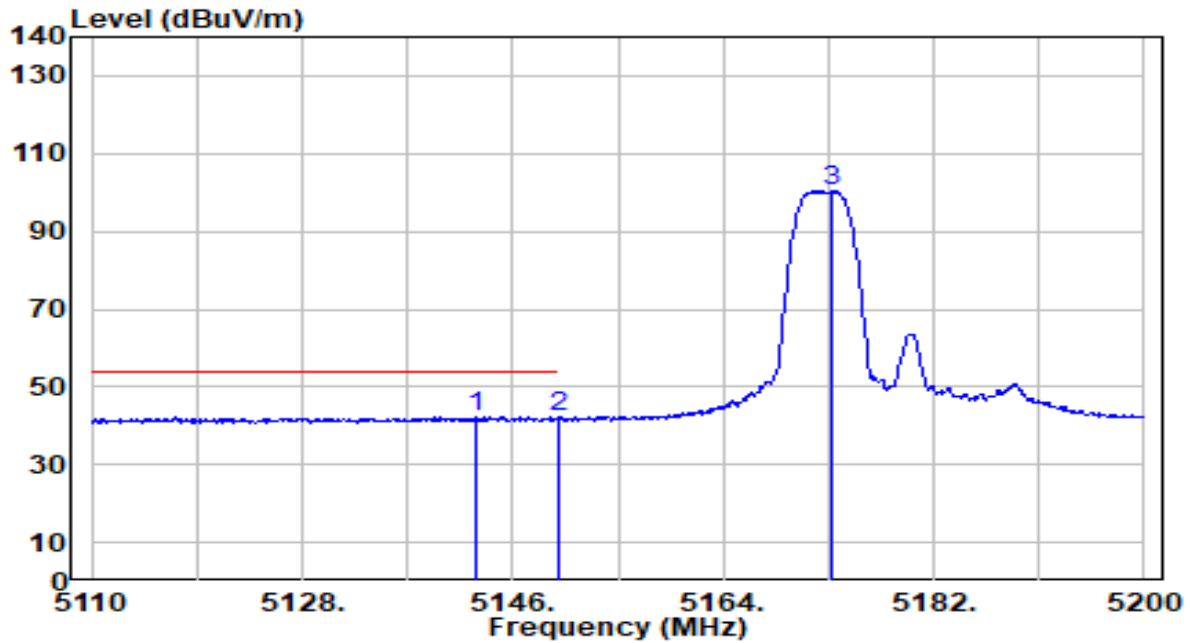


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.760	41.60	0.68	42.27	-11.73	54.00	231	59	Average
2		5150.000	41.44	0.68	42.12	-11.88	54.00	231	59	Average
3		5173.270	99.76	0.67	100.44	N/A	N/A	231	59	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

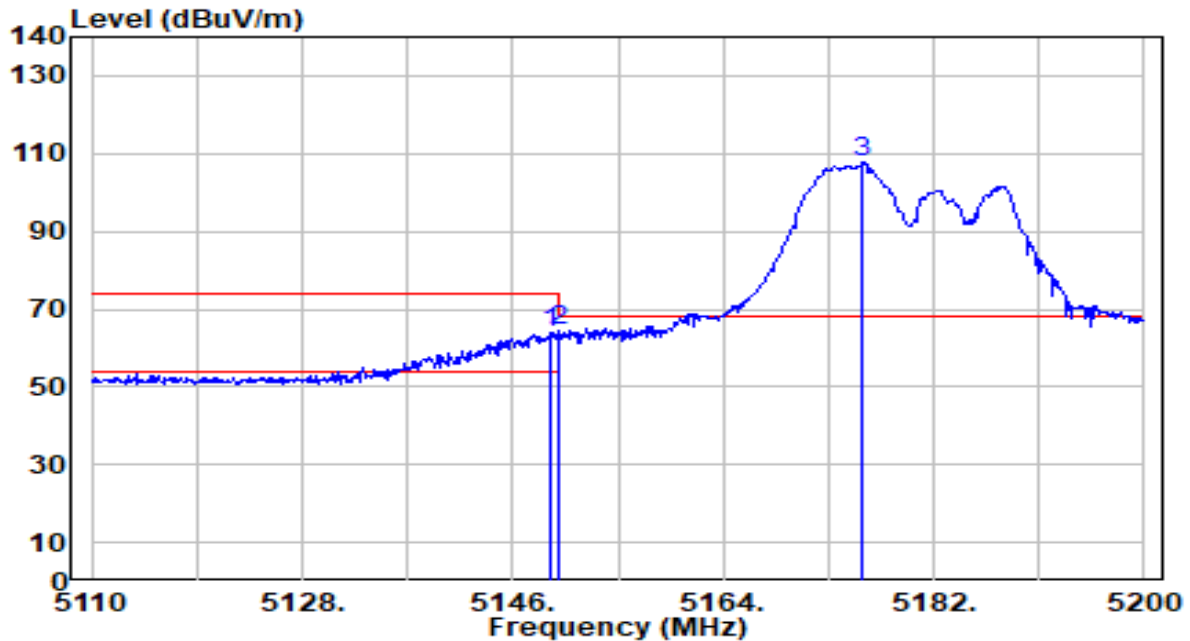


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.150	63.13	0.68	63.80	-10.20	74.00	102	316	Peak
2	*	5150.000	63.61	0.68	64.28	-9.72	74.00	102	316	Peak
3		5175.970	106.93	0.67	107.61	N/A	N/A	102	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

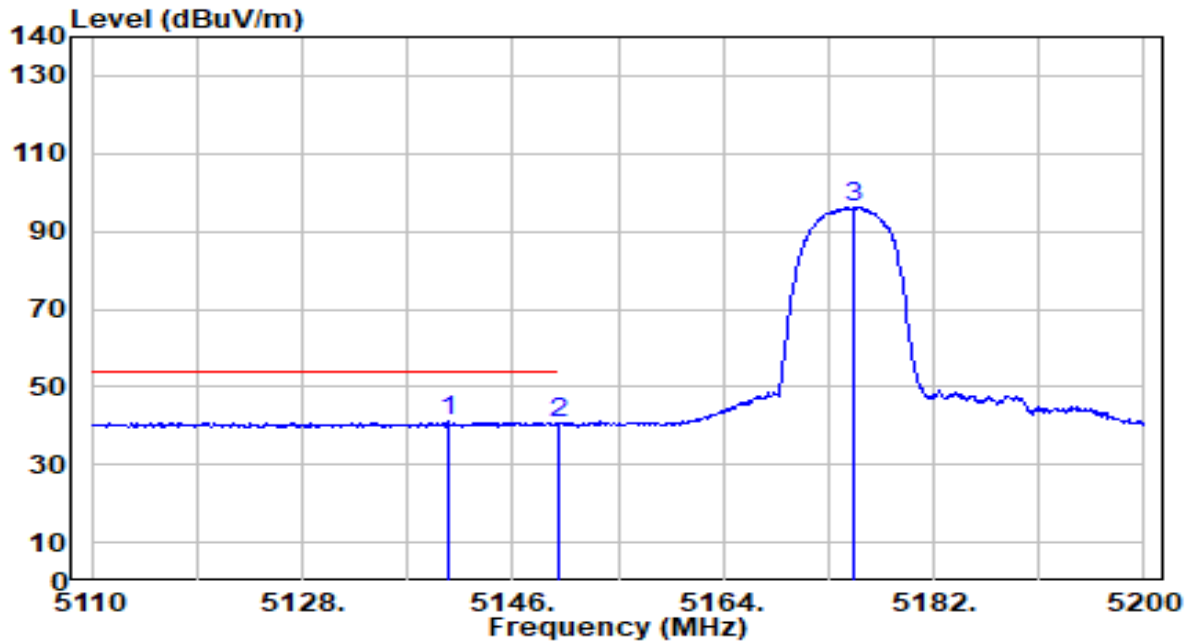


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.420	40.27	0.68	40.95	-13.05	54.00	102	316	Average
2		5150.000	39.94	0.68	40.61	-13.39	54.00	102	316	Average
3		5175.160	95.53	0.67	96.20	N/A	N/A	102	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

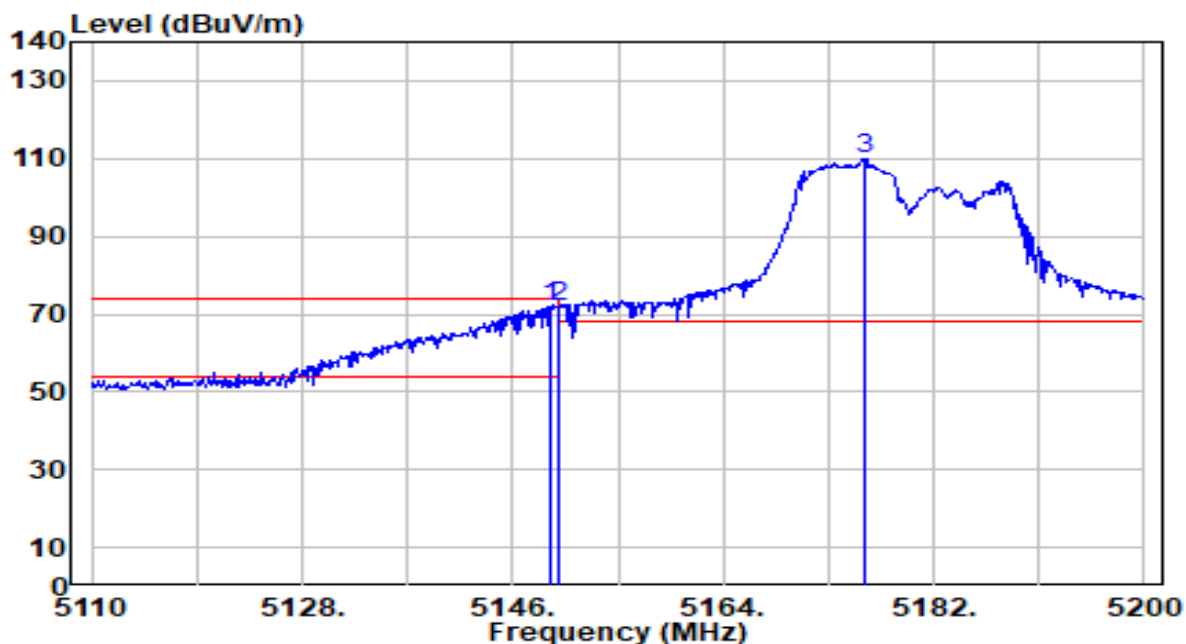


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	71.40	0.68	72.07	-1.93	74.00	126	110	Peak
2		5150.000	71.24	0.68	71.91	-2.09	74.00	126	110	Peak
3		5176.150	109.26	0.67	109.93	N/A	N/A	126	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

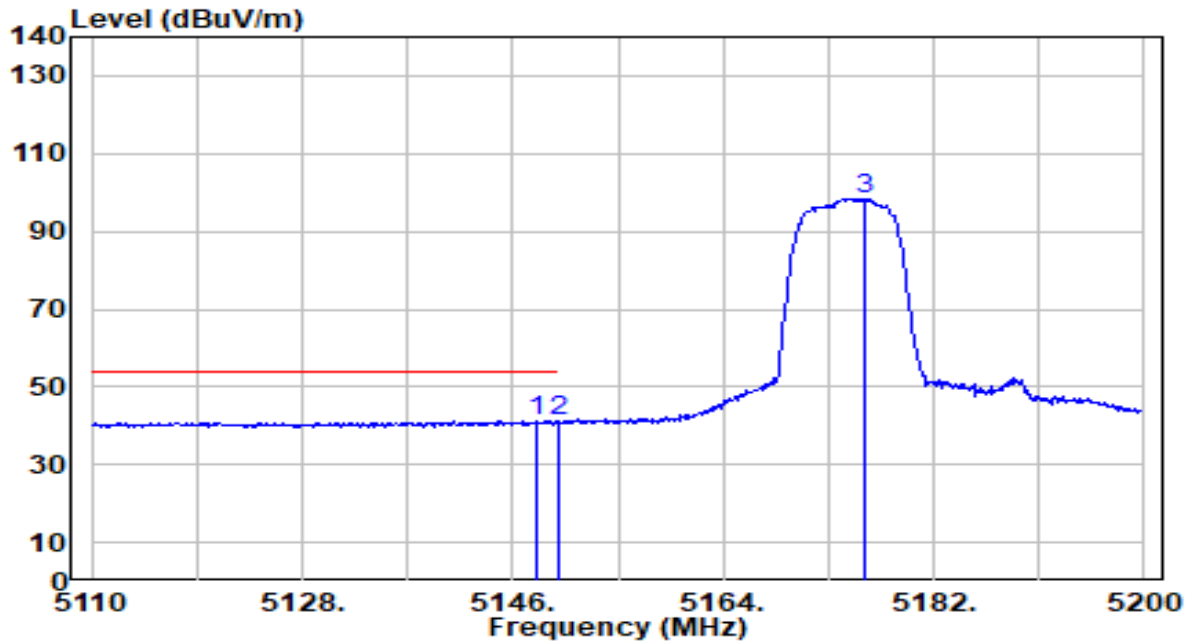


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.160	40.59	0.68	41.26	-12.74	54.00	126	110	Average
2		5150.000	40.33	0.68	41.01	-12.99	54.00	126	110	Average
3		5176.060	97.80	0.67	98.47	N/A	N/A	126	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

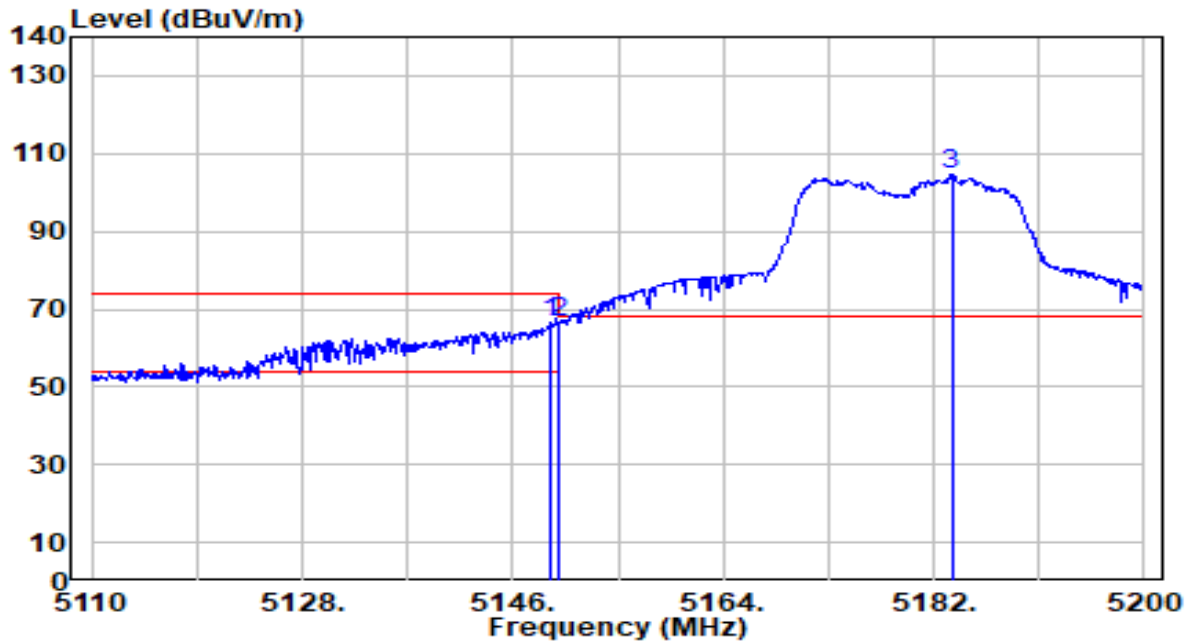


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	65.69	0.68	66.37	-7.63	74.00	103	45	Peak
2	*	5150.000	65.85	0.68	66.52	-7.48	74.00	103	45	Peak
3		5183.530	104.05	0.67	104.72	N/A	N/A	103	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

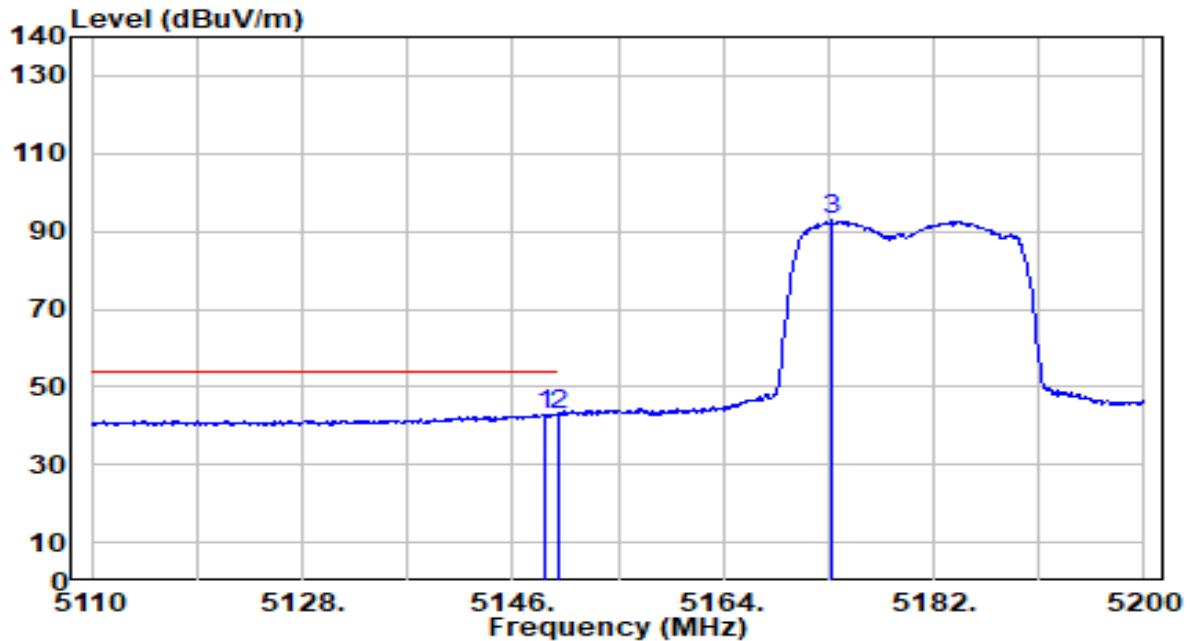


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.790	42.36	0.68	43.03	-10.97	54.00	103	45	Average
2		5150.000	41.90	0.68	42.57	-11.43	54.00	103	45	Average
3		5173.360	92.13	0.67	92.81	N/A	N/A	103	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

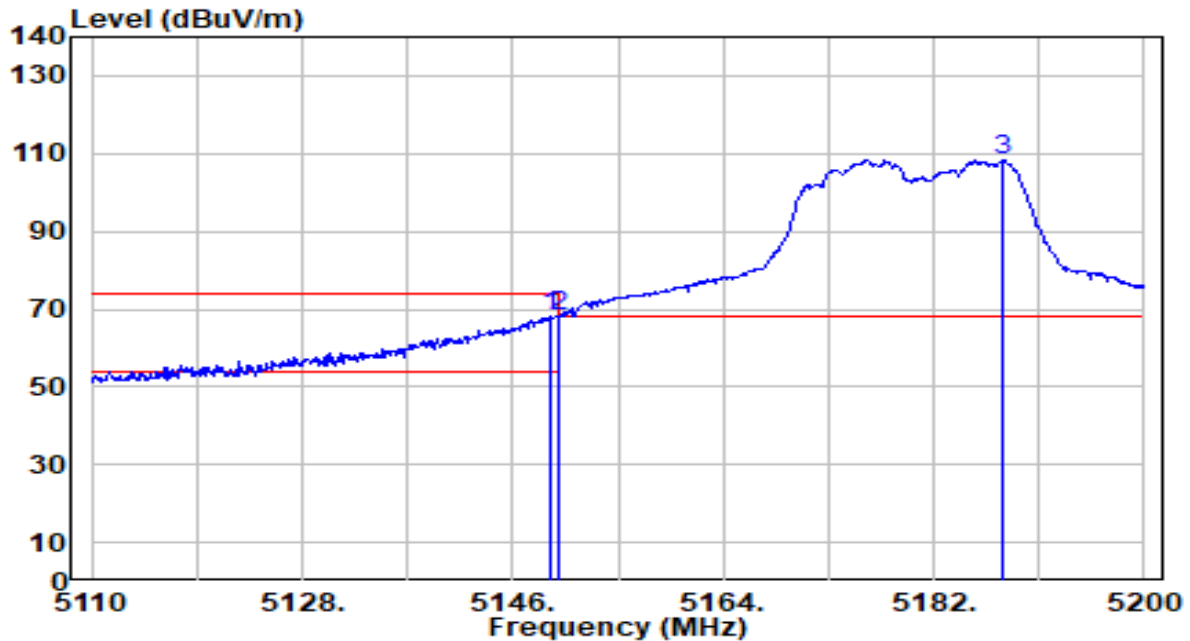


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	67.33	0.68	68.01	-5.99	74.00	110	136	Peak
2		5150.000	67.29	0.68	67.97	-6.03	74.00	110	136	Peak
3		5187.940	107.58	0.67	108.25	N/A	N/A	110	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

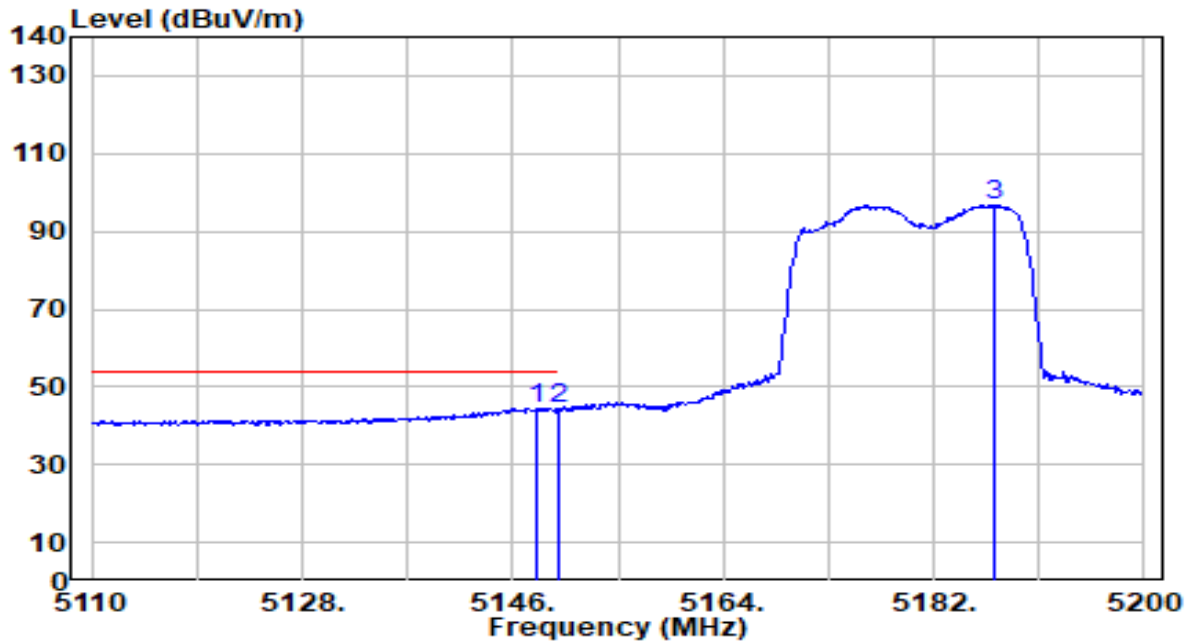


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.980	43.88	0.68	44.56	-9.44	54.00	110	136	Average
2		5150.000	43.47	0.68	44.15	-9.85	54.00	110	136	Average
3		5187.130	96.10	0.67	96.77	N/A	N/A	110	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

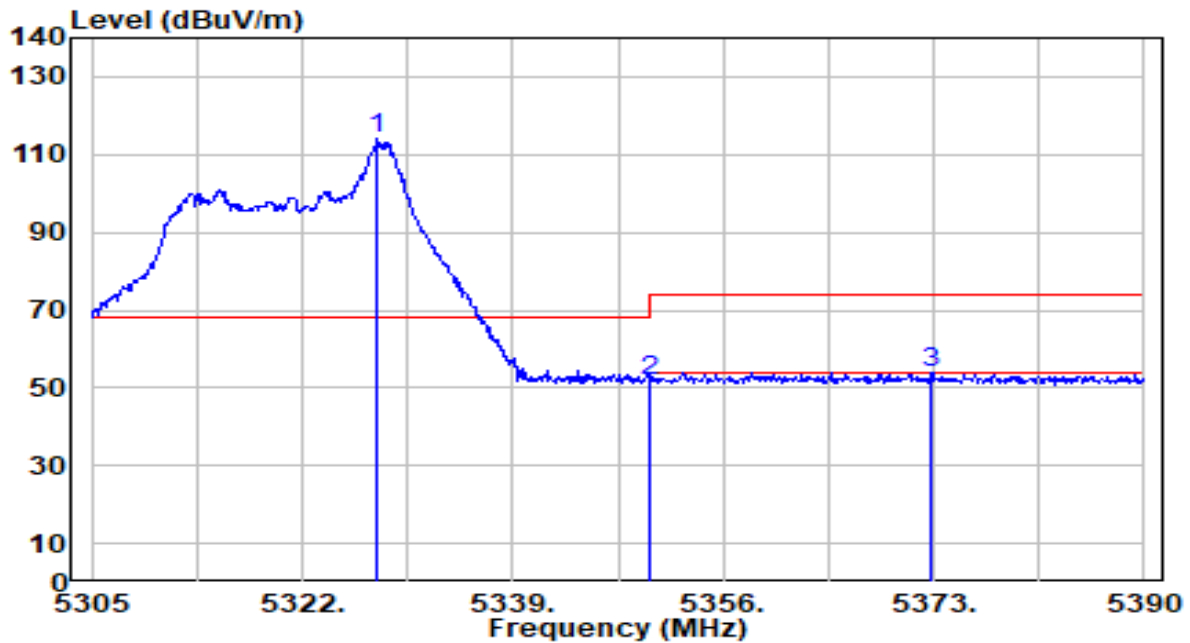


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.120	113.37	0.53	113.90	N/A	N/A	100	224	Peak
2	5350.000	51.23	0.51	51.74	-22.26	74.00	100	224	Peak
3	* 5372.830	53.59	0.48	54.07	-19.93	74.00	100	224	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

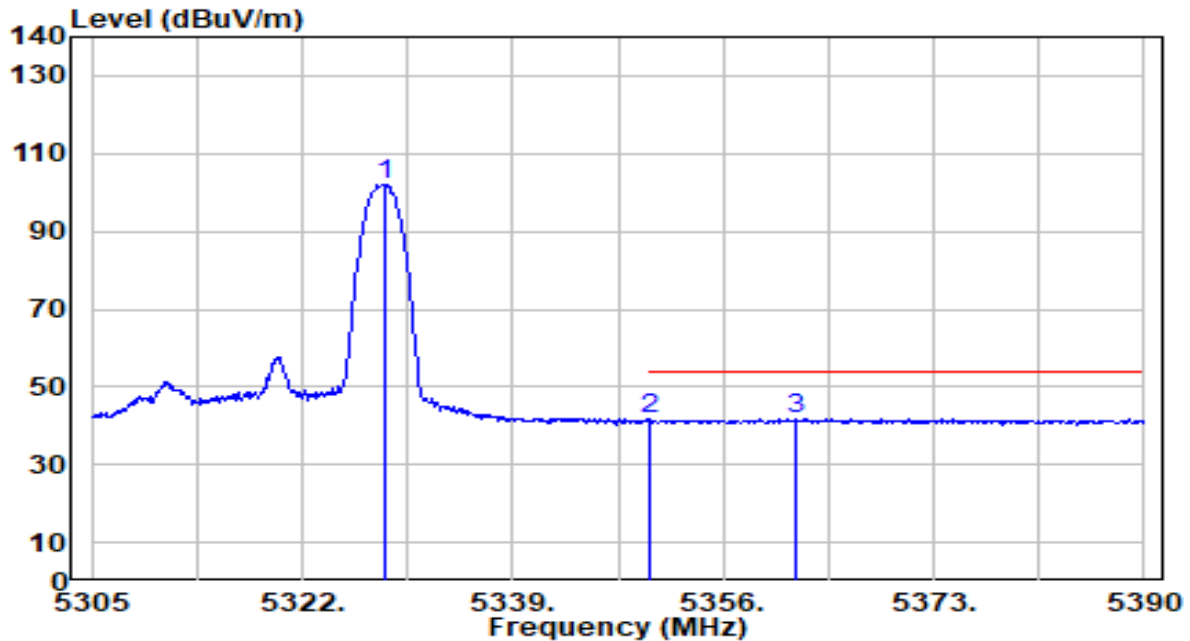


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.630	101.44	0.53	101.97	N/A	N/A	100	224	Average
2	5350.000	40.97	0.51	41.47	-12.53	54.00	100	224	Average
3	* 5361.780	41.35	0.49	41.85	-12.15	54.00	100	224	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

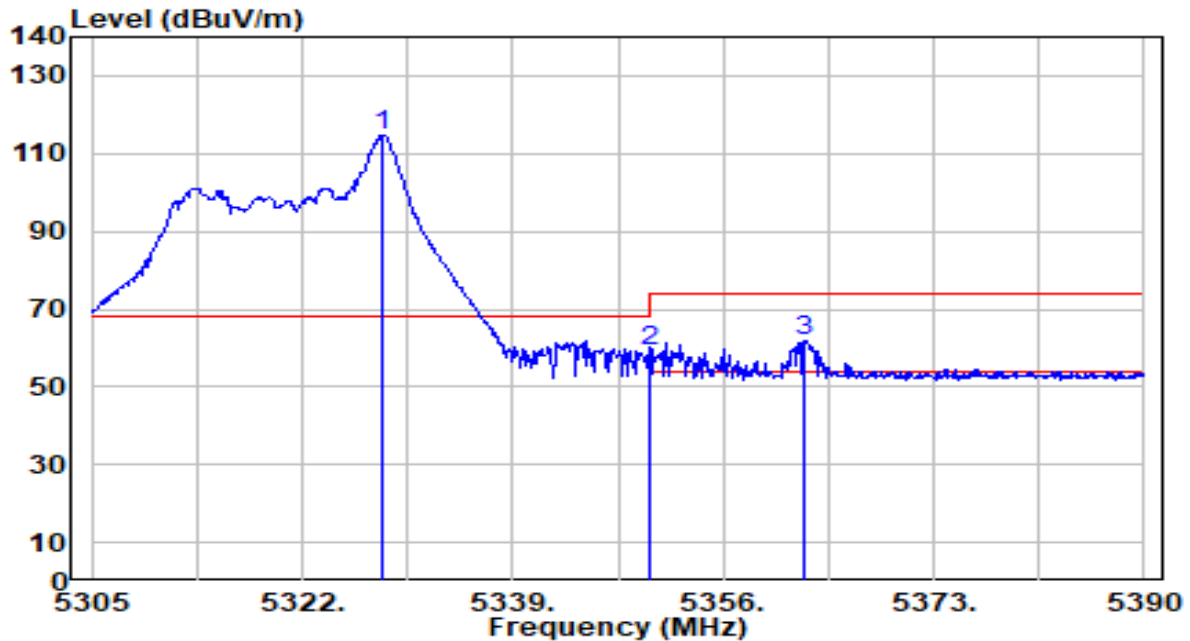


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	114.22	0.53	114.74	N/A	N/A	151	131	Peak
2	5350.000	58.41	0.51	58.91	-15.09	74.00	151	131	Peak
3	* 5362.630	61.31	0.49	61.80	-12.20	74.00	151	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

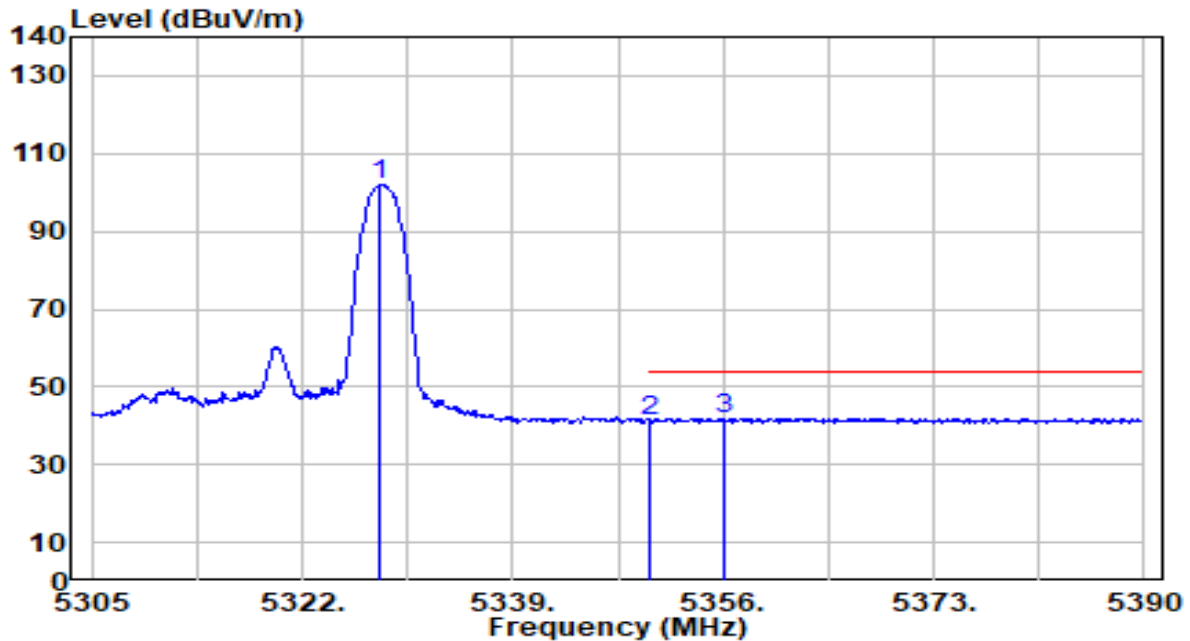


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.290	101.57	0.53	102.10	N/A	N/A	151	131	Average
2	5350.000	40.81	0.51	41.32	-12.68	54.00	151	131	Average
3	* 5356.170	41.50	0.50	41.99	-12.01	54.00	151	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

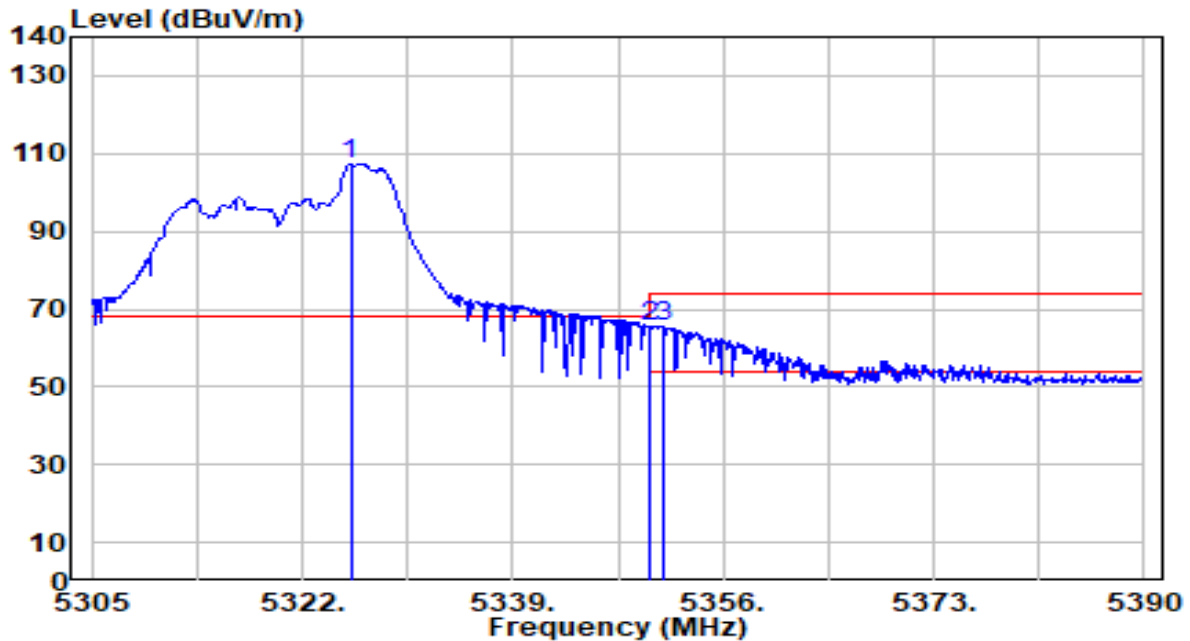


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.910	106.81	0.53	107.34	N/A	N/A	110	63	Peak
2	*	5350.000	64.81	0.51	65.32	-8.68	74.00	110	63	Peak
3		5351.155	64.77	0.50	65.28	-8.72	74.00	110	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

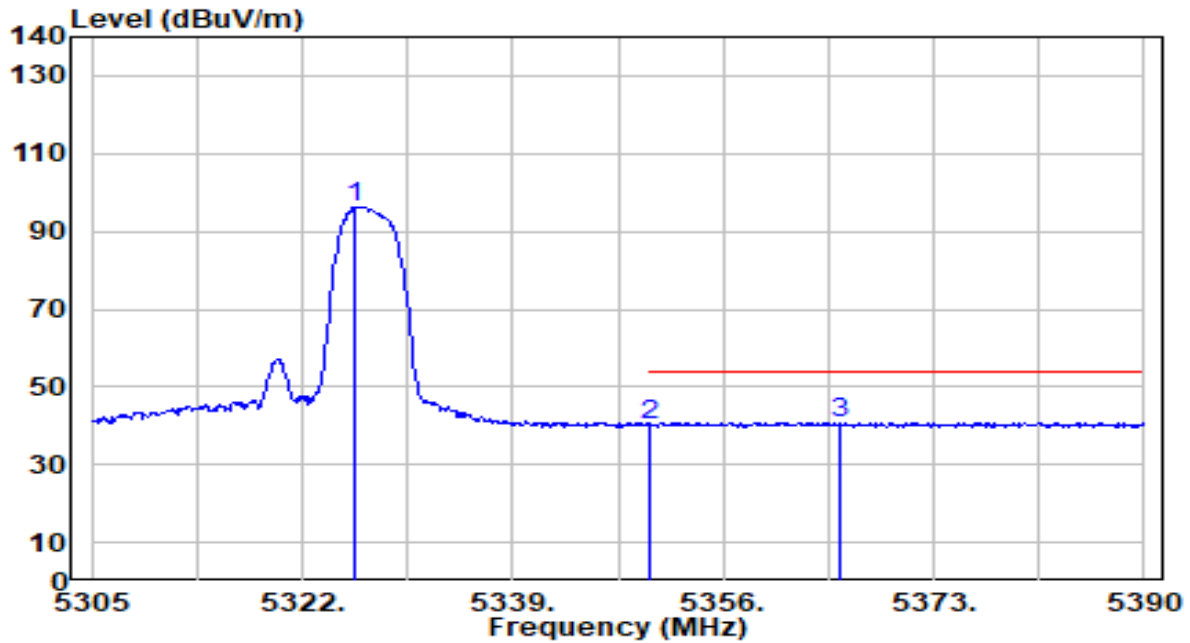


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.165	95.87	0.53	96.40	N/A	N/A	110	63	Average
2	5350.000	39.85	0.51	40.35	-13.65	54.00	110	63	Average
3	* 5365.435	40.44	0.49	40.92	-13.08	54.00	110	63	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

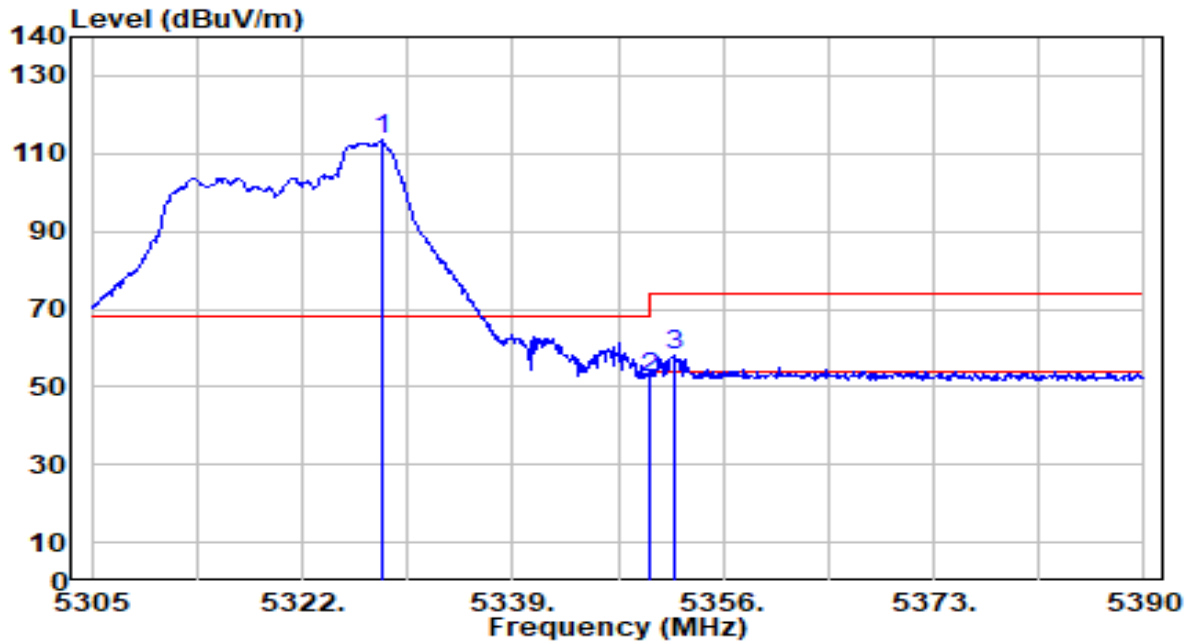


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.460	112.85	0.53	113.37	N/A	N/A	102	235	Peak
2	5350.000	51.84	0.51	52.35	-21.65	74.00	102	235	Peak
3	* 5352.175	57.40	0.50	57.90	-16.10	74.00	102	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

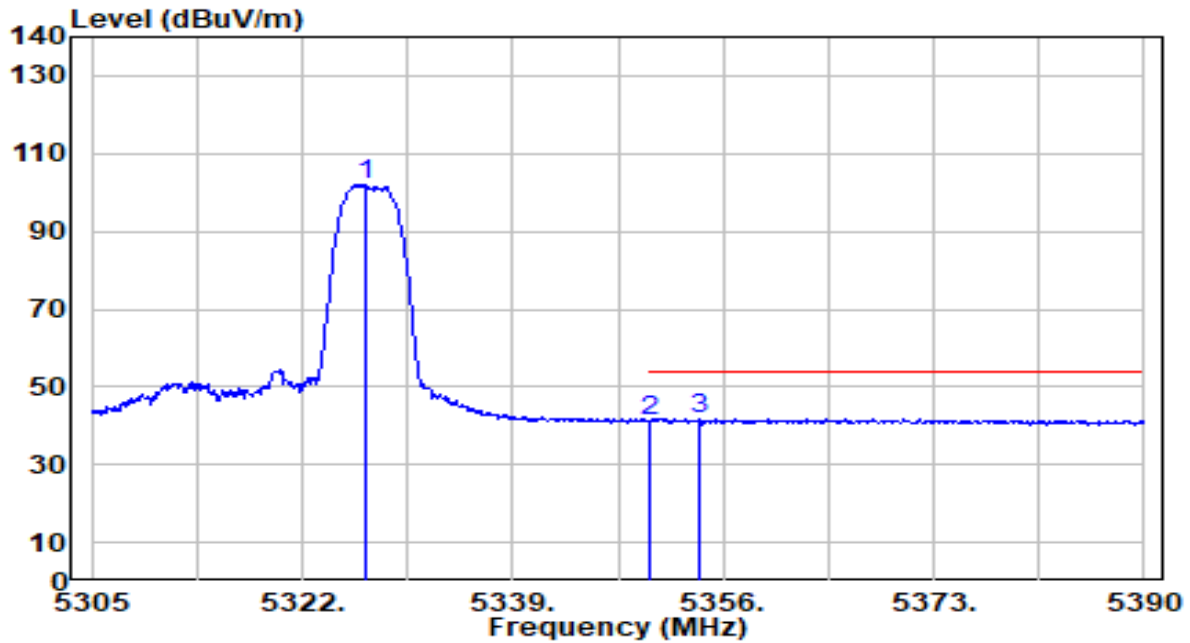


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.100	101.55	0.53	102.08	N/A	N/A	102	235	Average
2	5350.000	40.79	0.51	41.29	-12.71	54.00	102	235	Average
3	* 5354.130	41.30	0.50	41.80	-12.20	54.00	102	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

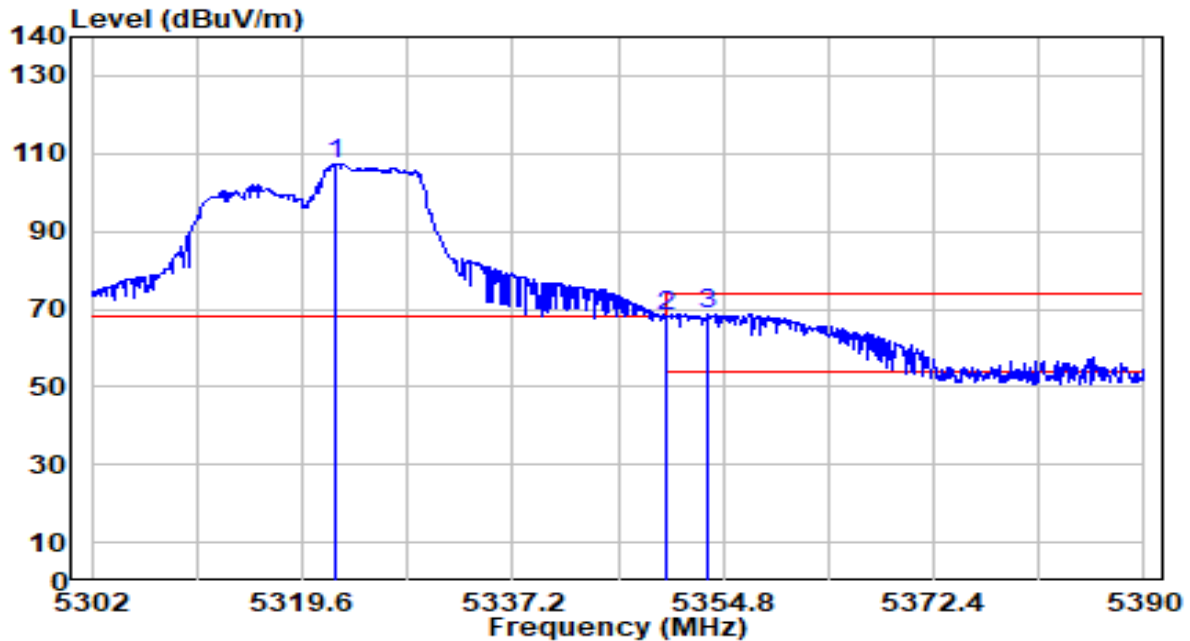


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.416	106.86	0.54	107.40	N/A	N/A	193	72	Peak
2	5350.000	67.61	0.51	68.12	-5.88	74.00	193	72	Peak
3	* 5353.392	68.14	0.50	68.64	-5.36	74.00	193	72	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

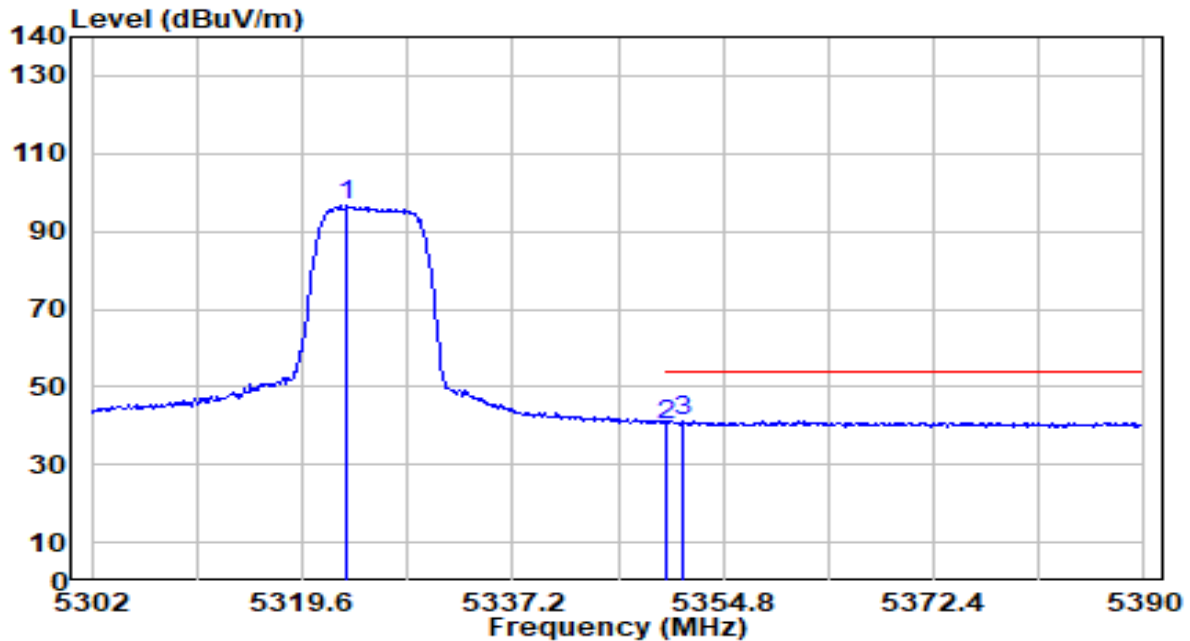


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.384	95.93	0.53	96.47	N/A	N/A	193	72	Average
2	5350.000	39.89	0.51	40.39	-13.61	54.00	193	72	Average
3	* 5351.456	40.71	0.50	41.22	-12.78	54.00	193	72	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

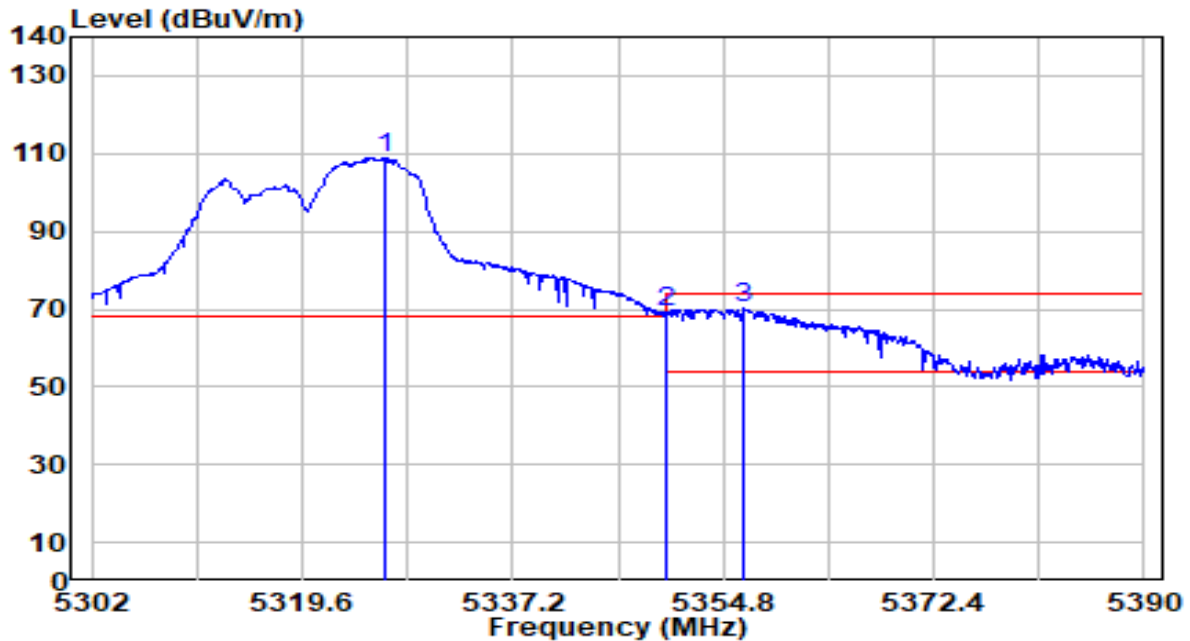


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.464	108.19	0.53	108.72	N/A	N/A	106	148	Peak
2	5350.000	68.67	0.51	69.17	-4.83	74.00	106	148	Peak
3	* 5356.560	69.64	0.50	70.14	-3.86	74.00	106	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

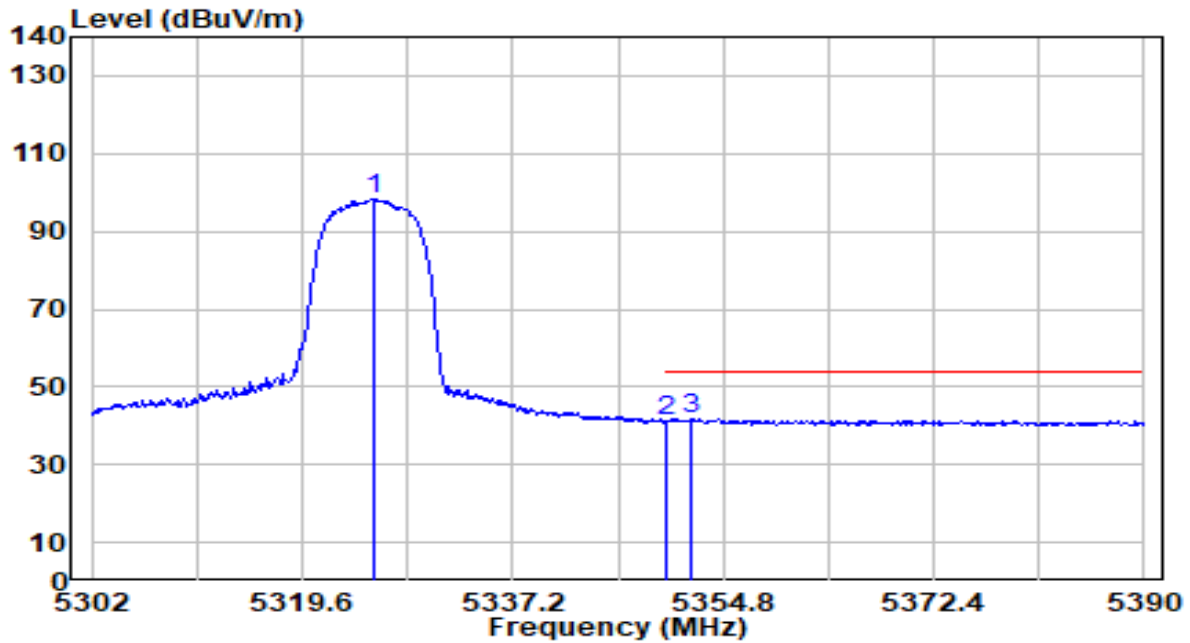


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.584	97.76	0.53	98.30	N/A	N/A	106	148	Average
2	5350.000	40.61	0.51	41.11	-12.89	54.00	106	148	Average
3	* 5352.160	41.12	0.50	41.63	-12.37	54.00	106	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

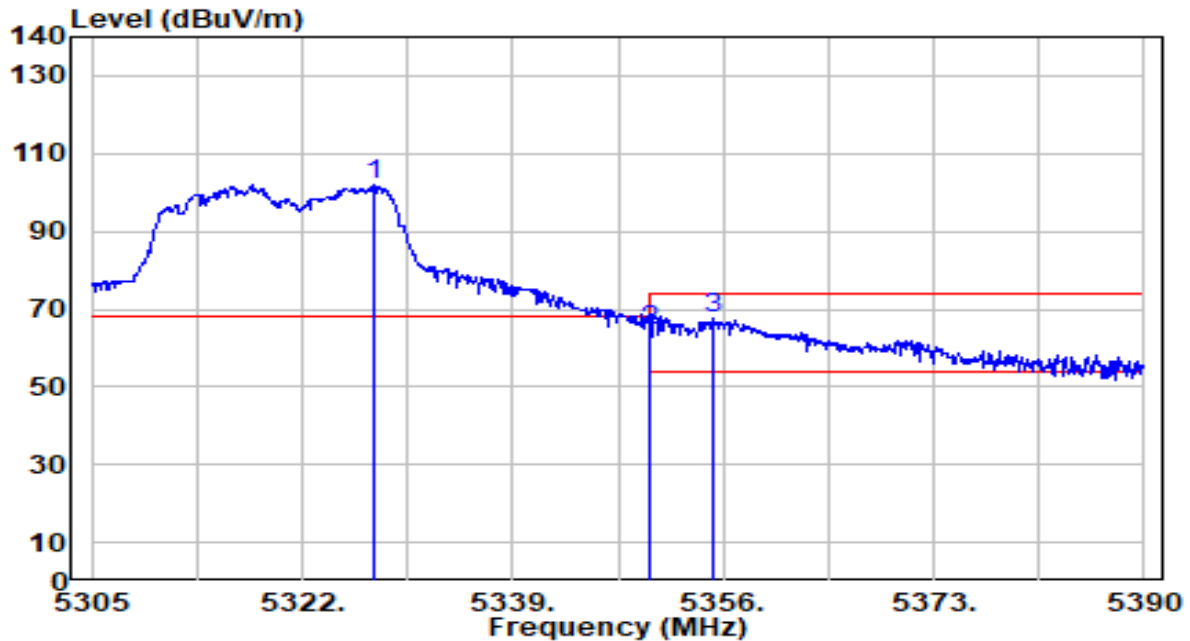


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.865	101.61	0.53	102.14	N/A	N/A	160	76	Peak
2	5350.000	64.21	0.51	64.71	-9.29	74.00	160	76	Peak
3	* 5355.150	67.16	0.50	67.66	-6.34	74.00	160	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

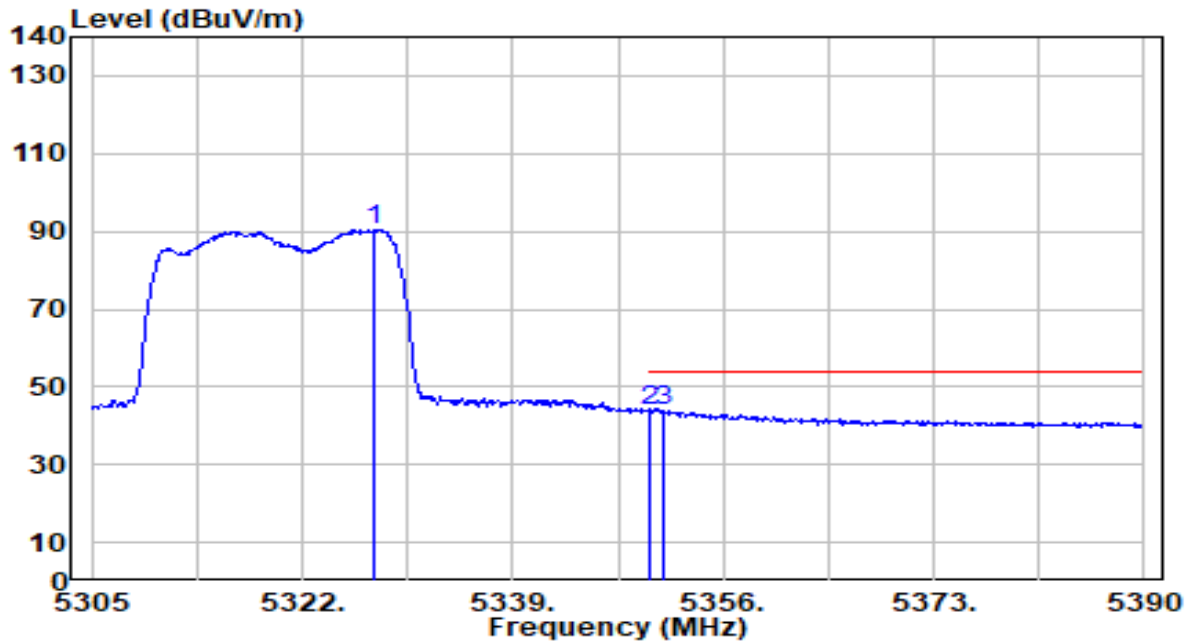


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.780	90.03	0.53	90.56	N/A	N/A	160	76	Average
2	5350.000	43.47	0.51	43.98	-10.02	54.00	160	76	Average
3	* 5351.155	43.49	0.50	43.99	-10.01	54.00	160	76	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

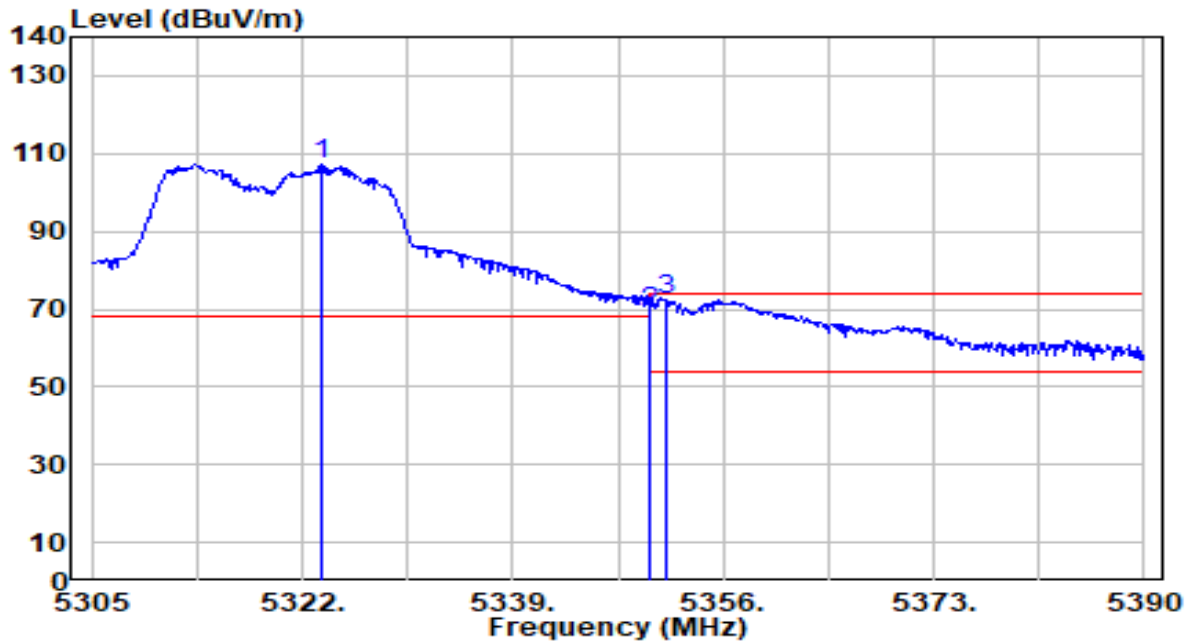


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.530	106.84	0.53	107.37	N/A	N/A	121	158	Peak
2	5350.000	68.83	0.51	69.34	-4.66	74.00	121	158	Peak
3	* 5351.325	71.93	0.50	72.43	-1.57	74.00	121	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

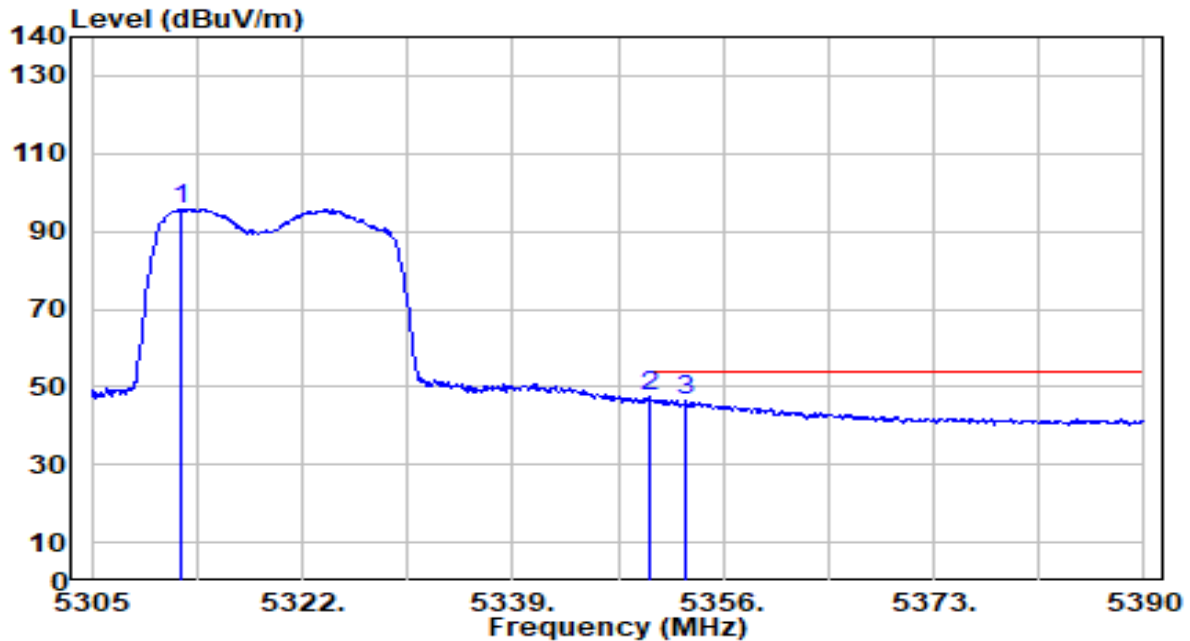


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5312.310	95.29	0.55	95.83	N/A	N/A	121	158	Average
2	*	5350.000	47.07	0.51	47.57	-6.43	54.00	121	158	Average
3		5353.025	46.19	0.50	46.69	-7.31	54.00	121	158	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH100 ANT 0+1	Test Voltage	By Notebook PC

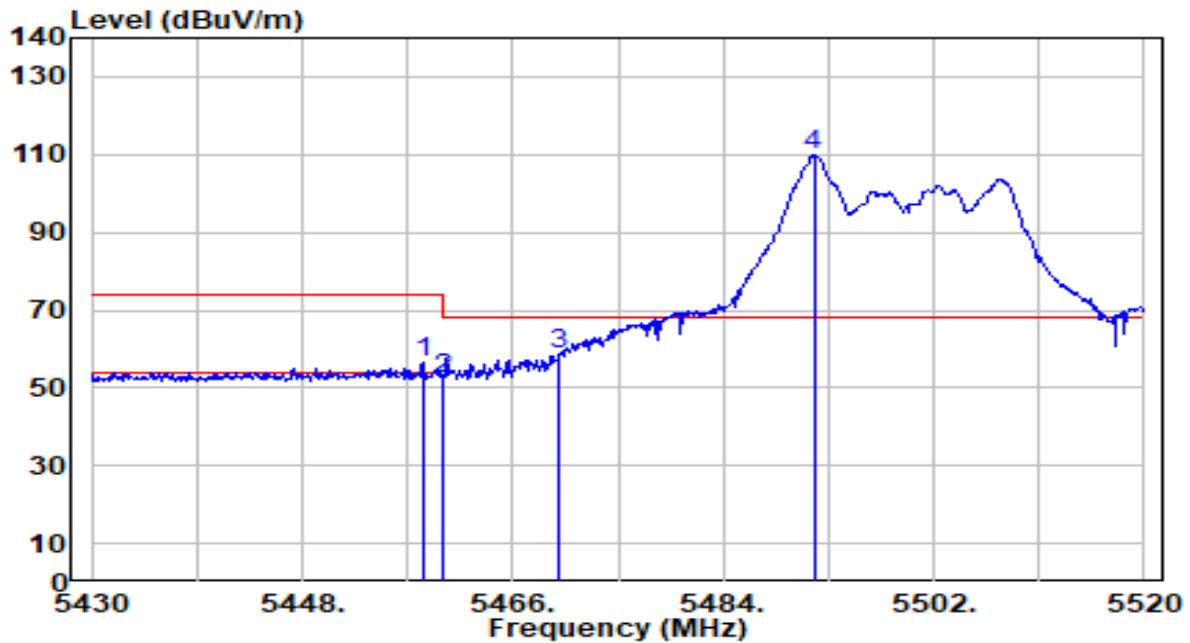


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.350	55.69	0.65	56.33	-17.67	74.00	275	318	Peak
2	5460.000	51.67	0.65	52.33	-21.67	74.00	275	318	Peak
3	* 5470.000	58.11	0.69	58.80	-9.40	68.20	275	318	Peak
4	5491.740	108.99	0.76	109.75	N/A	N/A	275	318	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH100 ANT 0+1	Test Voltage	By Notebook PC

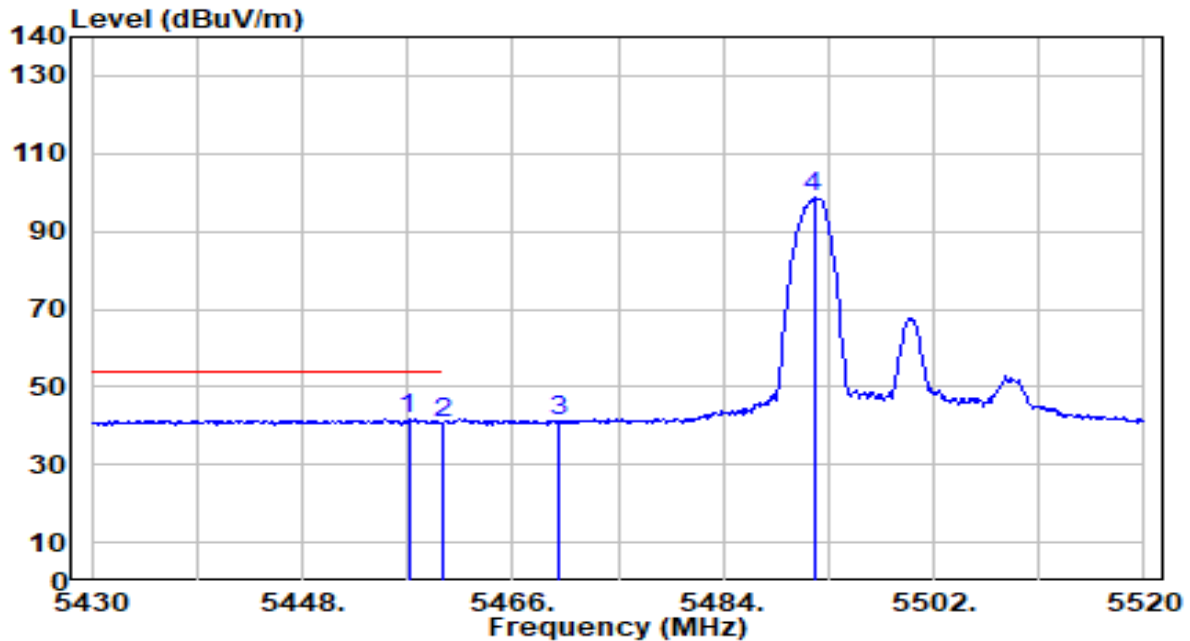


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.090	40.93	0.64	41.58	-12.42	54.00	275	318	Average
2		5460.000	40.17	0.65	40.83	-13.17	54.00	275	318	Average
3		5470.000	40.36	0.69	41.05	N/A	N/A	275	318	Average
4		5491.740	97.96	0.76	98.72	N/A	N/A	275	318	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH100 ANT 0+1	Test Voltage	By Notebook PC

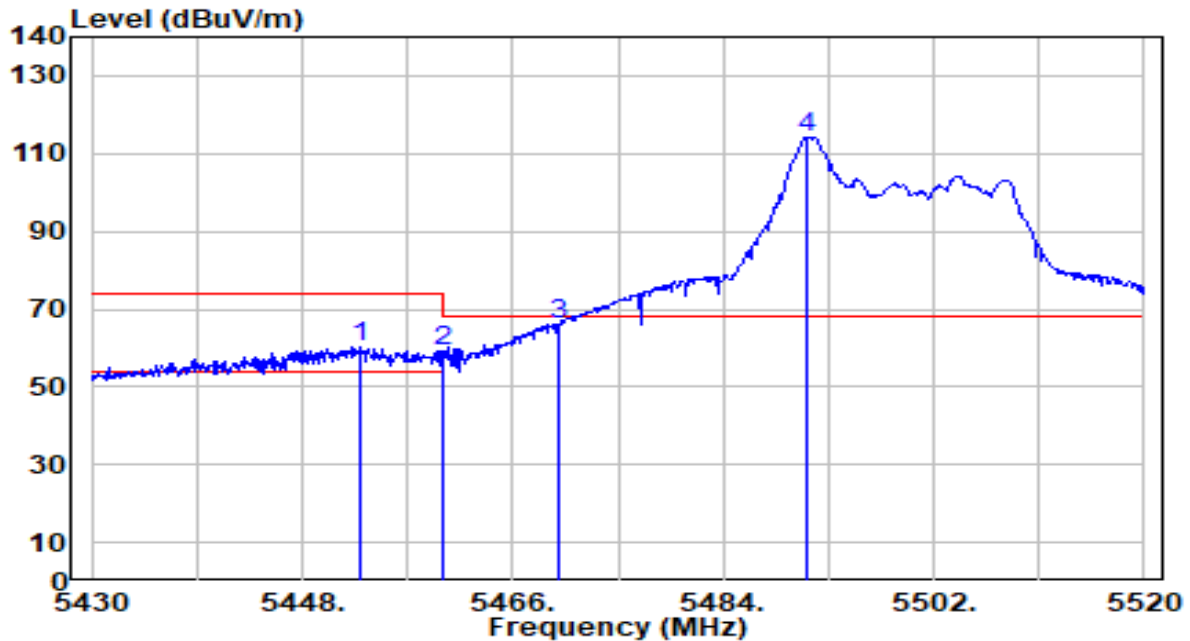


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.860	59.59	0.63	60.22	-13.78	74.00	175	132	Peak
2	5460.000	58.76	0.65	59.42	-14.58	74.00	175	132	Peak
3	* 5470.000	65.23	0.69	65.92	-2.28	68.20	175	132	Peak
4	5491.200	113.53	0.76	114.29	N/A	N/A	175	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH100 ANT 0+1	Test Voltage	By Notebook PC

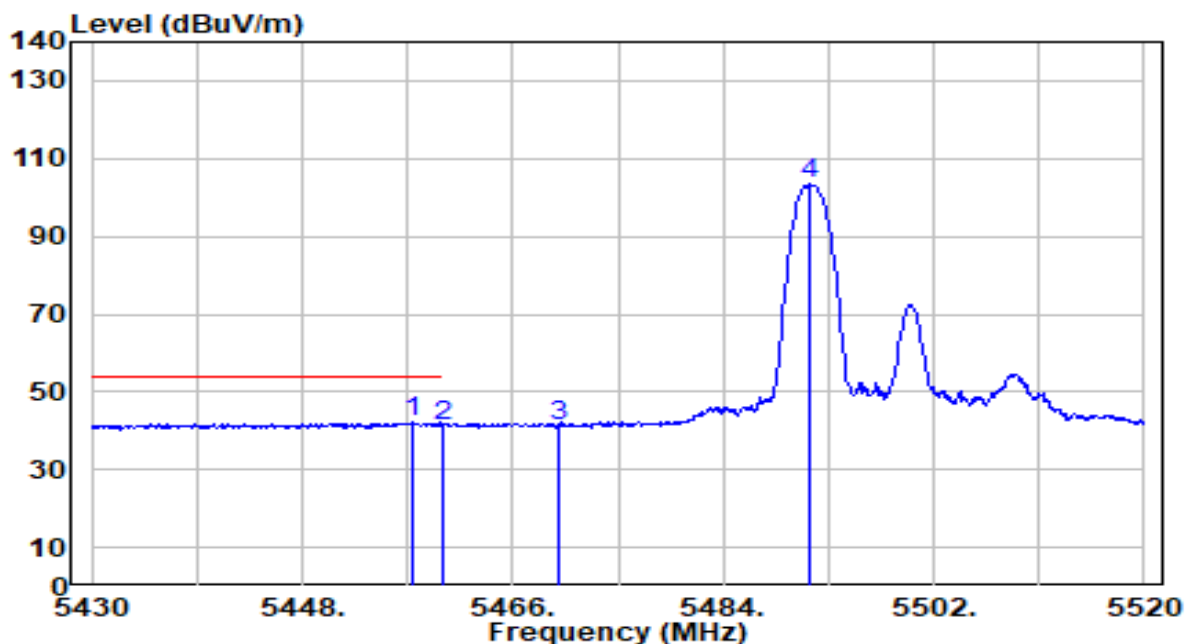


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.360	41.43	0.65	42.07	-11.93	54.00	175	132	Average
2		5460.000	40.78	0.65	41.43	-12.57	54.00	175	132	Average
3		5470.000	40.29	0.69	40.98	N/A	N/A	175	132	Average
4		5491.290	102.92	0.76	103.68	N/A	N/A	175	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band3_TX_CH140 ANT 0+1	Test Voltage	By Notebook PC

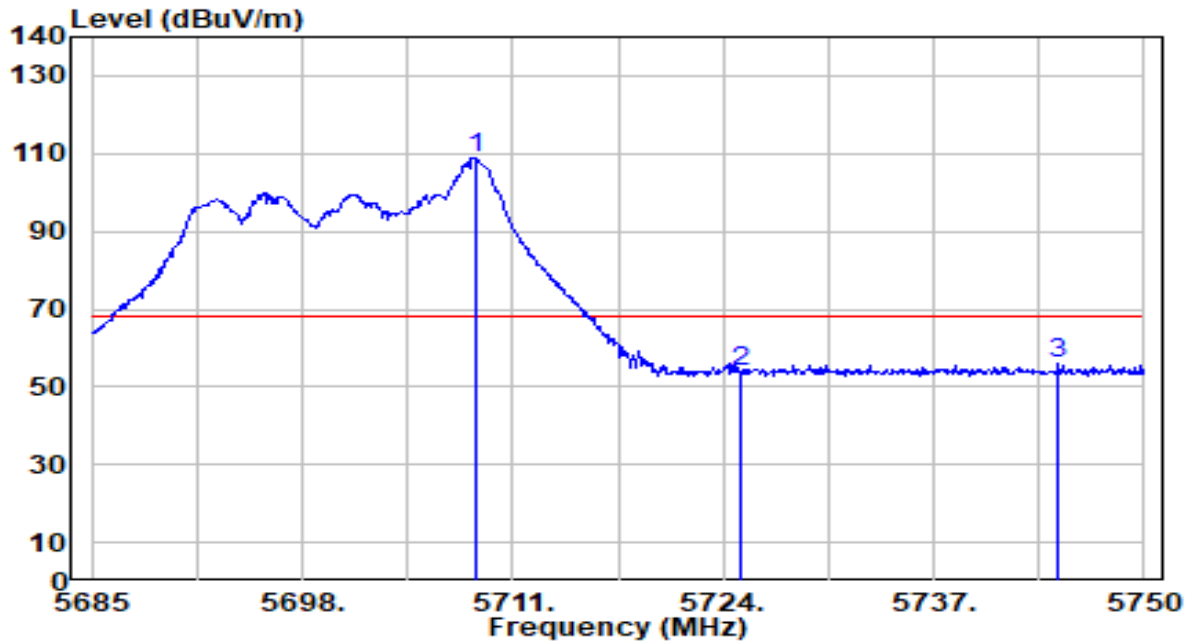


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.660	107.19	1.77	108.96	N/A	N/A	141	318	Peak
2	5725.000	52.10	1.86	53.97	-14.23	68.20	141	318	Peak
3	* 5744.735	54.21	1.98	56.19	-12.01	68.20	141	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band3_TX_CH140 ANT 0+1	Test Voltage	By Notebook PC

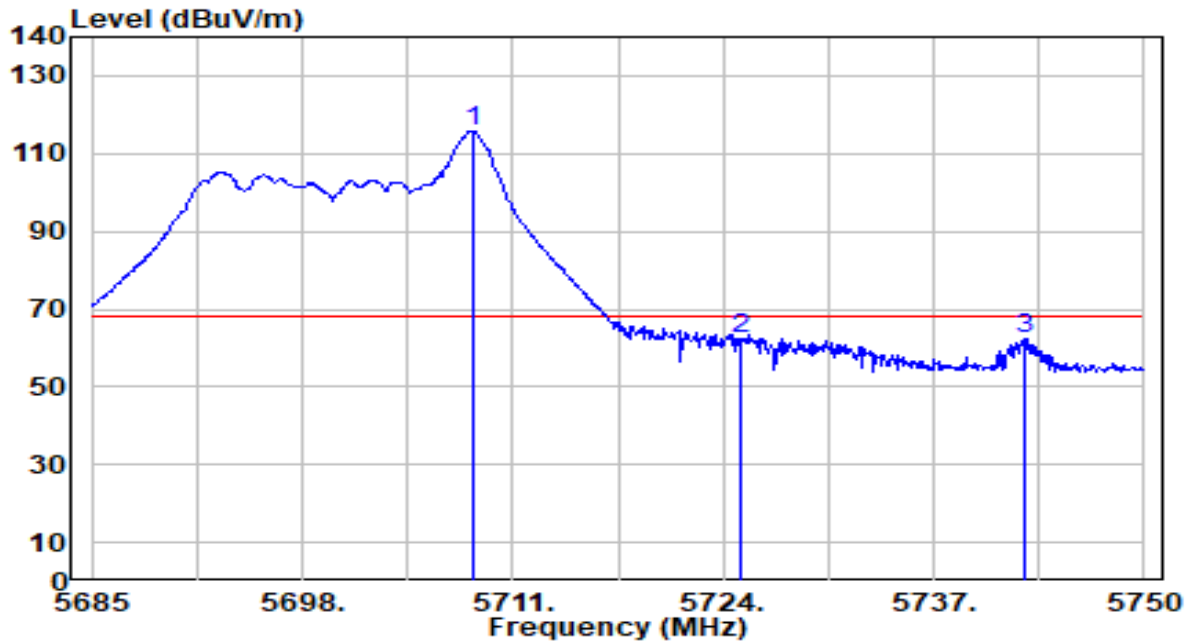


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.530	114.12	1.77	115.89	N/A	N/A	130	103	Peak
2	5725.000	60.42	1.86	62.28	-5.92	68.20	130	103	Peak
3	* 5742.655	60.47	1.96	62.43	-5.77	68.20	130	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C / 65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

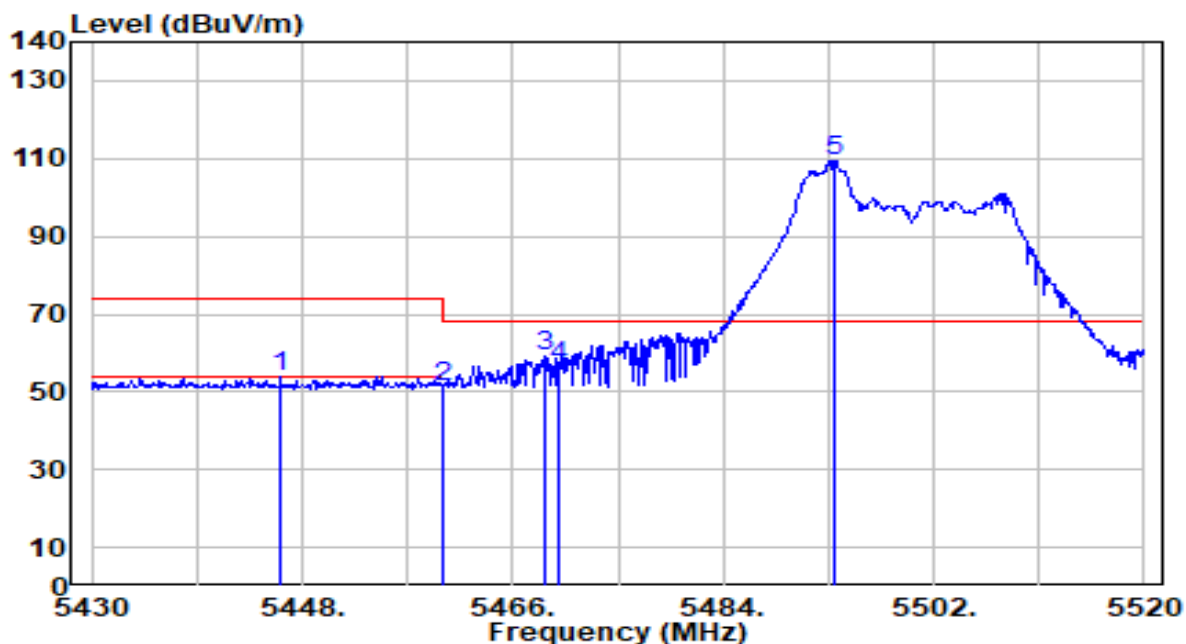


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.110	53.17	0.61	53.78	-20.22	74.00	175	71	Peak
2	5460.000	50.53	0.65	51.19	-22.81	74.00	175	71	Peak
3	* 5468.700	58.34	0.68	59.03	-9.17	68.20	175	71	Peak
4	5470.000	55.91	0.69	56.60	-11.60	68.20	175	71	Peak
5	5493.450	108.78	0.77	109.55	N/A	N/A	175	71	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

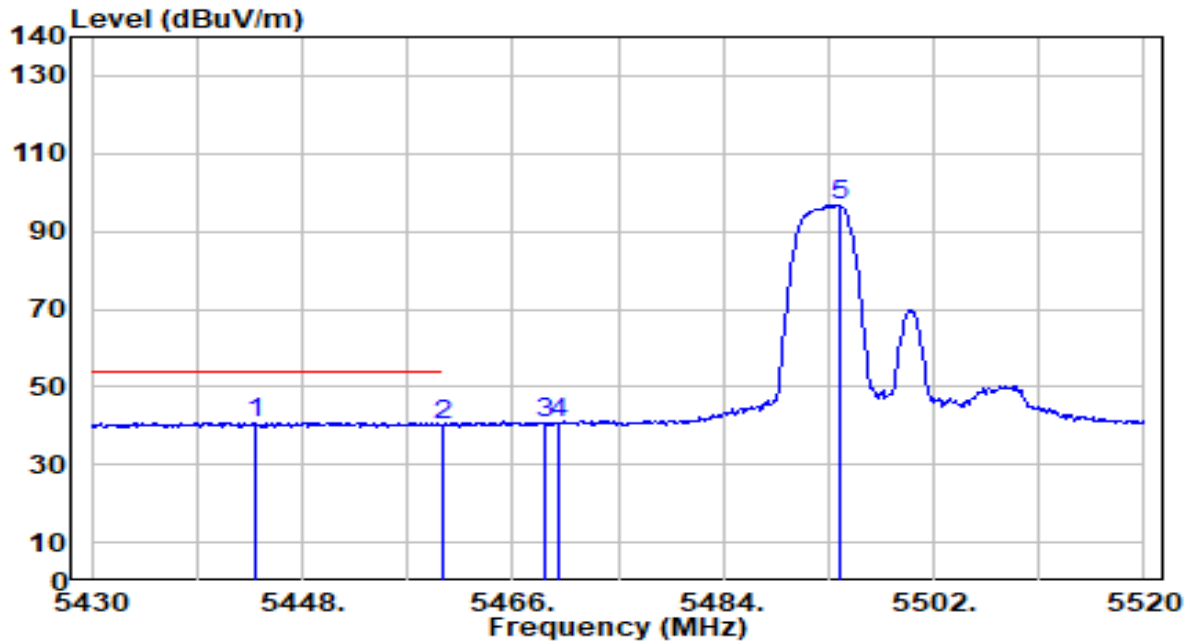


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.040	40.24	0.60	40.84	-13.16	54.00	175	71	Average
2		5460.000	39.57	0.65	40.22	-13.78	54.00	175	71	Average
3		5468.700	40.03	0.68	40.72	N/A	N/A	175	71	Average
4		5470.000	39.88	0.69	40.57	N/A	N/A	175	71	Average
5		5493.990	95.94	0.77	96.71	N/A	N/A	175	71	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

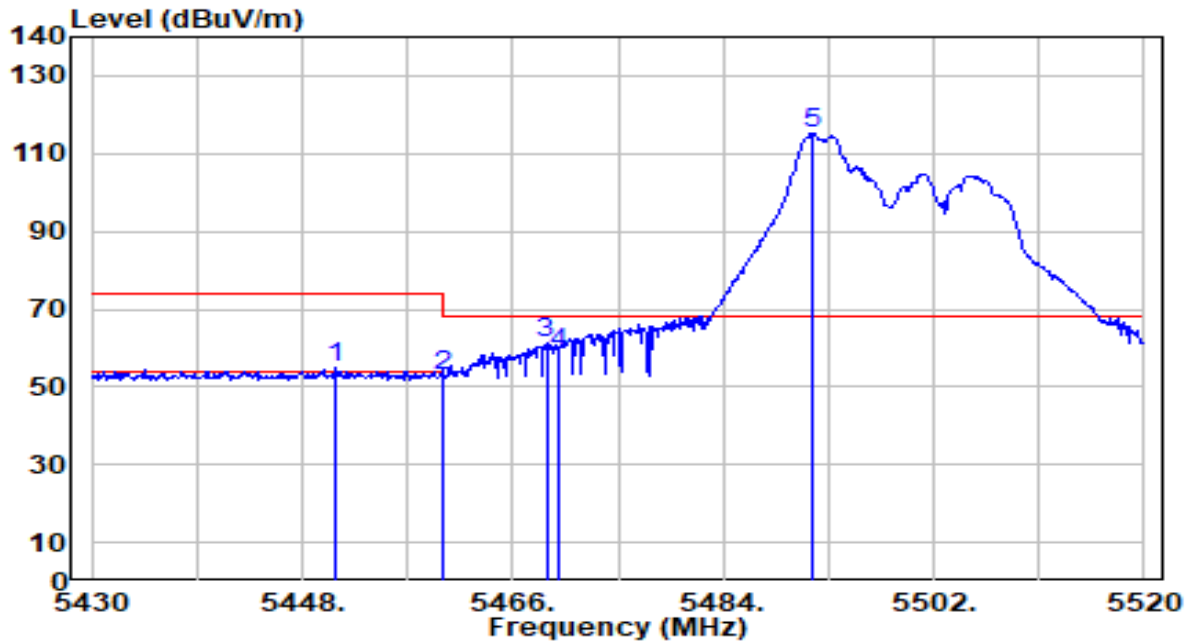


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.880	54.27	0.62	54.89	-19.11	74.00	105	205	Peak
2	5460.000	52.28	0.65	52.93	-21.07	74.00	105	205	Peak
3	* 5468.880	60.60	0.68	61.28	-6.92	68.20	105	205	Peak
4	5470.000	58.10	0.69	58.79	-9.41	68.20	105	205	Peak
5	5491.560	114.65	0.76	115.41	N/A	N/A	105	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

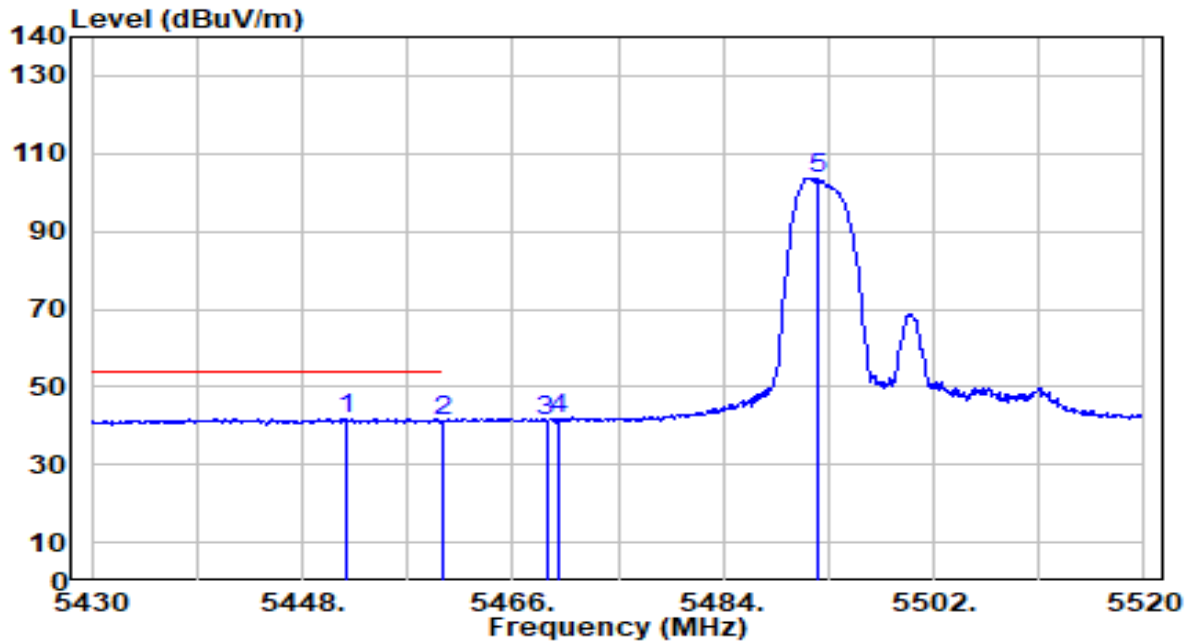


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.690	41.15	0.63	41.78	-12.22	54.00	105	205	Average
2		5460.000	40.68	0.65	41.34	-12.66	54.00	105	205	Average
3		5468.880	40.65	0.68	41.33	N/A	N/A	105	205	Average
4		5470.000	41.16	0.69	41.85	N/A	N/A	105	205	Average
5		5492.010	103.00	0.76	103.77	N/A	N/A	105	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

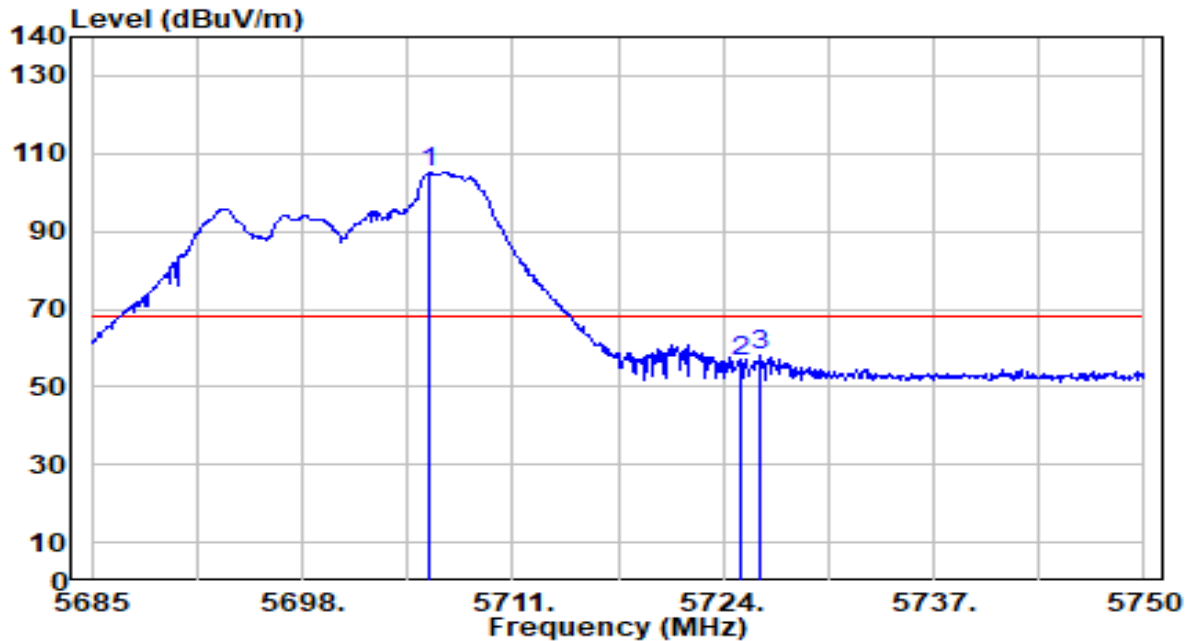


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.865	103.41	1.76	105.17	N/A	N/A	107	98	Peak
2	5725.000	54.48	1.86	56.35	-11.85	68.20	107	98	Peak
3	* 5726.340	56.15	1.87	58.02	-10.18	68.20	107	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

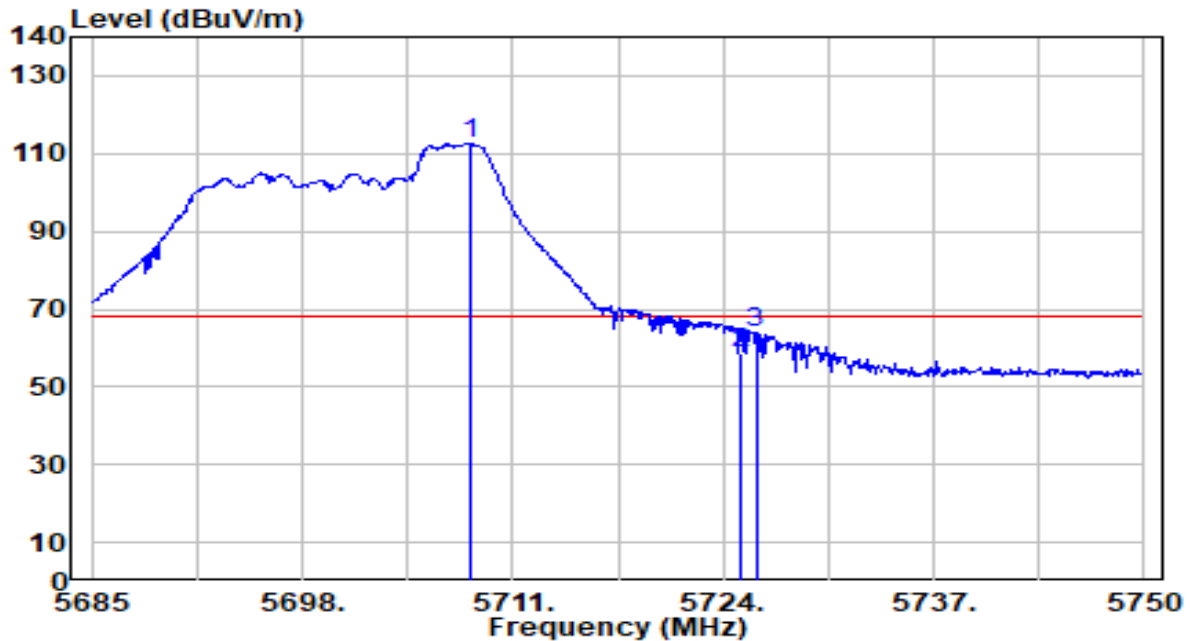


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.335	110.98	1.77	112.75	N/A	N/A	103	103	Peak
2	5725.000	57.00	1.86	58.86	-9.34	68.20	103	103	Peak
3	* 5726.015	62.06	1.87	63.93	-4.27	68.20	103	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

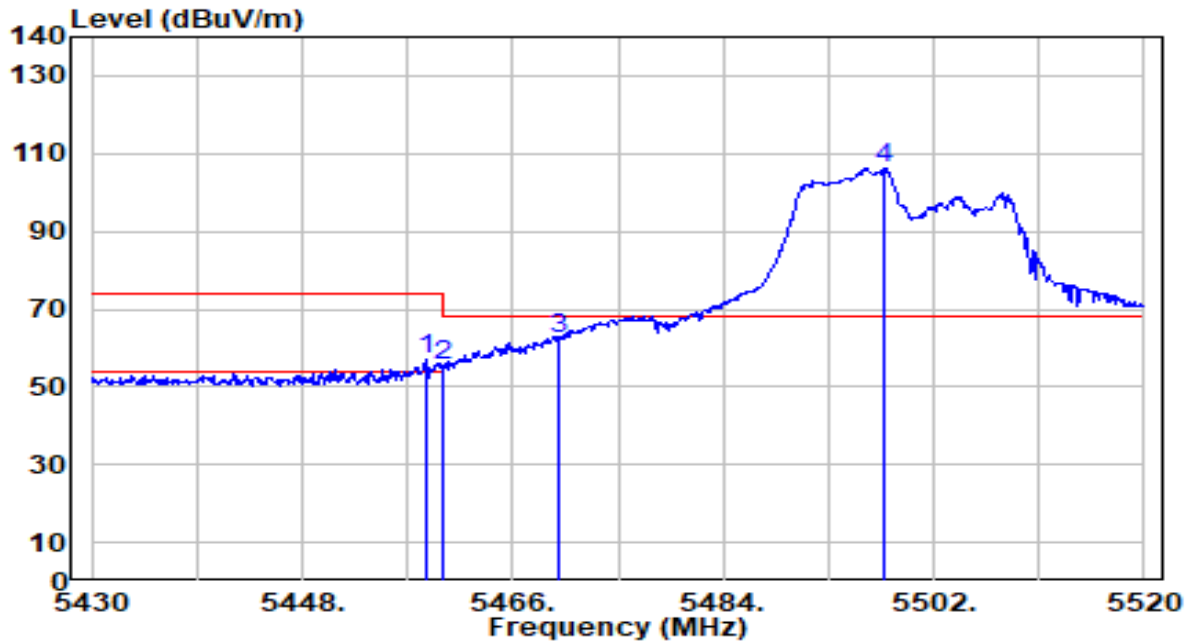


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.710	56.28	0.65	56.93	-17.07	74.00	155	94	Peak
2	5460.000	54.64	0.65	55.29	-18.71	74.00	155	94	Peak
3	* 5470.000	61.54	0.69	62.23	-5.97	68.20	155	94	Peak
4	5497.770	105.36	0.78	106.15	N/A	N/A	155	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

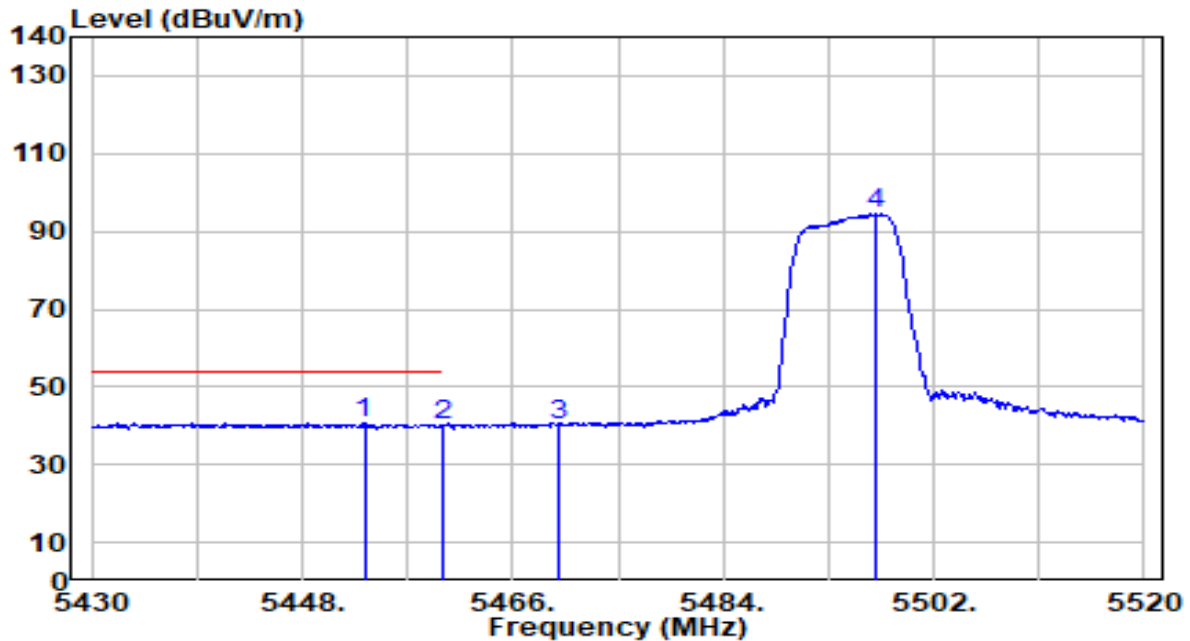


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.310	40.01	0.63	40.64	-13.36	54.00	155	94	Average
2		5460.000	39.29	0.65	39.95	-14.05	54.00	155	94	Average
3		5470.000	39.64	0.69	40.33	N/A	N/A	155	94	Average
4		5496.960	93.84	0.78	94.62	N/A	N/A	155	94	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

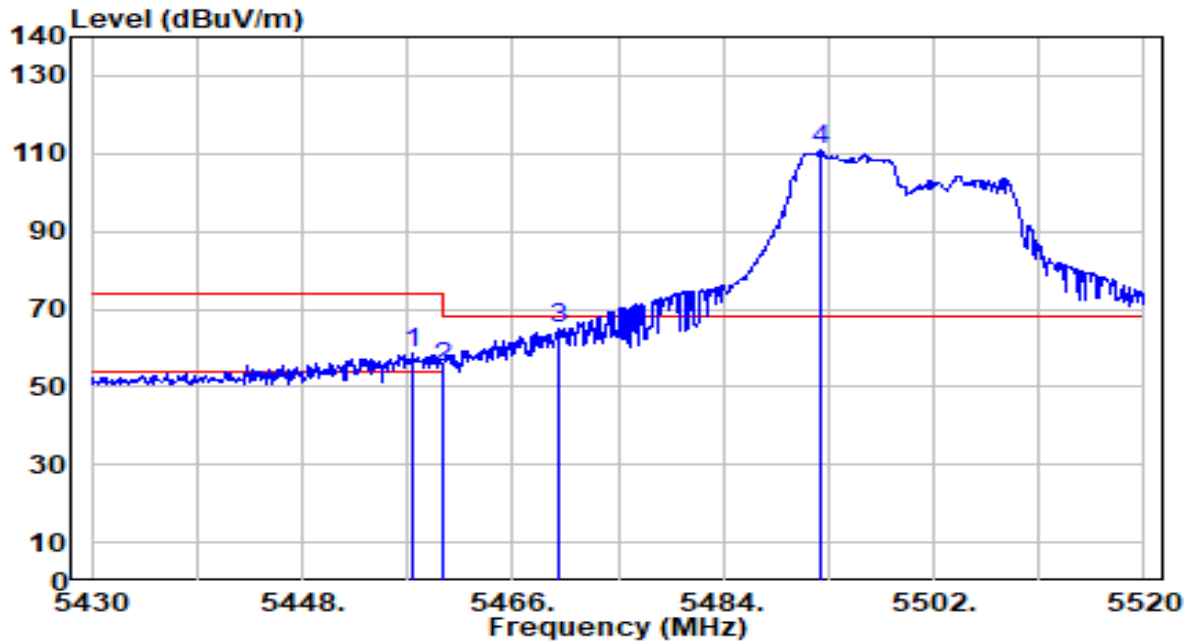


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.450	57.73	0.65	58.38	-15.62	74.00	194	116	Peak
2	5460.000	54.04	0.65	54.69	-19.31	74.00	194	116	Peak
3	* 5470.000	64.21	0.69	64.89	-3.31	68.20	194	116	Peak
4	5492.280	109.94	0.76	110.71	N/A	N/A	194	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

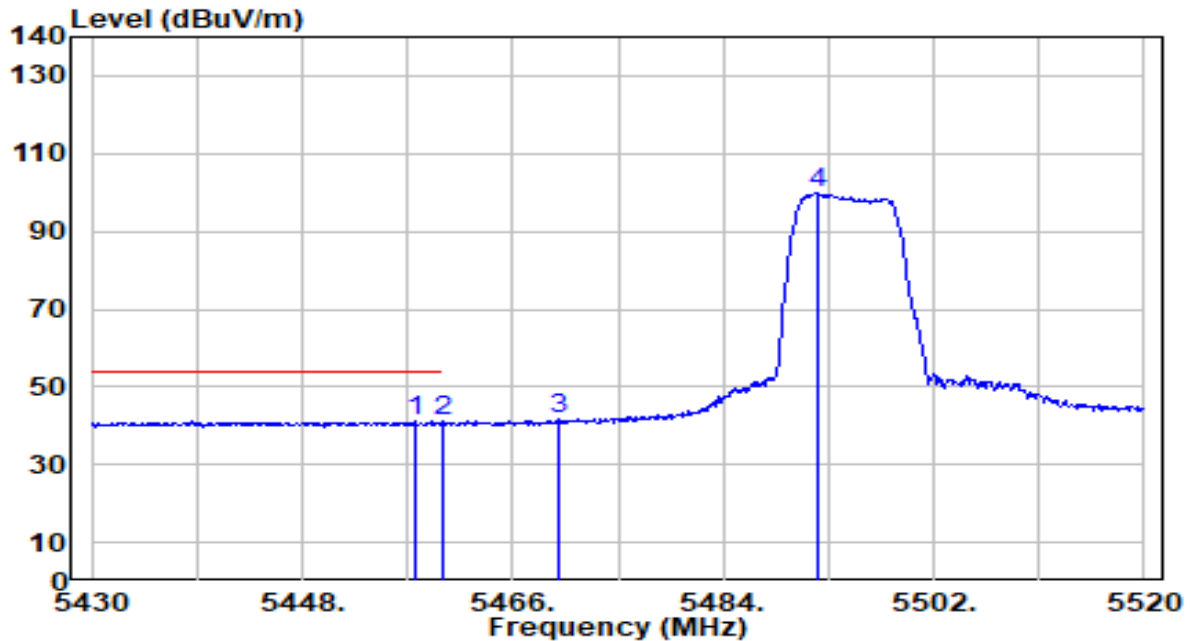


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.720	40.39	0.65	41.03	-12.97	54.00	194	116	Average
2		5460.000	40.30	0.65	40.96	-13.04	54.00	194	116	Average
3		5470.000	40.94	0.69	41.62	N/A	N/A	194	116	Average
4		5492.190	99.19	0.76	99.95	N/A	N/A	194	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

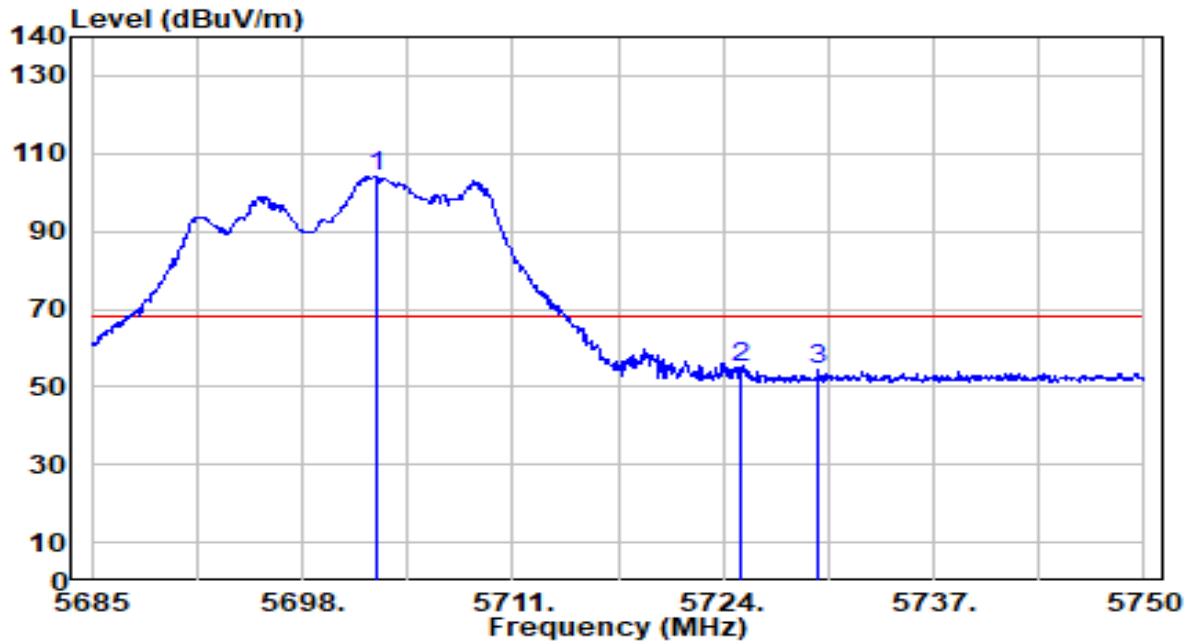


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5702.550	102.27	1.74	104.00	N/A	N/A	100	316	Peak
2	*	5725.000	52.83	1.86	54.70	-13.50	68.20	100	316	Peak
3		5729.915	52.69	1.89	54.58	-13.62	68.20	100	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

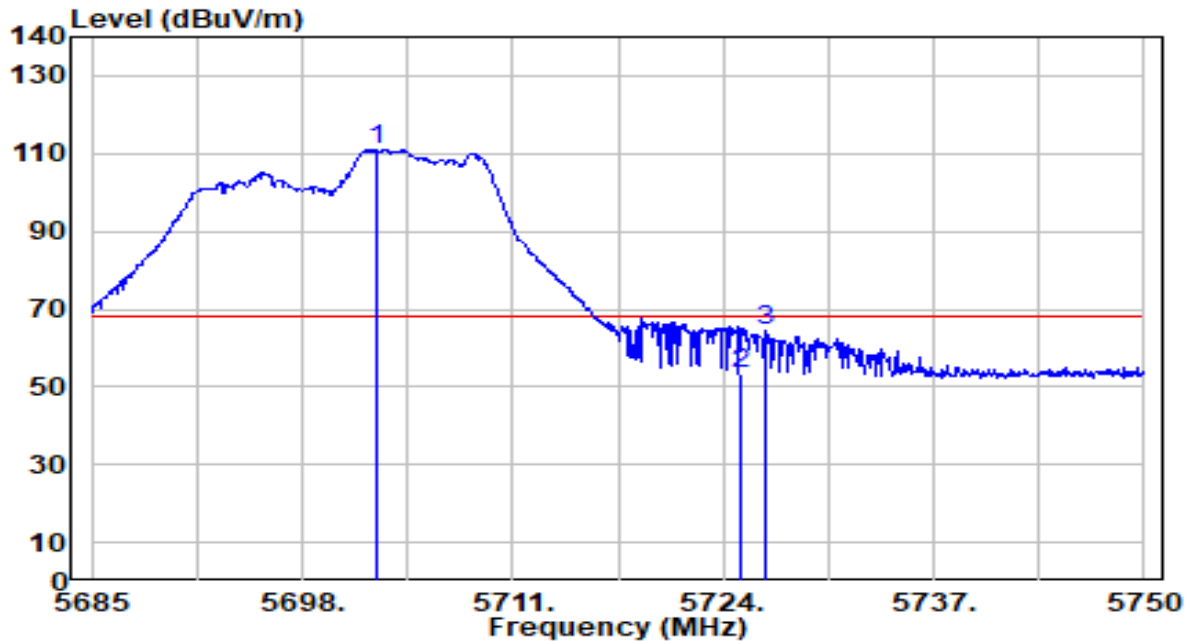


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.550	109.31	1.74	111.05	N/A	N/A	125	90	Peak
2	5725.000	51.65	1.86	53.51	-14.69	68.20	125	90	Peak
3	* 5726.535	62.67	1.87	64.54	-3.66	68.20	125	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

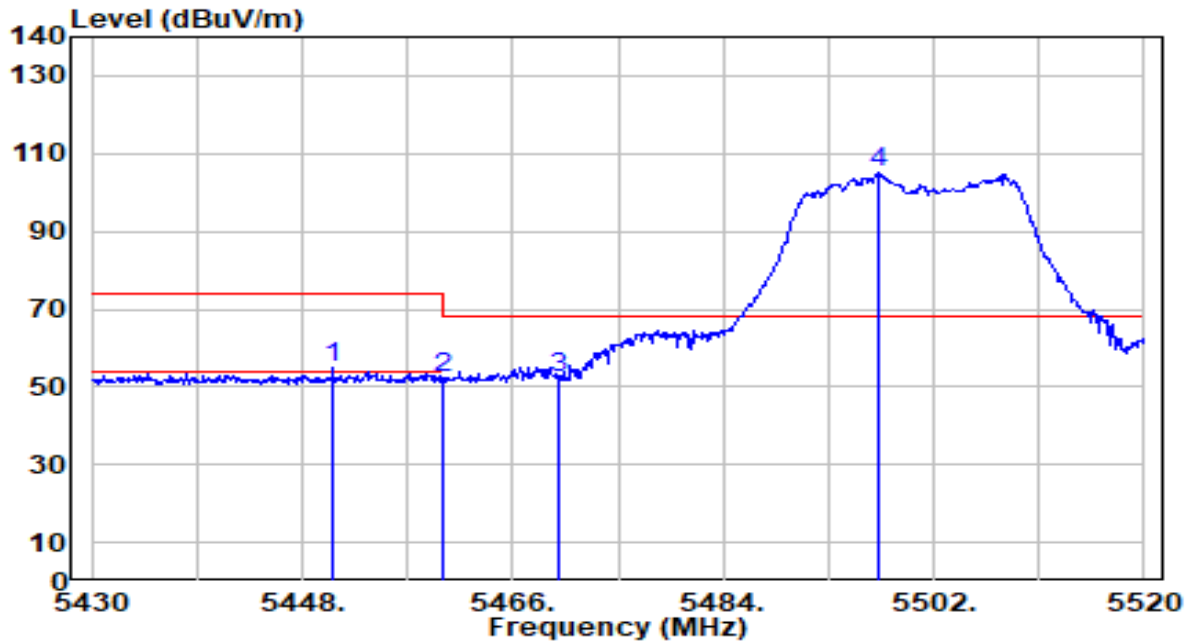


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.610	54.19	0.62	54.81	-19.19	74.00	103	232	Peak
2	5460.000	51.91	0.65	52.56	-21.44	74.00	103	232	Peak
3	* 5470.000	51.68	0.69	52.37	-15.83	68.20	103	232	Peak
4	5497.320	104.21	0.78	104.99	N/A	N/A	103	232	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

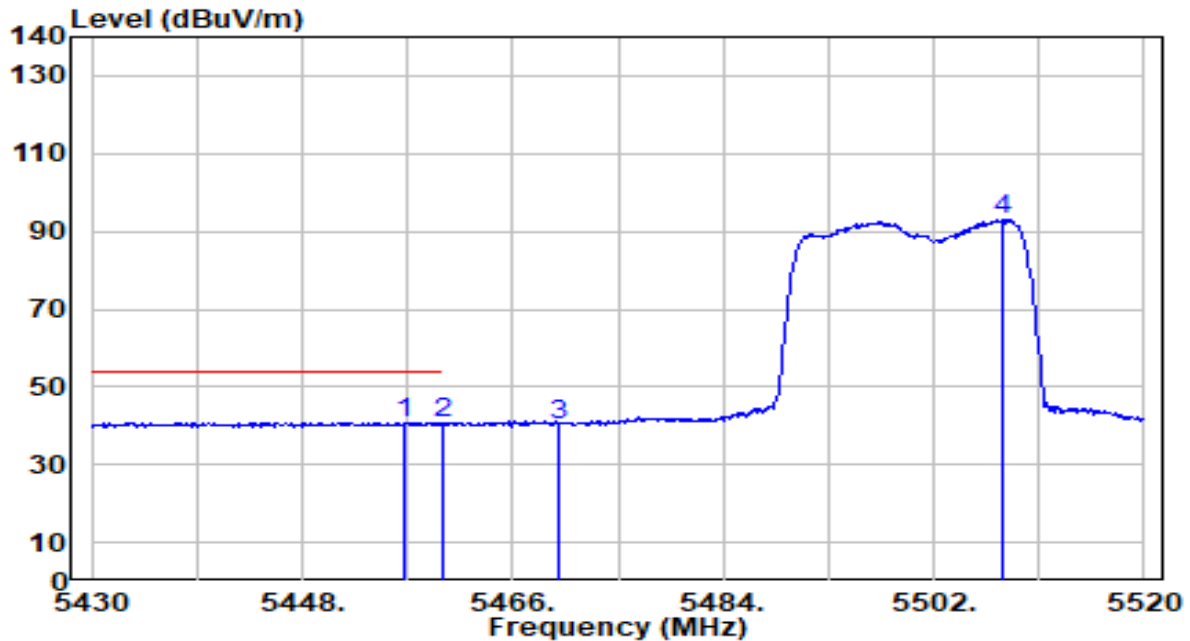


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.730	40.29	0.64	40.94	-13.06	54.00	103	232	Average
2		5460.000	39.85	0.65	40.50	-13.50	54.00	103	232	Average
3		5470.000	39.57	0.69	40.25	N/A	N/A	103	232	Average
4		5507.850	92.15	0.82	92.97	N/A	N/A	103	232	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

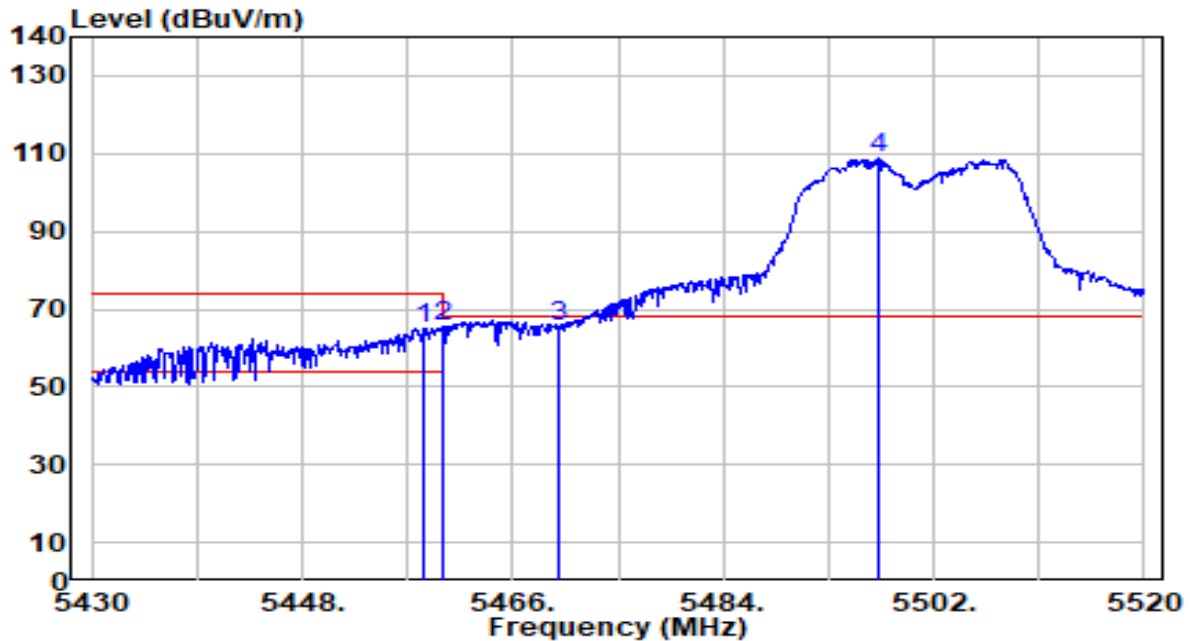


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.440	64.19	0.65	64.83	-9.17	74.00	110	144	Peak
2	5460.000	64.74	0.65	65.39	-8.61	74.00	110	144	Peak
3	* 5470.000	65.03	0.69	65.72	-2.48	68.20	110	144	Peak
4	5497.230	108.28	0.78	109.06	N/A	N/A	110	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

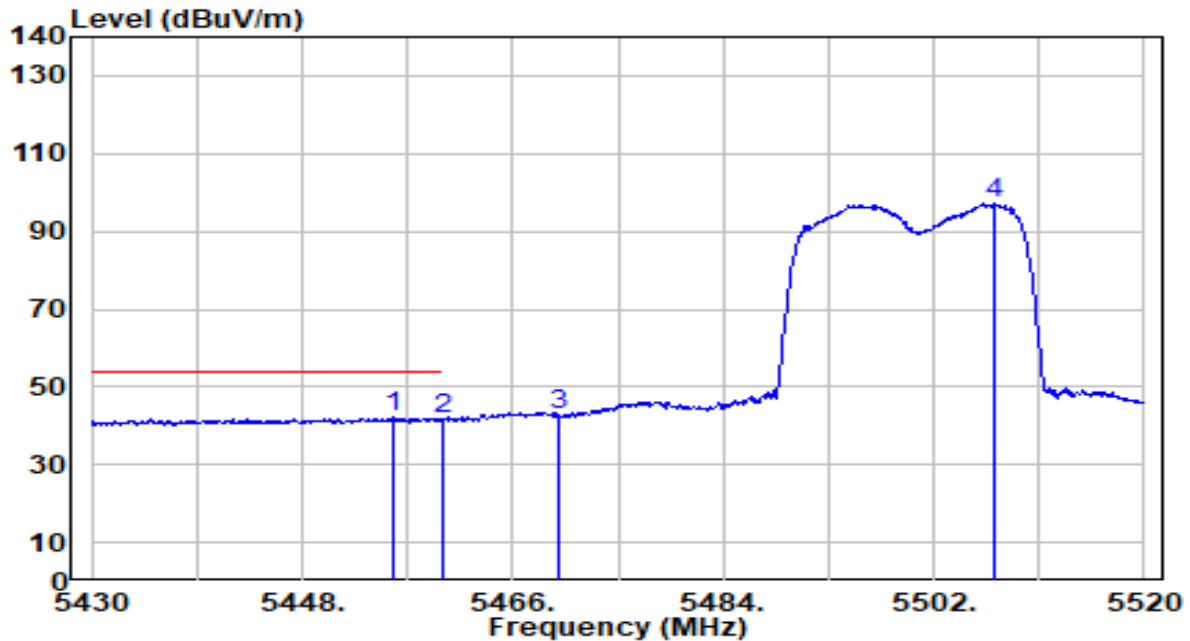


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.740	41.37	0.64	42.01	-11.99	54.00	110	144	Average
2		5460.000	41.02	0.65	41.67	-12.33	54.00	110	144	Average
3		5470.000	41.86	0.69	42.54	N/A	N/A	110	144	Average
4		5507.220	96.32	0.82	97.13	N/A	N/A	110	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

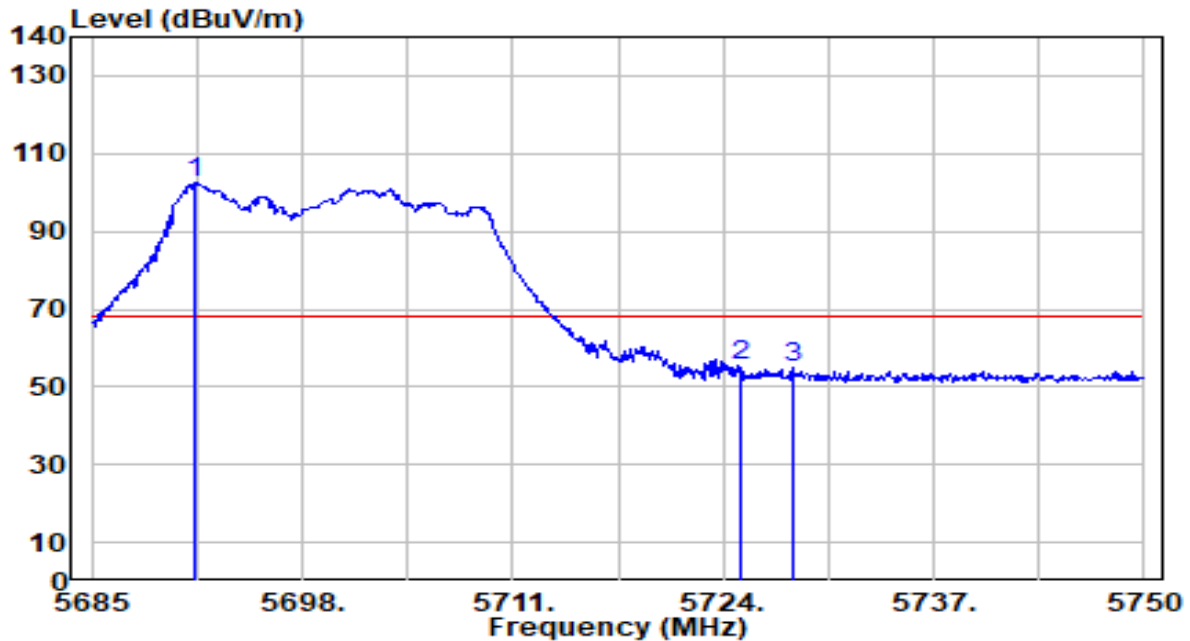


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5691.435	100.67	1.67	102.35	N/A	N/A	119	310	Peak
2	*	5725.000	53.73	1.86	55.60	-12.60	68.20	119	310	Peak
3		5728.355	53.16	1.88	55.04	-13.16	68.20	119	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

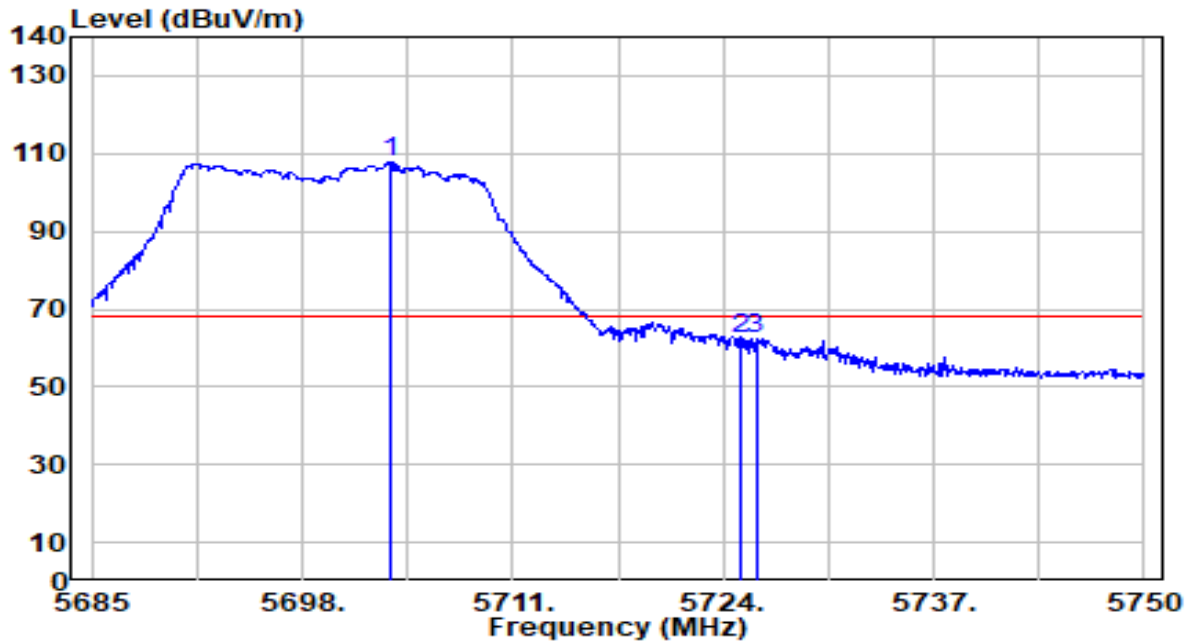


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5703.460	106.23	1.74	107.97	N/A	N/A	140	82	Peak
2	*	5725.000	60.65	1.86	62.52	-5.68	68.20	140	82	Peak
3		5726.015	60.65	1.87	62.52	-5.68	68.20	140	82	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH149 ANT 0+1	Test Voltage	By Notebook PC

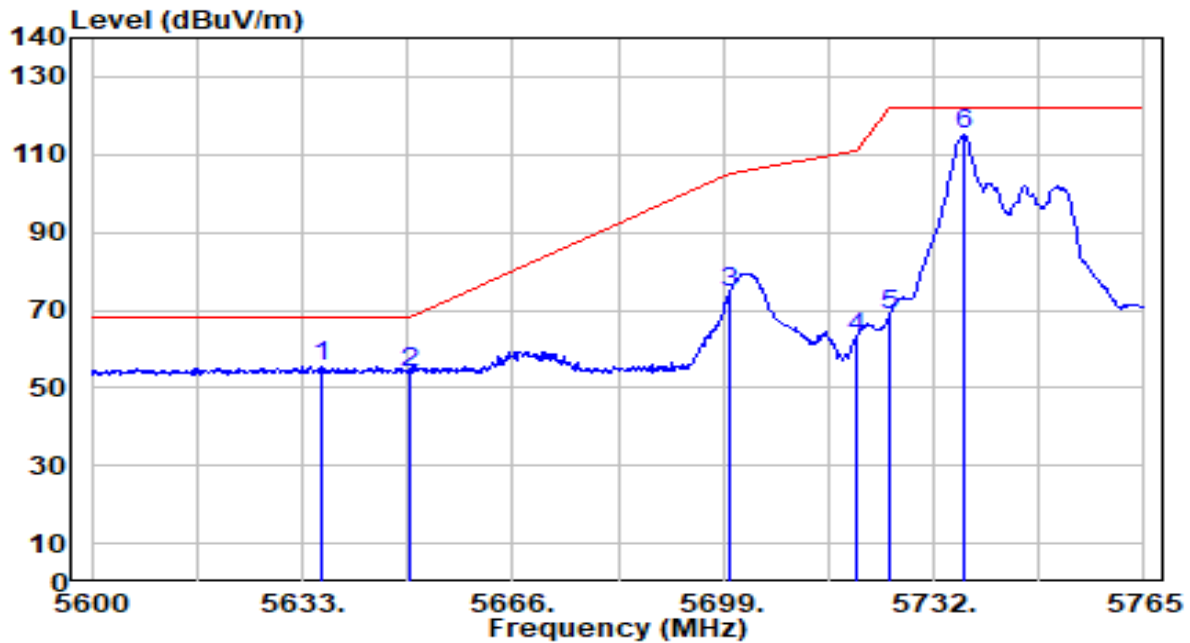


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.135	53.93	1.36	55.29	-12.91	68.20	132	320	Peak
2		5650.000	52.67	1.44	54.11	-14.09	68.20	132	320	Peak
3		5700.000	72.84	1.72	74.56	-30.64	105.20	132	320	Peak
4		5720.000	61.15	1.84	62.98	-47.82	110.80	132	320	Peak
5		5725.000	66.74	1.86	68.61	-53.59	122.20	132	320	Peak
6		5736.785	113.28	1.93	115.21	N/A	N/A	132	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH149 ANT 0+1	Test Voltage	By Notebook PC

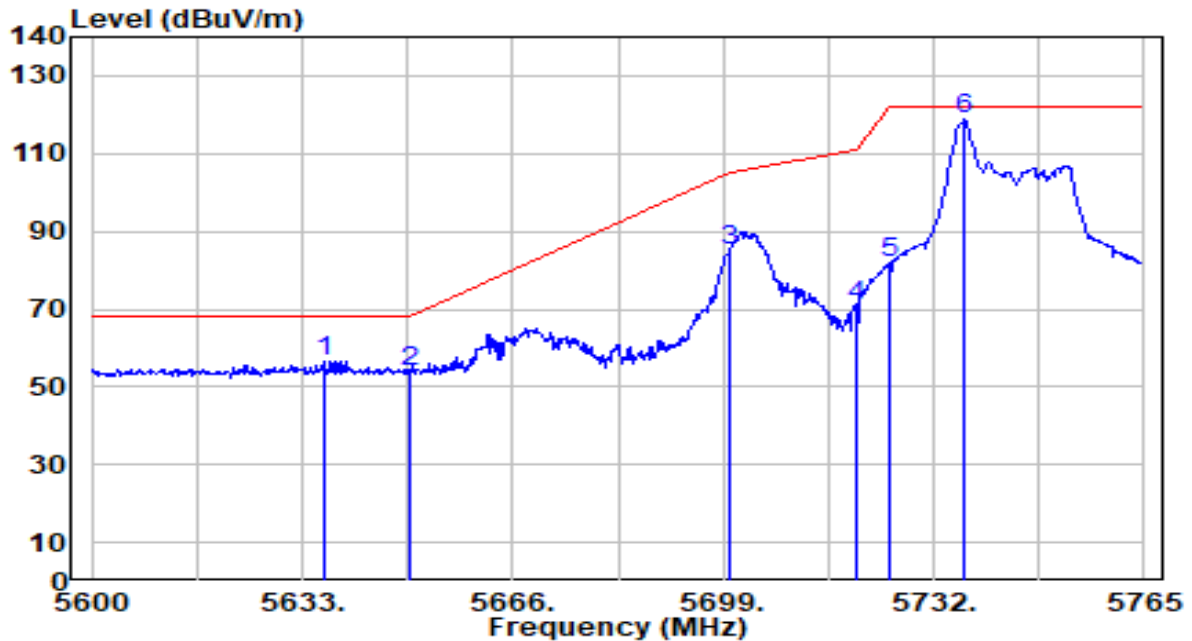


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.300	55.31	1.36	56.67	-11.53	68.20	100	92	Peak
2		5650.000	52.46	1.44	53.90	-14.30	68.20	100	92	Peak
3		5700.000	83.51	1.72	85.23	-19.97	105.20	100	92	Peak
4		5720.000	69.17	1.84	71.01	-39.79	110.80	100	92	Peak
5		5725.000	80.09	1.86	81.95	-40.25	122.20	100	92	Peak
6		5736.785	116.77	1.93	118.70	N/A	N/A	100	92	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH165 ANT 0+1	Test Voltage	By Notebook PC

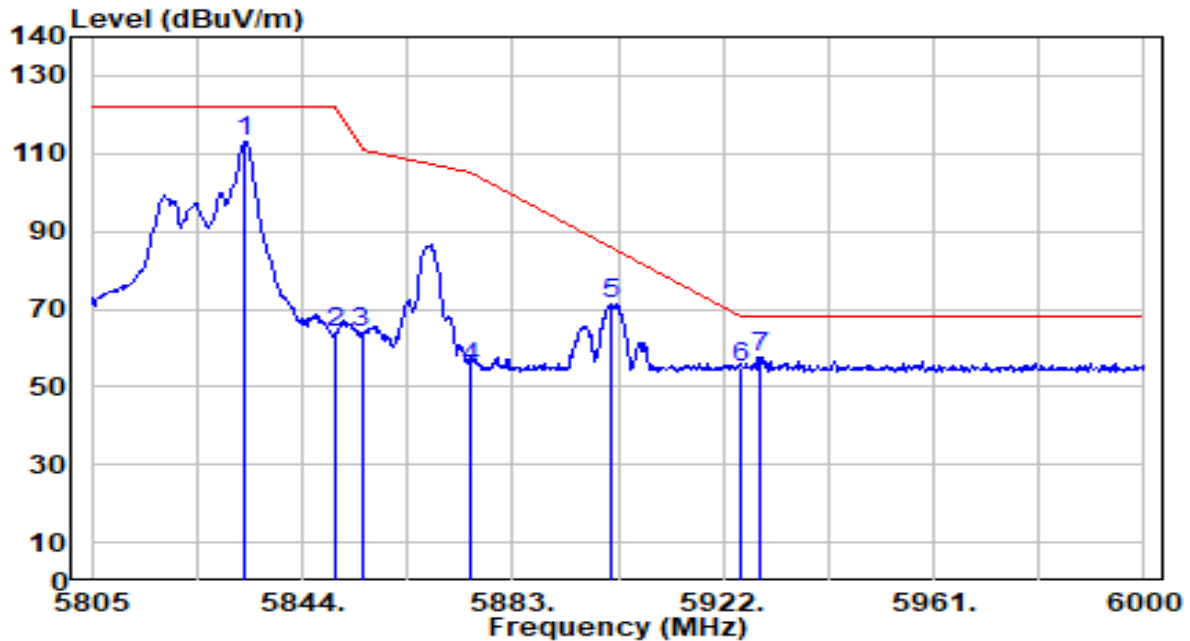


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.470	111.00	2.28	113.27	N/A	N/A	100	243	Peak
2	5850.000	61.69	2.27	63.96	-58.24	122.20	100	243	Peak
3	5855.000	61.41	2.27	63.68	-47.12	110.80	100	243	Peak
4	5875.000	52.82	2.26	55.08	-50.12	105.20	100	243	Peak
5	5901.135	69.20	2.25	71.45	-14.41	85.86	100	243	Peak
6	5925.000	52.44	2.25	54.68	-13.52	68.20	100	243	Peak
7	* 5928.630	55.36	2.24	57.60	-10.60	68.20	100	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH165 ANT 0+1	Test Voltage	By Notebook PC

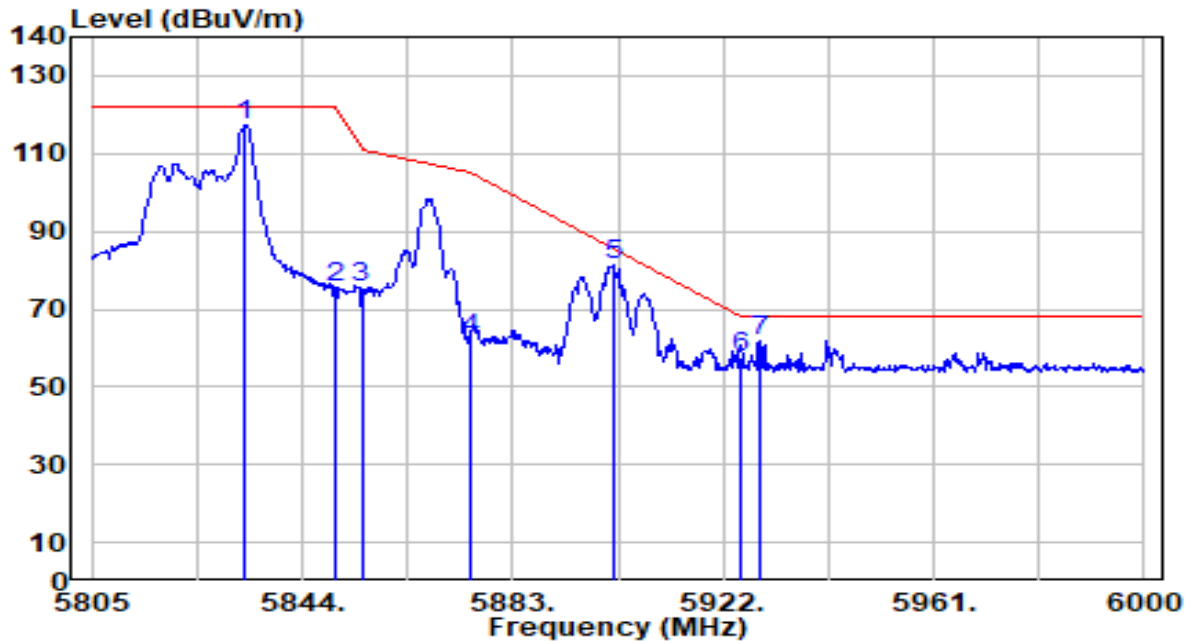


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.470	115.13	2.28	117.40	N/A	N/A	128	94	Peak
2	5850.000	73.24	2.27	75.51	-46.69	122.20	128	94	Peak
3	5855.000	73.32	2.27	75.59	-35.21	110.80	128	94	Peak
4	5875.000	60.34	2.26	62.60	-42.60	105.20	128	94	Peak
5	* 5901.525	79.12	2.25	81.37	-4.20	85.57	128	94	Peak
6	5925.000	55.37	2.25	57.62	-10.58	68.20	128	94	Peak
7	5928.630	59.51	2.24	61.76	-6.44	68.20	128	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

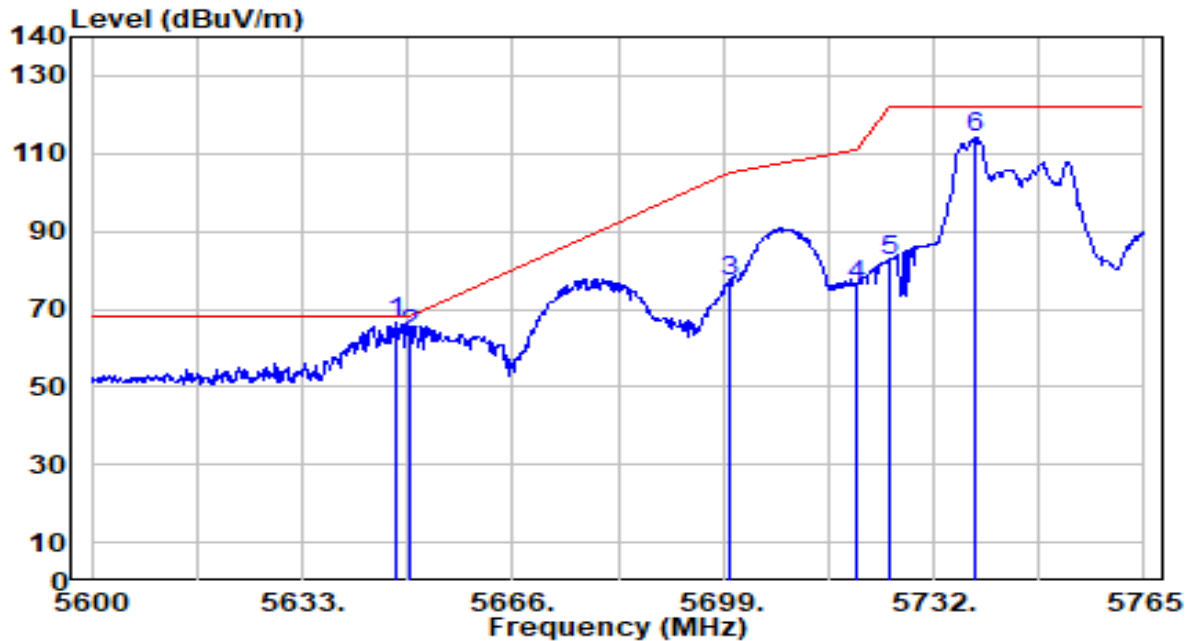


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.685	65.11	1.43	66.53	-1.67	68.20	172	138	Peak
2		5650.000	61.70	1.44	63.14	-5.06	68.20	172	138	Peak
3		5700.000	75.29	1.72	77.01	-28.19	105.20	172	138	Peak
4		5720.000	74.49	1.84	76.33	-34.47	110.80	172	138	Peak
5		5725.000	80.79	1.86	82.65	-39.55	122.20	172	138	Peak
6		5738.600	112.29	1.94	114.23	N/A	N/A	172	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

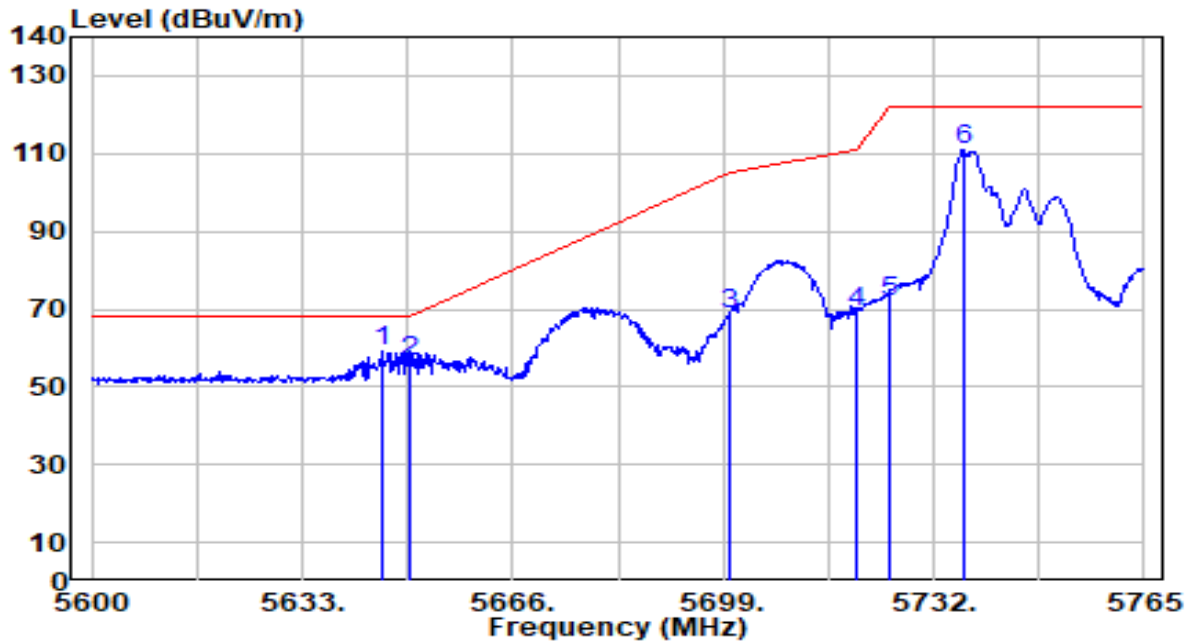


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.375	57.75	1.41	59.17	-9.03	68.20	152	54	Peak
2		5650.000	55.18	1.44	56.61	-11.59	68.20	152	54	Peak
3		5700.000	67.04	1.72	68.76	-36.44	105.20	152	54	Peak
4		5720.000	67.25	1.84	69.09	-41.71	110.80	152	54	Peak
5		5725.000	69.86	1.86	71.72	-50.48	122.20	152	54	Peak
6		5736.620	109.18	1.93	111.11	N/A	N/A	152	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

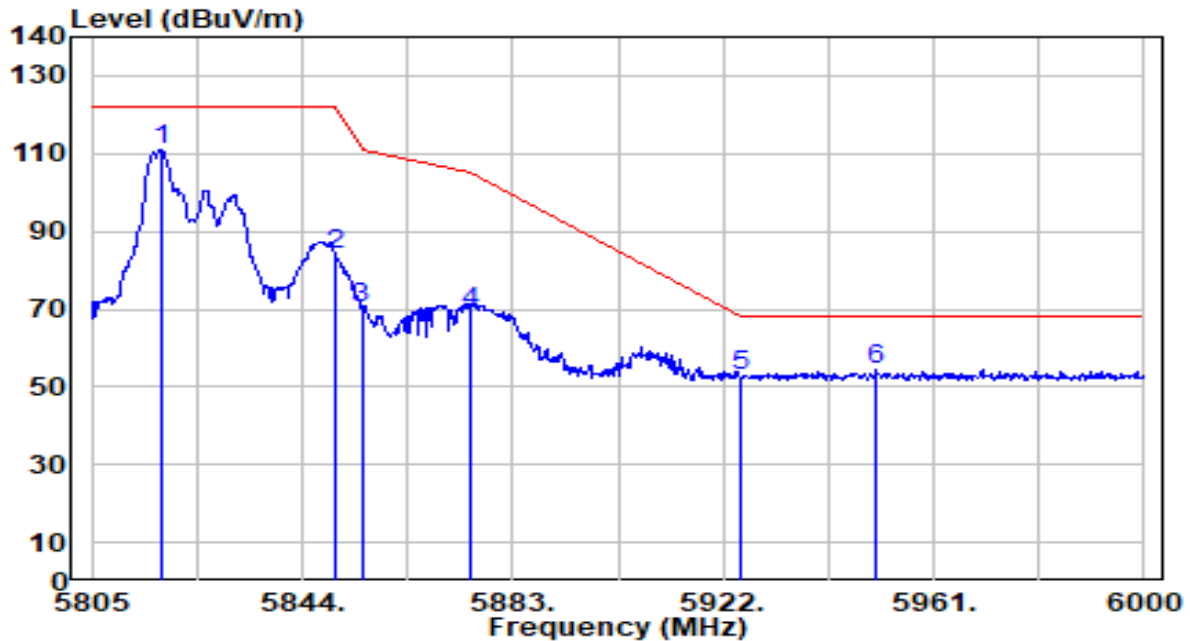


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.870	108.90	2.28	111.18	N/A	N/A	116	253	Peak
2	5850.000	81.99	2.27	84.26	-37.94	122.20	116	253	Peak
3	5855.000	68.24	2.27	70.51	-40.29	110.80	116	253	Peak
4	5875.000	66.92	2.26	69.18	-36.02	105.20	116	253	Peak
5	5925.000	50.46	2.25	52.70	-15.50	68.20	116	253	Peak
6	* 5950.470	52.13	2.24	54.36	-13.84	68.20	116	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

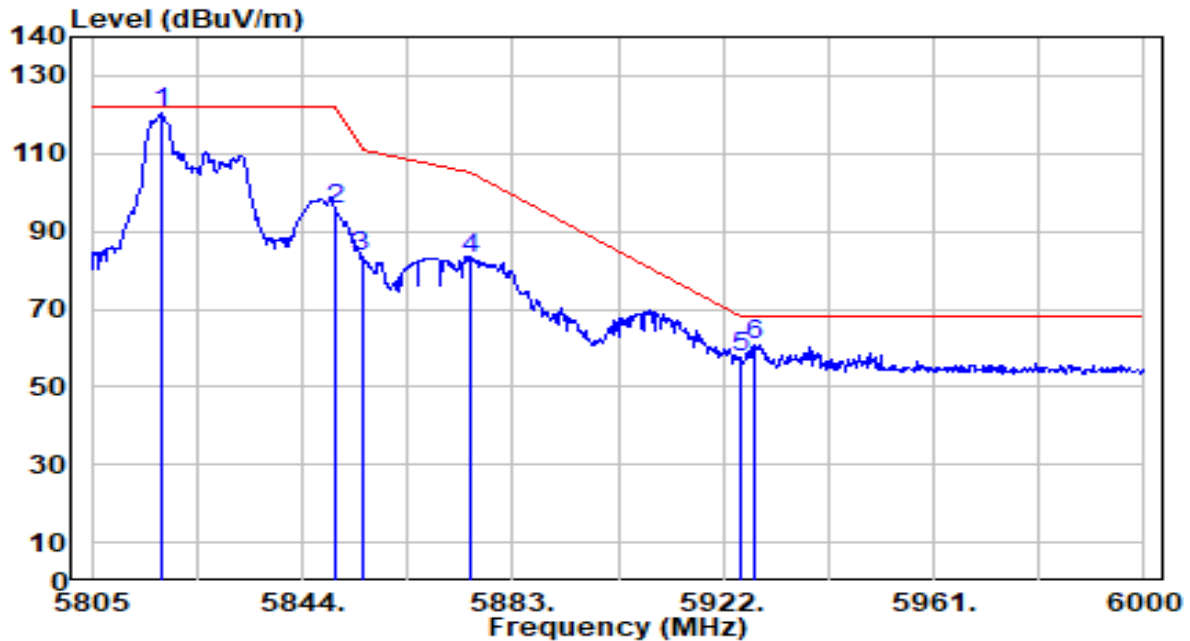


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.065	118.30	2.28	120.58	N/A	N/A	131	110	Peak
2	5850.000	93.34	2.27	95.61	-26.59	122.20	131	110	Peak
3	5855.000	81.32	2.27	83.59	-27.21	110.80	131	110	Peak
4	5875.000	80.51	2.26	82.77	-22.43	105.20	131	110	Peak
5	5925.000	55.58	2.25	57.83	-10.37	68.20	131	110	Peak
6	* 5927.655	58.63	2.24	60.87	-7.33	68.20	131	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

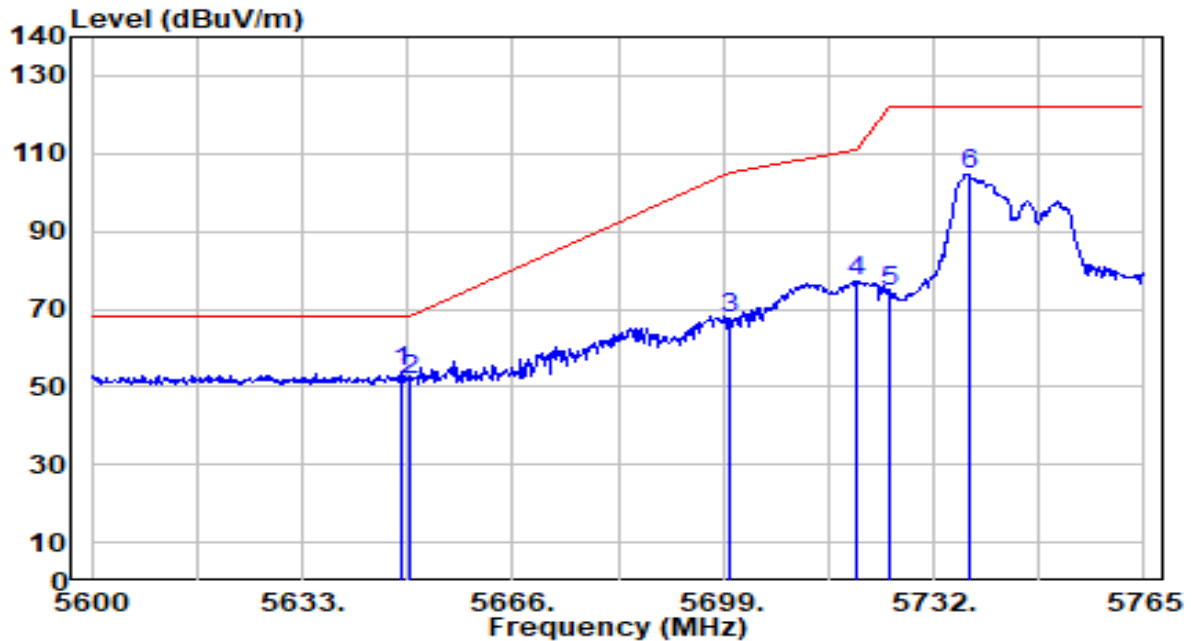


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.510	52.49	1.43	53.92	-14.28	68.20	103	55	Peak
2		5650.000	50.30	1.44	51.73	-16.47	68.20	103	55	Peak
3		5700.000	65.76	1.72	67.48	-37.72	105.20	103	55	Peak
4		5720.000	75.17	1.84	77.01	-33.79	110.80	103	55	Peak
5		5725.000	72.88	1.86	74.75	-47.45	122.20	103	55	Peak
6		5737.445	102.90	1.93	104.83	N/A	N/A	103	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

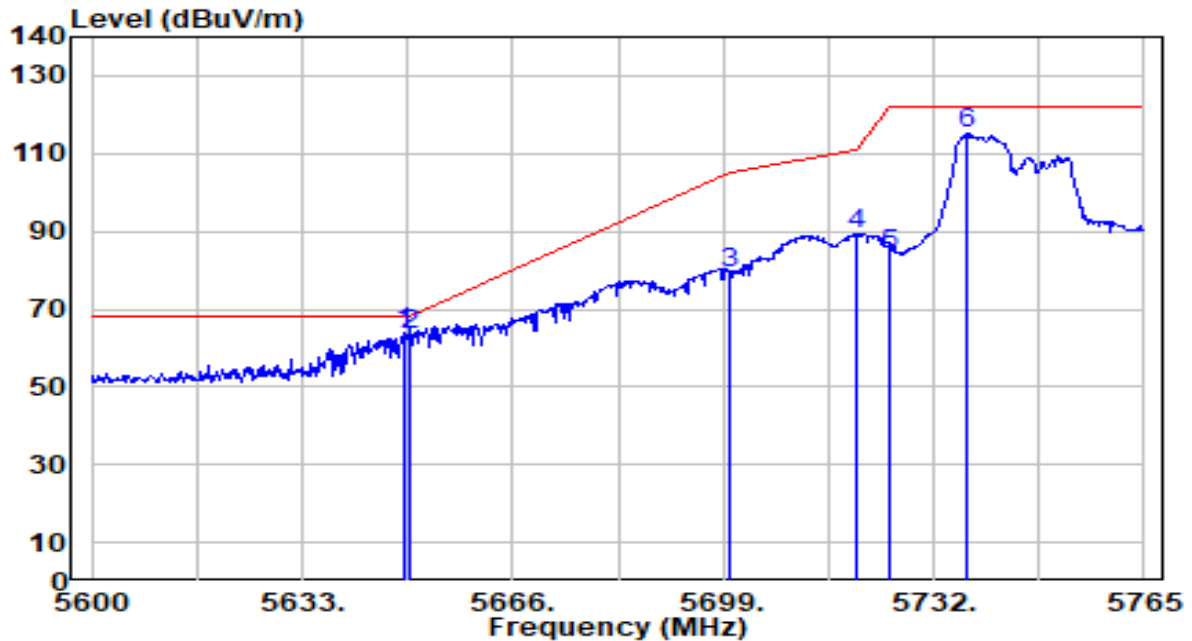


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.840	62.57	1.43	64.00	-4.20	68.20	120	107	Peak
2		5650.000	62.05	1.44	63.49	-4.71	68.20	120	107	Peak
3		5700.000	77.68	1.72	79.40	-25.80	105.20	120	107	Peak
4		5720.000	87.22	1.84	89.05	-21.75	110.80	120	107	Peak
5		5725.000	82.25	1.86	84.11	-38.09	122.20	120	107	Peak
6		5737.280	113.45	1.93	115.38	N/A	N/A	120	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

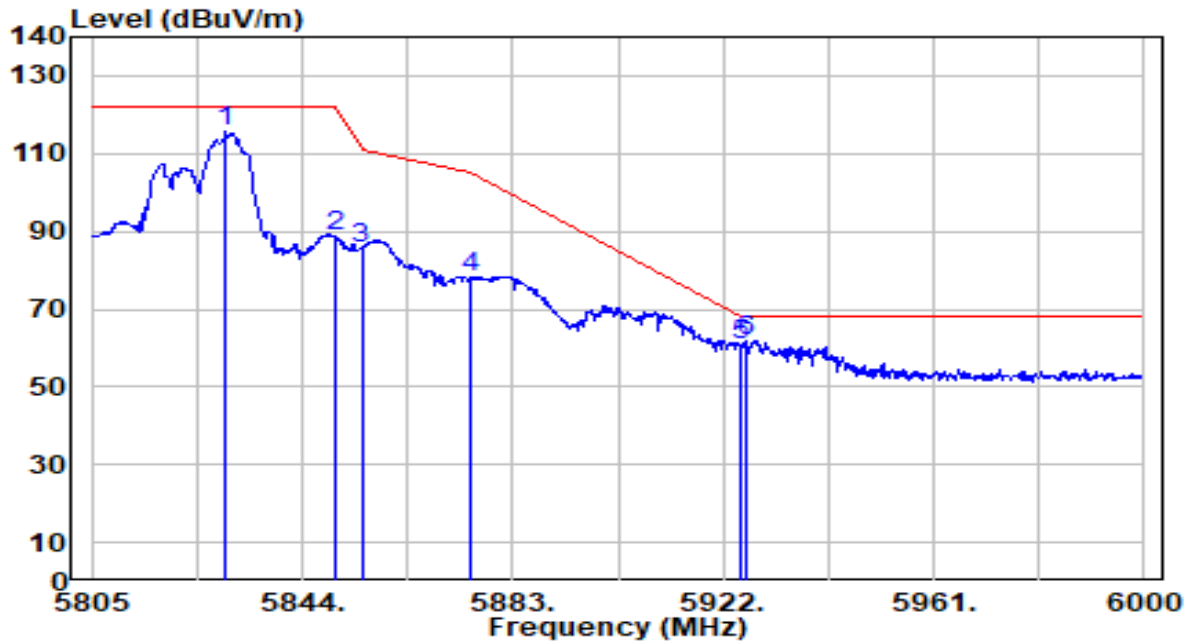


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.960	113.25	2.28	115.53	N/A	N/A	100	149	Peak
2	5850.000	86.32	2.27	88.59	-33.61	122.20	100	149	Peak
3	5855.000	83.14	2.27	85.41	-25.39	110.80	100	149	Peak
4	5875.000	75.79	2.26	78.06	-27.14	105.20	100	149	Peak
5	5925.000	58.56	2.25	60.80	-7.40	68.20	100	149	Peak
6	* 5926.095	59.79	2.25	62.03	-6.17	68.20	100	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

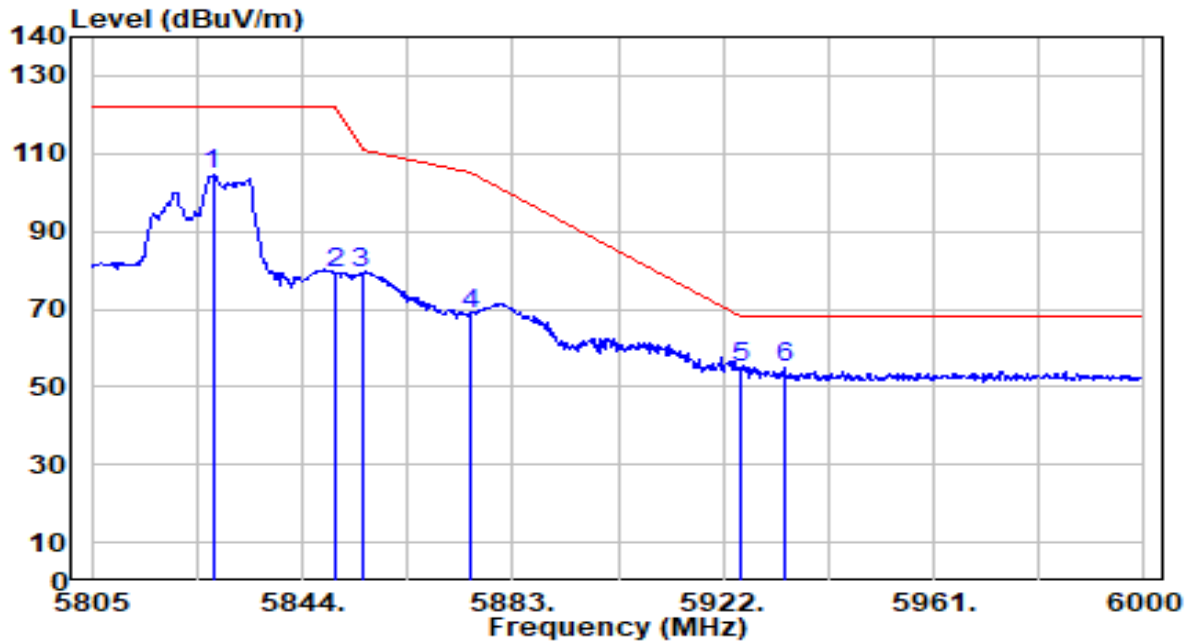


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	102.16	2.28	104.44	N/A	N/A	108	253	Peak
2	5850.000	77.08	2.27	79.35	-42.85	122.20	108	253	Peak
3	5855.000	76.99	2.27	79.26	-31.54	110.80	108	253	Peak
4	5875.000	66.37	2.26	68.63	-36.57	105.20	108	253	Peak
5	5925.000	52.50	2.25	54.74	-13.46	68.20	108	253	Peak
6	* 5933.310	52.88	2.24	55.13	-13.07	68.20	108	253	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

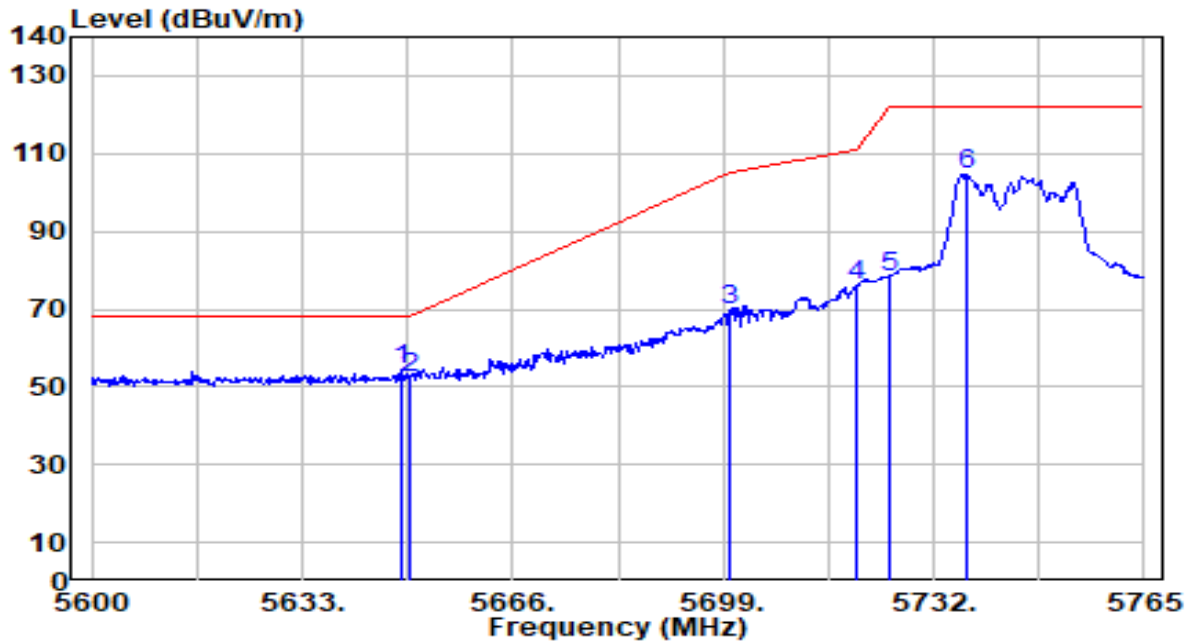


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.510	52.77	1.43	54.20	-14.00	68.20	131	52	Peak
2		5650.000	51.10	1.44	52.54	-15.66	68.20	131	52	Peak
3		5700.000	67.91	1.72	69.63	-35.57	105.20	131	52	Peak
4		5720.000	74.38	1.84	76.22	-34.58	110.80	131	52	Peak
5		5725.000	76.42	1.86	78.28	-43.92	122.20	131	52	Peak
6		5737.115	102.91	1.93	104.84	N/A	N/A	131	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

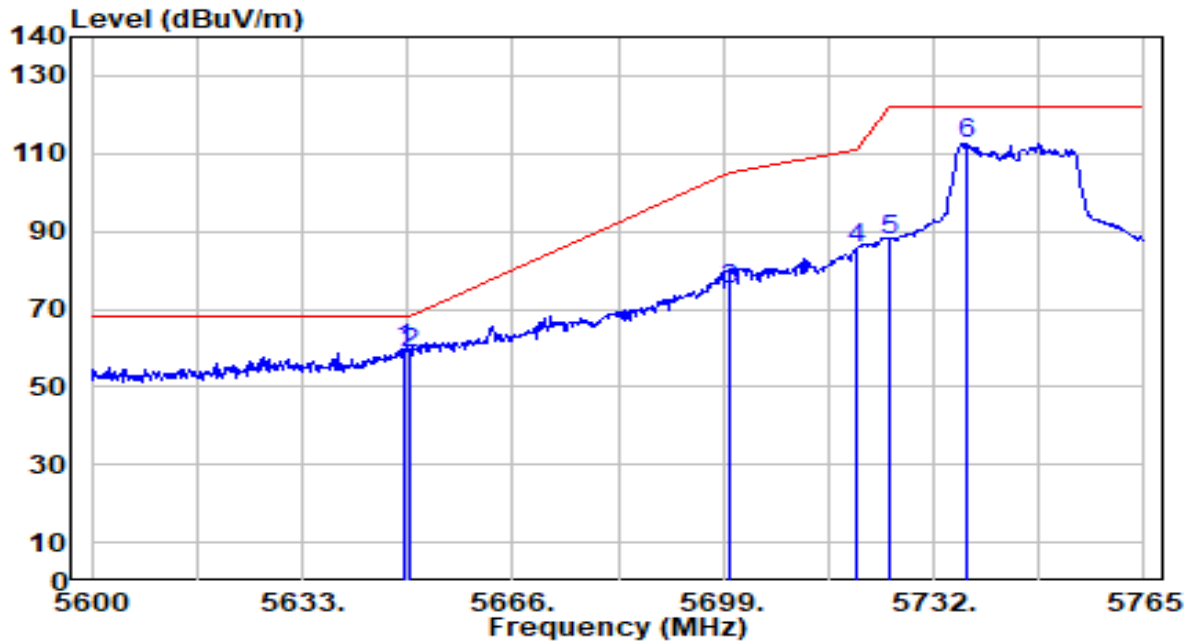


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.840	58.47	1.43	59.90	-8.30	68.20	120	116	Peak
2		5650.000	57.39	1.44	58.83	-9.37	68.20	120	116	Peak
3		5700.000	73.09	1.72	74.81	-30.39	105.20	120	116	Peak
4		5720.000	83.75	1.84	85.58	-25.22	110.80	120	116	Peak
5		5725.000	86.03	1.86	87.90	-34.30	122.20	120	116	Peak
6		5737.115	110.68	1.93	112.62	N/A	N/A	120	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

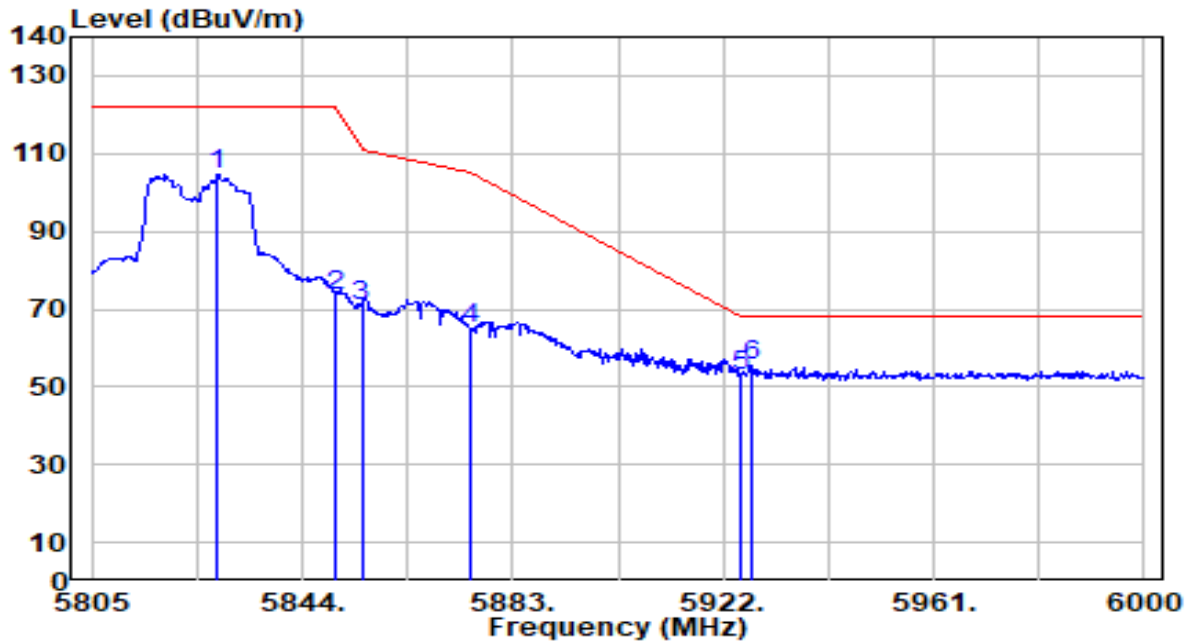


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.400	102.50	2.28	104.78	N/A	N/A	129	67	Peak
2	5850.000	71.02	2.27	73.29	-48.91	122.20	129	67	Peak
3	5855.000	68.68	2.27	70.95	-39.85	110.80	129	67	Peak
4	5875.000	62.47	2.26	64.73	-40.47	105.20	129	67	Peak
5	5925.000	50.75	2.25	53.00	-15.20	68.20	129	67	Peak
6	* 5927.265	53.46	2.24	55.70	-12.50	68.20	129	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

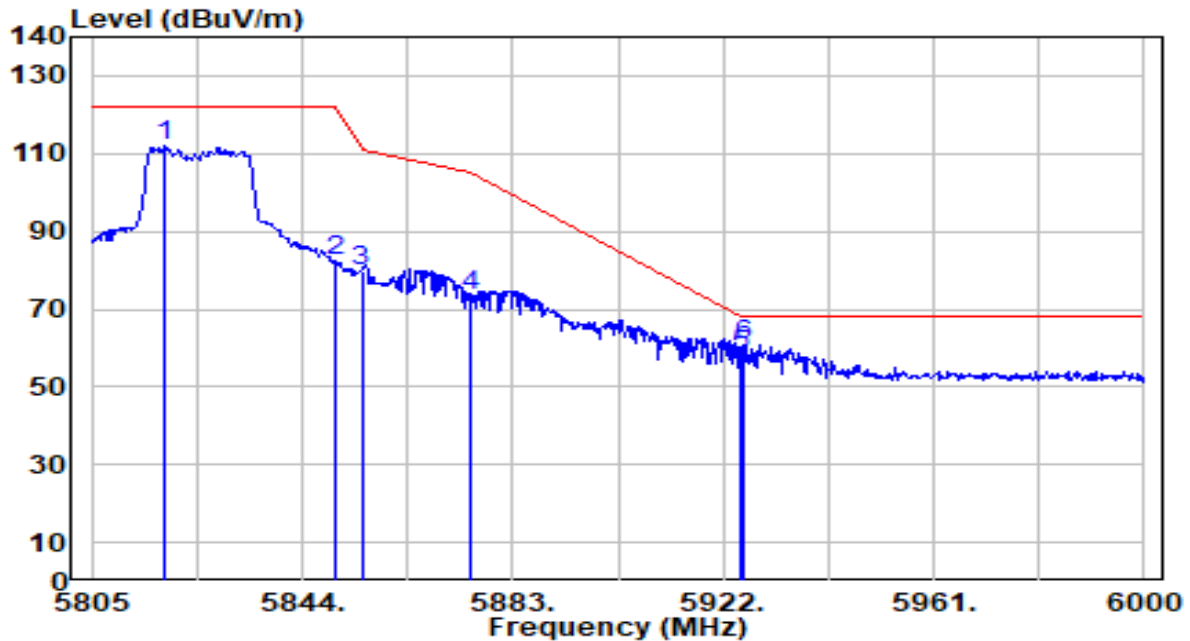


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.650	109.56	2.28	111.85	N/A	N/A	102	88	Peak
2	5850.000	80.12	2.27	82.39	-39.81	122.20	102	88	Peak
3	5855.000	77.38	2.27	79.65	-31.15	110.80	102	88	Peak
4	5875.000	71.25	2.26	73.51	-31.69	105.20	102	88	Peak
5	5925.000	55.90	2.25	58.14	-10.06	68.20	102	88	Peak
6	* 5925.900	58.54	2.25	60.78	-7.42	68.20	102	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

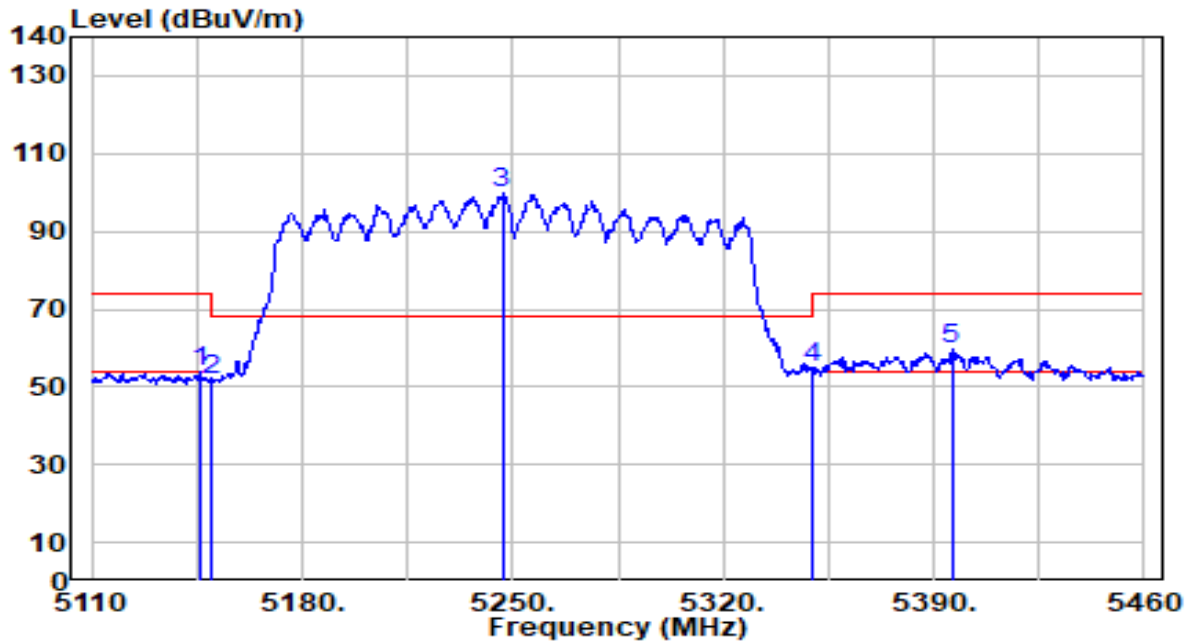


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.700	53.02	0.68	53.69	-20.31	74.00	204	38	Peak
2	5150.000	51.22	0.68	51.90	-22.10	74.00	204	38	Peak
3	5246.500	99.20	0.62	99.82	N/A	N/A	204	38	Peak
4	5350.000	54.51	0.51	55.02	-18.98	74.00	204	38	Peak
5	* 5395.950	59.04	0.45	59.50	-14.50	74.00	204	38	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

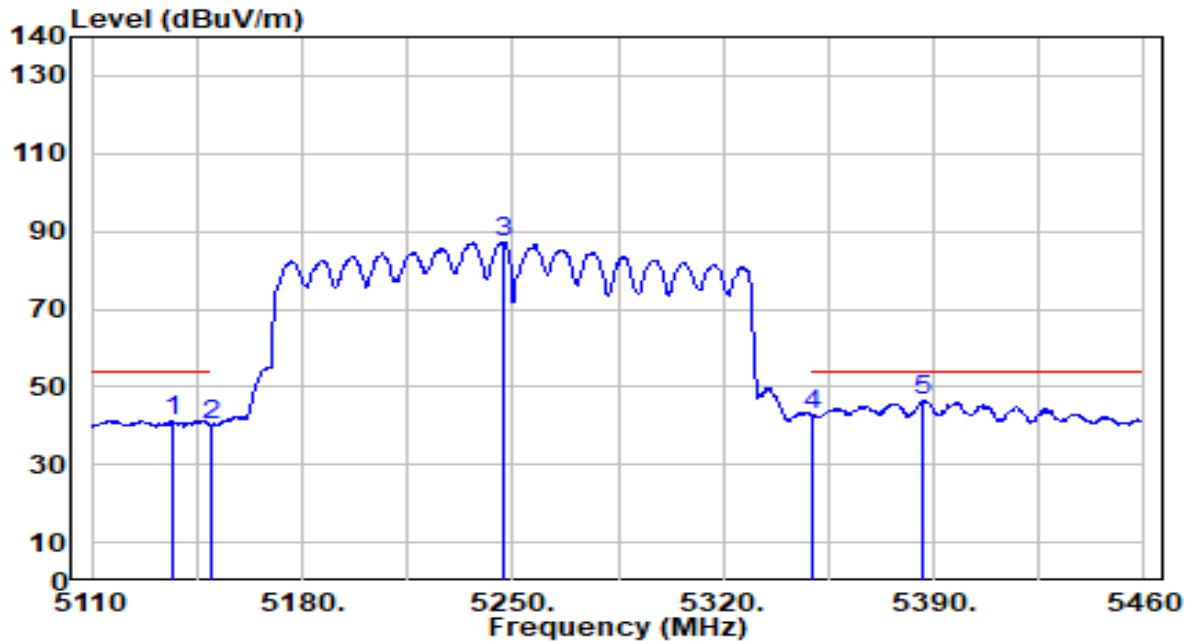


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5136.600	40.79	0.68	41.47	-12.53	54.00	204	38	Average
2	5150.000	39.70	0.68	40.38	-13.62	54.00	204	38	Average
3	5247.200	86.81	0.62	87.42	N/A	N/A	204	38	Average
4	5350.000	42.14	0.51	42.64	-11.36	54.00	204	38	Average
5	* 5386.500	45.88	0.46	46.34	-7.66	54.00	204	38	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

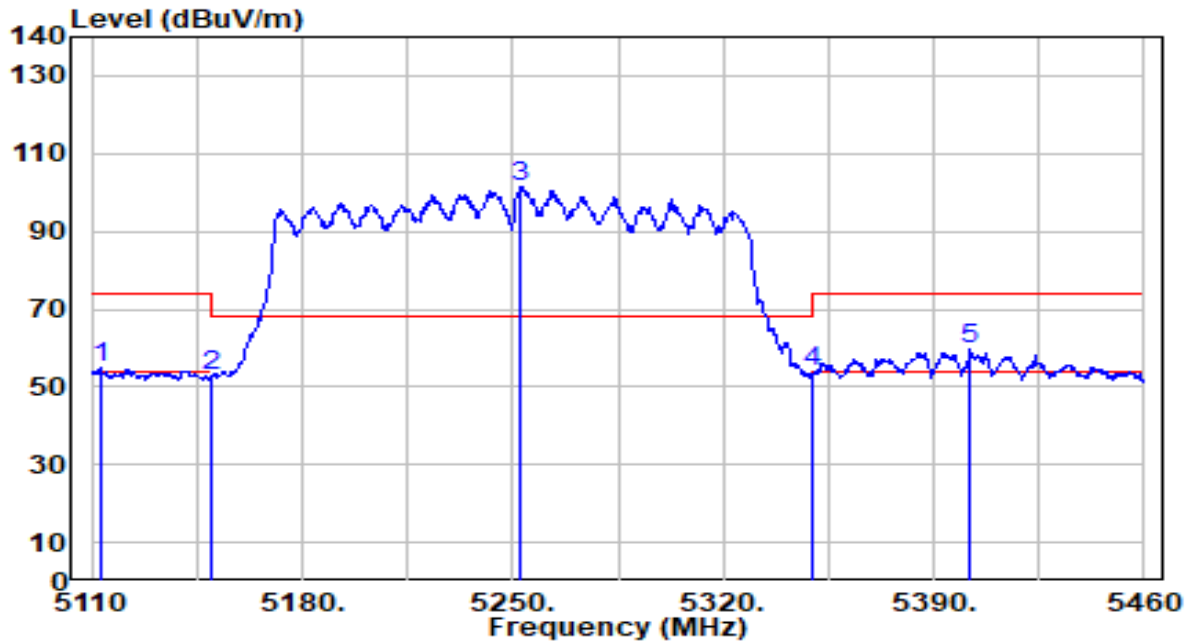


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5112.800	54.26	0.68	54.94	-19.06	74.00	102	249	Peak
2	5150.000	52.16	0.68	52.84	-21.16	74.00	102	249	Peak
3	5252.450	100.97	0.61	101.58	N/A	N/A	102	249	Peak
4	5350.000	53.54	0.51	54.05	-19.95	74.00	102	249	Peak
5	* 5402.250	58.99	0.46	59.45	-14.55	74.00	102	249	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

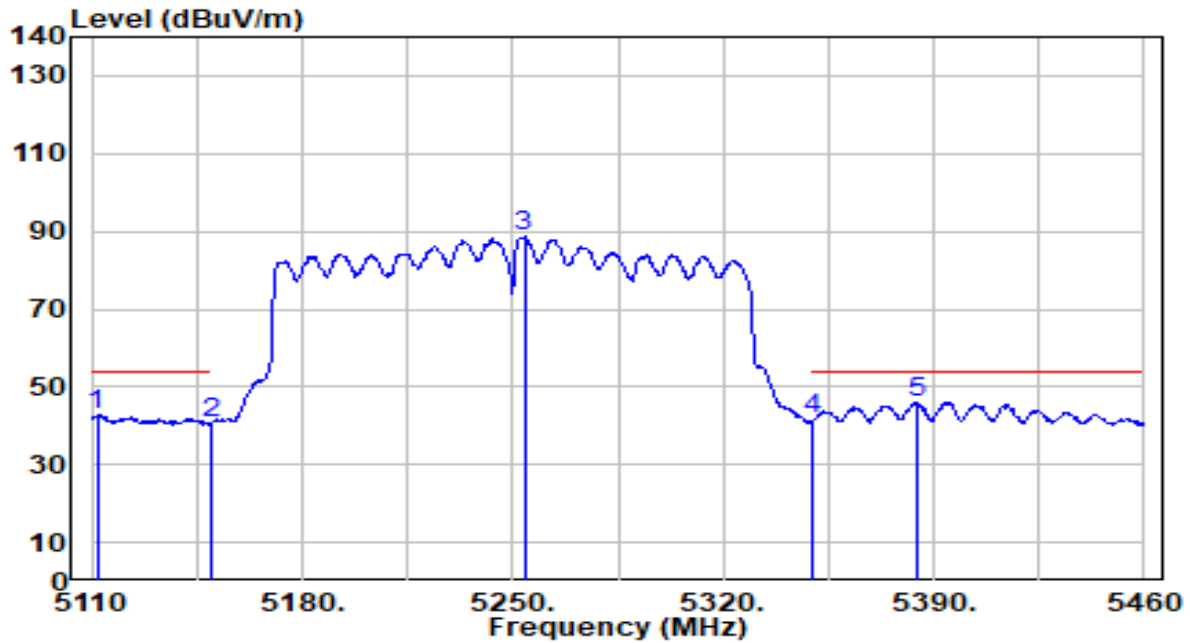


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5111.750	41.89	0.68	42.57	-11.43	54.00	102	249	Average
2	5150.000	40.24	0.68	40.92	-13.08	54.00	102	249	Average
3	5253.850	88.29	0.61	88.90	N/A	N/A	102	249	Average
4	5350.000	41.08	0.51	41.58	-12.42	54.00	102	249	Average
5	* 5384.400	45.59	0.47	46.06	-7.94	54.00	102	249	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0803	Test Voltage	By Notebook PC

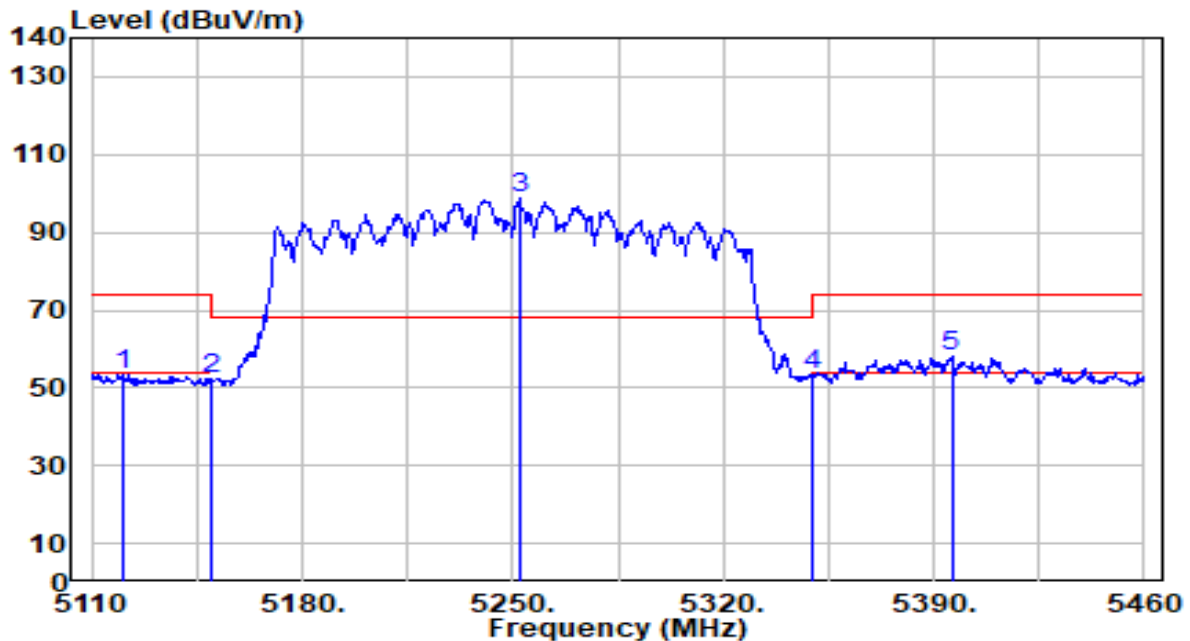


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5120.500	52.69	0.68	53.37	-20.63	74.00	303	352	Peak
2	5150.000	51.61	0.68	52.28	-21.72	74.00	303	352	Peak
3	5252.100	98.05	0.61	98.66	N/A	N/A	303	352	Peak
4	5350.000	53.03	0.51	53.53	-20.47	74.00	303	352	Peak
5	* 5395.950	57.73	0.45	58.19	-15.81	74.00	303	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0803	Test Voltage	By Notebook PC

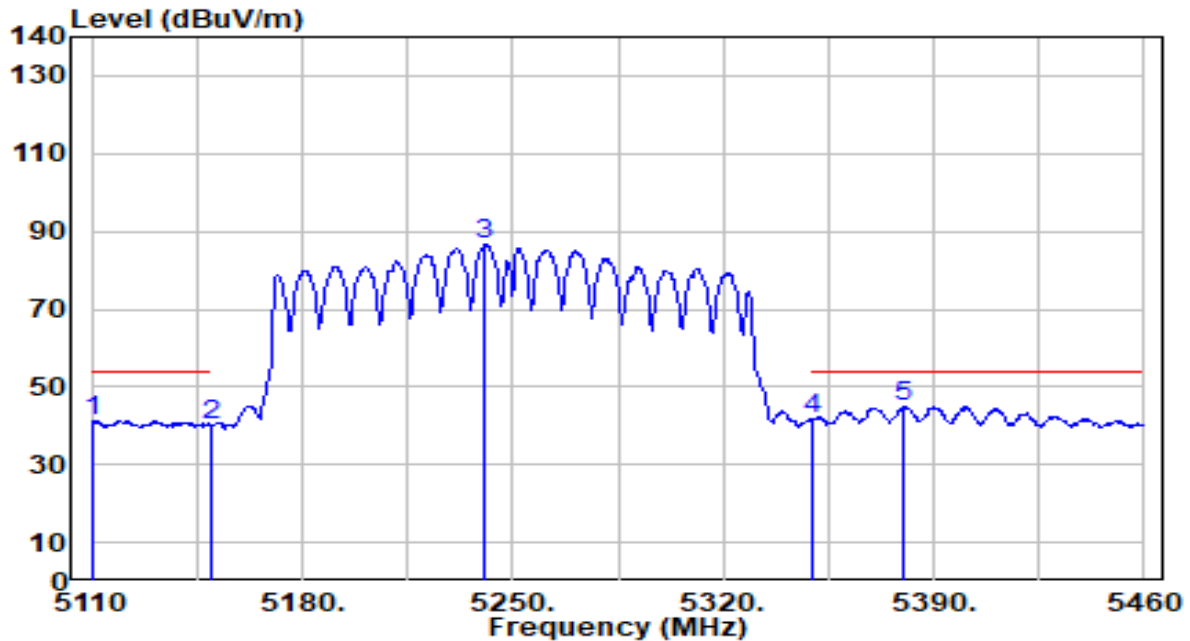


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5110.000	40.68	0.68	41.36	-12.64	54.00	303	352	Average
2	5150.000	39.41	0.68	40.08	-13.92	54.00	303	352	Average
3	5240.900	85.93	0.63	86.55	N/A	N/A	303	352	Average
4	5350.000	41.48	0.51	41.99	-12.01	54.00	303	352	Average
5	* 5379.850	44.63	0.47	45.10	-8.90	54.00	303	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0803	Test Voltage	By Notebook PC

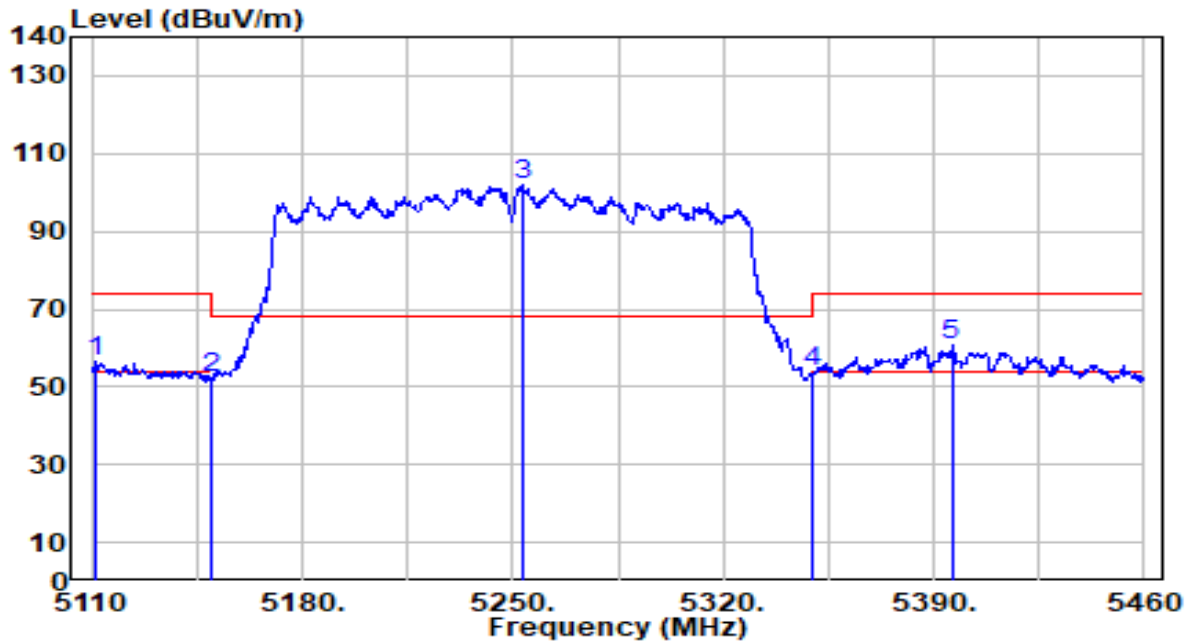


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5111.050	55.96	0.68	56.64	-17.36	74.00	102	248	Peak
2	5150.000	51.70	0.68	52.37	-21.63	74.00	102	248	Peak
3	5253.150	101.13	0.61	101.74	N/A	N/A	102	248	Peak
4	5350.000	53.50	0.51	54.00	-20.00	74.00	102	248	Peak
5	* 5395.950	60.29	0.45	60.74	-13.26	74.00	102	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1_ verify for S0803	Test Voltage	By Notebook PC

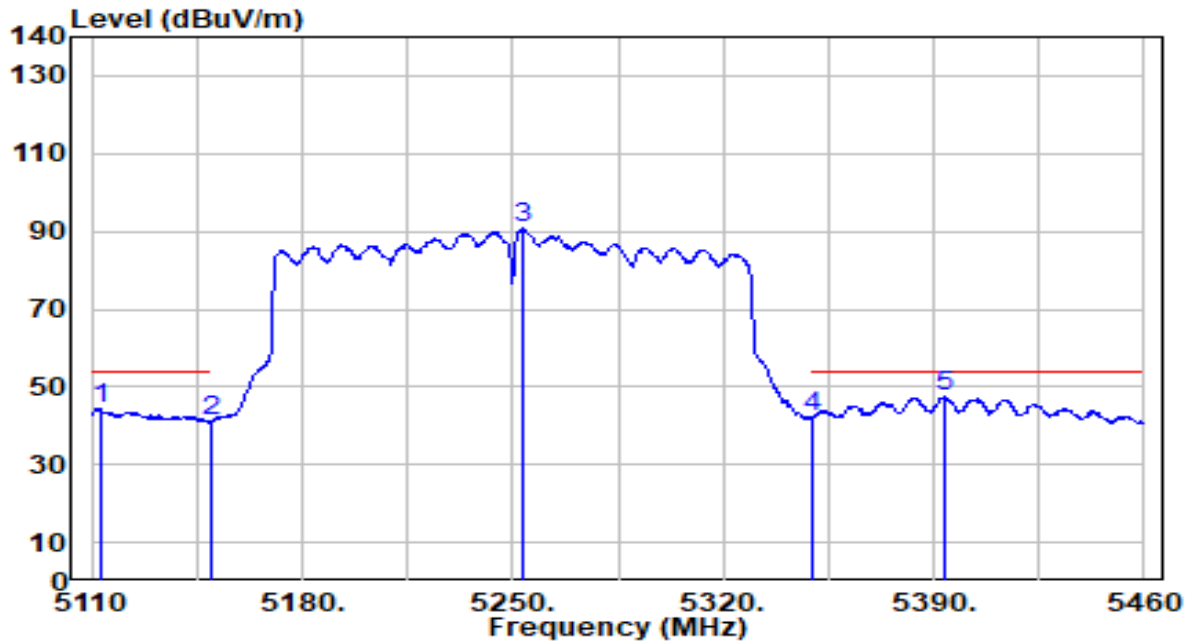

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5113.150	43.58	0.68	44.26	-9.74	54.00	102	248	Average
2	5150.000	40.77	0.68	41.45	-12.55	54.00	102	248	Average
3	5253.500	90.02	0.61	90.63	N/A	N/A	102	248	Average
4	5350.000	41.89	0.51	42.40	-11.60	54.00	102	248	Average
5	* 5393.500	47.09	0.46	47.54	-6.46	54.00	102	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

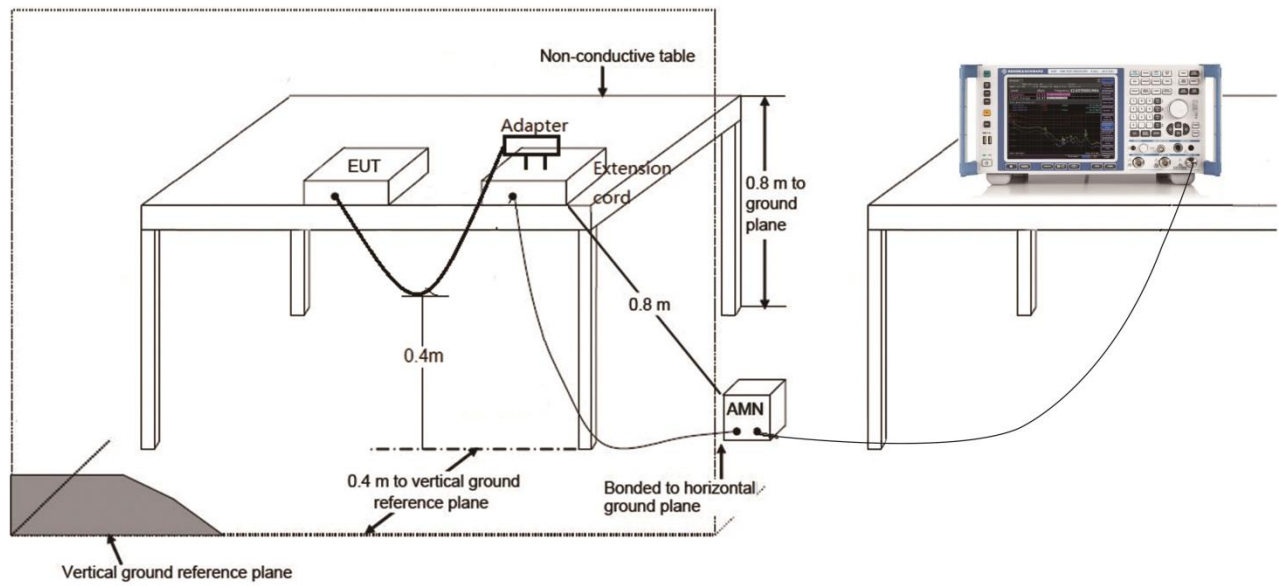

7.10.4.Test Result

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

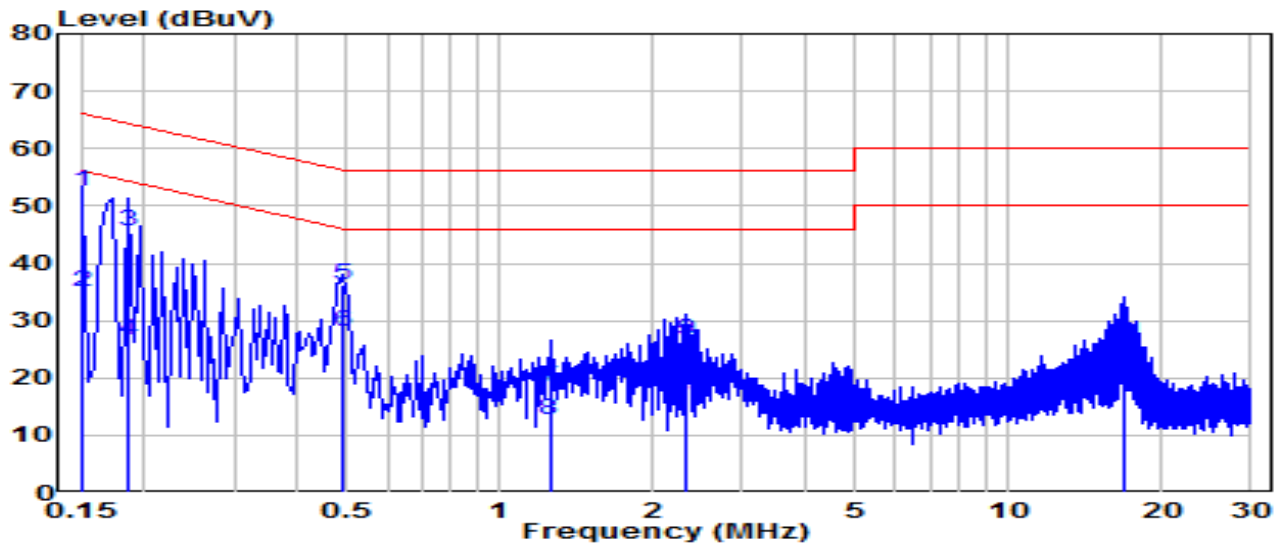


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.150	42.86	9.63	52.49	-13.51	66.00	QP
2	*	0.150	25.31	9.63	34.94	-21.06	56.00	Average
3		0.186	36.00	9.63	45.63	-18.58	64.21	QP
4		0.186	16.94	9.63	26.57	-27.64	54.21	Average
5		0.487	26.57	9.65	36.22	-19.99	56.21	QP
6		0.487	18.42	9.65	28.07	-18.14	46.21	Average
7		1.252	8.77	9.69	18.46	-37.54	56.00	QP
8		1.252	2.99	9.69	12.68	-33.32	46.00	Average
9		2.314	16.94	9.70	26.64	-29.36	56.00	QP
10		2.314	6.42	9.70	16.12	-29.88	46.00	Average
11		16.798	16.05	9.91	25.97	-34.03	60.00	QP
12		16.798	8.80	9.91	18.72	-31.28	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

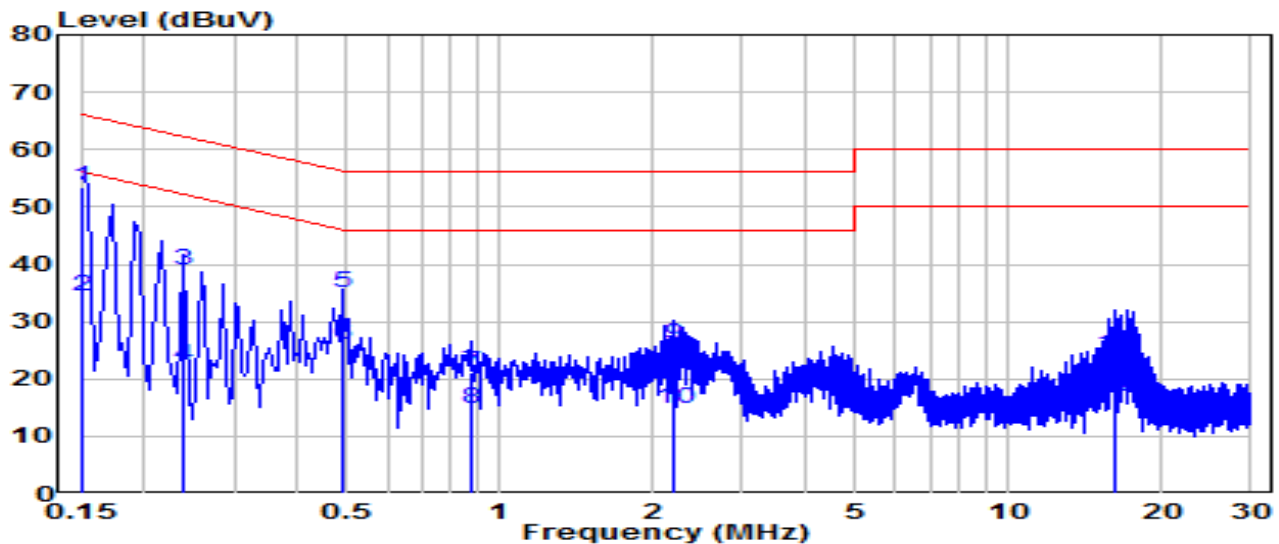


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.150	43.81	9.63	53.44	-12.56	66.00	QP
2	*	0.150	24.83	9.63	34.46	-21.54	56.00	Average
3		0.240	29.38	9.64	39.02	-23.08	62.10	QP
4		0.240	12.81	9.64	22.45	-29.65	52.10	Average
5		0.487	25.52	9.65	35.17	-21.04	56.21	QP
6		0.487	16.28	9.65	25.93	-20.28	46.21	Average
7		0.879	11.45	9.67	21.12	-34.88	56.00	QP
8		0.879	5.09	9.67	14.76	-31.24	46.00	Average
9		2.202	16.32	9.71	26.03	-29.97	56.00	QP
10		2.202	5.03	9.71	14.75	-31.25	46.00	Average
11		16.123	14.33	9.95	24.28	-35.72	60.00	QP
12		16.123	6.80	9.95	16.76	-33.24	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

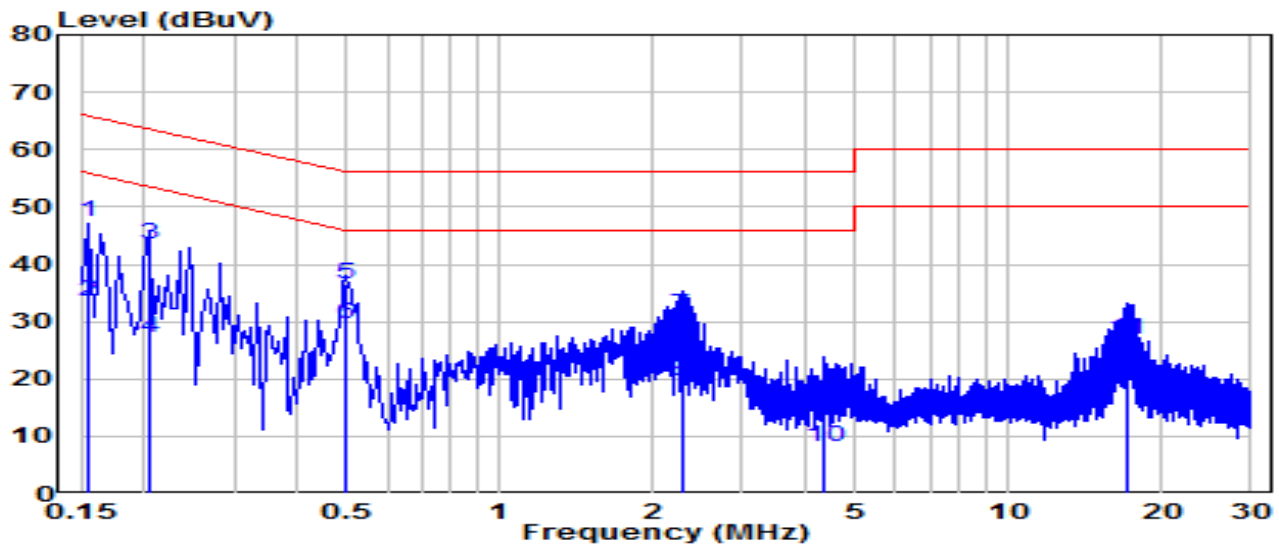


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	37.76	9.63	47.39	-18.37	65.75	QP
2	0.154	23.90	9.63	33.53	-22.22	55.75	Average
3	0.204	33.82	9.63	43.45	-20.00	63.45	QP
4	0.204	17.42	9.63	27.05	-26.40	53.45	Average
5	* 0.496	26.78	9.65	36.43	-19.63	56.06	QP
6	* 0.496	19.84	9.65	29.49	-16.57	46.06	Average
7	2.274	21.33	9.70	31.03	-24.97	56.00	QP
8	2.274	9.82	9.70	19.52	-26.48	46.00	Average
9	4.357	5.52	9.74	15.25	-40.75	56.00	QP
10	4.357	-1.66	9.74	8.08	-37.92	46.00	Average
11	17.091	16.86	9.92	26.78	-33.22	60.00	QP
12	17.091	9.09	9.92	19.01	-30.99	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

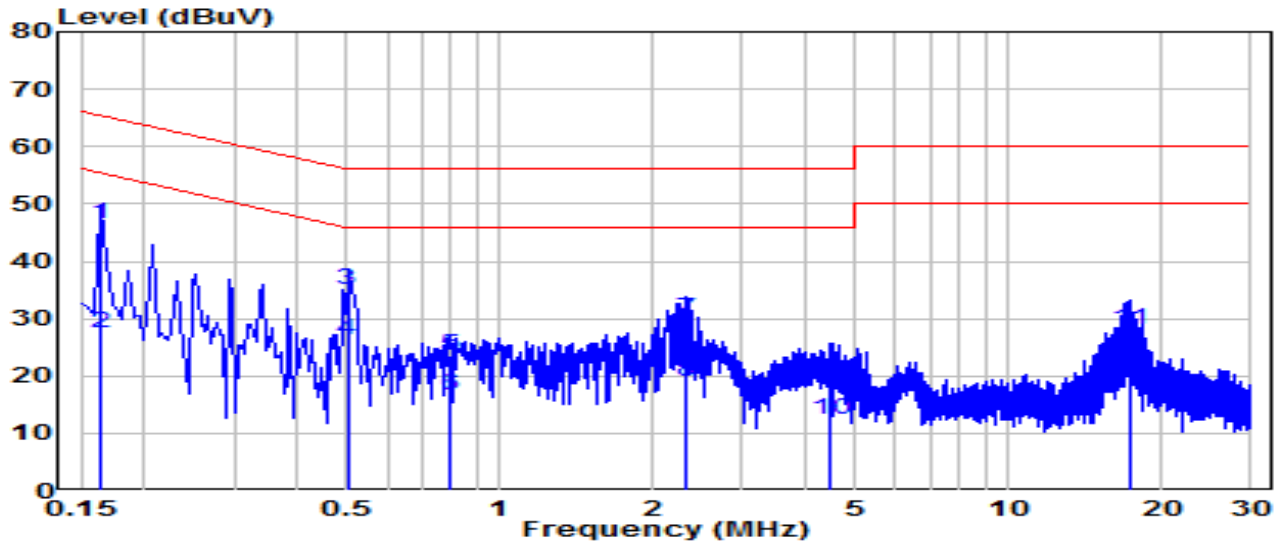

No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.163	36.77	9.63	46.40	-18.88	65.28	QP
2	*	0.163	17.77	9.63	27.41	-27.88	55.28	Average
3		0.501	25.45	9.65	35.10	-20.90	56.00	QP
4		0.501	16.51	9.65	26.16	-19.84	46.00	Average
5		0.798	13.92	9.67	23.58	-32.42	56.00	QP
6		0.798	6.99	9.67	16.66	-29.34	46.00	Average
7		2.319	20.06	9.71	29.78	-26.22	56.00	QP
8		2.319	9.43	9.71	19.14	-26.86	46.00	Average
9		4.447	9.27	9.75	19.02	-36.98	56.00	QP
10		4.447	2.60	9.75	12.34	-33.66	46.00	Average
11		17.392	18.16	9.97	28.13	-31.87	60.00	QP
12		17.392	9.43	9.97	19.40	-30.60	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2405TW0107-UT” file.

Appendix B : EUT Photograph

Refer to “2405TW0107-UE” file.

Appendix C : Internal Photograph

Refer to “2405TW0107-UI” file.

_____ The End _____