




GFSK Transmitting Band edge-right side

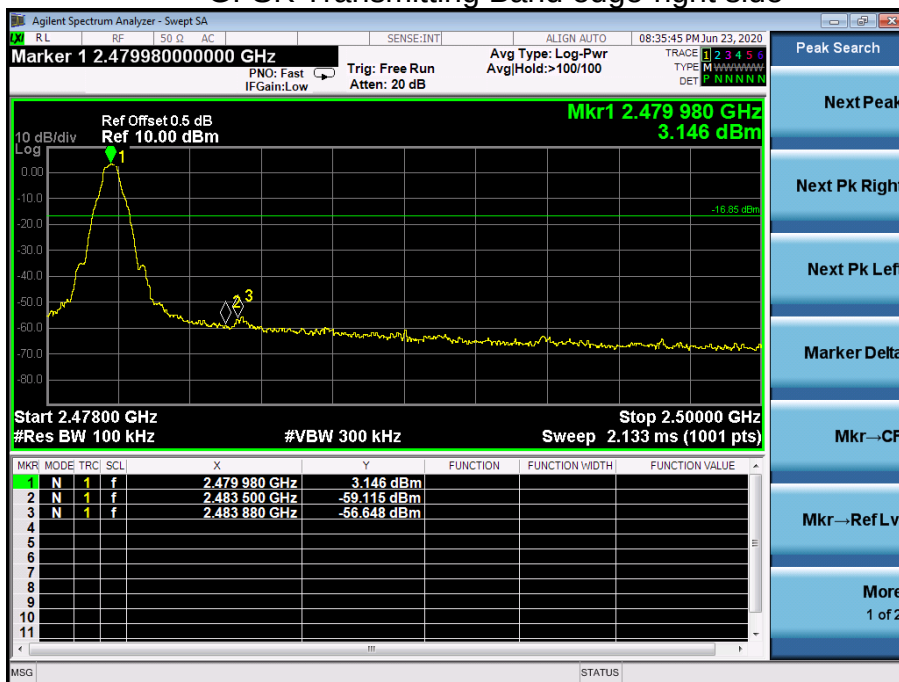


GFSK Hopping Band edge-right side

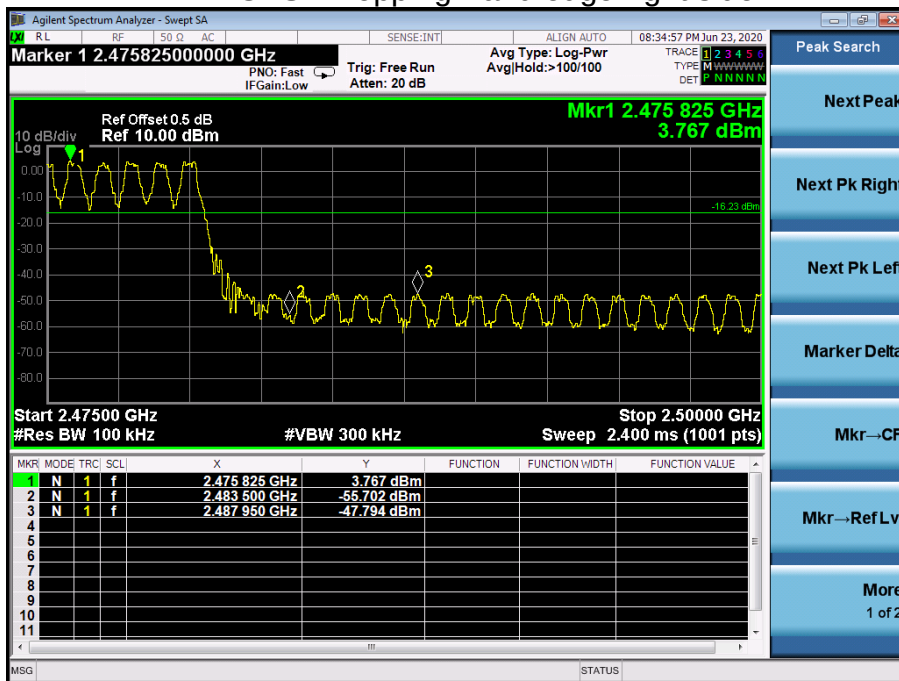


Pi/4 DQPSK Transmitting Band edge-left side

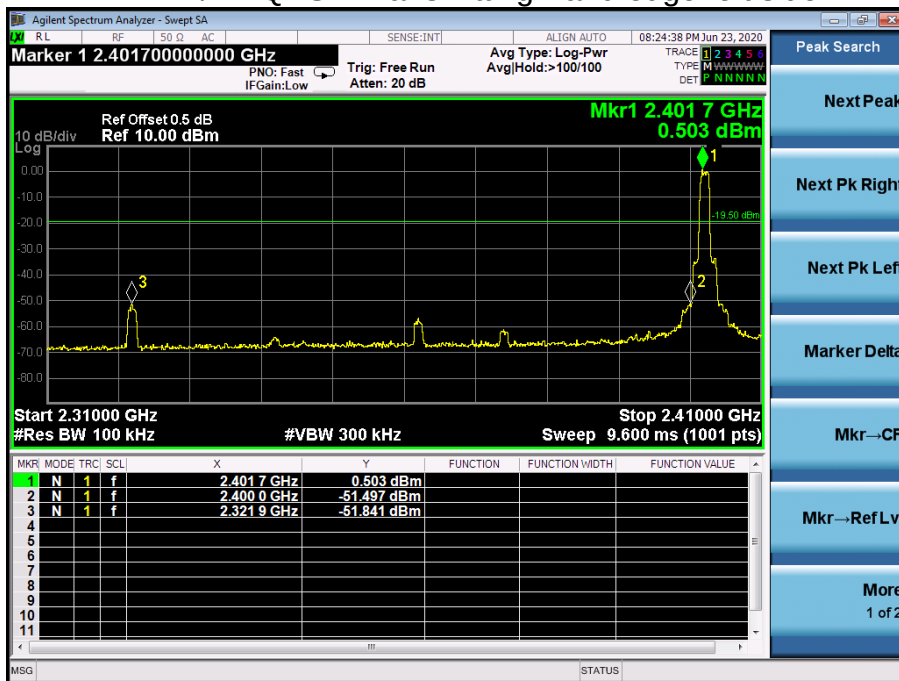


Pi/4 DQPSK Hopping Band edge-left side

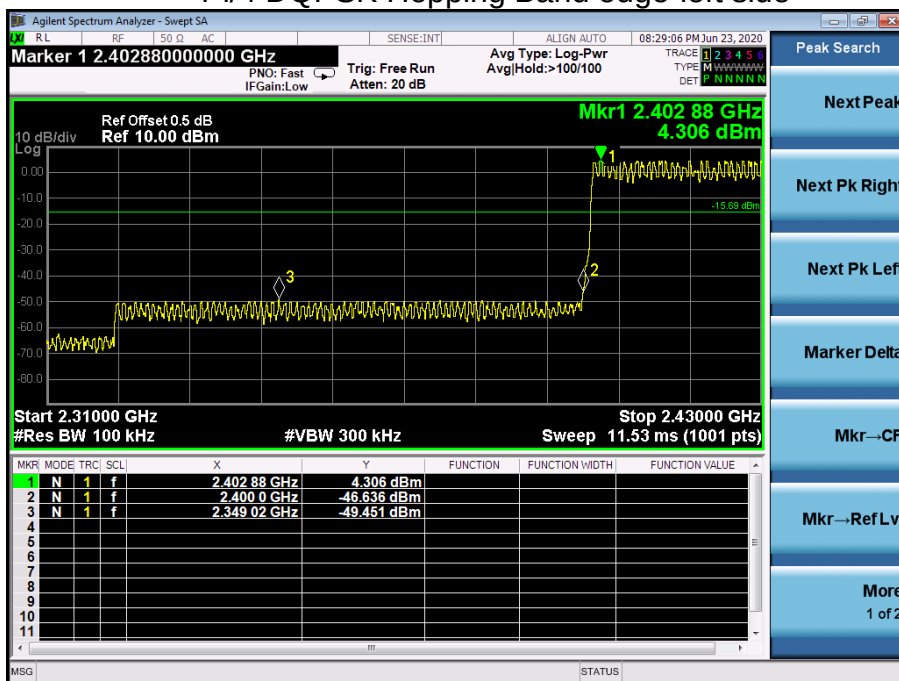


Pi/4 DQPSK Transmitting Band edge-right side

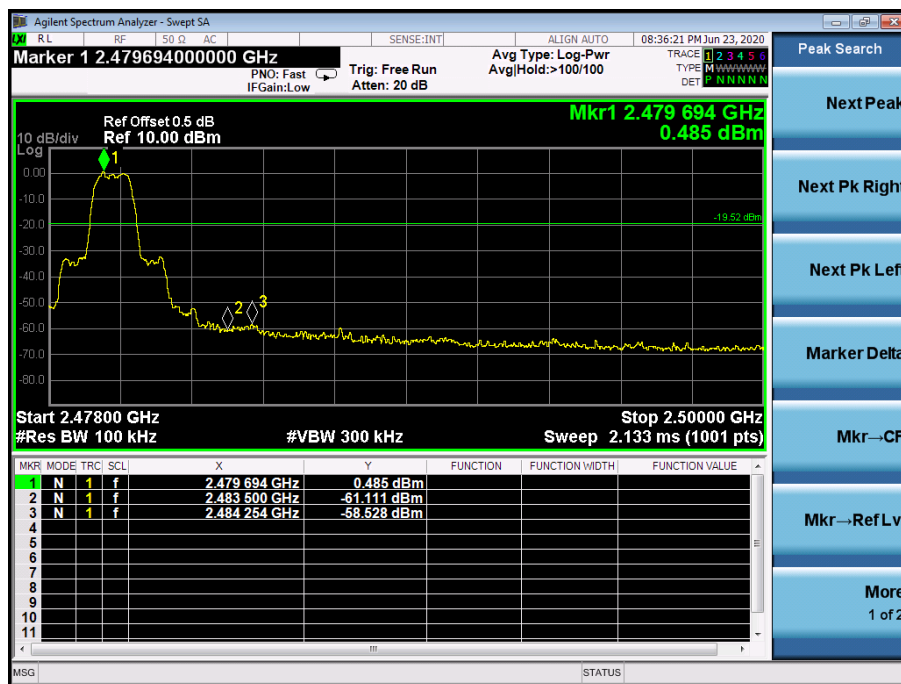


Pi/4 DQPSK Hopping Band edge-right side

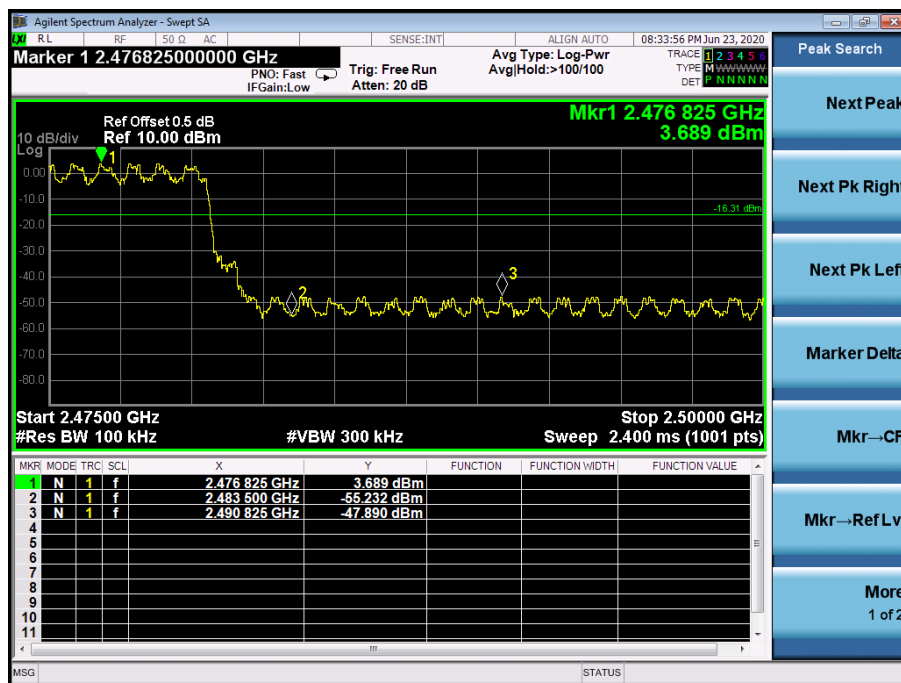


8DPSK Transmitting Band edge-left side

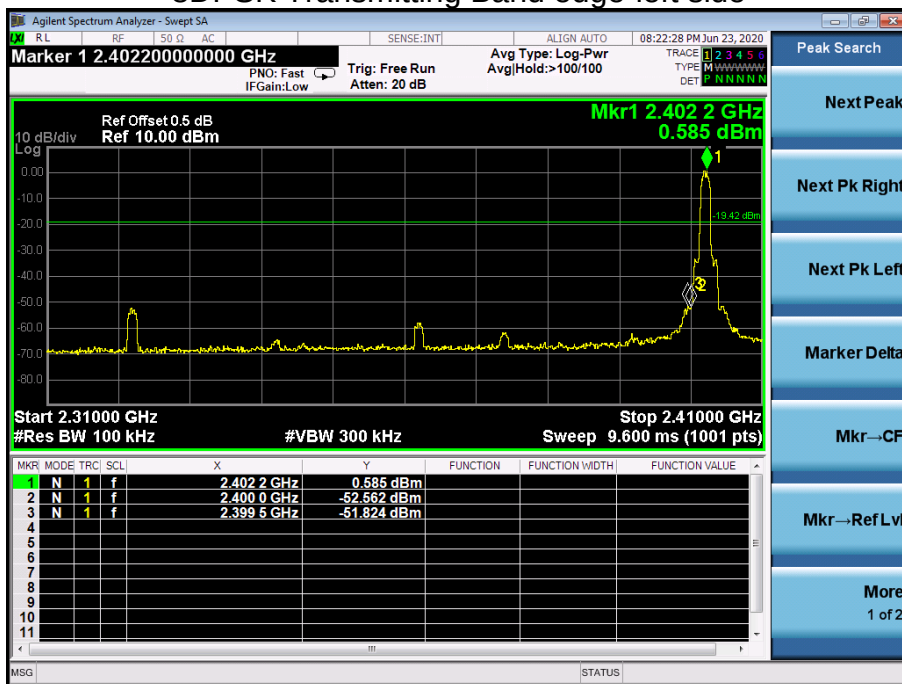


8DPSK Hopping Band edge-left side

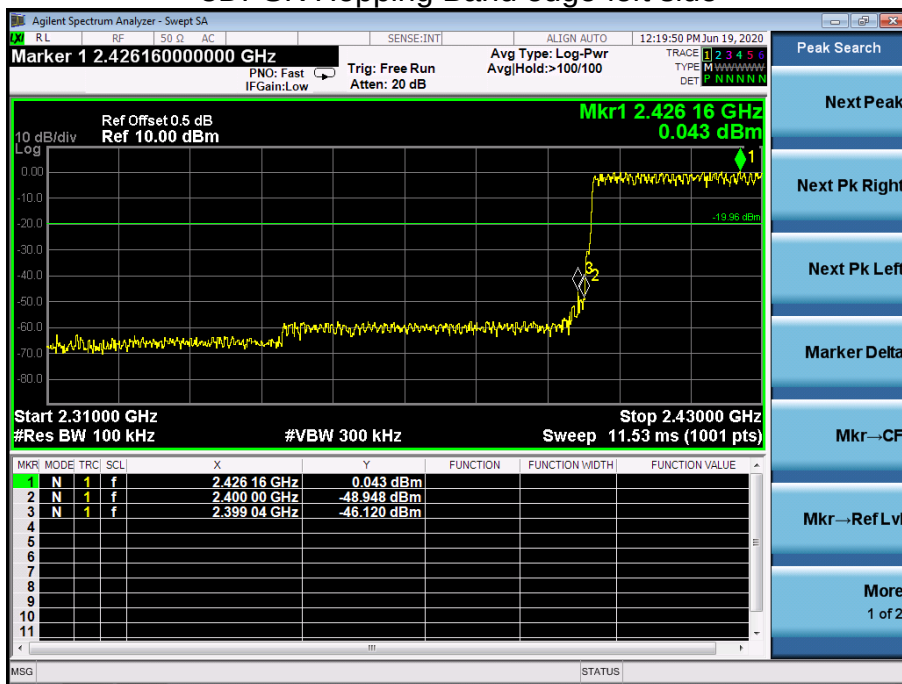

8DPSK Transmitting Band edge-right side

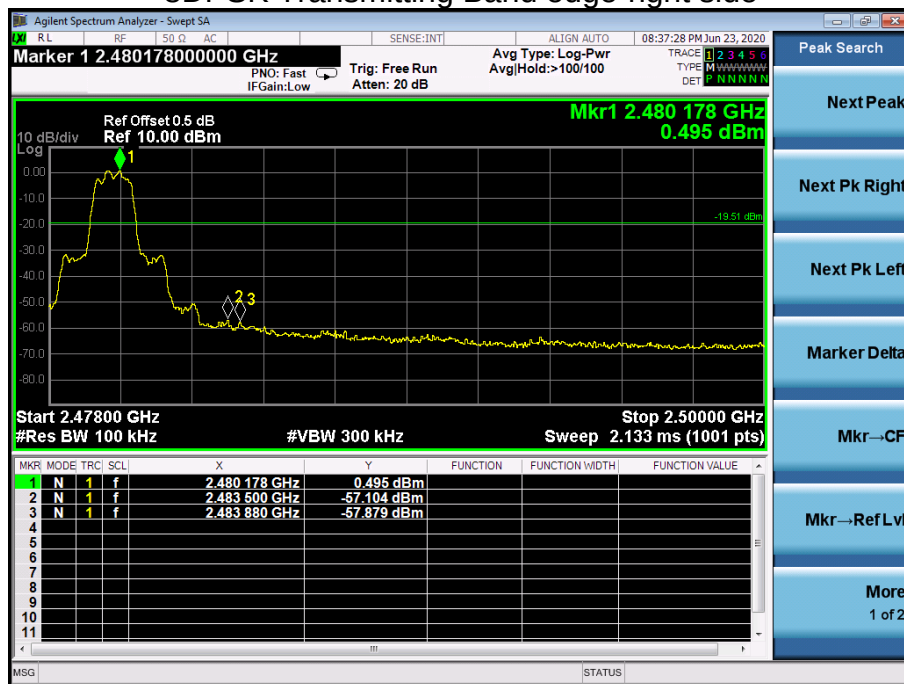


8DPSK Hopping Band edge-right side

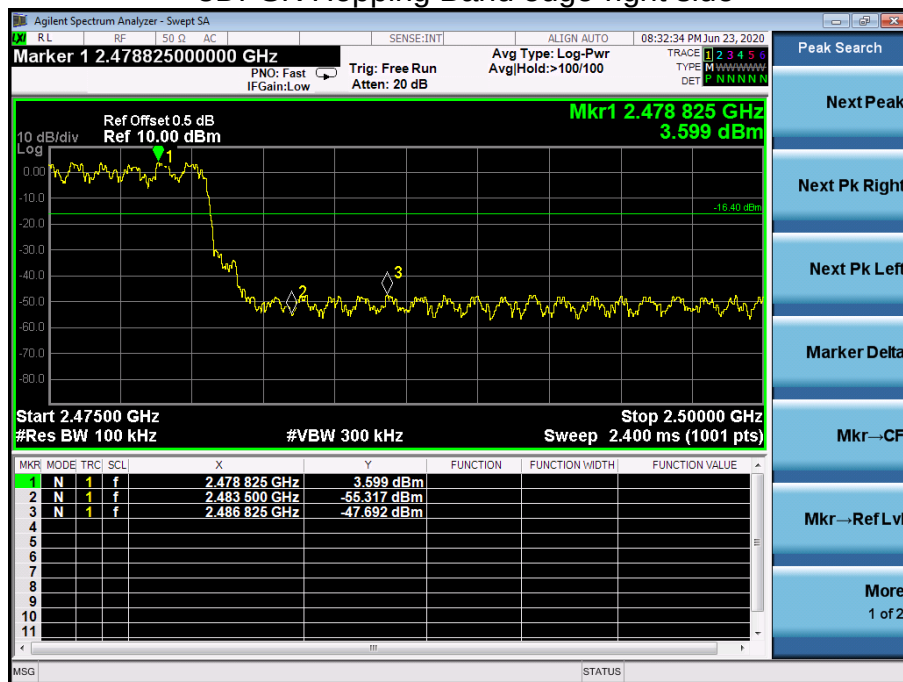

9. 20 DB BANDWIDTH

9.1 Block Diagram Of Test Setup

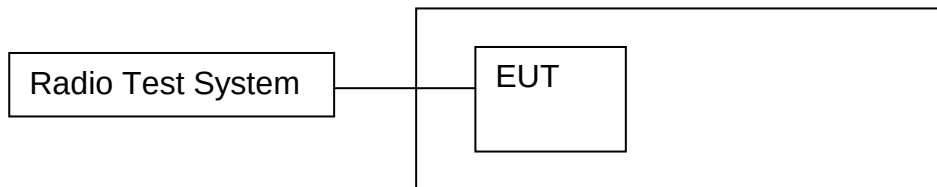

9.2 Limit

N/A


9.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


9.4 Test Result

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.040
GFSK	Middle	1.040
GFSK	High	0.916
Pi/4 DQPSK	Low	1.361
Pi/4 DQPSK	Middle	1.360
Pi/4 DQPSK	High	1.247
8DPSK	Low	1.300
8DPSK	Middle	1.302
8DPSK	High	1.216


Test plots
GFSK Low Channel

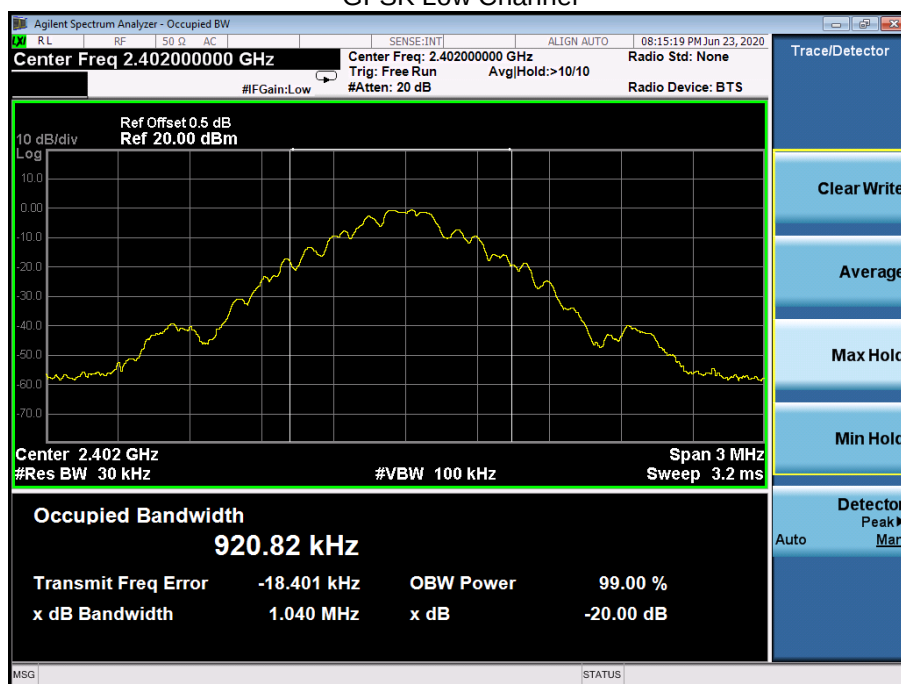


GFSK Middle Channel

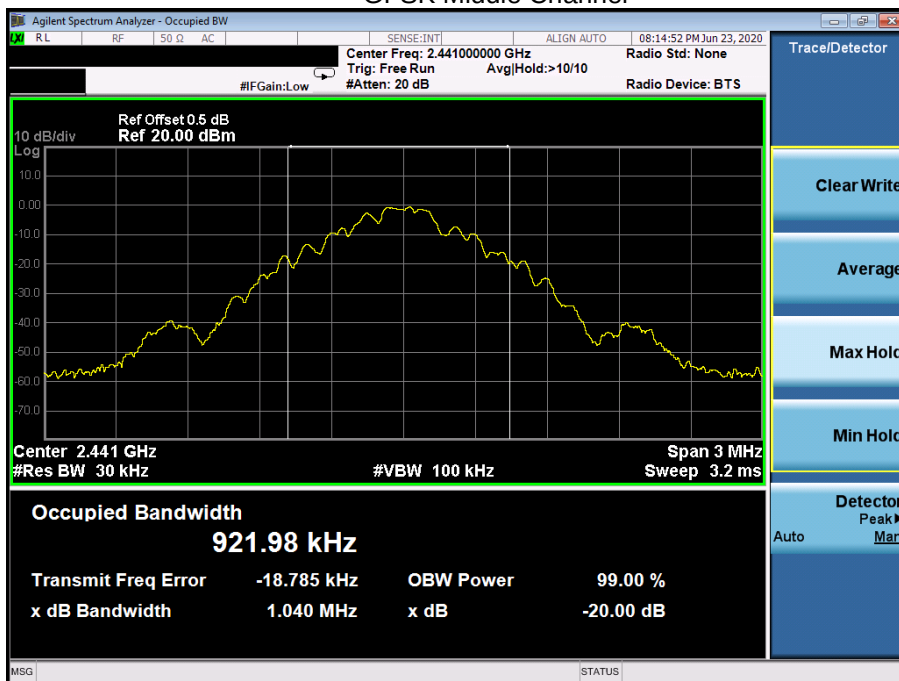


GFSK High Channel

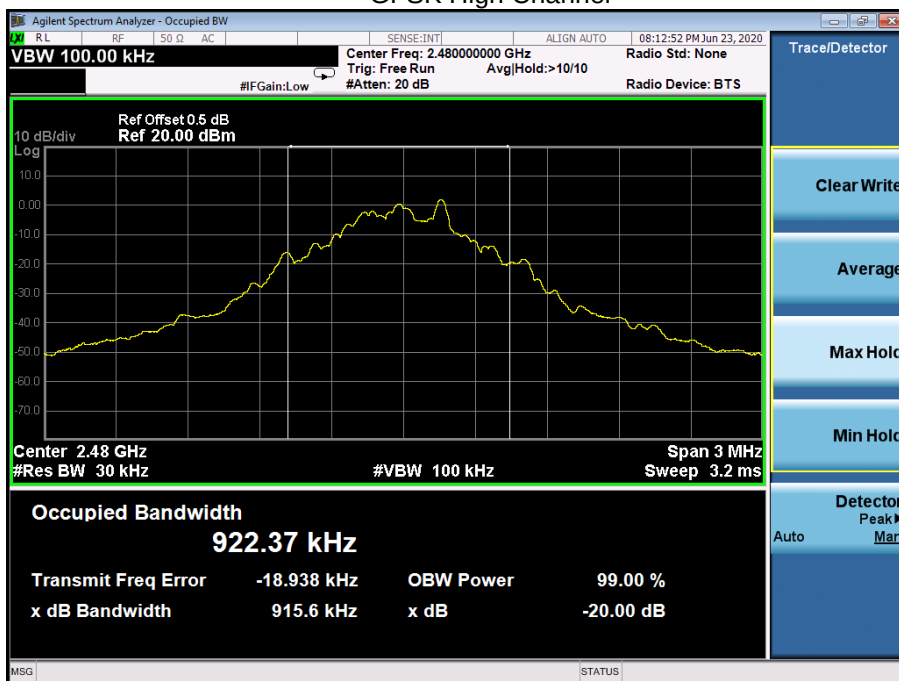


Pi/4 DQPSK Low Channel

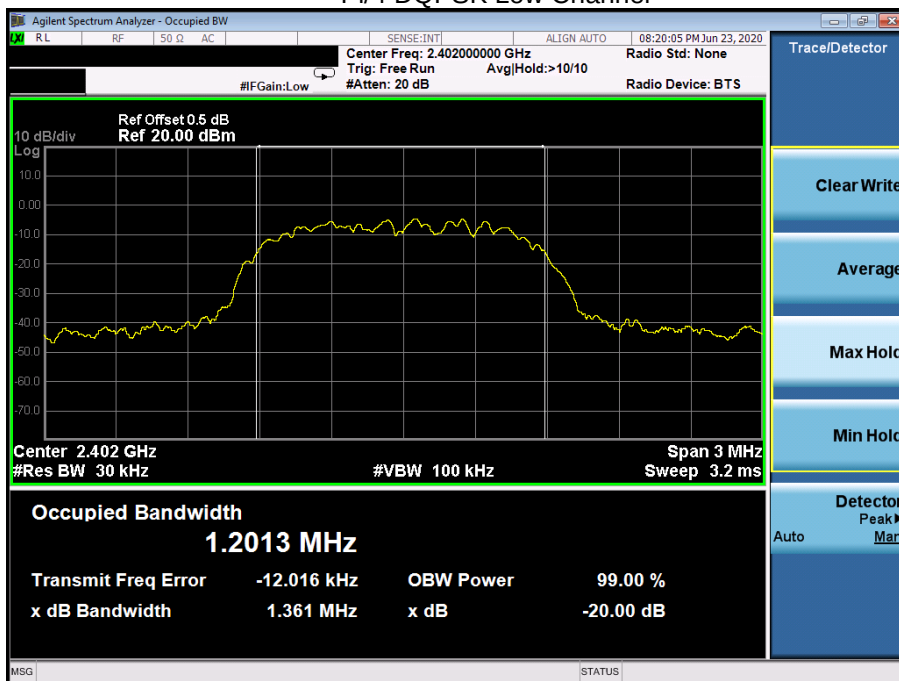


Pi/4 DQPSK Middle Channel

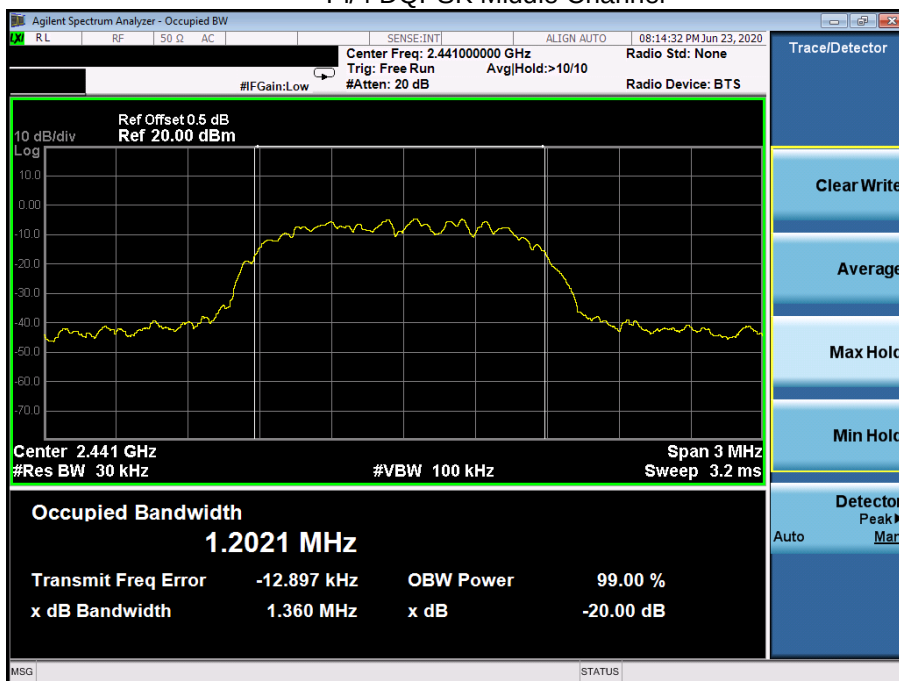


Pi/4 DQPSK High Channel

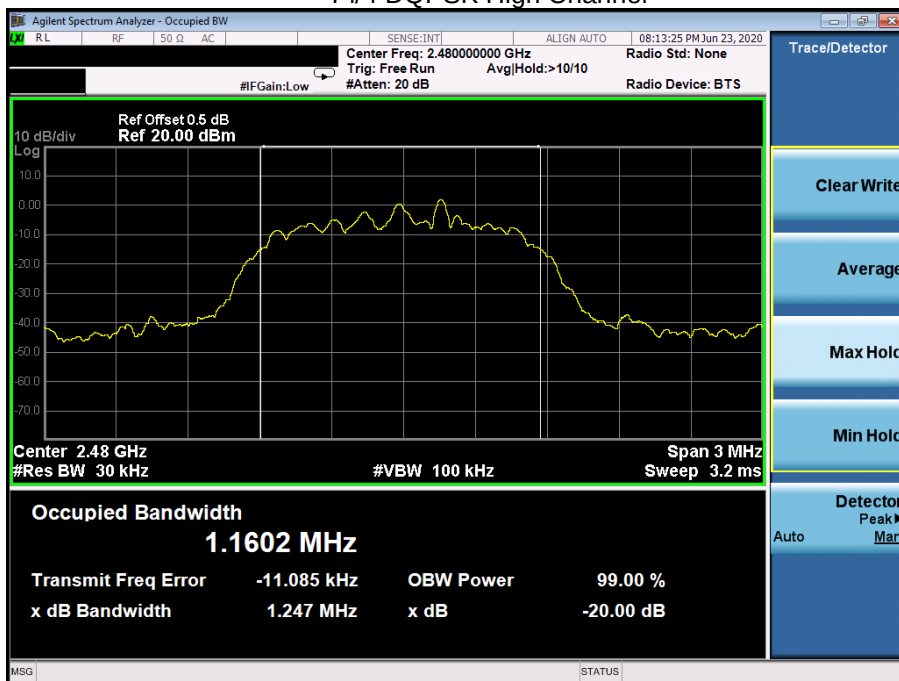


8DPSK Low Channel

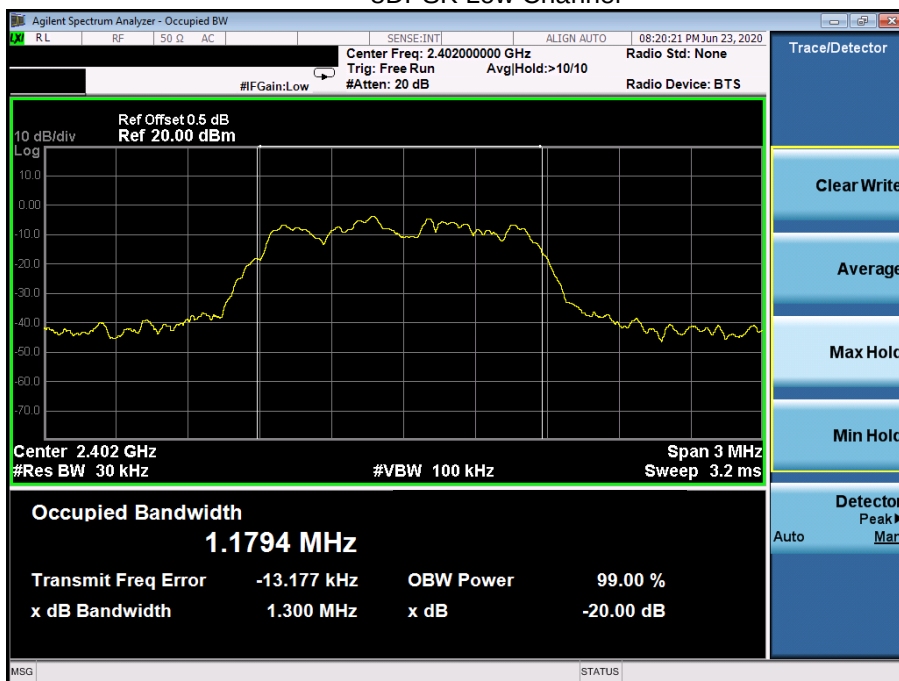

8DPSK Middle Channel

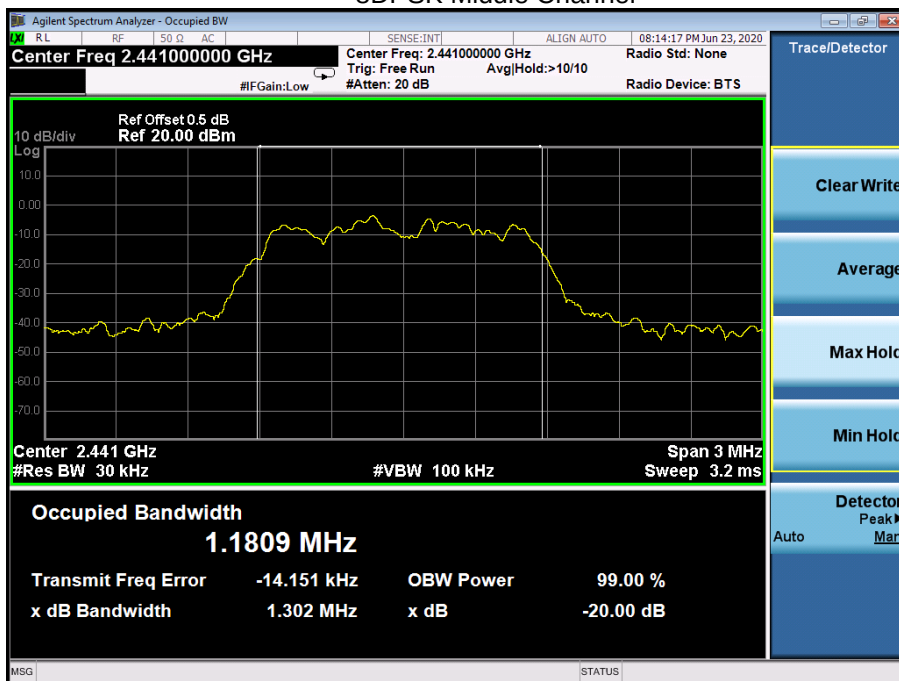


8DPSK High Channel

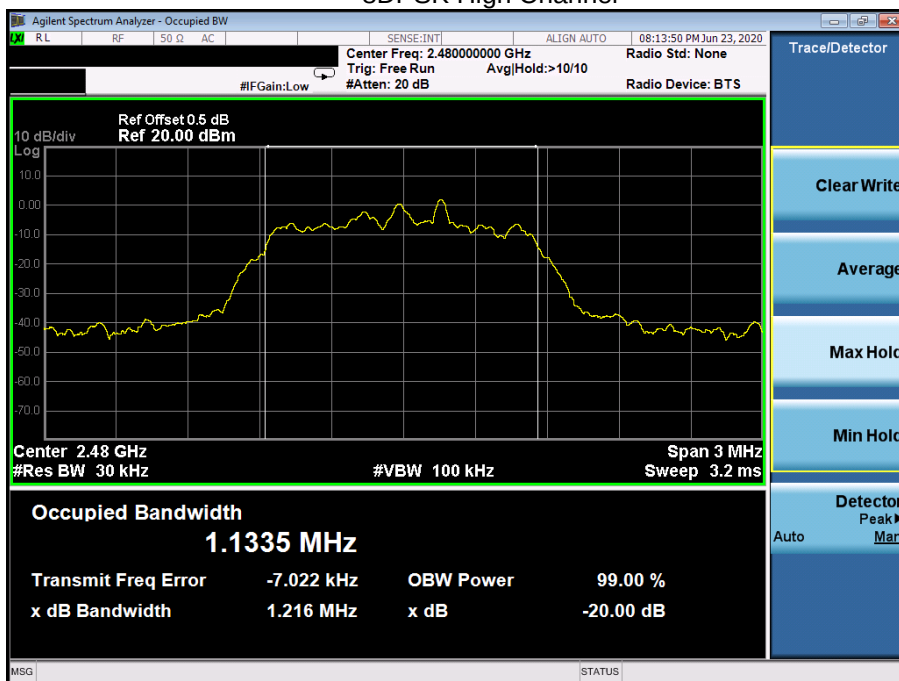

10. MAXIMUM PEAK OUTPUT POWER

10.1 Block Diagram Of Test Setup

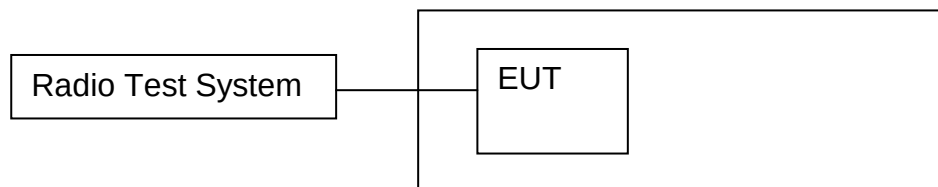

10.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


10.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.4 Test Result

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	3.81	21
GFSK	Middle	3.91	21
GFSK	High	3.29	21
Pi/4 DQPSK	Low	4.89	21
Pi/4 DQPSK	Middle	4.88	21
Pi/4 DQPSK	High	4.24	21
8DPSK	Low	5.03	21
8DPSK	Middle	5.05	21
8DPSK	High	4.43	21


Test plots
GFSK Low Channel

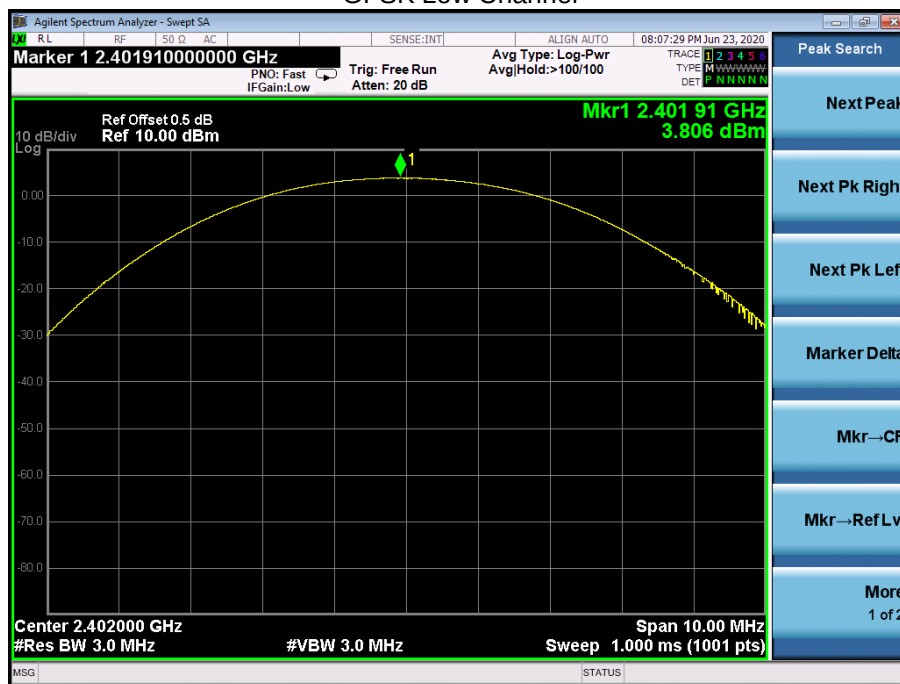


GFSK Middle Channel

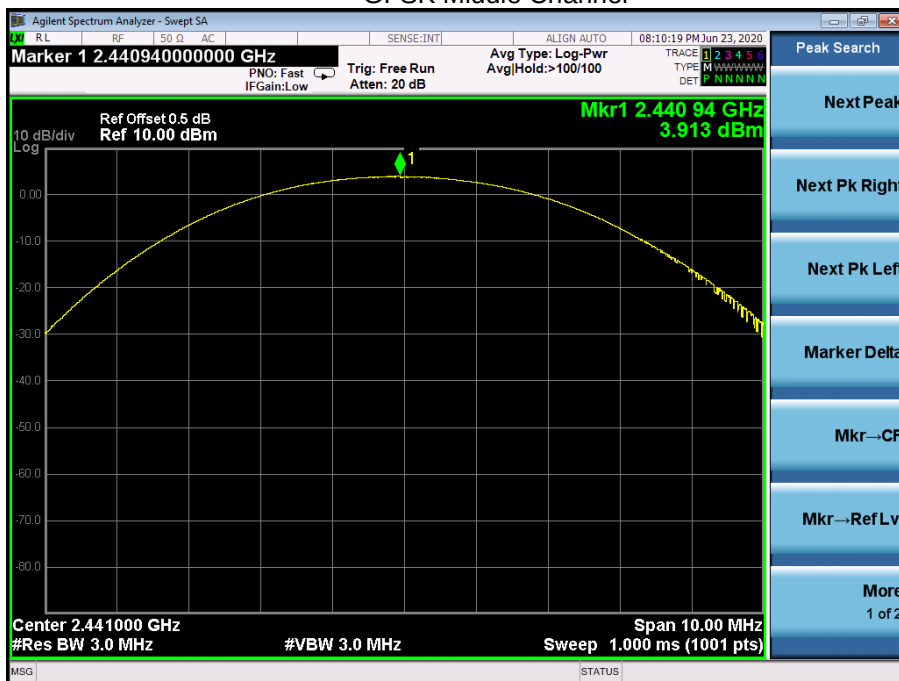


GFSK High Channel

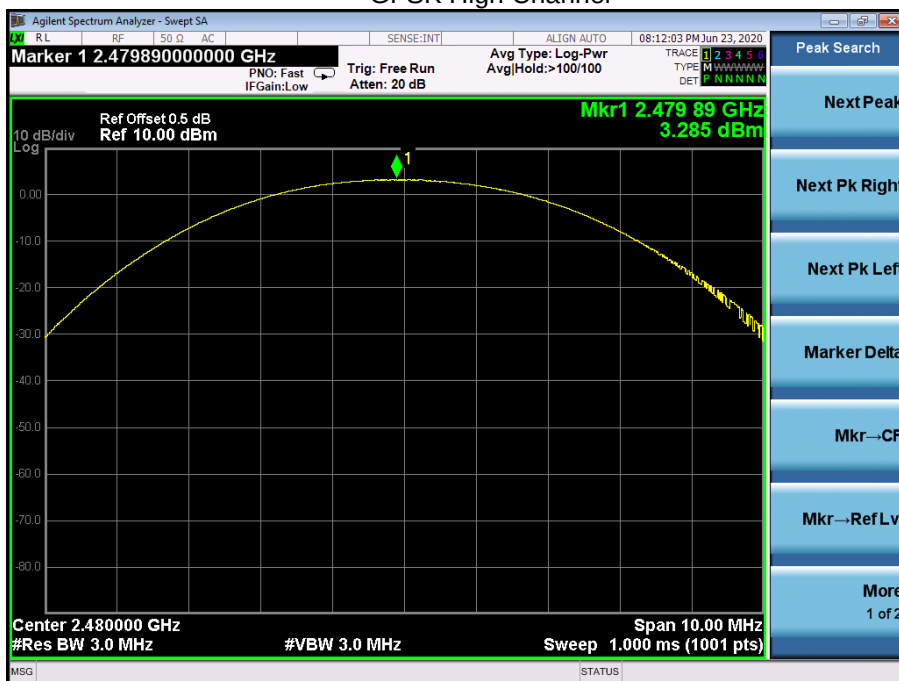


Pi/4 DQPSK Low Channel

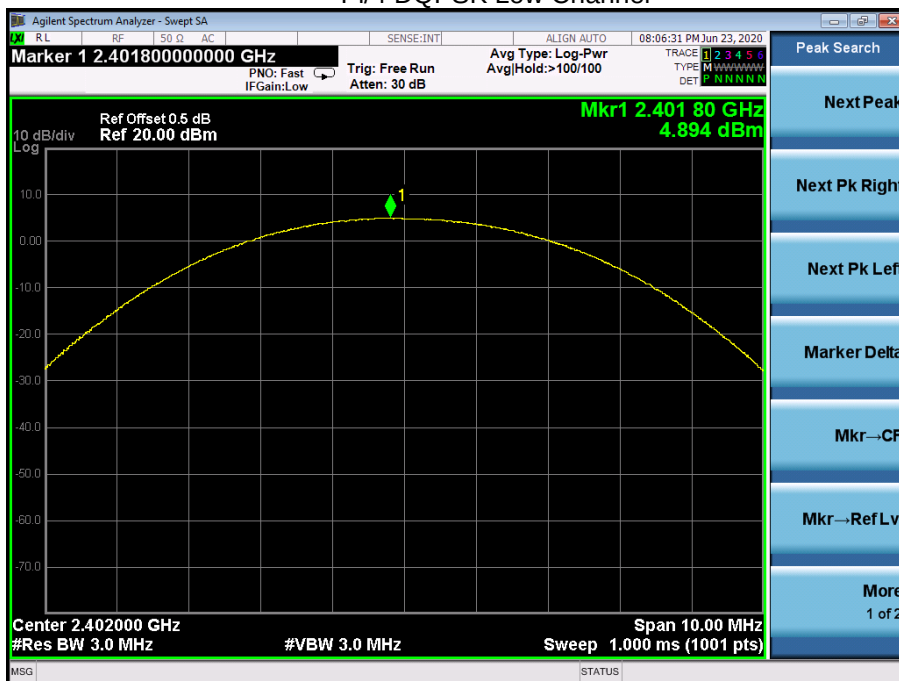


Pi/4 DQPSK Middle Channel

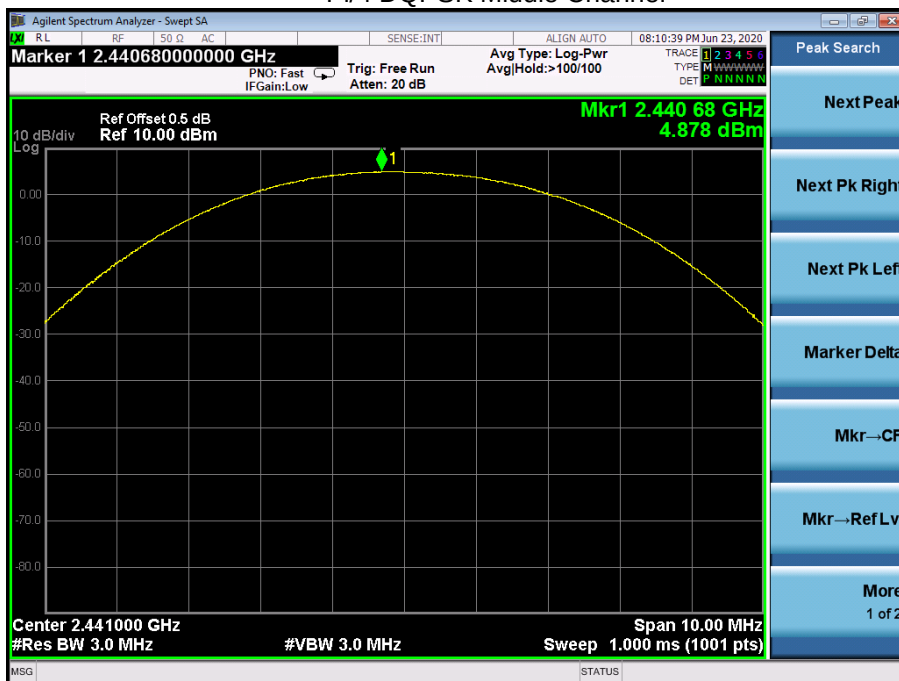


Pi/4 DQPSK High Channel

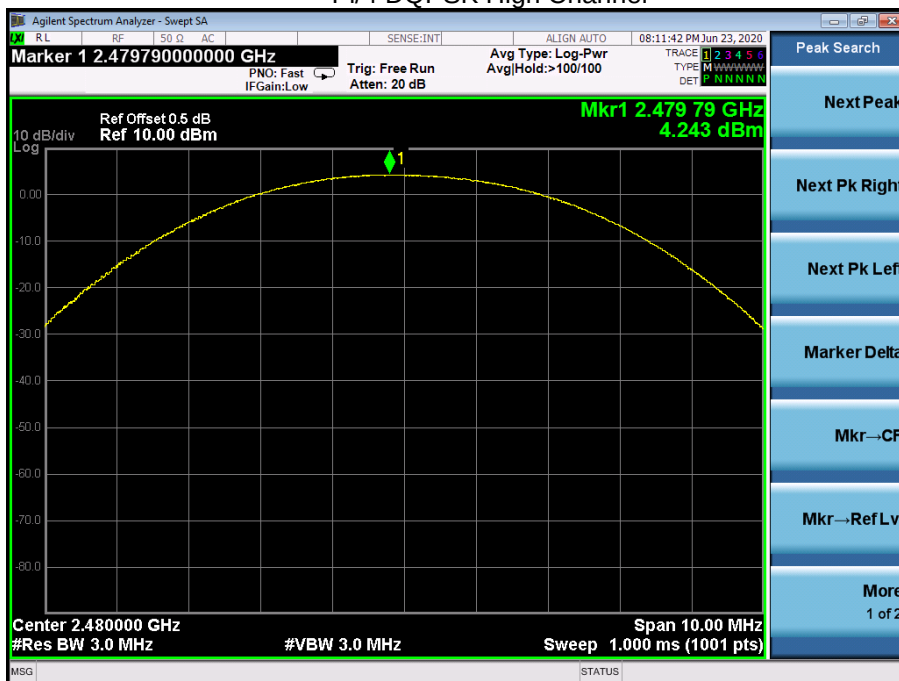


8DPSK Low Channel

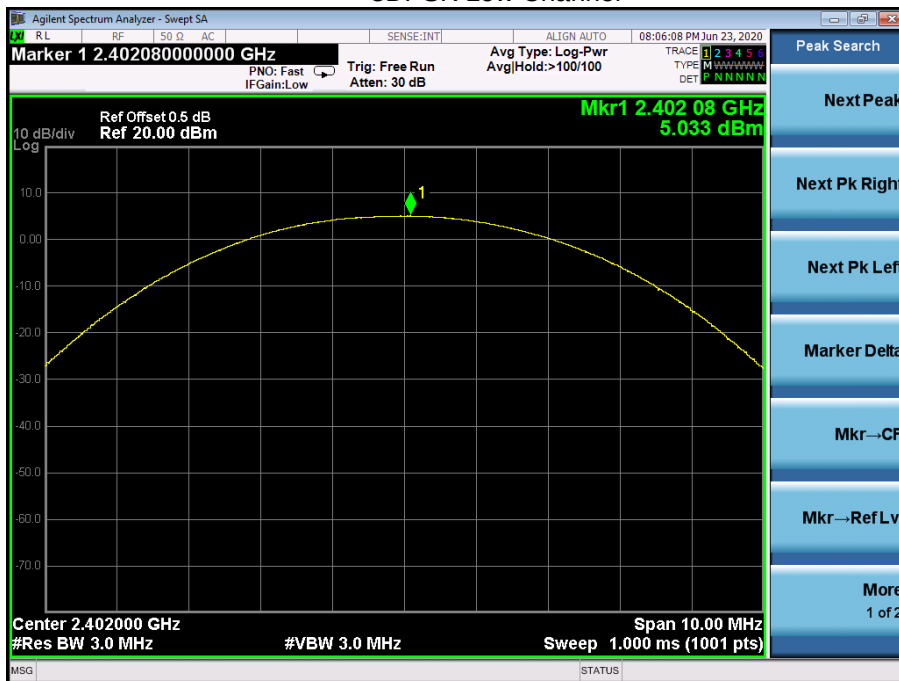

8DPSK Middle Channel

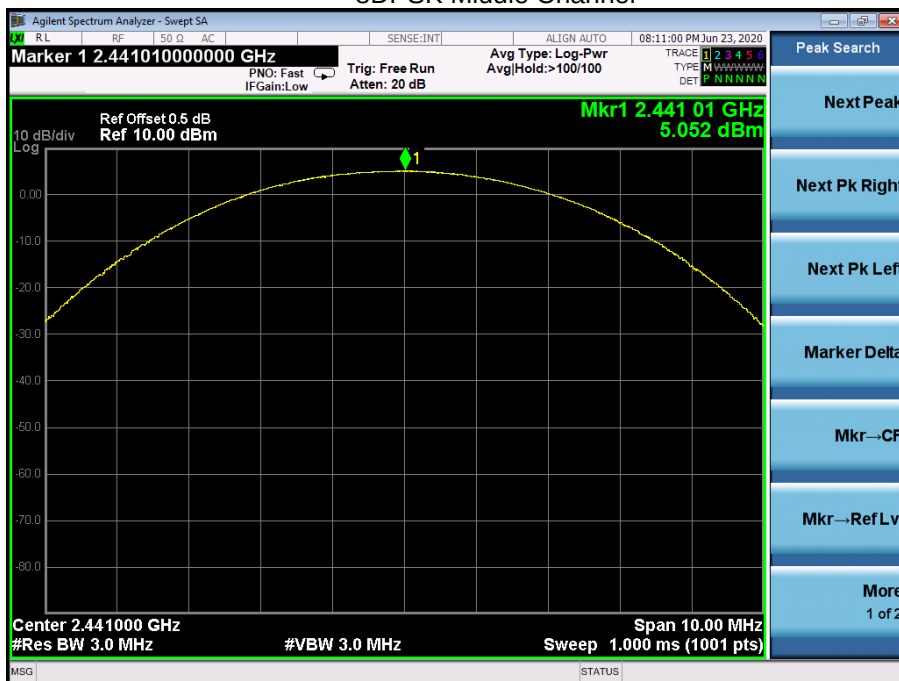


8DPSK High Channel

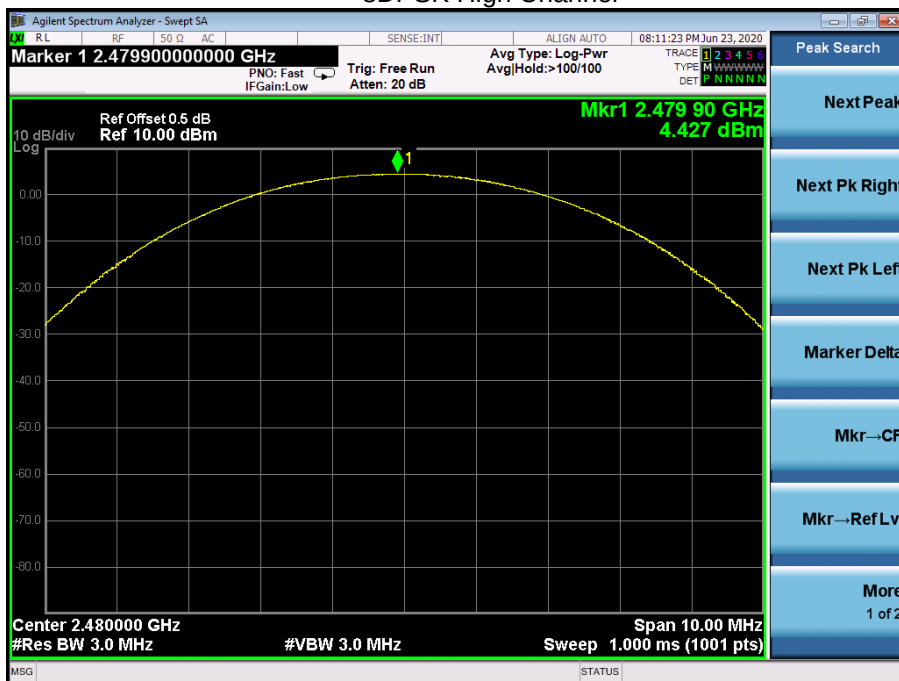

11. HOPPING CHANNEL SEPARATION

11.1 Block Diagram Of Test Setup

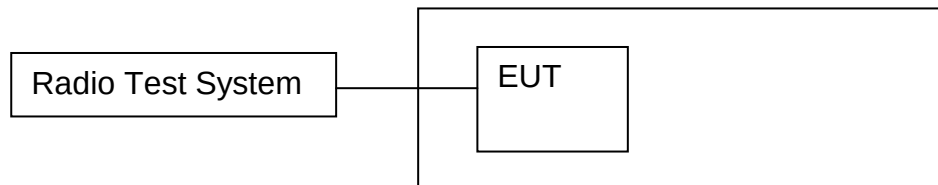

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.693	PASS
GFSK	Middle	0.998	0.693	PASS
GFSK	High	0.998	0.611	PASS
Pi/4 DQPSK	Low	1.000	0.907	PASS
Pi/4 DQPSK	Middle	1.004	0.907	PASS
Pi/4 DQPSK	High	1.002	0.831	PASS
8DPSK	Low	1.000	0.867	PASS
8DPSK	Middle	1.010	0.868	PASS
8DPSK	High	1.006	0.811	PASS

Test plots
GFSK Low Channel




GFSK Middle Channel




GFSK High Channel




Pi/4 DQPSK Low Channel

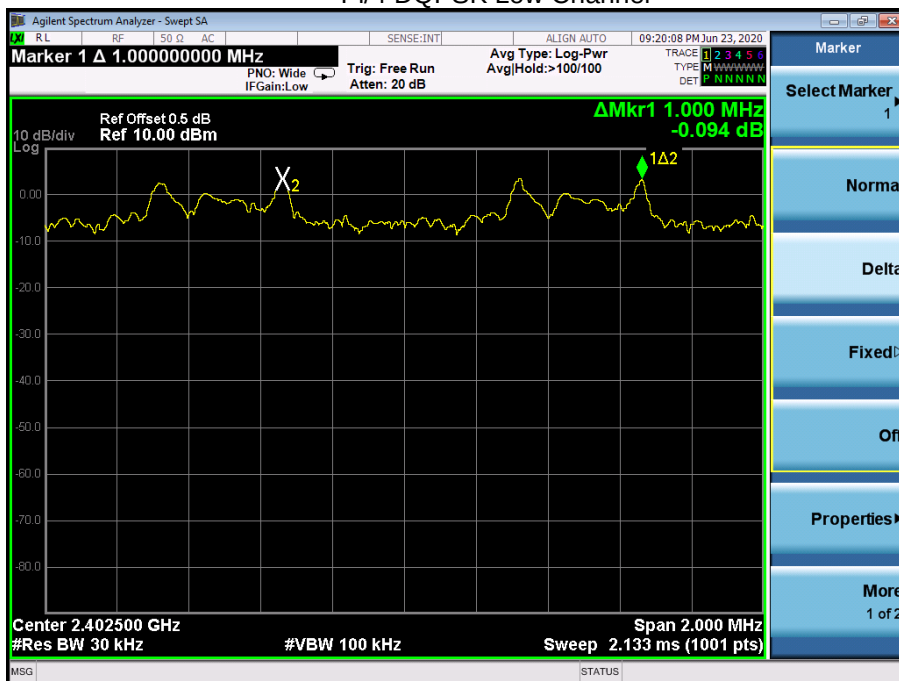


Pi/4 DQPSK Middle Channel

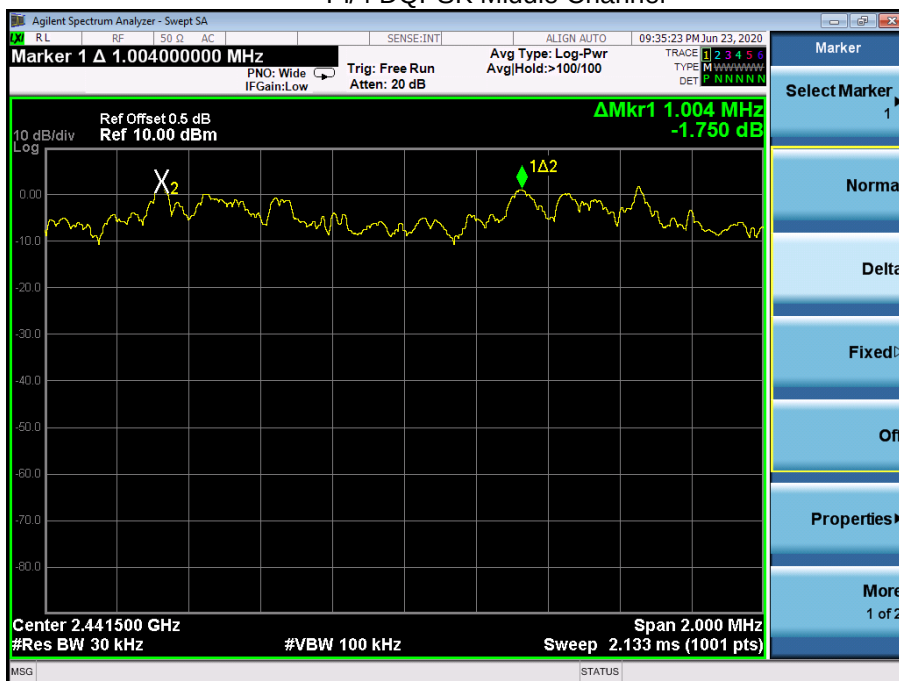


Pi/4 DQPSK High Channel

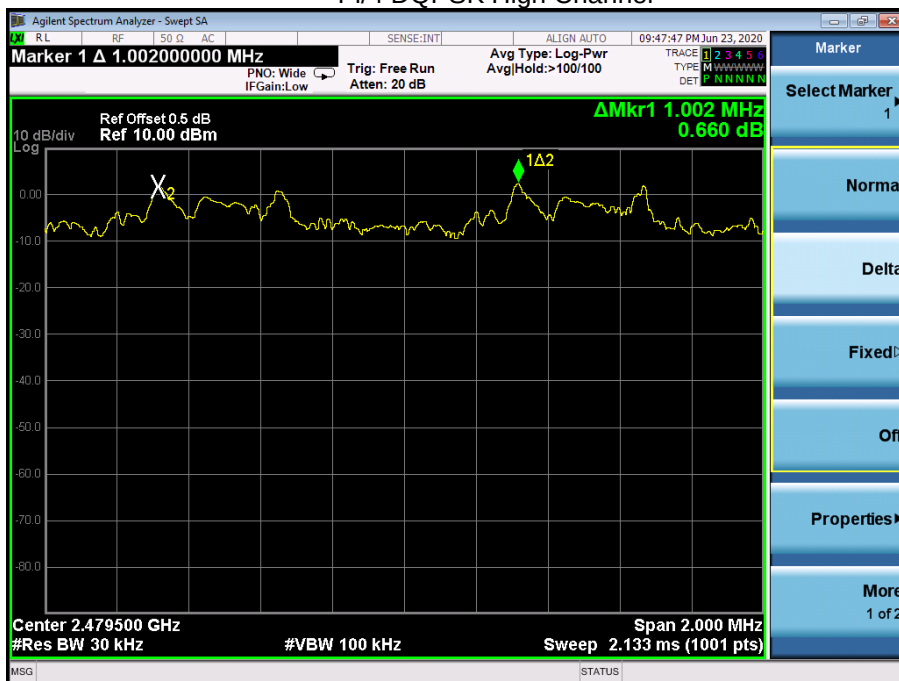


8DPSK Low Channel

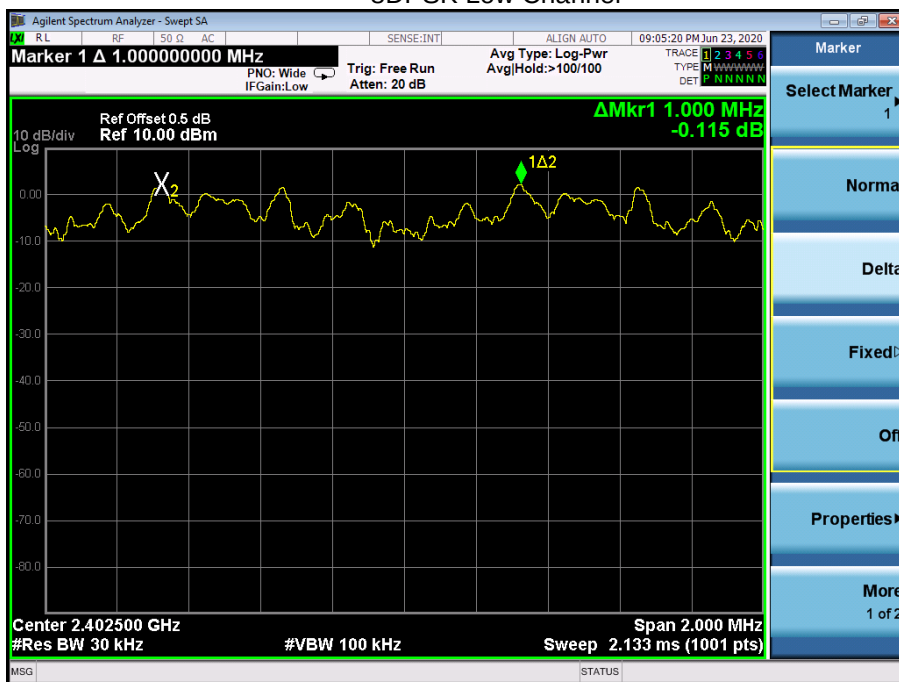

8DPSK Middle Channel

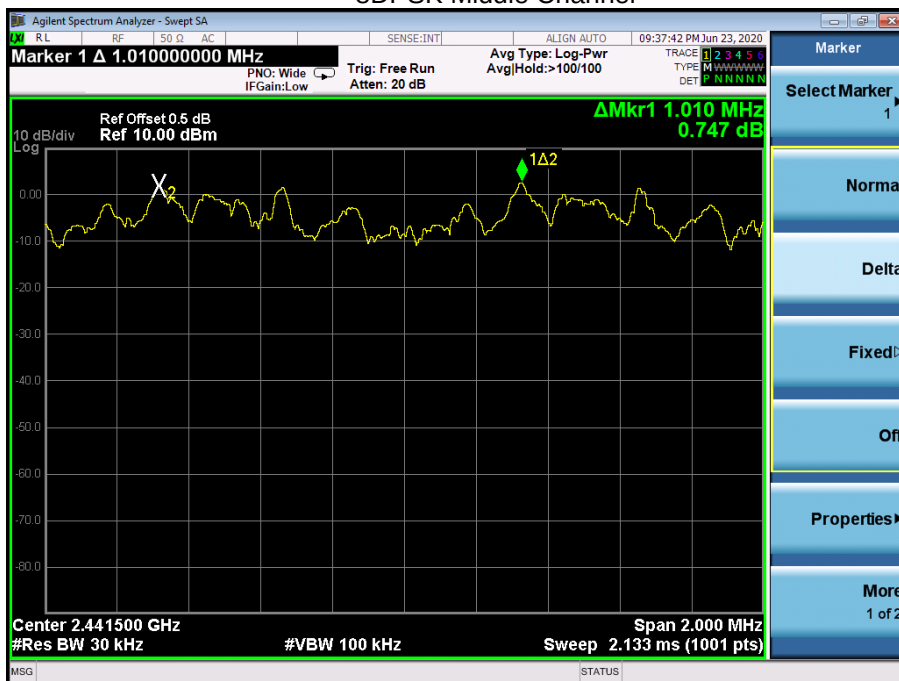


8DPSK High Channel

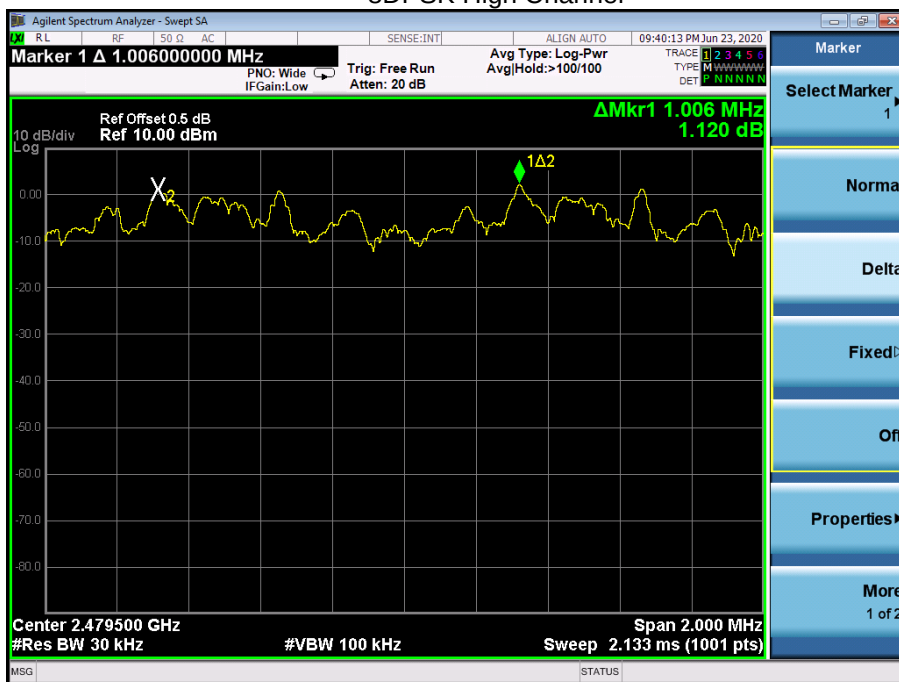

12. NUMBER OF HOPPING FREQUENCY

12.1 Block Diagram Of Test Setup

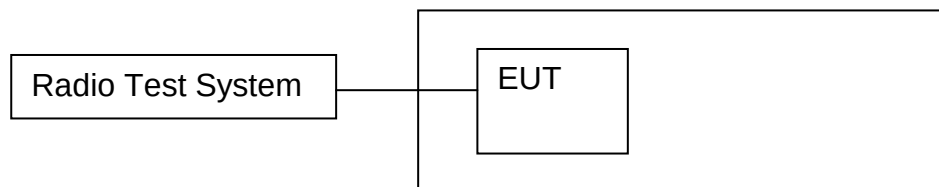

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;