




Modulation	be EHT20	Test Freq. (MHz)	6475						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	24.85	54.00	-29.15	32.30	-7.45	Average	100	17
2	1094.00	38.02	74.00	-35.98	45.47	-7.45	Peak	100	17
3	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	21
4	4844.00	46.34	74.00	-27.66	46.12	0.22	Peak	100	21
5 *	6475.00	98.45			94.99	3.46	Average	218	304
6 *	6475.00	111.57			108.11	3.46	Peak	218	304
7	12950.00	44.84	68.20	-23.36	37.83	7.01	Average	100	41
8	12950.00	55.72	88.20	-32.48	48.71	7.01	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

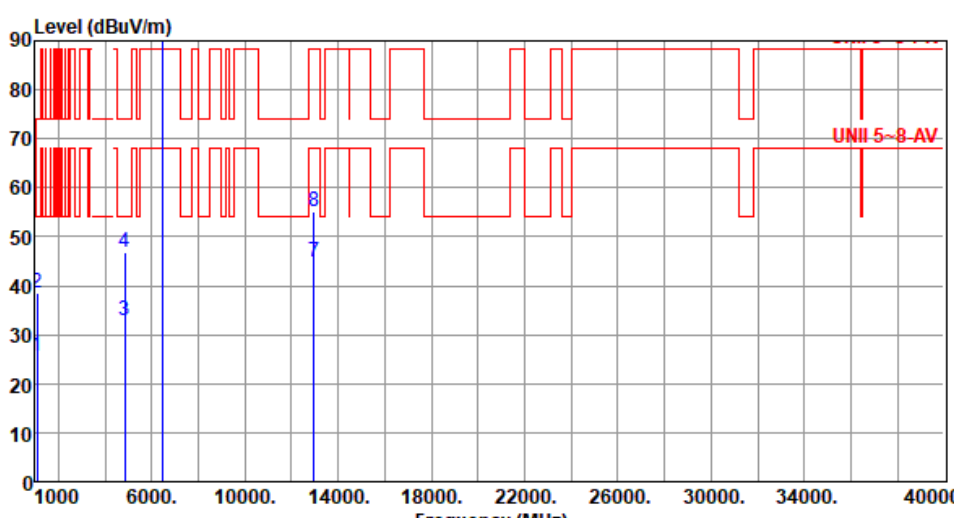

Modulation	be EHT20		Test Freq. (MHz)		6475																																																																																														
Polarization	Vertical																																																																																																		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.61</td><td>54.00</td><td>-28.39</td><td>33.06</td><td>-7.45</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>1094.00</td><td>38.42</td><td>74.00</td><td>-35.58</td><td>45.87</td><td>-7.45</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>4844.00</td><td>32.95</td><td>54.00</td><td>-21.05</td><td>32.73</td><td>0.22</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>4844.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>46.59</td><td>0.22</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5 *</td><td>6475.00</td><td>96.45</td><td></td><td></td><td>92.99</td><td>3.46</td><td>Average</td><td>316</td><td>24</td></tr><tr><td>6 *</td><td>6475.00</td><td>109.82</td><td></td><td></td><td>106.36</td><td>3.46</td><td>Peak</td><td>316</td><td>24</td></tr><tr><td>7</td><td>12950.00</td><td>44.72</td><td>68.20</td><td>-23.48</td><td>37.71</td><td>7.01</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>8</td><td>12950.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>48.28</td><td>7.01</td><td>Peak</td><td>100</td><td>12</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.61	54.00	-28.39	33.06	-7.45	Average	100	49	2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	49	3	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	65	4	4844.00	46.81	74.00	-27.19	46.59	0.22	Peak	100	65	5 *	6475.00	96.45			92.99	3.46	Average	316	24	6 *	6475.00	109.82			106.36	3.46	Peak	316	24	7	12950.00	44.72	68.20	-23.48	37.71	7.01	Average	100	12	8	12950.00	55.29	88.20	-32.91	48.28	7.01	Peak	100	12
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																										
1	1094.00	25.61	54.00	-28.39	33.06	-7.45	Average	100	49																																																																																										
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	49																																																																																										
3	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	65																																																																																										
4	4844.00	46.81	74.00	-27.19	46.59	0.22	Peak	100	65																																																																																										
5 *	6475.00	96.45			92.99	3.46	Average	316	24																																																																																										
6 *	6475.00	109.82			106.36	3.46	Peak	316	24																																																																																										
7	12950.00	44.72	68.20	-23.48	37.71	7.01	Average	100	12																																																																																										
8	12950.00	55.29	88.20	-32.91	48.28	7.01	Peak	100	12																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	6515						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	28
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	28
3	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	16
4	4844.00	46.33	74.00	-27.67	46.11	0.22	Peak	100	16
5 *	6515.00	98.36			94.71	3.65	Average	214	301
6 *	6515.00	111.06			107.41	3.65	Peak	214	301
7	13030.00	44.84	68.20	-23.36	38.01	6.83	Average	100	33
8	13030.00	55.62	88.20	-32.58	48.79	6.83	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6515																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>24.96</td><td>54.00</td><td>-29.04</td><td>32.41</td><td>-7.45</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>1094.00</td><td>38.15</td><td>74.00</td><td>-35.85</td><td>45.60</td><td>-7.45</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>4844.00</td><td>32.71</td><td>54.00</td><td>-21.29</td><td>32.49</td><td>0.22</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>4</td><td>4844.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>46.23</td><td>0.22</td><td>Peak</td><td>100</td><td>11</td></tr><tr><td>5 *</td><td>6515.00</td><td>96.11</td><td></td><td></td><td>92.46</td><td>3.65</td><td>Average</td><td>312</td><td>18</td></tr><tr><td>6 *</td><td>6515.00</td><td>109.54</td><td></td><td></td><td>105.89</td><td>3.65</td><td>Peak</td><td>312</td><td>18</td></tr><tr><td>7</td><td>13030.00</td><td>44.54</td><td>68.20</td><td>-23.66</td><td>37.71</td><td>6.83</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>8</td><td>13030.00</td><td>55.31</td><td>88.20</td><td>-32.89</td><td>48.48</td><td>6.83</td><td>Peak</td><td>100</td><td>14</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.96	54.00	-29.04	32.41	-7.45	Average	100	21	2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	21	3	4844.00	32.71	54.00	-21.29	32.49	0.22	Average	100	11	4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	11	5 *	6515.00	96.11			92.46	3.65	Average	312	18	6 *	6515.00	109.54			105.89	3.65	Peak	312	18	7	13030.00	44.54	68.20	-23.66	37.71	6.83	Average	100	14	8	13030.00	55.31	88.20	-32.89	48.48	6.83	Peak	100	14
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.96	54.00	-29.04	32.41	-7.45	Average	100	21																																																																																				
2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	21																																																																																				
3	4844.00	32.71	54.00	-21.29	32.49	0.22	Average	100	11																																																																																				
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	11																																																																																				
5 *	6515.00	96.11			92.46	3.65	Average	312	18																																																																																				
6 *	6515.00	109.54			105.89	3.65	Peak	312	18																																																																																				
7	13030.00	44.54	68.20	-23.66	37.71	6.83	Average	100	14																																																																																				
8	13030.00	55.31	88.20	-32.89	48.48	6.83	Peak	100	14																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.75</td><td>54.00</td><td>-29.25</td><td>32.20</td><td>-7.45</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>1094.00</td><td>38.02</td><td>74.00</td><td>-35.98</td><td>45.47</td><td>-7.45</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>4844.00</td><td>33.21</td><td>54.00</td><td>-20.79</td><td>32.99</td><td>0.22</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>4</td><td>4844.00</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>46.13</td><td>0.22</td><td>Peak</td><td>100</td><td>12</td></tr><tr><td>5 *</td><td>6535.00</td><td>98.12</td><td></td><td></td><td>94.44</td><td>3.68</td><td>Average</td><td>219</td><td>304</td></tr><tr><td>6 *</td><td>6535.00</td><td>110.86</td><td></td><td></td><td>107.18</td><td>3.68</td><td>Peak</td><td>219</td><td>304</td></tr><tr><td>7</td><td>13070.00</td><td>45.02</td><td>68.20</td><td>-23.18</td><td>38.22</td><td>6.80</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>8</td><td>13070.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>49.03</td><td>6.80</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.75	54.00	-29.25	32.20	-7.45	Average	100	27	2	1094.00	38.02	74.00	-35.98	45.47	-7.45	Peak	100	27	3	4844.00	33.21	54.00	-20.79	32.99	0.22	Average	100	12	4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	12	5 *	6535.00	98.12			94.44	3.68	Average	219	304	6 *	6535.00	110.86			107.18	3.68	Peak	219	304	7	13070.00	45.02	68.20	-23.18	38.22	6.80	Average	100	19	8	13070.00	55.83	88.20	-32.37	49.03	6.80	Peak	100	19
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.75	54.00	-29.25	32.20	-7.45	Average	100	27																																																																																				
2	1094.00	38.02	74.00	-35.98	45.47	-7.45	Peak	100	27																																																																																				
3	4844.00	33.21	54.00	-20.79	32.99	0.22	Average	100	12																																																																																				
4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	12																																																																																				
5 *	6535.00	98.12			94.44	3.68	Average	219	304																																																																																				
6 *	6535.00	110.86			107.18	3.68	Peak	219	304																																																																																				
7	13070.00	45.02	68.20	-23.18	38.22	6.80	Average	100	19																																																																																				
8	13070.00	55.83	88.20	-32.37	49.03	6.80	Peak	100	19																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.36</td><td>54.00</td><td>-28.64</td><td>32.81</td><td>-7.45</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>2</td><td>1094.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.90</td><td>-7.45</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>3</td><td>4844.00</td><td>33.15</td><td>54.00</td><td>-20.85</td><td>32.93</td><td>0.22</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>4</td><td>4844.00</td><td>46.82</td><td>74.00</td><td>-27.18</td><td>46.60</td><td>0.22</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>5 *</td><td>6535.00</td><td>96.04</td><td></td><td></td><td>92.36</td><td>3.68</td><td>Average</td><td>311</td><td>26</td></tr><tr><td>6 *</td><td>6535.00</td><td>109.38</td><td></td><td></td><td>105.70</td><td>3.68</td><td>Peak</td><td>311</td><td>26</td></tr><tr><td>7</td><td>13070.00</td><td>44.91</td><td>68.20</td><td>-23.29</td><td>38.11</td><td>6.80</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>8</td><td>13070.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>48.82</td><td>6.80</td><td>Peak</td><td>100</td><td>32</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.36	54.00	-28.64	32.81	-7.45	Average	100	51	2	1094.00	38.45	74.00	-35.55	45.90	-7.45	Peak	100	51	3	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	39	4	4844.00	46.82	74.00	-27.18	46.60	0.22	Peak	100	39	5 *	6535.00	96.04			92.36	3.68	Average	311	26	6 *	6535.00	109.38			105.70	3.68	Peak	311	26	7	13070.00	44.91	68.20	-23.29	38.11	6.80	Average	100	32	8	13070.00	55.62	88.20	-32.58	48.82	6.80	Peak	100	32
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.36	54.00	-28.64	32.81	-7.45	Average	100	51																																																																																				
2	1094.00	38.45	74.00	-35.55	45.90	-7.45	Peak	100	51																																																																																				
3	4844.00	33.15	54.00	-20.85	32.93	0.22	Average	100	39																																																																																				
4	4844.00	46.82	74.00	-27.18	46.60	0.22	Peak	100	39																																																																																				
5 *	6535.00	96.04			92.36	3.68	Average	311	26																																																																																				
6 *	6535.00	109.38			105.70	3.68	Peak	311	26																																																																																				
7	13070.00	44.91	68.20	-23.29	38.11	6.80	Average	100	32																																																																																				
8	13070.00	55.62	88.20	-32.58	48.82	6.80	Peak	100	32																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

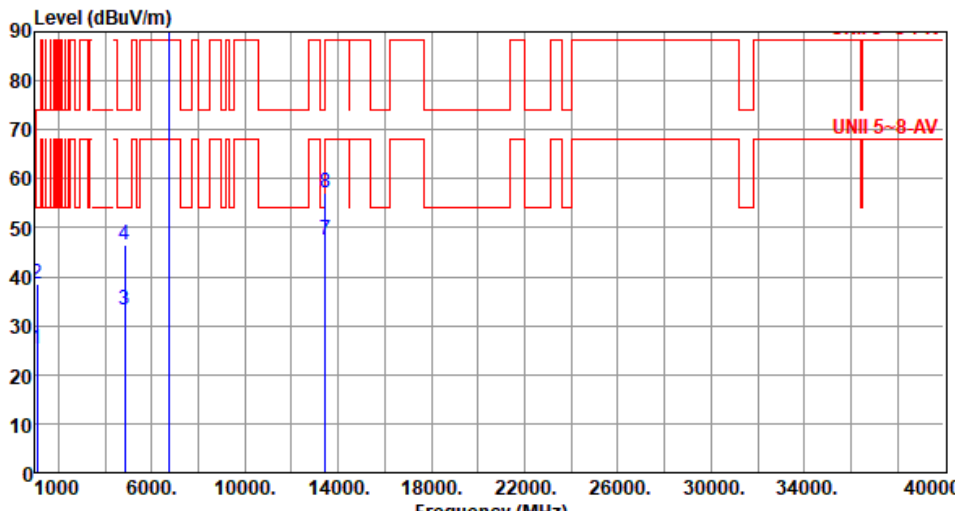

Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.35	54.00	-28.65	32.80	-7.45	Average	100	27
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	27
3	4844.00	33.19	54.00	-20.81	32.97	0.22	Average	100	44
4	4844.00	46.34	74.00	-27.66	46.12	0.22	Peak	100	44
5 *	6715.00	98.86			95.00	3.86	Average	214	305
6 *	6715.00	111.32			107.46	3.86	Peak	214	305
7	13430.00	47.41	68.20	-20.79	40.13	7.28	Average	100	45
8	13430.00	57.02	88.20	-31.18	49.74	7.28	Peak	100	45

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6715																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.95</td><td>54.00</td><td>-29.05</td><td>32.40</td><td>-7.45</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>1094.00</td><td>38.04</td><td>74.00</td><td>-35.96</td><td>45.49</td><td>-7.45</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>4844.00</td><td>32.61</td><td>54.00</td><td>-21.39</td><td>32.39</td><td>0.22</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>4844.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>46.00</td><td>0.22</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5 *</td><td>6715.00</td><td>94.44</td><td></td><td></td><td>90.58</td><td>3.86</td><td>Average</td><td>306</td><td>29</td></tr><tr><td>6 *</td><td>6715.00</td><td>109.82</td><td></td><td></td><td>105.96</td><td>3.86</td><td>Peak</td><td>306</td><td>29</td></tr><tr><td>7</td><td>13430.00</td><td>47.29</td><td>68.20</td><td>-20.91</td><td>40.01</td><td>7.28</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>13430.00</td><td>57.08</td><td>88.20</td><td>-31.12</td><td>49.80</td><td>7.28</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.95	54.00	-29.05	32.40	-7.45	Average	100	36	2	1094.00	38.04	74.00	-35.96	45.49	-7.45	Peak	100	36	3	4844.00	32.61	54.00	-21.39	32.39	0.22	Average	100	47	4	4844.00	46.22	74.00	-27.78	46.00	0.22	Peak	100	47	5 *	6715.00	94.44			90.58	3.86	Average	306	29	6 *	6715.00	109.82			105.96	3.86	Peak	306	29	7	13430.00	47.29	68.20	-20.91	40.01	7.28	Average	100	35	8	13430.00	57.08	88.20	-31.12	49.80	7.28	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.95	54.00	-29.05	32.40	-7.45	Average	100	36																																																																																				
2	1094.00	38.04	74.00	-35.96	45.49	-7.45	Peak	100	36																																																																																				
3	4844.00	32.61	54.00	-21.39	32.39	0.22	Average	100	47																																																																																				
4	4844.00	46.22	74.00	-27.78	46.00	0.22	Peak	100	47																																																																																				
5 *	6715.00	94.44			90.58	3.86	Average	306	29																																																																																				
6 *	6715.00	109.82			105.96	3.86	Peak	306	29																																																																																				
7	13430.00	47.29	68.20	-20.91	40.01	7.28	Average	100	35																																																																																				
8	13430.00	57.08	88.20	-31.12	49.80	7.28	Peak	100	35																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.45</td><td>54.00</td><td>-28.55</td><td>32.90</td><td>-7.45</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>1094.00</td><td>38.62</td><td>74.00</td><td>-35.38</td><td>46.07</td><td>-7.45</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>4844.00</td><td>33.42</td><td>54.00</td><td>-20.58</td><td>33.20</td><td>0.22</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>4844.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>46.29</td><td>0.22</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5 *</td><td>6855.00</td><td>98.45</td><td></td><td></td><td>94.46</td><td>3.99</td><td>Average</td><td>218</td><td>295</td></tr><tr><td>6 *</td><td>6855.00</td><td>110.96</td><td></td><td></td><td>106.97</td><td>3.99</td><td>Peak</td><td>218</td><td>295</td></tr><tr><td>7</td><td>13710.00</td><td>47.52</td><td>68.20</td><td>-20.68</td><td>40.27</td><td>7.25</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>8</td><td>13710.00</td><td>57.24</td><td>88.20</td><td>-30.96</td><td>49.99</td><td>7.25</td><td>Peak</td><td>100</td><td>39</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.45	54.00	-28.55	32.90	-7.45	Average	100	65	2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	65	3	4844.00	33.42	54.00	-20.58	33.20	0.22	Average	100	48	4	4844.00	46.51	74.00	-27.49	46.29	0.22	Peak	100	48	5 *	6855.00	98.45			94.46	3.99	Average	218	295	6 *	6855.00	110.96			106.97	3.99	Peak	218	295	7	13710.00	47.52	68.20	-20.68	40.27	7.25	Average	100	39	8	13710.00	57.24	88.20	-30.96	49.99	7.25	Peak	100	39
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.45	54.00	-28.55	32.90	-7.45	Average	100	65																																																																																				
2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	65																																																																																				
3	4844.00	33.42	54.00	-20.58	33.20	0.22	Average	100	48																																																																																				
4	4844.00	46.51	74.00	-27.49	46.29	0.22	Peak	100	48																																																																																				
5 *	6855.00	98.45			94.46	3.99	Average	218	295																																																																																				
6 *	6855.00	110.96			106.97	3.99	Peak	218	295																																																																																				
7	13710.00	47.52	68.20	-20.68	40.27	7.25	Average	100	39																																																																																				
8	13710.00	57.24	88.20	-30.96	49.99	7.25	Peak	100	39																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																	
Level (dBUV/m) <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td>dBuV/m</td><td>dB</td><td>reading</td><td>dB/m</td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>dBuV</td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>1094.00</td><td>25.02</td><td>54.00</td><td>-28.98</td><td>32.47</td><td>-7.45</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>2</td><td>1094.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>45.64</td><td>-7.45</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>3</td><td>4844.00</td><td>32.76</td><td>54.00</td><td>-21.24</td><td>32.54</td><td>0.22</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>4844.00</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>46.19</td><td>0.22</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5 *</td><td>6855.00</td><td>94.05</td><td></td><td></td><td>90.06</td><td>3.99</td><td>Average</td><td>300</td><td>12</td></tr><tr><td>6 *</td><td>6855.00</td><td>109.56</td><td>-----</td><td>-----</td><td>105.57</td><td>3.99</td><td>Peak</td><td>300</td><td>12</td></tr><tr><td>7</td><td>13710.00</td><td>47.35</td><td>68.20</td><td>-20.85</td><td>40.10</td><td>7.25</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>8</td><td>13710.00</td><td>57.15</td><td>88.20</td><td>-31.05</td><td>49.90</td><td>7.25</td><td>Peak</td><td>100</td><td>41</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	23	2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	23	3	4844.00	32.76	54.00	-21.24	32.54	0.22	Average	100	48	4	4844.00	46.41	74.00	-27.59	46.19	0.22	Peak	100	48	5 *	6855.00	94.05			90.06	3.99	Average	300	12	6 *	6855.00	109.56	-----	-----	105.57	3.99	Peak	300	12	7	13710.00	47.35	68.20	-20.85	40.10	7.25	Average	100	41	8	13710.00	57.15	88.20	-31.05	49.90	7.25	Peak	100	41
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
					dBuV			cm	deg																																																																																																								
1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	23																																																																																																								
2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	23																																																																																																								
3	4844.00	32.76	54.00	-21.24	32.54	0.22	Average	100	48																																																																																																								
4	4844.00	46.41	74.00	-27.59	46.19	0.22	Peak	100	48																																																																																																								
5 *	6855.00	94.05			90.06	3.99	Average	300	12																																																																																																								
6 *	6855.00	109.56	-----	-----	105.57	3.99	Peak	300	12																																																																																																								
7	13710.00	47.35	68.20	-20.85	40.10	7.25	Average	100	41																																																																																																								
8	13710.00	57.15	88.20	-31.05	49.90	7.25	Peak	100	41																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.54	54.00	-29.46	31.99	-7.45	Average	100	35
2	1094.00	37.69	74.00	-36.31	45.14	-7.45	Peak	100	35
3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	19
4	4844.00	45.91	74.00	-28.09	45.69	0.22	Peak	100	19
5 *	6875.00	97.35			93.20	4.15	Average	208	293
6 *	6875.00	109.84			105.69	4.15	Peak	208	293
7	13750.00	46.02	68.20	-22.18	38.90	7.12	Average	100	23
8	13750.00	57.51	88.20	-30.69	50.39	7.12	Peak	100	23
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT20	Test Freq. (MHz)	6875
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 11094.0025.3854.00-28.6232.83-7.45Average1005 21094.0038.4174.00-35.5945.86-7.45Peak1005 34844.0032.9154.00-21.0932.690.22Average10014 44844.0046.6274.00-27.3846.400.22Peak10014 5*6875.0092.9488.794.15Average31025 6*6875.00108.41104.264.15Peak31025 713750.0045.9468.20-22.2638.827.12Average10011 813750.0057.3688.20-30.8450.247.12Peak10011			
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency			



Modulation	be EHT20	Test Freq. (MHz)	6895																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.29</td><td>54.00</td><td>-28.71</td><td>32.74</td><td>-7.45</td><td>Average</td><td>100</td><td>6</td></tr><tr><td>2</td><td>1094.00</td><td>38.34</td><td>74.00</td><td>-35.66</td><td>45.79</td><td>-7.45</td><td>Peak</td><td>100</td><td>6</td></tr><tr><td>3</td><td>4844.00</td><td>33.29</td><td>54.00</td><td>-20.71</td><td>33.07</td><td>0.22</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>4</td><td>4844.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>46.29</td><td>0.22</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>5 *</td><td>6895.00</td><td>97.48</td><td></td><td></td><td>93.18</td><td>4.30</td><td>Average</td><td>211</td><td>295</td></tr><tr><td>6 *</td><td>6895.00</td><td>109.96</td><td></td><td></td><td>105.66</td><td>4.30</td><td>Peak</td><td>211</td><td>295</td></tr><tr><td>7</td><td>13790.00</td><td>45.94</td><td>68.20</td><td>-22.26</td><td>38.80</td><td>7.14</td><td>Average</td><td>100</td><td>9</td></tr><tr><td>8</td><td>13790.00</td><td>57.41</td><td>88.20</td><td>-30.79</td><td>50.27</td><td>7.14</td><td>Peak</td><td>100</td><td>9</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	6	2	1094.00	38.34	74.00	-35.66	45.79	-7.45	Peak	100	6	3	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	24	4	4844.00	46.51	74.00	-27.49	46.29	0.22	Peak	100	24	5 *	6895.00	97.48			93.18	4.30	Average	211	295	6 *	6895.00	109.96			105.66	4.30	Peak	211	295	7	13790.00	45.94	68.20	-22.26	38.80	7.14	Average	100	9	8	13790.00	57.41	88.20	-30.79	50.27	7.14	Peak	100	9
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	6																																																																																				
2	1094.00	38.34	74.00	-35.66	45.79	-7.45	Peak	100	6																																																																																				
3	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	24																																																																																				
4	4844.00	46.51	74.00	-27.49	46.29	0.22	Peak	100	24																																																																																				
5 *	6895.00	97.48			93.18	4.30	Average	211	295																																																																																				
6 *	6895.00	109.96			105.66	4.30	Peak	211	295																																																																																				
7	13790.00	45.94	68.20	-22.26	38.80	7.14	Average	100	9																																																																																				
8	13790.00	57.41	88.20	-30.79	50.27	7.14	Peak	100	9																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

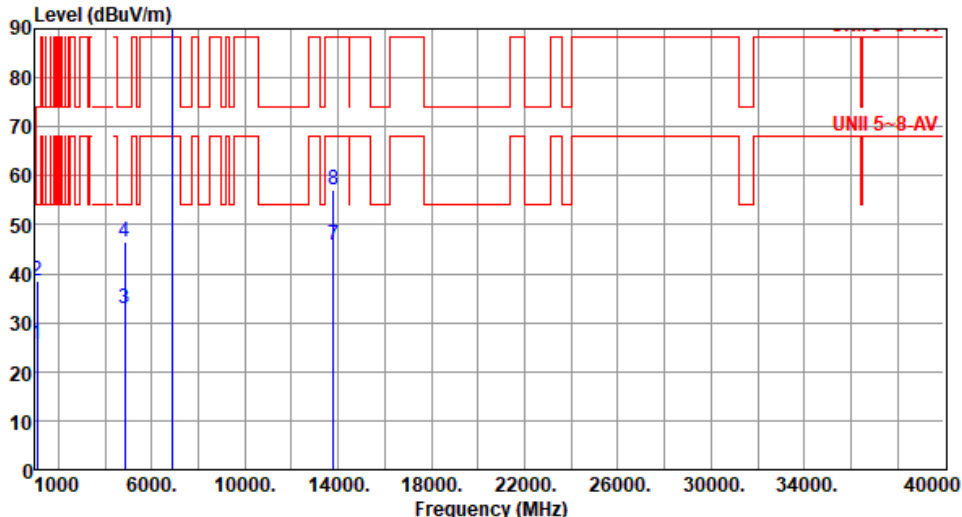


Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.45	54.00	-28.55	32.90	-7.45	Average	100	36
2	1094.00	38.47	74.00	-35.53	45.92	-7.45	Peak	100	36
3	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	23
4	4844.00	46.64	74.00	-27.36	46.42	0.22	Peak	100	23
5 *	6895.00	93.04			88.74	4.30	Average	306	18
6 *	6895.00	108.56			104.26	4.30	Peak	306	18
7	13790.00	45.75	68.20	-22.45	38.61	7.14	Average	100	22
8	13790.00	57.21	88.20	-30.99	50.07	7.14	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT20	Test Freq. (MHz)	7015																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.84</td><td>54.00</td><td>-29.16</td><td>32.29</td><td>-7.45</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>2</td><td>1094.00</td><td>38.15</td><td>74.00</td><td>-35.85</td><td>45.60</td><td>-7.45</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>3</td><td>4844.00</td><td>33.14</td><td>54.00</td><td>-20.86</td><td>32.92</td><td>0.22</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>4</td><td>4844.00</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>46.13</td><td>0.22</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>5 *</td><td>7015.00</td><td>97.58</td><td></td><td></td><td>93.01</td><td>4.57</td><td>Average</td><td>215</td><td>296</td></tr><tr><td>6 *</td><td>7015.00</td><td>110.04</td><td></td><td></td><td>105.47</td><td>4.57</td><td>Peak</td><td>215</td><td>296</td></tr><tr><td>7</td><td>14030.00</td><td>46.12</td><td>68.20</td><td>-22.08</td><td>38.28</td><td>7.84</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>8</td><td>14030.00</td><td>57.51</td><td>88.20</td><td>-30.69</td><td>49.67</td><td>7.84</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1094.00	24.84	54.00	-29.16	32.29	-7.45	Average	100	33	2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	33	3	4844.00	33.14	54.00	-20.86	32.92	0.22	Average	100	24	4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	24	5 *	7015.00	97.58			93.01	4.57	Average	215	296	6 *	7015.00	110.04			105.47	4.57	Peak	215	296	7	14030.00	46.12	68.20	-22.08	38.28	7.84	Average	100	30	8	14030.00	57.51	88.20	-30.69	49.67	7.84	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	1094.00	24.84	54.00	-29.16	32.29	-7.45	Average	100	33																																																																																																								
2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	33																																																																																																								
3	4844.00	33.14	54.00	-20.86	32.92	0.22	Average	100	24																																																																																																								
4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	24																																																																																																								
5 *	7015.00	97.58			93.01	4.57	Average	215	296																																																																																																								
6 *	7015.00	110.04			105.47	4.57	Peak	215	296																																																																																																								
7	14030.00	46.12	68.20	-22.08	38.28	7.84	Average	100	30																																																																																																								
8	14030.00	57.51	88.20	-30.69	49.67	7.84	Peak	100	30																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

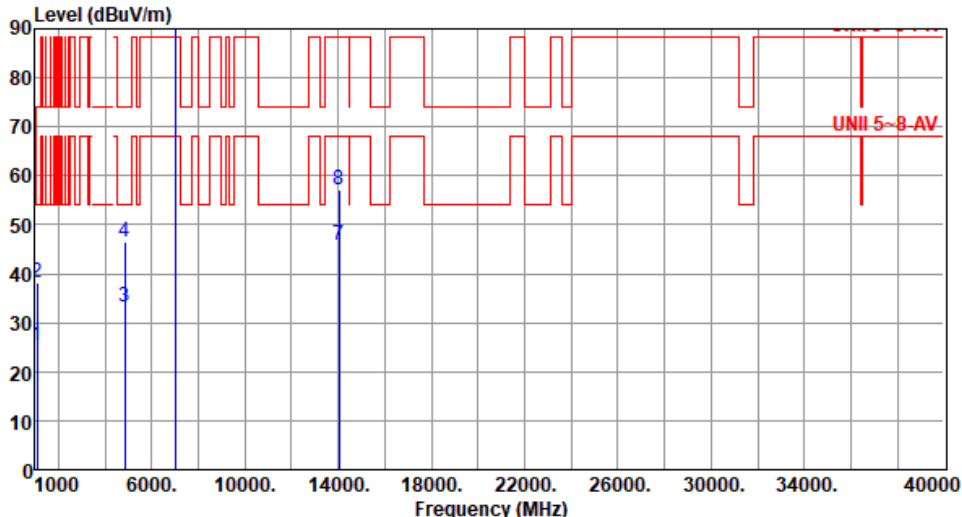


Modulation	be EHT20	Test Freq. (MHz)	7015						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.29	54.00	-28.71	32.74	-7.45	Average	100	48
2	1094.00	38.33	74.00	-35.67	45.78	-7.45	Peak	100	48
3	4844.00	33.08	54.00	-20.92	32.86	0.22	Average	100	52
4	4844.00	46.62	74.00	-27.38	46.40	0.22	Peak	100	52
5 *	7015.00	93.14			88.57	4.57	Average	300	16
6 *	7015.00	108.21			103.64	4.57	Peak	300	16
7	14030.00	45.82	68.20	-22.38	37.98	7.84	Average	100	17
8	14030.00	57.26	88.20	-30.94	49.42	7.84	Peak	100	17

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

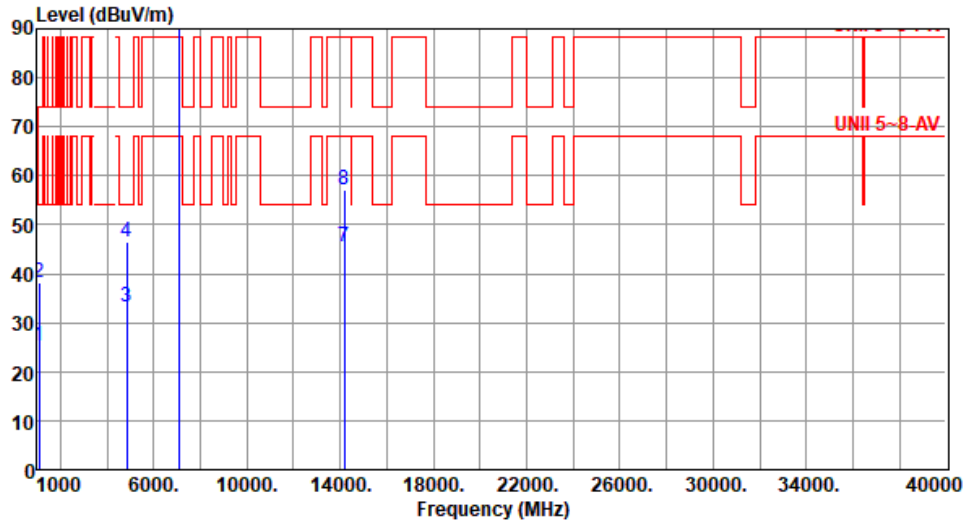


Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.11	54.00	-28.89	32.56	-7.45	Average	100	37
2	1094.00	38.26	74.00	-35.74	45.71	-7.45	Peak	100	37
3	4844.00	33.16	54.00	-20.84	32.94	0.22	Average	100	22
4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	22
5 *	7095.00	97.46			92.48	4.98	Average	213	308
6 *	7095.00	109.82			104.84	4.98	Peak	213	308
7	14190.00	45.66	68.20	-22.54	37.60	8.06	Average	100	28
8	14190.00	57.25	88.20	-30.95	49.19	8.06	Peak	100	28
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

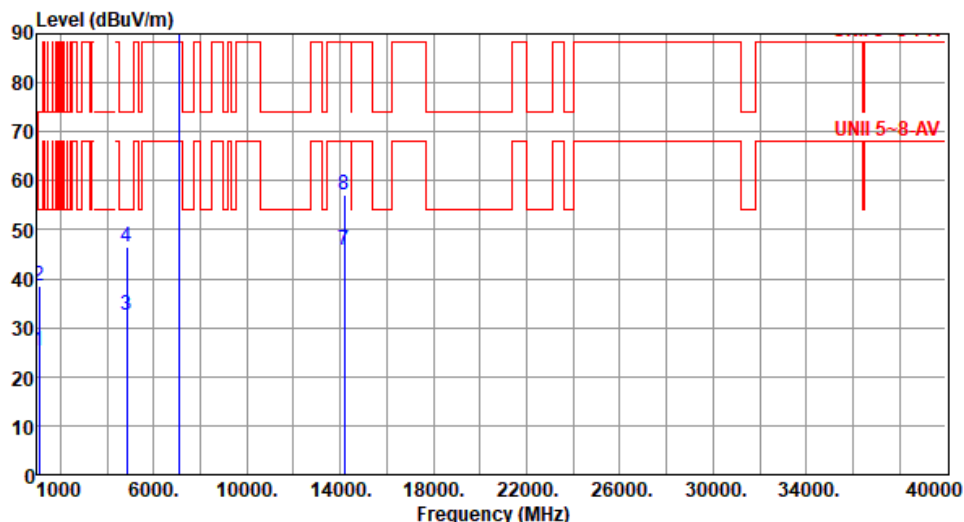

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.26	54.00	-28.74	32.71	-7.45	Average	100	36
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	36
3	4844.00	32.69	54.00	-21.31	32.47	0.22	Average	100	14
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	14
5 *	7095.00	93.42			88.44	4.98	Average	295	22
6 *	7095.00	108.04			103.06	4.98	Peak	295	22
7	14190.00	45.72	68.20	-22.48	37.66	8.06	Average	100	46
8	14190.00	57.21	88.20	-30.99	49.15	8.06	Peak	100	46

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

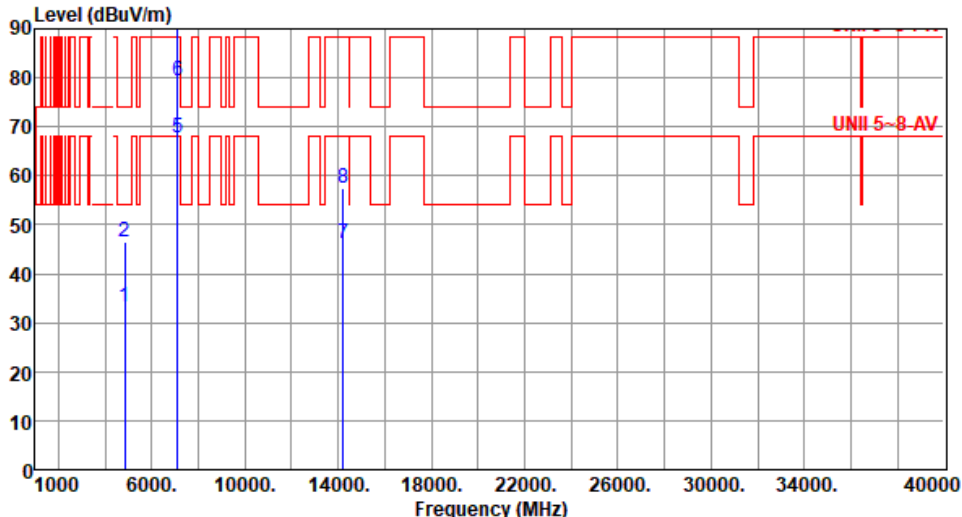

Modulation	be EHT20	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	33.16	54.00	-20.84	32.94	0.22	Average	100	44
2	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	44
3 *	7115.00	89.31			84.23	5.08	Average	213	293
4 *	7115.00	102.32			97.24	5.08	Peak	213	293
5	7125.00	67.84	68.20	-0.36	62.71	5.13	Average	213	293
6	7125.00	79.41	88.20	-8.79	74.28	5.13	Peak	213	293
7	14230.00	46.13	68.20	-22.07	38.11	8.02	Average	100	39
8	14230.00	57.52	88.20	-30.68	49.50	8.02	Peak	100	39

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			


Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.96	54.00	-21.04	32.74	0.22	Average	100	35
2	4844.00	46.71	74.00	-27.29	46.49	0.22	Peak	100	35
3	5925.00	50.68	68.20	-17.52	49.16	1.52	Average	325	21
4	5925.00	64.36	88.20	-23.84	62.84	1.52	Peak	325	21
5 *	5965.00	95.84			94.30	1.54	Average	325	21
6 *	5965.00	110.04			108.50	1.54	Peak	325	21
7	11930.00	44.37	54.00	-9.63	36.85	7.52	Average	100	22
8	11930.00	56.16	74.00	-17.84	48.64	7.52	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

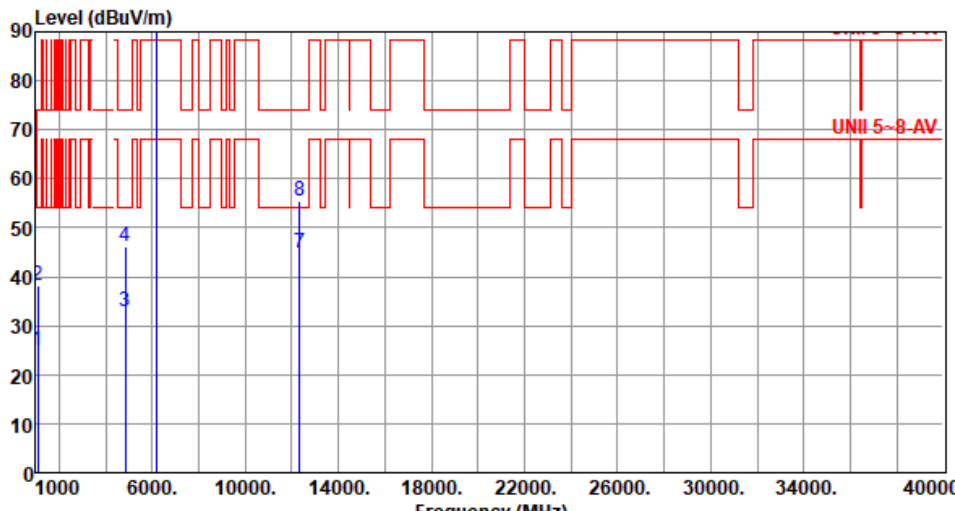

Modulation	be EHT40	Test Freq. (MHz)	6165						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	18
2	1094.00	38.21	74.00	-35.79	45.66	-7.45	Peak	100	18
3	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	24
4	4844.00	46.25	74.00	-27.75	46.03	0.22	Peak	100	24
5 *	6165.00	97.84			95.86	1.98	Average	208	295
6 *	6165.00	112.11			110.13	1.98	Peak	208	295
7	12330.00	44.82	54.00	-9.18	37.55	7.27	Average	100	23
8	12330.00	55.31	74.00	-18.69	48.04	7.27	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

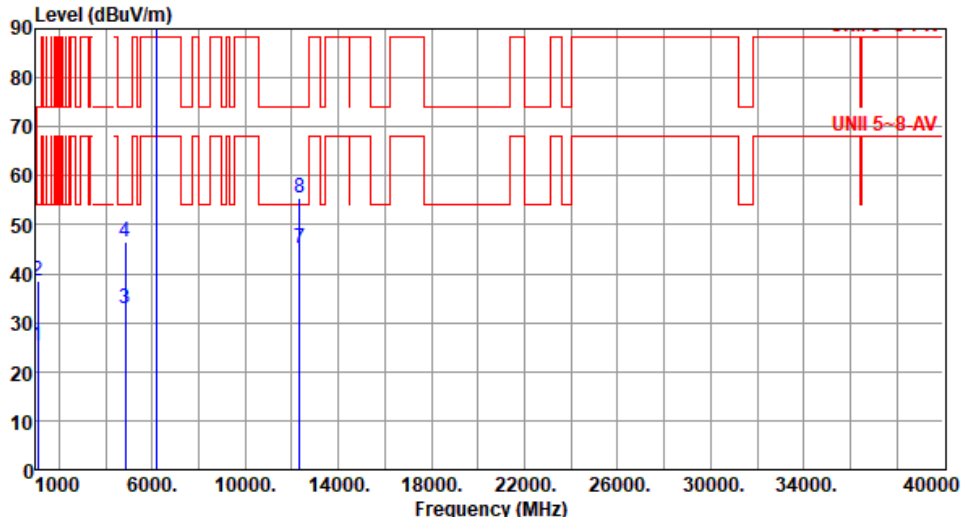


Modulation	be EHT40		Test Freq. (MHz)		6165				
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	25.26	54.00	-28.74	32.71	-7.45	Average	100	38
2	1094.00	38.36	74.00	-35.64	45.81	-7.45	Peak	100	38
3	4844.00	32.94	54.00	-21.06	32.72	0.22	Average	100	33
4	4844.00	46.61	74.00	-27.39	46.39	0.22	Peak	100	33
5 *	6165.00	95.72			93.74	1.98	Average	329	24
6 *	6165.00	109.86			107.88	1.98	Peak	329	24
7	12330.00	45.11	54.00	-8.89	37.84	7.27	Average	100	24
8	12330.00	55.62	74.00	-18.38	48.35	7.27	Peak	100	24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	6405						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.82	54.00	-29.18	32.27	-7.45	Average	100	31
2	1094.00	37.96	74.00	-36.04	45.41	-7.45	Peak	100	31
3	4844.00	33.39	54.00	-20.61	33.17	0.22	Average	100	21
4	4844.00	46.58	74.00	-27.42	46.36	0.22	Peak	100	21
5 *	6405.00	97.74			94.55	3.19	Average	212	304
6 *	6405.00	112.05			108.86	3.19	Peak	212	304
7	12810.00	44.82	68.20	-23.38	37.48	7.34	Average	100	39
8	12810.00	55.29	88.20	-32.91	47.95	7.34	Peak	100	39
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

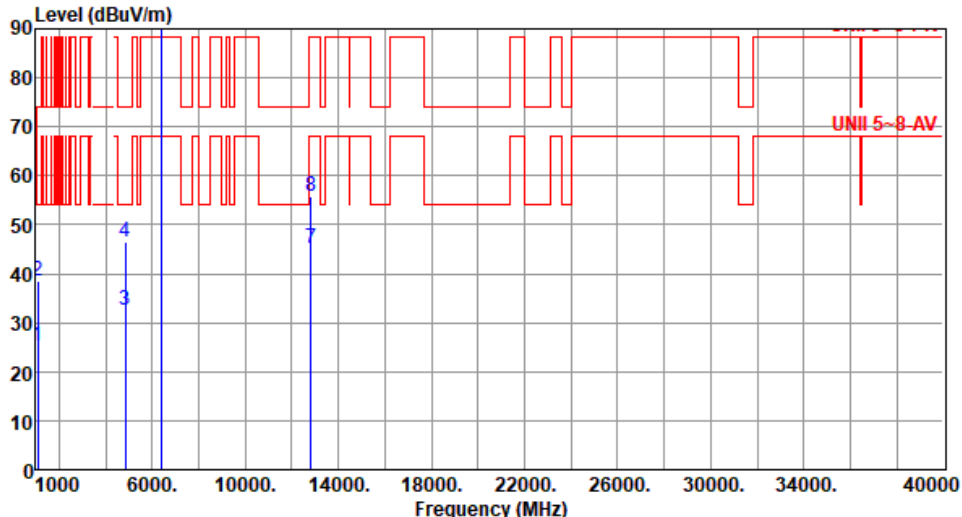

Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.34</td><td>54.00</td><td>-28.66</td><td>32.79</td><td>-7.45</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>2</td><td>1094.00</td><td>38.62</td><td>74.00</td><td>-35.38</td><td>46.07</td><td>-7.45</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>3</td><td>4844.00</td><td>32.71</td><td>54.00</td><td>-21.29</td><td>32.49</td><td>0.22</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>4</td><td>4844.00</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>46.13</td><td>0.22</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>5 *</td><td>6405.00</td><td>95.64</td><td></td><td></td><td>92.45</td><td>3.19</td><td>Average</td><td>331</td><td>29</td></tr><tr><td>6 *</td><td>6405.00</td><td>109.78</td><td></td><td></td><td>106.59</td><td>3.19</td><td>Peak</td><td>331</td><td>29</td></tr><tr><td>7</td><td>12810.00</td><td>45.14</td><td>68.20</td><td>-23.06</td><td>37.80</td><td>7.34</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>8</td><td>12810.00</td><td>55.63</td><td>88.20</td><td>-32.57</td><td>48.29</td><td>7.34</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.34	54.00	-28.66	32.79	-7.45	Average	100	48	2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	48	3	4844.00	32.71	54.00	-21.29	32.49	0.22	Average	100	14	4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	14	5 *	6405.00	95.64			92.45	3.19	Average	331	29	6 *	6405.00	109.78			106.59	3.19	Peak	331	29	7	12810.00	45.14	68.20	-23.06	37.80	7.34	Average	100	22	8	12810.00	55.63	88.20	-32.57	48.29	7.34	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.34	54.00	-28.66	32.79	-7.45	Average	100	48																																																																																				
2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	48																																																																																				
3	4844.00	32.71	54.00	-21.29	32.49	0.22	Average	100	14																																																																																				
4	4844.00	46.35	74.00	-27.65	46.13	0.22	Peak	100	14																																																																																				
5 *	6405.00	95.64			92.45	3.19	Average	331	29																																																																																				
6 *	6405.00	109.78			106.59	3.19	Peak	331	29																																																																																				
7	12810.00	45.14	68.20	-23.06	37.80	7.34	Average	100	22																																																																																				
8	12810.00	55.63	88.20	-32.57	48.29	7.34	Peak	100	22																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

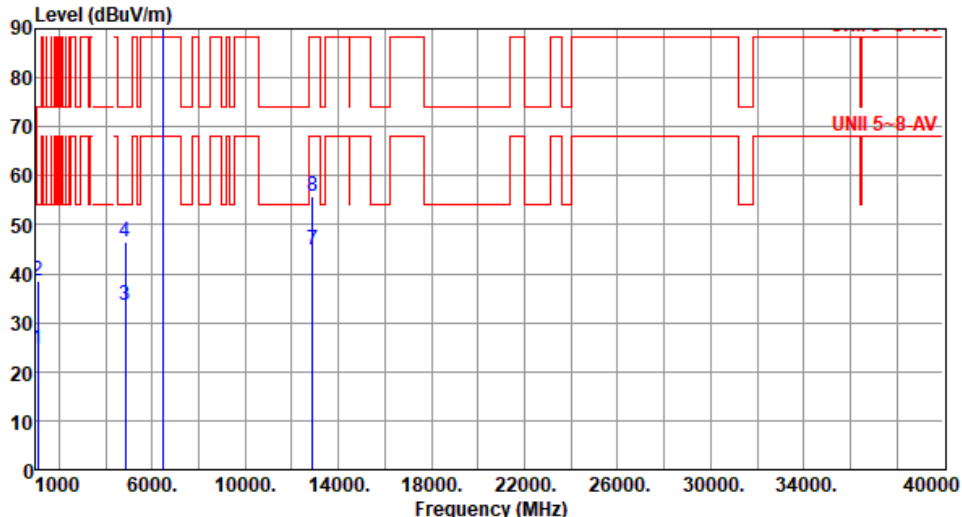

Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.52	54.00	-29.48	31.97	-7.45	Average	100	39
2	1094.00	38.68	74.00	-35.32	46.13	-7.45	Peak	100	39
3	4844.00	33.38	54.00	-20.62	33.16	0.22	Average	100	25
4	4844.00	46.62	74.00	-27.38	46.40	0.22	Peak	100	25
5 *	6445.00	98.16			94.87	3.29	Average	214	301
6 *	6445.00	112.51			109.22	3.29	Peak	214	301
7	12890.00	44.95	68.20	-23.25	37.77	7.18	Average	100	36
8	12890.00	55.74	88.20	-32.46	48.56	7.18	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	6445																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.44</td><td>54.00</td><td>-28.56</td><td>32.89</td><td>-7.45</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>2</td><td>1094.00</td><td>38.38</td><td>74.00</td><td>-35.62</td><td>45.83</td><td>-7.45</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>3</td><td>4844.00</td><td>33.24</td><td>54.00</td><td>-20.76</td><td>33.02</td><td>0.22</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>4</td><td>4844.00</td><td>46.92</td><td>74.00</td><td>-27.08</td><td>46.70</td><td>0.22</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>5 *</td><td>6445.00</td><td>96.02</td><td></td><td></td><td>92.73</td><td>3.29</td><td>Average</td><td>334</td><td>25</td></tr><tr><td>6 *</td><td>6445.00</td><td>110.24</td><td></td><td></td><td>106.95</td><td>3.29</td><td>Peak</td><td>334</td><td>25</td></tr><tr><td>7</td><td>12890.00</td><td>44.58</td><td>68.20</td><td>-23.62</td><td>37.40</td><td>7.18</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>8</td><td>12890.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>48.21</td><td>7.18</td><td>Peak</td><td>100</td><td>23</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.44	54.00	-28.56	32.89	-7.45	Average	100	40	2	1094.00	38.38	74.00	-35.62	45.83	-7.45	Peak	100	40	3	4844.00	33.24	54.00	-20.76	33.02	0.22	Average	100	26	4	4844.00	46.92	74.00	-27.08	46.70	0.22	Peak	100	26	5 *	6445.00	96.02			92.73	3.29	Average	334	25	6 *	6445.00	110.24			106.95	3.29	Peak	334	25	7	12890.00	44.58	68.20	-23.62	37.40	7.18	Average	100	23	8	12890.00	55.39	88.20	-32.81	48.21	7.18	Peak	100	23
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.44	54.00	-28.56	32.89	-7.45	Average	100	40																																																																																				
2	1094.00	38.38	74.00	-35.62	45.83	-7.45	Peak	100	40																																																																																				
3	4844.00	33.24	54.00	-20.76	33.02	0.22	Average	100	26																																																																																				
4	4844.00	46.92	74.00	-27.08	46.70	0.22	Peak	100	26																																																																																				
5 *	6445.00	96.02			92.73	3.29	Average	334	25																																																																																				
6 *	6445.00	110.24			106.95	3.29	Peak	334	25																																																																																				
7	12890.00	44.58	68.20	-23.62	37.40	7.18	Average	100	23																																																																																				
8	12890.00	55.39	88.20	-32.81	48.21	7.18	Peak	100	23																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6485																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.91</td><td>54.00</td><td>-29.09</td><td>32.36</td><td>-7.45</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>1094.00</td><td>38.14</td><td>74.00</td><td>-35.86</td><td>45.59</td><td>-7.45</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>4844.00</td><td>33.12</td><td>54.00</td><td>-20.88</td><td>32.90</td><td>0.22</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>4</td><td>4844.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>46.07</td><td>0.22</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>5 *</td><td>6485.00</td><td>98.28</td><td></td><td></td><td>94.75</td><td>3.53</td><td>Average</td><td>217</td><td>304</td></tr><tr><td>6 *</td><td>6485.00</td><td>112.63</td><td></td><td></td><td>109.10</td><td>3.53</td><td>Peak</td><td>217</td><td>304</td></tr><tr><td>7</td><td>12970.00</td><td>44.89</td><td>68.20</td><td>-23.31</td><td>37.94</td><td>6.95</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>8</td><td>12970.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>48.81</td><td>6.95</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.91	54.00	-29.09	32.36	-7.45	Average	100	21	2	1094.00	38.14	74.00	-35.86	45.59	-7.45	Peak	100	21	3	4844.00	33.12	54.00	-20.88	32.90	0.22	Average	100	19	4	4844.00	46.29	74.00	-27.71	46.07	0.22	Peak	100	19	5 *	6485.00	98.28			94.75	3.53	Average	217	304	6 *	6485.00	112.63			109.10	3.53	Peak	217	304	7	12970.00	44.89	68.20	-23.31	37.94	6.95	Average	100	36	8	12970.00	55.76	88.20	-32.44	48.81	6.95	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.91	54.00	-29.09	32.36	-7.45	Average	100	21																																																																																				
2	1094.00	38.14	74.00	-35.86	45.59	-7.45	Peak	100	21																																																																																				
3	4844.00	33.12	54.00	-20.88	32.90	0.22	Average	100	19																																																																																				
4	4844.00	46.29	74.00	-27.71	46.07	0.22	Peak	100	19																																																																																				
5 *	6485.00	98.28			94.75	3.53	Average	217	304																																																																																				
6 *	6485.00	112.63			109.10	3.53	Peak	217	304																																																																																				
7	12970.00	44.89	68.20	-23.31	37.94	6.95	Average	100	36																																																																																				
8	12970.00	55.76	88.20	-32.44	48.81	6.95	Peak	100	36																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

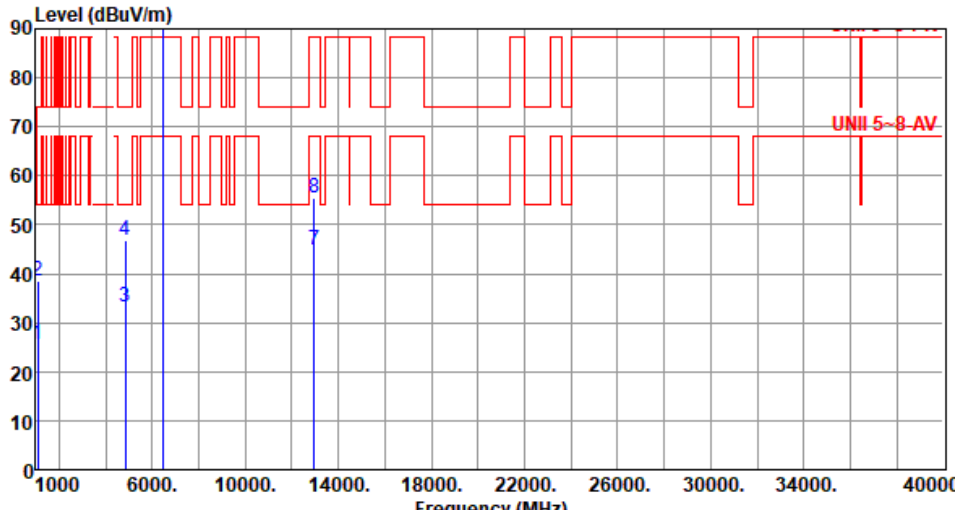


Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.56	54.00	-28.44	33.01	-7.45	Average	100	51
2	1094.00	38.45	74.00	-35.55	45.90	-7.45	Peak	100	51
3	4844.00	33.08	54.00	-20.92	32.86	0.22	Average	100	62
4	4844.00	46.95	74.00	-27.05	46.73	0.22	Peak	100	62
5 *	6485.00	96.11			92.58	3.53	Average	336	28
6 *	6485.00	110.34			106.81	3.53	Peak	336	28
7	12970.00	44.84	68.20	-23.36	37.89	6.95	Average	100	11
8	12970.00	55.36	88.20	-32.84	48.41	6.95	Peak	100	11
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT40	Test Freq. (MHz)	6525						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	25.35	54.00	-28.65	32.80	-7.45	Average	100	29
2	1094.00	38.46	74.00	-35.54	45.91	-7.45	Peak	100	29
3	4844.00	33.25	54.00	-20.75	33.03	0.22	Average	100	17
4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	17
5 *	6525.00	98.36			94.69	3.67	Average	216	308
6 *	6525.00	112.68			109.01	3.67	Peak	216	308
7	13050.00	44.92	68.20	-23.28	38.11	6.81	Average	100	38
8	13050.00	55.81	88.20	-32.39	49.00	6.81	Peak	100	38
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

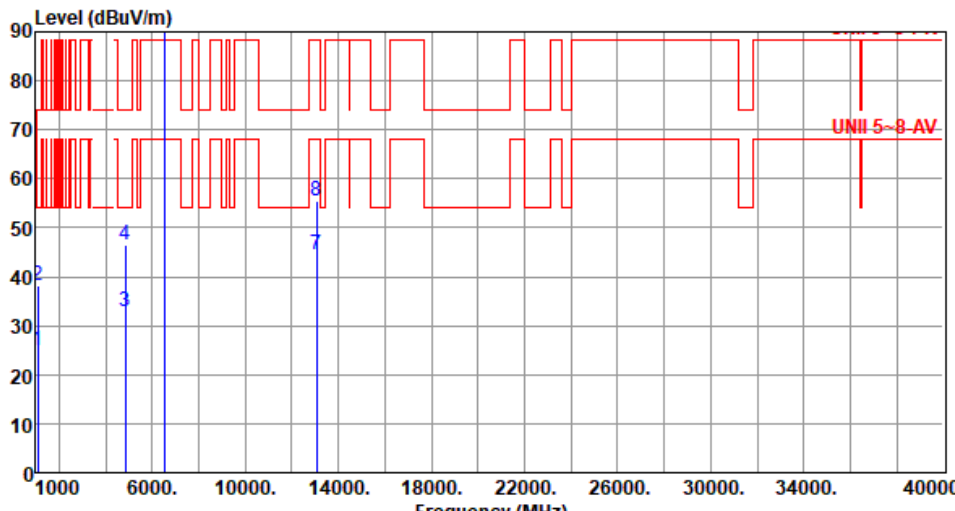

Modulation	be EHT40	Test Freq. (MHz)	6525																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.05</td><td>54.00</td><td>-28.95</td><td>32.50</td><td>-7.45</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>2</td><td>1094.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>45.64</td><td>-7.45</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>3</td><td>4844.00</td><td>32.78</td><td>54.00</td><td>-21.22</td><td>32.56</td><td>0.22</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>4</td><td>4844.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>46.27</td><td>0.22</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>5 *</td><td>6525.00</td><td>96.24</td><td></td><td></td><td>92.57</td><td>3.67</td><td>Average</td><td>331</td><td>19</td></tr><tr><td>6 *</td><td>6525.00</td><td>110.42</td><td></td><td></td><td>106.75</td><td>3.67</td><td>Peak</td><td>331</td><td>19</td></tr><tr><td>7</td><td>13050.00</td><td>44.62</td><td>68.20</td><td>-23.58</td><td>37.81</td><td>6.81</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>8</td><td>13050.00</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>48.62</td><td>6.81</td><td>Peak</td><td>100</td><td>18</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.05	54.00	-28.95	32.50	-7.45	Average	100	22	2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	22	3	4844.00	32.78	54.00	-21.22	32.56	0.22	Average	100	13	4	4844.00	46.49	74.00	-27.51	46.27	0.22	Peak	100	13	5 *	6525.00	96.24			92.57	3.67	Average	331	19	6 *	6525.00	110.42			106.75	3.67	Peak	331	19	7	13050.00	44.62	68.20	-23.58	37.81	6.81	Average	100	18	8	13050.00	55.43	88.20	-32.77	48.62	6.81	Peak	100	18
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.05	54.00	-28.95	32.50	-7.45	Average	100	22																																																																																				
2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	22																																																																																				
3	4844.00	32.78	54.00	-21.22	32.56	0.22	Average	100	13																																																																																				
4	4844.00	46.49	74.00	-27.51	46.27	0.22	Peak	100	13																																																																																				
5 *	6525.00	96.24			92.57	3.67	Average	331	19																																																																																				
6 *	6525.00	110.42			106.75	3.67	Peak	331	19																																																																																				
7	13050.00	44.62	68.20	-23.58	37.81	6.81	Average	100	18																																																																																				
8	13050.00	55.43	88.20	-32.77	48.62	6.81	Peak	100	18																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

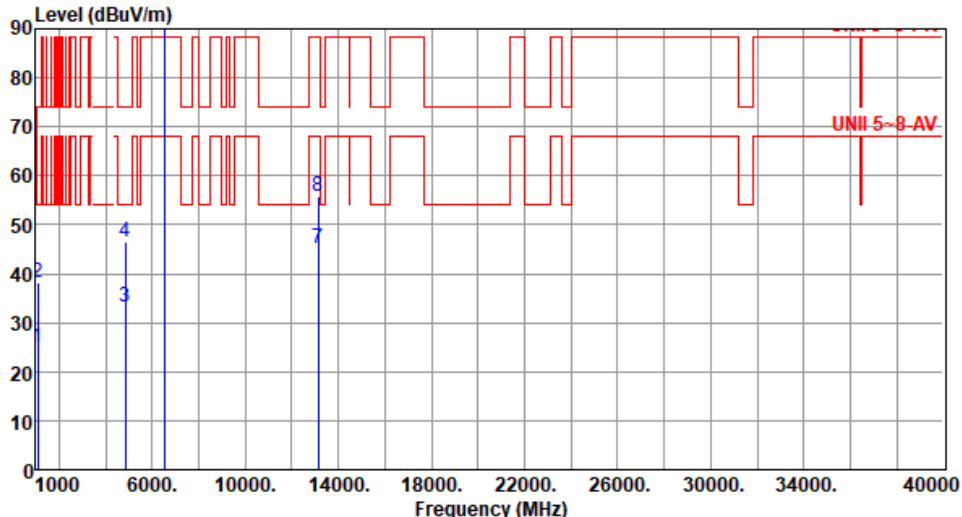

Modulation	be EHT40		Test Freq. (MHz)		6565																																																																																																																		
Polarization	Horizontal																																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.81</td><td>54.00</td><td>-29.19</td><td>32.26</td><td>-7.45</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>1094.00</td><td>38.08</td><td>74.00</td><td>-35.92</td><td>45.53</td><td>-7.45</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>4844.00</td><td>33.28</td><td>54.00</td><td>-20.72</td><td>33.06</td><td>0.22</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>4</td><td>4844.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>46.17</td><td>0.22</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>5 *</td><td>6565.00</td><td>98.45</td><td></td><td></td><td>94.72</td><td>3.73</td><td>Average</td><td>213</td><td>302</td></tr><tr><td>6 *</td><td>6565.00</td><td>112.64</td><td></td><td></td><td>108.91</td><td>3.73</td><td>Peak</td><td>213</td><td>302</td></tr><tr><td>7</td><td>13130.00</td><td>45.11</td><td>68.20</td><td>-23.09</td><td>38.18</td><td>6.93</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>8</td><td>13130.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>48.99</td><td>6.93</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1094.00	24.81	54.00	-29.19	32.26	-7.45	Average	100	29	2	1094.00	38.08	74.00	-35.92	45.53	-7.45	Peak	100	29	3	4844.00	33.28	54.00	-20.72	33.06	0.22	Average	100	16	4	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	16	5 *	6565.00	98.45			94.72	3.73	Average	213	302	6 *	6565.00	112.64			108.91	3.73	Peak	213	302	7	13130.00	45.11	68.20	-23.09	38.18	6.93	Average	100	22	8	13130.00	55.92	88.20	-32.28	48.99	6.93	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level			reading			High	Table																																																																																																														
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																														
1	1094.00	24.81	54.00	-29.19	32.26	-7.45	Average	100	29																																																																																																														
2	1094.00	38.08	74.00	-35.92	45.53	-7.45	Peak	100	29																																																																																																														
3	4844.00	33.28	54.00	-20.72	33.06	0.22	Average	100	16																																																																																																														
4	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	16																																																																																																														
5 *	6565.00	98.45			94.72	3.73	Average	213	302																																																																																																														
6 *	6565.00	112.64			108.91	3.73	Peak	213	302																																																																																																														
7	13130.00	45.11	68.20	-23.09	38.18	6.93	Average	100	22																																																																																																														
8	13130.00	55.92	88.20	-32.28	48.99	6.93	Peak	100	22																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																							




Modulation	be EHT40	Test Freq. (MHz)	6565						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.42	54.00	-28.58	32.87	-7.45	Average	100	56
2	1094.00	38.51	74.00	-35.49	45.96	-7.45	Peak	100	56
3	4844.00	33.19	54.00	-20.81	32.97	0.22	Average	100	41
4	4844.00	46.85	74.00	-27.15	46.63	0.22	Peak	100	41
5 *	6565.00	96.31			92.58	3.73	Average	328	24
6 *	6565.00	110.53			106.80	3.73	Peak	328	24
7	13130.00	44.86	68.20	-23.34	37.93	6.93	Average	100	35
8	13130.00	55.59	88.20	-32.61	48.66	6.93	Peak	100	35
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBUV/m)			

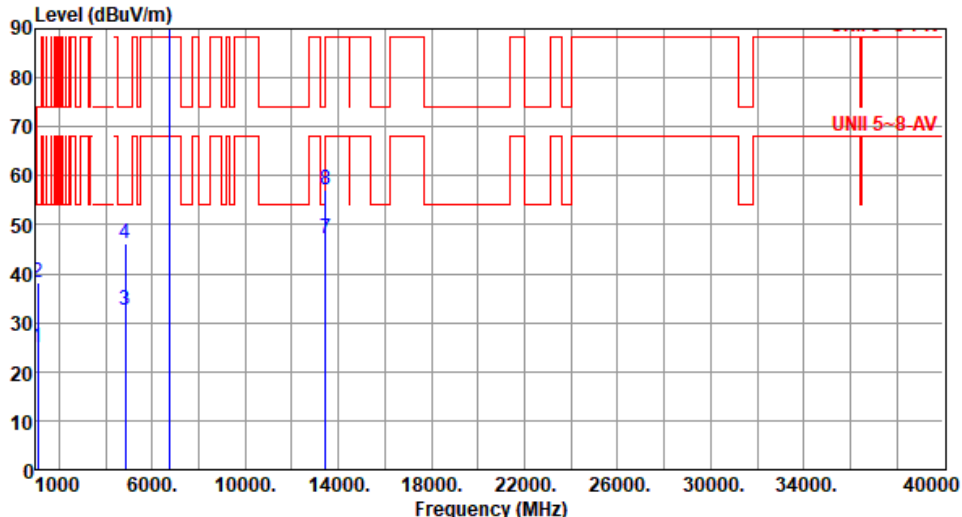

Modulation	be EHT40	Test Freq. (MHz)	6725																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.02</td><td>54.00</td><td>-28.98</td><td>32.47</td><td>-7.45</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>2</td><td>1094.00</td><td>38.09</td><td>74.00</td><td>-35.91</td><td>45.54</td><td>-7.45</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>3</td><td>4844.00</td><td>32.65</td><td>54.00</td><td>-21.35</td><td>32.43</td><td>0.22</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>4</td><td>4844.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>46.06</td><td>0.22</td><td>Peak</td><td>100</td><td>44</td></tr><tr><td>5 *</td><td>6725.00</td><td>96.14</td><td></td><td></td><td>92.31</td><td>3.83</td><td>Average</td><td>325</td><td>22</td></tr><tr><td>6 *</td><td>6725.00</td><td>110.45</td><td></td><td></td><td>106.62</td><td>3.83</td><td>Peak</td><td>325</td><td>22</td></tr><tr><td>7</td><td>13450.00</td><td>47.24</td><td>68.20</td><td>-20.96</td><td>39.85</td><td>7.39</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>8</td><td>13450.00</td><td>56.99</td><td>88.20</td><td>-31.21</td><td>49.60</td><td>7.39</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	32	2	1094.00	38.09	74.00	-35.91	45.54	-7.45	Peak	100	32	3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	44	4	4844.00	46.28	74.00	-27.72	46.06	0.22	Peak	100	44	5 *	6725.00	96.14			92.31	3.83	Average	325	22	6 *	6725.00	110.45			106.62	3.83	Peak	325	22	7	13450.00	47.24	68.20	-20.96	39.85	7.39	Average	100	36	8	13450.00	56.99	88.20	-31.21	49.60	7.39	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	32																																																																																				
2	1094.00	38.09	74.00	-35.91	45.54	-7.45	Peak	100	32																																																																																				
3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	44																																																																																				
4	4844.00	46.28	74.00	-27.72	46.06	0.22	Peak	100	44																																																																																				
5 *	6725.00	96.14			92.31	3.83	Average	325	22																																																																																				
6 *	6725.00	110.45			106.62	3.83	Peak	325	22																																																																																				
7	13450.00	47.24	68.20	-20.96	39.85	7.39	Average	100	36																																																																																				
8	13450.00	56.99	88.20	-31.21	49.60	7.39	Peak	100	36																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

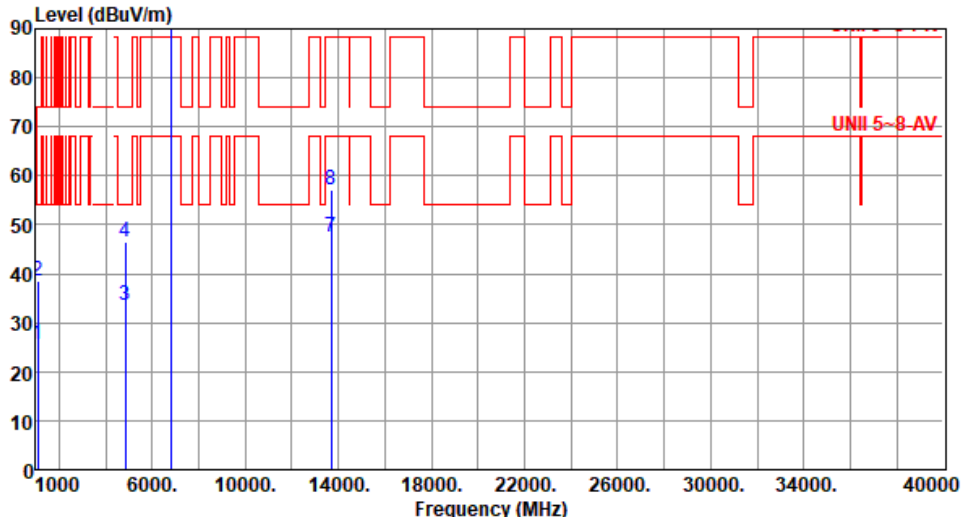


Modulation	be EHT40	Test Freq. (MHz)	6845																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.49</td><td>54.00</td><td>-28.51</td><td>32.94</td><td>-7.45</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>2</td><td>1094.00</td><td>38.67</td><td>74.00</td><td>-35.33</td><td>46.12</td><td>-7.45</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>3</td><td>4844.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>33.27</td><td>0.22</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>4</td><td>4844.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>46.34</td><td>0.22</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>5 *</td><td>6845.00</td><td>98.14</td><td></td><td></td><td>94.19</td><td>3.95</td><td>Average</td><td>215</td><td>294</td></tr><tr><td>6 *</td><td>6845.00</td><td>112.39</td><td></td><td></td><td>108.44</td><td>3.95</td><td>Peak</td><td>215</td><td>294</td></tr><tr><td>7</td><td>13690.00</td><td>47.48</td><td>68.20</td><td>-20.72</td><td>40.19</td><td>7.29</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>8</td><td>13690.00</td><td>57.22</td><td>88.20</td><td>-30.98</td><td>49.93</td><td>7.29</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.49	54.00	-28.51	32.94	-7.45	Average	100	68	2	1094.00	38.67	74.00	-35.33	46.12	-7.45	Peak	100	68	3	4844.00	33.49	54.00	-20.51	33.27	0.22	Average	100	52	4	4844.00	46.56	74.00	-27.44	46.34	0.22	Peak	100	52	5 *	6845.00	98.14			94.19	3.95	Average	215	294	6 *	6845.00	112.39			108.44	3.95	Peak	215	294	7	13690.00	47.48	68.20	-20.72	40.19	7.29	Average	100	31	8	13690.00	57.22	88.20	-30.98	49.93	7.29	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.49	54.00	-28.51	32.94	-7.45	Average	100	68																																																																																				
2	1094.00	38.67	74.00	-35.33	46.12	-7.45	Peak	100	68																																																																																				
3	4844.00	33.49	54.00	-20.51	33.27	0.22	Average	100	52																																																																																				
4	4844.00	46.56	74.00	-27.44	46.34	0.22	Peak	100	52																																																																																				
5 *	6845.00	98.14			94.19	3.95	Average	215	294																																																																																				
6 *	6845.00	112.39			108.44	3.95	Peak	215	294																																																																																				
7	13690.00	47.48	68.20	-20.72	40.19	7.29	Average	100	31																																																																																				
8	13690.00	57.22	88.20	-30.98	49.93	7.29	Peak	100	31																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	6845						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.05	54.00	-28.95	32.50	-7.45	Average	100	26
2	1094.00	38.23	74.00	-35.77	45.68	-7.45	Peak	100	26
3	4844.00	32.81	54.00	-21.19	32.59	0.22	Average	100	49
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	49
5 *	6845.00	96.02			92.07	3.95	Average	321	28
6 *	6845.00	110.34			106.39	3.95	Peak	321	28
7	13690.00	47.42	68.20	-20.78	40.13	7.29	Average	100	37
8	13690.00	57.26	88.20	-30.94	49.97	7.29	Peak	100	37
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

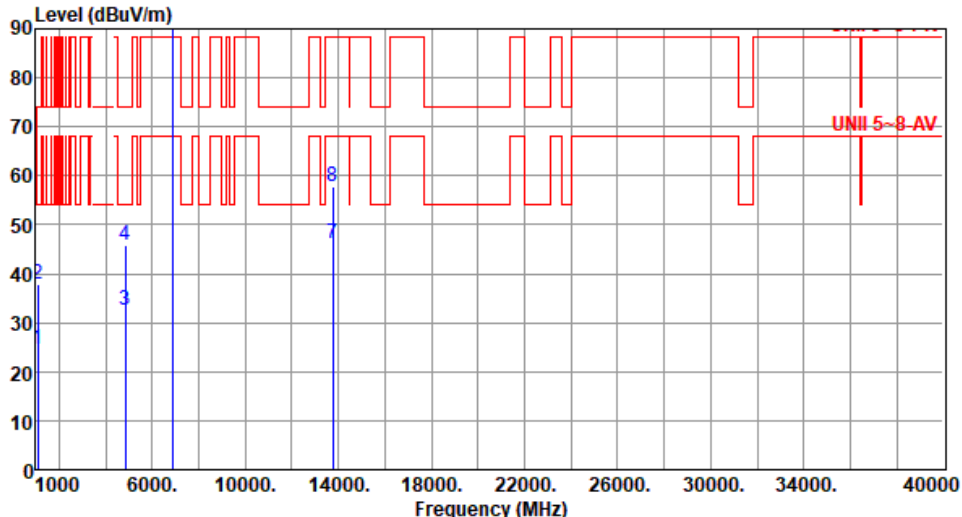

Modulation	be EHT40	Test Freq. (MHz)	6885						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.56	54.00	-29.44	32.01	-7.45	Average	100	31
2	1094.00	37.72	74.00	-36.28	45.17	-7.45	Peak	100	31
3	4844.00	32.68	54.00	-21.32	32.46	0.22	Average	100	22
4	4844.00	45.96	74.00	-28.04	45.74	0.22	Peak	100	22
5 *	6885.00	97.62			93.39	4.23	Average	219	301
6 *	6885.00	111.84			107.61	4.23	Peak	219	301
7	13770.00	46.16	68.20	-22.04	39.03	7.13	Average	100	25
8	13770.00	57.64	88.20	-30.56	50.51	7.13	Peak	100	25

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6885																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.42</td><td>54.00</td><td>-28.58</td><td>32.87</td><td>-7.45</td><td>Average</td><td>100</td><td>9</td></tr><tr><td>2</td><td>1094.00</td><td>38.46</td><td>74.00</td><td>-35.54</td><td>45.91</td><td>-7.45</td><td>Peak</td><td>100</td><td>9</td></tr><tr><td>3</td><td>4844.00</td><td>33.05</td><td>54.00</td><td>-20.95</td><td>32.83</td><td>0.22</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>4</td><td>4844.00</td><td>46.71</td><td>74.00</td><td>-27.29</td><td>46.49</td><td>0.22</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>5 *</td><td>6885.00</td><td>95.54</td><td></td><td></td><td>91.31</td><td>4.23</td><td>Average</td><td>319</td><td>23</td></tr><tr><td>6 *</td><td>6885.00</td><td>109.86</td><td></td><td></td><td>105.63</td><td>4.23</td><td>Peak</td><td>319</td><td>23</td></tr><tr><td>7</td><td>13770.00</td><td>45.91</td><td>68.20</td><td>-22.29</td><td>38.78</td><td>7.13</td><td>Average</td><td>100</td><td>12</td></tr><tr><td>8</td><td>13770.00</td><td>57.34</td><td>88.20</td><td>-30.86</td><td>50.21</td><td>7.13</td><td>Peak</td><td>100</td><td>12</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.42	54.00	-28.58	32.87	-7.45	Average	100	9	2	1094.00	38.46	74.00	-35.54	45.91	-7.45	Peak	100	9	3	4844.00	33.05	54.00	-20.95	32.83	0.22	Average	100	16	4	4844.00	46.71	74.00	-27.29	46.49	0.22	Peak	100	16	5 *	6885.00	95.54			91.31	4.23	Average	319	23	6 *	6885.00	109.86			105.63	4.23	Peak	319	23	7	13770.00	45.91	68.20	-22.29	38.78	7.13	Average	100	12	8	13770.00	57.34	88.20	-30.86	50.21	7.13	Peak	100	12
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.42	54.00	-28.58	32.87	-7.45	Average	100	9																																																																																				
2	1094.00	38.46	74.00	-35.54	45.91	-7.45	Peak	100	9																																																																																				
3	4844.00	33.05	54.00	-20.95	32.83	0.22	Average	100	16																																																																																				
4	4844.00	46.71	74.00	-27.29	46.49	0.22	Peak	100	16																																																																																				
5 *	6885.00	95.54			91.31	4.23	Average	319	23																																																																																				
6 *	6885.00	109.86			105.63	4.23	Peak	319	23																																																																																				
7	13770.00	45.91	68.20	-22.29	38.78	7.13	Average	100	12																																																																																				
8	13770.00	57.34	88.20	-30.86	50.21	7.13	Peak	100	12																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6925
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBuV/m) <			




Modulation	be EHT40	Test Freq. (MHz)	6925																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.52</td><td>54.00</td><td>-28.48</td><td>32.97</td><td>-7.45</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>2</td><td>1094.00</td><td>38.56</td><td>74.00</td><td>-35.44</td><td>46.01</td><td>-7.45</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>3</td><td>4844.00</td><td>32.84</td><td>54.00</td><td>-21.16</td><td>32.62</td><td>0.22</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>4</td><td>4844.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>46.34</td><td>0.22</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>5 *</td><td>6925.00</td><td>95.32</td><td></td><td></td><td>90.89</td><td>4.43</td><td>Average</td><td>311</td><td>28</td></tr><tr><td>6 *</td><td>6925.00</td><td>109.74</td><td></td><td></td><td>105.31</td><td>4.43</td><td>Peak</td><td>311</td><td>28</td></tr><tr><td>7</td><td>13850.00</td><td>45.81</td><td>68.20</td><td>-22.39</td><td>38.63</td><td>7.18</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>13850.00</td><td>57.29</td><td>88.20</td><td>-30.91</td><td>50.11</td><td>7.18</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.52	54.00	-28.48	32.97	-7.45	Average	100	32	2	1094.00	38.56	74.00	-35.44	46.01	-7.45	Peak	100	32	3	4844.00	32.84	54.00	-21.16	32.62	0.22	Average	100	28	4	4844.00	46.56	74.00	-27.44	46.34	0.22	Peak	100	28	5 *	6925.00	95.32			90.89	4.43	Average	311	28	6 *	6925.00	109.74			105.31	4.43	Peak	311	28	7	13850.00	45.81	68.20	-22.39	38.63	7.18	Average	100	35	8	13850.00	57.29	88.20	-30.91	50.11	7.18	Peak	100	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.52	54.00	-28.48	32.97	-7.45	Average	100	32																																																																																				
2	1094.00	38.56	74.00	-35.44	46.01	-7.45	Peak	100	32																																																																																				
3	4844.00	32.84	54.00	-21.16	32.62	0.22	Average	100	28																																																																																				
4	4844.00	46.56	74.00	-27.44	46.34	0.22	Peak	100	28																																																																																				
5 *	6925.00	95.32			90.89	4.43	Average	311	28																																																																																				
6 *	6925.00	109.74			105.31	4.43	Peak	311	28																																																																																				
7	13850.00	45.81	68.20	-22.39	38.63	7.18	Average	100	35																																																																																				
8	13850.00	57.29	88.20	-30.91	50.11	7.18	Peak	100	35																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	7005																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.93</td><td>54.00</td><td>-29.07</td><td>32.38</td><td>-7.45</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>1094.00</td><td>38.26</td><td>74.00</td><td>-35.74</td><td>45.71</td><td>-7.45</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>4844.00</td><td>33.25</td><td>54.00</td><td>-20.75</td><td>33.03</td><td>0.22</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td>4844.00</td><td>46.42</td><td>74.00</td><td>-27.58</td><td>46.20</td><td>0.22</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5 *</td><td>7005.00</td><td>98.02</td><td></td><td></td><td>93.50</td><td>4.52</td><td>Average</td><td>211</td><td>296</td></tr><tr><td>6 *</td><td>7005.00</td><td>112.15</td><td>-----</td><td>-----</td><td>107.63</td><td>4.52</td><td>Peak</td><td>211</td><td>296</td></tr><tr><td>7</td><td>14010.00</td><td>46.22</td><td>68.20</td><td>-21.98</td><td>38.42</td><td>7.80</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>8</td><td>14010.00</td><td>57.64</td><td>88.20</td><td>-30.56</td><td>49.84</td><td>7.80</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.93	54.00	-29.07	32.38	-7.45	Average	100	36	2	1094.00	38.26	74.00	-35.74	45.71	-7.45	Peak	100	36	3	4844.00	33.25	54.00	-20.75	33.03	0.22	Average	100	29	4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	29	5 *	7005.00	98.02			93.50	4.52	Average	211	296	6 *	7005.00	112.15	-----	-----	107.63	4.52	Peak	211	296	7	14010.00	46.22	68.20	-21.98	38.42	7.80	Average	100	31	8	14010.00	57.64	88.20	-30.56	49.84	7.80	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.93	54.00	-29.07	32.38	-7.45	Average	100	36																																																																																				
2	1094.00	38.26	74.00	-35.74	45.71	-7.45	Peak	100	36																																																																																				
3	4844.00	33.25	54.00	-20.75	33.03	0.22	Average	100	29																																																																																				
4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	29																																																																																				
5 *	7005.00	98.02			93.50	4.52	Average	211	296																																																																																				
6 *	7005.00	112.15	-----	-----	107.63	4.52	Peak	211	296																																																																																				
7	14010.00	46.22	68.20	-21.98	38.42	7.80	Average	100	31																																																																																				
8	14010.00	57.64	88.20	-30.56	49.84	7.80	Peak	100	31																																																																																				

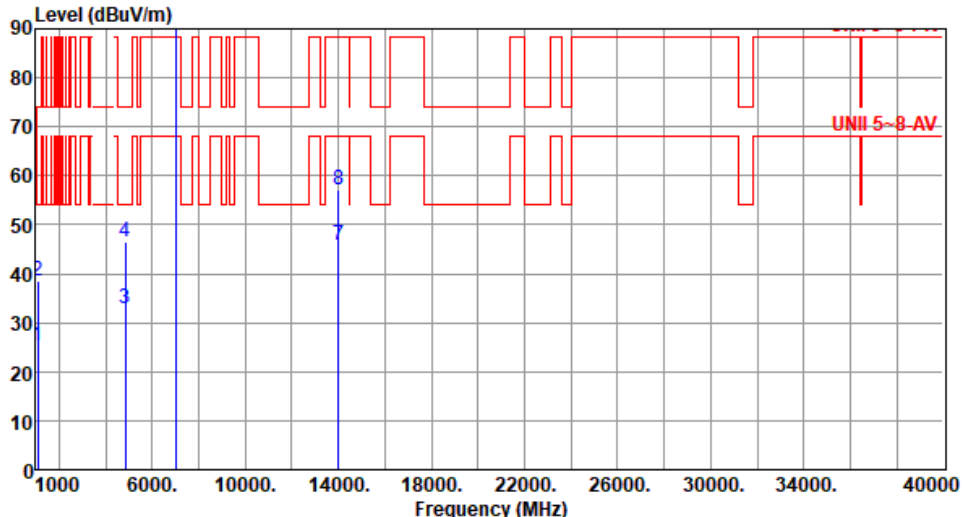

Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.32	54.00	-28.68	32.77	-7.45	Average	100	49
2	1094.00	38.36	74.00	-35.64	45.81	-7.45	Peak	100	49
3	4844.00	33.04	54.00	-20.96	32.82	0.22	Average	100	51
4	4844.00	46.59	74.00	-27.41	46.37	0.22	Peak	100	51
5 *	7005.00	95.89			91.37	4.52	Average	304	21
6 *	7005.00	110.26			105.74	4.52	Peak	304	21
7	14010.00	45.79	68.20	-22.41	37.99	7.80	Average	100	16
8	14010.00	57.21	88.20	-30.99	49.41	7.80	Peak	100	16

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	7085
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBuV/m)			




Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>32.95</td><td>54.00</td><td>-21.05</td><td>32.73</td><td>0.22</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>2</td><td>4844.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>46.44</td><td>0.22</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>3 *</td><td>7085.00</td><td>95.64</td><td></td><td></td><td>90.71</td><td>4.93</td><td>Average</td><td>302</td><td>26</td></tr><tr><td>4 *</td><td>7085.00</td><td>109.92</td><td></td><td></td><td>104.99</td><td>4.93</td><td>Peak</td><td>302</td><td>26</td></tr><tr><td>5</td><td>7125.00</td><td>47.64</td><td>68.20</td><td>-20.56</td><td>42.51</td><td>5.13</td><td>Average</td><td>302</td><td>26</td></tr><tr><td>6</td><td>7125.00</td><td>60.21</td><td>88.20</td><td>-27.99</td><td>55.08</td><td>5.13</td><td>Peak</td><td>302</td><td>26</td></tr><tr><td>7</td><td>14170.00</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>37.96</td><td>8.02</td><td>Average</td><td>100</td><td>4</td></tr><tr><td>8</td><td>14170.00</td><td>57.42</td><td>88.20</td><td>-30.78</td><td>49.40</td><td>8.02</td><td>Peak</td><td>100</td><td>4</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	18	2	4844.00	46.66	74.00	-27.34	46.44	0.22	Peak	100	18	3 *	7085.00	95.64			90.71	4.93	Average	302	26	4 *	7085.00	109.92			104.99	4.93	Peak	302	26	5	7125.00	47.64	68.20	-20.56	42.51	5.13	Average	302	26	6	7125.00	60.21	88.20	-27.99	55.08	5.13	Peak	302	26	7	14170.00	45.98	68.20	-22.22	37.96	8.02	Average	100	4	8	14170.00	57.42	88.20	-30.78	49.40	8.02	Peak	100	4
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	18																																																																																				
2	4844.00	46.66	74.00	-27.34	46.44	0.22	Peak	100	18																																																																																				
3 *	7085.00	95.64			90.71	4.93	Average	302	26																																																																																				
4 *	7085.00	109.92			104.99	4.93	Peak	302	26																																																																																				
5	7125.00	47.64	68.20	-20.56	42.51	5.13	Average	302	26																																																																																				
6	7125.00	60.21	88.20	-27.99	55.08	5.13	Peak	302	26																																																																																				
7	14170.00	45.98	68.20	-22.22	37.96	8.02	Average	100	4																																																																																				
8	14170.00	57.42	88.20	-30.78	49.40	8.02	Peak	100	4																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>33.26</td><td>54.00</td><td>-20.74</td><td>33.04</td><td>0.22</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>4844.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>46.23</td><td>0.22</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>5925.00</td><td>57.53</td><td>68.20</td><td>-10.67</td><td>56.01</td><td>1.52</td><td>Average</td><td>215</td><td>305</td></tr><tr><td>4</td><td>5925.00</td><td>71.43</td><td>88.20</td><td>-16.77</td><td>69.91</td><td>1.52</td><td>Peak</td><td>215</td><td>305</td></tr><tr><td>5 *</td><td>5985.00</td><td>97.79</td><td></td><td></td><td>96.23</td><td>1.56</td><td>Average</td><td>215</td><td>305</td></tr><tr><td>6 *</td><td>5985.00</td><td>111.82</td><td></td><td></td><td>110.26</td><td>1.56</td><td>Peak</td><td>215</td><td>305</td></tr><tr><td>7</td><td>11970.00</td><td>45.12</td><td>54.00</td><td>-8.88</td><td>37.46</td><td>7.66</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>8</td><td>11970.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>47.85</td><td>7.66</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.26	54.00	-20.74	33.04	0.22	Average	100	34	2	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	34	3	5925.00	57.53	68.20	-10.67	56.01	1.52	Average	215	305	4	5925.00	71.43	88.20	-16.77	69.91	1.52	Peak	215	305	5 *	5985.00	97.79			96.23	1.56	Average	215	305	6 *	5985.00	111.82			110.26	1.56	Peak	215	305	7	11970.00	45.12	54.00	-8.88	37.46	7.66	Average	100	31	8	11970.00	55.51	74.00	-18.49	47.85	7.66	Peak	100	31
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.26	54.00	-20.74	33.04	0.22	Average	100	34																																																																																				
2	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	34																																																																																				
3	5925.00	57.53	68.20	-10.67	56.01	1.52	Average	215	305																																																																																				
4	5925.00	71.43	88.20	-16.77	69.91	1.52	Peak	215	305																																																																																				
5 *	5985.00	97.79			96.23	1.56	Average	215	305																																																																																				
6 *	5985.00	111.82			110.26	1.56	Peak	215	305																																																																																				
7	11970.00	45.12	54.00	-8.88	37.46	7.66	Average	100	31																																																																																				
8	11970.00	55.51	74.00	-18.49	47.85	7.66	Peak	100	31																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

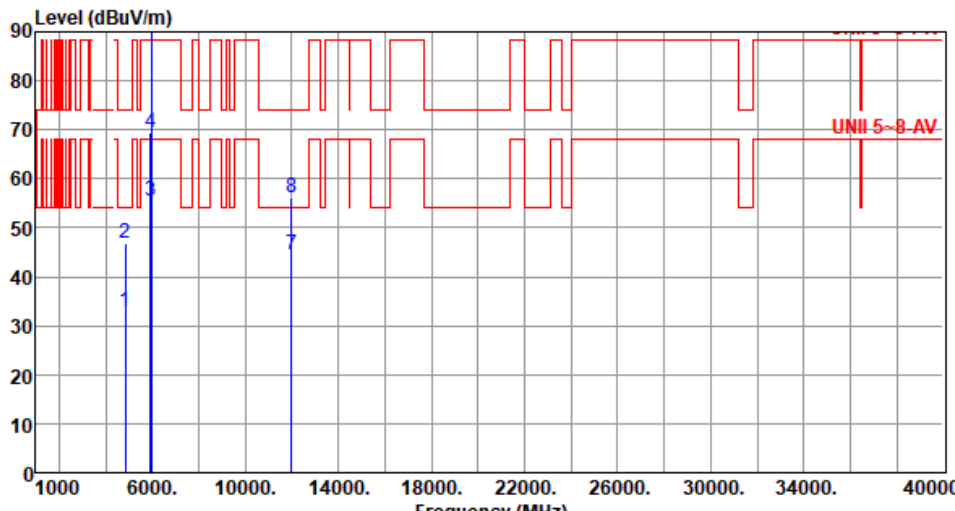


Modulation	be EHT80	Test Freq. (MHz)	5985						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	33.04	54.00	-20.96	32.82	0.22	Average	100	25
2	4844.00	46.81	74.00	-27.19	46.59	0.22	Peak	100	25
3	5925.00	55.41	68.20	-12.79	53.89	1.52	Average	321	25
4	5925.00	69.28	88.20	-18.92	67.76	1.52	Peak	321	25
5 *	5985.00	95.62			94.06	1.56	Average	321	25
6 *	5985.00	109.82			108.26	1.56	Peak	321	25
7	11970.00	44.39	54.00	-9.61	36.73	7.66	Average	100	29
8	11970.00	56.22	74.00	-17.78	48.56	7.66	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	6145																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.21</td><td>54.00</td><td>-28.79</td><td>32.66</td><td>-7.45</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>2</td><td>1094.00</td><td>38.36</td><td>74.00</td><td>-35.64</td><td>45.81</td><td>-7.45</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>3</td><td>4844.00</td><td>33.05</td><td>54.00</td><td>-20.95</td><td>32.83</td><td>0.22</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td>4844.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>46.09</td><td>0.22</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5 *</td><td>6145.00</td><td>97.84</td><td></td><td></td><td>95.91</td><td>1.93</td><td>Average</td><td>212</td><td>308</td></tr><tr><td>6 *</td><td>6145.00</td><td>111.96</td><td></td><td></td><td>110.03</td><td>1.93</td><td>Peak</td><td>212</td><td>308</td></tr><tr><td>7</td><td>12290.00</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>37.41</td><td>7.35</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>8</td><td>12290.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>47.93</td><td>7.35</td><td>Peak</td><td>100</td><td>18</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.21	54.00	-28.79	32.66	-7.45	Average	100	19	2	1094.00	38.36	74.00	-35.64	45.81	-7.45	Peak	100	19	3	4844.00	33.05	54.00	-20.95	32.83	0.22	Average	100	29	4	4844.00	46.31	74.00	-27.69	46.09	0.22	Peak	100	29	5 *	6145.00	97.84			95.91	1.93	Average	212	308	6 *	6145.00	111.96			110.03	1.93	Peak	212	308	7	12290.00	44.76	54.00	-9.24	37.41	7.35	Average	100	18	8	12290.00	55.28	74.00	-18.72	47.93	7.35	Peak	100	18
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.21	54.00	-28.79	32.66	-7.45	Average	100	19																																																																																				
2	1094.00	38.36	74.00	-35.64	45.81	-7.45	Peak	100	19																																																																																				
3	4844.00	33.05	54.00	-20.95	32.83	0.22	Average	100	29																																																																																				
4	4844.00	46.31	74.00	-27.69	46.09	0.22	Peak	100	29																																																																																				
5 *	6145.00	97.84			95.91	1.93	Average	212	308																																																																																				
6 *	6145.00	111.96			110.03	1.93	Peak	212	308																																																																																				
7	12290.00	44.76	54.00	-9.24	37.41	7.35	Average	100	18																																																																																				
8	12290.00	55.28	74.00	-18.72	47.93	7.35	Peak	100	18																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

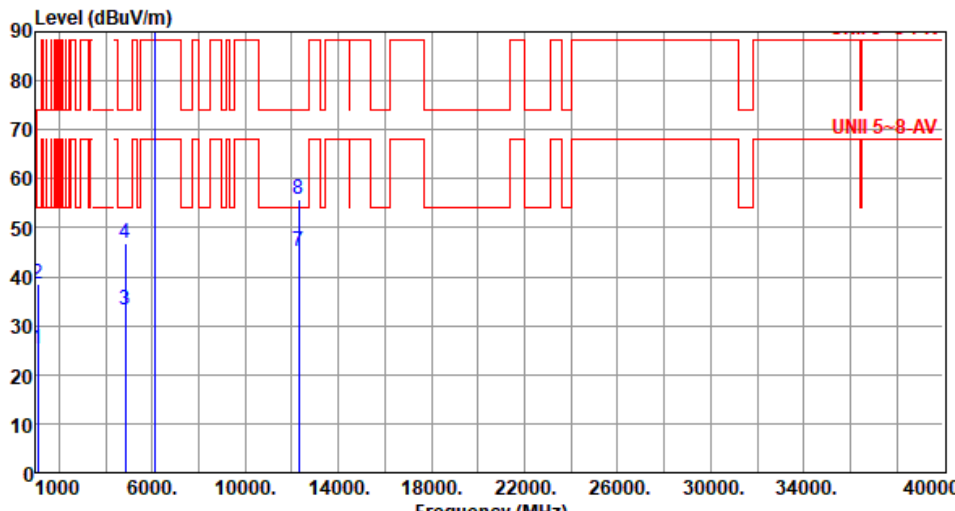

Modulation	be EHT80	Test Freq. (MHz)	6145						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.31	54.00	-28.69	32.76	-7.45	Average	100	41
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	41
3	4844.00	33.08	54.00	-20.92	32.86	0.22	Average	100	52
4	4844.00	46.75	74.00	-27.25	46.53	0.22	Peak	100	52
5 *	6145.00	95.74			93.81	1.93	Average	319	28
6 *	6145.00	109.94			108.01	1.93	Peak	319	28
7	12290.00	45.23	54.00	-8.77	37.88	7.35	Average	100	21
8	12290.00	55.81	74.00	-18.19	48.46	7.35	Peak	100	21

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

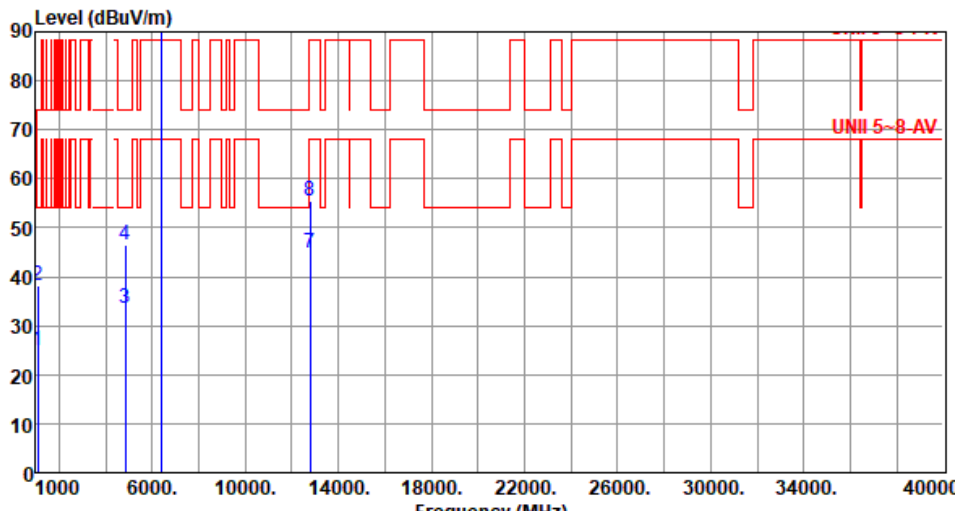

Modulation	be EHT80	Test Freq. (MHz)	6385						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.91	54.00	-29.09	32.36	-7.45	Average	100	35
2	1094.00	38.14	74.00	-35.86	45.59	-7.45	Peak	100	35
3	4844.00	33.45	54.00	-20.55	33.23	0.22	Average	100	26
4	4844.00	46.62	74.00	-27.38	46.40	0.22	Peak	100	26
5 *	6385.00	97.64			94.60	3.04	Average	216	302
6 *	6385.00	111.82			108.78	3.04	Peak	216	302
7	12770.00	44.94	68.20	-23.26	37.80	7.14	Average	100	345
8	12770.00	55.41	88.20	-32.79	48.27	7.14	Peak	100	345


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"*" is Peak / Average value of fundamental frequency

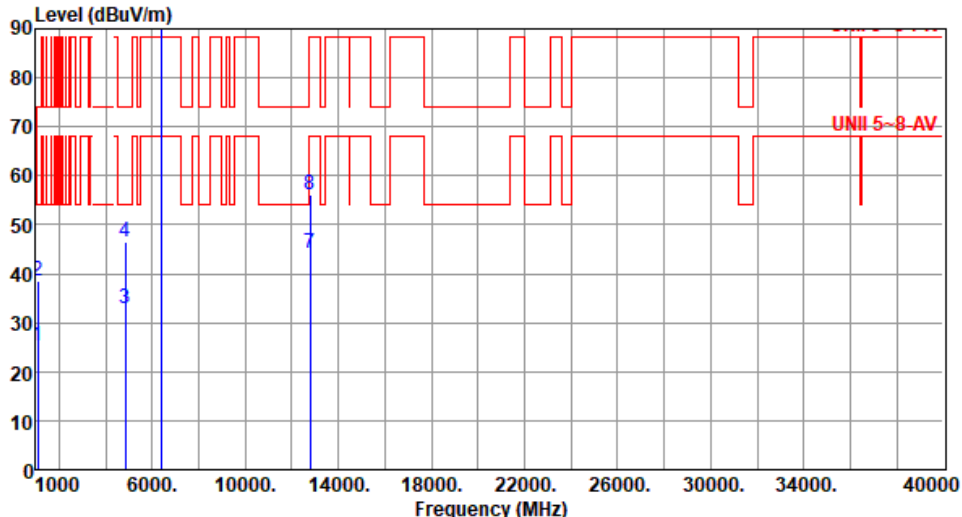

Modulation	be EHT80		Test Freq. (MHz)		6385				
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.38	54.00	-28.62	32.83	-7.45	Average	100	45
2	1094.00	38.66	74.00	-35.34	46.11	-7.45	Peak	100	45
3	4844.00	32.75	54.00	-21.25	32.53	0.22	Average	100	12
4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	12
5 *	6385.00	95.51			92.47	3.04	Average	321	24
6 *	6385.00	109.76	-----	-----	106.72	3.04	Peak	321	24
7	12770.00	44.23	68.20	-23.97	37.09	7.14	Average	100	349
8	12770.00	56.09	88.20	-32.11	48.95	7.14	Peak	100	349

Note 1: Emission Level (dBUV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

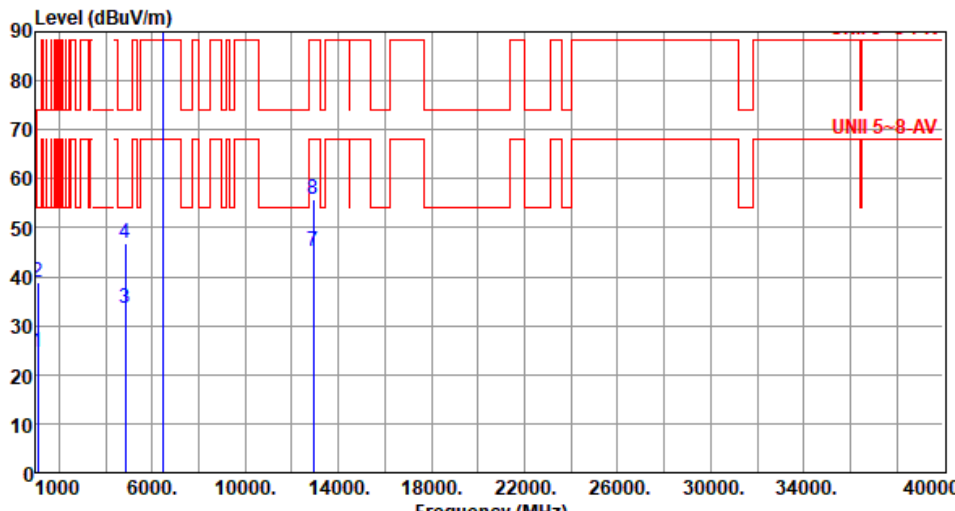

Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.68	54.00	-29.32	32.13	-7.45	Average	100	45
2	1094.00	38.79	74.00	-35.21	46.24	-7.45	Peak	100	45
3	4844.00	33.42	54.00	-20.58	33.20	0.22	Average	100	23
4	4844.00	46.75	74.00	-27.25	46.53	0.22	Peak	100	23
5 *	6465.00	98.16			94.76	3.40	Average	214	301
6 *	6465.00	112.32			108.92	3.40	Peak	214	301
7	12930.00	45.12	68.20	-23.08	38.05	7.07	Average	100	38
8	12930.00	55.81	88.20	-32.39	48.74	7.07	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.56	54.00	-28.44	33.01	-7.45	Average	100	41
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	41
3	4844.00	33.28	54.00	-20.72	33.06	0.22	Average	100	29
4	4844.00	46.95	74.00	-27.05	46.73	0.22	Peak	100	29
5 *	6465.00	96.06			92.66	3.40	Average	315	24
6 *	6465.00	110.24			106.84	3.40	Peak	315	24
7	12930.00	44.64	68.20	-23.56	37.57	7.07	Average	100	26
8	12930.00	55.43	88.20	-32.77	48.36	7.07	Peak	100	26

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.46	54.00	-28.54	32.91	-7.45	Average	100	28
2	1094.00	38.51	74.00	-35.49	45.96	-7.45	Peak	100	28
3	4844.00	33.35	54.00	-20.65	33.13	0.22	Average	100	19
4	4844.00	46.53	74.00	-27.47	46.31	0.22	Peak	100	19
5 *	6545.00	97.68			93.98	3.70	Average	216	303
6 *	6545.00	111.79			108.09	3.70	Peak	216	303
7	13090.00	45.33	68.20	-22.87	38.55	6.78	Average	100	355
8	13090.00	56.46	88.20	-31.74	49.68	6.78	Peak	100	355
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) <			

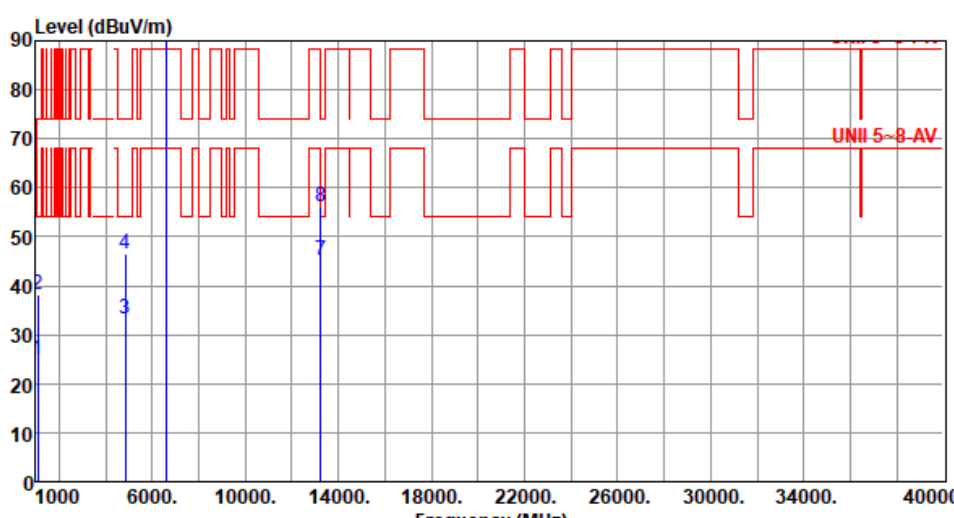


Modulation	be EHT80		Test Freq. (MHz)		6625																																																																																																																		
Polarization	Horizontal																																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.92</td><td>54.00</td><td>-29.08</td><td>32.37</td><td>-7.45</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>1094.00</td><td>38.15</td><td>74.00</td><td>-35.85</td><td>45.60</td><td>-7.45</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>4844.00</td><td>33.36</td><td>54.00</td><td>-20.64</td><td>33.14</td><td>0.22</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>4</td><td>4844.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>46.23</td><td>0.22</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>5 *</td><td>6625.00</td><td>98.25</td><td></td><td></td><td>94.46</td><td>3.79</td><td>Average</td><td>211</td><td>298</td></tr><tr><td>6 *</td><td>6625.00</td><td>112.36</td><td></td><td></td><td>108.57</td><td>3.79</td><td>Peak</td><td>211</td><td>298</td></tr><tr><td>7</td><td>13250.00</td><td>45.18</td><td>54.00</td><td>-8.82</td><td>38.23</td><td>6.95</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>8</td><td>13250.00</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>49.06</td><td>6.95</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1094.00	24.92	54.00	-29.08	32.37	-7.45	Average	100	27	2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	27	3	4844.00	33.36	54.00	-20.64	33.14	0.22	Average	100	18	4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	18	5 *	6625.00	98.25			94.46	3.79	Average	211	298	6 *	6625.00	112.36			108.57	3.79	Peak	211	298	7	13250.00	45.18	54.00	-8.82	38.23	6.95	Average	100	21	8	13250.00	56.01	74.00	-17.99	49.06	6.95	Peak	100	21
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	1094.00	24.92	54.00	-29.08	32.37	-7.45	Average	100	27																																																																																																														
2	1094.00	38.15	74.00	-35.85	45.60	-7.45	Peak	100	27																																																																																																														
3	4844.00	33.36	54.00	-20.64	33.14	0.22	Average	100	18																																																																																																														
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	18																																																																																																														
5 *	6625.00	98.25			94.46	3.79	Average	211	298																																																																																																														
6 *	6625.00	112.36			108.57	3.79	Peak	211	298																																																																																																														
7	13250.00	45.18	54.00	-8.82	38.23	6.95	Average	100	21																																																																																																														
8	13250.00	56.01	74.00	-17.99	49.06	6.95	Peak	100	21																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																							




Modulation	be EHT80	Test Freq. (MHz)	6625																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>24.45</td><td>54.00</td><td>-29.55</td><td>31.90</td><td>-7.45</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>2</td><td>1094.00</td><td>38.62</td><td>74.00</td><td>-35.38</td><td>46.07</td><td>-7.45</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>3</td><td>4844.00</td><td>33.24</td><td>54.00</td><td>-20.76</td><td>33.02</td><td>0.22</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>4</td><td>4844.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>46.69</td><td>0.22</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>5 *</td><td>6625.00</td><td>96.15</td><td></td><td></td><td>92.36</td><td>3.79</td><td>Average</td><td>318</td><td>29</td></tr><tr><td>6 *</td><td>6625.00</td><td>110.39</td><td></td><td></td><td>106.60</td><td>3.79</td><td>Peak</td><td>318</td><td>29</td></tr><tr><td>7</td><td>13250.00</td><td>44.91</td><td>54.00</td><td>-9.09</td><td>37.96</td><td>6.95</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>8</td><td>13250.00</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>48.69</td><td>6.95</td><td>Peak</td><td>100</td><td>38</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.45	54.00	-29.55	31.90	-7.45	Average	100	62	2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	62	3	4844.00	33.24	54.00	-20.76	33.02	0.22	Average	100	45	4	4844.00	46.91	74.00	-27.09	46.69	0.22	Peak	100	45	5 *	6625.00	96.15			92.36	3.79	Average	318	29	6 *	6625.00	110.39			106.60	3.79	Peak	318	29	7	13250.00	44.91	54.00	-9.09	37.96	6.95	Average	100	38	8	13250.00	55.64	74.00	-18.36	48.69	6.95	Peak	100	38
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.45	54.00	-29.55	31.90	-7.45	Average	100	62																																																																																				
2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	62																																																																																				
3	4844.00	33.24	54.00	-20.76	33.02	0.22	Average	100	45																																																																																				
4	4844.00	46.91	74.00	-27.09	46.69	0.22	Peak	100	45																																																																																				
5 *	6625.00	96.15			92.36	3.79	Average	318	29																																																																																				
6 *	6625.00	110.39			106.60	3.79	Peak	318	29																																																																																				
7	13250.00	44.91	54.00	-9.09	37.96	6.95	Average	100	38																																																																																				
8	13250.00	55.64	74.00	-18.36	48.69	6.95	Peak	100	38																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

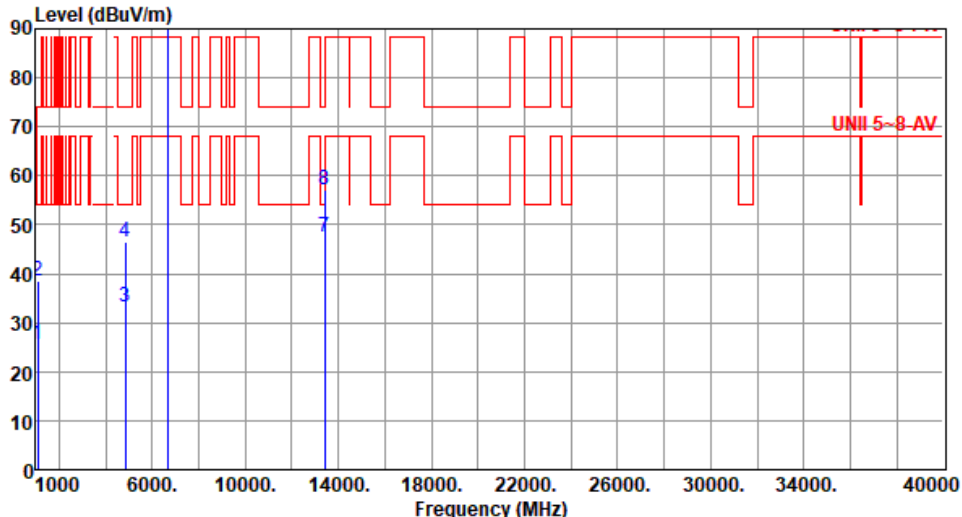


Modulation	be EHT80	Test Freq. (MHz)	6705						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBUV/m) 									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.42	54.00	-28.58	32.87	-7.45	Average	100	29
2	1094.00	38.51	74.00	-35.49	45.96	-7.45	Peak	100	29
3	4844.00	33.28	54.00	-20.72	33.06	0.22	Average	100	42
4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	42
5 *	6705.00	98.41			94.54	3.87	Average	209	294
6 *	6705.00	112.45			108.58	3.87	Peak	209	294
7	13410.00	47.44	68.20	-20.76	40.26	7.18	Average	100	39
8	13410.00	57.08	88.20	-31.12	49.90	7.18	Peak	100	39
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

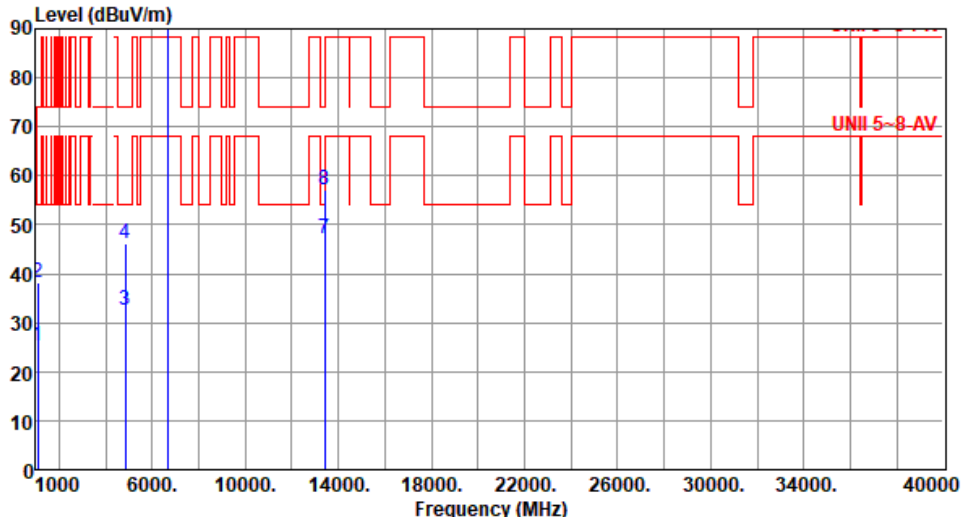


Modulation	be EHT80		Test Freq. (MHz)		6705																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																							
Level (dBUV/m)  <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>1094.00</td><td>25.11</td><td>54.00</td><td>-28.89</td><td>32.56</td><td>-7.45</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>1094.00</td><td>38.16</td><td>74.00</td><td>-35.84</td><td>45.61</td><td>-7.45</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>4844.00</td><td>32.69</td><td>54.00</td><td>-21.31</td><td>32.47</td><td>0.22</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>4</td><td>4844.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>46.09</td><td>0.22</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>5 *</td><td>6705.00</td><td>96.22</td><td></td><td></td><td>92.35</td><td>3.87</td><td>Average</td><td>314</td><td>22</td></tr><tr><td>6 *</td><td>6705.00</td><td>110.45</td><td>-----</td><td>-----</td><td>106.58</td><td>3.87</td><td>Peak</td><td>314</td><td>22</td></tr><tr><td>7</td><td>13410.00</td><td>47.25</td><td>68.20</td><td>-20.95</td><td>40.07</td><td>7.18</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>8</td><td>13410.00</td><td>57.02</td><td>88.20</td><td>-31.18</td><td>49.84</td><td>7.18</td><td>Peak</td><td>100</td><td>39</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1094.00	25.11	54.00	-28.89	32.56	-7.45	Average	100	34	2	1094.00	38.16	74.00	-35.84	45.61	-7.45	Peak	100	34	3	4844.00	32.69	54.00	-21.31	32.47	0.22	Average	100	49	4	4844.00	46.31	74.00	-27.69	46.09	0.22	Peak	100	49	5 *	6705.00	96.22			92.35	3.87	Average	314	22	6 *	6705.00	110.45	-----	-----	106.58	3.87	Peak	314	22	7	13410.00	47.25	68.20	-20.95	40.07	7.18	Average	100	39	8	13410.00	57.02	88.20	-31.18	49.84	7.18	Peak	100	39
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level			reading			High	Table																																																																																																														
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																														
1	1094.00	25.11	54.00	-28.89	32.56	-7.45	Average	100	34																																																																																																														
2	1094.00	38.16	74.00	-35.84	45.61	-7.45	Peak	100	34																																																																																																														
3	4844.00	32.69	54.00	-21.31	32.47	0.22	Average	100	49																																																																																																														
4	4844.00	46.31	74.00	-27.69	46.09	0.22	Peak	100	49																																																																																																														
5 *	6705.00	96.22			92.35	3.87	Average	314	22																																																																																																														
6 *	6705.00	110.45	-----	-----	106.58	3.87	Peak	314	22																																																																																																														
7	13410.00	47.25	68.20	-20.95	40.07	7.18	Average	100	39																																																																																																														
8	13410.00	57.02	88.20	-31.18	49.84	7.18	Peak	100	39																																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																							

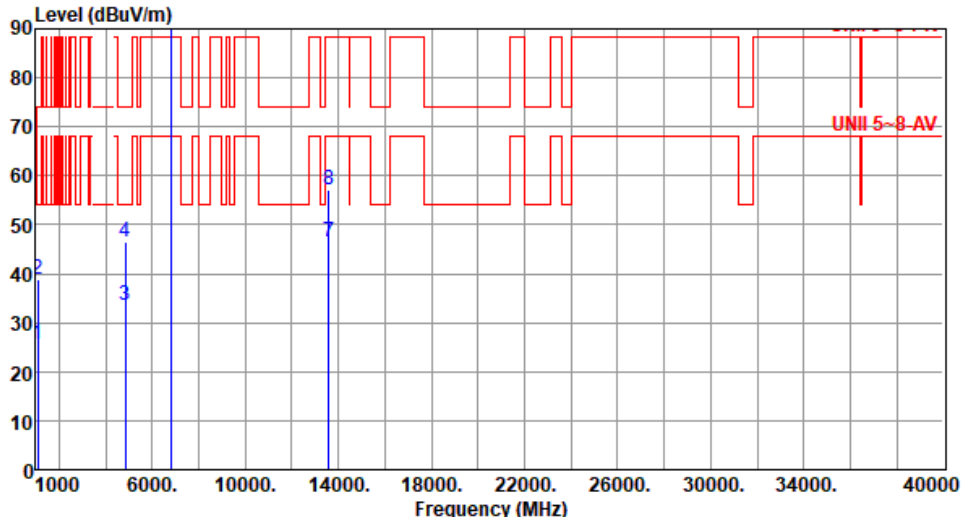

Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.52	54.00	-28.48	32.97	-7.45	Average	100	62
2	1094.00	38.74	74.00	-35.26	46.19	-7.45	Peak	100	62
3	4844.00	33.52	54.00	-20.48	33.30	0.22	Average	100	53
4	4844.00	46.61	74.00	-27.39	46.39	0.22	Peak	100	53
5 *	6785.00	98.26			94.42	3.84	Average	212	298
6 *	6785.00	112.31			108.47	3.84	Peak	212	298
7	13570.00	46.43	68.20	-21.77	38.86	7.57	Average	100	42
8	13570.00	57.16	88.20	-31.04	49.59	7.57	Peak	100	42
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

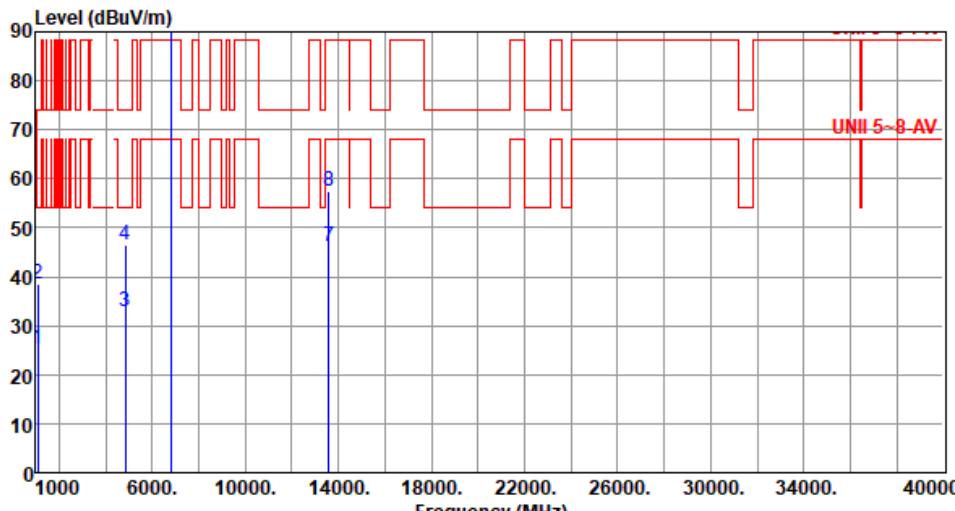

Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.14	54.00	-28.86	32.59	-7.45	Average	100	29
2	1094.00	38.36	74.00	-35.64	45.81	-7.45	Peak	100	29
3	4844.00	32.93	54.00	-21.07	32.71	0.22	Average	100	51
4	4844.00	46.52	74.00	-27.48	46.30	0.22	Peak	100	51
5 *	6785.00	95.94			92.10	3.84	Average	311	23
6 *	6785.00	110.26			106.42	3.84	Peak	311	23
7	13570.00	46.08	68.20	-22.12	38.51	7.57	Average	100	4
8	13570.00	57.47	88.20	-30.73	49.90	7.57	Peak	100	4

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	6865																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>24.62</td><td>54.00</td><td>-29.38</td><td>32.07</td><td>-7.45</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>2</td><td>1094.00</td><td>37.80</td><td>74.00</td><td>-36.20</td><td>45.25</td><td>-7.45</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>3</td><td>4844.00</td><td>32.74</td><td>54.00</td><td>-21.26</td><td>32.52</td><td>0.22</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>4844.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>45.80</td><td>0.22</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5 *</td><td>6865.00</td><td>99.38</td><td></td><td></td><td>95.31</td><td>4.07</td><td>Average</td><td>214</td><td>302</td></tr><tr><td>6 *</td><td>6865.00</td><td>113.33</td><td></td><td></td><td>109.26</td><td>4.07</td><td>Peak</td><td>214</td><td>302</td></tr><tr><td>7</td><td>13730.00</td><td>46.21</td><td>68.20</td><td>-21.99</td><td>39.03</td><td>7.18</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>8</td><td>13730.00</td><td>57.68</td><td>88.20</td><td>-30.52</td><td>50.50</td><td>7.18</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.62	54.00	-29.38	32.07	-7.45	Average	100	33	2	1094.00	37.80	74.00	-36.20	45.25	-7.45	Peak	100	33	3	4844.00	32.74	54.00	-21.26	32.52	0.22	Average	100	20	4	4844.00	46.02	74.00	-27.98	45.80	0.22	Peak	100	20	5 *	6865.00	99.38			95.31	4.07	Average	214	302	6 *	6865.00	113.33			109.26	4.07	Peak	214	302	7	13730.00	46.21	68.20	-21.99	39.03	7.18	Average	100	22	8	13730.00	57.68	88.20	-30.52	50.50	7.18	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.62	54.00	-29.38	32.07	-7.45	Average	100	33																																																																																				
2	1094.00	37.80	74.00	-36.20	45.25	-7.45	Peak	100	33																																																																																				
3	4844.00	32.74	54.00	-21.26	32.52	0.22	Average	100	20																																																																																				
4	4844.00	46.02	74.00	-27.98	45.80	0.22	Peak	100	20																																																																																				
5 *	6865.00	99.38			95.31	4.07	Average	214	302																																																																																				
6 *	6865.00	113.33			109.26	4.07	Peak	214	302																																																																																				
7	13730.00	46.21	68.20	-21.99	39.03	7.18	Average	100	22																																																																																				
8	13730.00	57.68	88.20	-30.52	50.50	7.18	Peak	100	22																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	6865						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1094.00	24.58	54.00	-29.42	32.03	-7.45	Average	100	32
2	1094.00	37.76	74.00	-36.24	45.21	-7.45	Peak	100	32
3	4844.00	32.69	54.00	-21.31	32.47	0.22	Average	100	25
4	4844.00	45.98	74.00	-28.02	45.76	0.22	Peak	100	25
5 *	6865.00	96.92			92.85	4.07	Average	311	25
6 *	6865.00	111.25	-----	-----	107.18	4.07	Peak	311	25
7	13730.00	46.21	68.20	-21.99	39.03	7.18	Average	100	23
8	13730.00	57.72	88.20	-30.48	50.54	7.18	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

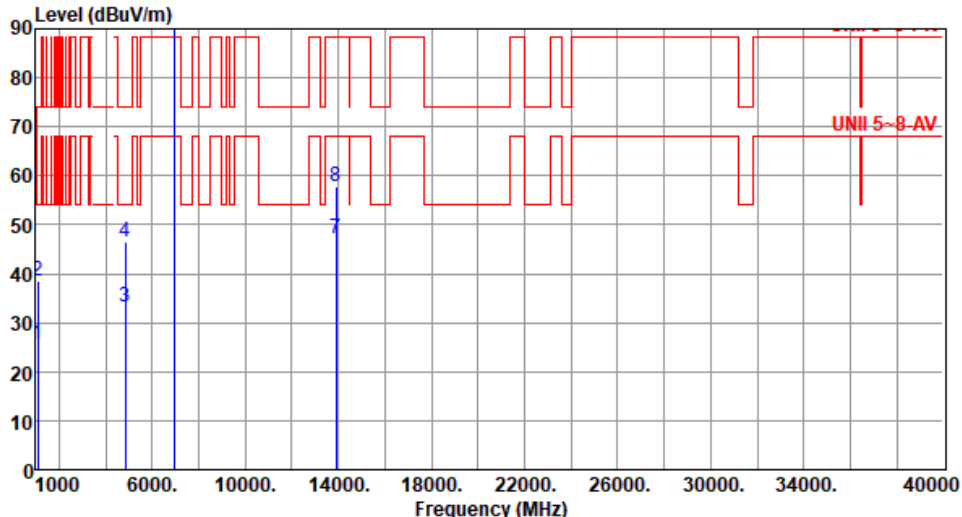

Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.42	54.00	-28.58	32.87	-7.45	Average	100	15
2	1094.00	38.43	74.00	-35.57	45.88	-7.45	Peak	100	15
3	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	24
4	4844.00	46.52	74.00	-27.48	46.30	0.22	Peak	100	24
5 *	6945.00	99.02			94.52	4.50	Average	217	301
6 *	6945.00	113.05			108.55	4.50	Peak	217	301
7	13890.00	47.01	68.20	-21.19	39.55	7.46	Average	100	297
8	13890.00	57.86	88.20	-30.34	50.40	7.46	Peak	100	297

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80		Test Freq. (MHz)		6945																																																																																														
Polarization	Vertical																																																																																																		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																			
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.55</td><td>54.00</td><td>-28.45</td><td>33.00</td><td>-7.45</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>2</td><td>1094.00</td><td>38.61</td><td>74.00</td><td>-35.39</td><td>46.06</td><td>-7.45</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>3</td><td>4844.00</td><td>32.86</td><td>54.00</td><td>-21.14</td><td>32.64</td><td>0.22</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td>4844.00</td><td>46.59</td><td>74.00</td><td>-27.41</td><td>46.37</td><td>0.22</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5 *</td><td>6945.00</td><td>96.64</td><td></td><td></td><td>92.14</td><td>4.50</td><td>Average</td><td>310</td><td>21</td></tr><tr><td>6 *</td><td>6945.00</td><td>110.96</td><td></td><td></td><td>106.46</td><td>4.50</td><td>Peak</td><td>310</td><td>21</td></tr><tr><td>7</td><td>13890.00</td><td>45.47</td><td>68.20</td><td>-22.73</td><td>38.01</td><td>7.46</td><td>Average</td><td>100</td><td>5</td></tr><tr><td>8</td><td>13890.00</td><td>57.57</td><td>88.20</td><td>-30.63</td><td>50.11</td><td>7.46</td><td>Peak</td><td>100</td><td>5</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.55	54.00	-28.45	33.00	-7.45	Average	100	31	2	1094.00	38.61	74.00	-35.39	46.06	-7.45	Peak	100	31	3	4844.00	32.86	54.00	-21.14	32.64	0.22	Average	100	29	4	4844.00	46.59	74.00	-27.41	46.37	0.22	Peak	100	29	5 *	6945.00	96.64			92.14	4.50	Average	310	21	6 *	6945.00	110.96			106.46	4.50	Peak	310	21	7	13890.00	45.47	68.20	-22.73	38.01	7.46	Average	100	5	8	13890.00	57.57	88.20	-30.63	50.11	7.46	Peak	100	5
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																										
1	1094.00	25.55	54.00	-28.45	33.00	-7.45	Average	100	31																																																																																										
2	1094.00	38.61	74.00	-35.39	46.06	-7.45	Peak	100	31																																																																																										
3	4844.00	32.86	54.00	-21.14	32.64	0.22	Average	100	29																																																																																										
4	4844.00	46.59	74.00	-27.41	46.37	0.22	Peak	100	29																																																																																										
5 *	6945.00	96.64			92.14	4.50	Average	310	21																																																																																										
6 *	6945.00	110.96			106.46	4.50	Peak	310	21																																																																																										
7	13890.00	45.47	68.20	-22.73	38.01	7.46	Average	100	5																																																																																										
8	13890.00	57.57	88.20	-30.63	50.11	7.46	Peak	100	5																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4844.00</td><td>33.29</td><td>54.00</td><td>-20.71</td><td>33.07</td><td>0.22</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>2</td><td>4844.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>46.26</td><td>0.22</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>3 *</td><td>7025.00</td><td>98.46</td><td></td><td></td><td>93.83</td><td>4.63</td><td>Average</td><td>207</td><td>295</td></tr><tr><td>4 *</td><td>7025.00</td><td>112.39</td><td></td><td></td><td>107.76</td><td>4.63</td><td>Peak</td><td>207</td><td>295</td></tr><tr><td>5</td><td>7125.00</td><td>48.42</td><td>68.20</td><td>-19.78</td><td>43.29</td><td>5.13</td><td>Average</td><td>207</td><td>295</td></tr><tr><td>6</td><td>7125.00</td><td>60.41</td><td>88.20</td><td>-27.79</td><td>55.28</td><td>5.13</td><td>Peak</td><td>207</td><td>295</td></tr><tr><td>7</td><td>14050.00</td><td>46.21</td><td>68.20</td><td>-21.99</td><td>38.33</td><td>7.88</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>14050.00</td><td>57.59</td><td>88.20</td><td>-30.61</td><td>49.71</td><td>7.88</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	51	2	4844.00	46.48	74.00	-27.52	46.26	0.22	Peak	100	51	3 *	7025.00	98.46			93.83	4.63	Average	207	295	4 *	7025.00	112.39			107.76	4.63	Peak	207	295	5	7125.00	48.42	68.20	-19.78	43.29	5.13	Average	207	295	6	7125.00	60.41	88.20	-27.79	55.28	5.13	Peak	207	295	7	14050.00	46.21	68.20	-21.99	38.33	7.88	Average	100	35	8	14050.00	57.59	88.20	-30.61	49.71	7.88	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.29	54.00	-20.71	33.07	0.22	Average	100	51																																																																																				
2	4844.00	46.48	74.00	-27.52	46.26	0.22	Peak	100	51																																																																																				
3 *	7025.00	98.46			93.83	4.63	Average	207	295																																																																																				
4 *	7025.00	112.39			107.76	4.63	Peak	207	295																																																																																				
5	7125.00	48.42	68.20	-19.78	43.29	5.13	Average	207	295																																																																																				
6	7125.00	60.41	88.20	-27.79	55.28	5.13	Peak	207	295																																																																																				
7	14050.00	46.21	68.20	-21.99	38.33	7.88	Average	100	35																																																																																				
8	14050.00	57.59	88.20	-30.61	49.71	7.88	Peak	100	35																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):64			
Level (dBUV/m)			


Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>33.26</td><td>54.00</td><td>-20.74</td><td>33.04</td><td>0.22</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>2</td><td>4844.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>46.27</td><td>0.22</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>3</td><td>5925.00</td><td>57.82</td><td>68.20</td><td>-10.38</td><td>56.30</td><td>1.52</td><td>Average</td><td>201</td><td>302</td></tr><tr><td>4</td><td>5925.00</td><td>70.83</td><td>88.20</td><td>-17.37</td><td>69.31</td><td>1.52</td><td>Peak</td><td>201</td><td>302</td></tr><tr><td>5 *</td><td>6025.00</td><td>97.84</td><td></td><td></td><td>96.20</td><td>1.64</td><td>Average</td><td>201</td><td>302</td></tr><tr><td>6 *</td><td>6025.00</td><td>111.34</td><td></td><td></td><td>109.70</td><td>1.64</td><td>Peak</td><td>201</td><td>302</td></tr><tr><td>7</td><td>12050.00</td><td>45.13</td><td>54.00</td><td>-8.87</td><td>37.26</td><td>7.87</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>8</td><td>12050.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>47.65</td><td>7.87</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.26	54.00	-20.74	33.04	0.22	Average	100	31	2	4844.00	46.49	74.00	-27.51	46.27	0.22	Peak	100	31	3	5925.00	57.82	68.20	-10.38	56.30	1.52	Average	201	302	4	5925.00	70.83	88.20	-17.37	69.31	1.52	Peak	201	302	5 *	6025.00	97.84			96.20	1.64	Average	201	302	6 *	6025.00	111.34			109.70	1.64	Peak	201	302	7	12050.00	45.13	54.00	-8.87	37.26	7.87	Average	100	29	8	12050.00	55.52	74.00	-18.48	47.65	7.87	Peak	100	29
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.26	54.00	-20.74	33.04	0.22	Average	100	31																																																																																				
2	4844.00	46.49	74.00	-27.51	46.27	0.22	Peak	100	31																																																																																				
3	5925.00	57.82	68.20	-10.38	56.30	1.52	Average	201	302																																																																																				
4	5925.00	70.83	88.20	-17.37	69.31	1.52	Peak	201	302																																																																																				
5 *	6025.00	97.84			96.20	1.64	Average	201	302																																																																																				
6 *	6025.00	111.34			109.70	1.64	Peak	201	302																																																																																				
7	12050.00	45.13	54.00	-8.87	37.26	7.87	Average	100	29																																																																																				
8	12050.00	55.52	74.00	-18.48	47.65	7.87	Peak	100	29																																																																																				

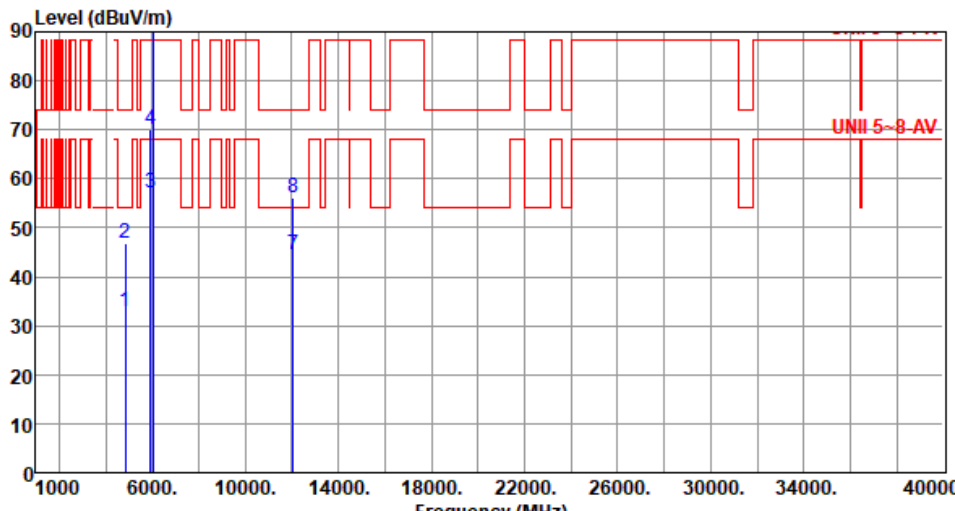


Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>33.04</td><td>54.00</td><td>-20.96</td><td>32.82</td><td>0.22</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>2</td><td>4844.00</td><td>46.75</td><td>74.00</td><td>-27.25</td><td>46.53</td><td>0.22</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>3</td><td>5925.00</td><td>56.97</td><td>68.20</td><td>-11.23</td><td>55.45</td><td>1.52</td><td>Average</td><td>347</td><td>9</td></tr><tr><td>4</td><td>5925.00</td><td>70.17</td><td>88.20</td><td>-18.03</td><td>68.65</td><td>1.52</td><td>Peak</td><td>347</td><td>9</td></tr><tr><td>5 *</td><td>6025.00</td><td>94.98</td><td></td><td></td><td>93.34</td><td>1.64</td><td>Average</td><td>347</td><td>9</td></tr><tr><td>6 *</td><td>6025.00</td><td>109.42</td><td></td><td></td><td>107.78</td><td>1.64</td><td>Peak</td><td>347</td><td>9</td></tr><tr><td>7</td><td>12050.00</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>36.52</td><td>7.87</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>12050.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>48.32</td><td>7.87</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.04	54.00	-20.96	32.82	0.22	Average	100	39	2	4844.00	46.75	74.00	-27.25	46.53	0.22	Peak	100	39	3	5925.00	56.97	68.20	-11.23	55.45	1.52	Average	347	9	4	5925.00	70.17	88.20	-18.03	68.65	1.52	Peak	347	9	5 *	6025.00	94.98			93.34	1.64	Average	347	9	6 *	6025.00	109.42			107.78	1.64	Peak	347	9	7	12050.00	44.39	54.00	-9.61	36.52	7.87	Average	100	35	8	12050.00	56.19	74.00	-17.81	48.32	7.87	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.04	54.00	-20.96	32.82	0.22	Average	100	39																																																																																				
2	4844.00	46.75	74.00	-27.25	46.53	0.22	Peak	100	39																																																																																				
3	5925.00	56.97	68.20	-11.23	55.45	1.52	Average	347	9																																																																																				
4	5925.00	70.17	88.20	-18.03	68.65	1.52	Peak	347	9																																																																																				
5 *	6025.00	94.98			93.34	1.64	Average	347	9																																																																																				
6 *	6025.00	109.42			107.78	1.64	Peak	347	9																																																																																				
7	12050.00	44.39	54.00	-9.61	36.52	7.87	Average	100	35																																																																																				
8	12050.00	56.19	74.00	-17.81	48.32	7.87	Peak	100	35																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

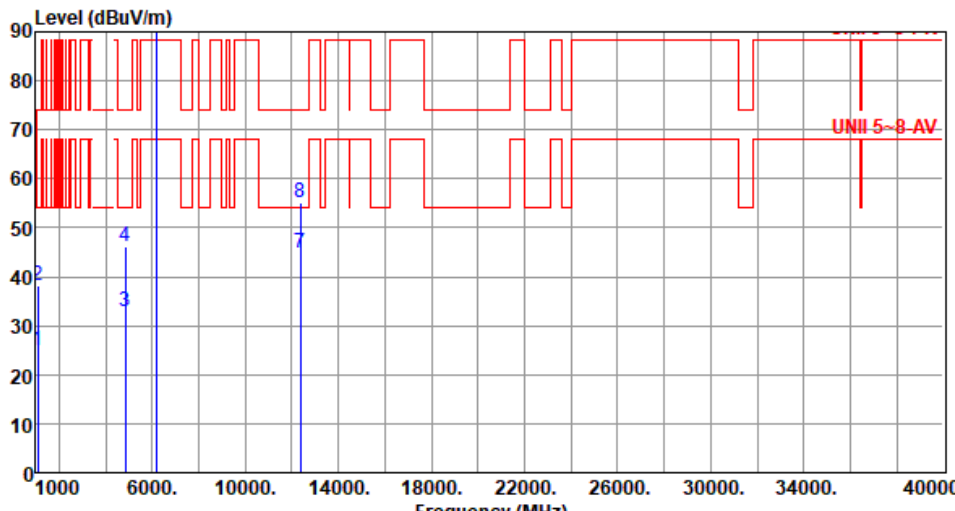

Modulation	be EHT160	Test Freq. (MHz)	6185																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.01</td><td>54.00</td><td>-28.99</td><td>32.46</td><td>-7.45</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>2</td><td>1094.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>45.64</td><td>-7.45</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>3</td><td>4844.00</td><td>32.94</td><td>54.00</td><td>-21.06</td><td>32.72</td><td>0.22</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>4844.00</td><td>46.23</td><td>74.00</td><td>-27.77</td><td>46.01</td><td>0.22</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5 *</td><td>6185.00</td><td>97.91</td><td></td><td></td><td>95.88</td><td>2.03</td><td>Average</td><td>205</td><td>304</td></tr><tr><td>6 *</td><td>6185.00</td><td>111.36</td><td></td><td></td><td>109.33</td><td>2.03</td><td>Peak</td><td>205</td><td>304</td></tr><tr><td>7</td><td>12370.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>37.66</td><td>7.13</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>8</td><td>12370.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>48.15</td><td>7.13</td><td>Peak</td><td>100</td><td>21</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.01	54.00	-28.99	32.46	-7.45	Average	100	16	2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	16	3	4844.00	32.94	54.00	-21.06	32.72	0.22	Average	100	25	4	4844.00	46.23	74.00	-27.77	46.01	0.22	Peak	100	25	5 *	6185.00	97.91			95.88	2.03	Average	205	304	6 *	6185.00	111.36			109.33	2.03	Peak	205	304	7	12370.00	44.79	54.00	-9.21	37.66	7.13	Average	100	21	8	12370.00	55.28	74.00	-18.72	48.15	7.13	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.01	54.00	-28.99	32.46	-7.45	Average	100	16																																																																																				
2	1094.00	38.19	74.00	-35.81	45.64	-7.45	Peak	100	16																																																																																				
3	4844.00	32.94	54.00	-21.06	32.72	0.22	Average	100	25																																																																																				
4	4844.00	46.23	74.00	-27.77	46.01	0.22	Peak	100	25																																																																																				
5 *	6185.00	97.91			95.88	2.03	Average	205	304																																																																																				
6 *	6185.00	111.36			109.33	2.03	Peak	205	304																																																																																				
7	12370.00	44.79	54.00	-9.21	37.66	7.13	Average	100	21																																																																																				
8	12370.00	55.28	74.00	-18.72	48.15	7.13	Peak	100	21																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

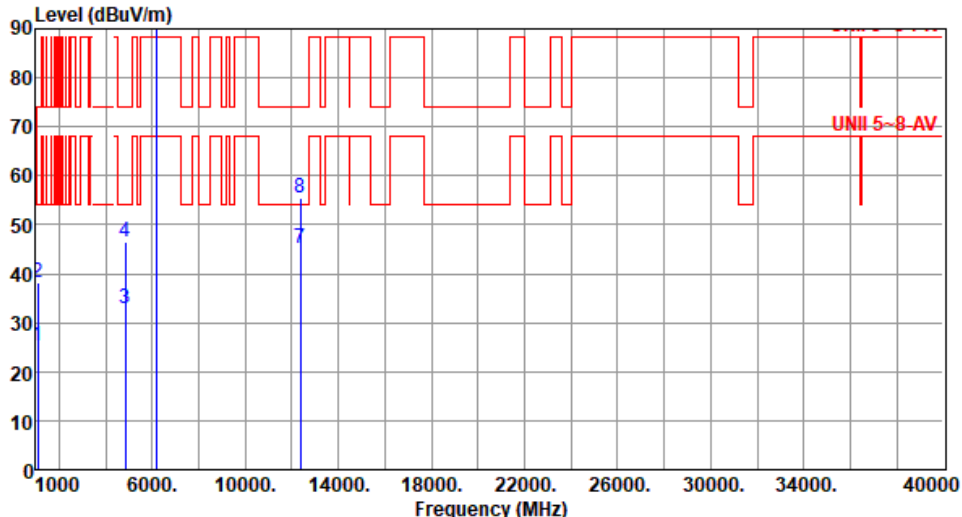

Modulation	be EHT160		Test Freq. (MHz)		6185																																																																																											
Polarization	Vertical																																																																																															
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>25.24</td><td>54.00</td><td>-28.76</td><td>32.69</td><td>-7.45</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>1094.00</td><td>38.33</td><td>74.00</td><td>-35.67</td><td>45.78</td><td>-7.45</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>4844.00</td><td>32.91</td><td>54.00</td><td>-21.09</td><td>32.69</td><td>0.22</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>4</td><td>4844.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>46.36</td><td>0.22</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>5 *</td><td>6185.00</td><td>95.11</td><td></td><td></td><td>93.08</td><td>2.03</td><td>Average</td><td>349</td><td>12</td></tr><tr><td>6 *</td><td>6185.00</td><td>109.54</td><td></td><td></td><td>107.51</td><td>2.03</td><td>Peak</td><td>349</td><td>12</td></tr><tr><td>7</td><td>12370.00</td><td>45.09</td><td>54.00</td><td>-8.91</td><td>37.96</td><td>7.13</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>8</td><td>12370.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>48.48</td><td>7.13</td><td>Peak</td><td>100</td><td>26</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.24	54.00	-28.76	32.69	-7.45	Average	100	36	2	1094.00	38.33	74.00	-35.67	45.78	-7.45	Peak	100	36	3	4844.00	32.91	54.00	-21.09	32.69	0.22	Average	100	32	4	4844.00	46.58	74.00	-27.42	46.36	0.22	Peak	100	32	5 *	6185.00	95.11			93.08	2.03	Average	349	12	6 *	6185.00	109.54			107.51	2.03	Peak	349	12	7	12370.00	45.09	54.00	-8.91	37.96	7.13	Average	100	26	8	12370.00	55.61	74.00	-18.39	48.48	7.13	Peak	100	26
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																							
1	1094.00	25.24	54.00	-28.76	32.69	-7.45	Average	100	36																																																																																							
2	1094.00	38.33	74.00	-35.67	45.78	-7.45	Peak	100	36																																																																																							
3	4844.00	32.91	54.00	-21.09	32.69	0.22	Average	100	32																																																																																							
4	4844.00	46.58	74.00	-27.42	46.36	0.22	Peak	100	32																																																																																							
5 *	6185.00	95.11			93.08	2.03	Average	349	12																																																																																							
6 *	6185.00	109.54			107.51	2.03	Peak	349	12																																																																																							
7	12370.00	45.09	54.00	-8.91	37.96	7.13	Average	100	26																																																																																							
8	12370.00	55.61	74.00	-18.39	48.48	7.13	Peak	100	26																																																																																							
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.79</td><td>54.00</td><td>-29.21</td><td>32.24</td><td>-7.45</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>1094.00</td><td>37.94</td><td>74.00</td><td>-36.06</td><td>45.39</td><td>-7.45</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>4844.00</td><td>33.34</td><td>54.00</td><td>-20.66</td><td>33.12</td><td>0.22</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>4844.00</td><td>46.52</td><td>74.00</td><td>-27.48</td><td>46.30</td><td>0.22</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5 *</td><td>6345.00</td><td>97.54</td><td></td><td></td><td>94.85</td><td>2.69</td><td>Average</td><td>208</td><td>302</td></tr><tr><td>6 *</td><td>6345.00</td><td>111.15</td><td></td><td></td><td>108.46</td><td>2.69</td><td>Peak</td><td>208</td><td>302</td></tr><tr><td>7</td><td>12690.00</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>37.89</td><td>6.86</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>8</td><td>12690.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>48.38</td><td>6.86</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.79	54.00	-29.21	32.24	-7.45	Average	100	34	2	1094.00	37.94	74.00	-36.06	45.39	-7.45	Peak	100	34	3	4844.00	33.34	54.00	-20.66	33.12	0.22	Average	100	25	4	4844.00	46.52	74.00	-27.48	46.30	0.22	Peak	100	25	5 *	6345.00	97.54			94.85	2.69	Average	208	302	6 *	6345.00	111.15			108.46	2.69	Peak	208	302	7	12690.00	44.75	54.00	-9.25	37.89	6.86	Average	100	36	8	12690.00	55.24	74.00	-18.76	48.38	6.86	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.79	54.00	-29.21	32.24	-7.45	Average	100	34																																																																																				
2	1094.00	37.94	74.00	-36.06	45.39	-7.45	Peak	100	34																																																																																				
3	4844.00	33.34	54.00	-20.66	33.12	0.22	Average	100	25																																																																																				
4	4844.00	46.52	74.00	-27.48	46.30	0.22	Peak	100	25																																																																																				
5 *	6345.00	97.54			94.85	2.69	Average	208	302																																																																																				
6 *	6345.00	111.15			108.46	2.69	Peak	208	302																																																																																				
7	12690.00	44.75	54.00	-9.25	37.89	6.86	Average	100	36																																																																																				
8	12690.00	55.24	74.00	-18.76	48.38	6.86	Peak	100	36																																																																																				




Modulation	be EHT160	Test Freq. (MHz)	6345						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.32	54.00	-28.68	32.77	-7.45	Average	100	49
2	1094.00	38.61	74.00	-35.39	46.06	-7.45	Peak	100	49
3	4844.00	32.65	54.00	-21.35	32.43	0.22	Average	100	16
4	4844.00	46.31	74.00	-27.69	46.09	0.22	Peak	100	16
5 *	6345.00	94.82			92.13	2.69	Average	345	16
6 *	6345.00	109.28			106.59	2.69	Peak	345	16
7	12690.00	45.12	54.00	-8.88	38.26	6.86	Average	100	23
8	12690.00	55.59	74.00	-18.41	48.73	6.86	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

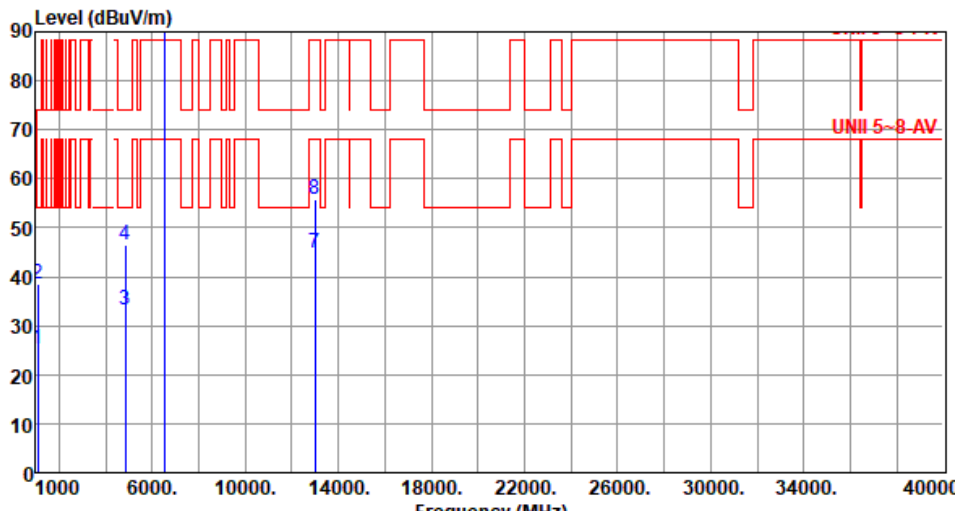

Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	25.33	54.00	-28.67	32.78	-7.45	Average	100	31
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	31
3	4844.00	33.22	54.00	-20.78	33.00	0.22	Average	100	16
4	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	16
5 *	6505.00	97.68			94.04	3.64	Average	202	306
6 *	6505.00	111.24			107.60	3.64	Peak	202	306
7	13010.00	44.88	68.20	-23.32	38.03	6.85	Average	100	35
8	13010.00	55.79	88.20	-32.41	48.94	6.85	Peak	100	35
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

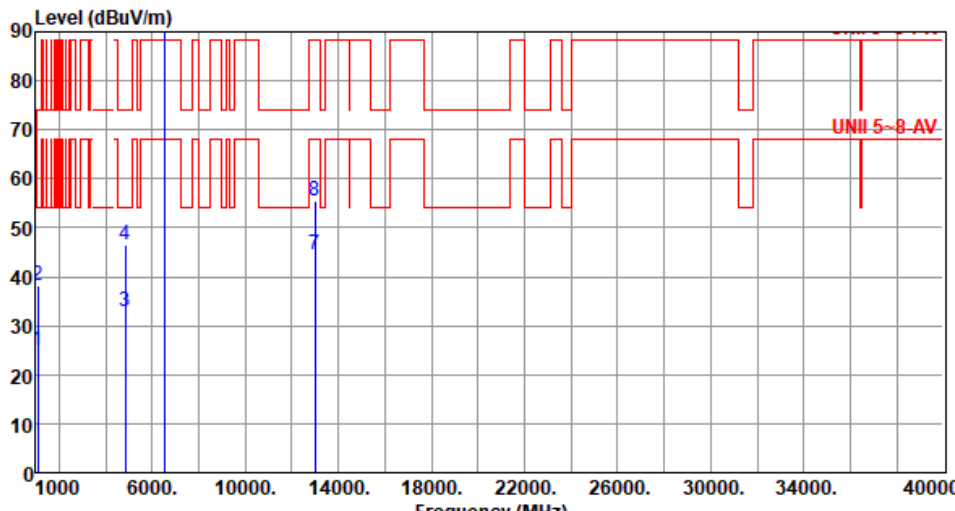

Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1094.00	24.96	54.00	-29.04	32.41	-7.45	Average	100	25
2	1094.00	38.14	74.00	-35.86	45.59	-7.45	Peak	100	25
3	4844.00	32.76	54.00	-21.24	32.54	0.22	Average	100	14
4	4844.00	46.45	74.00	-27.55	46.23	0.22	Peak	100	14
5 *	6505.00	94.94			91.30	3.64	Average	348	19
6 *	6505.00	109.36			105.72	3.64	Peak	348	19
7	13010.00	44.59	68.20	-23.61	37.74	6.85	Average	100	19
8	13010.00	55.41	88.20	-32.79	48.56	6.85	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.34</td><td>54.00</td><td>-28.66</td><td>32.79</td><td>-7.45</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>2</td><td>1094.00</td><td>38.42</td><td>74.00</td><td>-35.58</td><td>45.87</td><td>-7.45</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>3</td><td>4844.00</td><td>33.19</td><td>54.00</td><td>-20.81</td><td>32.97</td><td>0.22</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>4844.00</td><td>46.32</td><td>74.00</td><td>-27.68</td><td>46.10</td><td>0.22</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5 *</td><td>6665.00</td><td>97.45</td><td></td><td></td><td>93.64</td><td>3.81</td><td>Average</td><td>209</td><td>296</td></tr><tr><td>6 *</td><td>6665.00</td><td>111.06</td><td></td><td></td><td>107.25</td><td>3.81</td><td>Peak</td><td>209</td><td>296</td></tr><tr><td>7</td><td>13330.00</td><td>47.44</td><td>54.00</td><td>-6.56</td><td>40.38</td><td>7.06</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>8</td><td>13330.00</td><td>57.08</td><td>74.00</td><td>-16.92</td><td>50.02</td><td>7.06</td><td>Peak</td><td>100</td><td>43</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.34	54.00	-28.66	32.79	-7.45	Average	100	31	2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	31	3	4844.00	33.19	54.00	-20.81	32.97	0.22	Average	100	48	4	4844.00	46.32	74.00	-27.68	46.10	0.22	Peak	100	48	5 *	6665.00	97.45			93.64	3.81	Average	209	296	6 *	6665.00	111.06			107.25	3.81	Peak	209	296	7	13330.00	47.44	54.00	-6.56	40.38	7.06	Average	100	43	8	13330.00	57.08	74.00	-16.92	50.02	7.06	Peak	100	43
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.34	54.00	-28.66	32.79	-7.45	Average	100	31																																																																																				
2	1094.00	38.42	74.00	-35.58	45.87	-7.45	Peak	100	31																																																																																				
3	4844.00	33.19	54.00	-20.81	32.97	0.22	Average	100	48																																																																																				
4	4844.00	46.32	74.00	-27.68	46.10	0.22	Peak	100	48																																																																																				
5 *	6665.00	97.45			93.64	3.81	Average	209	296																																																																																				
6 *	6665.00	111.06			107.25	3.81	Peak	209	296																																																																																				
7	13330.00	47.44	54.00	-6.56	40.38	7.06	Average	100	43																																																																																				
8	13330.00	57.08	74.00	-16.92	50.02	7.06	Peak	100	43																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1094.00</td><td>24.88</td><td>54.00</td><td>-29.12</td><td>32.33</td><td>-7.45</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>1094.00</td><td>37.92</td><td>74.00</td><td>-36.08</td><td>45.37</td><td>-7.45</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>4844.00</td><td>32.78</td><td>54.00</td><td>-21.22</td><td>32.56</td><td>0.22</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>4</td><td>4844.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>46.02</td><td>0.22</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>5 *</td><td>6665.00</td><td>94.75</td><td></td><td></td><td>90.94</td><td>3.81</td><td>Average</td><td>341</td><td>22</td></tr><tr><td>6 *</td><td>6665.00</td><td>109.15</td><td></td><td></td><td>105.34</td><td>3.81</td><td>Peak</td><td>341</td><td>22</td></tr><tr><td>7</td><td>13330.00</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>40.16</td><td>7.06</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>8</td><td>13330.00</td><td>56.95</td><td>74.00</td><td>-17.05</td><td>49.89</td><td>7.06</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	24.88	54.00	-29.12	32.33	-7.45	Average	100	36	2	1094.00	37.92	74.00	-36.08	45.37	-7.45	Peak	100	36	3	4844.00	32.78	54.00	-21.22	32.56	0.22	Average	100	49	4	4844.00	46.24	74.00	-27.76	46.02	0.22	Peak	100	49	5 *	6665.00	94.75			90.94	3.81	Average	341	22	6 *	6665.00	109.15			105.34	3.81	Peak	341	22	7	13330.00	47.22	54.00	-6.78	40.16	7.06	Average	100	31	8	13330.00	56.95	74.00	-17.05	49.89	7.06	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	24.88	54.00	-29.12	32.33	-7.45	Average	100	36																																																																																				
2	1094.00	37.92	74.00	-36.08	45.37	-7.45	Peak	100	36																																																																																				
3	4844.00	32.78	54.00	-21.22	32.56	0.22	Average	100	49																																																																																				
4	4844.00	46.24	74.00	-27.76	46.02	0.22	Peak	100	49																																																																																				
5 *	6665.00	94.75			90.94	3.81	Average	341	22																																																																																				
6 *	6665.00	109.15			105.34	3.81	Peak	341	22																																																																																				
7	13330.00	47.22	54.00	-6.78	40.16	7.06	Average	100	31																																																																																				
8	13330.00	56.95	74.00	-17.05	49.89	7.06	Peak	100	31																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT160		Test Freq. (MHz)		6825				
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
					dBuV			cm	deg
1	1094.00	25.44	54.00	-28.56	32.89	-7.45	Average	100	63
2	1094.00	38.62	74.00	-35.38	46.07	-7.45	Peak	100	63
3	4844.00	33.45	54.00	-20.55	33.23	0.22	Average	100	54
4	4844.00	46.51	74.00	-27.49	46.29	0.22	Peak	100	54
5 *	6825.00	97.28			93.36	3.92	Average	210	298
6 *	6825.00	110.94			107.02	3.92	Peak	210	298
7	13650.00	47.46	68.20	-20.74	40.11	7.35	Average	100	35
8	13650.00	57.17	88.20	-31.03	49.82	7.35	Peak	100	35

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT160	Test Freq. (MHz)	6825																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1094.00</td><td>25.02</td><td>54.00</td><td>-28.98</td><td>32.47</td><td>-7.45</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>1094.00</td><td>38.21</td><td>74.00</td><td>-35.79</td><td>45.66</td><td>-7.45</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>4844.00</td><td>32.75</td><td>54.00</td><td>-21.25</td><td>32.53</td><td>0.22</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>4</td><td>4844.00</td><td>46.42</td><td>74.00</td><td>-27.58</td><td>46.20</td><td>0.22</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>5 *</td><td>6825.00</td><td>94.45</td><td></td><td></td><td>90.53</td><td>3.92</td><td>Average</td><td>346</td><td>25</td></tr><tr><td>6 *</td><td>6825.00</td><td>108.96</td><td></td><td></td><td>105.04</td><td>3.92</td><td>Peak</td><td>346</td><td>25</td></tr><tr><td>7</td><td>13650.00</td><td>47.38</td><td>68.20</td><td>-20.82</td><td>40.03</td><td>7.35</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>8</td><td>13650.00</td><td>57.22</td><td>88.20</td><td>-30.98</td><td>49.87</td><td>7.35</td><td>Peak</td><td>100</td><td>39</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	29	2	1094.00	38.21	74.00	-35.79	45.66	-7.45	Peak	100	29	3	4844.00	32.75	54.00	-21.25	32.53	0.22	Average	100	45	4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	45	5 *	6825.00	94.45			90.53	3.92	Average	346	25	6 *	6825.00	108.96			105.04	3.92	Peak	346	25	7	13650.00	47.38	68.20	-20.82	40.03	7.35	Average	100	39	8	13650.00	57.22	88.20	-30.98	49.87	7.35	Peak	100	39
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1094.00	25.02	54.00	-28.98	32.47	-7.45	Average	100	29																																																																																				
2	1094.00	38.21	74.00	-35.79	45.66	-7.45	Peak	100	29																																																																																				
3	4844.00	32.75	54.00	-21.25	32.53	0.22	Average	100	45																																																																																				
4	4844.00	46.42	74.00	-27.58	46.20	0.22	Peak	100	45																																																																																				
5 *	6825.00	94.45			90.53	3.92	Average	346	25																																																																																				
6 *	6825.00	108.96			105.04	3.92	Peak	346	25																																																																																				
7	13650.00	47.38	68.20	-20.82	40.03	7.35	Average	100	39																																																																																				
8	13650.00	57.22	88.20	-30.98	49.87	7.35	Peak	100	39																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

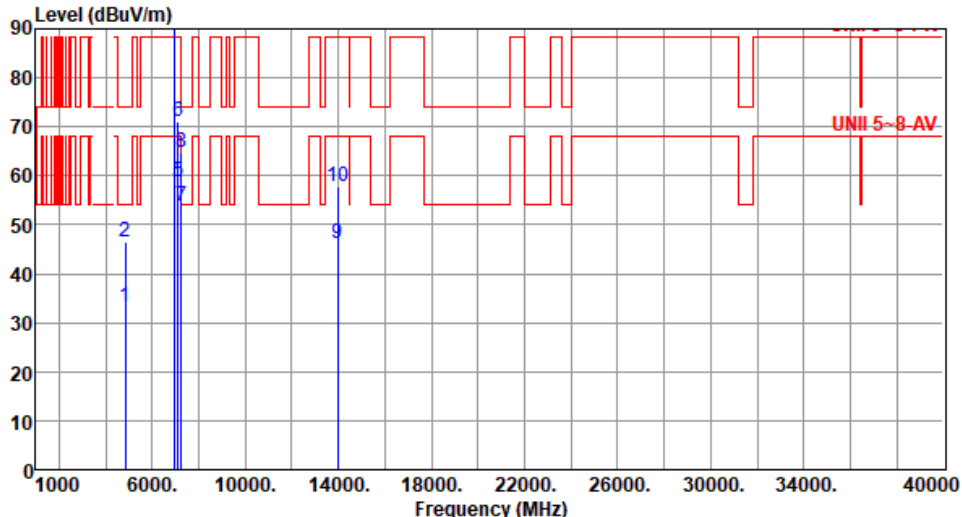

Modulation	be EHT160	Test Freq. (MHz)	6985						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	33.21	54.00	-20.79	32.99	0.22	Average	100	31
2	4844.00	46.39	74.00	-27.61	46.17	0.22	Peak	100	31
3 *	6985.00	97.30			92.79	4.51	Average	207	295
4 *	6985.00	110.88			106.37	4.51	Peak	207	295
5	7125.00	58.81	68.20	-9.39	53.68	5.13	Average	207	295
6	7125.00	70.98	88.20	-17.22	65.85	5.13	Peak	207	295
7	7250.00	53.69	54.00	-0.31	48.11	5.58	Average	207	295
8	7250.00	64.60	74.00	-9.40	59.02	5.58	Peak	207	295
9	13970.00	46.16	68.20	-22.04	38.51	7.65	Average	100	35
10	13970.00	57.62	88.20	-30.58	49.97	7.65	Peak	100	35


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

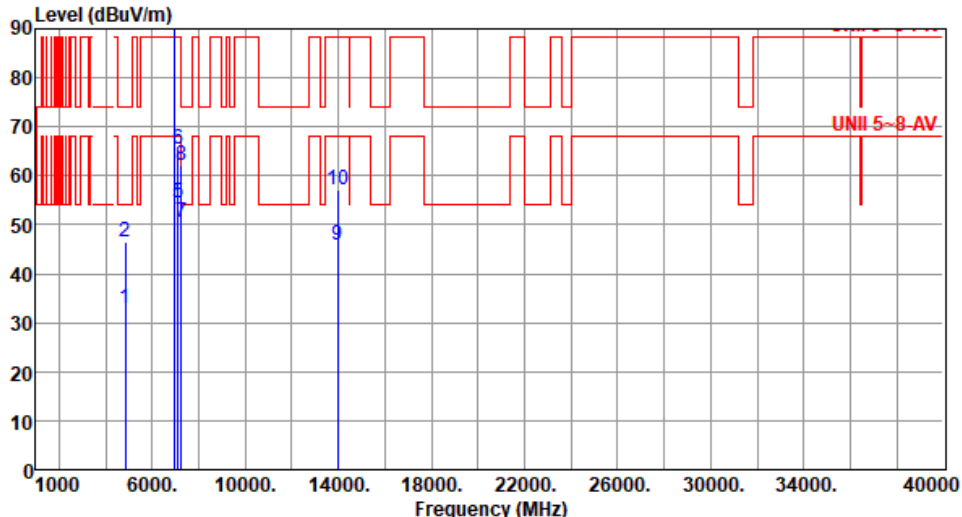


Modulation	be EHT160	Test Freq. (MHz)	6985						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.95	54.00	-21.05	32.73	0.22	Average	100	52
2	4844.00	46.48	74.00	-27.52	46.26	0.22	Peak	100	52
3 *	6985.00	94.79			90.28	4.51	Average	309	11
4 *	6985.00	108.22			103.71	4.51	Peak	309	11
5	7125.00	54.39	68.20	-13.81	49.26	5.13	Average	309	11
6	7125.00	65.50	88.20	-22.70	60.37	5.13	Peak	309	11
7	7250.00	50.56	54.00	-3.44	44.98	5.58	Average	309	11
8	7250.00	62.03	74.00	-11.97	56.45	5.58	Peak	309	11
9	13970.00	45.74	68.20	-22.46	38.09	7.65	Average	100	17
10	13970.00	57.15	88.20	-31.05	49.50	7.65	Peak	100	17

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

Unwanted Emissions (Above 1GHz) for be EHT320

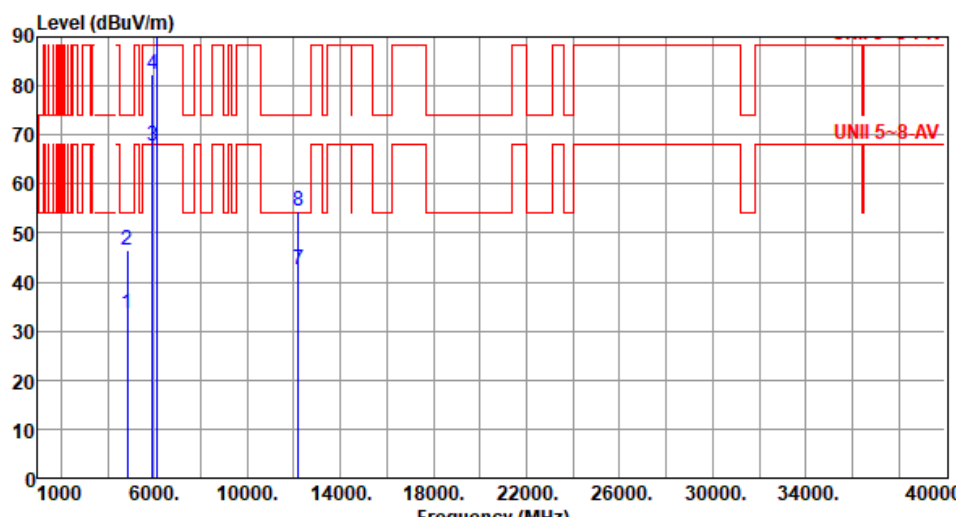Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4844.00</td><td>33.48</td><td>54.00</td><td>-20.52</td><td>33.26</td><td>0.22</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>2</td><td>4844.00</td><td>46.64</td><td>74.00</td><td>-27.36</td><td>46.42</td><td>0.22</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>3</td><td>5925.00</td><td>67.79</td><td>68.20</td><td>-0.41</td><td>66.27</td><td>1.52</td><td>Average</td><td>193</td><td>295</td></tr><tr><td>4</td><td>5925.00</td><td>82.21</td><td>88.20</td><td>-5.99</td><td>80.69</td><td>1.52</td><td>Peak</td><td>193</td><td>295</td></tr><tr><td>5 *</td><td>6105.00</td><td>97.02</td><td></td><td></td><td>95.18</td><td>1.84</td><td>Average</td><td>193</td><td>295</td></tr><tr><td>6 *</td><td>6105.00</td><td>108.98</td><td></td><td></td><td>107.14</td><td>1.84</td><td>Peak</td><td>193</td><td>295</td></tr><tr><td>7</td><td>12210.00</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>35.18</td><td>7.47</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>8</td><td>12210.00</td><td>54.63</td><td>74.00</td><td>-19.37</td><td>47.16</td><td>7.47</td><td>Peak</td><td>100</td><td>27</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4844.00	33.48	54.00	-20.52	33.26	0.22	Average	100	23	2	4844.00	46.64	74.00	-27.36	46.42	0.22	Peak	100	23	3	5925.00	67.79	68.20	-0.41	66.27	1.52	Average	193	295	4	5925.00	82.21	88.20	-5.99	80.69	1.52	Peak	193	295	5 *	6105.00	97.02			95.18	1.84	Average	193	295	6 *	6105.00	108.98			107.14	1.84	Peak	193	295	7	12210.00	42.65	54.00	-11.35	35.18	7.47	Average	100	27	8	12210.00	54.63	74.00	-19.37	47.16	7.47	Peak	100	27
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	4844.00	33.48	54.00	-20.52	33.26	0.22	Average	100	23																																																																																				
2	4844.00	46.64	74.00	-27.36	46.42	0.22	Peak	100	23																																																																																				
3	5925.00	67.79	68.20	-0.41	66.27	1.52	Average	193	295																																																																																				
4	5925.00	82.21	88.20	-5.99	80.69	1.52	Peak	193	295																																																																																				
5 *	6105.00	97.02			95.18	1.84	Average	193	295																																																																																				
6 *	6105.00	108.98			107.14	1.84	Peak	193	295																																																																																				
7	12210.00	42.65	54.00	-11.35	35.18	7.47	Average	100	27																																																																																				
8	12210.00	54.63	74.00	-19.37	47.16	7.47	Peak	100	27																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													

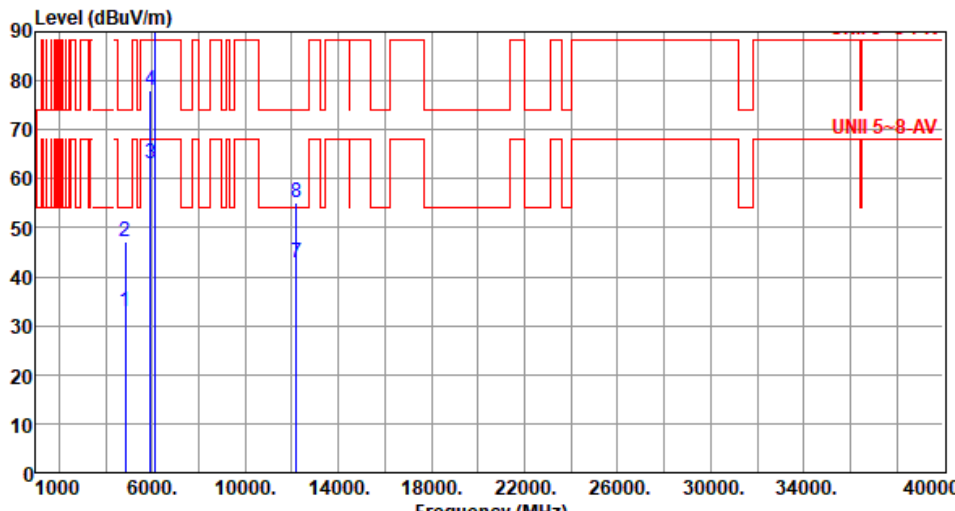


Modulation	be EHT320	Test Freq. (MHz)	6105						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.99	54.00	-21.01	32.77	0.22	Average	100	72
2	4844.00	47.04	74.00	-26.96	46.82	0.22	Peak	100	72
3	5925.00	63.26	68.20	-4.94	61.74	1.52	Average	350	14
4	5925.00	77.93	88.20	-10.27	76.41	1.52	Peak	350	14
5 *	6105.00	93.50			91.66	1.84	Average	350	14
6 *	6105.00	106.27			104.43	1.84	Peak	350	14
7	12210.00	42.88	54.00	-11.12	35.41	7.47	Average	100	216
8	12210.00	55.00	74.00	-19.00	47.53	7.47	Peak	100	216
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT320	Test Freq. (MHz)	6265																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>32.85</td><td>54.00</td><td>-21.15</td><td>32.63</td><td>0.22</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>2</td><td>4844.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>46.28</td><td>0.22</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>3</td><td>5925.00</td><td>66.12</td><td>68.20</td><td>-2.08</td><td>64.60</td><td>1.52</td><td>Average</td><td>211</td><td>298</td></tr><tr><td>4</td><td>5925.00</td><td>77.86</td><td>88.20</td><td>-10.34</td><td>76.34</td><td>1.52</td><td>Peak</td><td>211</td><td>298</td></tr><tr><td>5 *</td><td>6265.00</td><td>96.50</td><td></td><td></td><td>94.24</td><td>2.26</td><td>Average</td><td>211</td><td>298</td></tr><tr><td>6 *</td><td>6265.00</td><td>108.59</td><td></td><td></td><td>106.33</td><td>2.26</td><td>Peak</td><td>211</td><td>298</td></tr><tr><td>7</td><td>12530.00</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>34.66</td><td>6.81</td><td>Average</td><td>100</td><td>132</td></tr><tr><td>8</td><td>12530.00</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>48.16</td><td>6.81</td><td>Peak</td><td>100</td><td>132</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	4844.00	32.85	54.00	-21.15	32.63	0.22	Average	100	281	2	4844.00	46.50	74.00	-27.50	46.28	0.22	Peak	100	281	3	5925.00	66.12	68.20	-2.08	64.60	1.52	Average	211	298	4	5925.00	77.86	88.20	-10.34	76.34	1.52	Peak	211	298	5 *	6265.00	96.50			94.24	2.26	Average	211	298	6 *	6265.00	108.59			106.33	2.26	Peak	211	298	7	12530.00	41.47	54.00	-12.53	34.66	6.81	Average	100	132	8	12530.00	54.97	74.00	-19.03	48.16	6.81	Peak	100	132
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	4844.00	32.85	54.00	-21.15	32.63	0.22	Average	100	281																																																																																																								
2	4844.00	46.50	74.00	-27.50	46.28	0.22	Peak	100	281																																																																																																								
3	5925.00	66.12	68.20	-2.08	64.60	1.52	Average	211	298																																																																																																								
4	5925.00	77.86	88.20	-10.34	76.34	1.52	Peak	211	298																																																																																																								
5 *	6265.00	96.50			94.24	2.26	Average	211	298																																																																																																								
6 *	6265.00	108.59			106.33	2.26	Peak	211	298																																																																																																								
7	12530.00	41.47	54.00	-12.53	34.66	6.81	Average	100	132																																																																																																								
8	12530.00	54.97	74.00	-19.03	48.16	6.81	Peak	100	132																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	

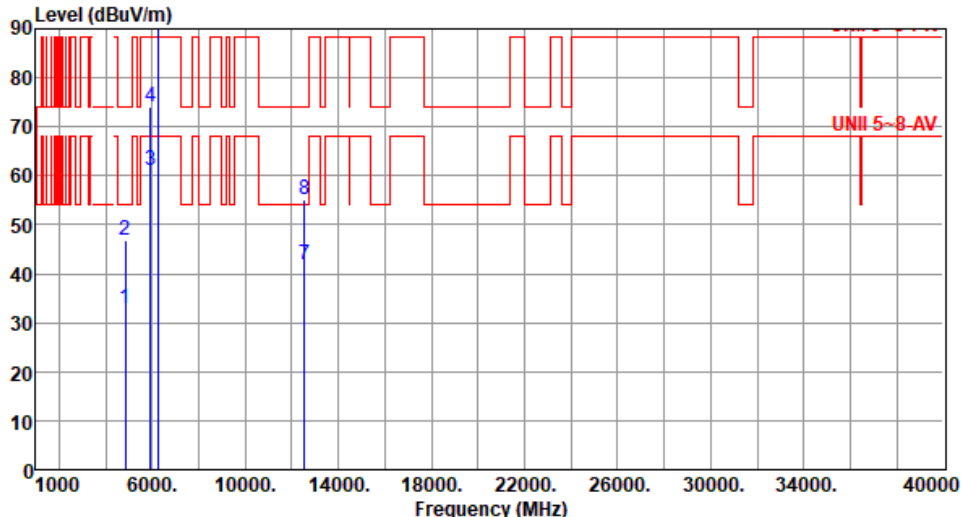


Modulation	be EHT320		Test Freq. (MHz)		6265																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>32.81</td><td>54.00</td><td>-21.19</td><td>32.59</td><td>0.22</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>4844.00</td><td>46.73</td><td>74.00</td><td>-27.27</td><td>46.51</td><td>0.22</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>5925.00</td><td>61.08</td><td>68.20</td><td>-7.12</td><td>59.56</td><td>1.52</td><td>Average</td><td>349</td><td>16</td></tr><tr><td>4</td><td>5925.00</td><td>74.17</td><td>88.20</td><td>-14.03</td><td>72.65</td><td>1.52</td><td>Peak</td><td>349</td><td>16</td></tr><tr><td>5 *</td><td>6265.00</td><td>93.15</td><td></td><td></td><td>90.89</td><td>2.26</td><td>Average</td><td>349</td><td>16</td></tr><tr><td>6 *</td><td>6265.00</td><td>105.79</td><td></td><td></td><td>103.53</td><td>2.26</td><td>Peak</td><td>349</td><td>16</td></tr><tr><td>7</td><td>12530.00</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>35.11</td><td>6.81</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>8</td><td>12530.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>48.31</td><td>6.81</td><td>Peak</td><td>100</td><td>228</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	4844.00	32.81	54.00	-21.19	32.59	0.22	Average	100	77	2	4844.00	46.73	74.00	-27.27	46.51	0.22	Peak	100	77	3	5925.00	61.08	68.20	-7.12	59.56	1.52	Average	349	16	4	5925.00	74.17	88.20	-14.03	72.65	1.52	Peak	349	16	5 *	6265.00	93.15			90.89	2.26	Average	349	16	6 *	6265.00	105.79			103.53	2.26	Peak	349	16	7	12530.00	41.92	54.00	-12.08	35.11	6.81	Average	100	228	8	12530.00	55.12	74.00	-18.88	48.31	6.81	Peak	100	228
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	4844.00	32.81	54.00	-21.19	32.59	0.22	Average	100	77																																																																																																														
2	4844.00	46.73	74.00	-27.27	46.51	0.22	Peak	100	77																																																																																																														
3	5925.00	61.08	68.20	-7.12	59.56	1.52	Average	349	16																																																																																																														
4	5925.00	74.17	88.20	-14.03	72.65	1.52	Peak	349	16																																																																																																														
5 *	6265.00	93.15			90.89	2.26	Average	349	16																																																																																																														
6 *	6265.00	105.79			103.53	2.26	Peak	349	16																																																																																																														
7	12530.00	41.92	54.00	-12.08	35.11	6.81	Average	100	228																																																																																																														
8	12530.00	55.12	74.00	-18.88	48.31	6.81	Peak	100	228																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																							

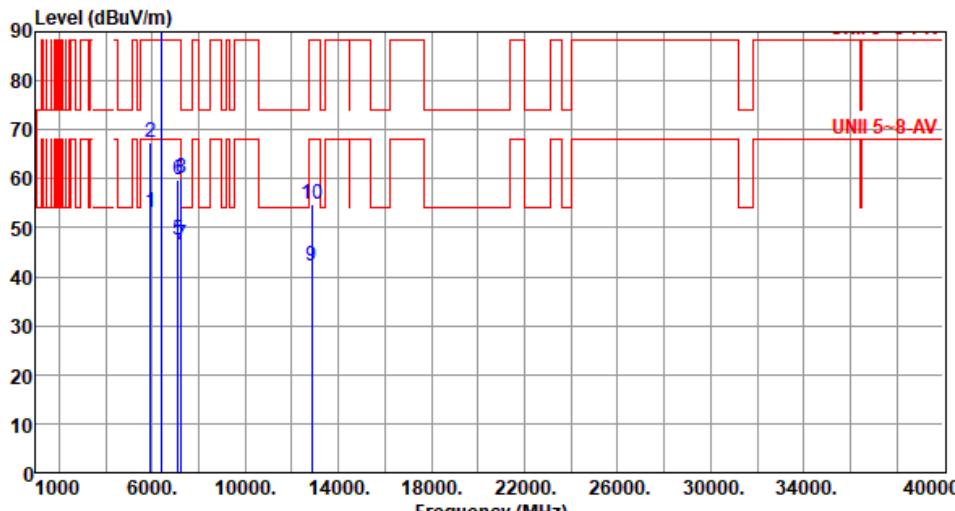


Modulation	be EHT320	Test Freq. (MHz)	6425						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	53.19	68.20	-15.01	51.67	1.52	Average	211	295
2	5925.00	67.30	88.20	-20.90	65.78	1.52	Peak	211	295
3 *	6425.00	95.40			92.16	3.24	Average	211	295
4 *	6425.00	108.05			104.81	3.24	Peak	211	295
5	7125.00	47.64	68.20	-20.56	42.51	5.13	Average	211	295
6	7125.00	59.69	88.20	-28.51	54.56	5.13	Peak	211	295
7	7250.00	46.44	54.00	-7.56	40.86	5.58	Average	211	295
8	7250.00	59.99	74.00	-14.01	54.41	5.58	Peak	211	295
9	12850.00	42.12	68.20	-26.08	34.81	7.31	Average	100	178
10	12850.00	54.87	88.20	-33.33	47.56	7.31	Peak	100	178

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

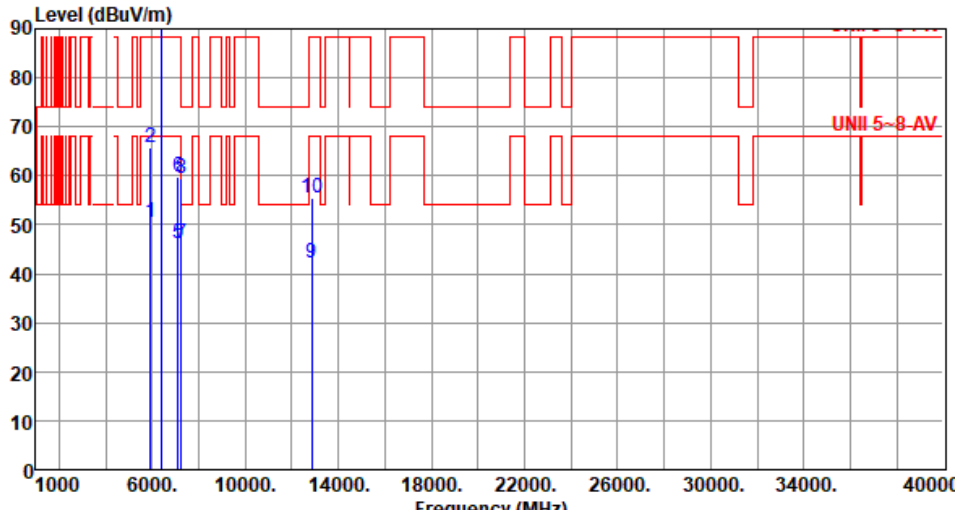

Modulation	be EHT320	Test Freq. (MHz)	6425						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	50.63	68.20	-17.57	49.11	1.52	Average	336	19
2	5925.00	65.59	88.20	-22.61	64.07	1.52	Peak	336	19
3 *	6425.00	92.25			89.01	3.24	Average	336	19
4 *	6425.00	105.31			102.07	3.24	Peak	336	19
5	7125.00	46.04	68.20	-22.16	40.91	5.13	Average	336	19
6	7125.00	59.66	88.20	-28.54	54.53	5.13	Peak	336	19
7	7250.00	46.26	54.00	-7.74	40.68	5.58	Average	336	19
8	7250.00	59.44	74.00	-14.56	53.86	5.58	Peak	336	19
9	12850.00	42.15	68.20	-26.05	34.84	7.31	Average	100	281
10	12850.00	55.53	88.20	-32.67	48.22	7.31	Peak	100	281
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

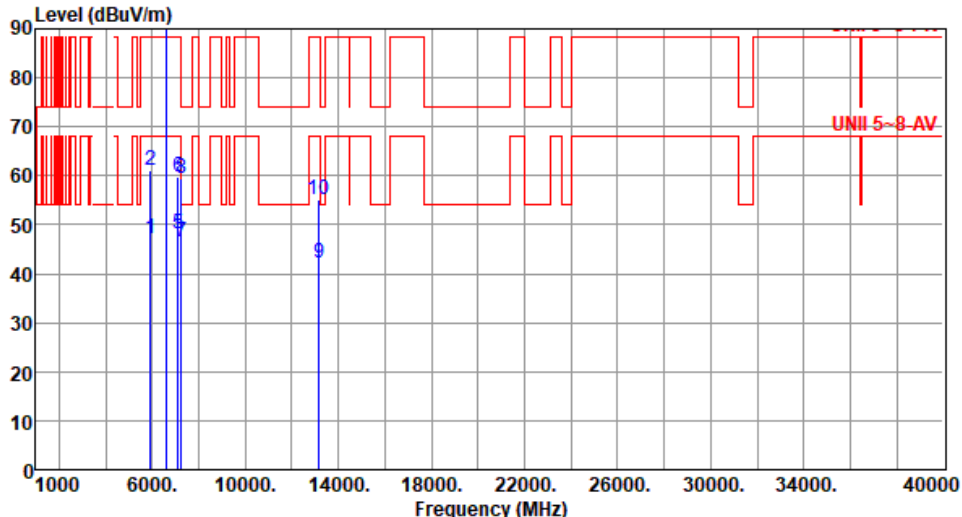


Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Brad Wu Temperature(°C):26 Humidity(%):64																																																																																																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>47.18</td><td>68.20</td><td>-21.02</td><td>45.66</td><td>1.52</td><td>Average</td><td>212</td><td>297</td></tr><tr><td>2</td><td>5925.00</td><td>61.15</td><td>88.20</td><td>-27.05</td><td>59.63</td><td>1.52</td><td>Peak</td><td>212</td><td>297</td></tr><tr><td>3 *</td><td>6585.00</td><td>94.83</td><td></td><td></td><td>91.06</td><td>3.77</td><td>Average</td><td>212</td><td>297</td></tr><tr><td>4 *</td><td>6585.00</td><td>107.81</td><td></td><td></td><td>104.04</td><td>3.77</td><td>Peak</td><td>212</td><td>297</td></tr><tr><td>5</td><td>7125.00</td><td>48.17</td><td>68.20</td><td>-20.03</td><td>43.04</td><td>5.13</td><td>Average</td><td>212</td><td>297</td></tr><tr><td>6</td><td>7125.00</td><td>59.70</td><td>88.20</td><td>-28.50</td><td>54.57</td><td>5.13</td><td>Peak</td><td>212</td><td>297</td></tr><tr><td>7</td><td>7250.00</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>40.90</td><td>5.58</td><td>Average</td><td>212</td><td>297</td></tr><tr><td>8</td><td>7250.00</td><td>59.44</td><td>74.00</td><td>-14.56</td><td>53.86</td><td>5.58</td><td>Peak</td><td>212</td><td>297</td></tr><tr><td>9</td><td>13170.00</td><td>42.23</td><td>68.20</td><td>-25.97</td><td>35.25</td><td>6.98</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>10</td><td>13170.00</td><td>55.21</td><td>88.20</td><td>-32.99</td><td>48.23</td><td>6.98</td><td>Peak</td><td>100</td><td>281</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5925.00	47.18	68.20	-21.02	45.66	1.52	Average	212	297	2	5925.00	61.15	88.20	-27.05	59.63	1.52	Peak	212	297	3 *	6585.00	94.83			91.06	3.77	Average	212	297	4 *	6585.00	107.81			104.04	3.77	Peak	212	297	5	7125.00	48.17	68.20	-20.03	43.04	5.13	Average	212	297	6	7125.00	59.70	88.20	-28.50	54.57	5.13	Peak	212	297	7	7250.00	46.48	54.00	-7.52	40.90	5.58	Average	212	297	8	7250.00	59.44	74.00	-14.56	53.86	5.58	Peak	212	297	9	13170.00	42.23	68.20	-25.97	35.25	6.98	Average	100	281	10	13170.00	55.21	88.20	-32.99	48.23	6.98	Peak	100	281
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																												
		dBuV/m			dBuV			cm	deg																																																																																																																												
1	5925.00	47.18	68.20	-21.02	45.66	1.52	Average	212	297																																																																																																																												
2	5925.00	61.15	88.20	-27.05	59.63	1.52	Peak	212	297																																																																																																																												
3 *	6585.00	94.83			91.06	3.77	Average	212	297																																																																																																																												
4 *	6585.00	107.81			104.04	3.77	Peak	212	297																																																																																																																												
5	7125.00	48.17	68.20	-20.03	43.04	5.13	Average	212	297																																																																																																																												
6	7125.00	59.70	88.20	-28.50	54.57	5.13	Peak	212	297																																																																																																																												
7	7250.00	46.48	54.00	-7.52	40.90	5.58	Average	212	297																																																																																																																												
8	7250.00	59.44	74.00	-14.56	53.86	5.58	Peak	212	297																																																																																																																												
9	13170.00	42.23	68.20	-25.97	35.25	6.98	Average	100	281																																																																																																																												
10	13170.00	55.21	88.20	-32.99	48.23	6.98	Peak	100	281																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	be EHT320	Test Freq. (MHz)	6585						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	45.77	68.20	-22.43	44.25	1.52	Average	306	20
2	5925.00	58.00	88.20	-30.20	56.48	1.52	Peak	306	20
3 *	6585.00	90.95			87.18	3.77	Average	306	20
4 *	6585.00	104.95			101.18	3.77	Peak	306	20
5	7125.00	46.64	68.20	-21.56	41.51	5.13	Average	306	20
6	7125.00	59.29	88.20	-28.91	54.16	5.13	Peak	306	20
7	7250.00	46.34	54.00	-7.66	40.76	5.58	Average	306	20
8	7250.00	59.00	74.00	-15.00	53.42	5.58	Peak	306	20
9	13170.00	42.20	68.20	-26.00	35.22	6.98	Average	100	182
10	13170.00	55.41	88.20	-32.79	48.43	6.98	Peak	100	182


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

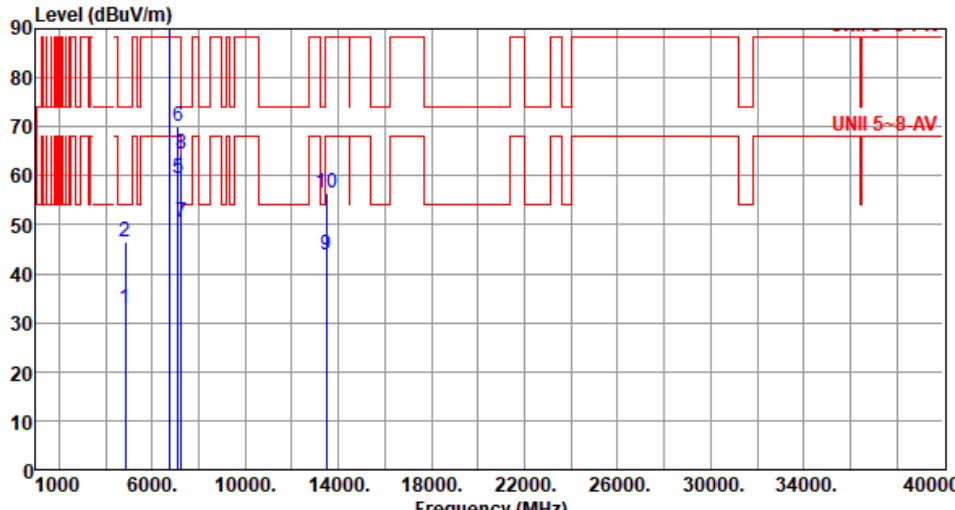

Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.88	54.00	-21.12	32.66	0.22	Average	100	41
2	4844.00	46.55	74.00	-27.45	46.33	0.22	Peak	100	41
3 *	6745.00	95.56			91.77	3.79	Average	216	296
4 *	6745.00	108.52			104.73	3.79	Peak	216	296
5	7125.00	59.50	68.20	-8.70	54.37	5.13	Average	216	296
6	7125.00	70.01	88.20	-18.19	64.88	5.13	Peak	216	296
7	7250.00	50.43	54.00	-3.57	44.85	5.58	Average	216	296
8	7250.00	64.55	74.00	-9.45	58.97	5.58	Peak	216	296
9	13490.00	43.93	68.20	-24.27	36.42	7.51	Average	100	128
10	13490.00	56.62	88.20	-31.58	49.11	7.51	Peak	100	128


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

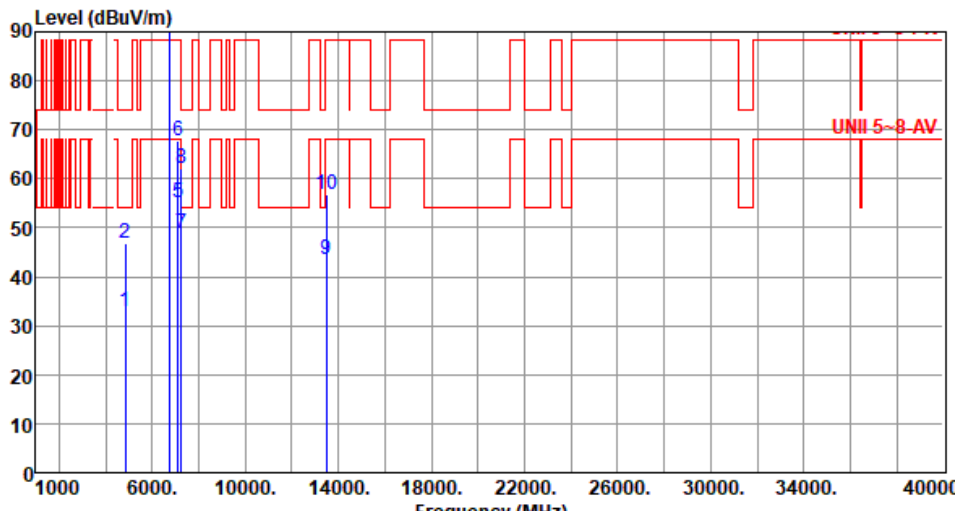


Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.80	54.00	-21.20	32.58	0.22	Average	100	177
2	4844.00	46.99	74.00	-27.01	46.77	0.22	Peak	100	177
3 *	6745.00	91.32			87.53	3.79	Average	348	20
4 *	6745.00	104.81			101.02	3.79	Peak	348	20
5	7125.00	55.19	68.20	-13.01	50.06	5.13	Average	348	20
6	7125.00	67.64	88.20	-20.56	62.51	5.13	Peak	348	20
7	7250.00	48.74	54.00	-5.26	43.16	5.58	Average	348	20
8	7250.00	62.02	74.00	-11.98	56.44	5.58	Peak	348	20
9	13490.00	43.63	68.20	-24.57	36.12	7.51	Average	100	208
10	13490.00	56.73	88.20	-31.47	49.22	7.51	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

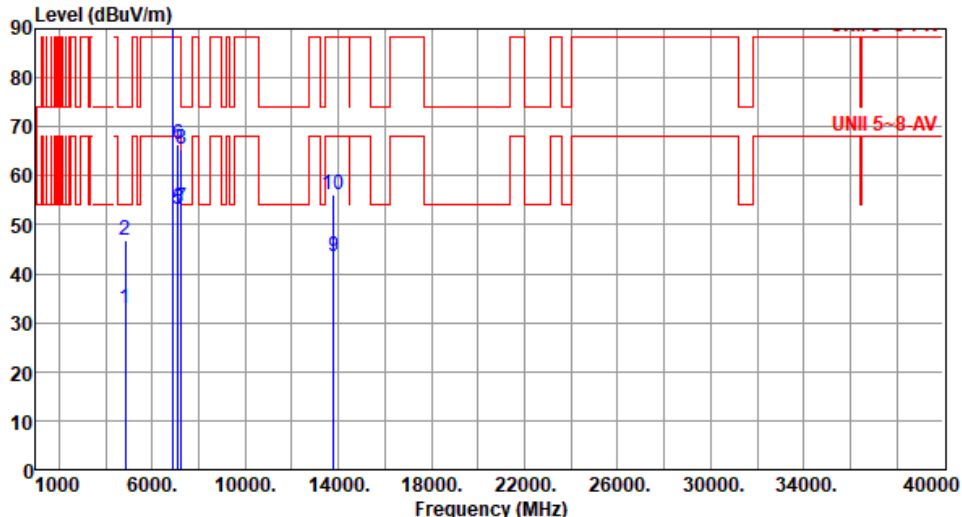

Modulation	be EHT320	Test Freq. (MHz)	6905						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.77	54.00	-21.23	32.55	0.22	Average	100	172
2	4844.00	46.94	74.00	-27.06	46.72	0.22	Peak	100	172
3 *	6905.00	94.08			89.72	4.36	Average	218	296
4 *	6905.00	107.12			102.76	4.36	Peak	218	296
5	7125.00	53.09	68.20	-15.11	47.96	5.13	Average	218	296
6	7125.00	66.33	88.20	-21.87	61.20	5.13	Peak	218	296
7	7250.00	53.62	54.00	-0.38	48.04	5.58	Average	218	296
8	7250.00	65.35	74.00	-8.65	59.77	5.58	Peak	218	296
9	13810.00	43.38	68.20	-24.82	36.22	7.16	Average	100	182
10	13810.00	56.01	88.20	-32.19	48.85	7.16	Peak	100	182
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

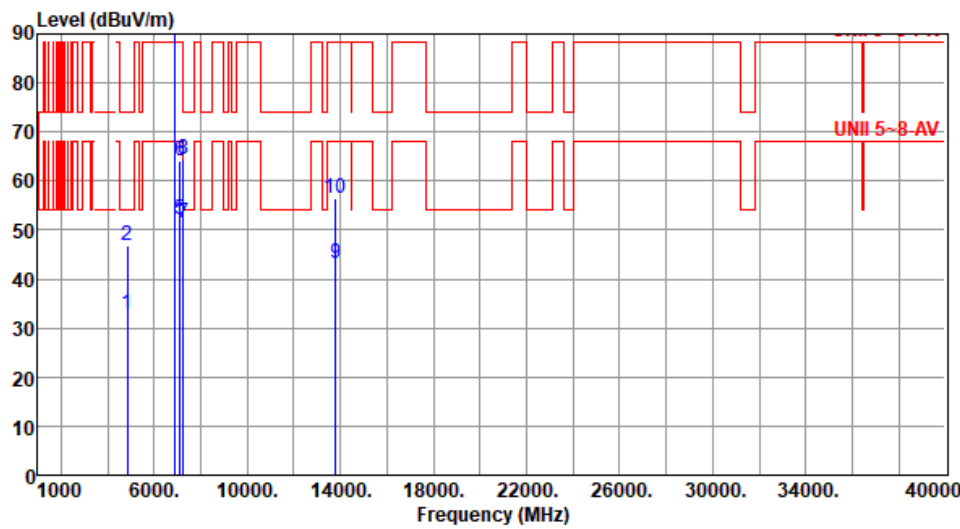

Modulation	be EHT320	Test Freq. (MHz)	6905						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4844.00	32.73	54.00	-21.27	32.51	0.22	Average	100	17
2	4844.00	46.77	74.00	-27.23	46.55	0.22	Peak	100	17
3 *	6905.00	90.43			86.07	4.36	Average	286	18
4 *	6905.00	102.26			97.90	4.36	Peak	286	18
5	7125.00	52.03	68.20	-16.17	46.90	5.13	Average	286	18
6	7125.00	64.06	88.20	-24.14	58.93	5.13	Peak	286	18
7	7250.00	51.44	54.00	-2.56	45.86	5.58	Average	286	18
8	7250.00	64.36	74.00	-9.64	58.78	5.58	Peak	286	18
9	13810.00	43.24	68.20	-24.96	36.08	7.16	Average	100	223
10	13810.00	56.39	88.20	-31.81	49.23	7.16	Peak	100	223

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency




Adapter mode

Unwanted Emissions (Below 1GHz)

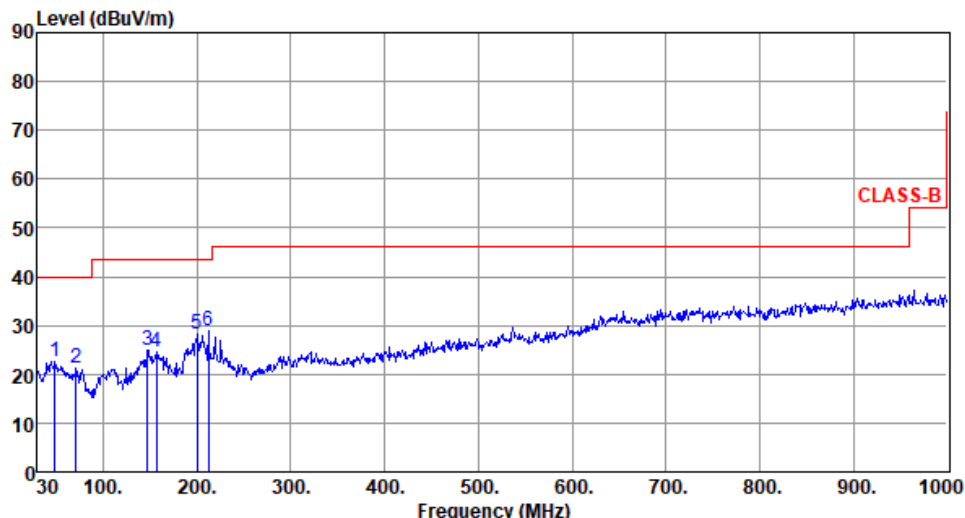Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																																													
Level (dBUV/m)  <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>48.25</td><td>22.59</td><td>40.00</td><td>-17.41</td><td>31.30</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>70.74</td><td>21.22</td><td>40.00</td><td>-18.78</td><td>32.33</td><td>-11.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>147.37</td><td>24.85</td><td>43.50</td><td>-18.65</td><td>33.43</td><td>-8.58</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>157.07</td><td>24.61</td><td>43.50</td><td>-18.89</td><td>33.18</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>199.84</td><td>28.18</td><td>43.50</td><td>-15.32</td><td>39.96</td><td>-11.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>212.51</td><td>28.92</td><td>43.50</td><td>-14.58</td><td>40.89</td><td>-11.97</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	48.25	22.59	40.00	-17.41	31.30	-8.71	Peak	---	---	2	70.74	21.22	40.00	-18.78	32.33	-11.11	Peak	---	---	3	147.37	24.85	43.50	-18.65	33.43	-8.58	Peak	---	---	4	157.07	24.61	43.50	-18.89	33.18	-8.57	Peak	---	---	5	199.84	28.18	43.50	-15.32	39.96	-11.78	Peak	---	---	6	212.51	28.92	43.50	-14.58	40.89	-11.97	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	48.25	22.59	40.00	-17.41	31.30	-8.71	Peak	---	---																																																																																				
2	70.74	21.22	40.00	-18.78	32.33	-11.11	Peak	---	---																																																																																				
3	147.37	24.85	43.50	-18.65	33.43	-8.58	Peak	---	---																																																																																				
4	157.07	24.61	43.50	-18.89	33.18	-8.57	Peak	---	---																																																																																				
5	199.84	28.18	43.50	-15.32	39.96	-11.78	Peak	---	---																																																																																				
6	212.51	28.92	43.50	-14.58	40.89	-11.97	Peak	---	---																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																													

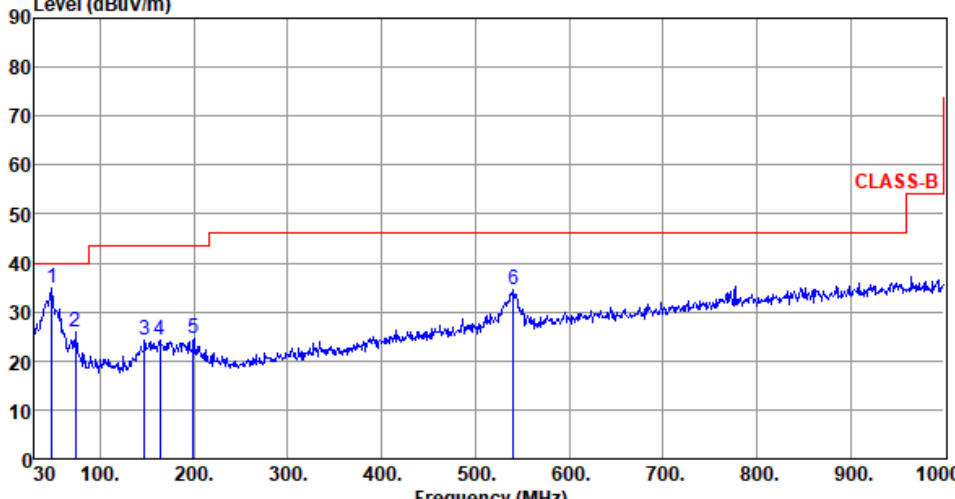

Modulation	be EHT320		Test Freq. (MHz)		6585																																																																										
Polarization	Vertical																																																																														
Test By :Brad Wu			Temperature(°C):24			Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>48.19</td><td>34.88</td><td>40.00</td><td>-5.12</td><td>43.60</td><td>-8.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>73.65</td><td>25.76</td><td>40.00</td><td>-14.24</td><td>37.71</td><td>-11.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>147.46</td><td>24.16</td><td>43.50</td><td>-19.34</td><td>32.76</td><td>-8.60</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>163.95</td><td>24.25</td><td>43.50</td><td>-19.25</td><td>32.99</td><td>-8.74</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>199.65</td><td>24.64</td><td>43.50</td><td>-18.86</td><td>36.41</td><td>-11.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>540.32</td><td>34.66</td><td>46.00</td><td>-11.34</td><td>36.78</td><td>-2.12</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	48.19	34.88	40.00	-5.12	43.60	-8.72	Peak	---	---	2	73.65	25.76	40.00	-14.24	37.71	-11.95	Peak	---	---	3	147.46	24.16	43.50	-19.34	32.76	-8.60	Peak	---	---	4	163.95	24.25	43.50	-19.25	32.99	-8.74	Peak	---	---	5	199.65	24.64	43.50	-18.86	36.41	-11.77	Peak	---	---	6	540.32	34.66	46.00	-11.34	36.78	-2.12	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	48.19	34.88	40.00	-5.12	43.60	-8.72	Peak	---	---																																																																						
2	73.65	25.76	40.00	-14.24	37.71	-11.95	Peak	---	---																																																																						
3	147.46	24.16	43.50	-19.34	32.76	-8.60	Peak	---	---																																																																						
4	163.95	24.25	43.50	-19.25	32.99	-8.74	Peak	---	---																																																																						
5	199.65	24.64	43.50	-18.86	36.41	-11.77	Peak	---	---																																																																						
6	540.32	34.66	46.00	-11.34	36.78	-2.12	Peak	---	---																																																																						

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	5.94239G	-18.72	5.8898G	-66.72	-58.72	-8.00	2
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	5.98278G	-5.69	5.8974G	-52.87	-45.69	-7.18	1
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	5.989G	-2.59	6.117G	-49.03	-42.59	-6.44	4
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.189G	0.02	5.9146G	-45.78	-39.98	-5.80	3
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.2538G	2.48	5.7514G	-38.58	-37.52	-1.06	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	6.52359G	-9.61	6.4658G	-62.02	-49.61	-12.41	3
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.46318G	-5.70	6.5158G	-53.54	-45.70	-7.84	3
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.48898G	-1.96	6.6166G	-49.02	-41.96	-7.06	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	6.52751G	-9.04	6.5007G	-57.46	-48.68	-8.78	4
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.83381G	-5.57	6.9242G	-52.48	-45.57	-6.91	3
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.74904G	-2.67	6.9262G	-48.81	-42.67	-6.14	3
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.58828G	0.26	6.3946G	-44.37	-39.74	-4.63	2
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.4316G	1.78	6.1962G	-30.15	-29.41	-0.74	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss4,(MCS0)_4TX	Pass	7.12399G	-19.27	7.0744G	-69.10	-59.27	-9.83	3
802.11be EHT40_Nss4,(MCS0)_4TX	Pass	6.90662G	-6.64	6.9944G	-52.70	-46.64	-6.06	3
802.11be EHT80_Nss4,(MCS0)_4TX	Pass	6.90944G	-3.40	6.7746G	-49.25	-43.40	-5.85	3
802.11be EHT160_Nss4,(MCS0)_4TX	Pass	6.96662G	0.42	6.725G	-42.37	-39.58	-2.79	2
802.11be EHT320_Nss4,(MCS0)_4TX	Pass	6.5916G	1.25	6.337G	-31.92	-31.55	-0.37	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5935MHz	Pass	5.94249G	-18.23	5.8889G	-66.87	-58.23	-8.64	1
5935MHz	Pass	5.94239G	-18.72	5.8898G	-66.72	-58.72	-8.00	2
5935MHz	Pass	5.93G	-18.39	5.885G	-66.71	-58.39	-8.32	3
5935MHz	Pass	5.94369G	-18.58	5.8977G	-66.79	-58.58	-8.21	4
5955MHz	Pass	5.96319G	-9.37	5.9904G	-61.56	-49.37	-12.19	1
5955MHz	Pass	5.96249G	-9.54	5.9168G	-61.69	-49.54	-12.15	2
5955MHz	Pass	5.94641G	-9.39	5.9073G	-61.54	-49.39	-12.15	3
5955MHz	Pass	5.96159G	-9.36	5.9116G	-61.66	-49.36	-12.30	4
6175MHz	Pass	6.16641G	-10.14	6.1324G	-62.09	-50.14	-11.95	1
6175MHz	Pass	6.16661G	-9.90	6.2125G	-62.08	-49.90	-12.18	2
6175MHz	Pass	6.16621G	-9.74	6.1373G	-62.14	-49.74	-12.40	3
6175MHz	Pass	6.16611G	-9.73	6.131G	-62.21	-49.73	-12.48	4
6415MHz	Pass	6.40761G	-9.73	6.4512G	-61.28	-49.73	-11.55	1
6415MHz	Pass	6.40721G	-9.50	6.4642G	-62.11	-49.50	-12.61	2
6415MHz	Pass	6.40791G	-9.65	6.4546G	-62.09	-49.65	-12.44	3
6415MHz	Pass	6.40601G	-9.14	6.3803G	-61.94	-49.14	-12.80	4
6435MHz	Pass	6.42621G	-9.71	6.4772G	-62.21	-49.71	-12.50	1
6435MHz	Pass	6.42711G	-9.11	6.4774G	-62.11	-49.11	-13.00	2
6435MHz	Pass	6.42601G	-9.64	6.4831G	-62.10	-49.64	-12.46	3
6435MHz	Pass	6.44309G	-9.03	6.3995G	-62.01	-49.03	-12.98	4
6475MHz	Pass	6.46681G	-9.04	6.4403G	-62.00	-49.04	-12.96	1
6475MHz	Pass	6.46611G	-8.81	6.5117G	-61.95	-48.81	-13.14	2
6475MHz	Pass	6.48359G	-9.37	6.4338G	-62.05	-49.37	-12.68	3
6475MHz	Pass	6.46681G	-8.65	6.4395G	-61.72	-48.65	-13.07	4
6515MHz	Pass	6.52359G	-9.18	6.4666G	-62.02	-49.18	-12.84	1
6515MHz	Pass	6.52259G	-9.30	6.4806G	-62.11	-49.30	-12.81	2
6515MHz	Pass	6.52359G	-9.61	6.4658G	-62.02	-49.61	-12.41	3
6515MHz	Pass	6.50731G	-9.11	6.4766G	-61.98	-49.11	-12.87	4
6535MHz	Pass	6.52771G	-9.35	6.4959G	-62.11	-49.35	-12.76	1
6535MHz	Pass	6.54309G	-9.28	6.5003G	-61.69	-49.28	-12.41	2
6535MHz	Pass	6.52801G	-9.71	6.5002G	-61.99	-49.71	-12.28	3
6535MHz	Pass	6.52751G	-9.04	6.5007G	-57.46	-48.68	-8.78	4
6715MHz	Pass	6.70631G	-9.43	6.7641G	-61.55	-49.43	-12.12	1
6715MHz	Pass	6.70781G	-9.57	6.7608G	-61.69	-49.57	-12.12	2
6715MHz	Pass	6.70621G	-9.82	6.7606G	-61.69	-49.82	-11.87	3
6715MHz	Pass	6.70601G	-9.00	6.7623G	-61.62	-49.00	-12.62	4
6855MHz	Pass	6.84661G	-9.29	6.8976G	-61.30	-49.29	-12.01	1
6855MHz	Pass	6.84691G	-9.25	6.905G	-61.05	-49.25	-11.80	2
6855MHz	Pass	6.86339G	-9.63	6.9033G	-61.27	-49.63	-11.64	3
6855MHz	Pass	6.84571G	-8.90	6.8188G	-60.74	-48.90	-11.84	4
6875MHz Straddle 6.875-7.125GHz	Pass	6.86631G	-10.42	6.912G	-61.05	-50.42	-10.63	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6875MHz Straddle 6.875-7.125GHz	Pass	6.86631G	-10.29	6.9136G	-61.16	-50.29	-10.87	2
6875MHz Straddle 6.875-7.125GHz	Pass	6.86691G	-10.71	6.9148G	-61.21	-50.71	-10.50	3
6875MHz Straddle 6.875-7.125GHz	Pass	6.86671G	-10.32	6.9224G	-61.05	-50.32	-10.73	4
6895MHz	Pass	6.88751G	-10.48	6.9339G	-61.03	-50.48	-10.55	1
6895MHz	Pass	6.88741G	-10.17	6.9373G	-60.97	-50.17	-10.80	2
6895MHz	Pass	6.88681G	-10.73	6.9447G	-60.91	-50.73	-10.18	3
6895MHz	Pass	6.88671G	-10.37	6.9299G	-61.11	-50.37	-10.74	4
7015MHz	Pass	7.00721G	-10.79	6.9682G	-60.85	-50.79	-10.06	1
7015MHz	Pass	7.00641G	-10.58	6.9803G	-61.08	-50.58	-10.50	2
7015MHz	Pass	7.00631G	-11.06	6.9776G	-61.04	-51.06	-9.98	3
7015MHz	Pass	7.00651G	-10.23	6.9659G	-61.02	-50.23	-10.79	4
7095MHz	Pass	7.10219G	-11.60	7.0576G	-65.88	-51.60	-14.28	1
7095MHz	Pass	7.0912G	-11.77	7.0555G	-66.24	-51.77	-14.47	2
7095MHz	Pass	7.10189G	-12.24	7.0563G	-65.98	-52.24	-13.74	3
7095MHz	Pass	7.10239G	-11.39	7.056G	-66.03	-51.39	-14.64	4
7115MHz	Pass	7.12389G	-18.37	7.0655G	-68.84	-58.37	-10.47	1
7115MHz	Pass	7.12359G	-18.47	7.0747G	-68.71	-58.47	-10.24	2
7115MHz	Pass	7.12399G	-19.27	7.0744G	-69.10	-59.27	-9.83	3
7115MHz	Pass	7.12389G	-18.64	7.0655G	-68.85	-58.64	-10.21	4
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98278G	-5.69	5.8974G	-52.87	-45.69	-7.18	1
5965MHz	Pass	5.97079G	-5.56	5.8974G	-52.76	-45.56	-7.20	2
5965MHz	Pass	5.94782G	-5.32	5.8758G	-52.73	-45.32	-7.41	3
5965MHz	Pass	5.97059G	-5.28	5.8982G	-52.78	-45.28	-7.50	4
6165MHz	Pass	6.14662G	-5.47	6.0854G	-53.37	-45.47	-7.90	1
6165MHz	Pass	6.14682G	-5.56	6.0854G	-53.38	-45.56	-7.82	2
6165MHz	Pass	6.14782G	-5.58	6.0892G	-53.28	-45.58	-7.70	3
6165MHz	Pass	6.14662G	-5.34	6.081G	-53.32	-45.34	-7.98	4
6405MHz	Pass	6.38662G	-5.74	6.4922G	-53.43	-45.74	-7.69	1
6405MHz	Pass	6.38742G	-5.51	6.4996G	-53.46	-45.51	-7.95	2
6405MHz	Pass	6.38682G	-5.73	6.4882G	-53.58	-45.73	-7.85	3
6405MHz	Pass	6.38762G	-5.55	6.4748G	-53.50	-45.55	-7.95	4
6445MHz	Pass	6.42662G	-5.50	6.527G	-53.56	-45.50	-8.06	1
6445MHz	Pass	6.42782G	-5.50	6.5154G	-53.50	-45.50	-8.00	2
6445MHz	Pass	6.46318G	-5.70	6.5158G	-53.54	-45.70	-7.84	3
6445MHz	Pass	6.42742G	-5.40	6.5218G	-53.46	-45.40	-8.06	4
6485MHz	Pass	6.46762G	-5.50	6.3924G	-53.65	-45.50	-8.15	1
6485MHz	Pass	6.46682G	-5.15	6.557G	-53.68	-45.15	-8.53	2
6485MHz	Pass	6.4894G	-5.29	6.416G	-53.62	-45.29	-8.33	3
6485MHz	Pass	6.50058G	-4.91	6.5818G	-53.55	-44.91	-8.64	4
6525MHz Straddle 6.525-6.875GHz	Pass	6.51021G	-5.20	6.6234G	-53.32	-45.20	-8.12	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.54298G	-4.98	6.6242G	-53.23	-44.98	-8.25	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6525MHz Straddle 6.525-6.875GHz	Pass	6.5202G	-5.20	6.6216G	-53.20	-45.20	-8.00	3
6525MHz Straddle 6.525-6.875GHz	Pass	6.5234G	-4.86	6.6244G	-53.13	-44.86	-8.27	4
6565MHz	Pass	6.5604G	-5.23	6.647G	-53.09	-45.23	-7.86	1
6565MHz	Pass	6.54702G	-4.99	6.648G	-53.19	-44.99	-8.20	2
6565MHz	Pass	6.54922G	-5.22	6.6366G	-53.16	-45.22	-7.94	3
6565MHz	Pass	6.55941G	-4.82	6.6322G	-53.18	-44.82	-8.36	4
6725MHz	Pass	6.70702G	-5.22	6.7944G	-52.84	-45.22	-7.62	1
6725MHz	Pass	6.70682G	-4.92	6.7922G	-52.81	-44.92	-7.89	2
6725MHz	Pass	6.70642G	-5.38	6.7948G	-52.78	-45.38	-7.40	3
6725MHz	Pass	6.70682G	-5.10	6.7942G	-52.84	-45.10	-7.74	4
6845MHz	Pass	6.82642G	-5.37	6.9264G	-52.46	-45.37	-7.09	1
6845MHz	Pass	6.82742G	-5.51	6.9308G	-52.47	-45.51	-6.96	2
6845MHz	Pass	6.83381G	-5.57	6.9242G	-52.48	-45.57	-6.91	3
6845MHz	Pass	6.82682G	-5.08	6.9446G	-52.49	-45.08	-7.41	4
6885MHz Straddle 6.875-7.125GHz	Pass	6.86762G	-5.79	6.9628G	-52.48	-45.79	-6.69	1
6885MHz Straddle 6.875-7.125GHz	Pass	6.86762G	-5.86	6.9528G	-52.47	-45.86	-6.61	2
6885MHz Straddle 6.875-7.125GHz	Pass	6.86762G	-6.00	6.9538G	-52.44	-46.00	-6.44	3
6885MHz Straddle 6.875-7.125GHz	Pass	6.87001G	-5.62	6.9588G	-52.46	-45.62	-6.84	4
6925MHz	Pass	6.94218G	-5.88	6.9998G	-52.70	-45.88	-6.82	1
6925MHz	Pass	6.94298G	-6.13	6.9916G	-52.81	-46.13	-6.68	2
6925MHz	Pass	6.90662G	-6.64	6.9944G	-52.70	-46.64	-6.06	3
6925MHz	Pass	6.90782G	-5.86	6.9936G	-52.66	-45.86	-6.80	4
7005MHz	Pass	6.98642G	-5.55	6.9376G	-52.44	-45.55	-6.89	1
7005MHz	Pass	6.98862G	-5.48	6.9282G	-52.47	-45.48	-6.99	2
7005MHz	Pass	6.98702G	-6.34	6.9296G	-52.46	-46.34	-6.12	3
7005MHz	Pass	6.98742G	-5.50	6.9366G	-52.39	-45.50	-6.89	4
7085MHz	Pass	7.06802G	-6.21	7.019G	-55.29	-46.21	-9.08	1
7085MHz	Pass	7.06742G	-6.27	7.0154G	-55.32	-46.27	-9.05	2
7085MHz	Pass	7.07921G	-6.66	7.0144G	-55.41	-46.66	-8.75	3
7085MHz	Pass	7.06902G	-5.83	7.0154G	-55.24	-45.83	-9.41	4
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01977G	-2.59	5.8502G	-49.74	-42.59	-7.15	1
5985MHz	Pass	6.01897G	-2.58	5.8486G	-49.45	-42.58	-6.87	2
5985MHz	Pass	5.95223G	-2.35	5.8494G	-49.16	-42.35	-6.81	3
5985MHz	Pass	5.989G	-2.59	6.117G	-49.03	-42.59	-6.44	4
6145MHz	Pass	6.13861G	-2.89	5.9514G	-50.22	-42.89	-7.33	1
6145MHz	Pass	6.10984G	-2.85	5.979G	-50.14	-42.85	-7.29	2
6145MHz	Pass	6.13781G	-2.37	6.001G	-49.56	-42.37	-7.19	3
6145MHz	Pass	6.1402G	-2.51	6.0054G	-49.39	-42.51	-6.88	4
6385MHz	Pass	6.35223G	-3.00	6.5226G	-50.56	-43.00	-7.56	1
6385MHz	Pass	6.37741G	-2.76	6.5226G	-50.54	-42.76	-7.78	2
6385MHz	Pass	6.39139G	-2.63	6.5258G	-49.58	-42.63	-6.95	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6385MHz	Pass	6.39579G	-2.44	6.5222G	-49.22	-42.44	-6.78	4
6465MHz	Pass	6.42864G	-2.09	6.6178G	-50.24	-42.09	-8.15	1
6465MHz	Pass	6.42864G	-2.00	6.6378G	-50.22	-42.00	-8.22	2
6465MHz	Pass	6.50216G	-2.27	6.6234G	-49.34	-42.27	-7.07	3
6465MHz	Pass	6.48898G	-1.96	6.6166G	-49.02	-41.96	-7.06	4
6545MHz Straddle 6.525-6.875GHz	Pass	6.53741G	-2.49	6.743G	-50.16	-42.49	-7.67	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.53141G	-2.54	6.7374G	-50.27	-42.54	-7.73	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.50824G	-2.49	6.6846G	-49.58	-42.49	-7.09	3
6545MHz Straddle 6.525-6.875GHz	Pass	6.53101G	-2.41	6.7362G	-49.33	-42.41	-6.92	4
6625MHz	Pass	6.66256G	-2.14	6.775G	-49.64	-42.14	-7.50	1
6625MHz	Pass	6.59663G	-2.30	6.7706G	-49.64	-42.30	-7.34	2
6625MHz	Pass	6.63019G	-2.37	6.777G	-48.53	-42.37	-6.16	3
6625MHz	Pass	6.58824G	-1.94	6.7726G	-48.59	-41.94	-6.65	4
6705MHz	Pass	6.66944G	-2.03	6.9022G	-49.68	-42.03	-7.65	1
6705MHz	Pass	6.67183G	-1.89	6.901G	-49.68	-41.89	-7.79	2
6705MHz	Pass	6.67223G	-2.28	6.8762G	-49.04	-42.28	-6.76	3
6705MHz	Pass	6.67023G	-1.75	6.8854G	-48.77	-41.75	-7.02	4
6785MHz	Pass	6.7826G	-2.15	6.9382G	-49.31	-42.15	-7.16	1
6785MHz	Pass	6.79699G	-2.28	6.9418G	-49.32	-42.28	-7.04	2
6785MHz	Pass	6.74904G	-2.67	6.9262G	-48.81	-42.67	-6.14	3
6785MHz	Pass	6.74784G	-1.89	6.9498G	-48.51	-41.89	-6.62	4
6865MHz Straddle 6.875-7.125GHz	Pass	6.82864G	-3.10	6.9986G	-49.82	-43.10	-6.72	1
6865MHz Straddle 6.875-7.125GHz	Pass	6.83183G	-2.98	6.9998G	-49.69	-42.98	-6.71	2
6865MHz Straddle 6.875-7.125GHz	Pass	6.83383G	-3.14	6.9974G	-49.18	-43.14	-6.04	3
6865MHz Straddle 6.875-7.125GHz	Pass	6.83343G	-2.65	6.9986G	-48.81	-42.65	-6.16	4
6945MHz	Pass	6.93981G	-3.08	6.773G	-49.66	-43.08	-6.58	1
6945MHz	Pass	6.9406G	-3.02	6.7894G	-49.70	-43.02	-6.68	2
6945MHz	Pass	6.90944G	-3.40	6.7746G	-49.25	-43.40	-5.85	3
6945MHz	Pass	6.90744G	-2.84	6.7674G	-48.79	-42.84	-5.95	4
7025MHz	Pass	6.99263G	-2.81	6.8878G	-49.70	-42.81	-6.89	1
7025MHz	Pass	6.98904G	-2.92	6.8854G	-49.70	-42.92	-6.78	2
7025MHz	Pass	6.98944G	-3.00	6.891G	-49.13	-43.00	-6.13	3
7025MHz	Pass	6.98744G	-2.74	6.8838G	-48.78	-42.74	-6.04	4
802.11be EHT160_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.10012G	0.36	6.2882G	-46.41	-39.64	-6.77	1
6025MHz	Pass	6.0202G	0.46	6.2274G	-38.67	-31.85	-6.82	2
6025MHz	Pass	5.95227G	0.21	5.749G	-46.78	-39.79	-6.99	3
6025MHz	Pass	6.00982G	0.56	6.2882G	-46.78	-39.44	-7.34	4
6185MHz	Pass	6.21057G	0.29	6.4498G	-47.63	-39.71	-7.92	1
6185MHz	Pass	6.10908G	0.49	6.449G	-47.30	-39.51	-7.79	2
6185MHz	Pass	6.189G	0.02	5.9146G	-45.78	-39.98	-5.80	3
6185MHz	Pass	6.16582G	0.29	5.9146G	-45.99	-39.71	-6.28	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6345MHz	Pass	6.27387G	0.28	6.073G	-48.27	-39.72	-8.55	1
6345MHz	Pass	6.26828G	0.45	6.0754G	-47.19	-39.55	-7.64	2
6345MHz	Pass	6.3498G	-0.10	6.0682G	-46.82	-40.10	-6.72	3
6345MHz	Pass	6.33861G	0.39	6.069G	-45.95	-39.61	-6.34	4
6505MHz Straddle 6.525-6.875GHz	Pass	6.43067G	0.73	6.2346G	-44.95	-39.27	-5.68	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.43227G	0.74	6.2362G	-45.17	-39.26	-5.91	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.51059G	-0.02	6.229G	-46.60	-40.02	-6.58	3
6505MHz Straddle 6.525-6.875GHz	Pass	6.51299G	0.77	6.2354G	-45.03	-39.23	-5.80	4
6665MHz	Pass	6.64982G	0.21	6.393G	-45.15	-39.79	-5.36	1
6665MHz	Pass	6.58828G	0.26	6.3946G	-44.37	-39.74	-4.63	2
6665MHz	Pass	6.58908G	-0.62	6.3938G	-47.35	-40.62	-6.73	3
6665MHz	Pass	6.58988G	0.46	6.3922G	-45.50	-39.54	-5.96	4
6825MHz Straddle 6.875-7.125GHz	Pass	6.81381G	0.19	6.5586G	-44.47	-39.81	-4.66	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.81861G	0.14	6.5658G	-44.92	-39.86	-5.06	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.74908G	-1.09	6.5522G	-47.27	-41.09	-6.18	3
6825MHz Straddle 6.875-7.125GHz	Pass	6.74828G	0.48	6.5506G	-44.88	-39.52	-5.36	4
6985MHz	Pass	6.91067G	-0.25	6.721G	-43.85	-40.25	-3.60	1
6985MHz	Pass	6.96662G	0.42	6.725G	-42.37	-39.58	-2.79	2
6985MHz	Pass	6.90828G	-0.43	6.7154G	-45.51	-40.43	-5.08	3
6985MHz	Pass	6.91227G	0.44	6.7154G	-44.06	-39.56	-4.50	4
802.11be EHT320_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1146G	2.74	6.4074G	-26.59	-19.22	-7.37	1
6105MHz	Pass	6.1162G	2.99	5.8074G	-26.73	-18.83	-7.9	2
6105MHz	Pass	5.9532G	2.14	5.5722G	-39.29	-37.86	-1.43	3
6105MHz	Pass	6.1242G	2.65	5.5722G	-39.1	-37.35	-1.75	4
6265MHz	Pass	6.2554G	2.02	5.753G	-40.64	-37.9	-2.74	1
6265MHz	Pass	6.1179G	2.2	5.7498G	-39.56	-37.8	-1.76	2
6265MHz	Pass	6.2778G	1.86	5.7354G	-39.81	-38.14	-1.67	3
6265MHz	Pass	6.2538G	2.48	5.7514G	-38.58	-37.52	-1.06	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.2763G	2.06	5.9146G	-40.39	-37.94	-2.45	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.2907G	2.37	5.913G	-38.72	-37.63	-1.09	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.4042G	1.45	6.017G	-33.99	-31.35	-2.64	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.4042G	2.05	5.9114G	-39.99	-37.95	-2.04	4
6585MHz Straddle 6.525-6.875GHz	Pass	6.4316G	1.78	6.1962G	-30.15	-29.41	-0.74	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.4316G	2.09	6.1786G	-31.4	-30.33	-1.07	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.5354G	1.27	6.185G	-33.98	-31.14	-2.84	3
6585MHz Straddle 6.525-6.875GHz	Pass	6.5386G	1.97	6.177G	-34.12	-30.83	-3.29	4
6745MHz Straddle 6.875-7.125GHz	Pass	6.6763G	0.98	6.345G	-31.6	-31.17	-0.43	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.5916G	1.25	6.337G	-31.92	-31.55	-0.37	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.6075G	0.6	6.3322G	-36.02	-32.45	-3.57	3
6745MHz Straddle 6.875-7.125GHz	Pass	6.5963G	1.26	6.3434G	-34.33	-30.82	-3.51	4
6905MHz Straddle 6.875-7.125GHz	Pass	6.8155G	-0.95	6.5082G	-35.52	-32.96	-2.56	1




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6905MHz Straddle 6.875-7.125GHz	Pass	6.8027G	-0.70	6.5066G	-35.15	-33.08	-2.07	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.7516G	-1.22	6.5114G	-36.49	-33.26	-3.23	3
6905MHz Straddle 6.875-7.125GHz	Pass	6.7627G	-0.47	6.505G	-36.22	-32.79	-3.43	4

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


5935MHz_TX

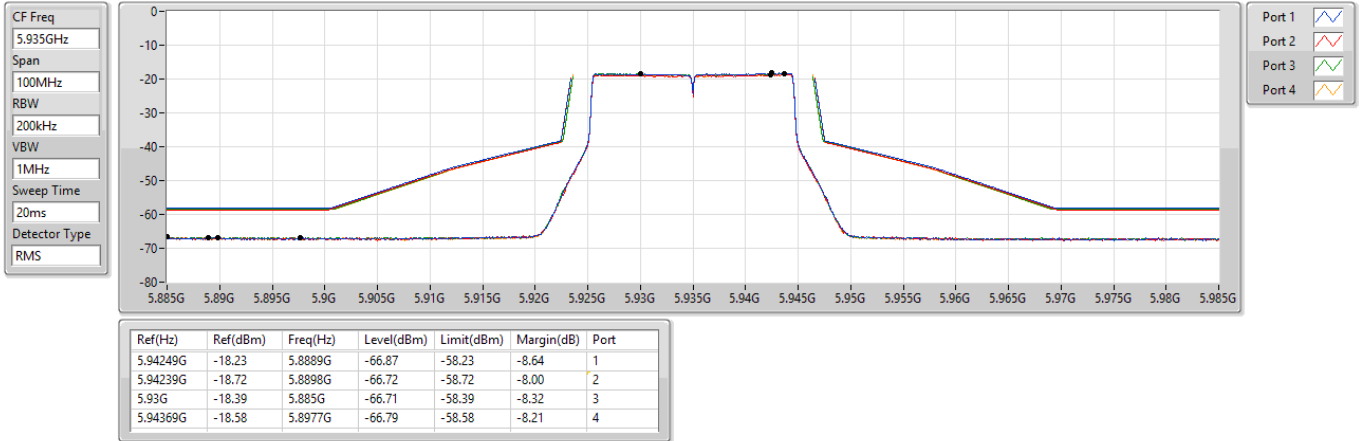

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


5955MHz_TX

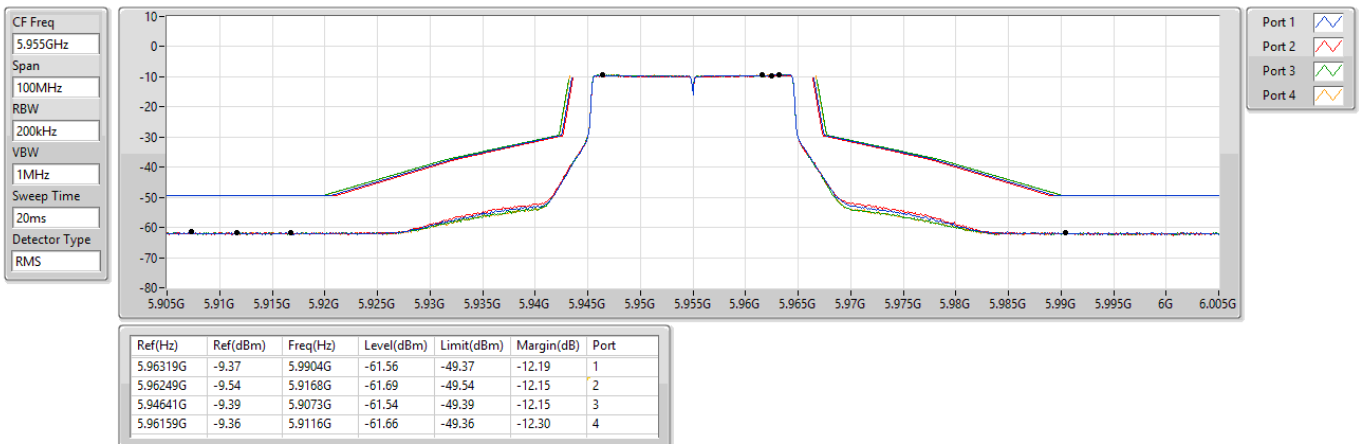

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6175MHz_TX

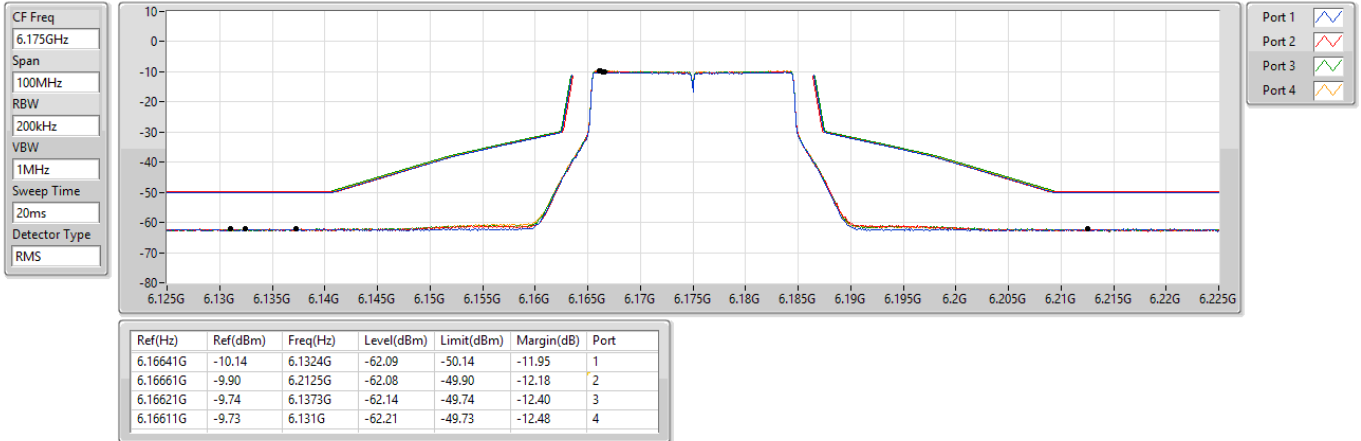

5.925-6.425GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6415MHz_TX

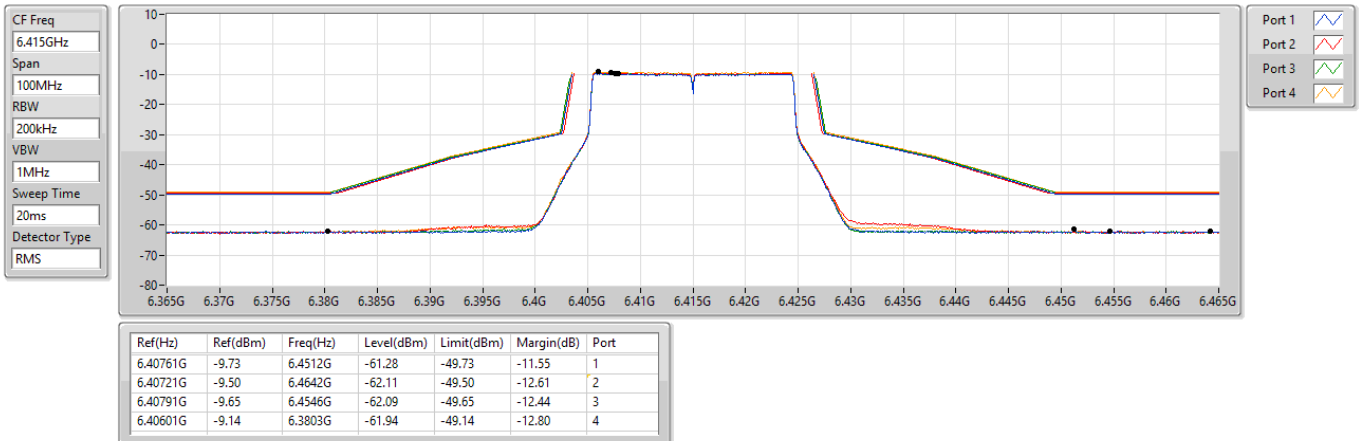

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6435MHz_TX

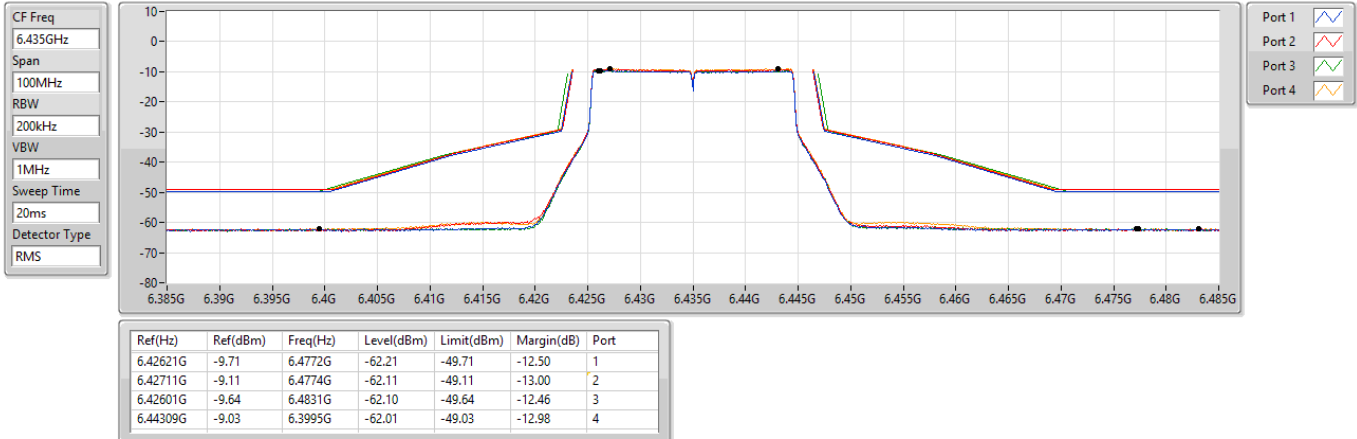

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6475MHz_TX

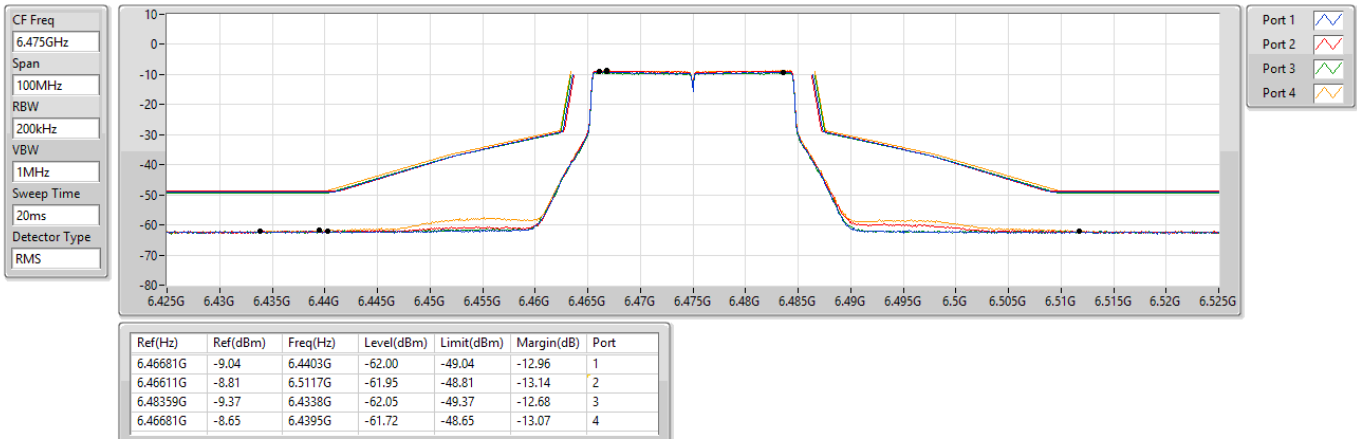

6.425-6.525GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6515MHz_TX

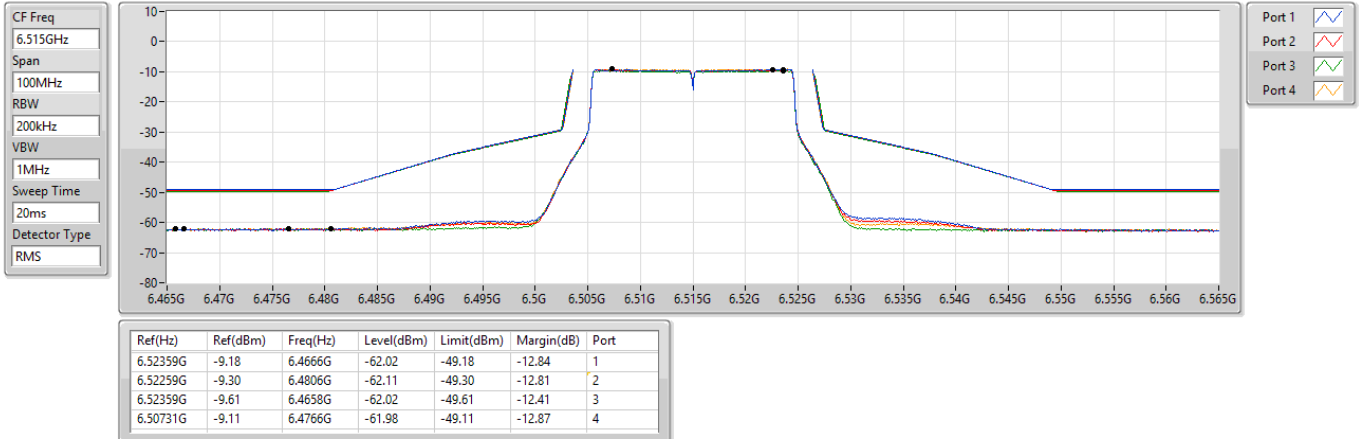

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6535MHz_TX

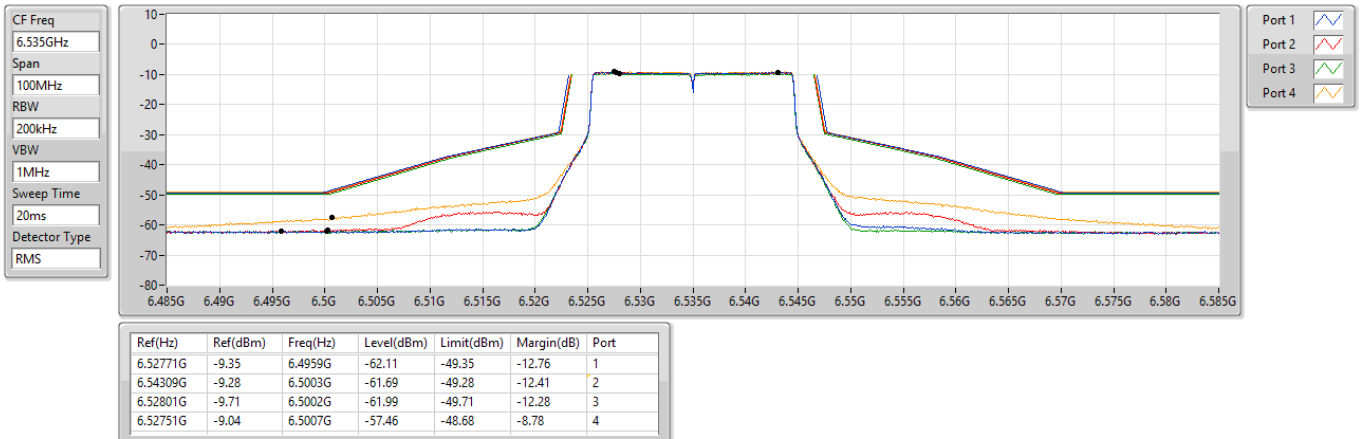

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6715MHz_TX

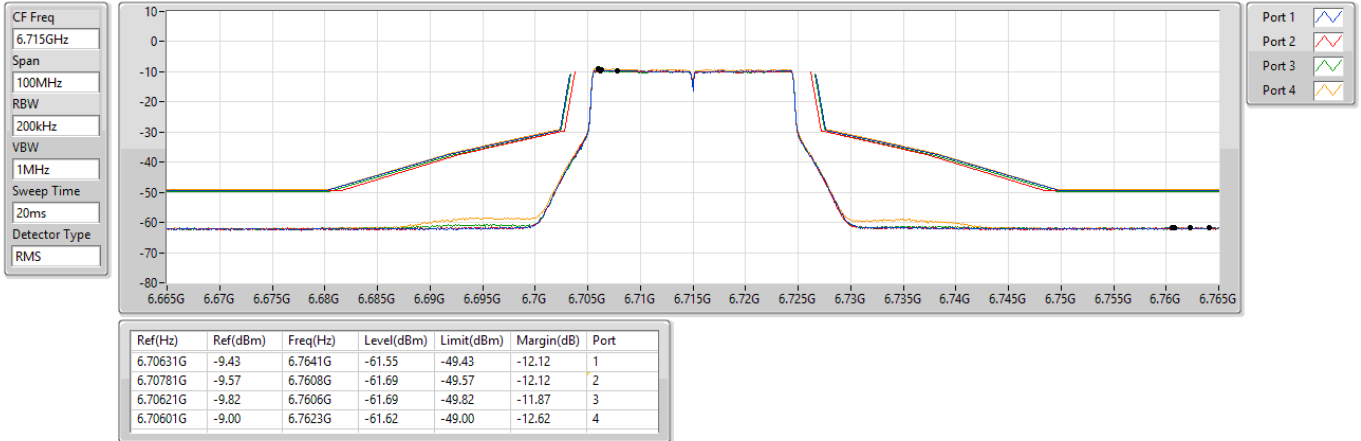

6.525-6.875GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6855MHz_TX

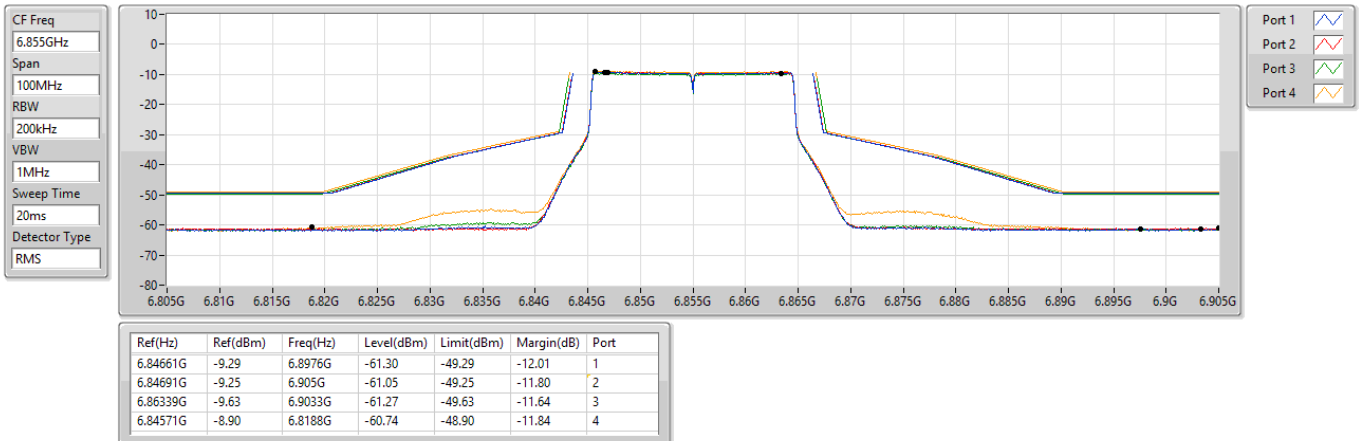

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6875MHz Straddle 6.875-7.125GHz_TX

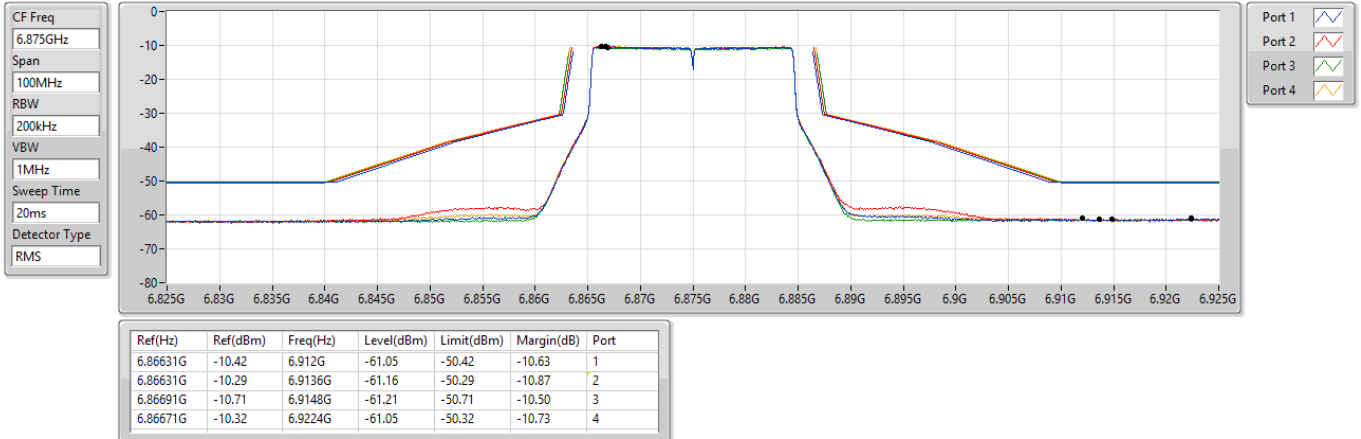

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


6895MHz_TX

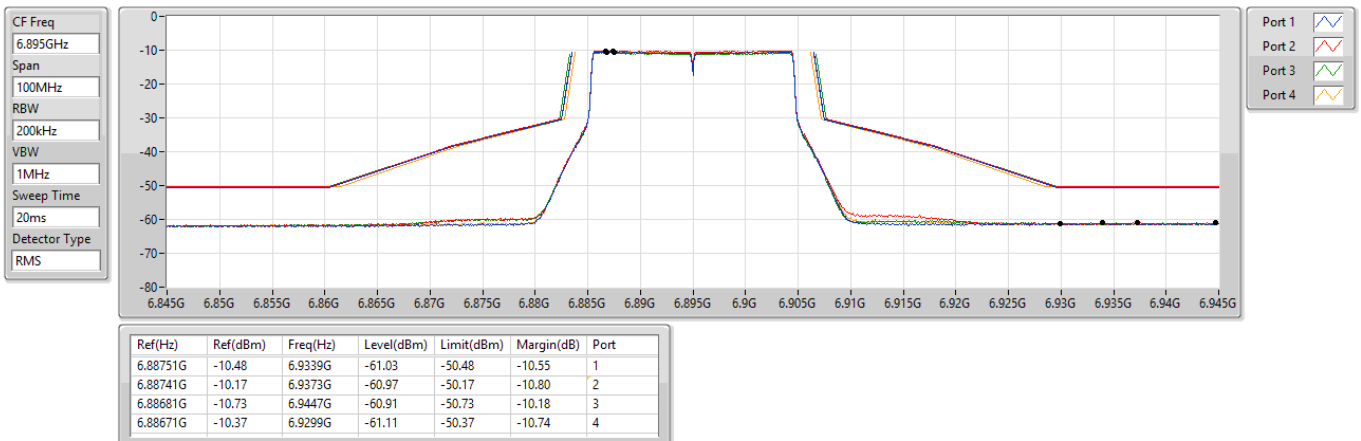

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


7015MHz_TX

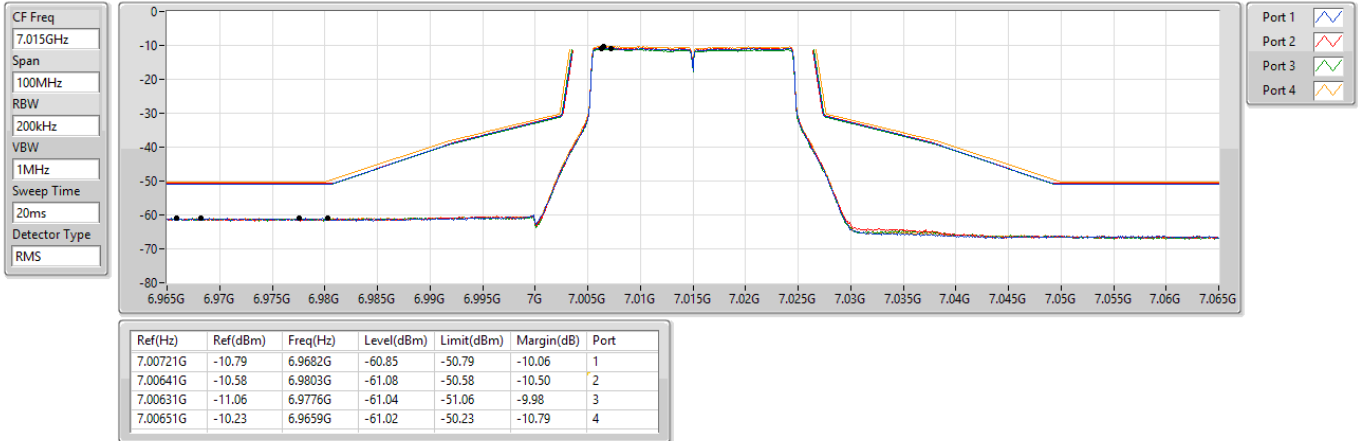

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


7095MHz_TX

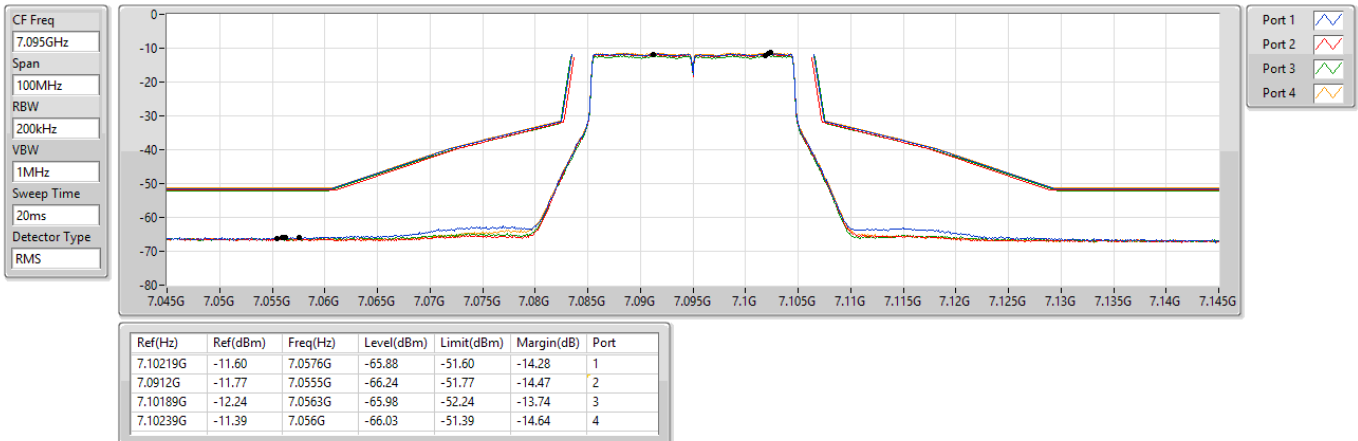

6.875-7.125GHz_802.11be EHT20_Nss4,(MCS0)_4TX

MASK


7115MHz_TX

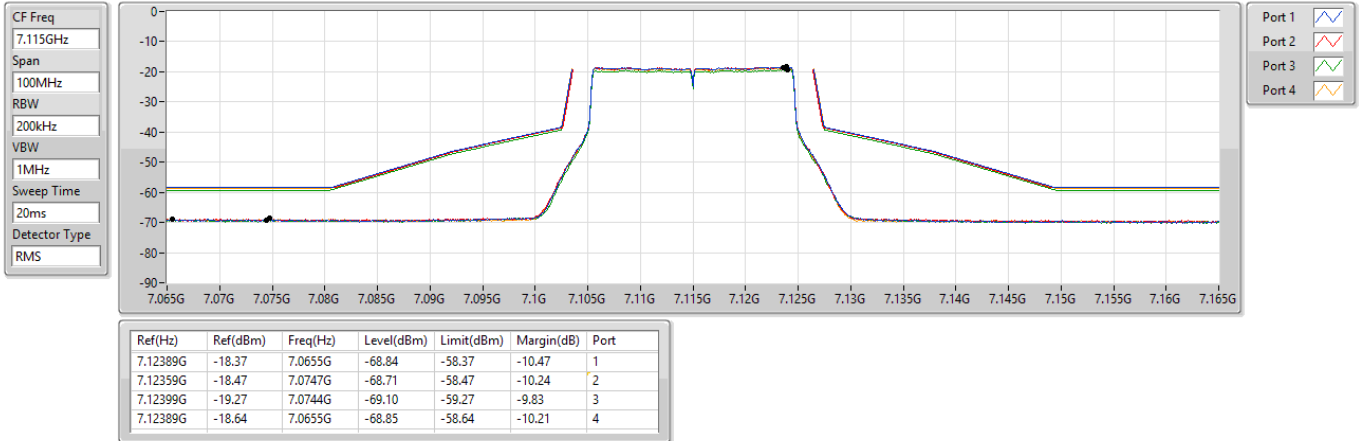

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


5965MHz_TX

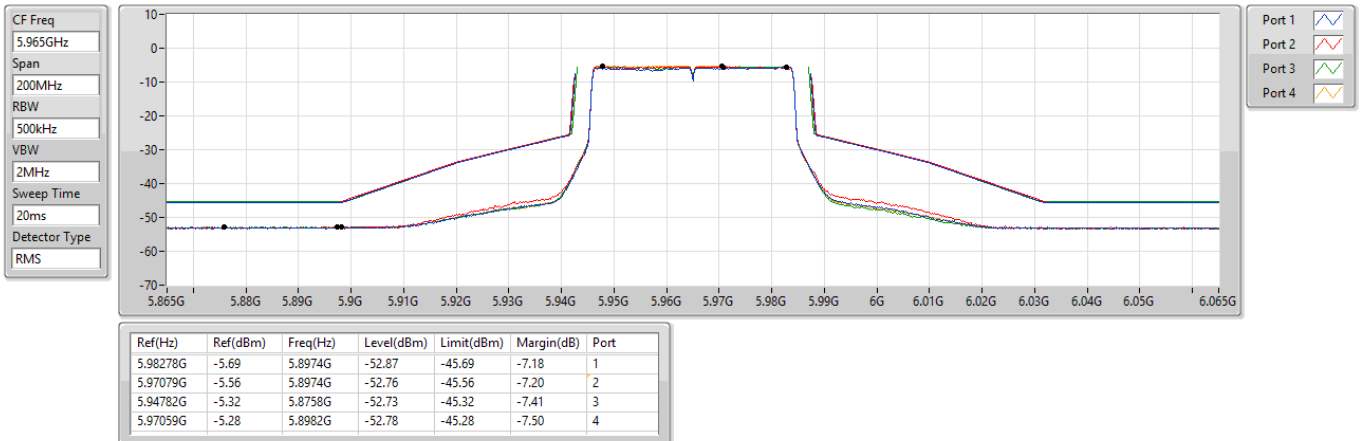

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6165MHz_TX

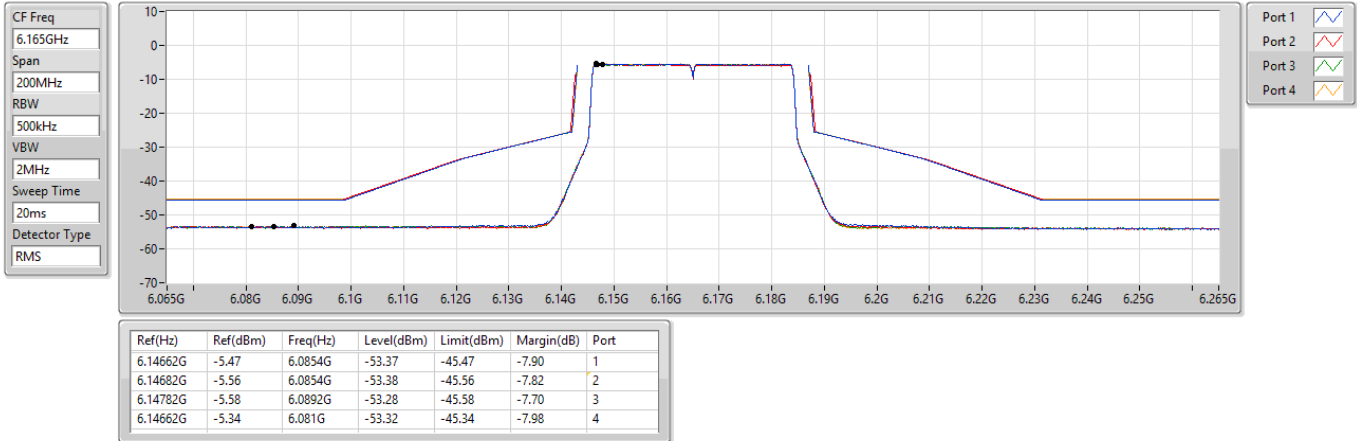

5.925-6.425GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6405MHz_TX

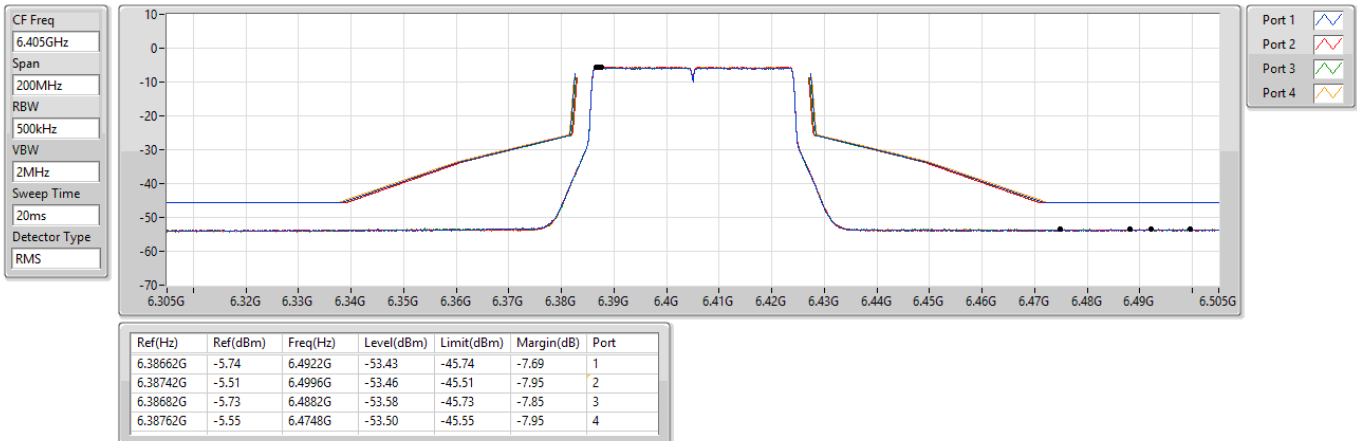

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6445MHz_TX

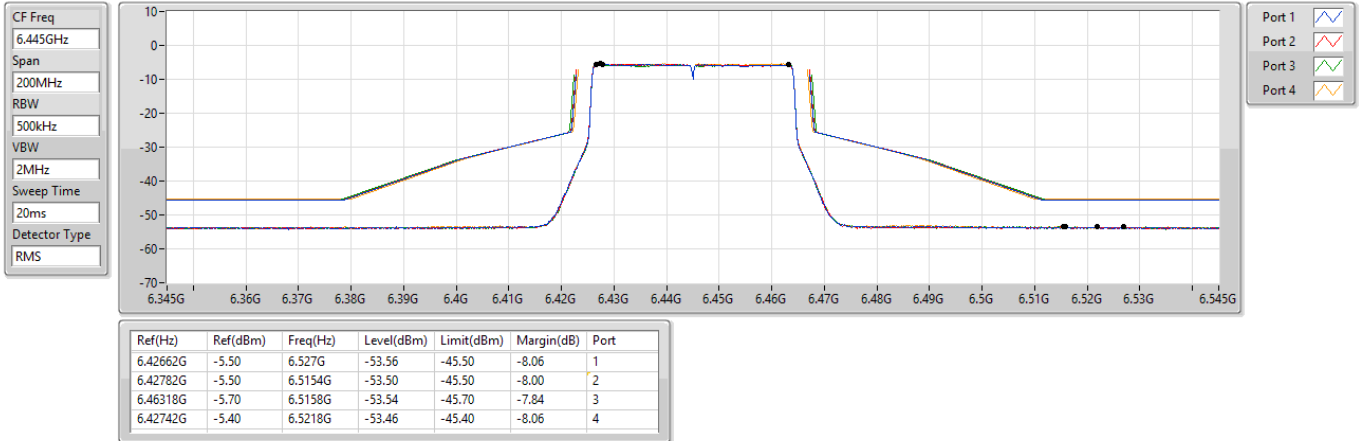

6.425-6.525GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6485MHz_TX

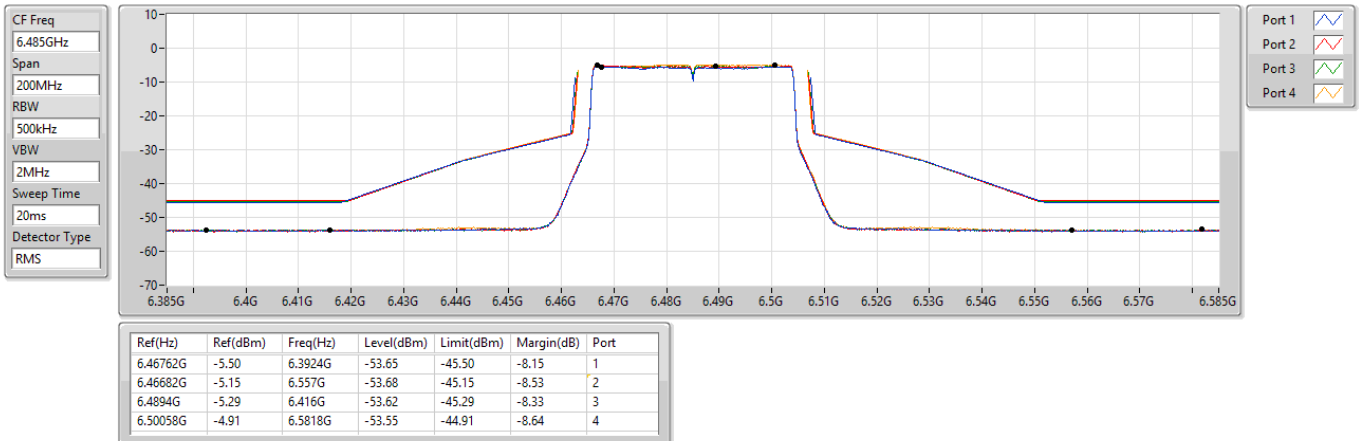

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6525MHz Straddle 6.525-6.875GHz_TX

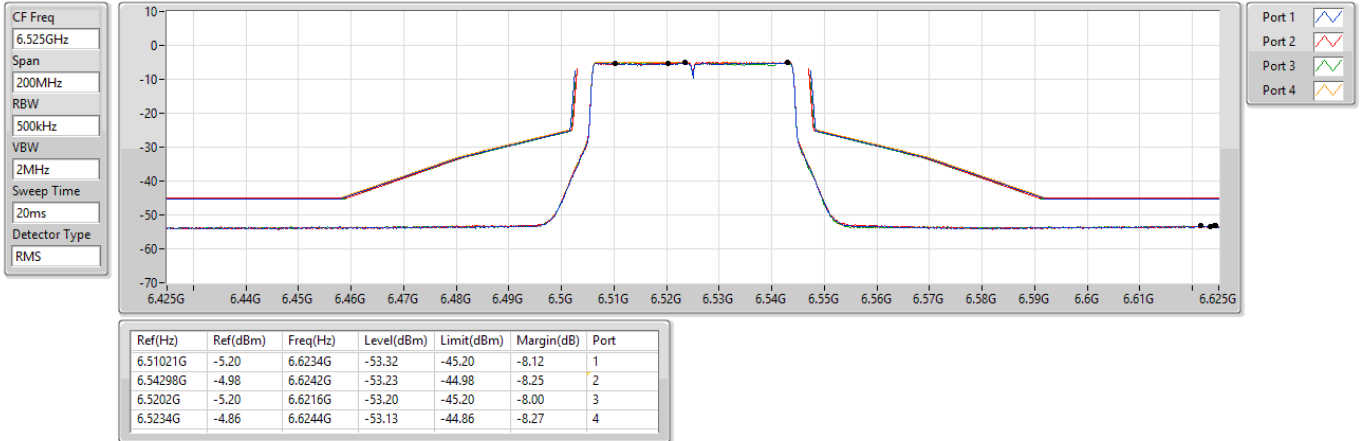

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6565MHz_TX

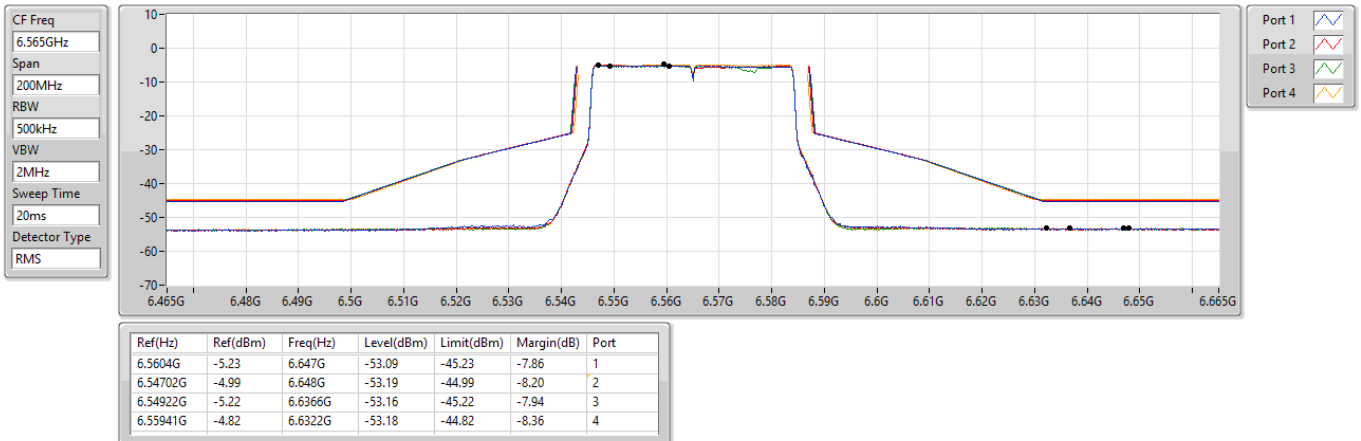

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6725MHz_TX

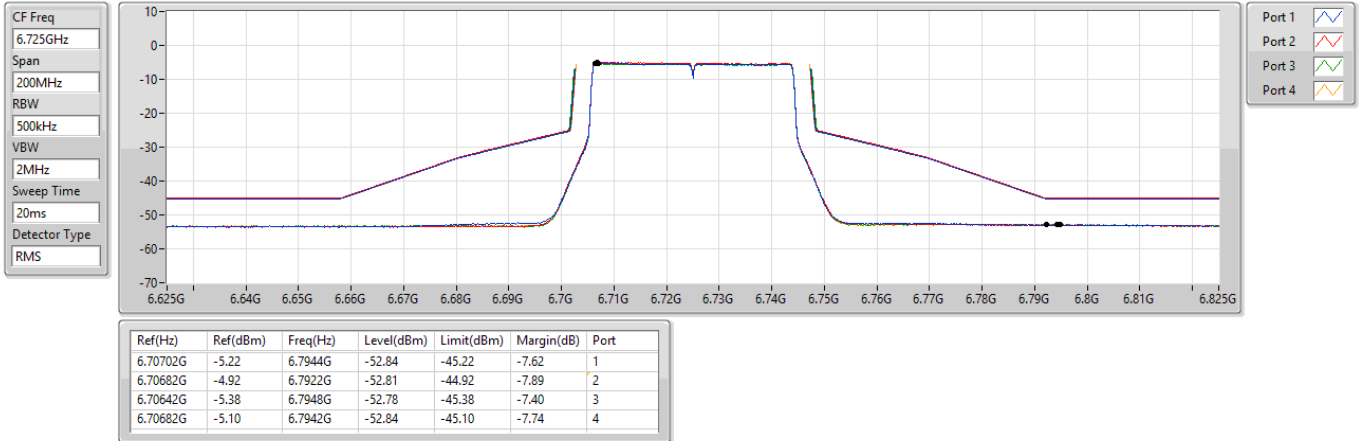

6.525-6.875GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6845MHz_TX

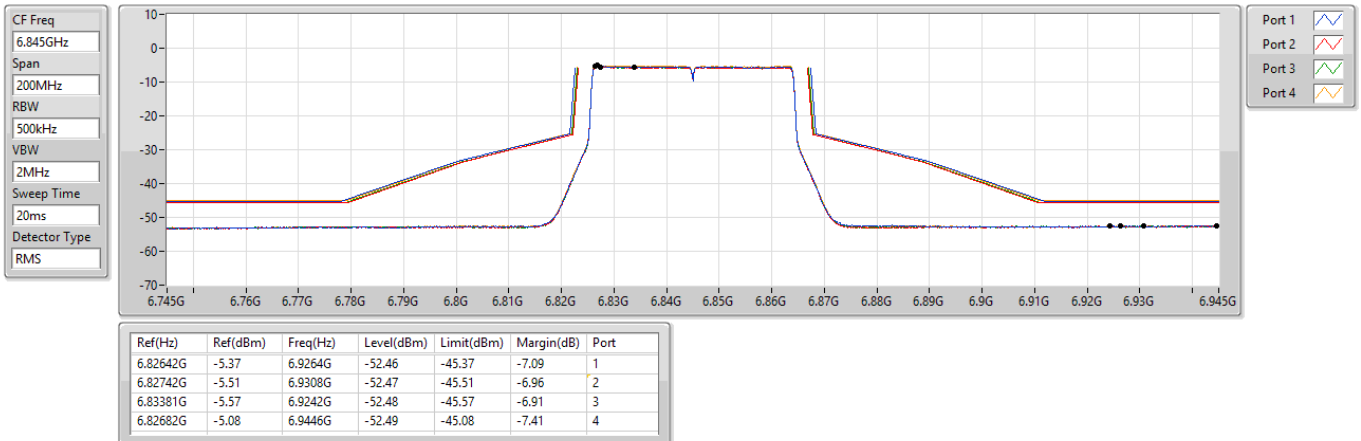

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6885MHz Straddle 6.875-7.125GHz_TX

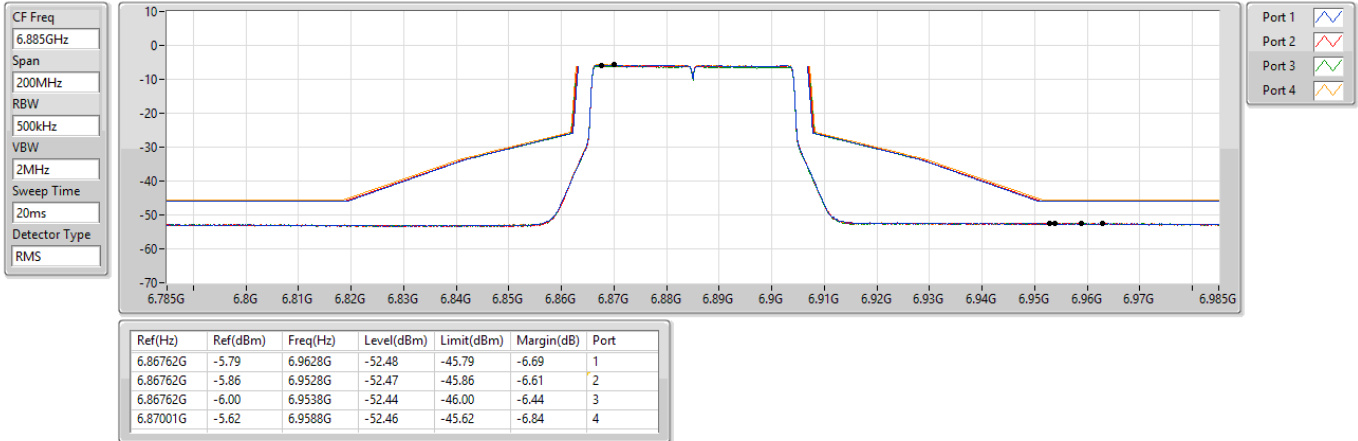

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


6925MHz_TX

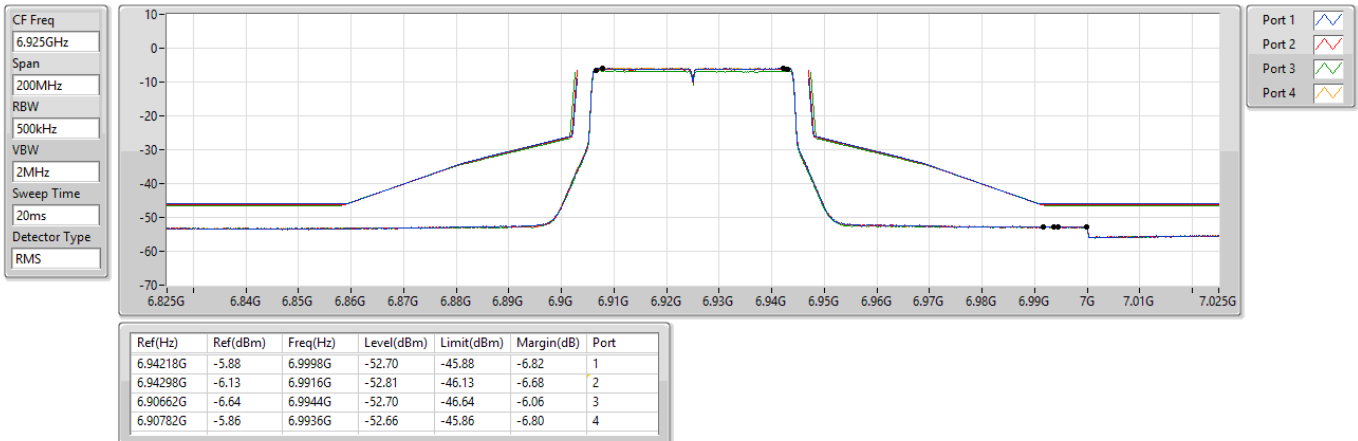

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


7005MHz_TX

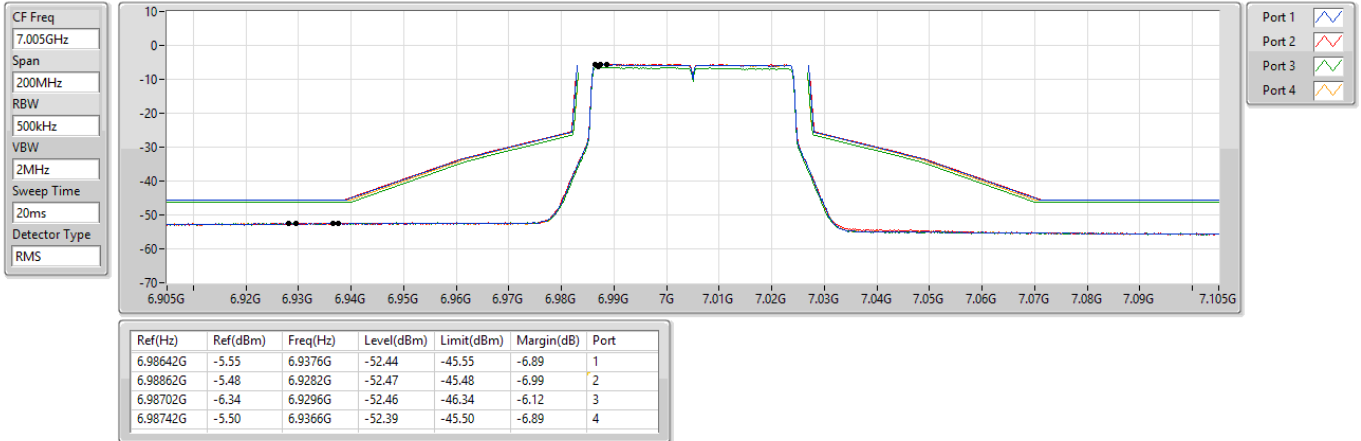

6.875-7.125GHz_802.11be EHT40_Nss4,(MCS0)_4TX

MASK


7085MHz_TX

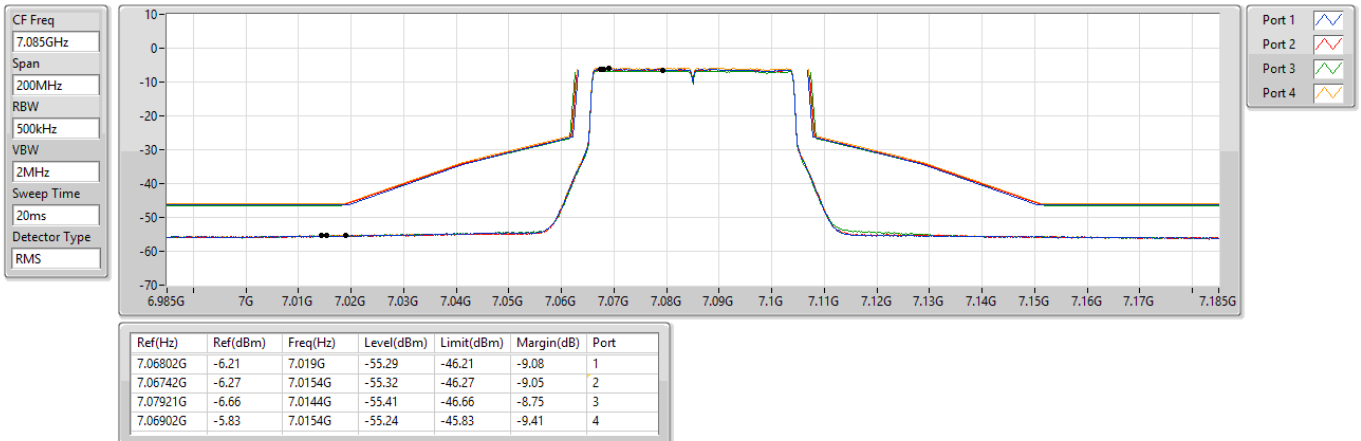

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


5985MHz_TX

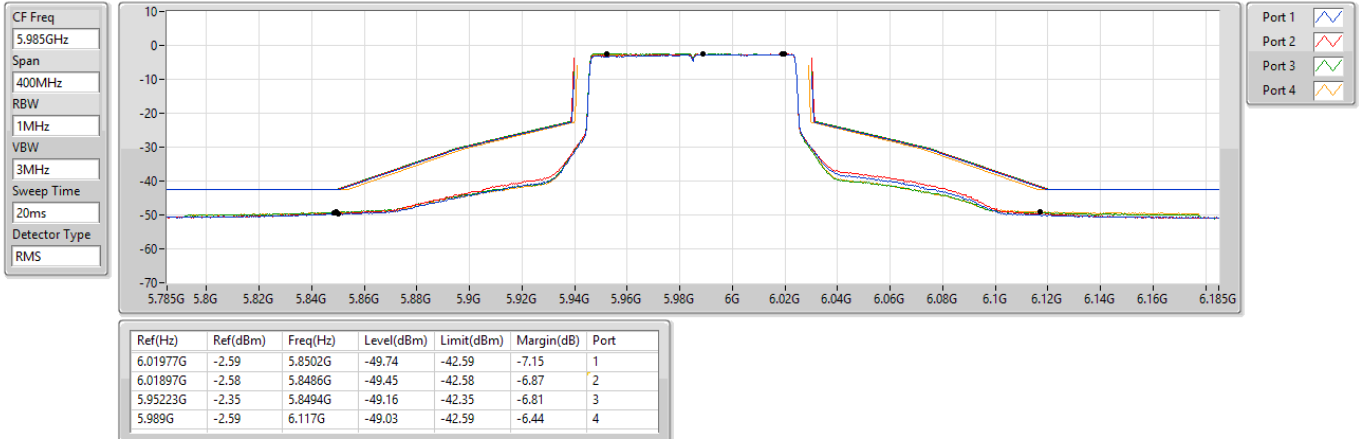

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6145MHz_TX

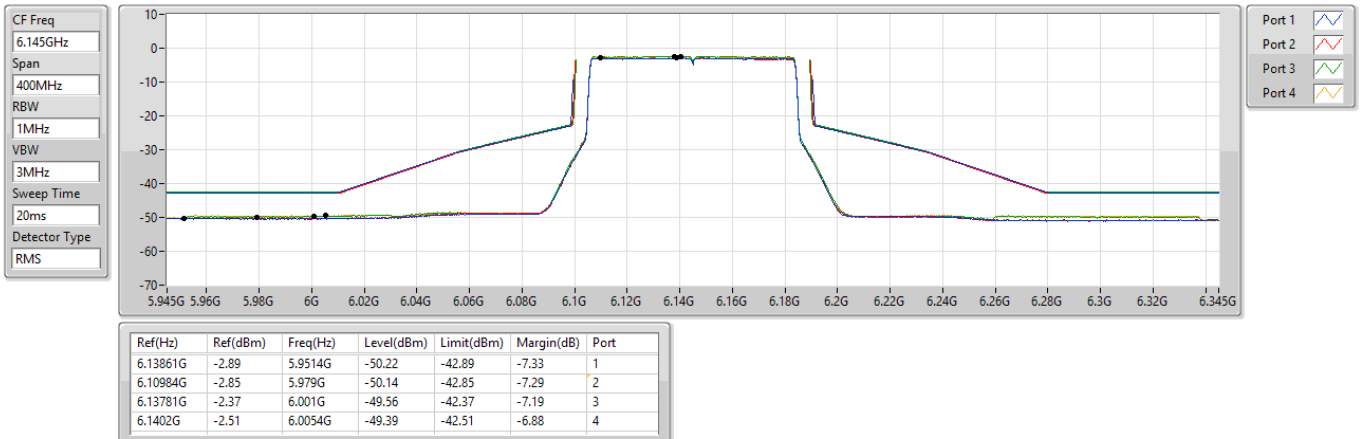

5.925-6.425GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6385MHz_TX

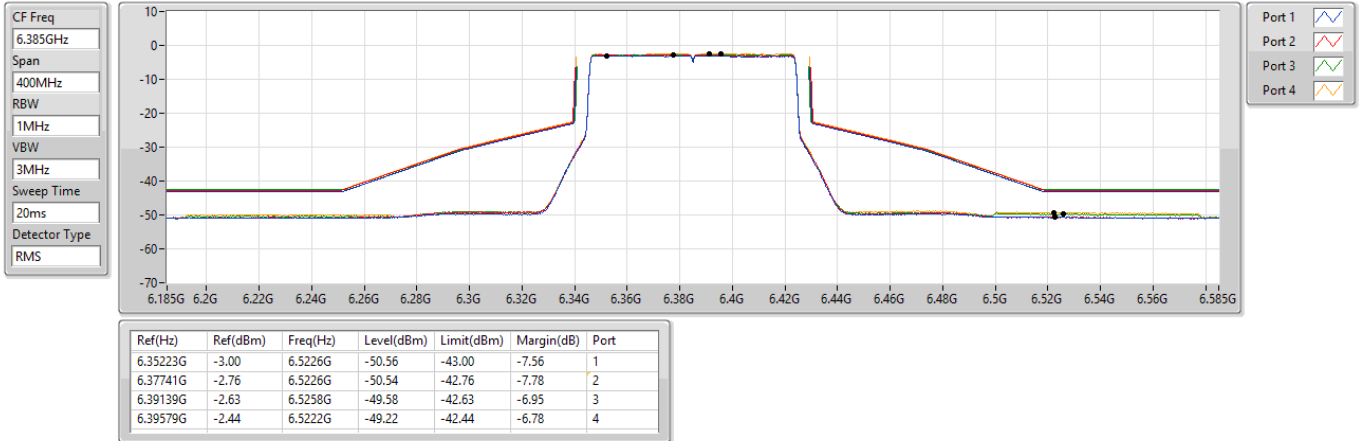

6.425-6.525GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6465MHz_TX

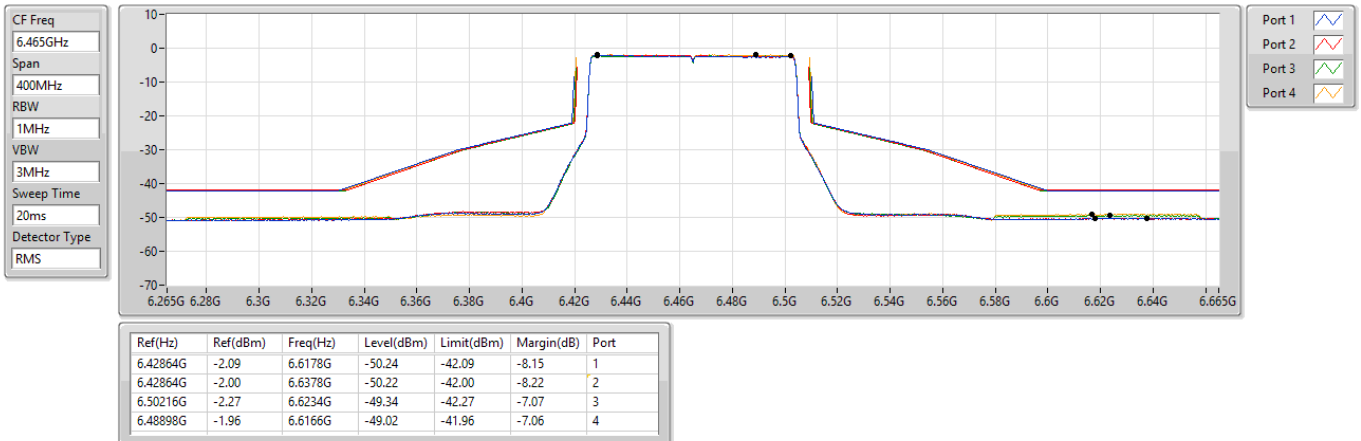

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6545MHz Straddle 6.525-6.875GHz_TX

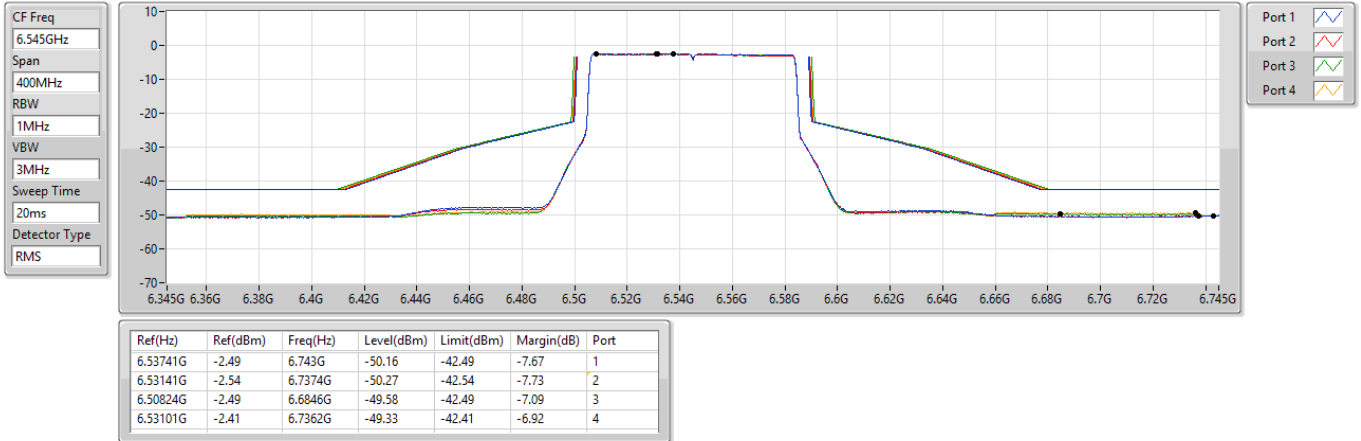

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6625MHz_TX

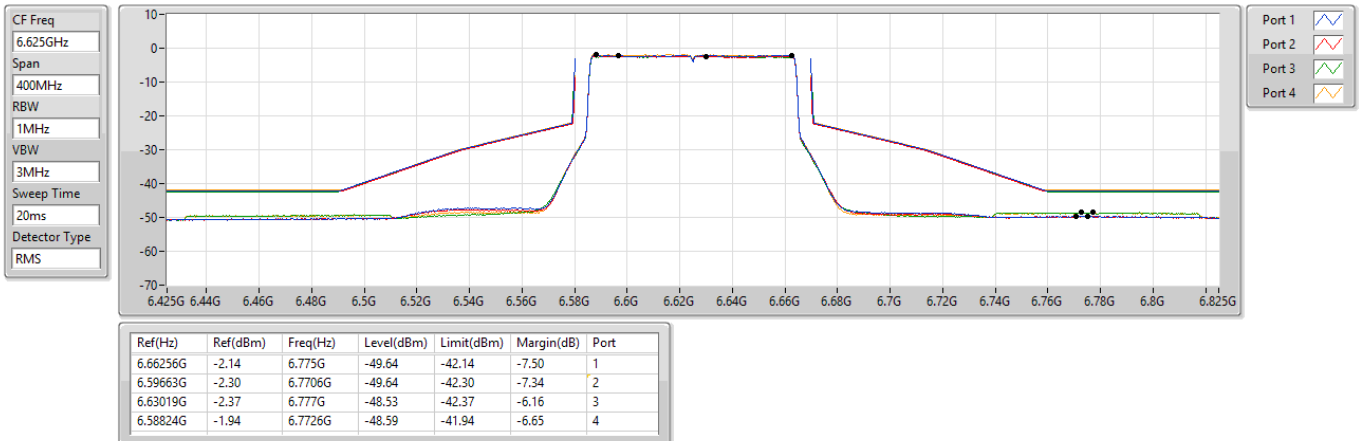

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK

6705MHz_TX

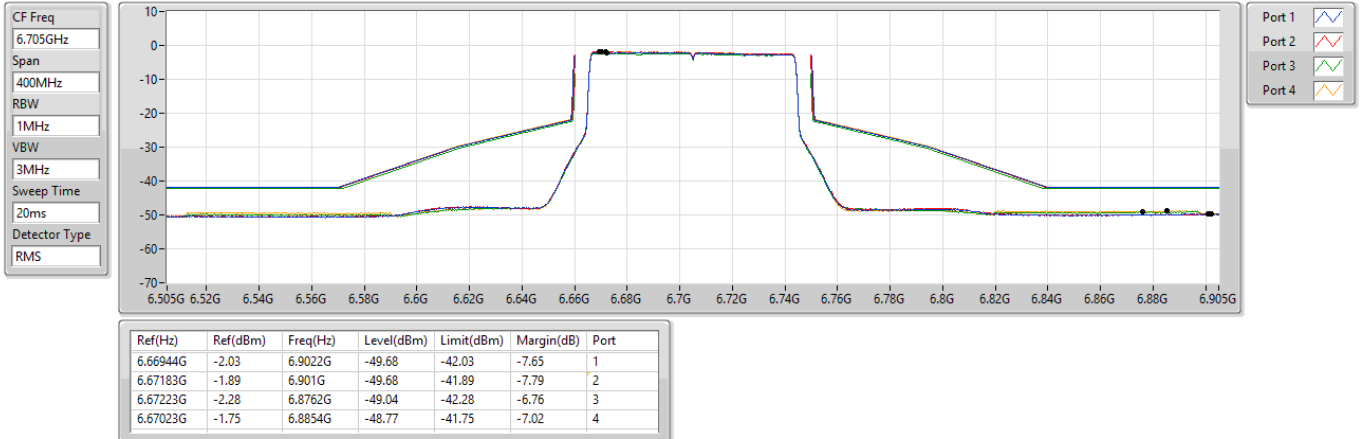

6.525-6.875GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK

6785MHz_TX

