
EC LEVEL: PART NO. DATE: S. SMIEJA 4 - MAR - 03 021244 4827-100 NOTES:

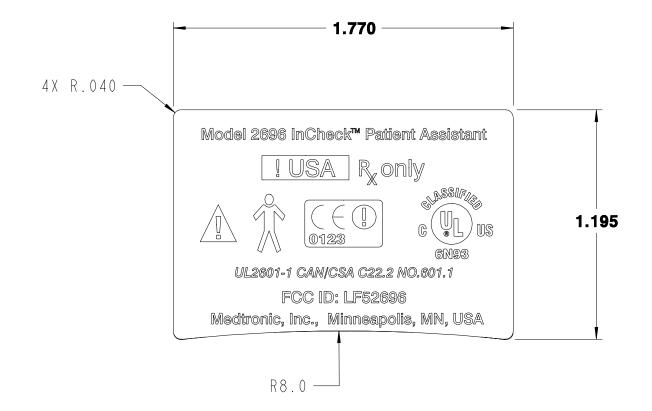

051544

EC LEVEL:

: ۲8

1851-100

.ON TAA9

4-MAR-03

: 3TAO

SMIEJA

- I. MATERIAL: 10 MIL. POLYCARBONATE WITH VELVET/MATTE TEXTURE. ADHESIVE: 3M 467MP, 2 MIL.
- 2. ENVIRONMENTAL CONDITIONS/TESTING:
 - -OPERATING TEMPERATURE RANGE: 0° TO 125°F. -STORAGE TEMPERATURE RANGE: -40° TO 150°F.
 - -THERMAL SHOCK: 150°F TO ROOM, ROOM TO -40°F (3 CYCLES).
 - -HUMIDITY: 95% @ 95°F FOR 21 DAYS.
 - -ESD: MAXIMUM AIR GAP DISCHARGE 20kV.
 - -CHEMICAL: RESISTANCE TO WATER, ALCOHOL (METHYL, ETHYL AND ISOPROPYL) AND MILD DETERGENT.
- 3. COLORS:

-INSPECT PER CUSTOMER APPROVED SAMPLE.

- -BACKGROUND: MEDTRONIC MEDIUM GRAY, P/N 186034-001.
- -TEXT & SYMBOLS: MEDTRONIC DARK BLUE, P/N 186031-001.
- 4. ARTWORK SHOWN FOR REFERENCE ONLY, REFER TO ELECTRONIC VERSION.
- 5. BOLD ITEMS INDICATE PLEXUS INSPECTION REQUIREMENTS.

