

Dipole Verification Plots

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-7; Ambient Temp: 23.6; Tissue Temp: 22.9

835 MHz System Verification -Head-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.59 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.15 W/kg

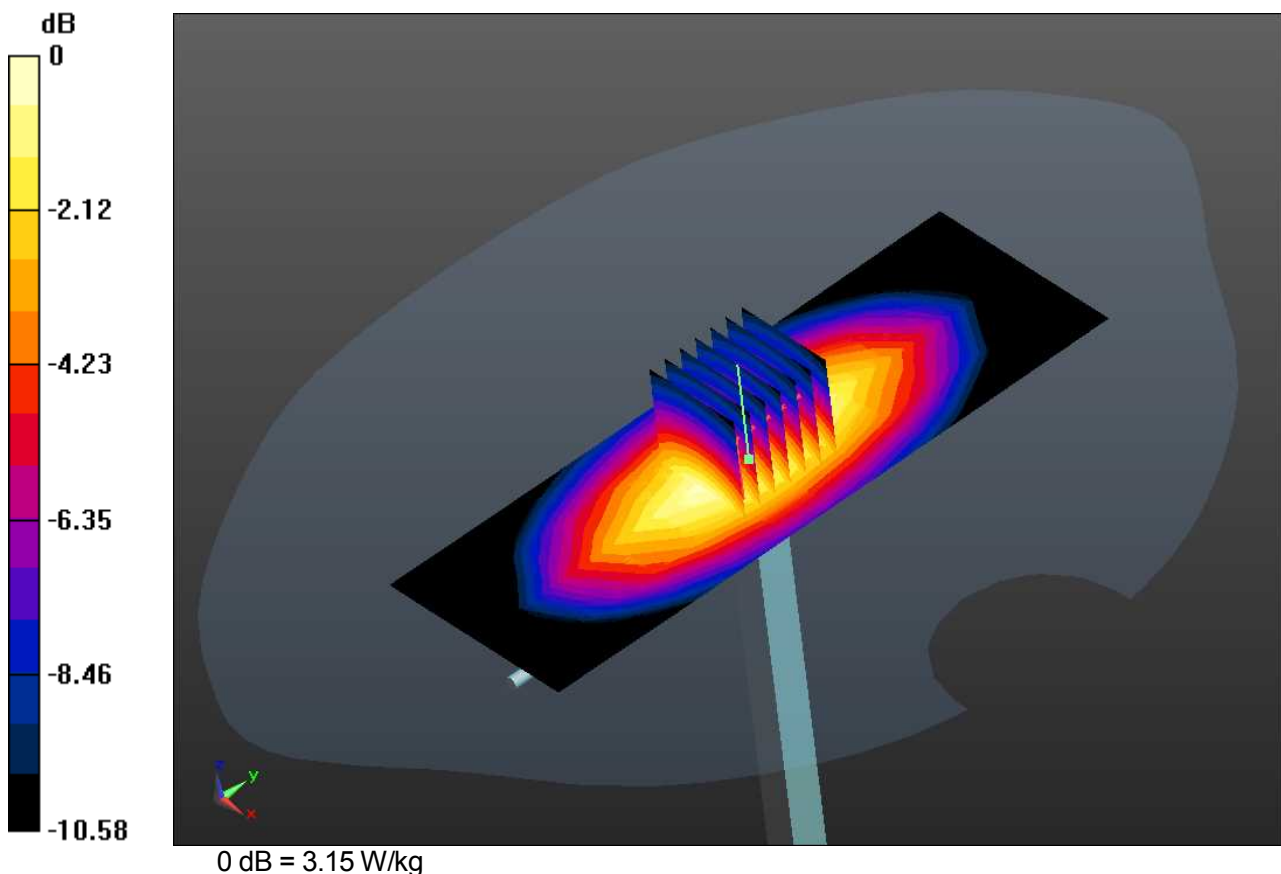

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-7; Ambient Temp: 23.6; Tissue Temp: 22.9

835 MHz System Verification -Head-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.59 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.15 W/kg

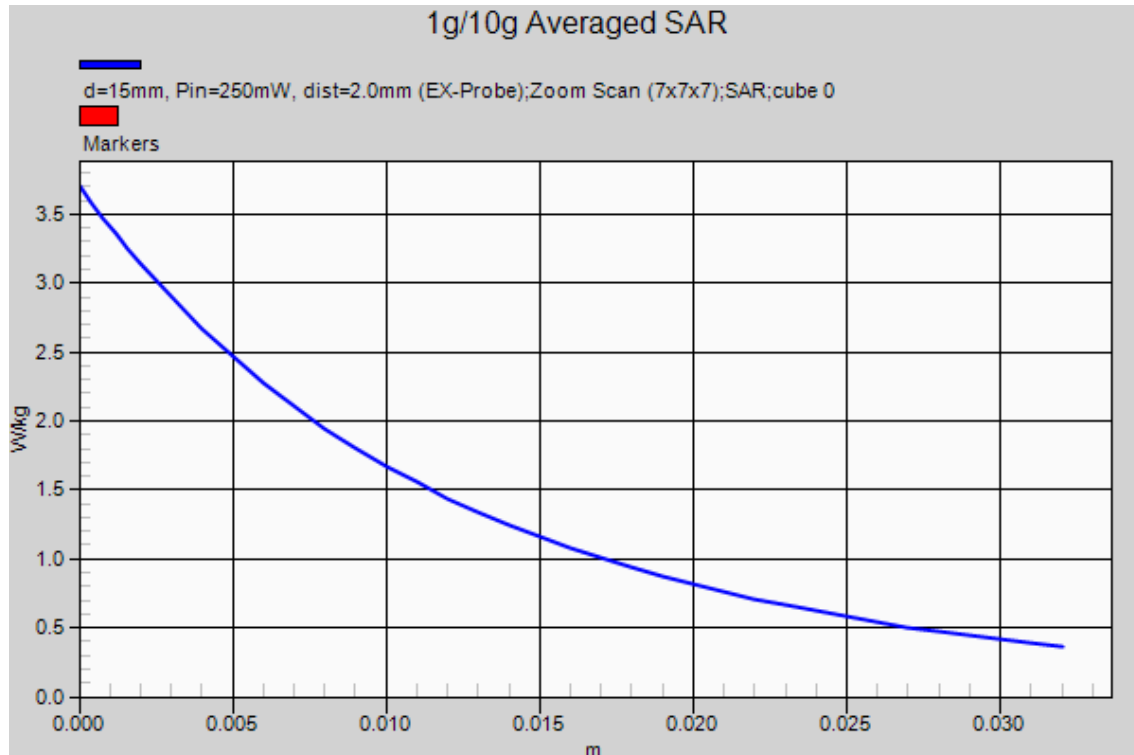

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.021 \text{ S/m}$; $\epsilon_r = 54.406$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP:1230; Type: QDOVA001BB; Serial: TP:1230

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-7; Ambient Temp: 23.6; Tissue Temp: 23.2

835 MHz System Verification -Body-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.32 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.71 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

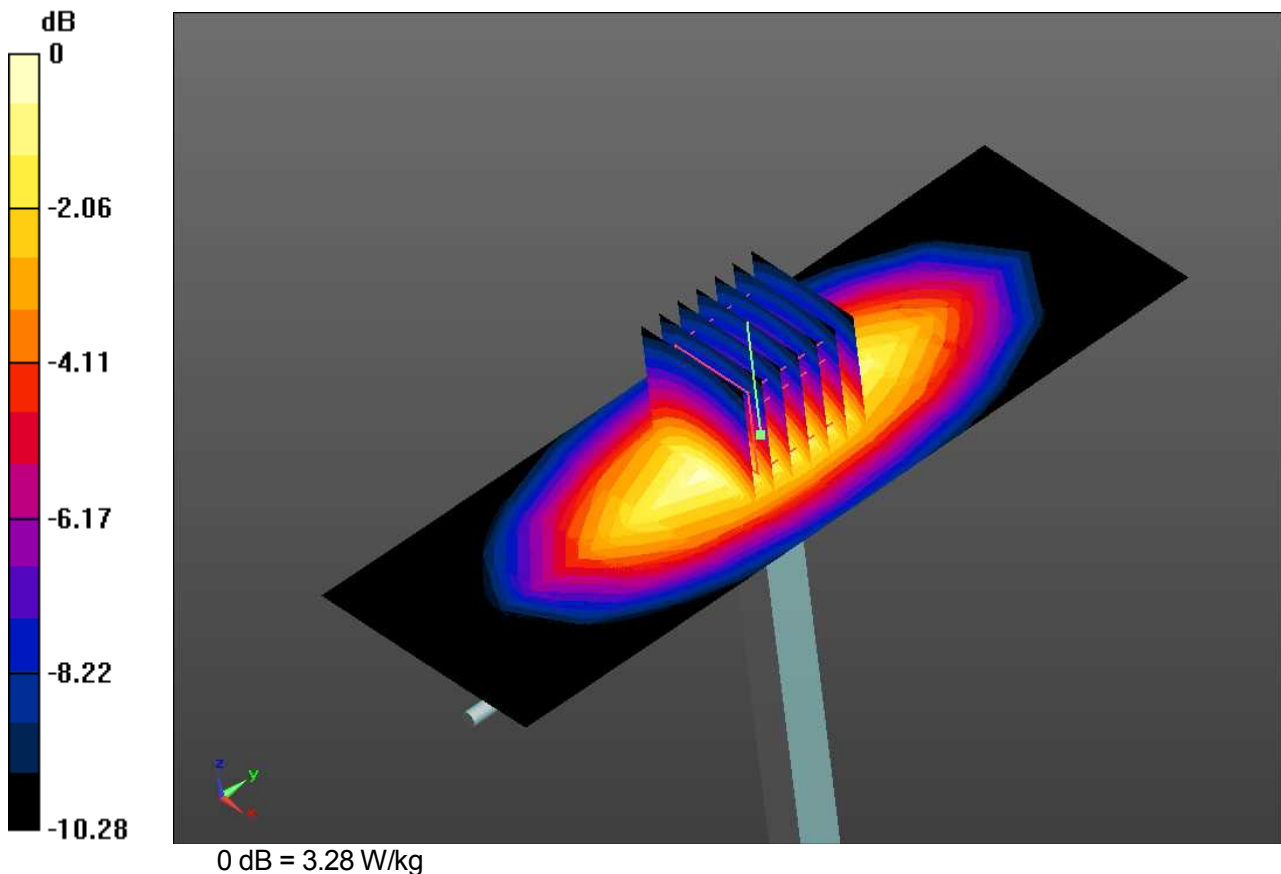

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.021 \text{ S/m}$; $\epsilon_r = 54.406$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP:1230; Type: QDOVA001BB; Serial: TP:1230

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-7; Ambient Temp: 23.6; Tissue Temp: 23.2

835 MHz System Verification -Body-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.32 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.71 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

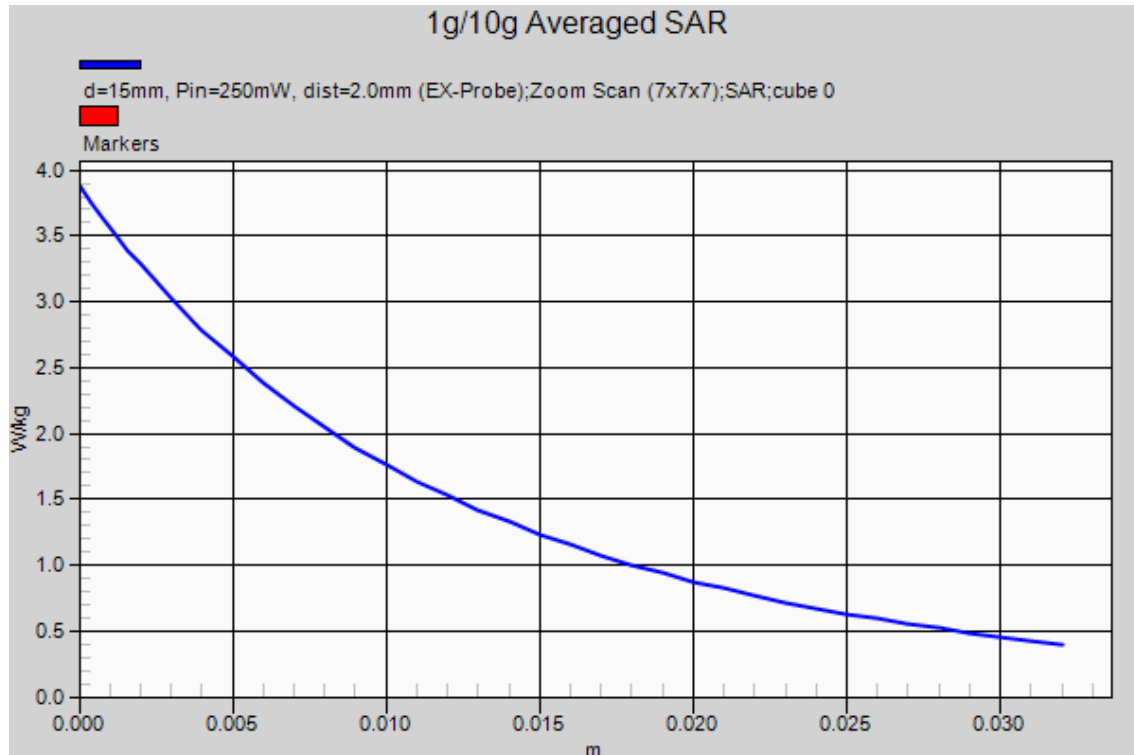

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.012 \text{ S/m}$; $\epsilon_r = 55.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP:1230; Type: QDOVA001BB; Serial: TP:1230

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-10; Ambient Temp: 21.1; Tissue Temp: 20.1

835 MHz System Verification -Body-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.08 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

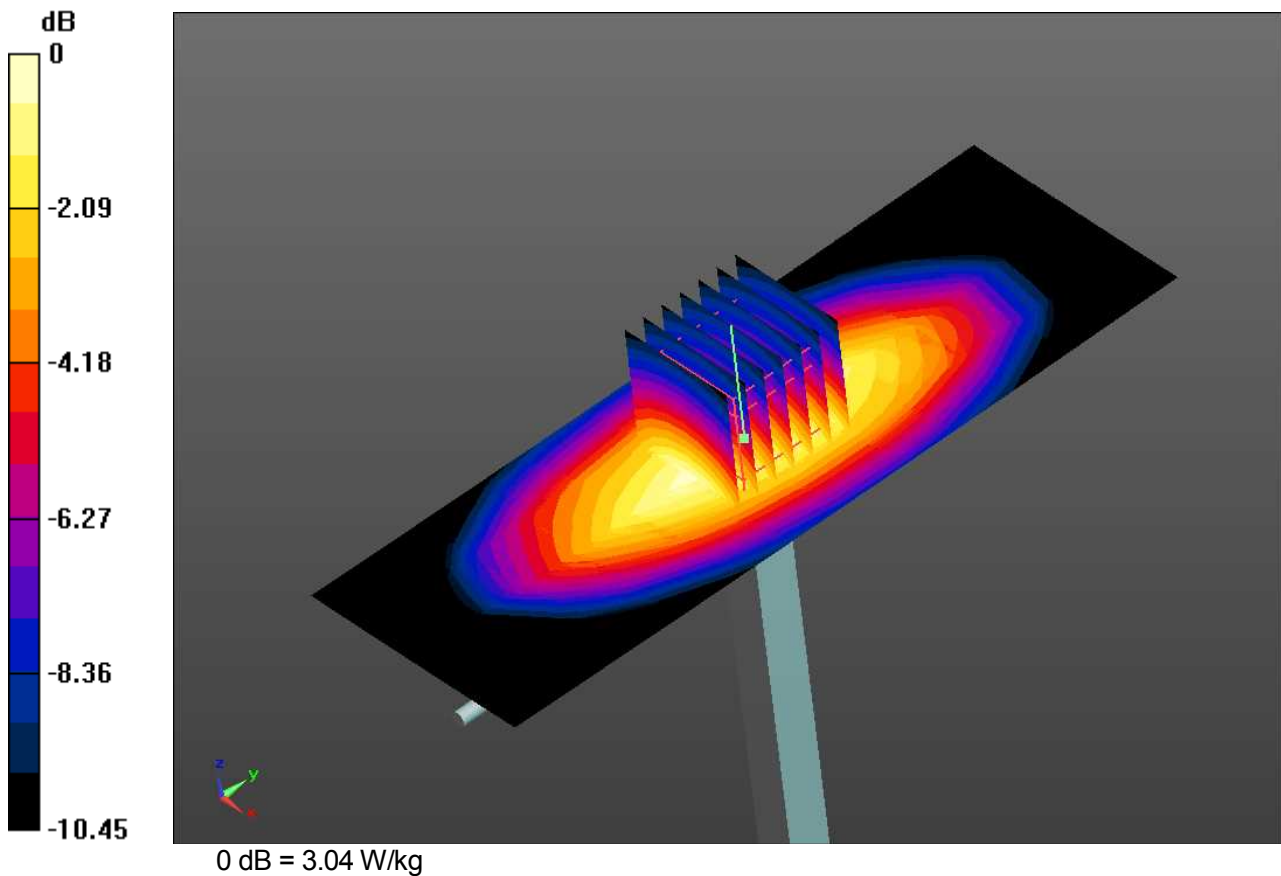

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d163

Communication System: CW; Frequency: 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.012 \text{ S/m}$; $\epsilon_r = 55.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP:1230; Type: QDOVA001BB; Serial: TP:1230

Measurement SW: DASY52, Version 52.8 (8)

Test date: 2014-11-10; Ambient Temp: 21.1; Tissue Temp: 20.1

835 MHz System Verification -Body-

Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.08 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

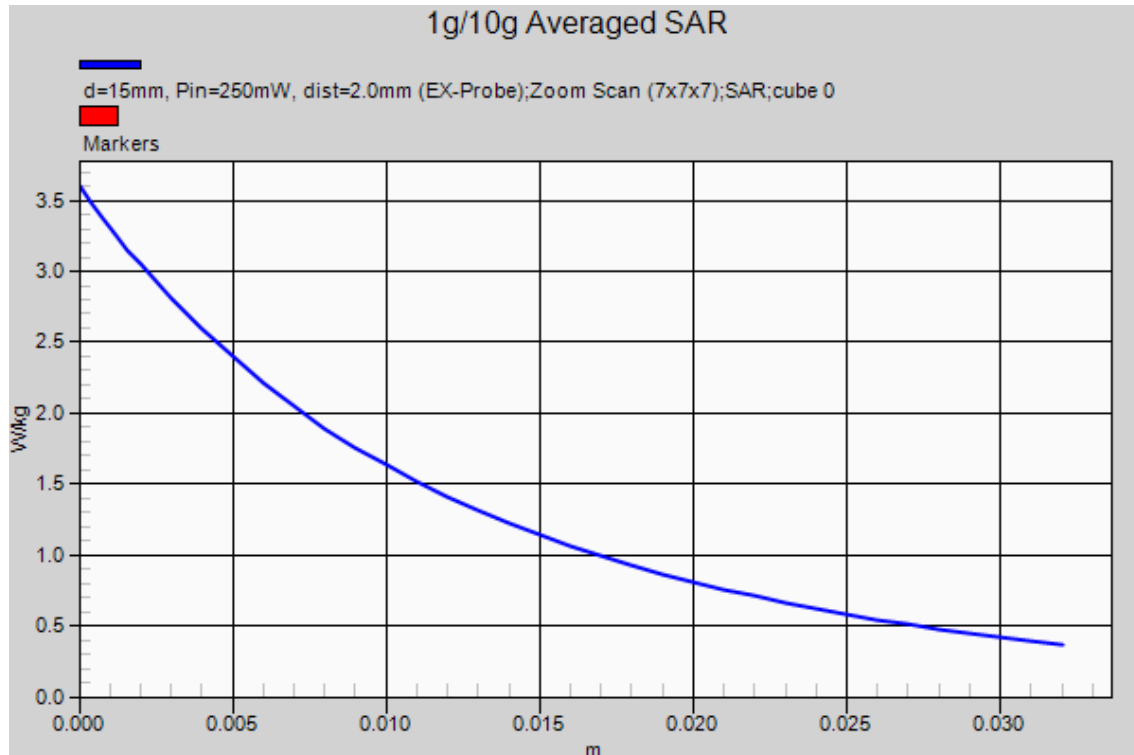

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d183

Communication System: CW; Frequency: 1900MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 39.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-10; Ambient Temp: 22.8; Tissue Temp: 21.6

1900 MHz System Verification -Head-

Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 14.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 100.7 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 9.70 W/kg; SAR(10 g) = 4.99 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

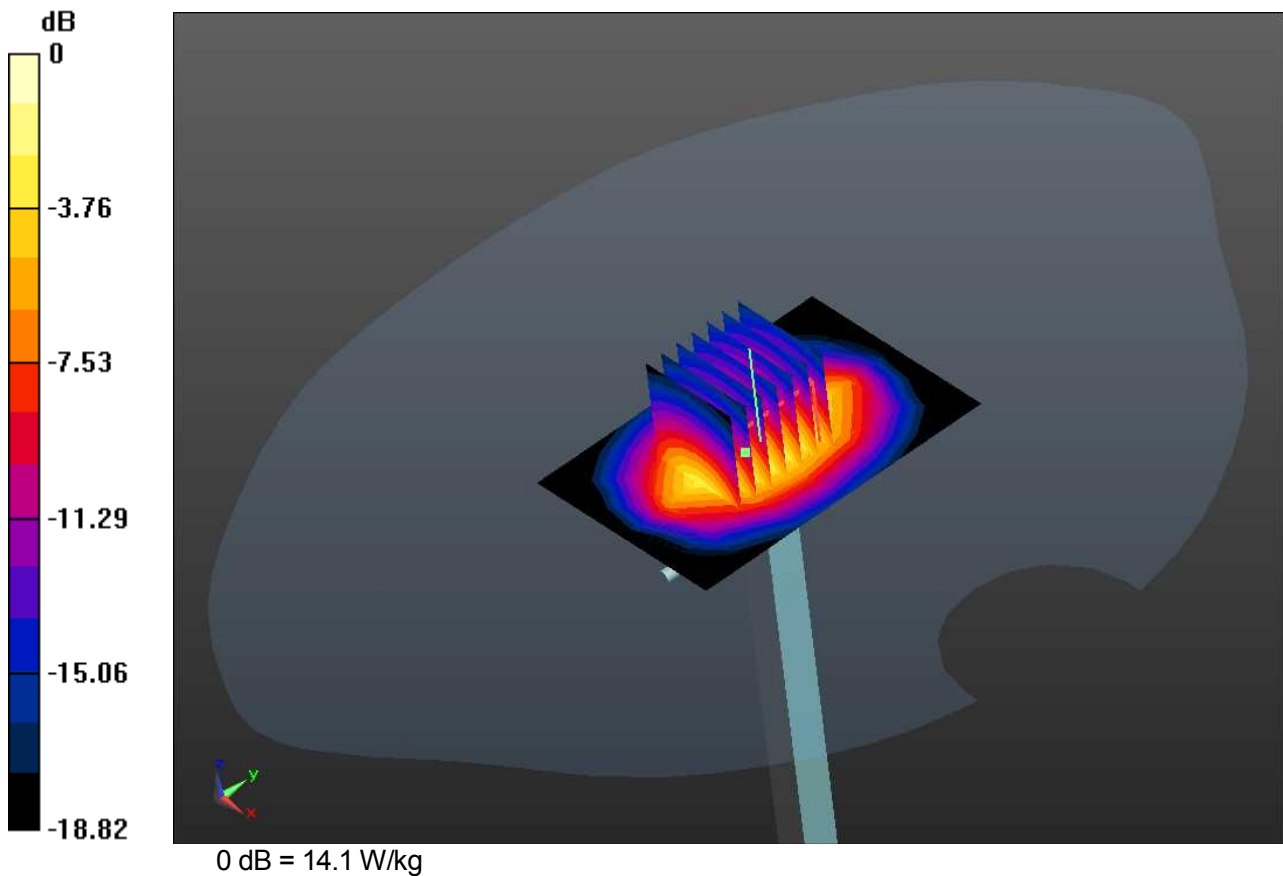

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d183

Communication System: CW; Frequency: 1900MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 39.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-10; Ambient Temp: 22.8; Tissue Temp: 21.6

1900 MHz System Verification -Head-

Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 14.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 100.7 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 9.70 W/kg; SAR(10 g) = 4.99 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

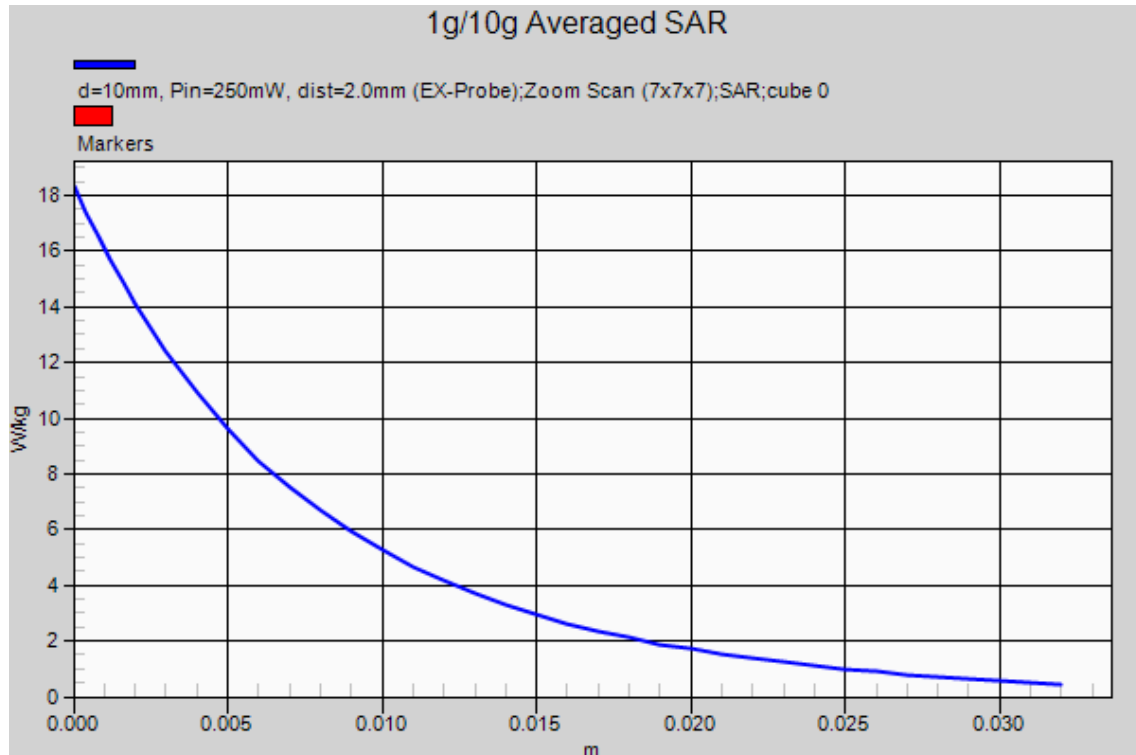

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d183

Communication System: CW; Frequency: 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.536$ S/m; $\epsilon_r = 51.272$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP;1230; Type: QDOVA001BB; Serial: TP:1230

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-11; Ambient Temp: 22.1; Tissue Temp: 21.4

1900 MHz System Verification -Body-

Area Scan (5x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 13.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 95.44 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.06 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

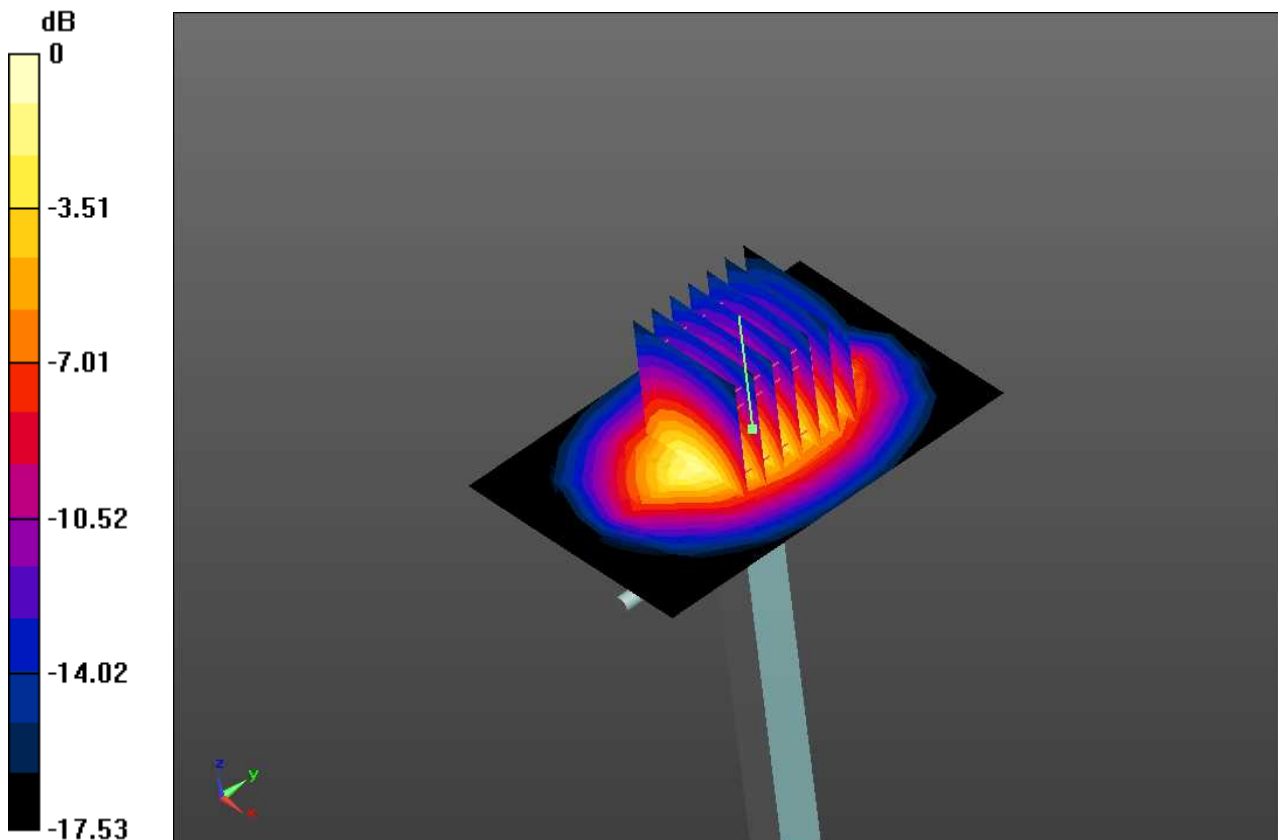

0 dB = 13.7 W/kg

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d183

Communication System: CW; Frequency: 1900MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.536 \text{ S/m}$; $\epsilon_r = 51.272$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP;1230; Type: QDOVA001BB; Serial: TP:1230

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-11; Ambient Temp: 22.1; Tissue Temp: 21.4

1900 MHz System Verification -Body-

Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 95.44 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.06 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

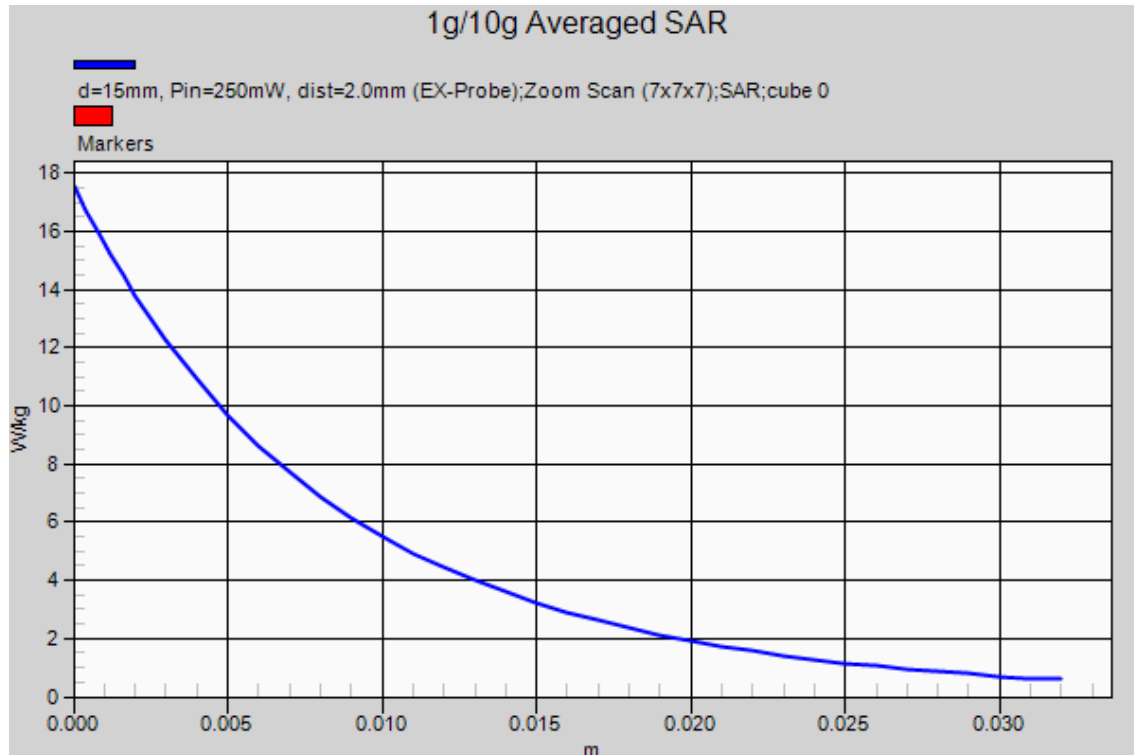

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 925

Communication System: CW; Frequency: 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.885$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.49, 7.49, 7.49); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-14; Ambient Temp: 22.6; Tissue Temp: 21.8

2450 MHz System Verification -Head-

Area Scan (5x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 20.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 106.6 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

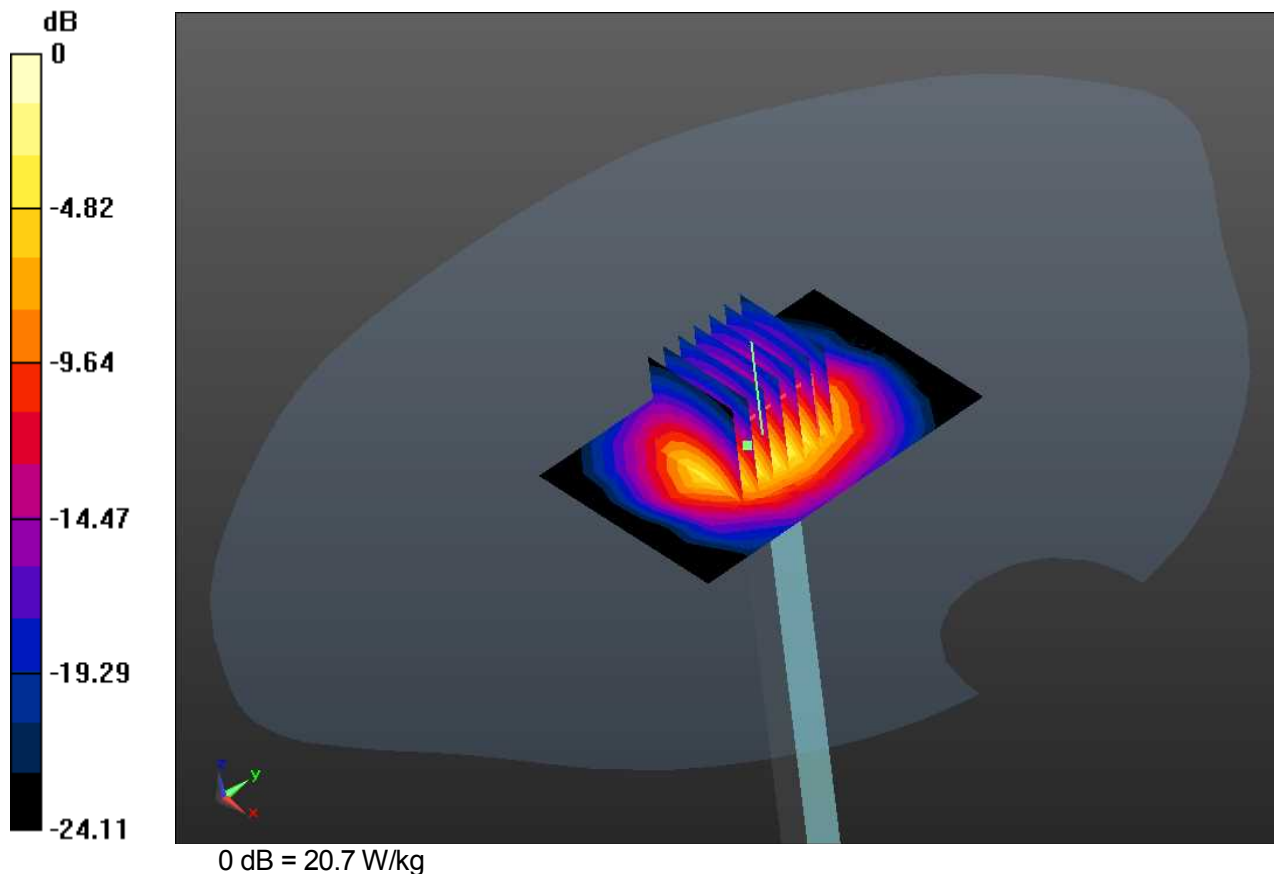

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 925

Communication System: CW; Frequency: 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.885$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.49, 7.49, 7.49); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-14; Ambient Temp: 22.6; Tissue Temp: 21.8

2450 MHz System Verification -Head-

Area Scan (5x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 20.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 106.6 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

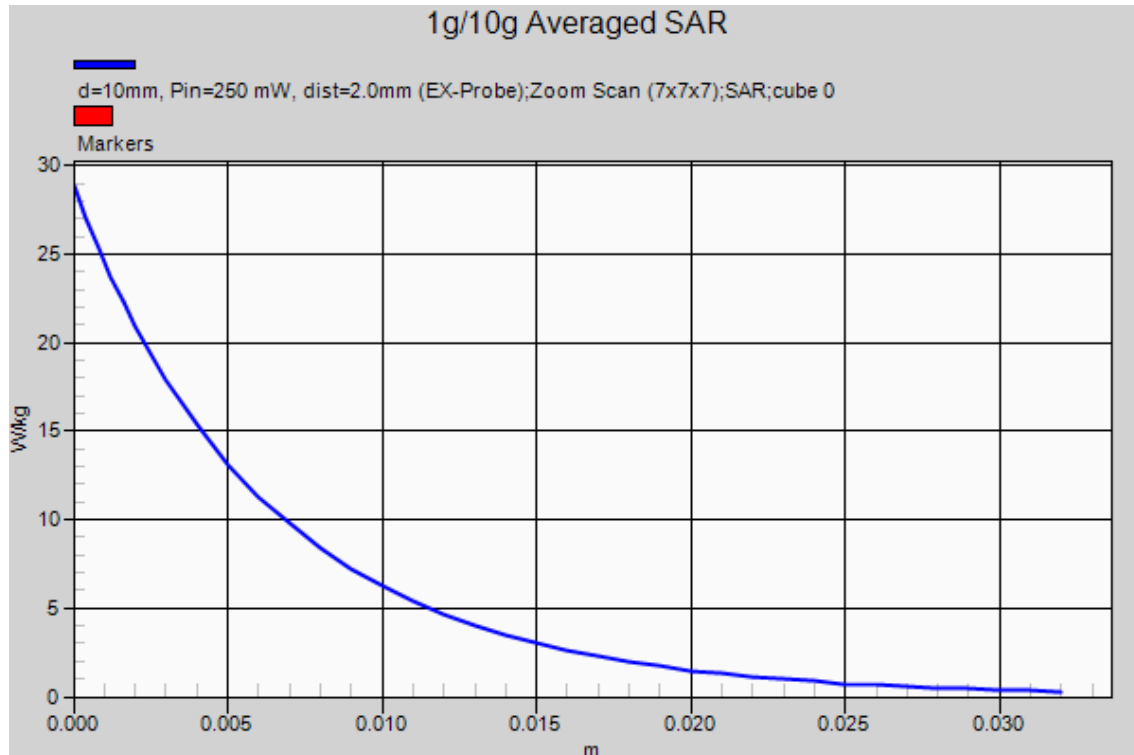

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 925

Communication System: CW; Frequency: 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 52.808$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.33, 7.33, 7.33); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP;1230; Type: QDOVA001BB; Serial: TP:1230

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-14; Ambient Temp: 22.5; Tissue Temp: 22.0

2450 MHz System Verification -Body-

Area Scan (5x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 20.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 104.2 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

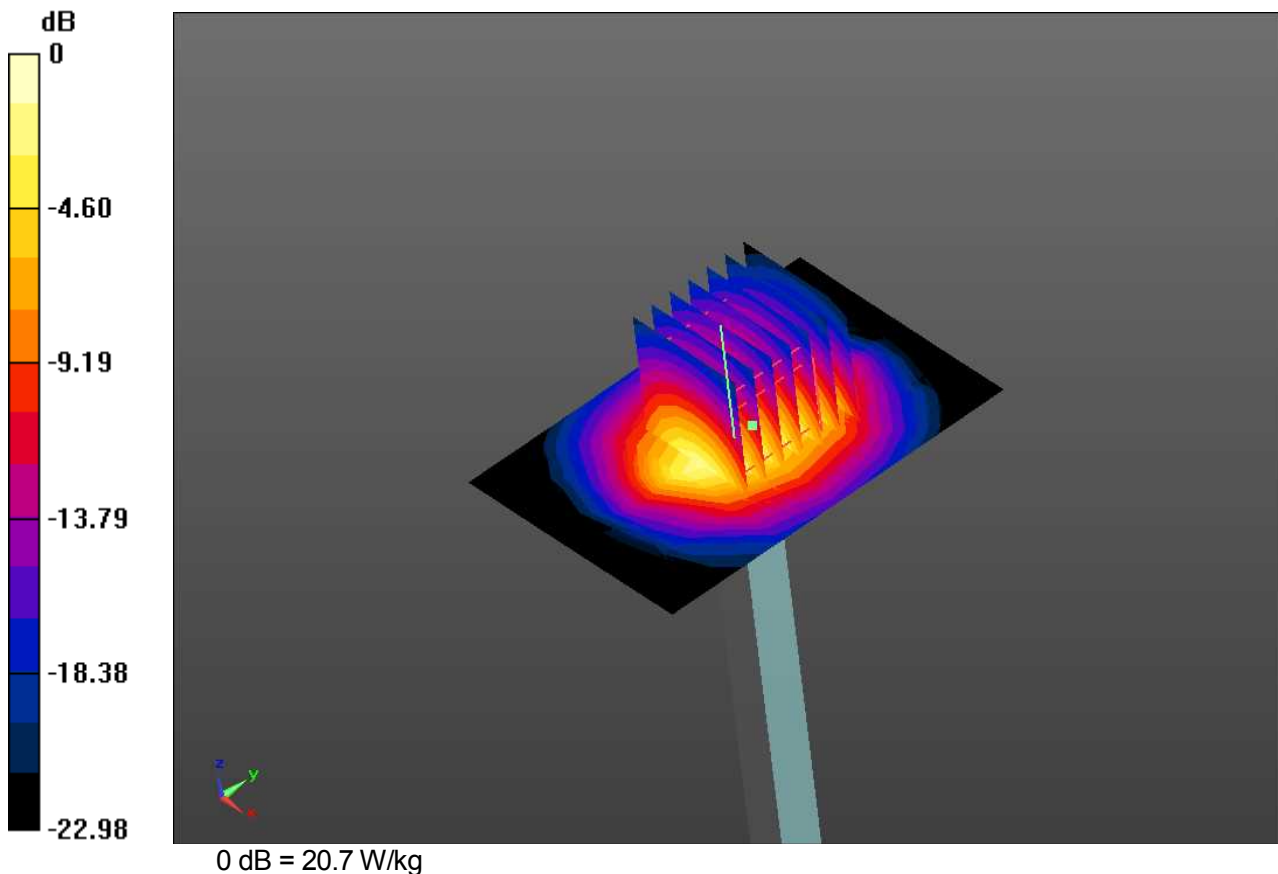

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 925

Communication System: CW; Frequency: 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 52.808$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.33, 7.33, 7.33); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: ELI v5.0 (20deg probe tilt) TP;1230; Type: QDOVA001BB; Serial: TP:1230

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-14; Ambient Temp: 22.5; Tissue Temp: 22.0

2450 MHz System Verification -Body-

Area Scan (5x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 20.9 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 104.2 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

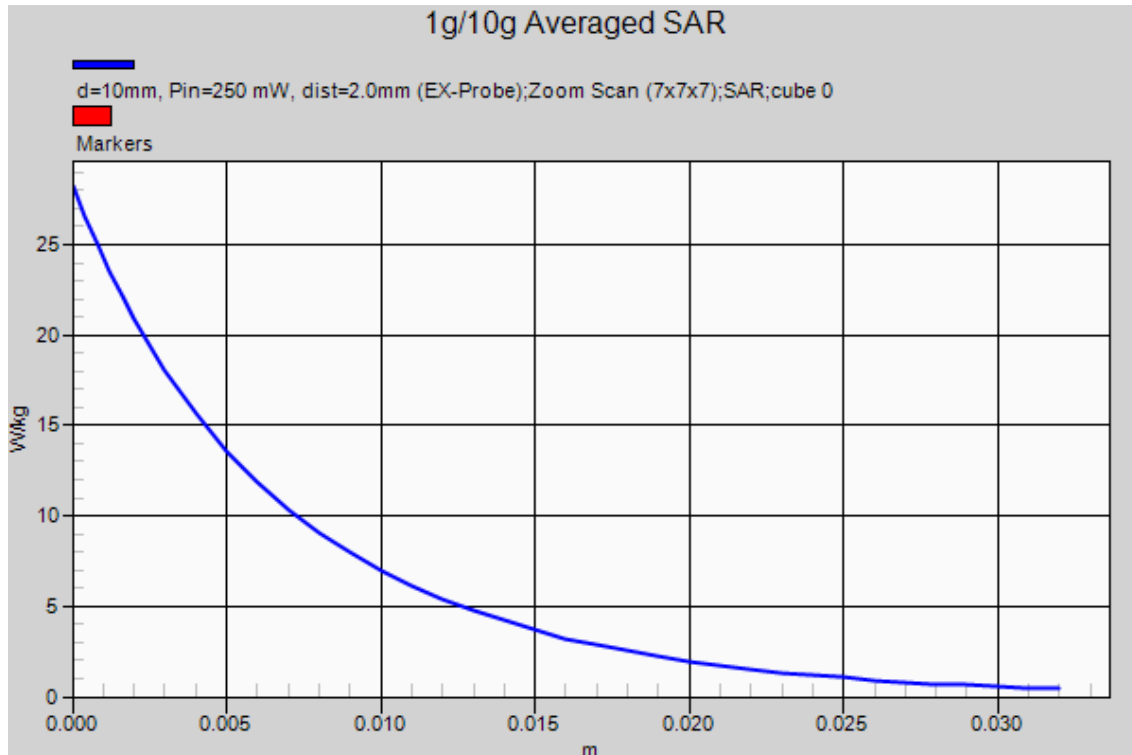

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5200MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 37.092$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.94, 4.94, 4.94); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5200 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 13.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 66.64 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

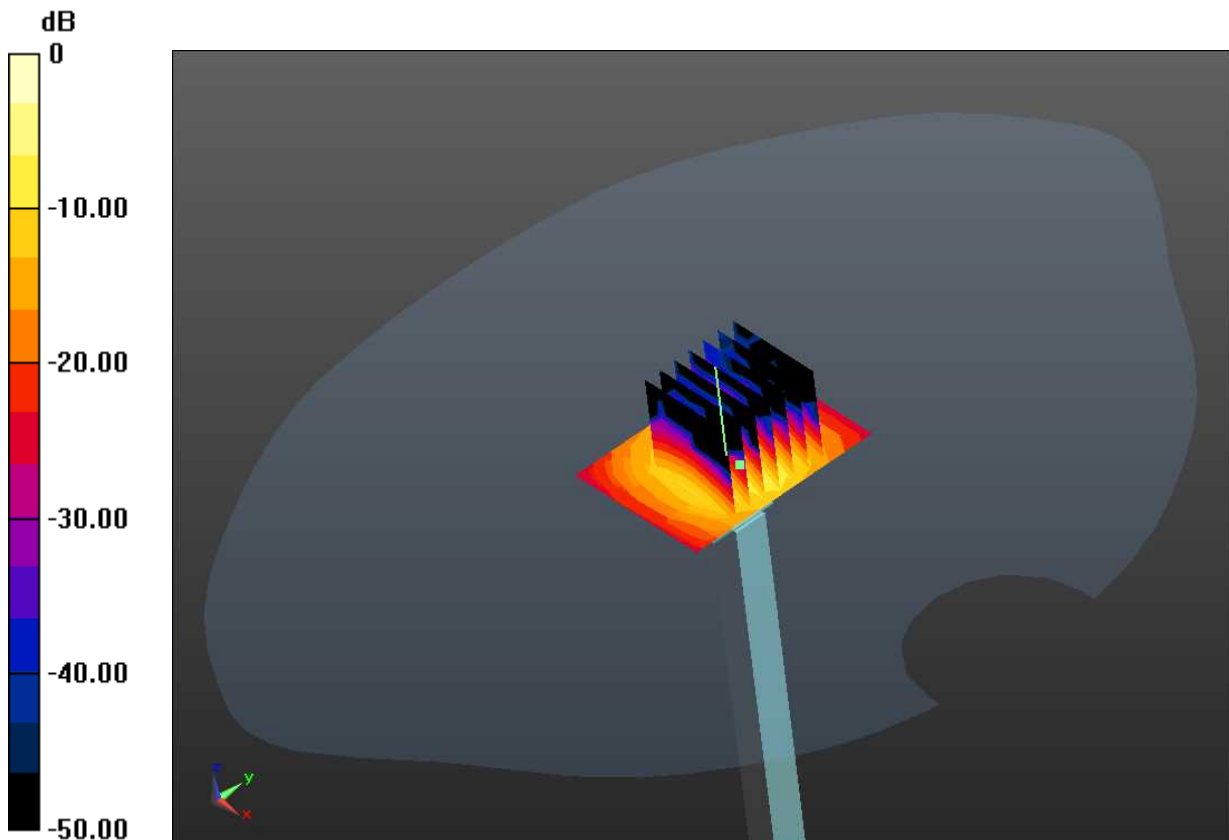

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5200MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 37.092$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.94, 4.94, 4.94); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5200 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 13.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 66.64 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

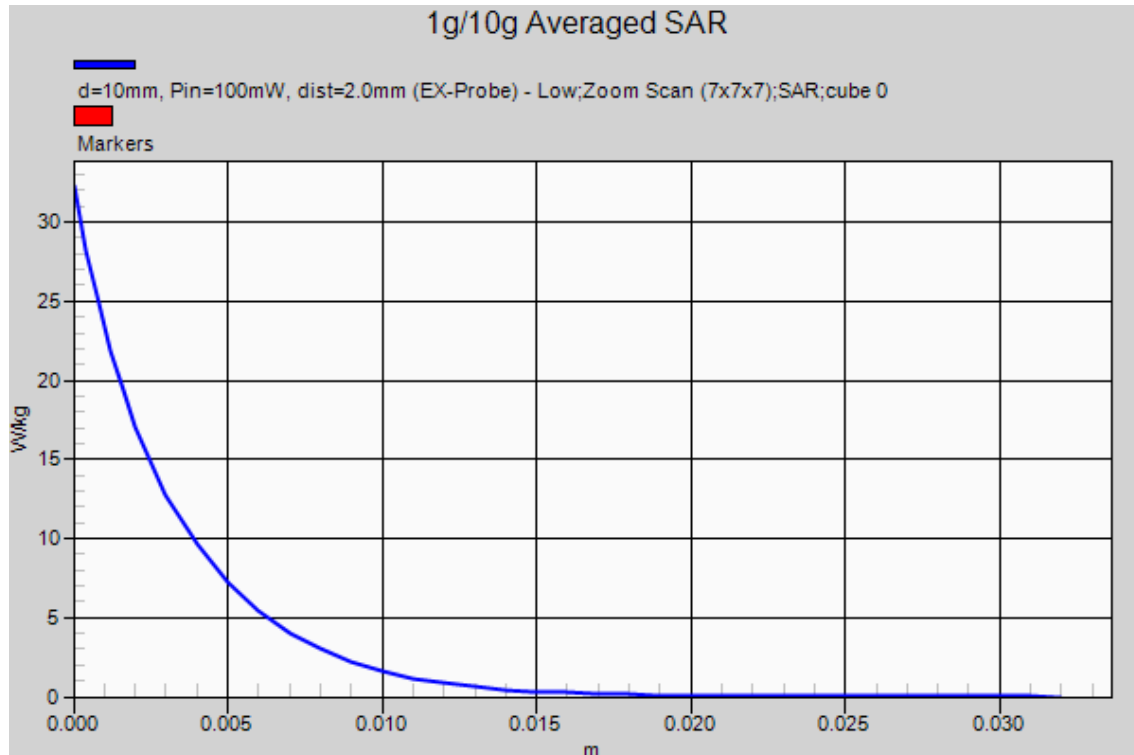

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5500MHz

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.821$ S/m; $\epsilon_r = 36.707$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.81, 4.81, 4.81); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5500 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 15.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 66.32 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 40.7 W/kg

SAR(1 g) = 8.99 W/kg; SAR(10 g) = 2.55 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

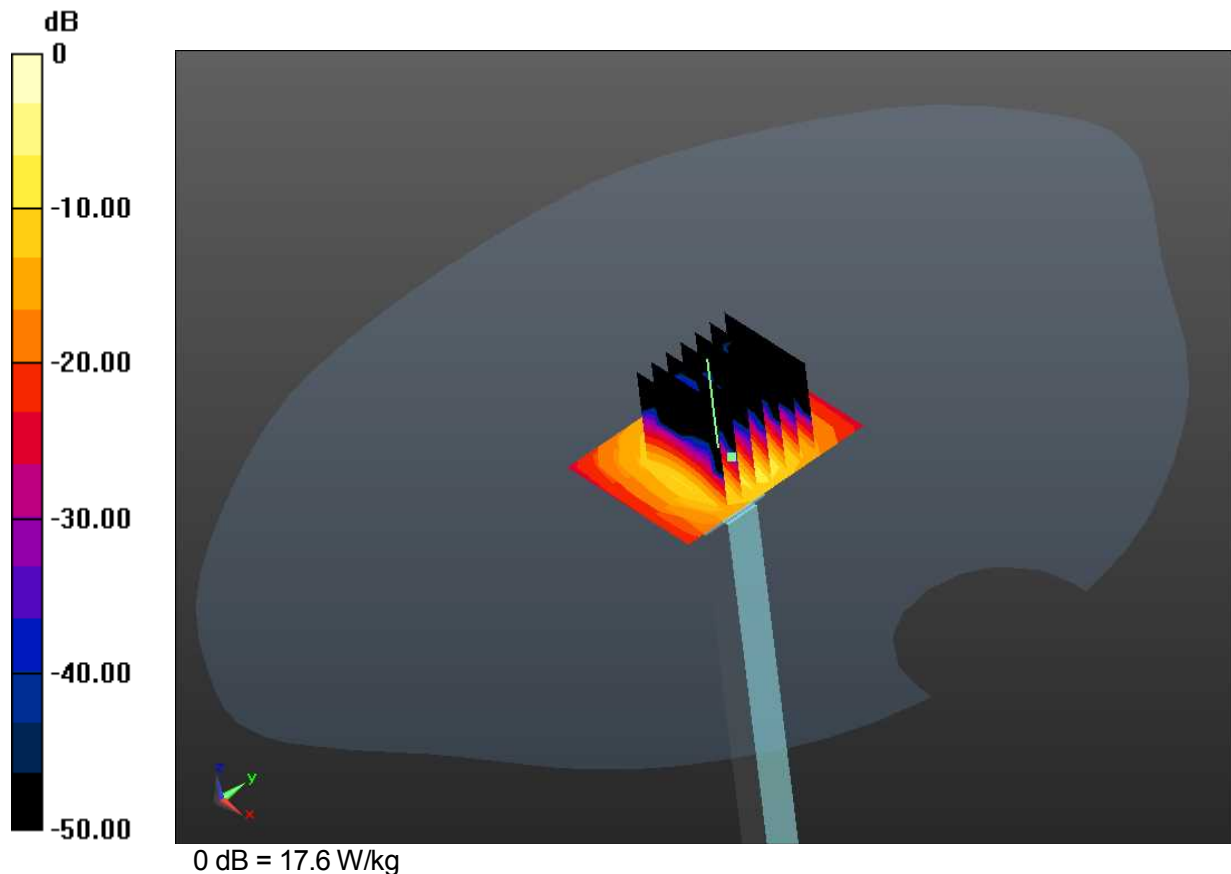

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5500MHz

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.821 \text{ S/m}$; $\epsilon_r = 36.707$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.81, 4.81, 4.81); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5500 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 15.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 66.32 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 40.7 W/kg

SAR(1 g) = 8.99 W/kg; SAR(10 g) = 2.55 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

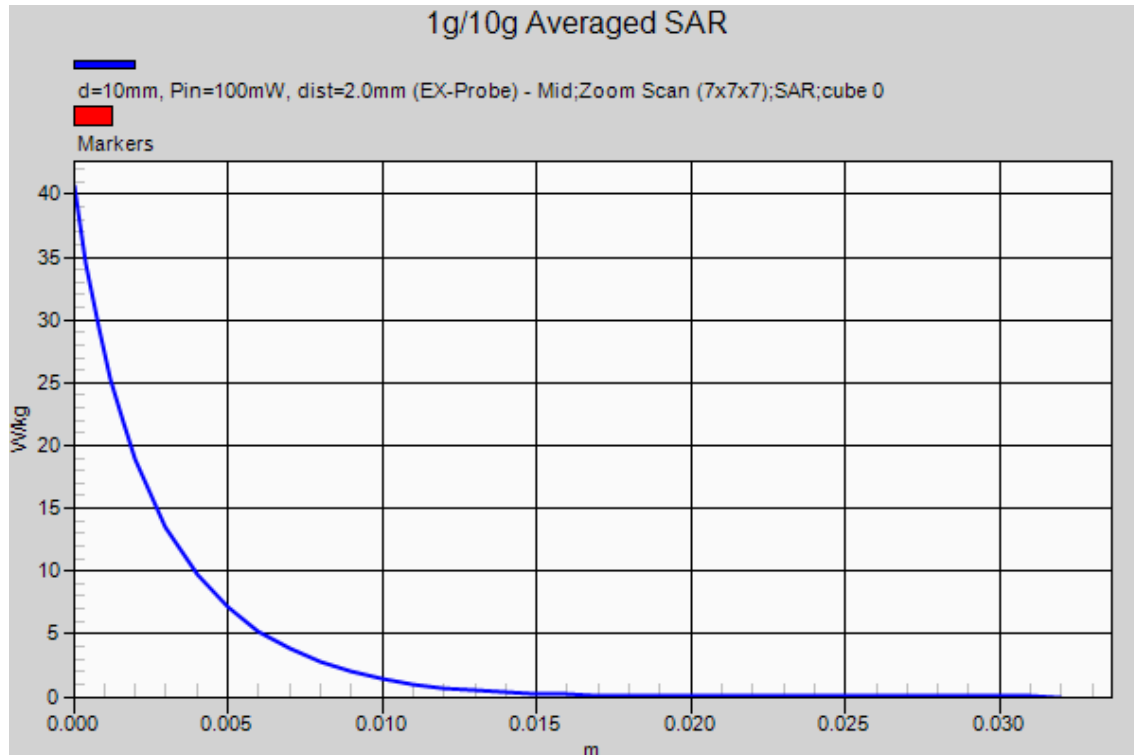

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5800MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.164 \text{ S/m}$; $\epsilon_r = 36.406$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.68, 4.68, 4.68); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5800 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 38.1 W/kg

SAR(1 g) = 7.80 W/kg; SAR(10 g) = 2.20 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

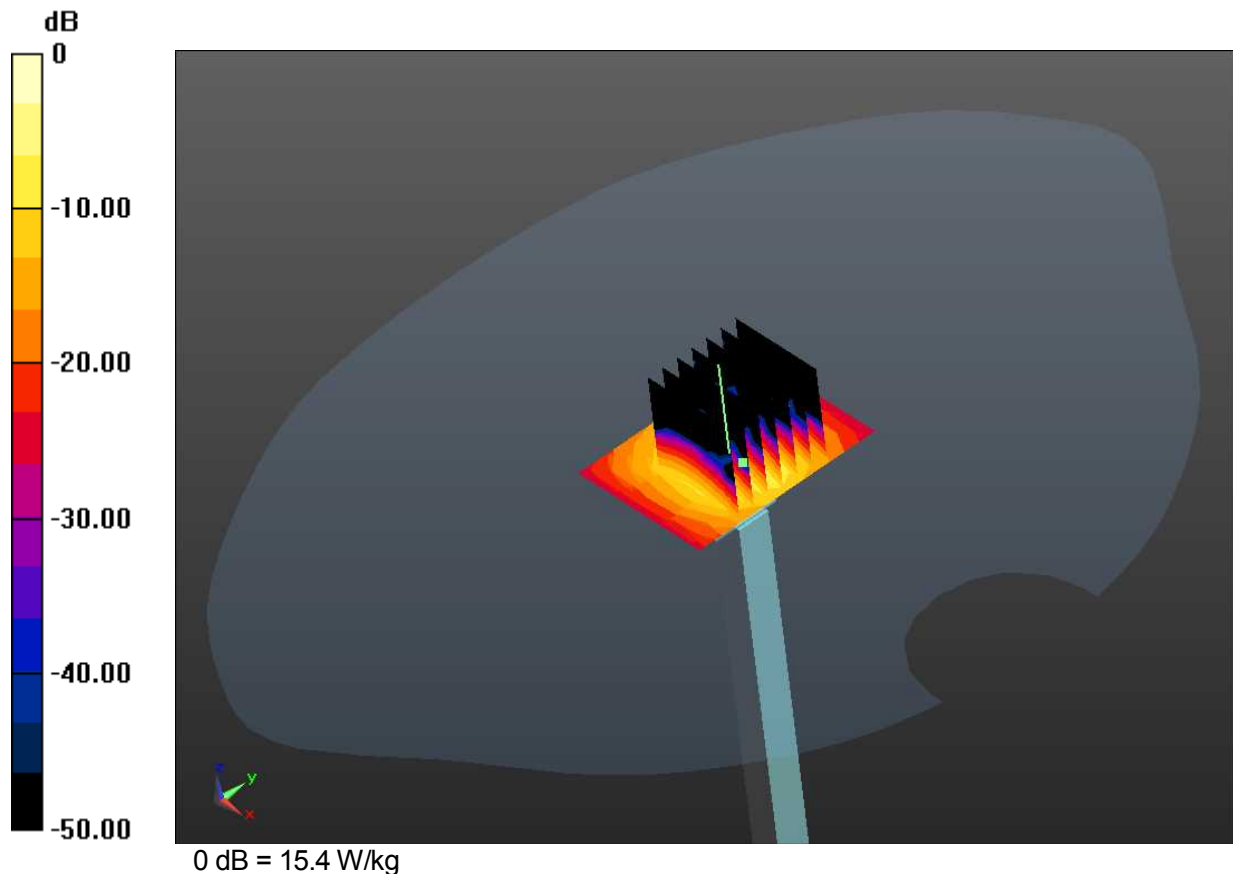

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5800MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.164 \text{ S/m}$; $\epsilon_r = 36.406$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.68, 4.68, 4.68); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-12; Ambient Temp: 22.8; Tissue Temp: 22.1

5800 MHz System Verification -Head-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 38.1 W/kg

SAR(1 g) = 7.80 W/kg; SAR(10 g) = 2.20 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

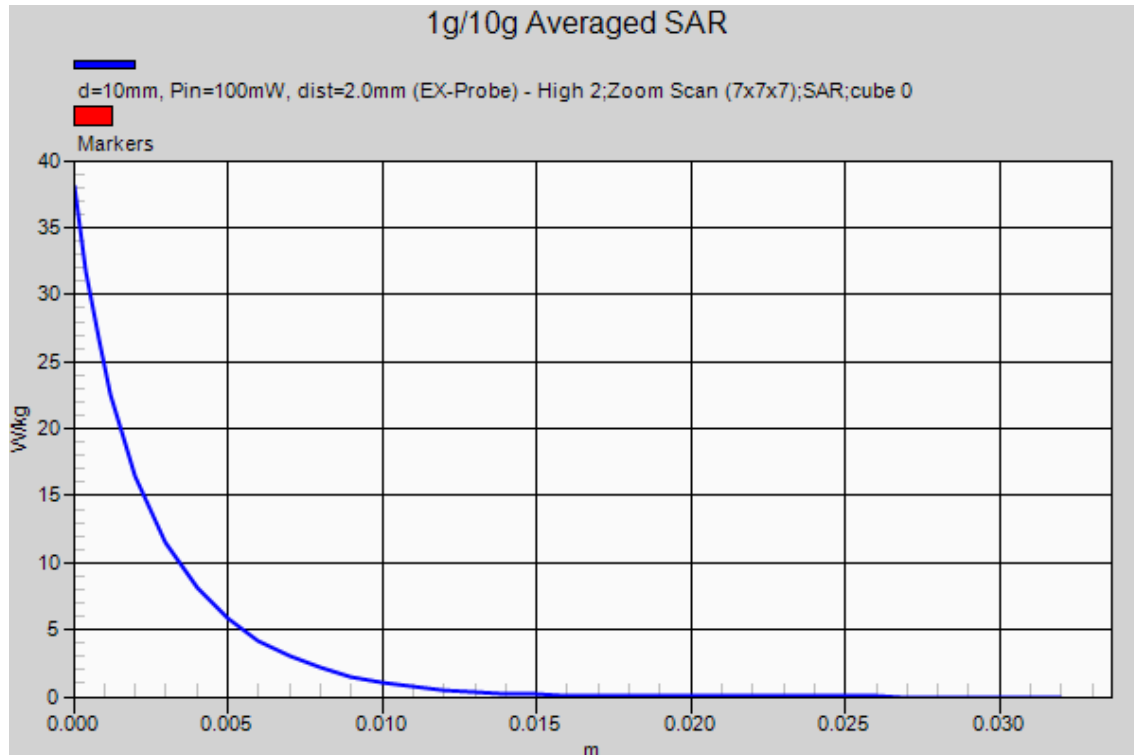

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5200MHz

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.498 \text{ S/m}$; $\epsilon_r = 47.075$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.48, 4.48, 4.48); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5200 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.4 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.84 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

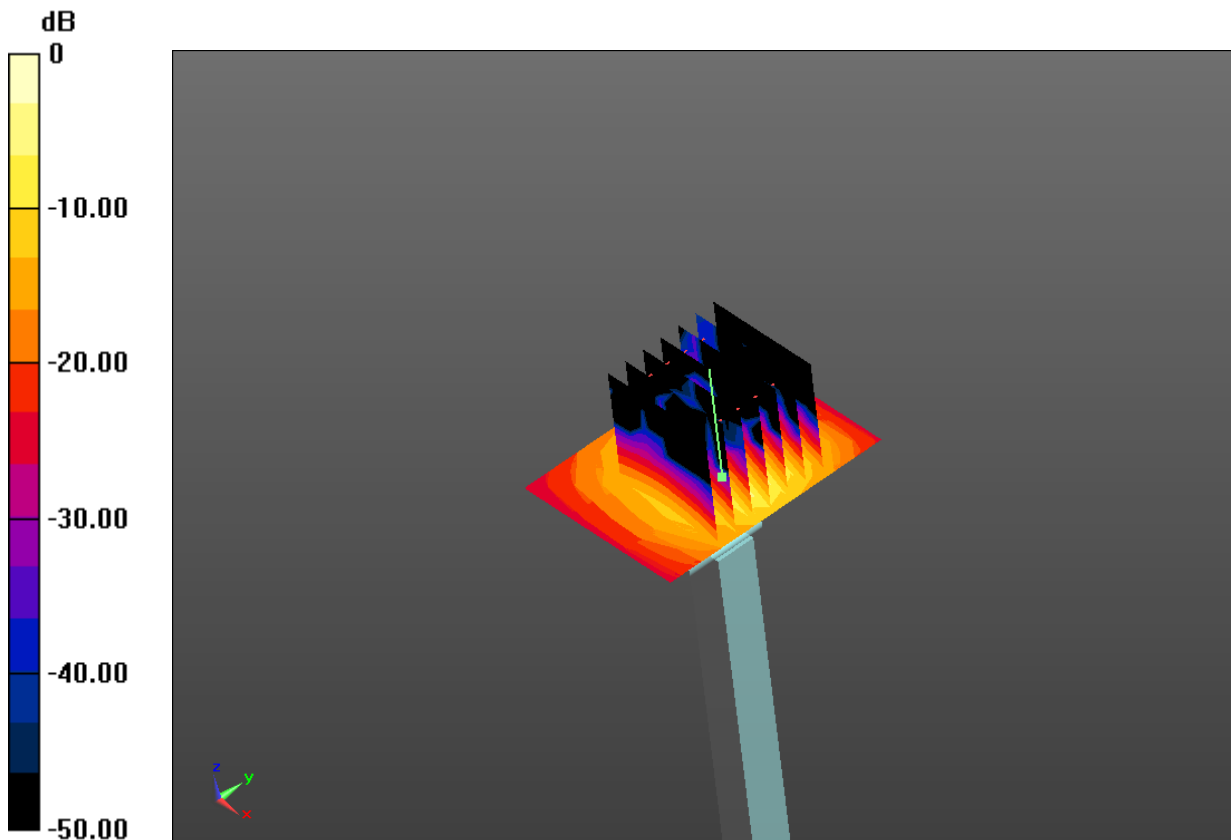

0 dB = 15.4 W/kg

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5200MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.498$ S/m; $\epsilon_r = 47.075$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.48, 4.48, 4.48); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5200 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 13.4 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 58.84 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

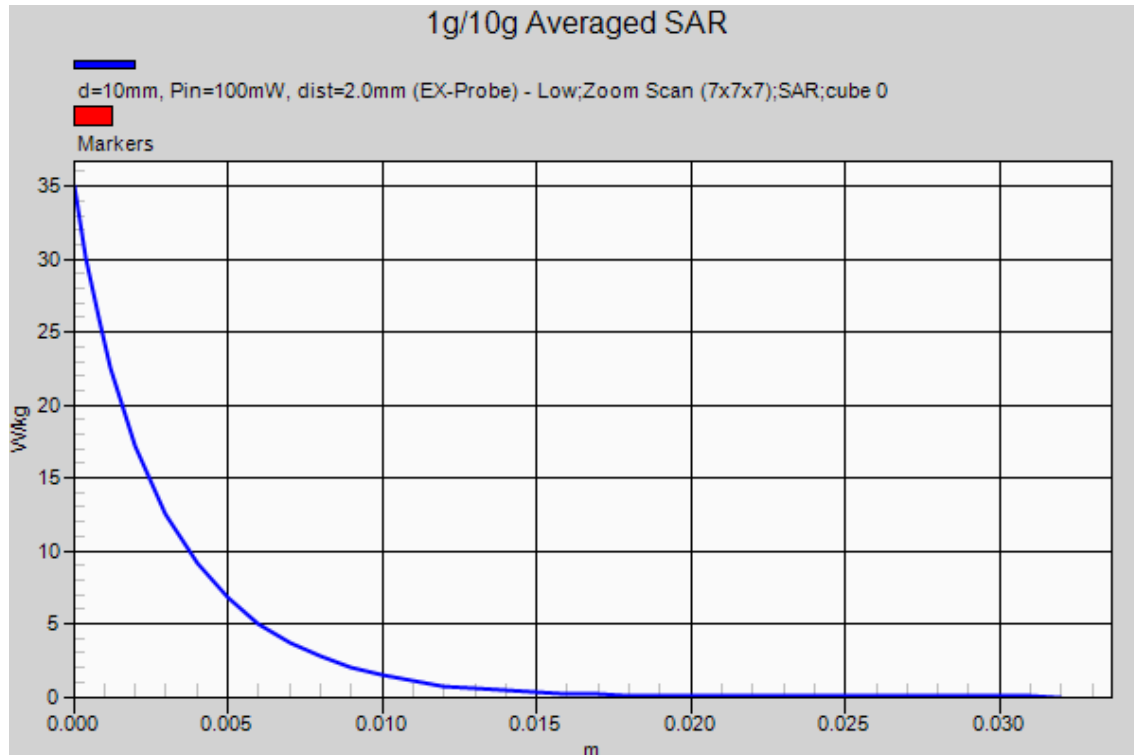

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5500MHz

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.867$ S/m; $\epsilon_r = 46.539$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4, 4, 4); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5500 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 14.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 57.03 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

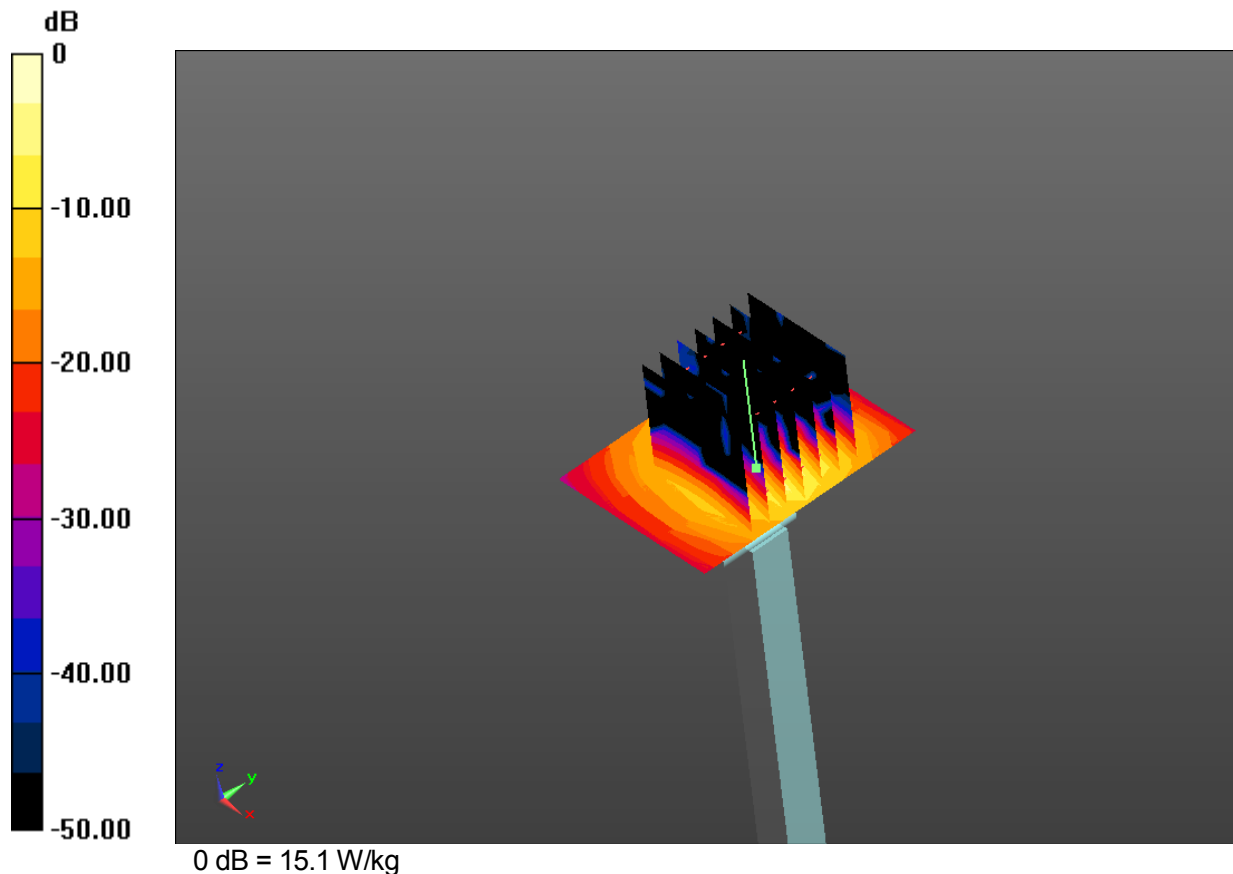

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5500MHz

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.867$ S/m; $\epsilon_r = 46.539$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4, 4, 4); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5500 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 14.1 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 57.03 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

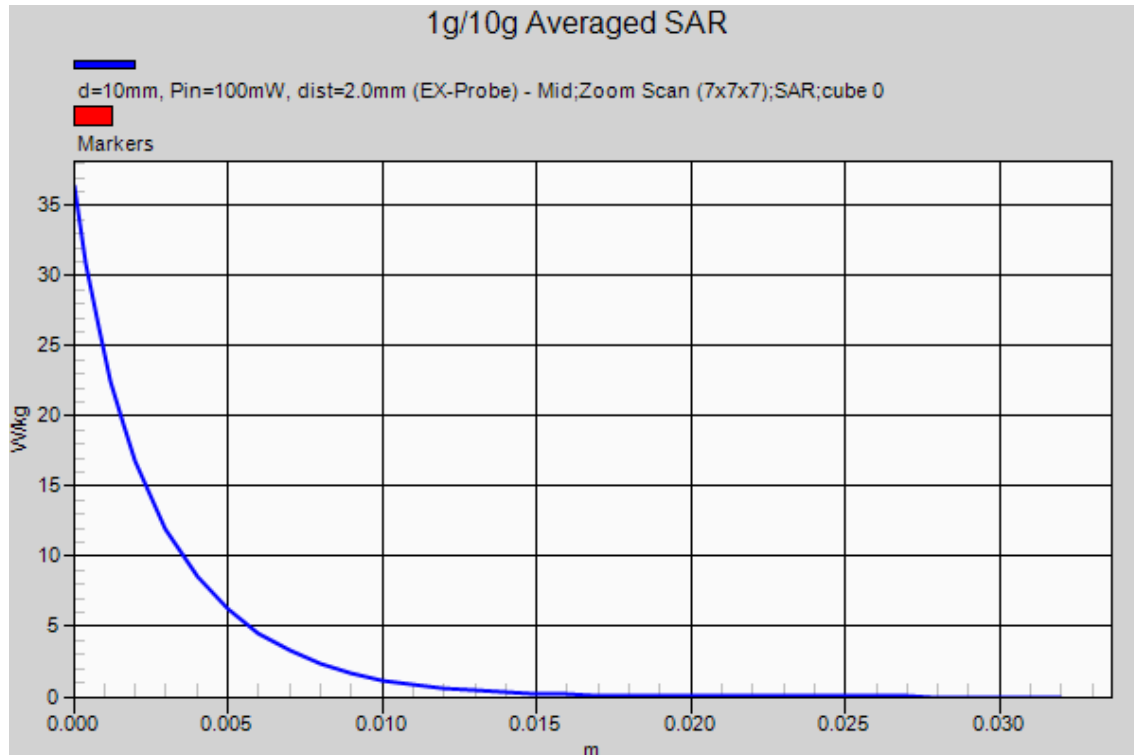

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5800MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.295 \text{ S/m}$; $\epsilon_r = 45.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.07, 4.07, 4.07); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5800 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.2 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.28 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

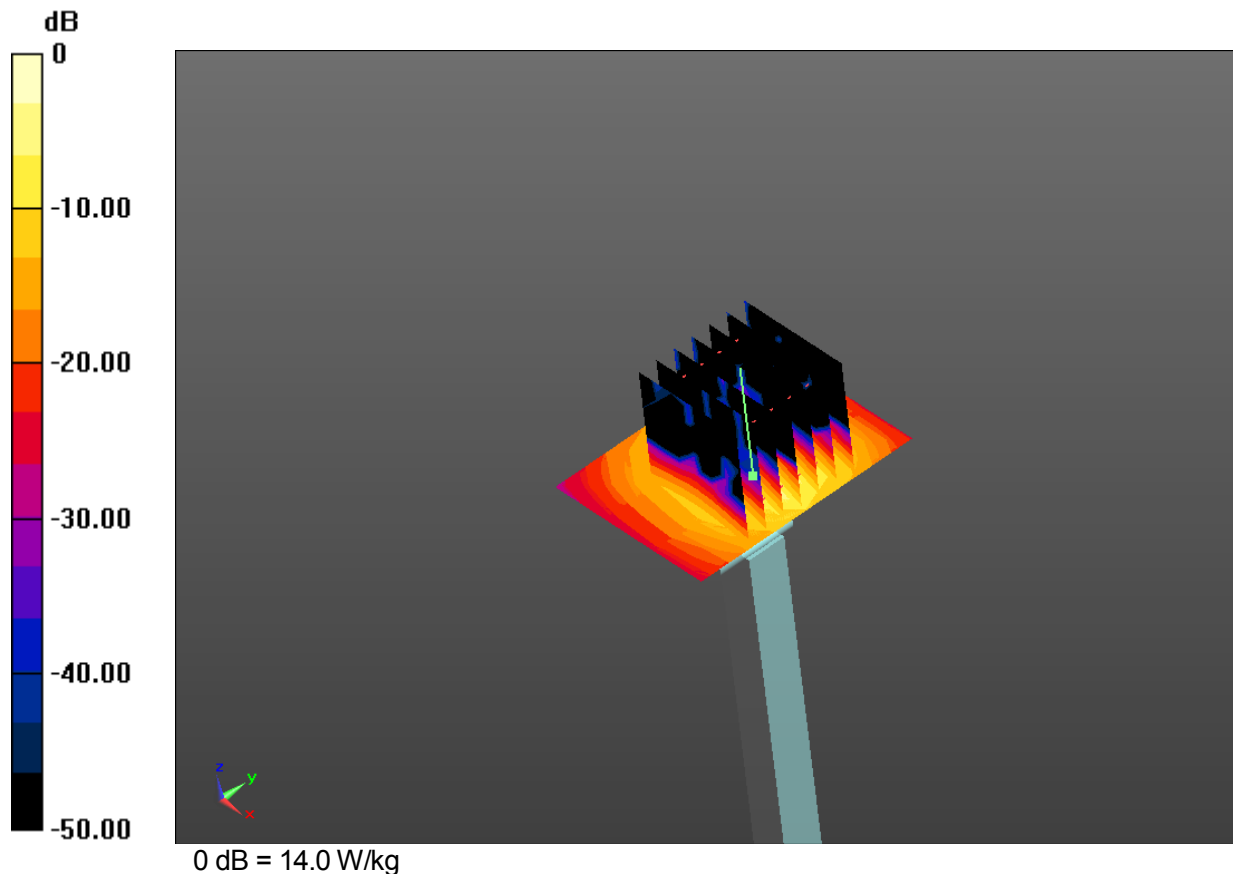

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: 1166

Communication System: CW; Frequency: 5800MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.295 \text{ S/m}$; $\epsilon_r = 45.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(4.07, 4.07, 4.07); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

MEASUREMENT SW: DASY52, VERSION 52.8 (8);

Test date: 2014-11-13; Ambient Temp: 23.2; Tissue Temp: 21.0

5800 MHz System Verification -Body-

Area Scan (4x5x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.2 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.28 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

