



**BUREAU
VERITAS**

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Test Report

Report No	EO0320-1
Client	Airvana
Address	19 Alpha Road Chelmsford, MA 01824
Phone	978-250-2622
Item tested FCC ID	Femto Cell 750722 and Femto Cell 750723 QHYHUBBUBC4503-RT
FRN	0021466594
Equipment Type Equipment Code	PCS Licensed Transmitter PCB
FCC Rule Parts	47 CFR 22 Subpart H 47 CFR 24 Subpart E 47 CFR 90 Subpart S
Test Dates	February 18, 19, 20, 21, 24, 25, and 26, 2014
Results	As detailed within this report
Prepared by	 Arik Zwirner – EMC Engineer
Authorized by	 Christopher Reynolds– EMC Supervisor
Issue Date	3/17/14

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

CONTENTS 2

SUMMARY 4

TEST METHODOLOGY..... 5

PRODUCT TESTED - CONFIGURATION DOCUMENTATION 6

Model 750722 6

Model 750723 7

STATEMENT OF CONFORMITY 8

MODEL 750722 TEST DATA AND RESULTS..... 9

 TESTS SPECIFIC TO PART 22 9

Bandwidth 9

ERP 12

Band Edge Measurements 13

Conducted Spurious Emissions at Antenna Port 16

 TESTS SPECIFIC TO PART 24 23

Bandwidth 23

EIRP 33

Band Edge Measurements 34

Conducted Spurious Emissions at Antenna Port 41

 TESTS SPECIFIC TO PART 90 60

Occupied Bandwidth 60

ERP 63

Emission Mask 64

Conducted Spurious Emissions at Antenna Port 67

 TESTS FOR PARTS 22, 24, & 90: SPURIOUS EMISSIONS AND FREQUENCY STABILITY 73

Radiated Spurious Emissions Measurements 73

Frequency Stability 75

 CONDUCTED SPURIOUS EMISSIONS ON AC MAINS 76

MODEL 750723 TEST DATA AND RESULTS..... 77

 TESTS SPECIFIC TO PART 22 77

Bandwidth 77

ERP 80

Band Edge Measurements 81

Conducted Spurious Emissions at Antenna Port 84

 TESTS SPECIFIC TO PART 24 91

Bandwidth 91

EIRP 101

Band Edge Measurements 102

Conducted Spurious Emissions at Antenna Port 109

 TESTS SPECIFIC TO PART 90 128

Occupied Bandwidth 128

ERP 131

Emission Mask 132



<i>Conducted Spurious Emissions at Antenna Port</i>	135
TESTS FOR PARTS 22, 24, & 90: SPURIOUS EMISSIONS AND FREQUENCY STABILITY	141
<i>Radiated Spurious Emissions Measurements</i>	141
<i>Frequency Stability</i>	143
CONDUCTED SPURIOUS EMISSIONS ON AC MAINS	144
TEST EQUIPMENT	145
CONDITIONS OF TESTING	147



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 22 Subpart H, 47 CFR 24 Subpart E, and 47 CFR 90 Subpart S.

There are two models of this transmitter, the Femto Cell 750722 and Femto Cell 750723, which are variants of a single product. They are transceivers that operate in the ranges 862-869MHz, 869-894MHz, and 1930-1990MHz.

Both models are the Revision 1.07 designs of their respective model numbers and are intended to be labeled under a single FCC ID. Schematics and Bills of Materials for both are provided with the exhibits that accompany this report.

We found that the products met the above requirements without modification. The test samples were received in good condition. Tests were performed on February 18, 19, 20, 21, 24, 25, and 26, 2014.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	March 4, 2013



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Test Methodology

The Femto Cell 750722 and Femto Cell 750723 each have three radios, identified as follows:

- Beacon Band Class 1 (BC1), Beacon Band Class 0 (BC0), and Beacon Band Class 10 (BC10), which operate on one radio
- One-X Band Class 1 (BC1)
- EVDO Band Class 1 (BC1)

All three of the radios operate in the 1930-1990MHz band and were tested for FCC Part 24. The Beacon radio also operates in either Band Class 0 mode or Band Class 10 mode, though only in one band at any time. Band Class 0 operates in the 869-894MHz band and was tested for FCC Part 22. Band Class 10 operates in the 862-869MHz band and was tested for FCC Part 90.

For Part 22, the lowest and highest operating frequencies are 870.03MHz and 889.2MHz, respectively. For Part 24, the lowest and highest operating frequencies are 1931.25MHz and 1988.75MHz, respectively. For Part 90, the lowest and highest operating frequencies are 862.9MHz and 867.9MHz, respectively

Per Airvana, the device under test prevents the operation of multiple transmit channels operating on the same frequency at the same time. Thus it is not allowed for the Beacon BC1, One-X, and/or EVDO to simultaneously operate at the same frequency

Modulation is QAM -16 for each of the different types of channels.

The substitution method is used for ERP and EIRP measurements. The method is performed as follows. When performing ERP or EIRP measurements, the fundamental emission of the EUT is measured in terms of field strength. The EUT is then substituted with a calibrated antenna, cable, and signal generator. The initially measured field strength is reproduced and matched by the substituting equipment. The power of the substitution source (the signal generator) is recorded, and this value is then corrected for the cable loss and the antenna gain (dBi) to determine the ERP or EIRP of the EUT.

Radiated emission testing was performed according to the procedures specified in ANSI C63.4 (2003) and TIA-603-C. Radiated Emissions were maximized by rotating the device around its upright axes as well as varying the test antenna's height and polarity. Radiated spurious emissions tests were done in the frequency range of 30MHz-20GHz.

Conducted measurements at the antenna port were performed. For antenna port conducted spurious emissions testing 30MHz-20GHz range was checked.

AC mains conducted emissions tests were performed using 50Ω/5μH LISN's.

During AC mains conducted emissions and radiated spurious measurements, the product was removed from the plastic enclosure which should have no effects on EMI results. Transmit chain which produced the highest EIRP was used for spurious emission scans. The EUT operating voltage is 120Vac 60Hz.



Product Tested - Configuration Documentation

Model 750722

EUT Configuration											
Work Order: O0319 Company: Airvana Company Address: 19 Alpha Road Chelmsford, MA 01824 Contact: Kevin Craig Person Present: Stuart MacEacchem											
MN						SN					
EUT:		750722				13277003390					
power supply:		MPBS-12020000				Test Sample 1					
EUT Description: Revision 1.07 of 750722 EUT Max Frequency: 1990MHz											
Support Equipment:						MN					
Litepoint iQnav GPS simulator						iQnav					
Dell laptop computer						D610					
EUT Ports:						SN					
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out NEBS Type	Unpopulated Reason	
AC Mains	two-pin	1	1	AC	no	none	n/a	n/a	Out		
DC power	two-wire	1	1	two-wire	no	none	1.5m	1.5m	In		
Ethernet	RJ45	3	3	Cat. 5	no	none	3m	100m	In		
GPS	coax.	1	1	coax.	yes	none	10m	10m	Out		
Software / Operating Mode Description:											
All three transceivers (One-X, EVDO, Beacon BC1/BC0/BC10) are active. The EUT receives a simulated GPS signal from the iQnav.											
Performance Criteria:											
N/A. Emissions and transmitter testing only.											



Model 750723

EUT Configuration																	
Work Order: O0320 Company: Airvana Company Address: 19 Alpha Road Chelmsford, MA 01824 Contact: Kevin Craig Person Present: Stuart MacEacchem																	
MN						SN											
EUT: 750723 power supply: MPBS-12020000						13277003369 Test Sample 1											
EUT Description: Revision 1.07 of 750723 EUT Max Frequency: 1990MHz																	
Support Equipment:						MN						SN					
Litepoint iQnav GPS simulator						iQnav						IQN00962					
Dell laptop computer						D610						not listed					
EUT Ports:																	
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out NEBS Type	Unpopulated Reason							
AC Mains	two-pin	1	1	AC	no	none	n/a	n/a	Out								
DC power	two-wire	1	1	two-wire	no	none	1.5m	1.5m	In								
Ethernet	RJ45	3	3	Cat. 5	no	none	3m	100m	In								
GPS	coax.	1	1	coax.	yes	none	10m	10m	Out								
Software / Operating Mode Description:																	
All three transceivers (One-X, EVDO, Beacon BC1/BC0/BC10) are active. The EUT receives a simulated GPS signal from the iQnav.																	
Performance Criteria:																	
N/A. Emissions and transmitter testing only.																	



Statement of Conformity

The Femto Cell 750722 and Femto Cell 750723 have been found to conform to the following parts of 47 CFR 22, 47 CFR 24, & 47 CFR 90 as detailed below:


Part 2	Part 22, 24, 90	Comments
2.1033(c)(4)		CDMA is the type of RF modulation.
2.1033(c)(6)		RF output power is not adjustable to end users.
2.1049(l)		Occupied bandwidth measured
2.1033(c)(9)		The Femto Cell 750722 and Femto Cell 750723 do not require a tune-up procedure.
2.1055(a)(d)		Frequency stability within 1.5ppm
	Part 22	
	22.913(a)(2)	Meets ERP limit: 7W
	22.359	Band edge
	22.917(a)	Spurious emissions within limit of -13dBm
	Part 24	
2.1033(c)(7)	24.232(c)	Meets power limit: 2W EIRP.
	24.235	Fundamental is within authorized frequency block
	24.238(a)	Meets out of band emissions limits
	Part 90	
2.1051	90.691(a)	Spurious emissions within limit of -13dBm
2.1053	90.691(a)	Spurious emissions within limit of -13dBm
	90.213(a)	Frequency stability within 1.5ppm
	90.635	Meets power limit: 100W ERP



Model 750722 Test Data and Results


Tests Specific to Part 22

Bandwidth

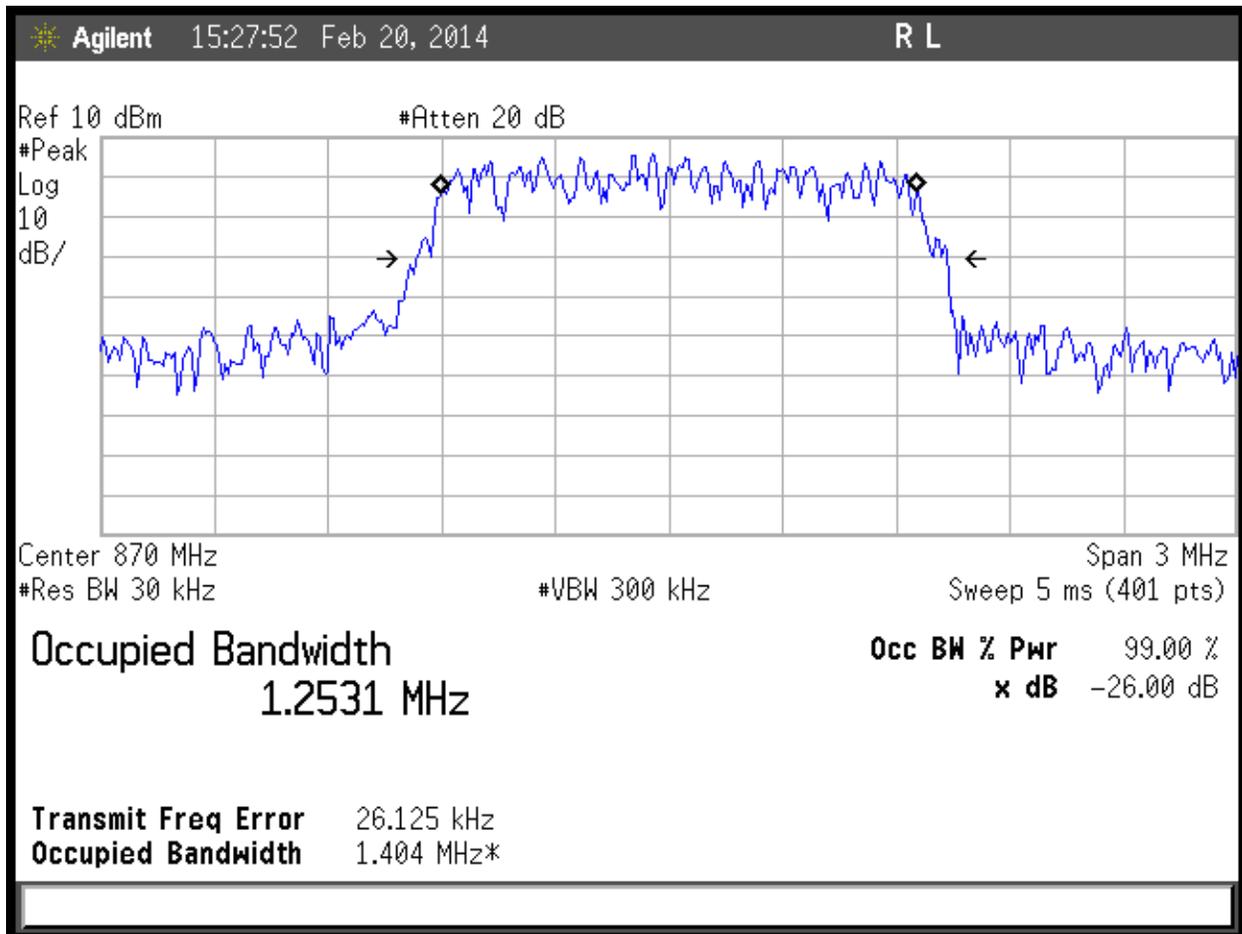

BC0 Low Channel (Ch. 1)



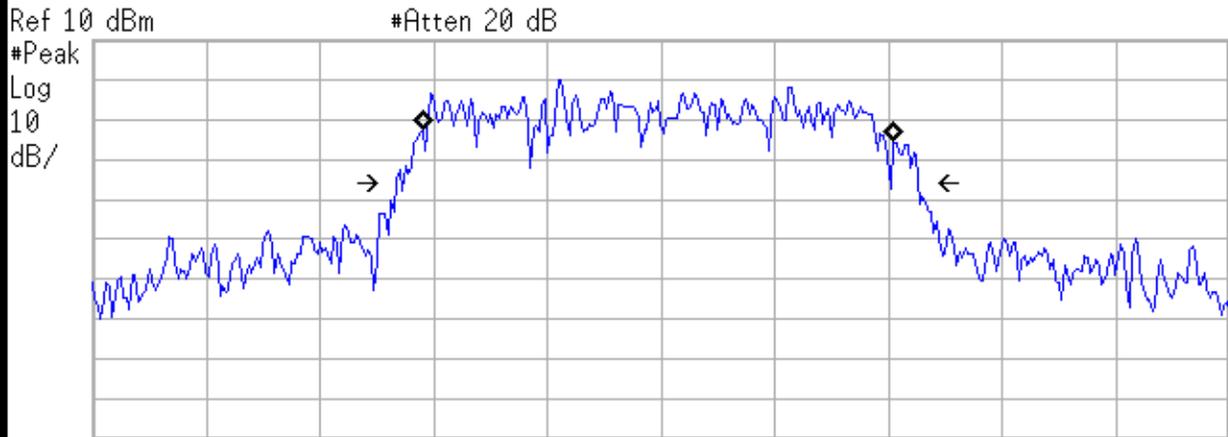

Center 879.6 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2459 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -7.797 kHz
Occupied Bandwidth 1.380 MHz*

BC0 Mid Channel (Ch. 320)



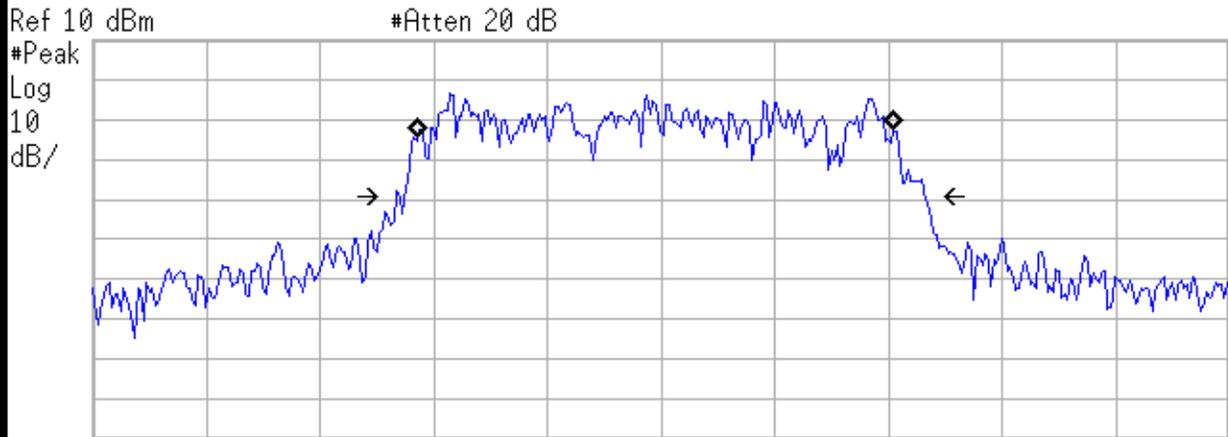

Center 889.2 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2597 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -12.053 kHz
Occupied Bandwidth 1.397 MHz*

BC0 High Channel (Ch. 640)



ERP

ERP Using Substitution Method								
Date: 19-Feb-14			Company: Airvana			Work Order: O0319		
Engineer: Arik Zwirner			EUT Desc: 750722			EUT Operating Voltage/Frequency: 120Vac/60Hz		
Temp: 21°C			Humidity: 19%			Pressure: 1007mbar		
Frequency Range: Part 22 ERP measurements					Measurement Distance: 3 m			
Notes: Transmitter mode: Band Class 0 (BC0) 7W =38.45 dBm								
Antenna Polarization (H / V)	Frequency (MHz)	Signal Generator Power Output (dBm)	FCC 22.913 (a)			Limit (dBm)	Margin (dB)	Result (Pass/Fail)
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted ERP (dBm)			
Channel 1			---	---	---	---	---	---
H	870.03	2.4	0.5	0.0	1.9	38.45	-36.6	Pass
V	870.03	5.3	0.5	0.0	4.8	38.45	-33.7	Pass
Channel 320			---	---	---	---	---	---
H	879.6	1.5	0.5	0.0	1.0	38.45	-37.5	Pass
V	879.6	5.9	0.5	0.0	5.4	38.45	-33.1	Pass
Channel 640			---	---	---	---	---	---
H	889.2	1.6	0.6	0.0	1.0	38.45	-37.5	Pass
V	889.2	2.7	0.6	0.0	2.1	38.45	-36.4	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820 (Sweeper)			Receive Cable: EMIR-03		
Analyzer: Rental #1			Receive Antenna: Green			Transmit Cable: Asset 1785		
			Transmit Antenna: Dipole, Asset 756					



Band Edge Measurements

LIMITS

§ 22.359 Emission limitations.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

MEASUREMENTS / RESULTS

Limit = $10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$


Note: Mask lines are set to -13dBm at 869MHz and 894MHz.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880




page 13 of
148

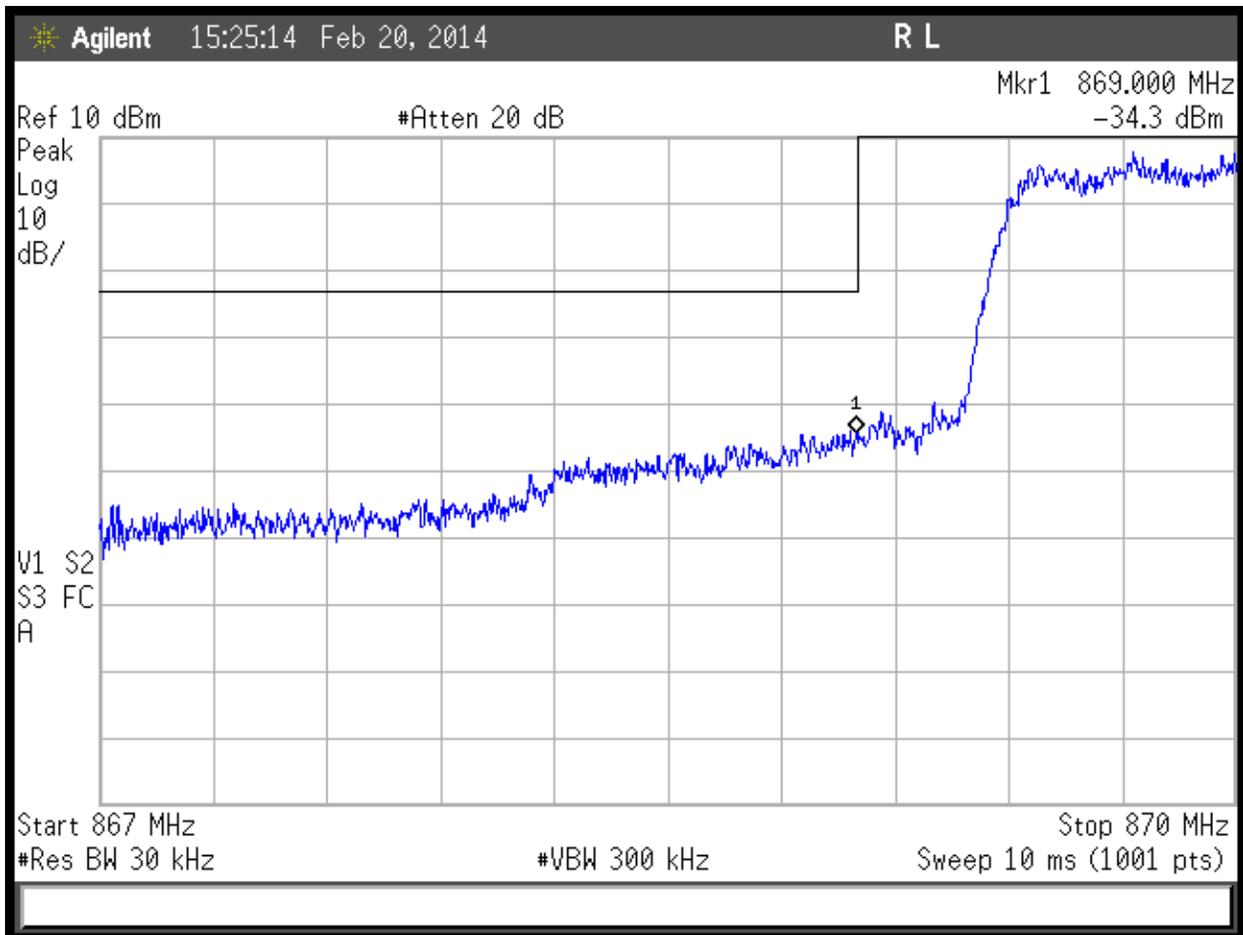

BC0 Low Channel



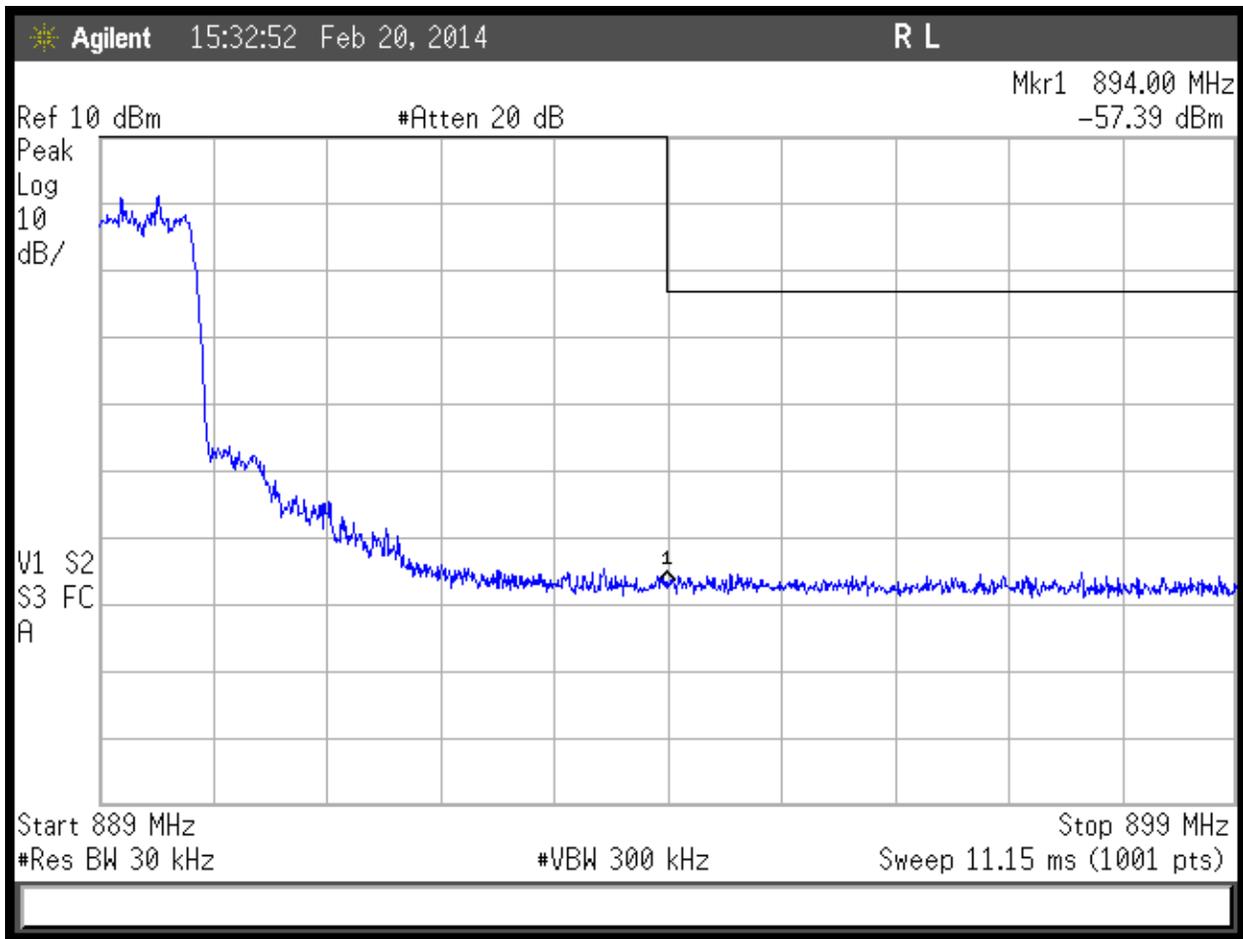

BC0 High Channel



Conducted Spurious Emissions at Antenna Port **LIMITS**

§ 22.359 Emission limitations.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

MEASUREMENTS / RESULTS

Limit = $10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880




page 16 of
148

PLOTS

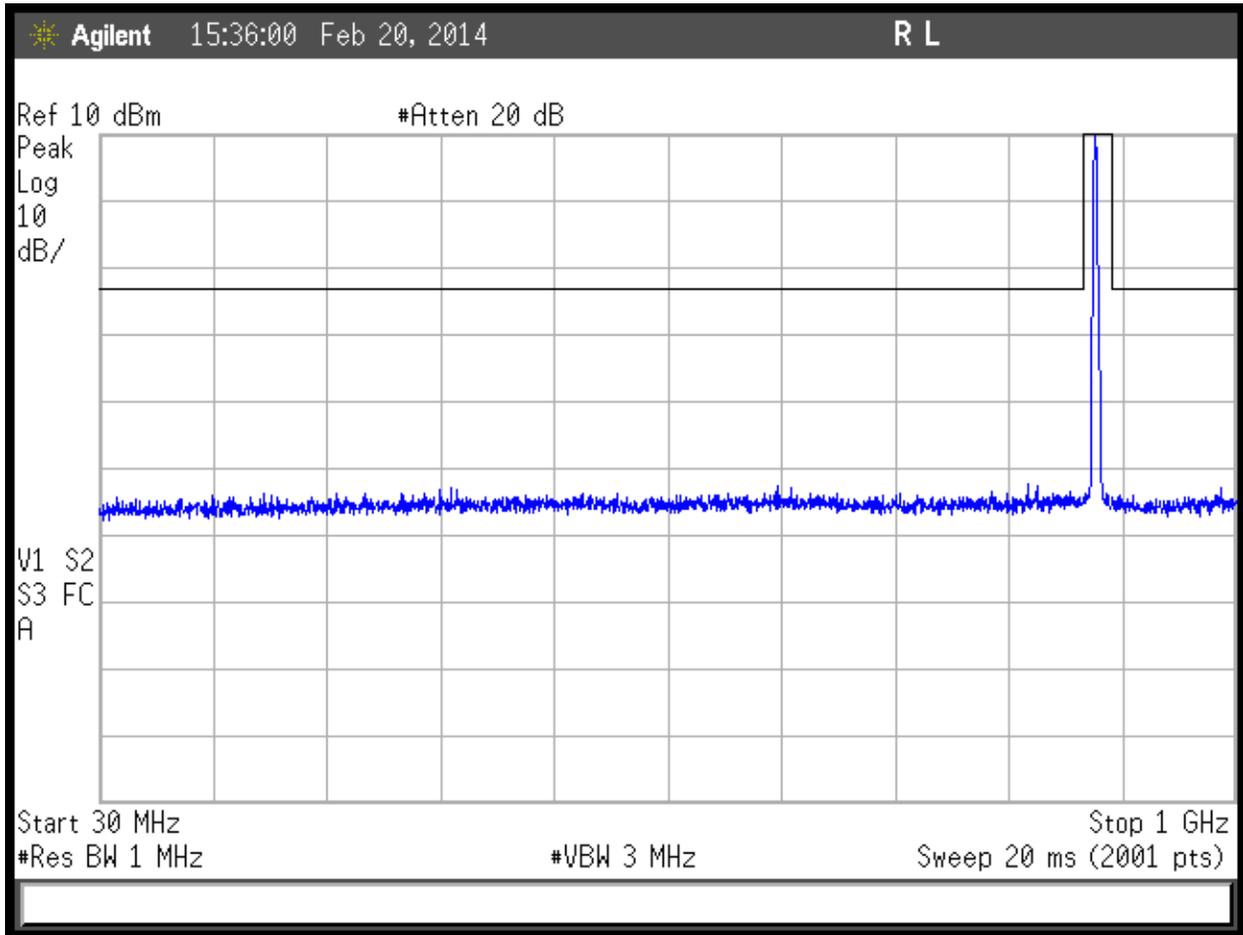

BC0, 30MHz to 1GHz



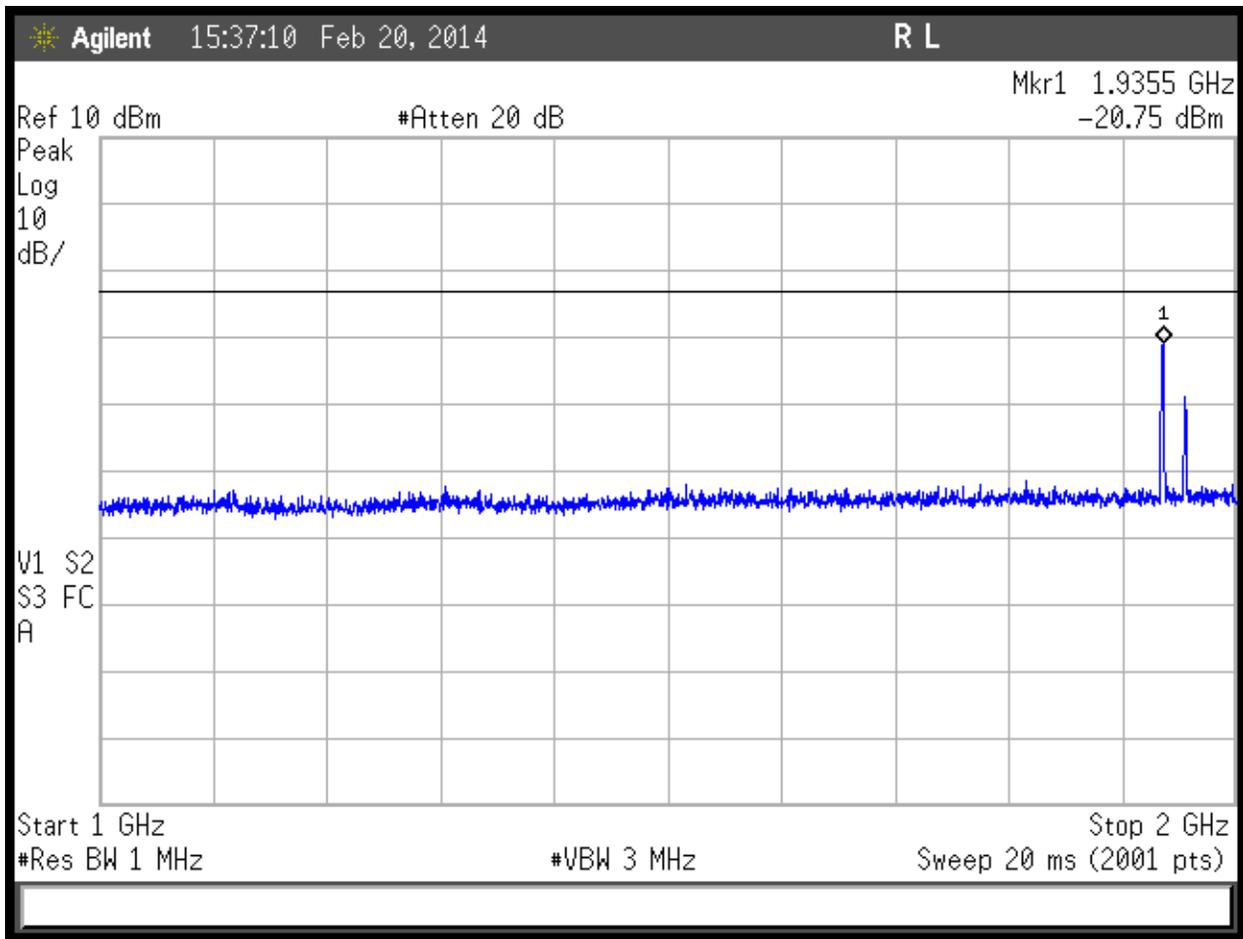


BC0, 1-2GHz




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



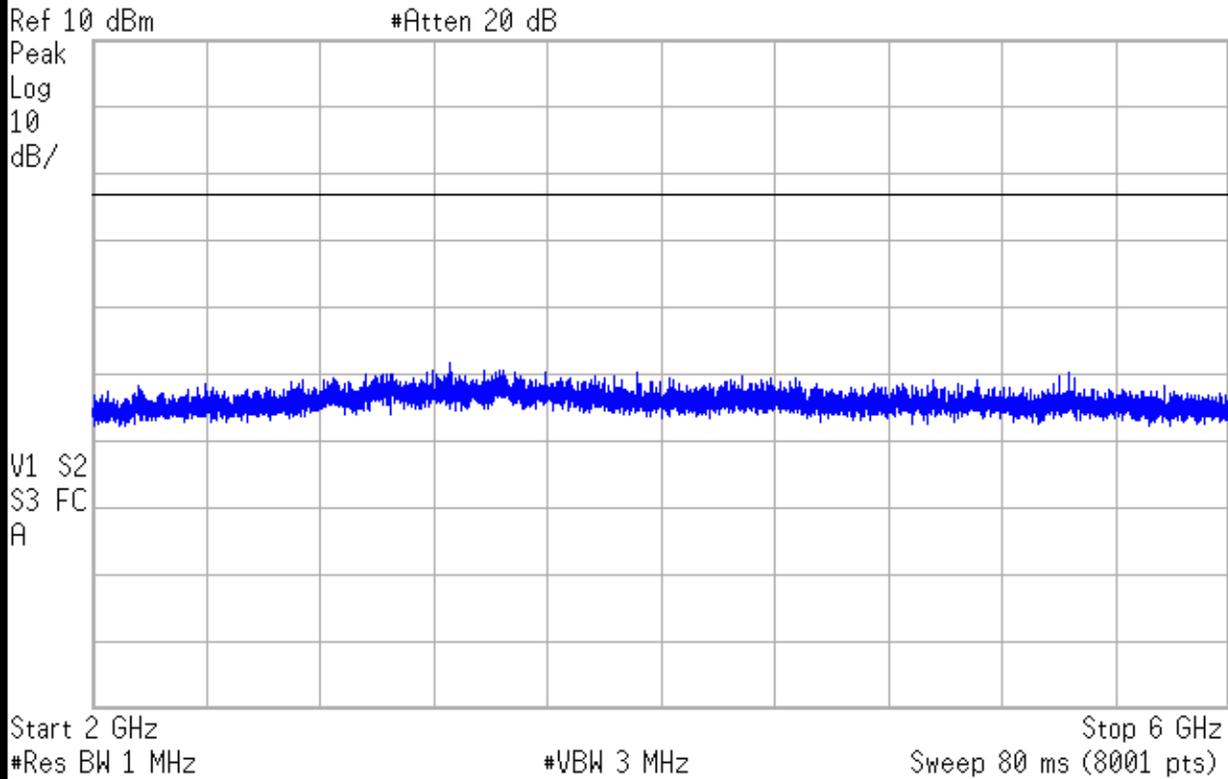


BC0, 2-6GHz



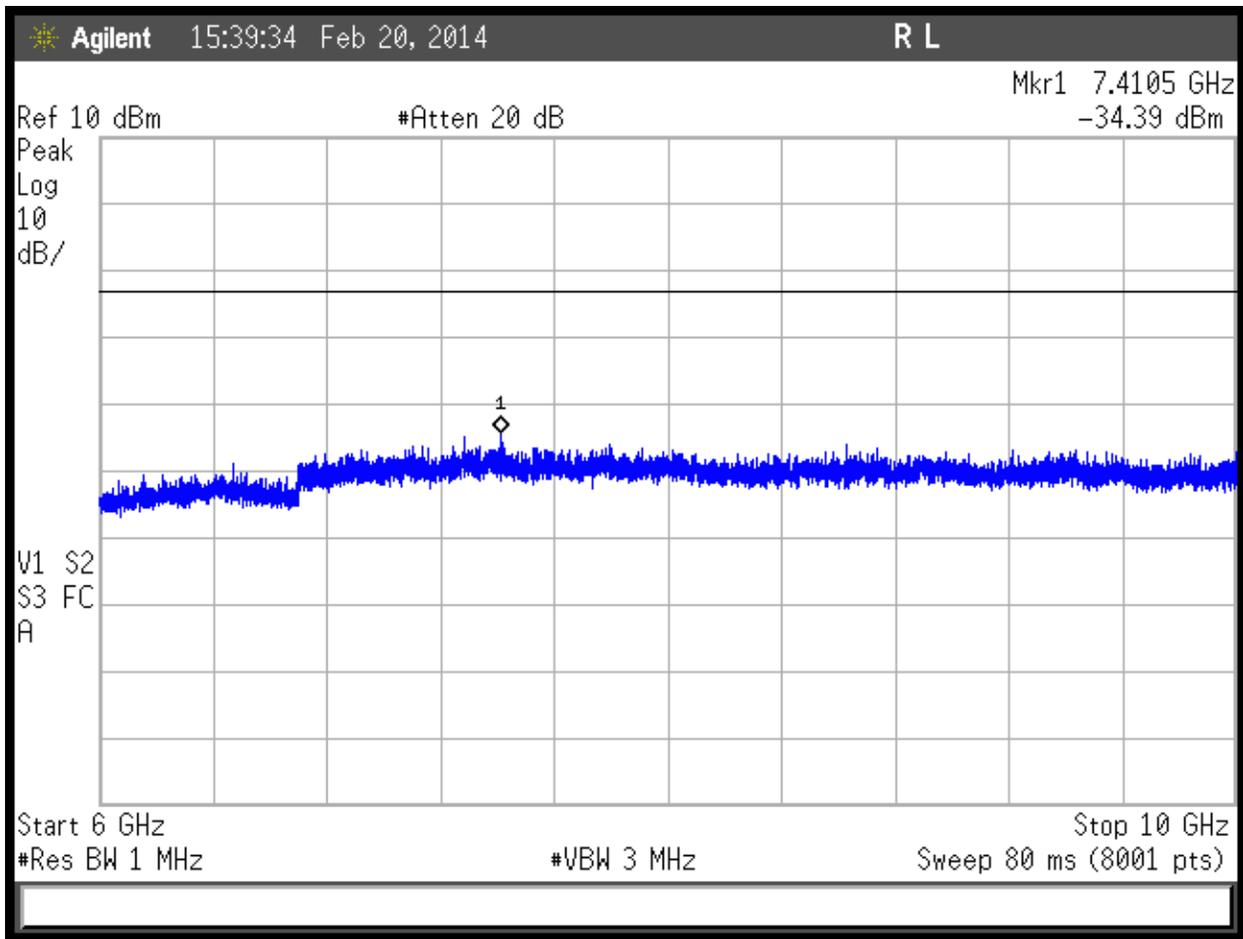

BC0, 6-10GHz



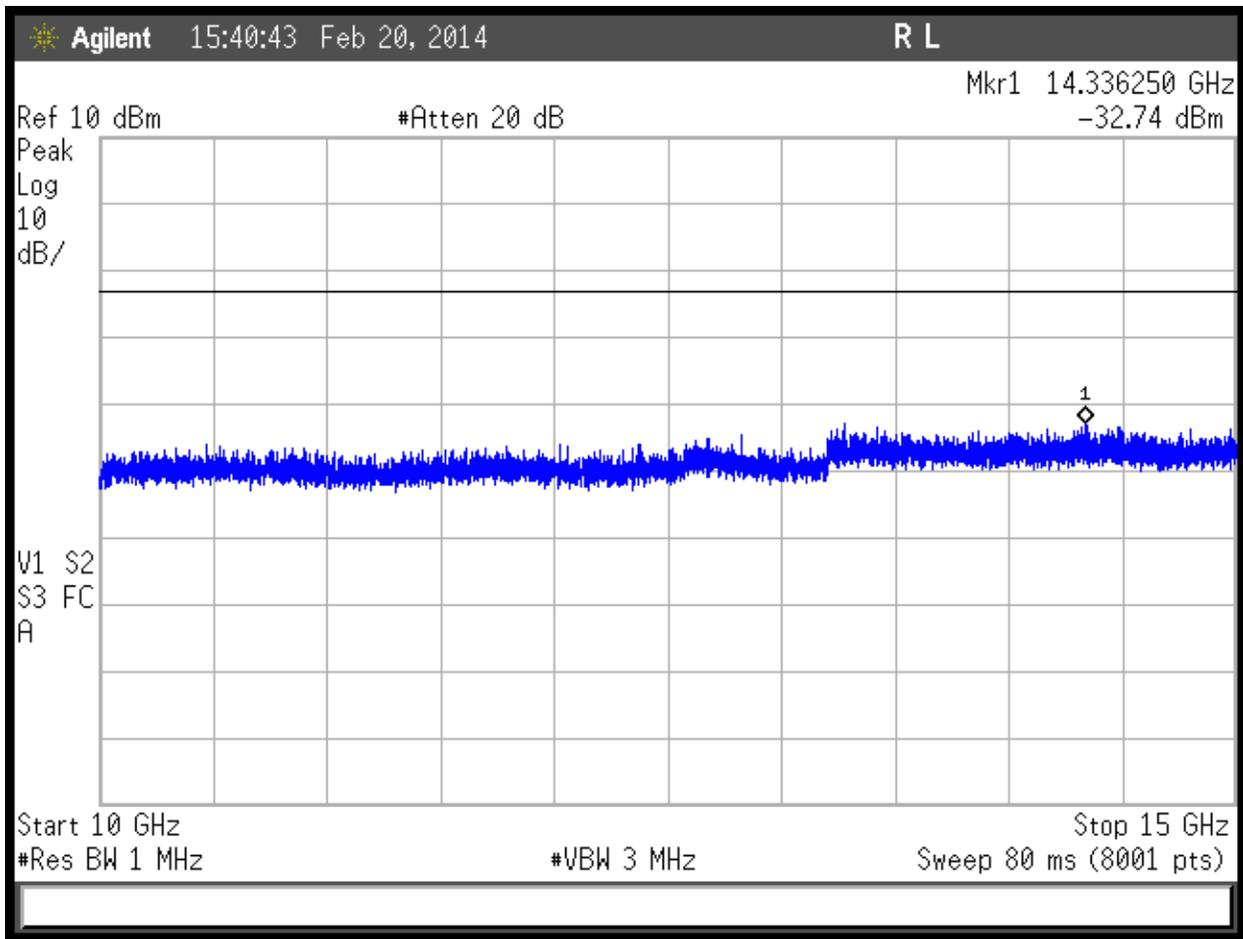


BC0, 10-15GHz



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



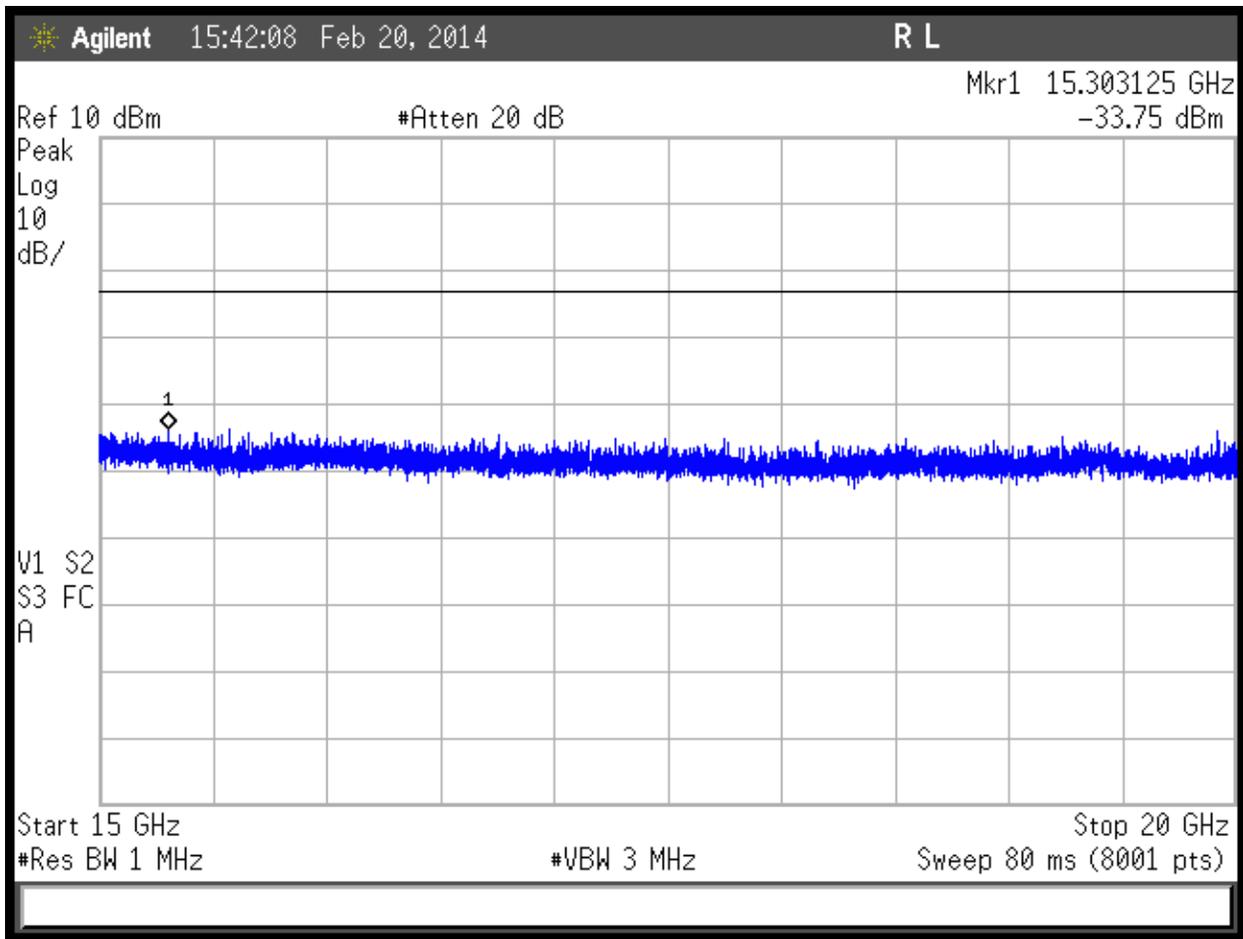

BC0, 15-20GHz



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



Tests Specific to Part 24

Bandwidth


LIMIT

“The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.” [24.238(b)]

MEASUREMENTS / RESULTS




Beacon BC1:

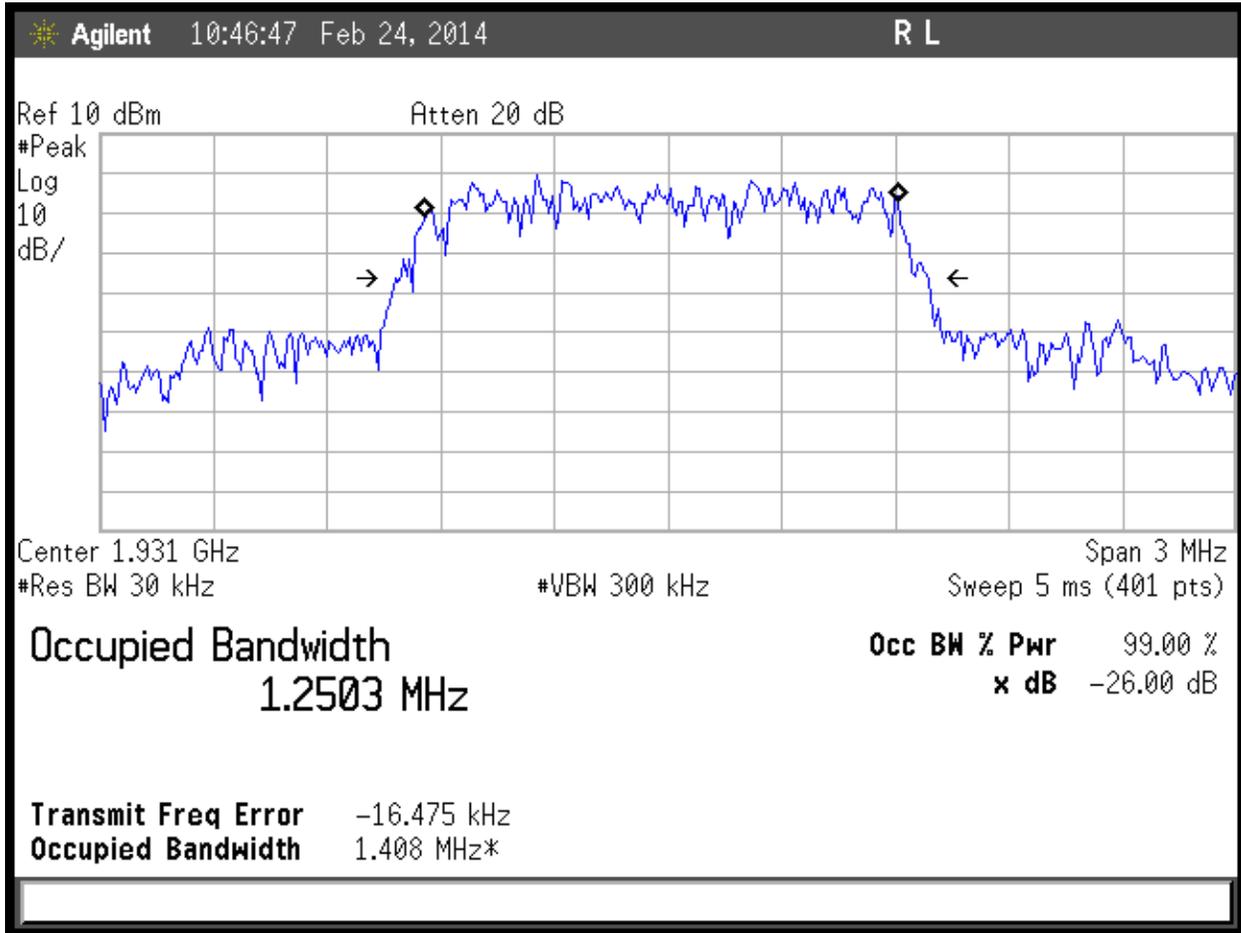

Beacon BC1 Low Channel



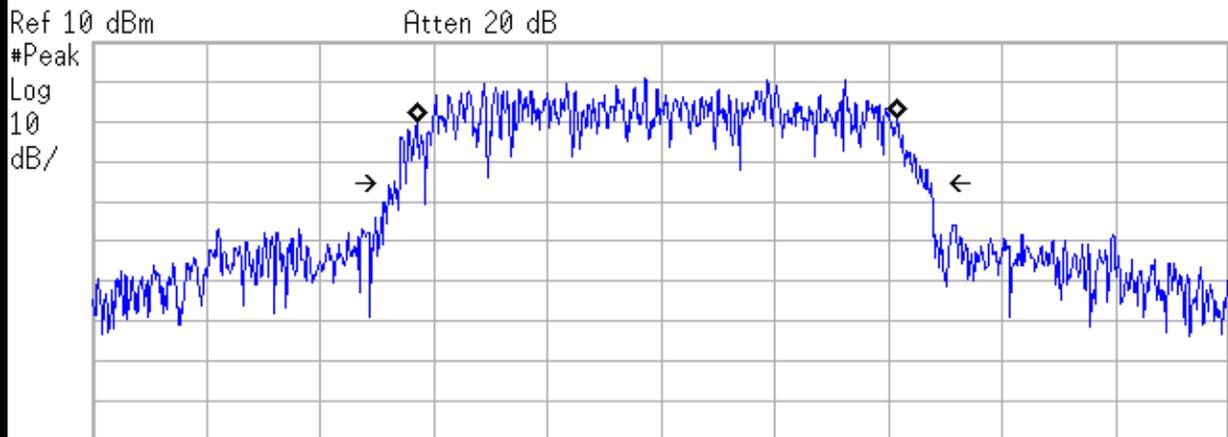

Center 1.956 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)


Occupied Bandwidth
1.2692 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -10.875 kHz
Occupied Bandwidth 1.416 MHz*

Beacon BC1 Mid Channel



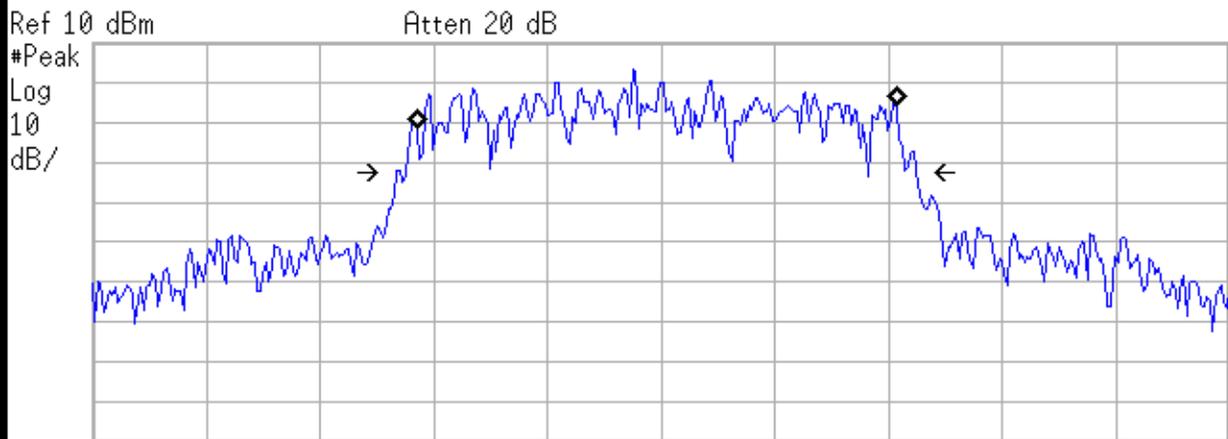

Center 1.989 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2682 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -12.685 kHz
Occupied Bandwidth 1.376 MHz*

Beacon BC1 High Channel




EVDO:

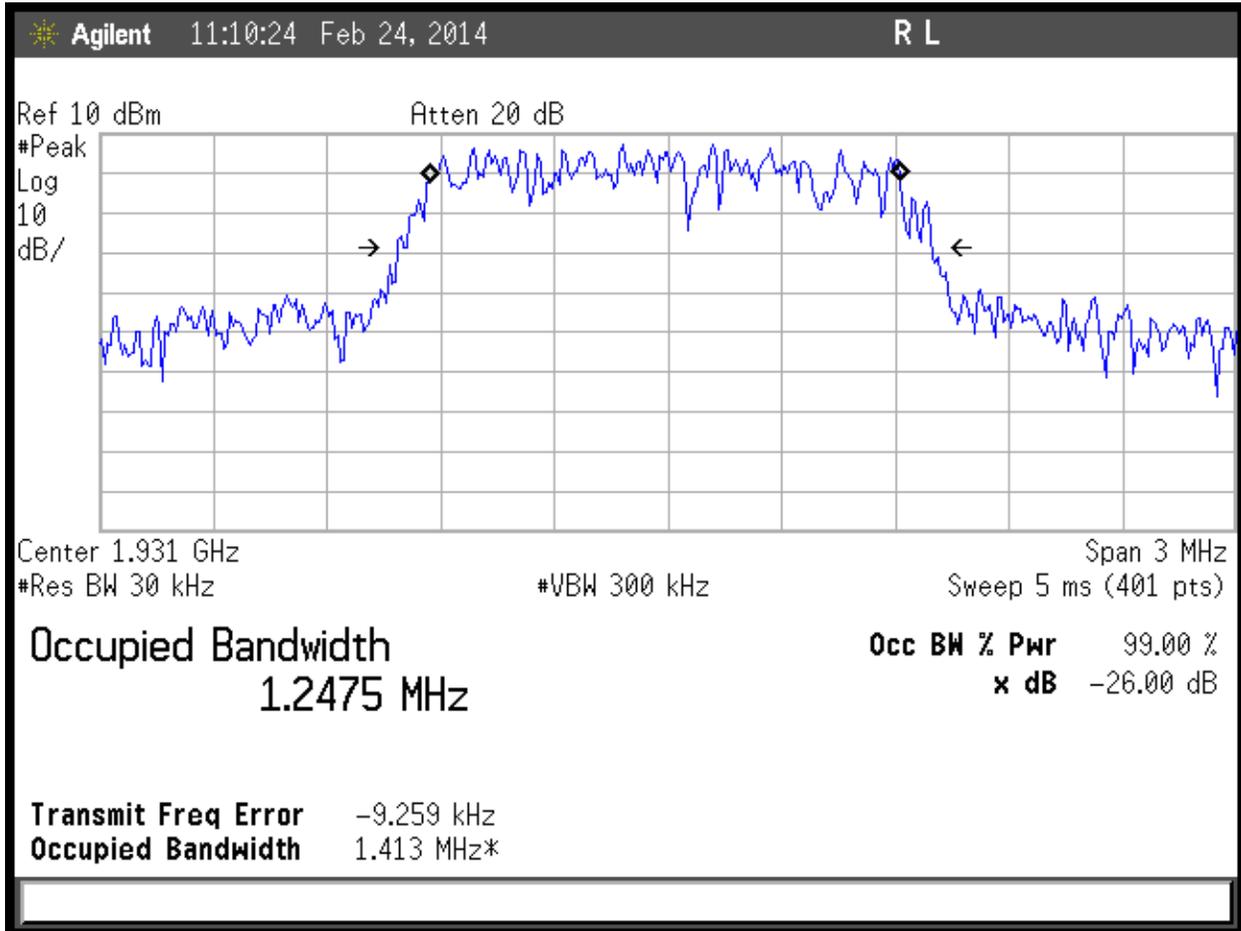

EVDO Low Channel



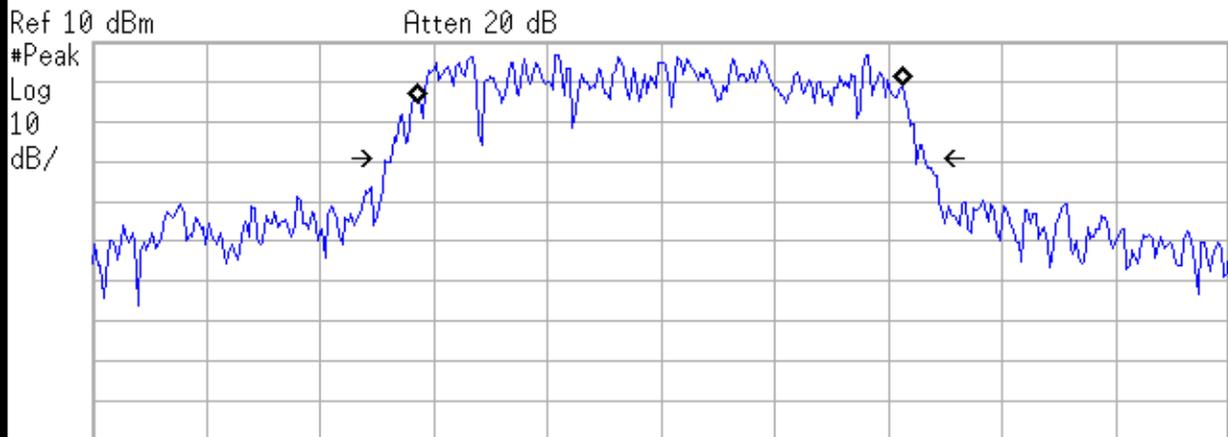

Center 1.956 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2817 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.070 kHz
Occupied Bandwidth 1.408 MHz*

EVDO Mid Channel



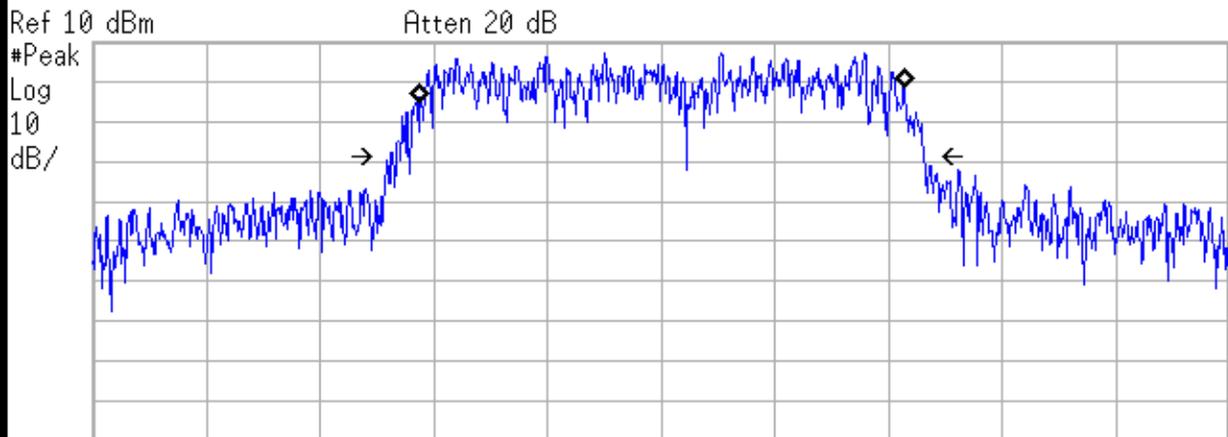

Center 1.989 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)

Occupied Bandwidth
1.2774 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 2.300 kHz
Occupied Bandwidth 1.405 MHz*

EVDO High Channel




One-X:

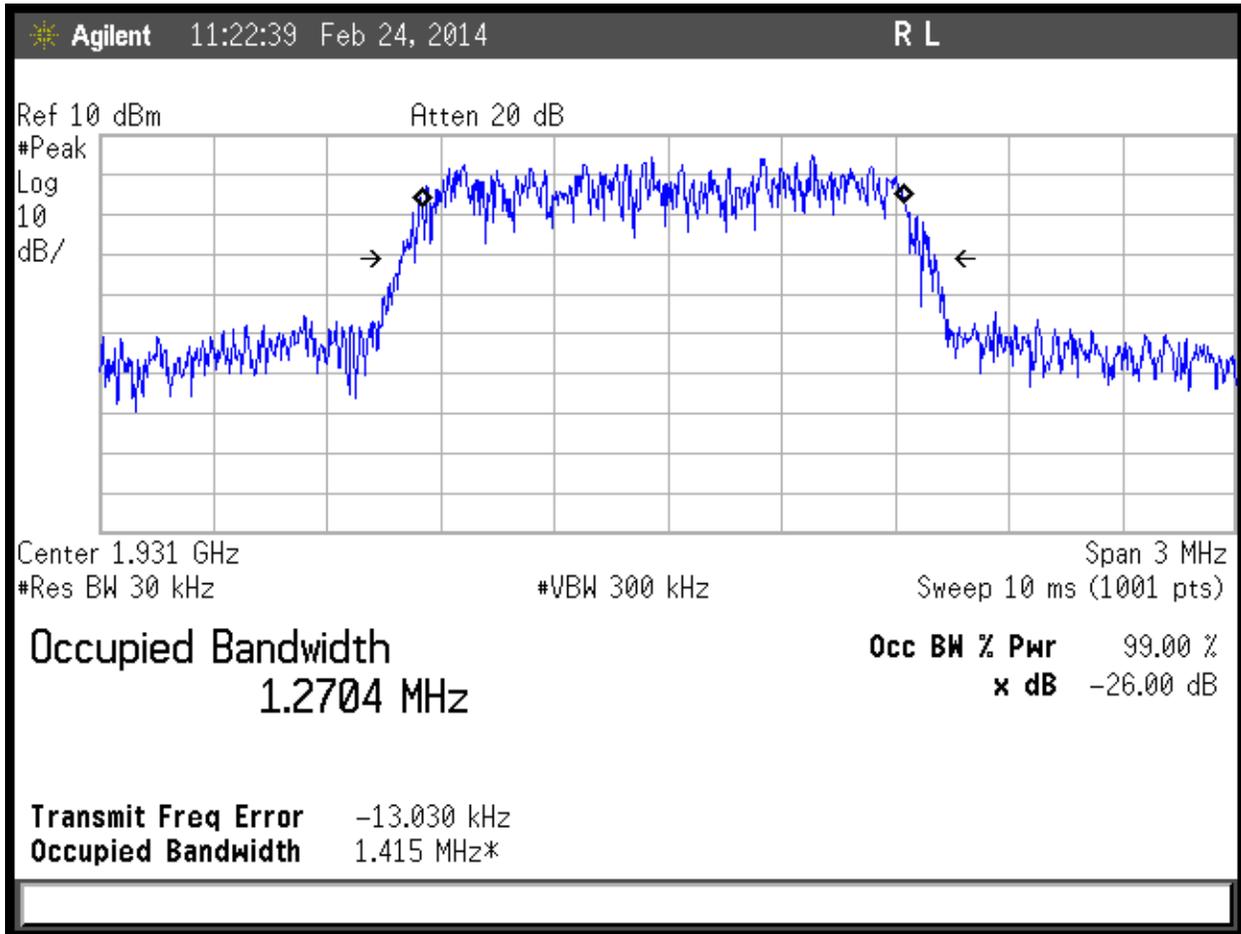

One-X Low Channel



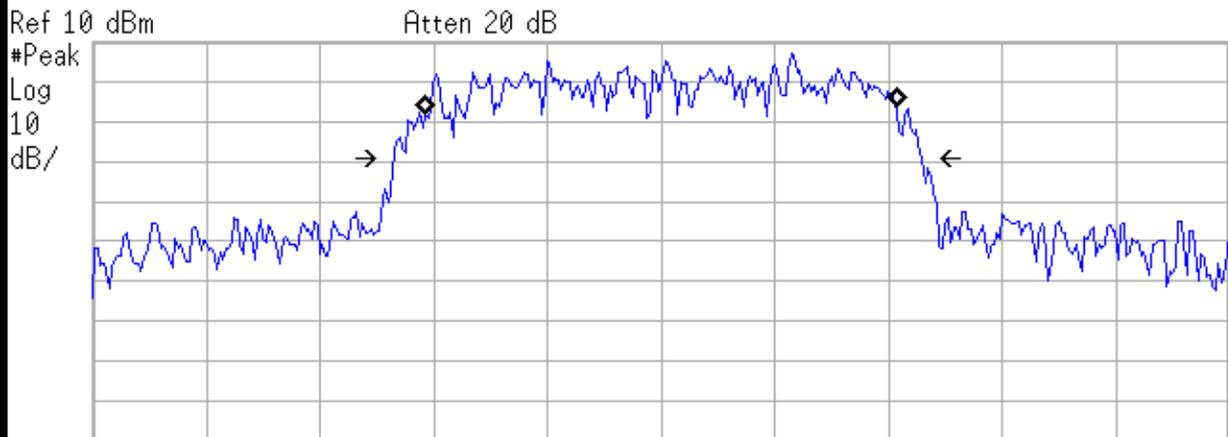

Center 1.956 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2413 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -639.137 Hz
Occupied Bandwidth 1.398 MHz*

One-X Mid Channel



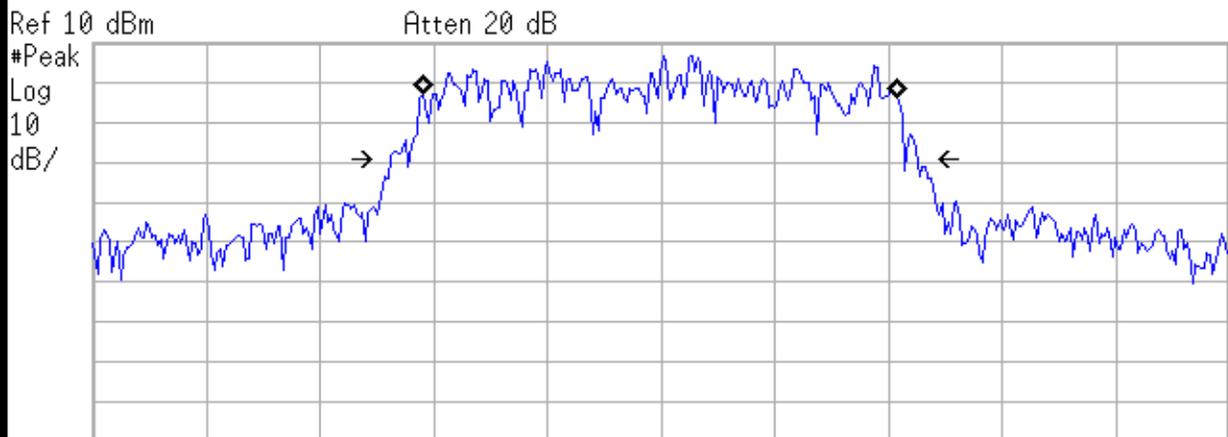

Center 1.989 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2522 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.042 kHz
Occupied Bandwidth 1.394 MHz*

One-X High Channel



EIRP

“Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.”

[24.232 (c)]

EIRP Using Substitution Method								
Date: 05-Nov-13		Company: Airvana		Work Order: O0319				
Engineer: Arik Zwimer		EUT Desc: 750722		EUT Operating Voltage/Frequency: 120Vac/60Hz				
Temp: 21°C		Humidity: 19%		Pressure: 1007mbar				
Frequency Range: Part 24 E, EIRP measurements				Measurement Distance: 3 m				
Notes: Band Class 1 (BC1) transmitters: Beacon, EVDO, and One-X								
Antenna Polarization (H/V)	Frequency (MHz)	Signal Generator Power Output (dBm)				FCC 24.232 section c		
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted EIRP (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
Beacon Ch. 25								
H	1931.25	6.8	0.8	7.6	15.2	33.0	-17.8	Pass
V	1931.25	7.3	0.8	7.6	15.7	33.0	-17.3	Pass
Beacon Ch. 525								
H	1956.25	6.2	0.7	7.6	14.5	33.0	-18.5	Pass
V	1956.25	7.2	0.7	7.6	15.5	33.0	-17.5	Pass
Beacon Ch. 1175								
H	1988.75	4.3	0.8	7.7	12.8	33.0	-20.2	Pass
V	1988.75	5.4	0.8	7.7	13.9	33.0	-19.1	Pass
EVDO Ch. 25								
H	1931.25	14.2	0.8	7.6	22.6	33.0	-10.4	Pass
V	1931.25	14.0	0.8	7.6	22.4	33.0	-10.6	Pass
EVDO Ch. 525								
H	1956.25	13.9	0.7	7.6	22.2	33.0	-10.8	Pass
V	1956.25	16.2	0.7	7.6	24.5	33.0	-8.5	Pass
EVDO Ch. 1175								
H	1988.75	12.3	0.8	7.7	20.8	33.0	-12.2	Pass
V	1988.75	16.0	0.8	7.7	24.5	33.0	-8.5	Pass
One-X Ch. 25								
H	1931.25	6.1	0.8	7.6	14.5	33.0	-18.5	Pass
V	1931.25	6.4	0.8	7.6	14.8	33.0	-18.2	Pass
One-X Ch. 525								
H	1956.25	8.2	0.7	7.6	16.5	33.0	-16.5	Pass
V	1956.25	8.4	0.7	7.6	16.7	33.0	-16.3	Pass
One-X Ch. 1175								
H	1988.75	6.4	0.8	7.7	14.9	33.0	-18.1	Pass
V	1988.75	8.5	0.8	7.7	17.0	33.0	-16.0	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820			Receive Cable: EMIR-05		
Analyzer: Brown (Rental #1)			Receive Antenna: Orange Horn			Transmit Cable: Asset 1785		
			Transmit Antenna: Black Horn					

(2 watts = 33 dBm)



Band Edge Measurements

LIMITS

“The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

[24.238(a)]

“A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1MHz or 1 percent of emission bandwidth, as specified).” [24.238(b)]


MEASUREMENTS / RESULTS

Note: Mask lines are set to -13dBm at 1930MHz and 1990MHz.

Spectrum analyzer screen plots for Beacon BC1, EVDO, and One-X are shown on the following pages.




Beacon BC1:

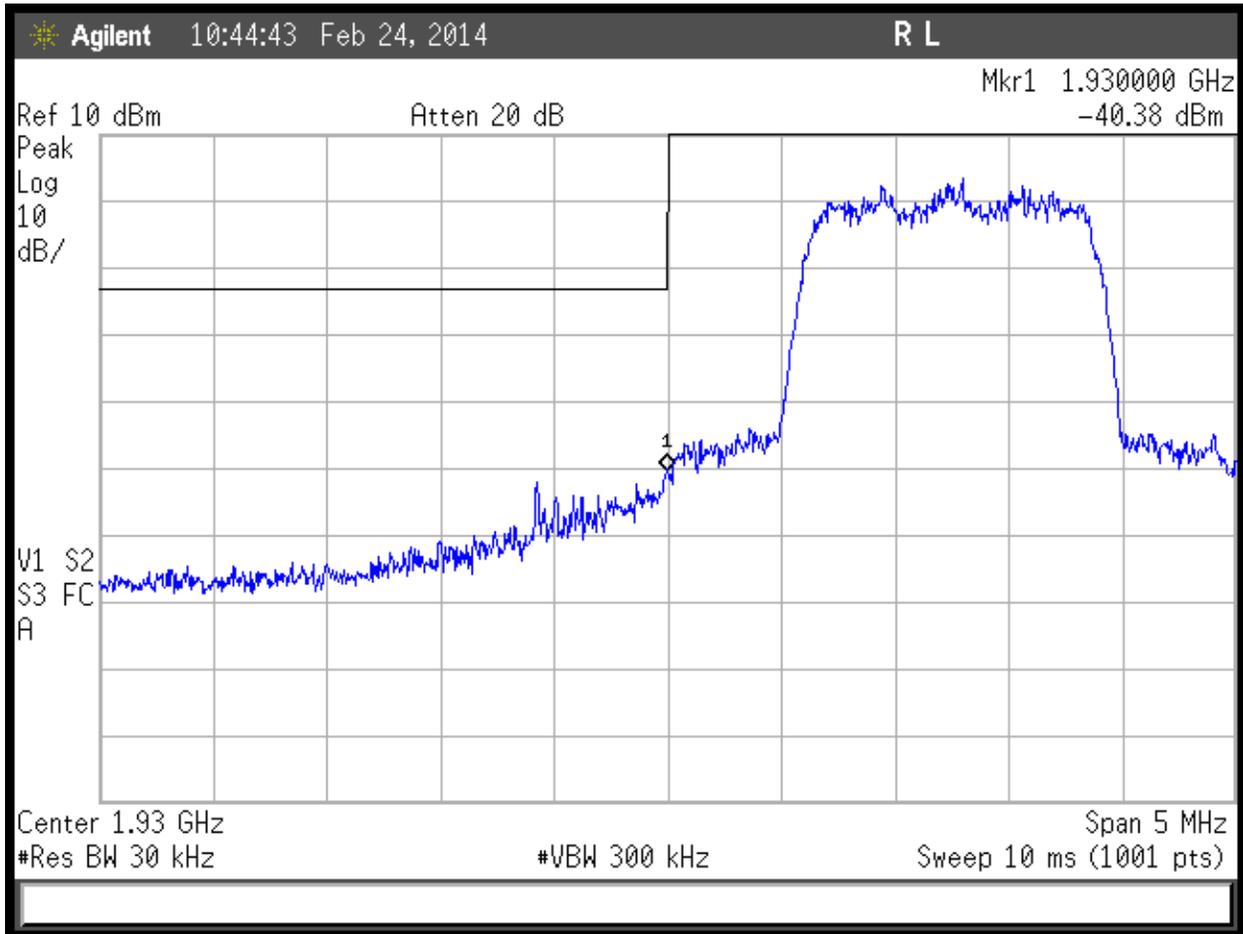

Beacon BC1 Low Channel




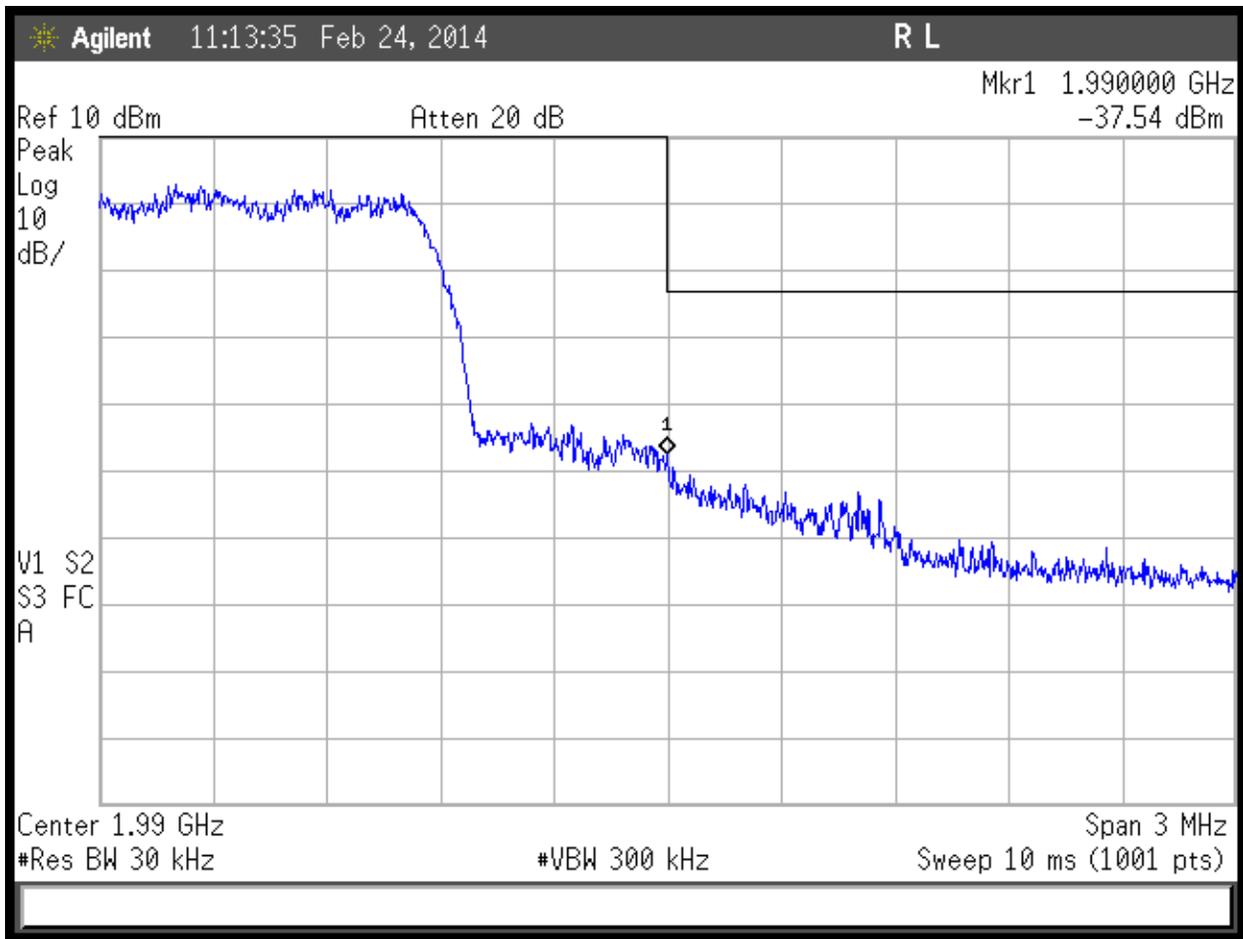

Beacon BC1 High Channel




EVDO:

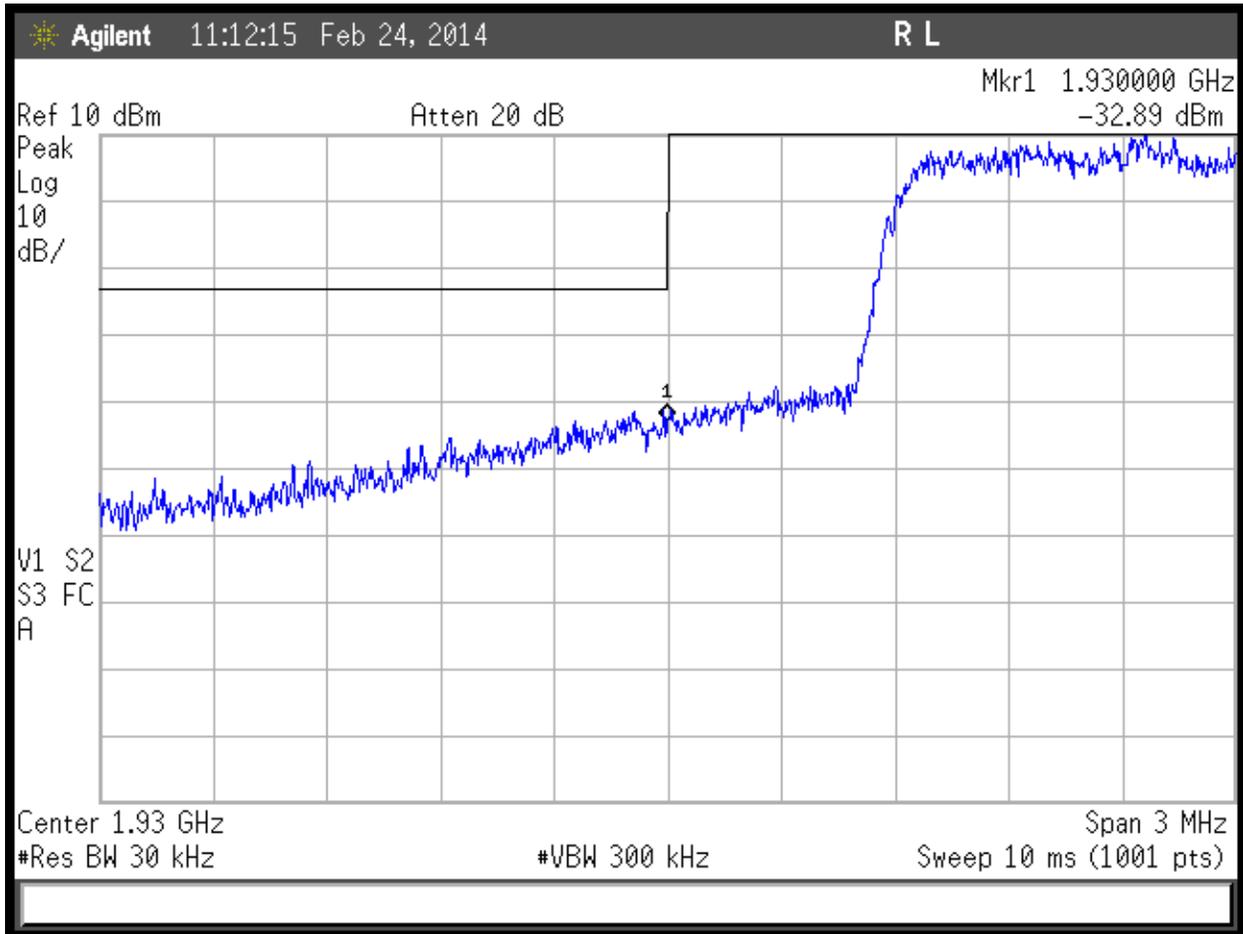

EVDO Low Channel




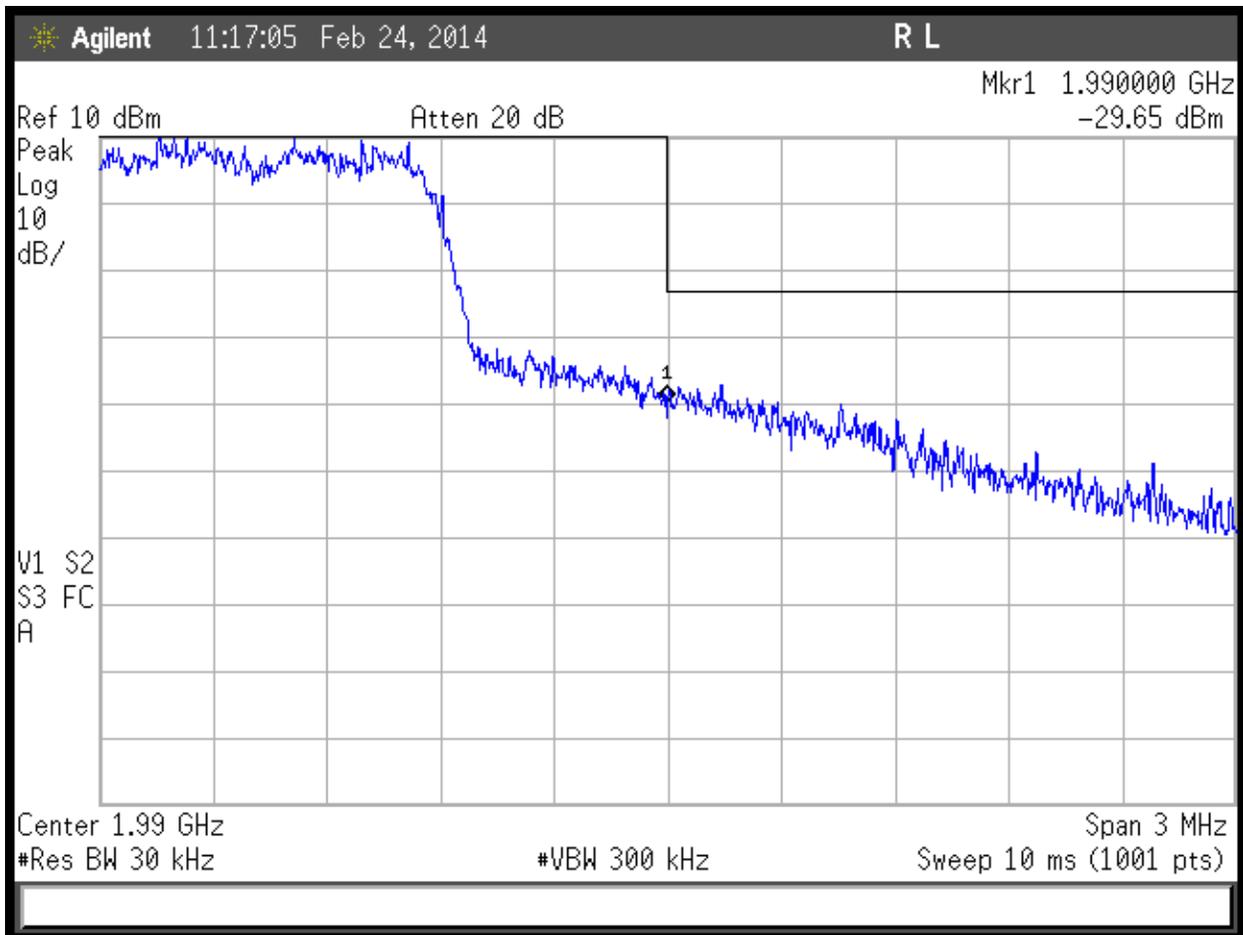

EVDO High Channel




One-X:

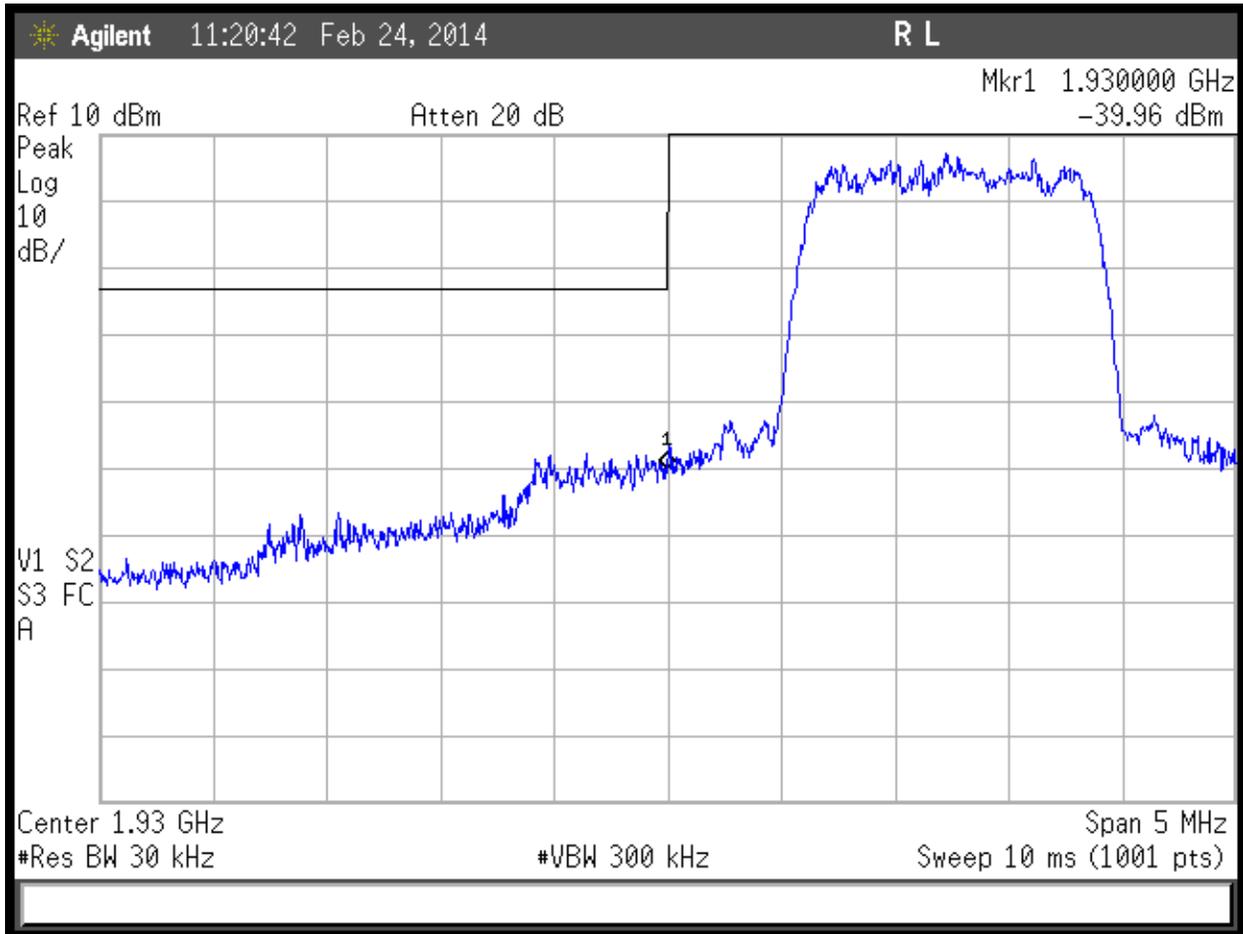

One-X Low Channel



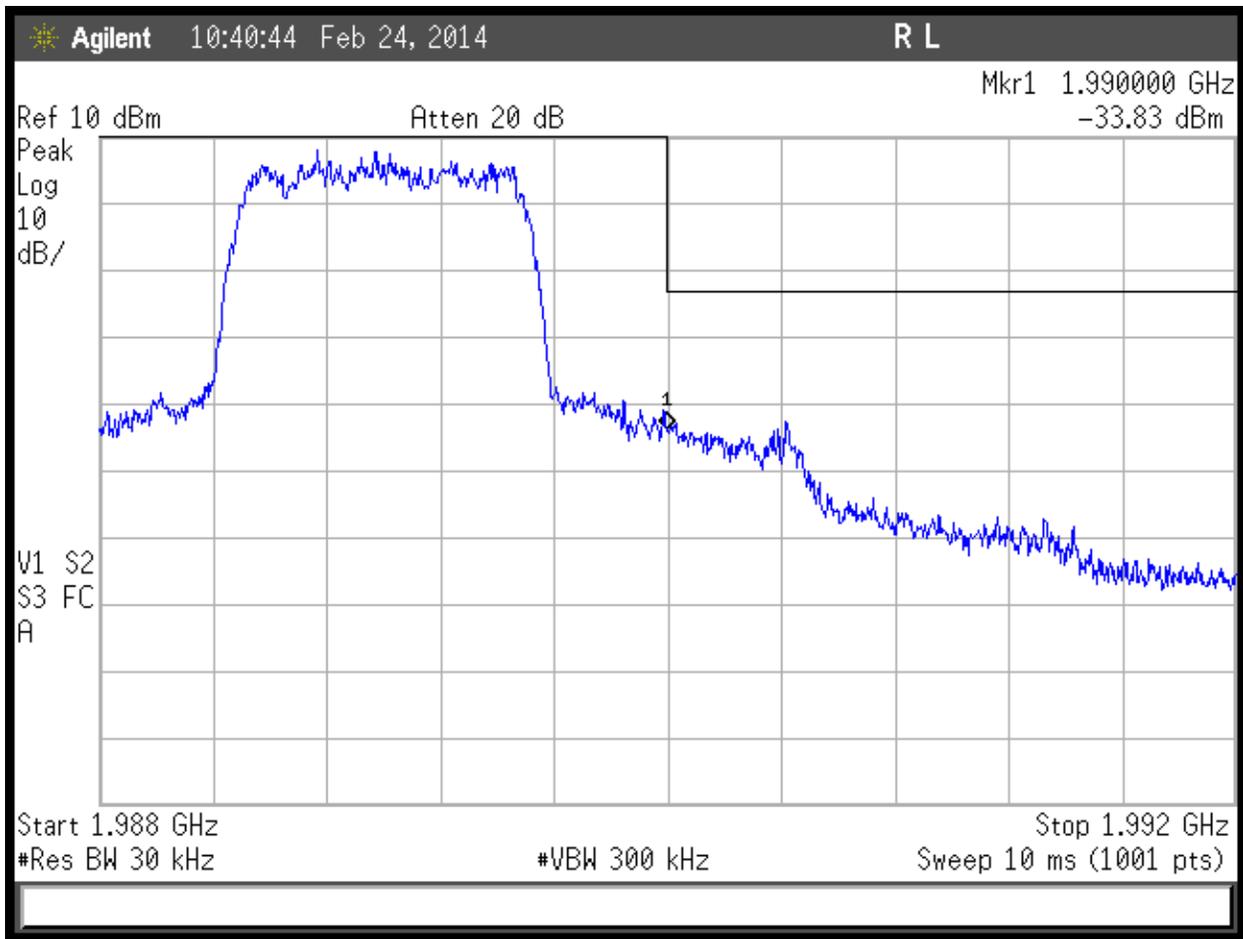

One-x High Channel



Conducted Spurious Emissions at Antenna Port

LIMITS

“The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”
[24.238(a)]


$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$

Spectrum analyzer screen plots for Beacon BC1, EVDO, and One-X are shown on the following pages.




PLOTS

Beacon BC1:

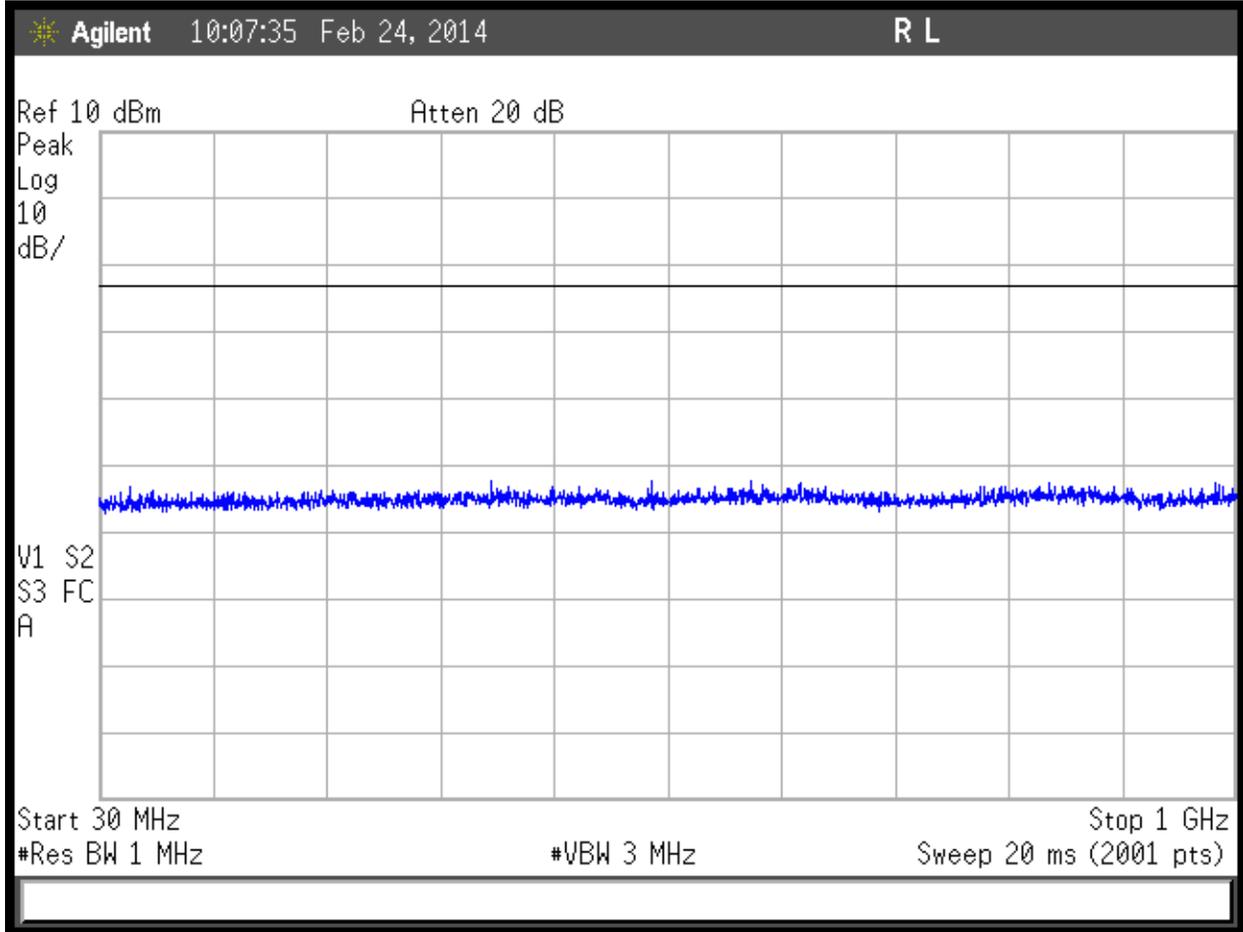


Beacon BC1, 30MHz to 1GHz



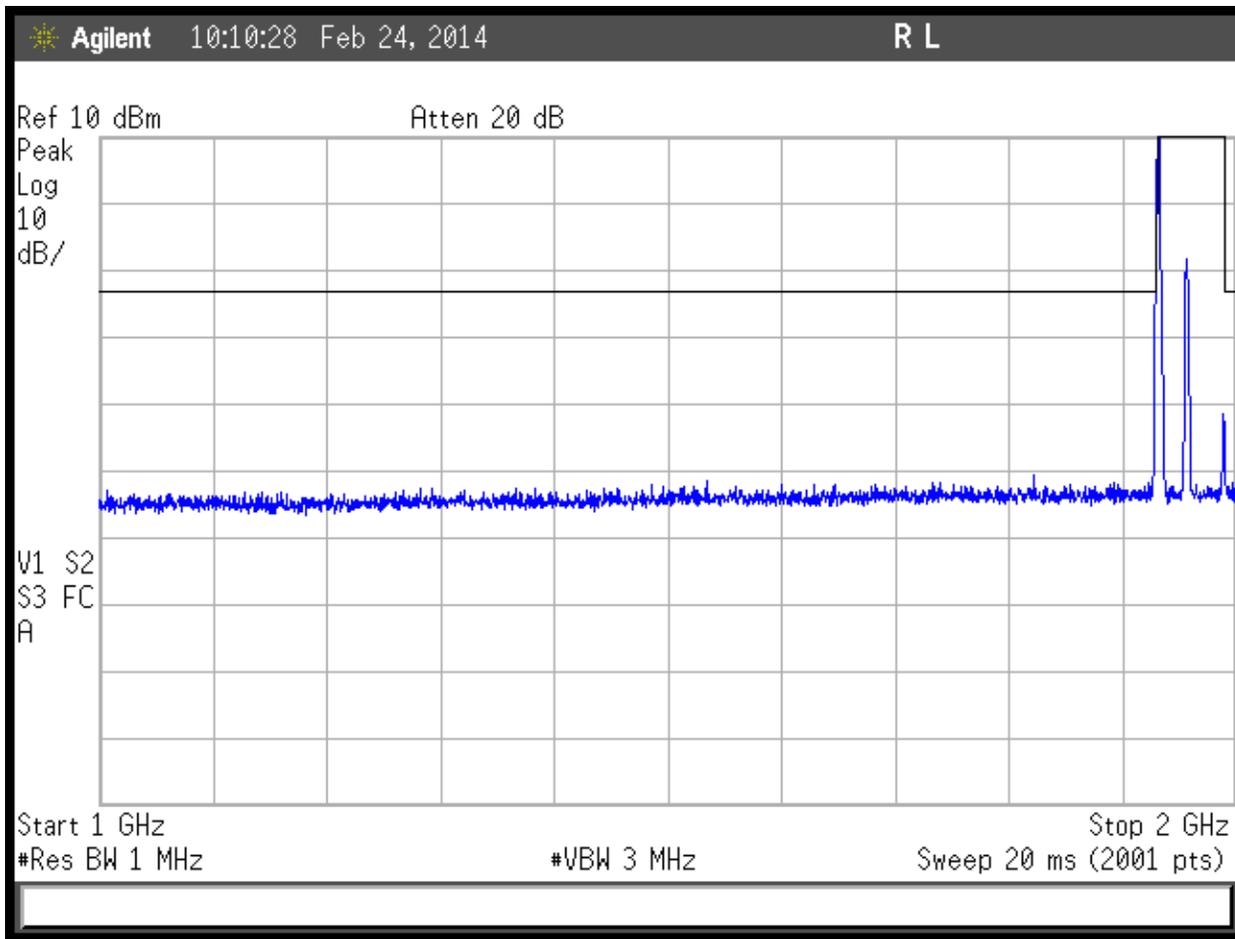


Beacon BC1, 1-2GHz



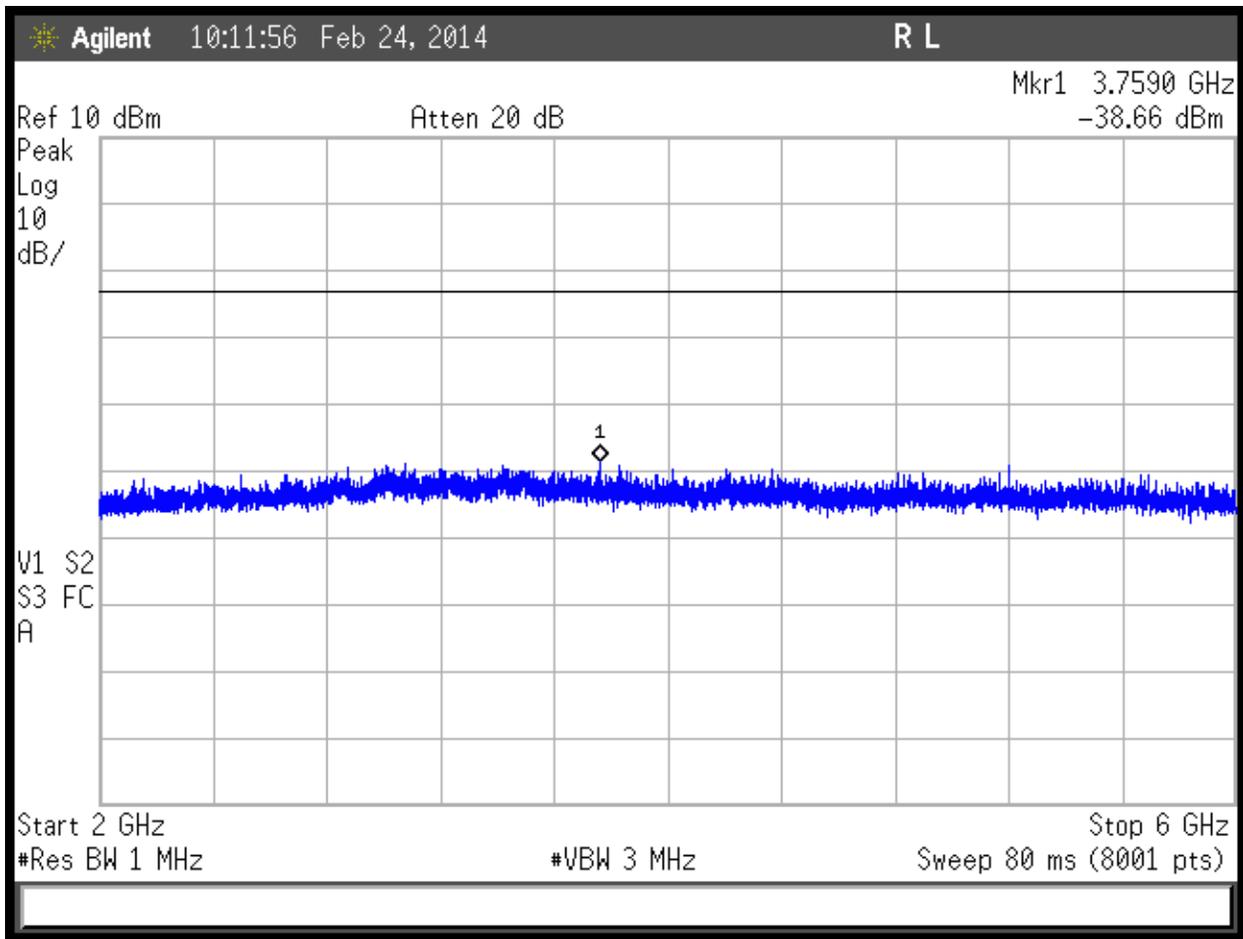


Beacon BC1, 2-6GHz



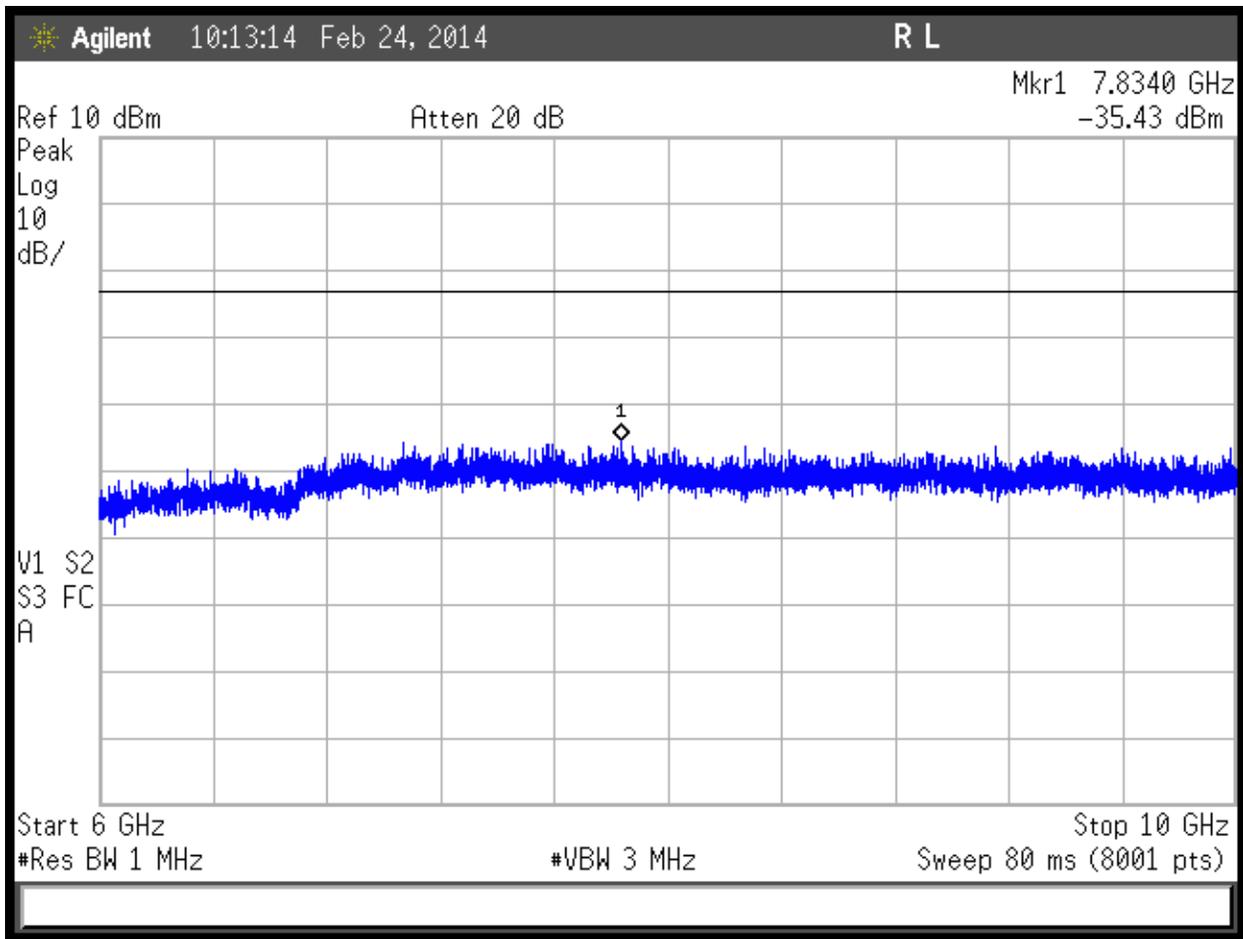


Beacon BC1, 6-10GHz



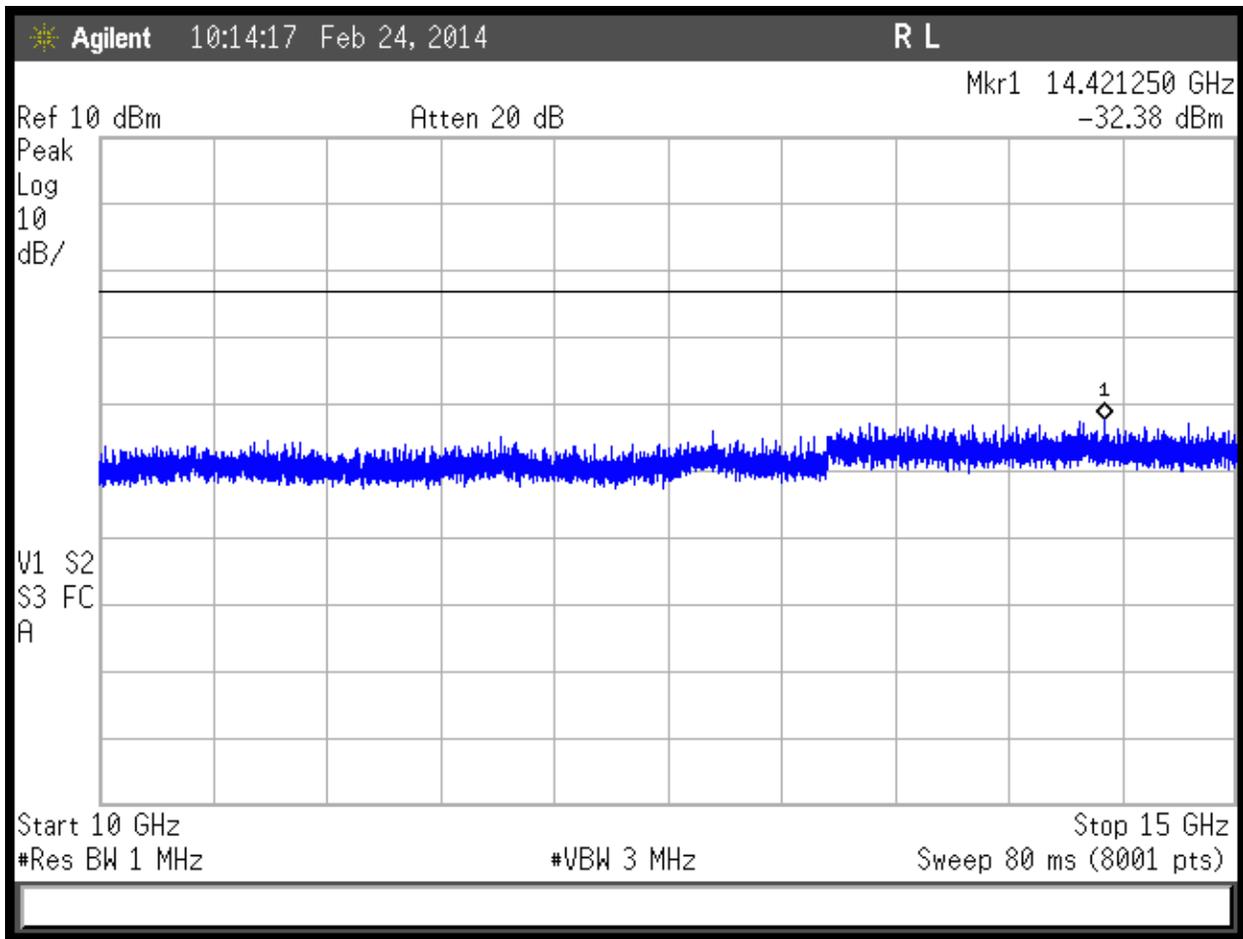

Beacon BC1, 10-15GHz



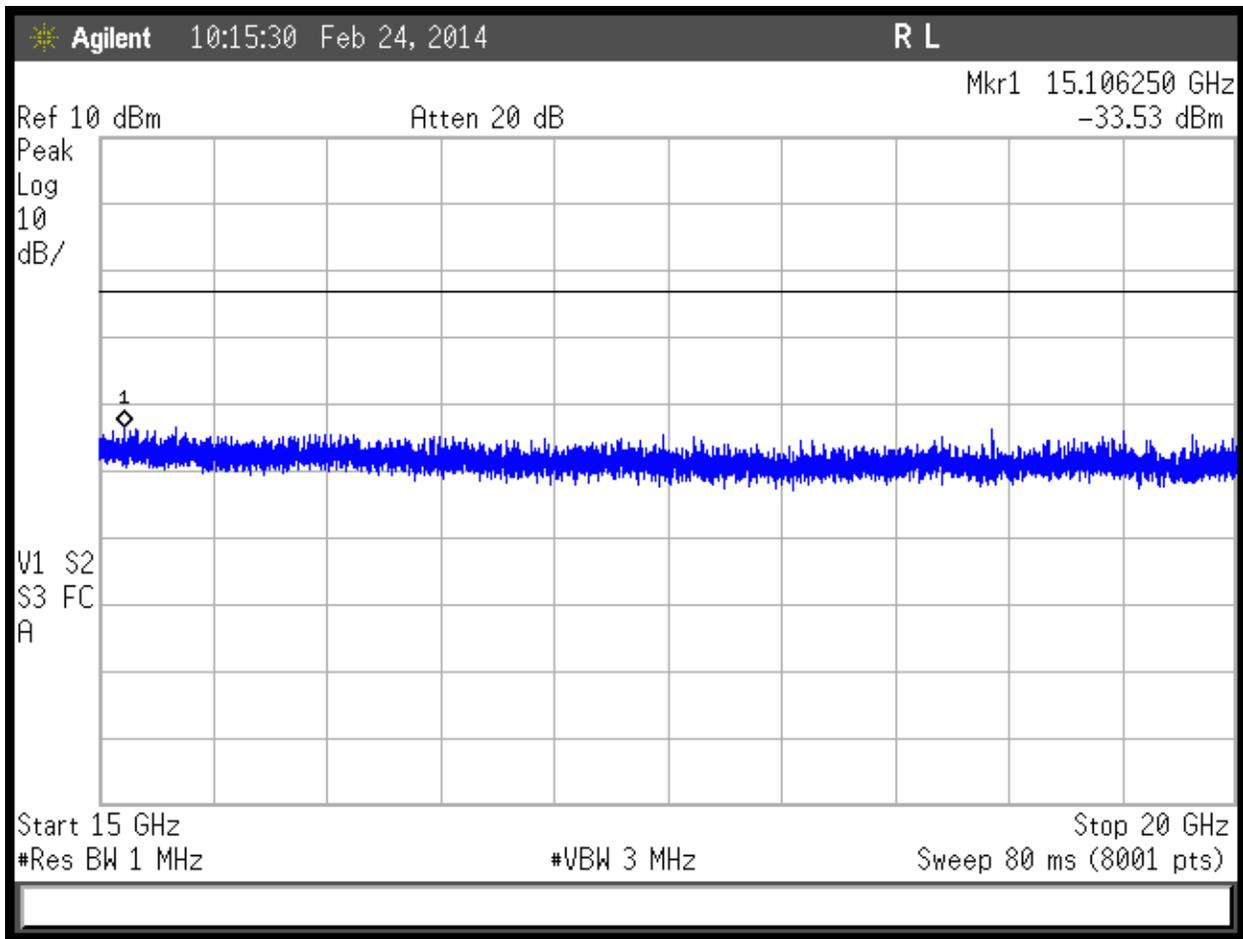


Beacon BC1, 15-20GHz



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880




EVDO:

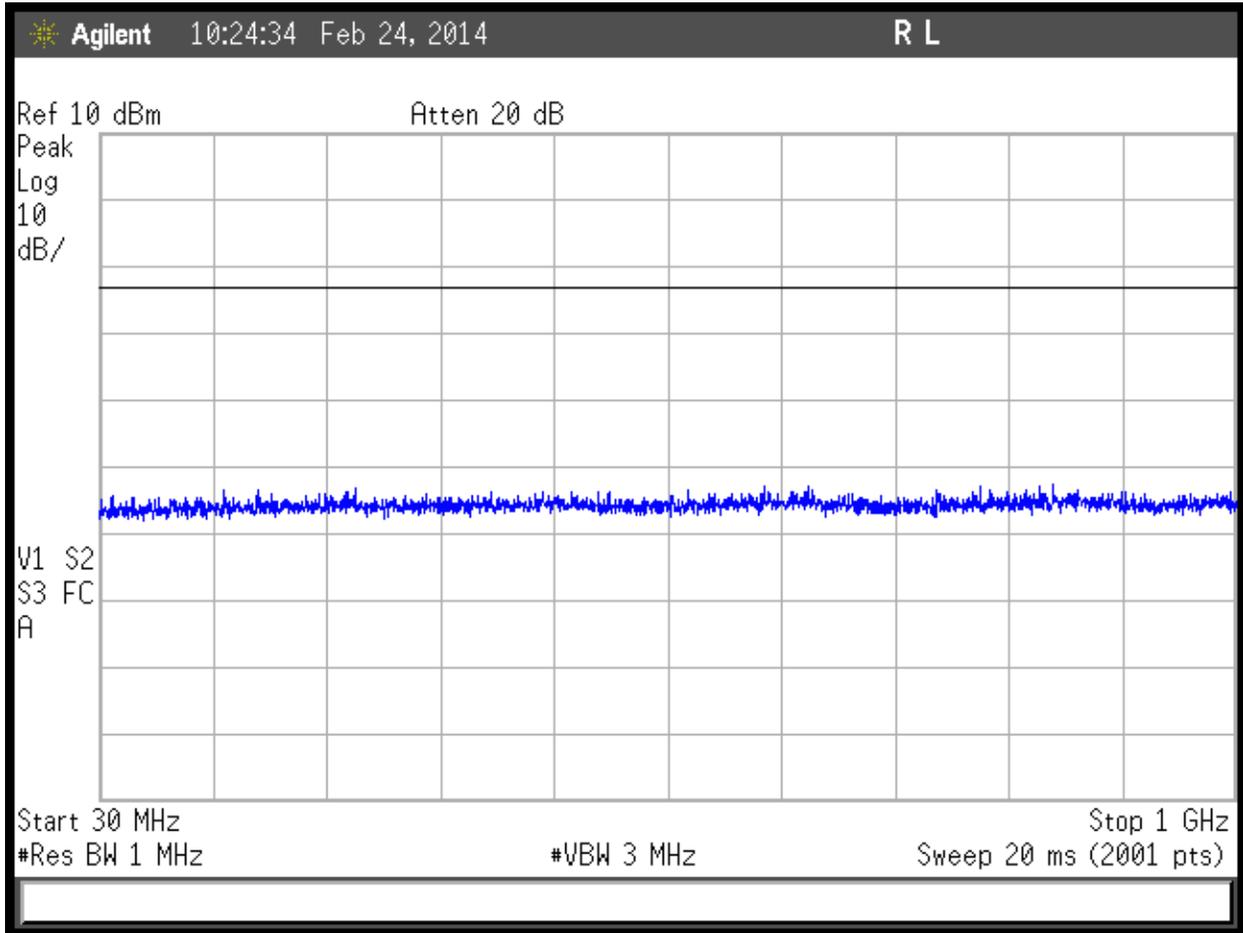


EVDO, 30MHz to 1GHz



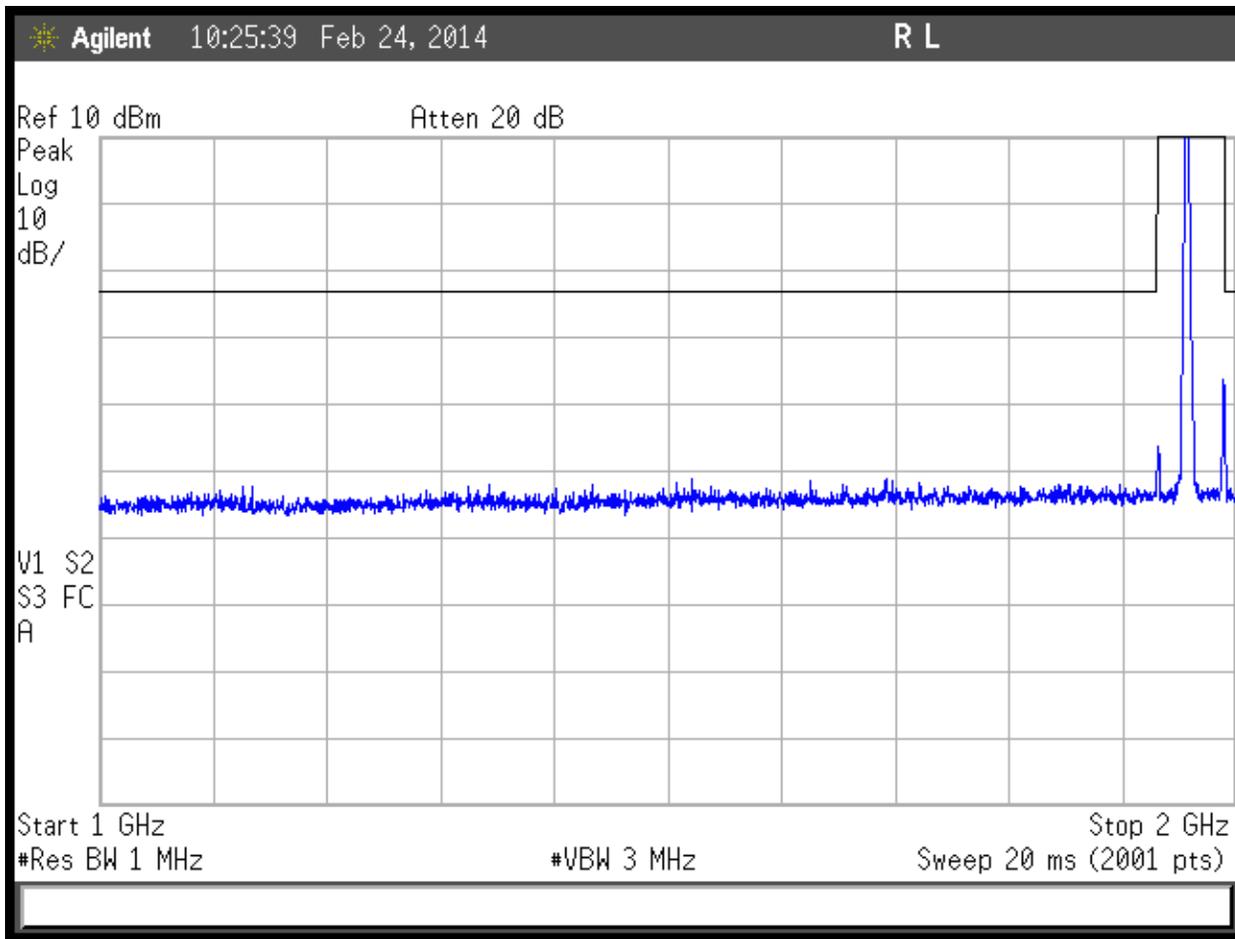


EVDO, 1-2GHz



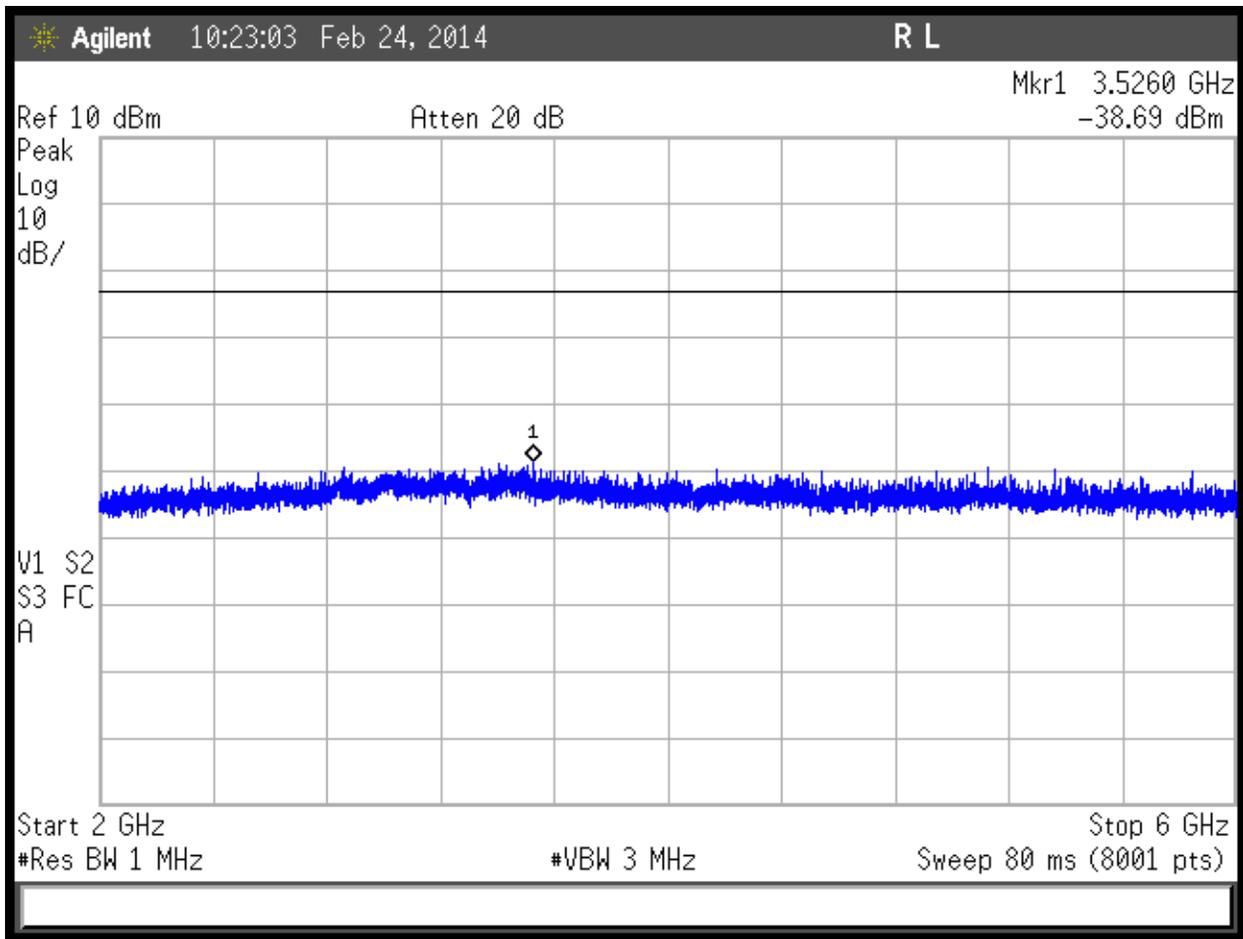


EVDO, 2-6GHz



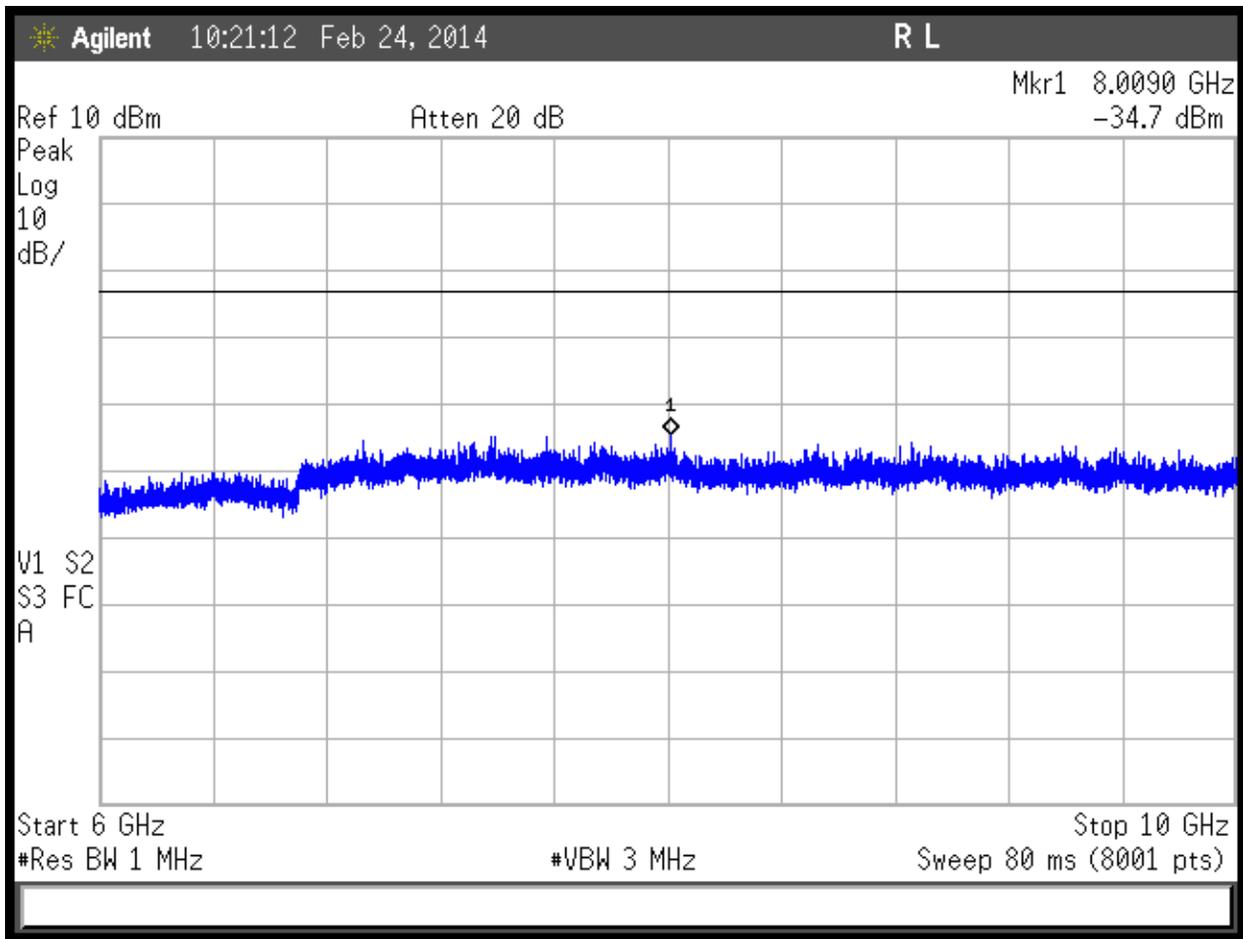


EVDO, 6-10GHz



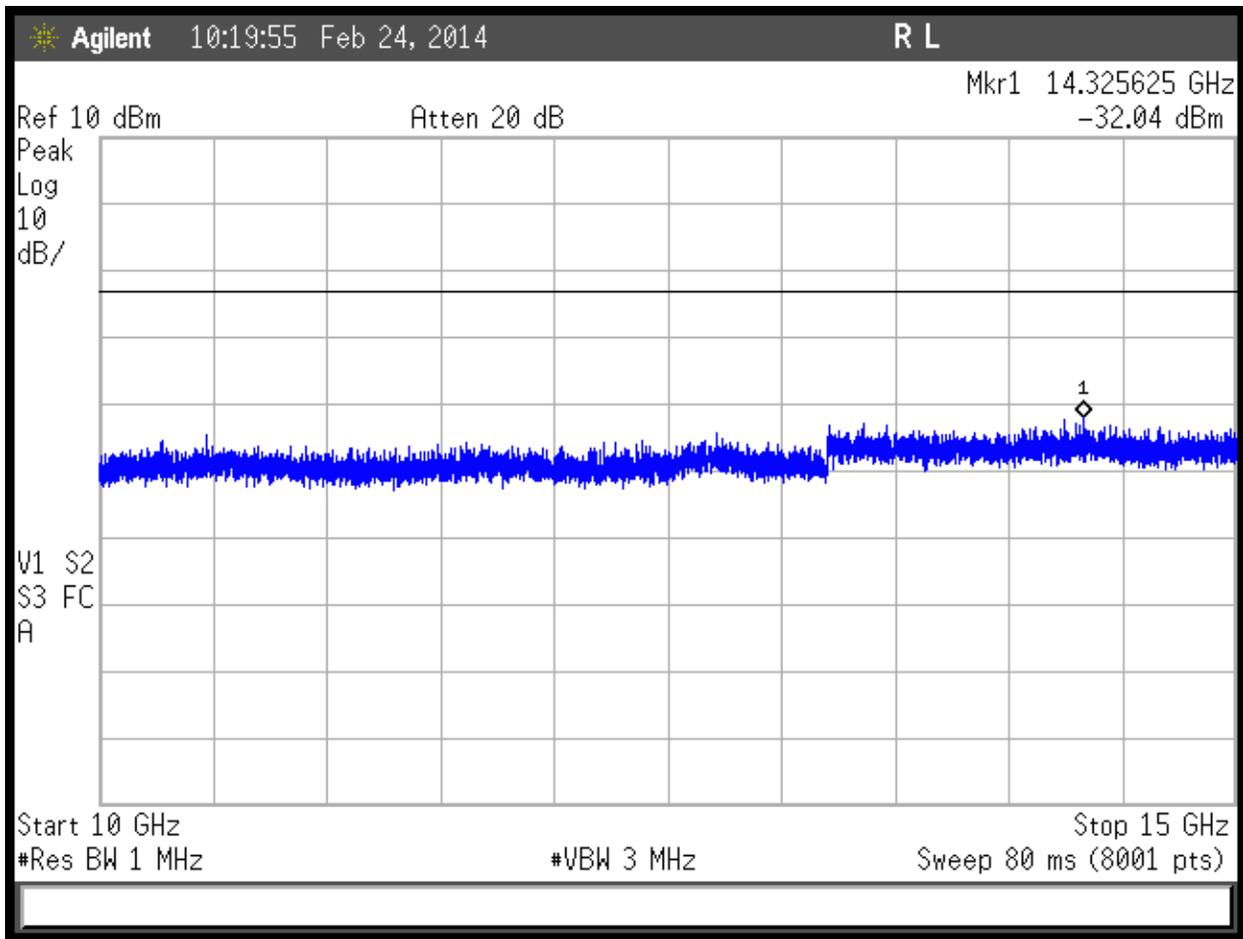

EVDO, 10-15GHz




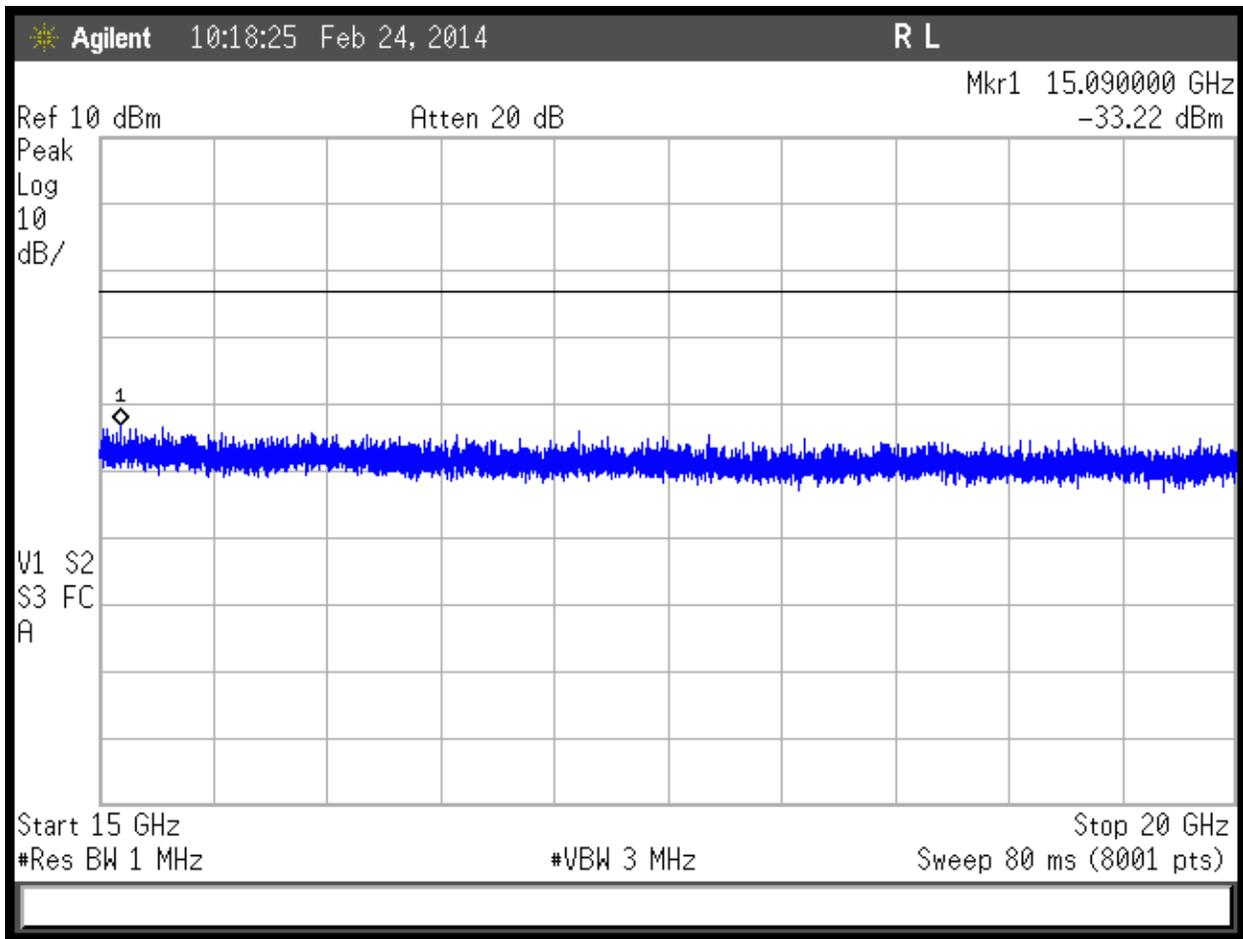

EVDO, 15-20GHz




One-X:

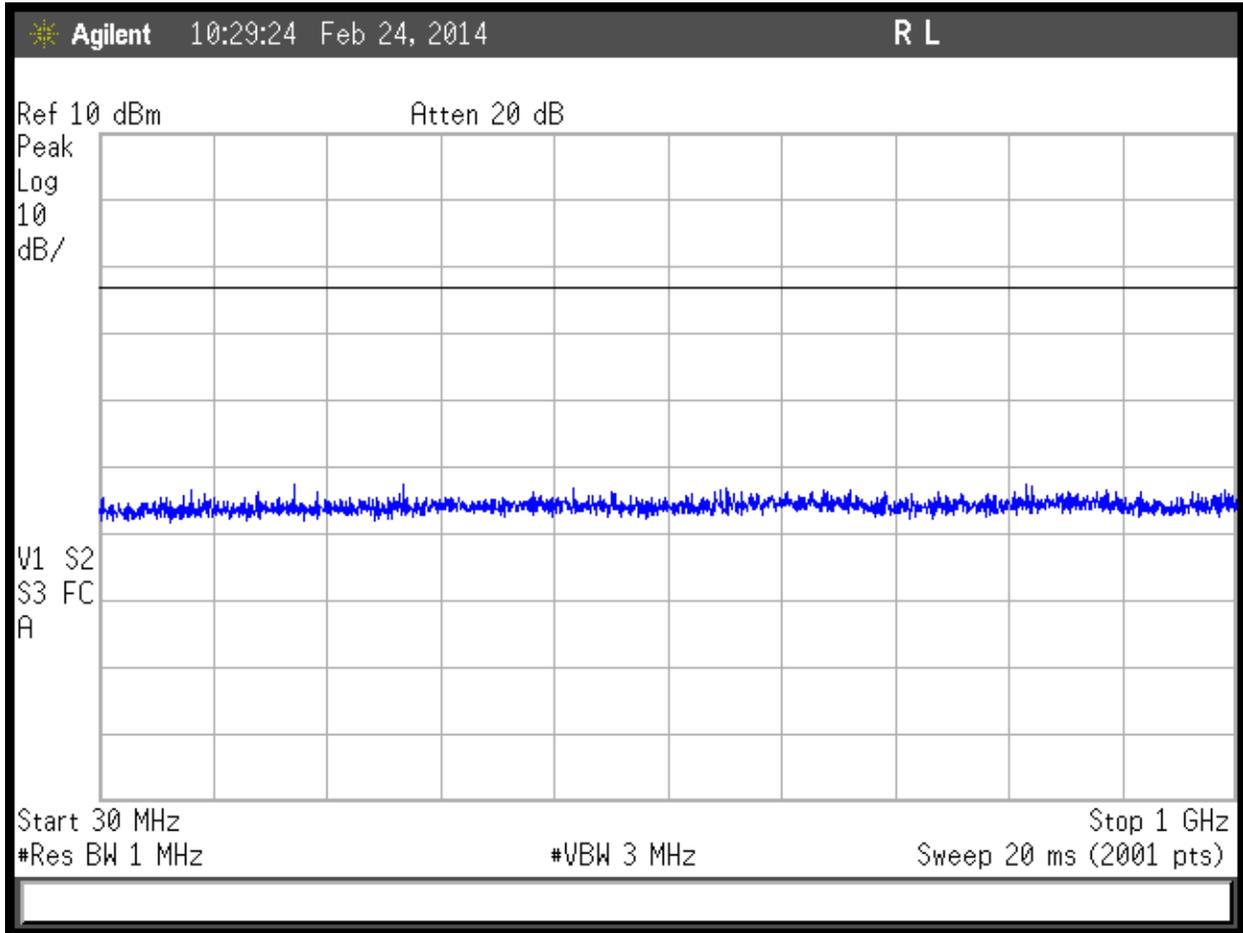


One-X, 30MHz to 1GHz



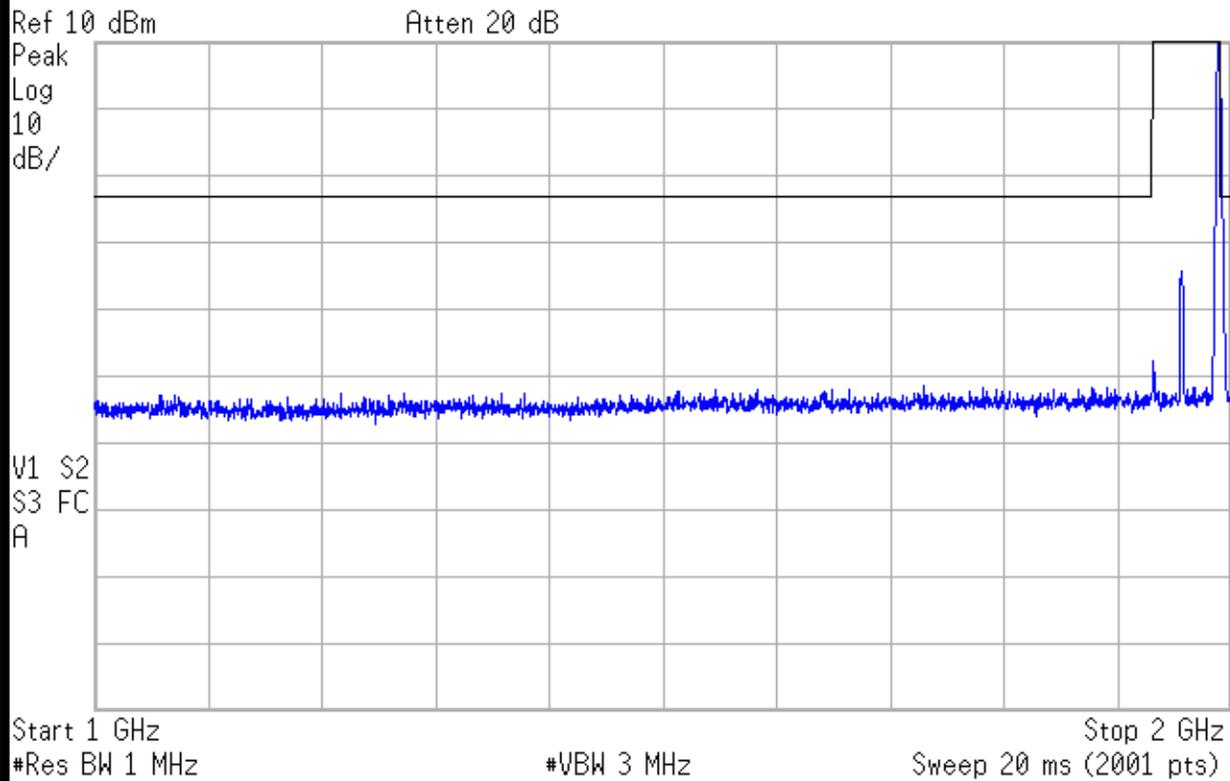


One-X, 1-2GHz



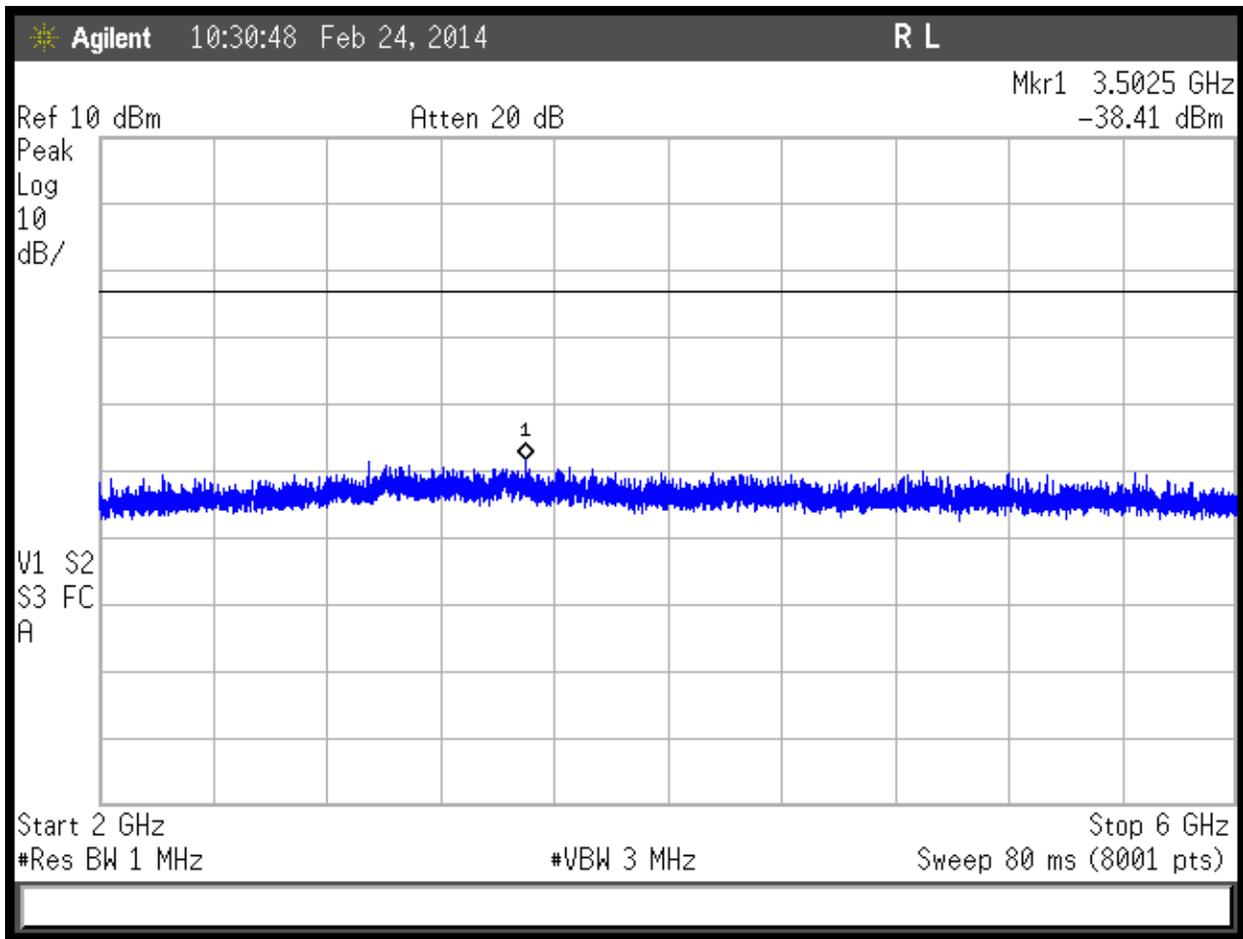


One-X, 2-6GHz




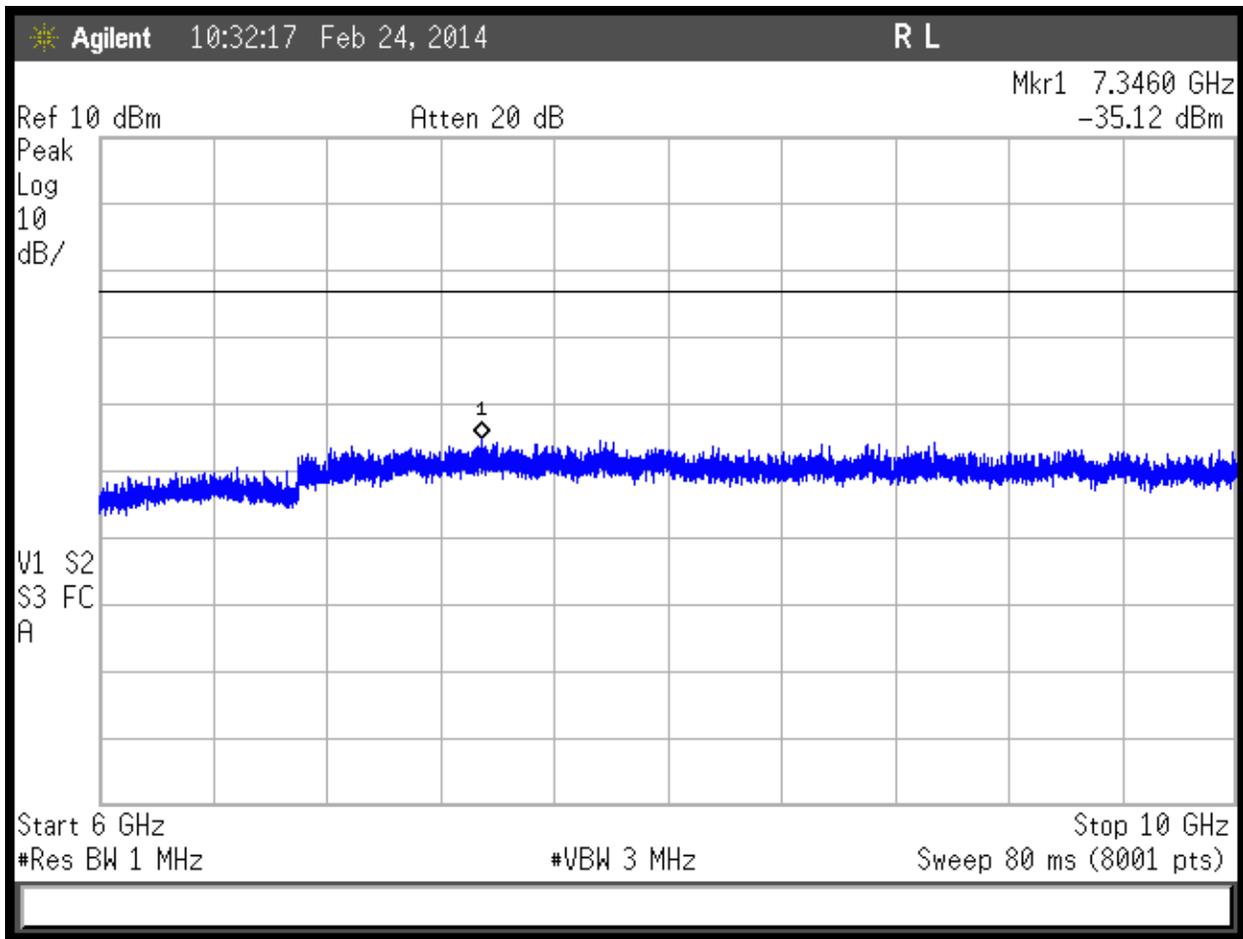

One-X, 6-10GHz



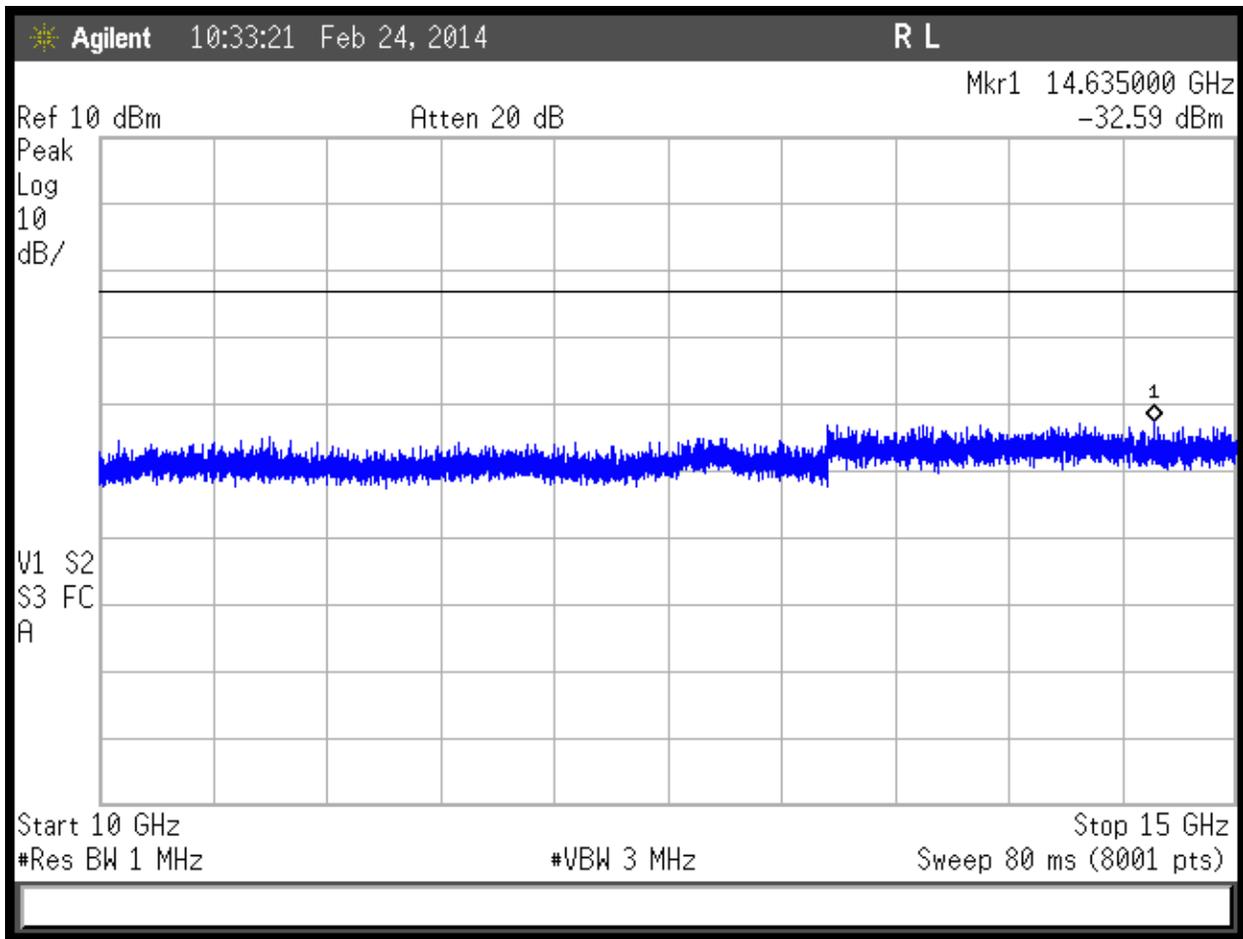

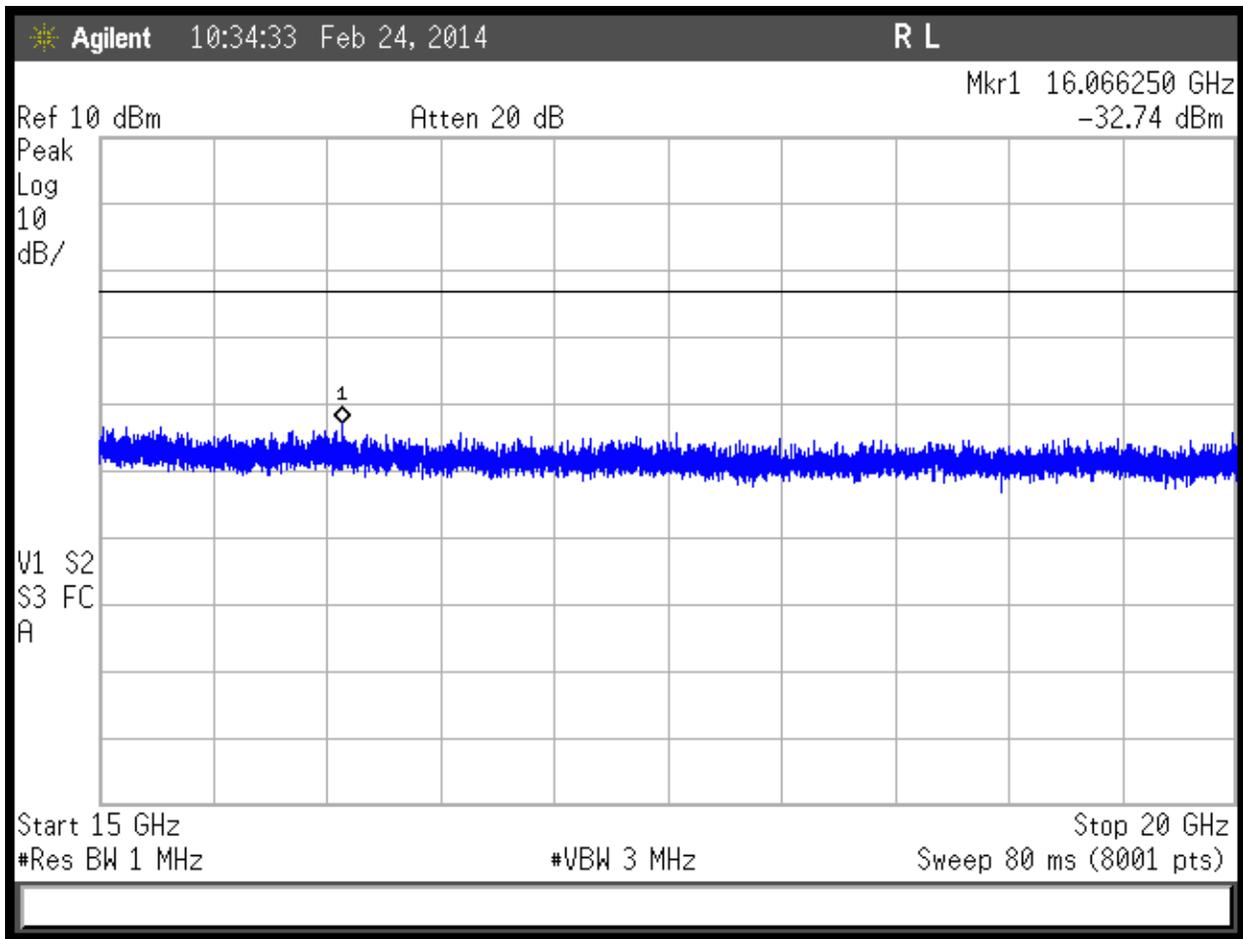


One-X, 15-20GHz




Tests Specific to Part 90

Occupied Bandwidth

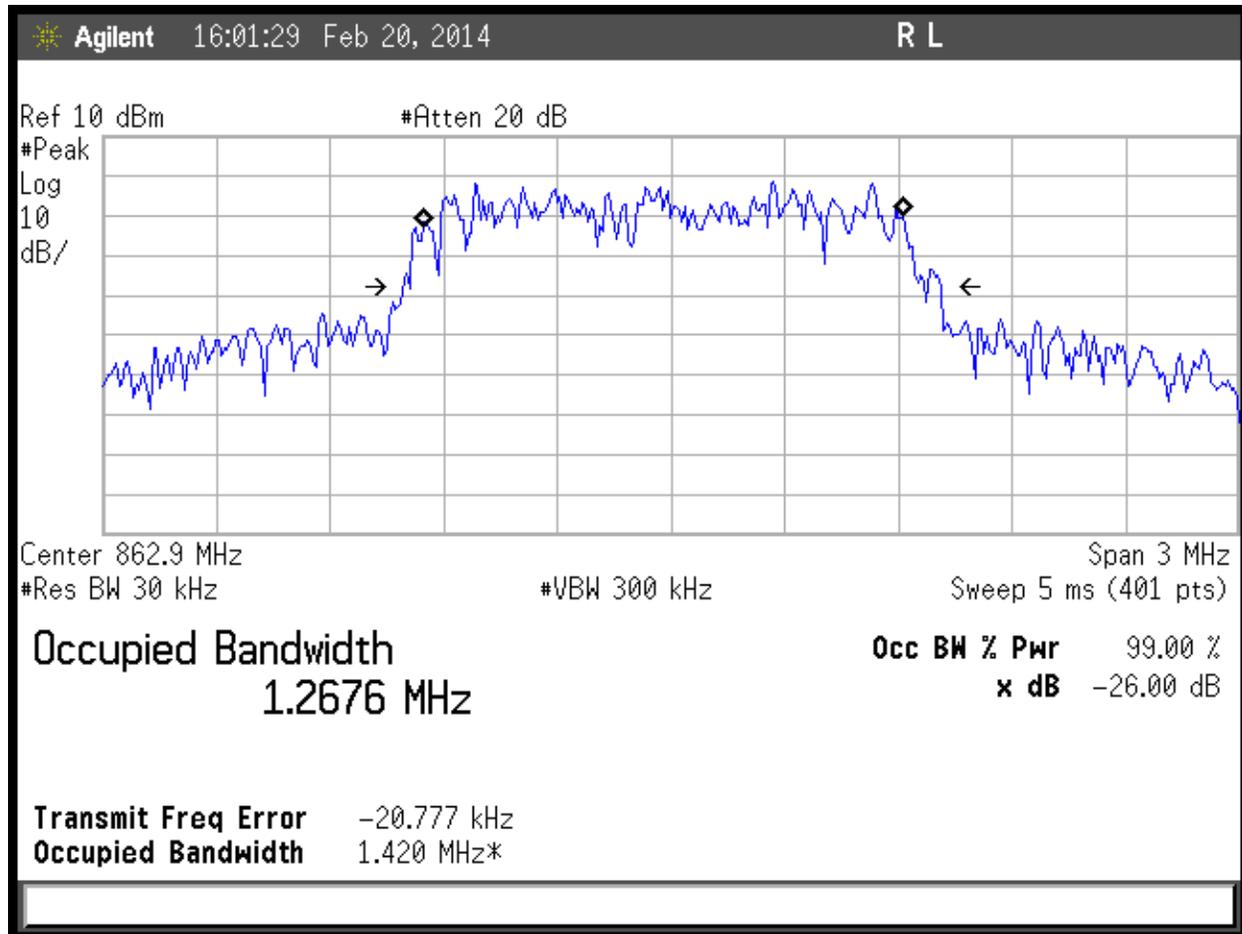

BC10 Low Channel (Ch. 476)



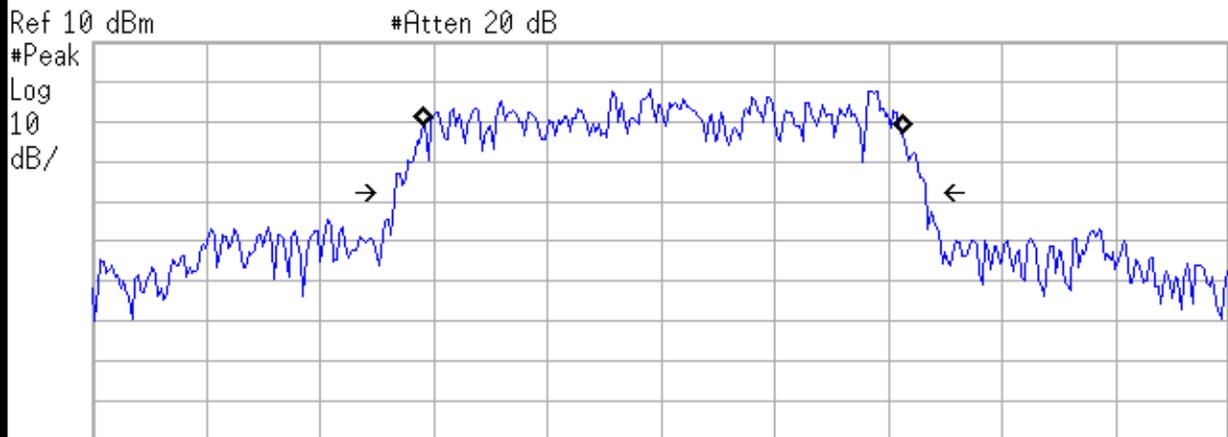

Center 865.4 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2649 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.702 kHz
Occupied Bandwidth 1.405 MHz*

BC10 Mid Channel (Ch. 576)



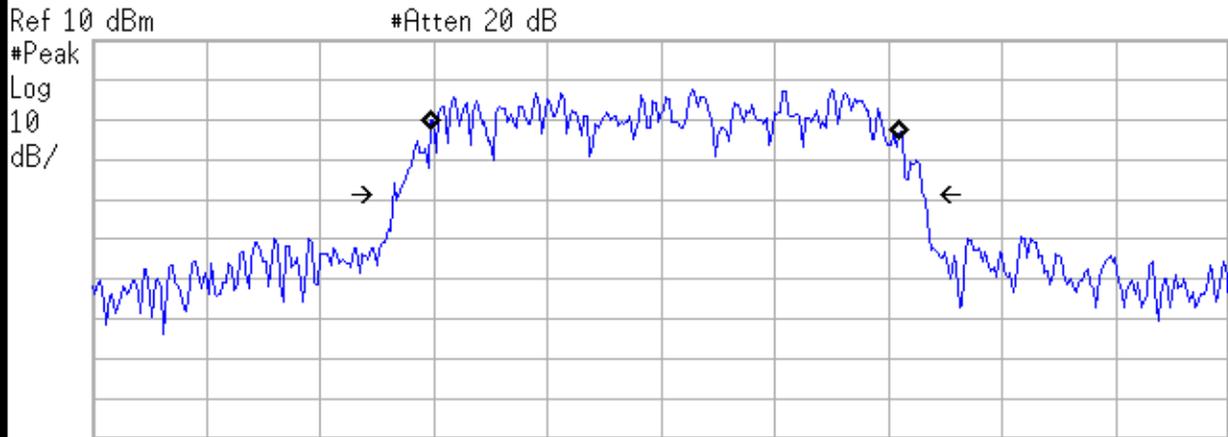

Center 867.9 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2353 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 8.685 kHz
Occupied Bandwidth 1.401 MHz*

BC10 High Channel (Ch. 676)



ERP

ERP Using Substitution Method								
Date: 19-Feb-14		Company: Airvana			Work Order: 00319			
Engineer: Arik Zwirner		EUT Desc: 750722			EUT Operating Voltage/Frequency: 120Vac/60Hz			
Temp: 21°C		Humidity: 19%			Pressure: 1007mbar			
Frequency Range: 862-869MHz, FCC Part 90					Measurement Distance: 3 m			
Notes: Band Class 10 (BC10) is under test. 20dBW = 100W = 50dBm								
Antenna Polarization (H/V)	Frequency (MHz)	Signal Generator Power Output (dBm)				FCC 90.635 (b)		
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted ERP (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
Channel 476			---	---	---	---	---	---
H	862.9	4.2	0.9	0.0	3.3	50.0	-46.7	Pass
V	862.9	5.8	0.9	0.0	4.9	50.0	-45.1	Pass
Channel 576			---	---	---	---	---	---
H	865.4	2.1	0.9	0.0	1.2	50.0	-48.8	Pass
V	865.4	5.4	0.9	0.0	4.5	50.0	-45.5	Pass
Channel 676			---	---	---	---	---	---
H	867.9	1.7	0.9	0.0	0.8	50.0	-49.2	Pass
V	867.9	3.9	0.9	0.0	3.0	50.0	-47.0	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820 (Sweeper)			Receive Cable: EMIR-03		
Analyzer: Rental #1			Receive Antenna: Green			Transmit Cable: Asset 1785		
Transmit Antenna: Dipole, Asset 756								



Emission Mask

LIMITS

47 CFR 90.961:

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10} (f/6.1)$ decibels or $50 + 10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

MEASUREMENTS / RESULTS

Spectrum Analyzer settings:

Resolution Bandwidth: 30kHz
Video Bandwidth: 300kHz
Peak detector

Emission Mask:


The following limits are applied in the spectral plots:

Attenuation within 37.5kHz of band: $50 + 10 \text{ Log}(P)$, resulting in -20dBm

Attenuation beyond 37.5kHz from band: $43 + 10 \text{ Log}(P)$, resulting in -13dBm




PLOTS

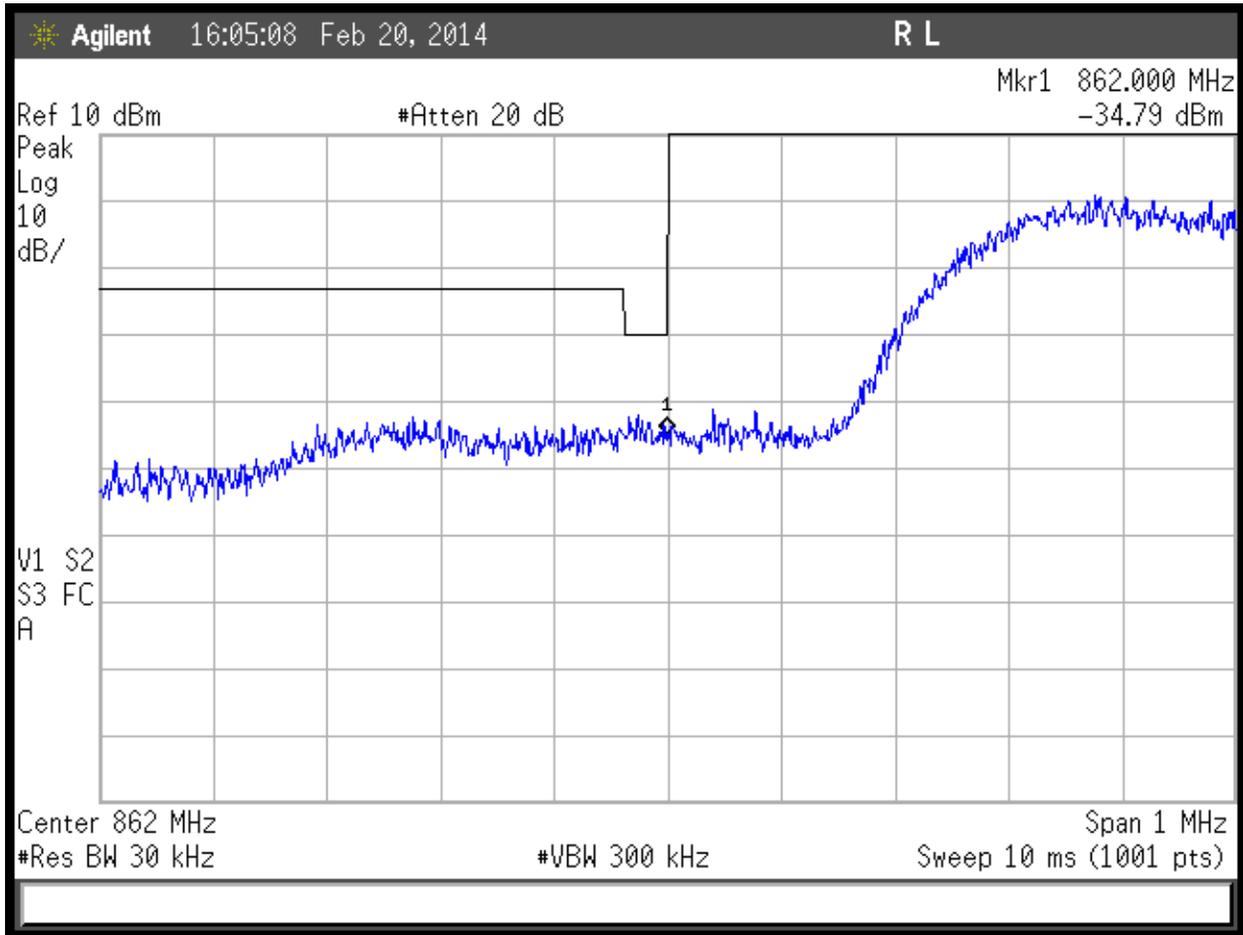

BC10 Low Channel



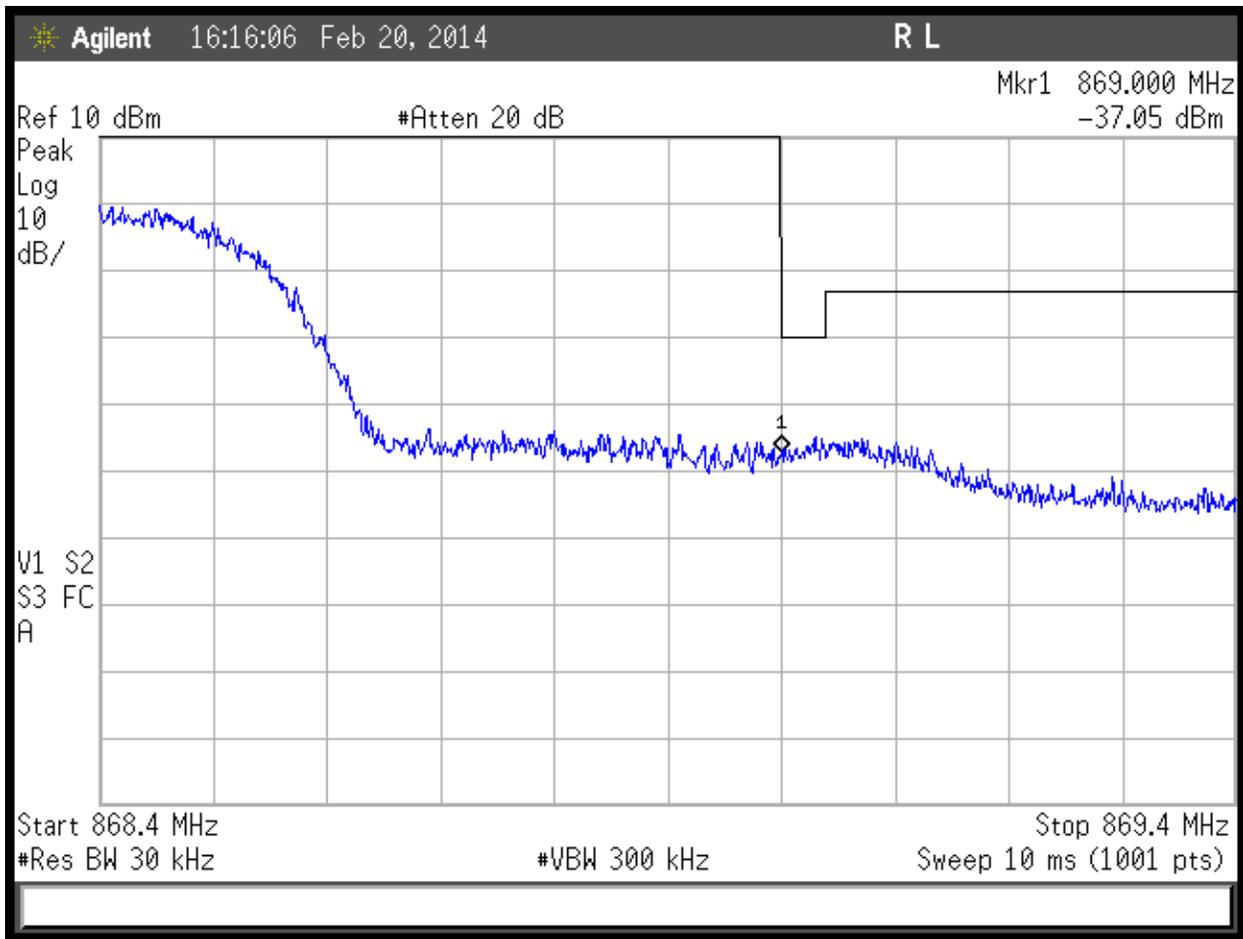

BC10 High Channel




Conducted Spurious Emissions at Antenna Port **LIMITS**

90.669 Emission limits.

(a) On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 plus $10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation.


$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$

PLOTS

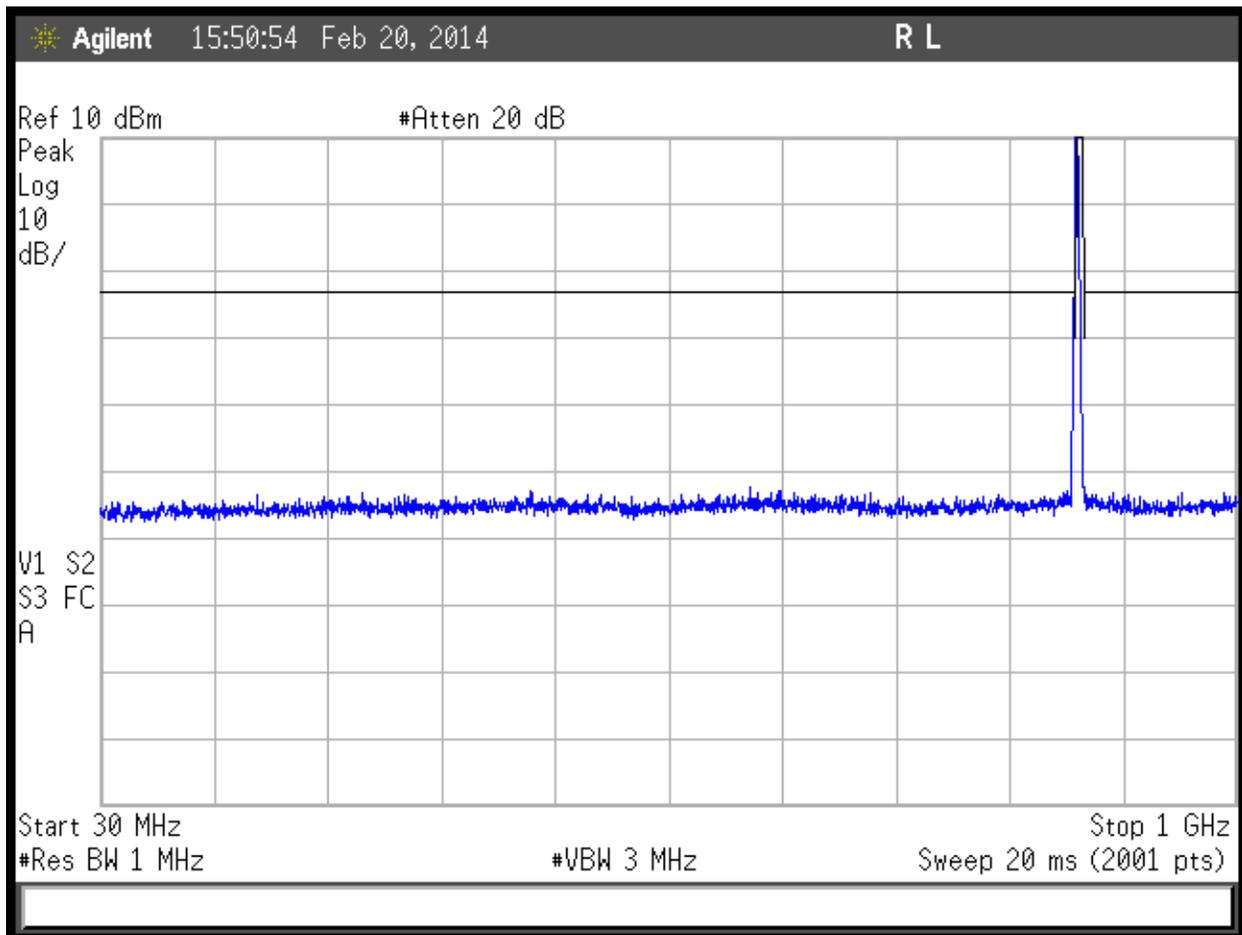


BC10, 30MHz to 1GHz



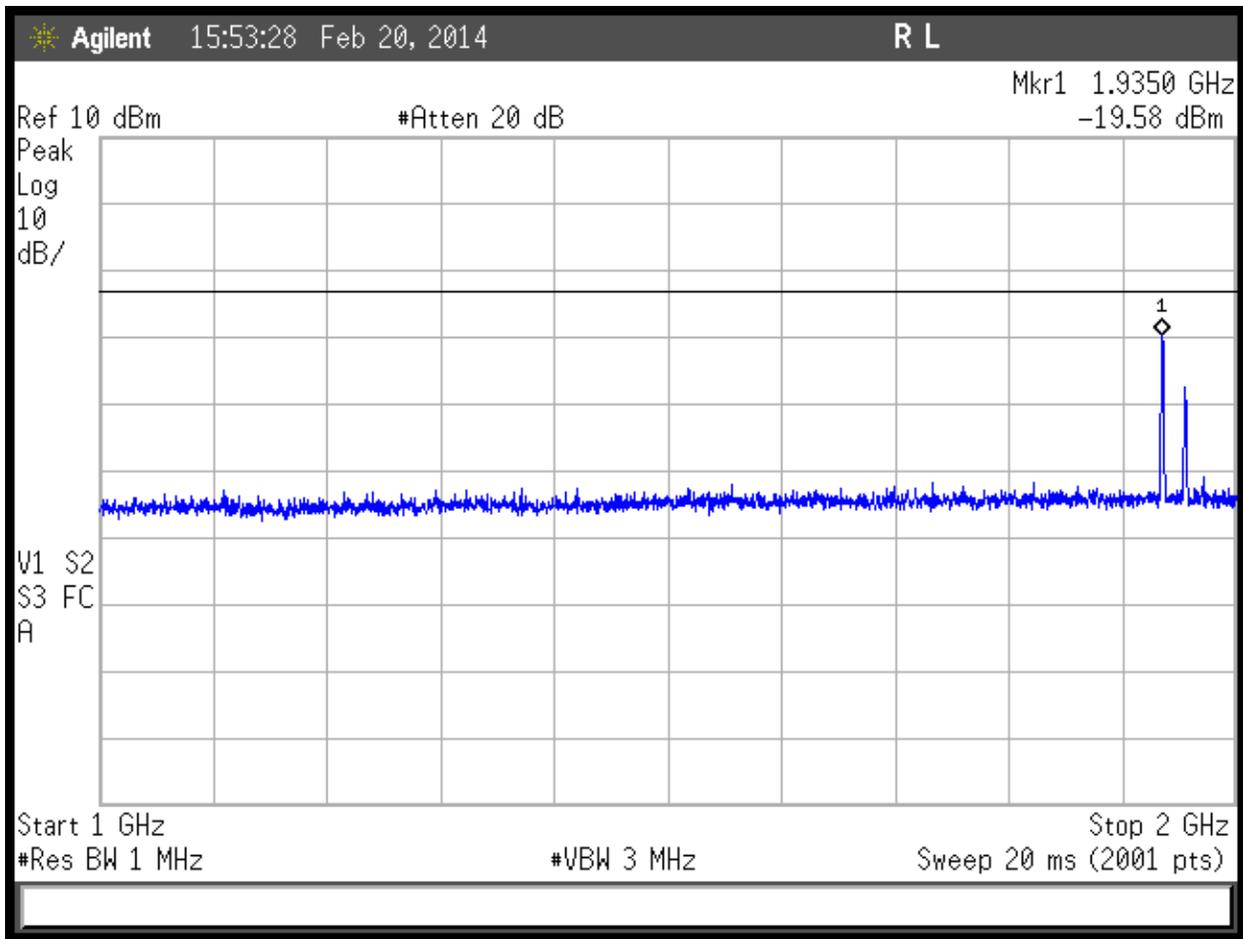


BC10, 1-2GHz



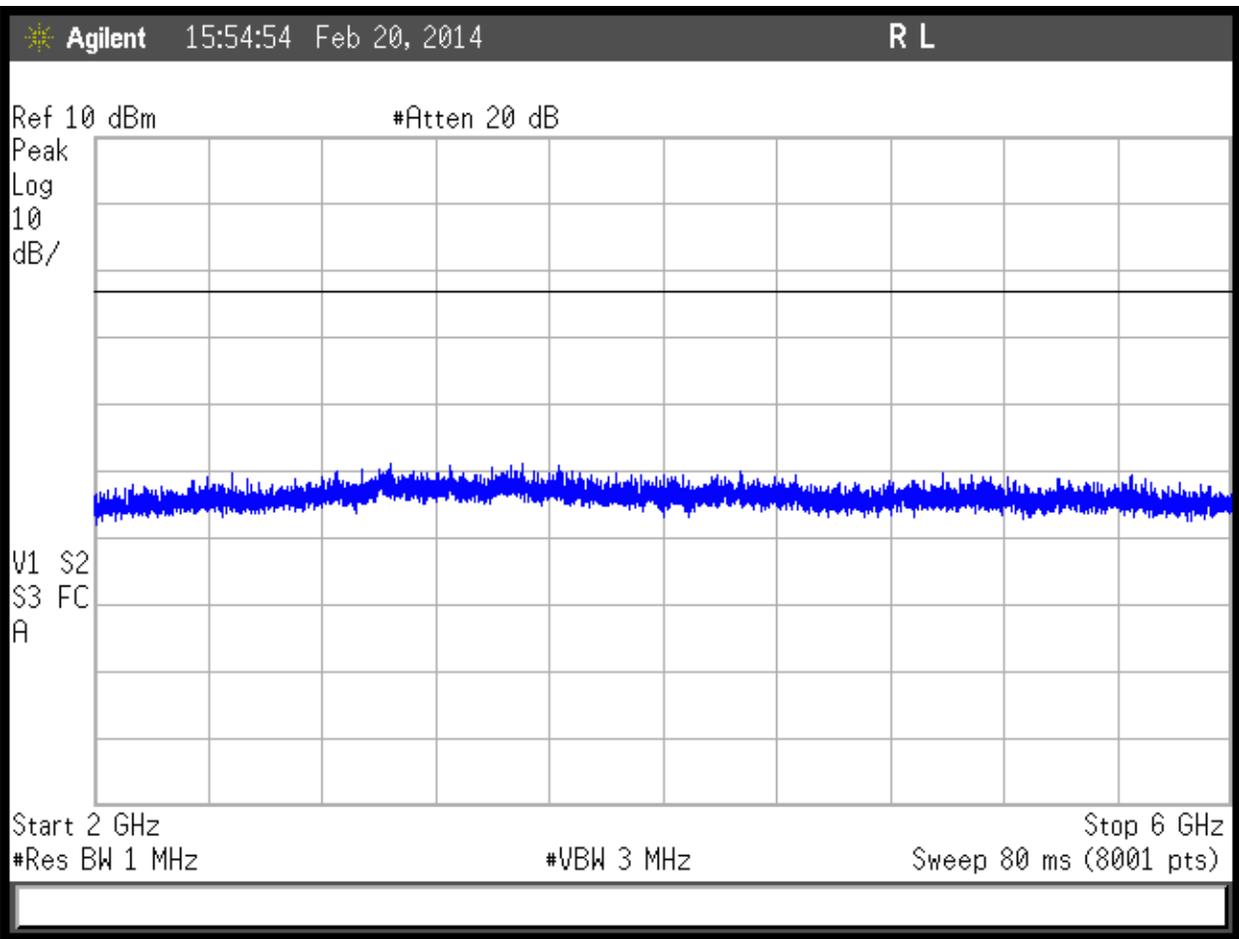

BC10, 2-6GHz



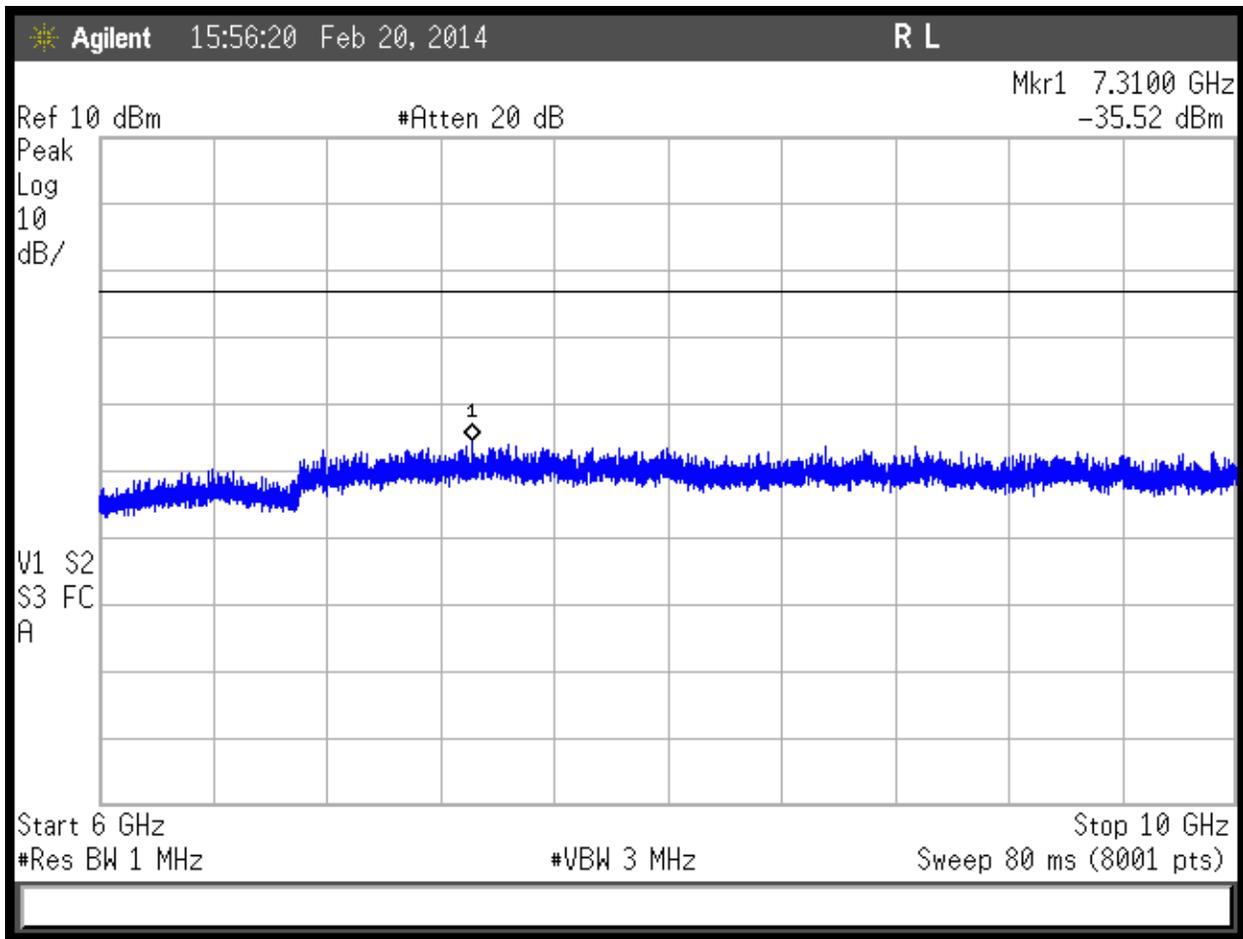


BC10, 6-10GHz




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



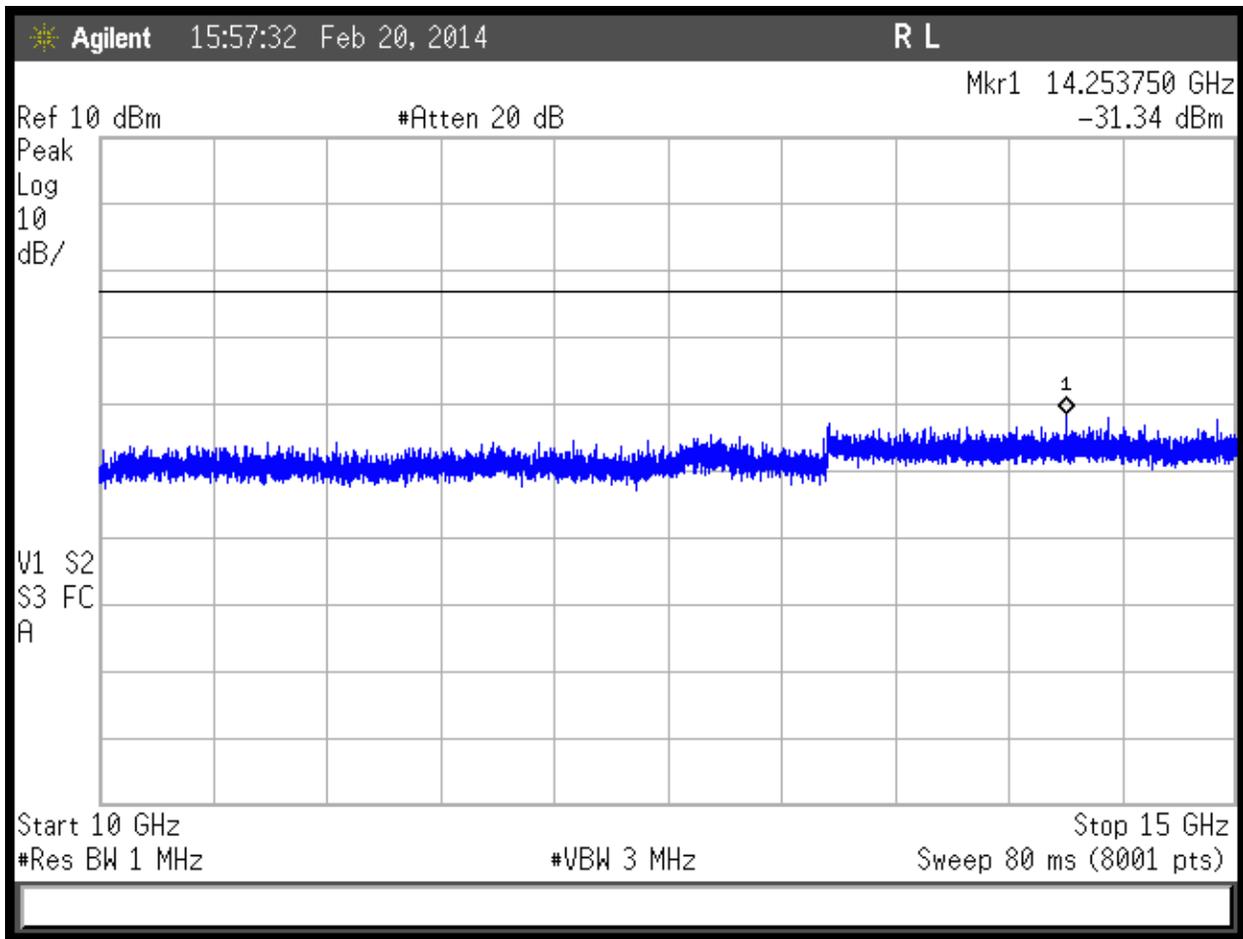

BC10, 10-15GHz



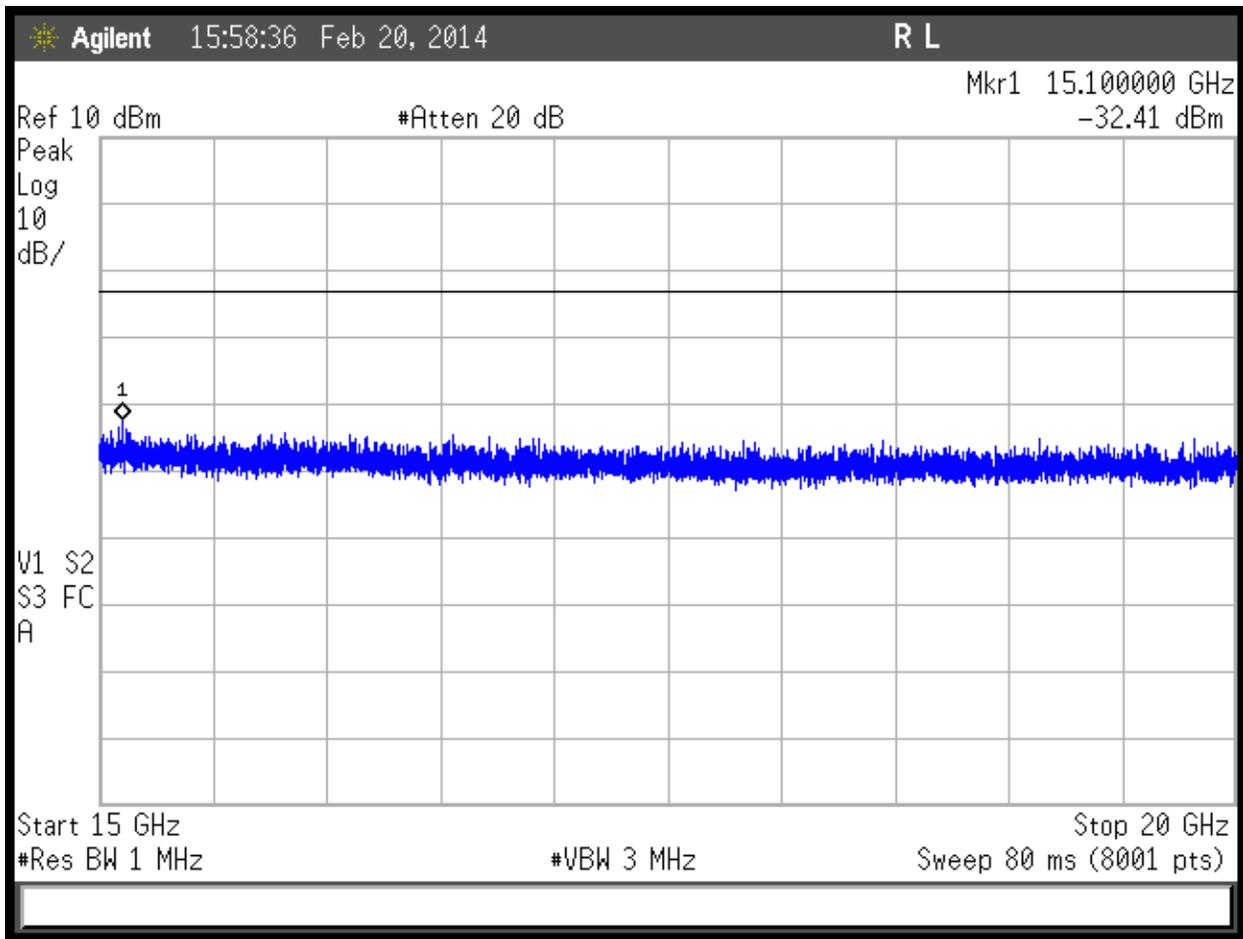

BC10, 15-20GHz



Tests for Parts 22, 24, & 90: Spurious Emissions and Frequency Stability

Radiated Spurious Emissions Measurements

MEASUREMENTS / RESULTS

Note that the EUT passes the FCC Class B limit, which is much lower than the -13dBm limit (82.158dBuV/m at 3 meters) for licensed transmitter spurious emissions. Only worst-case radiated spurious data is presented.

Radiated Emissions Table												
Date: 21-Feb-14			Company: Airvana				Work Order: O0319					
Engineer: Arik Zwimer			EUT Desc: 750722				EUT Operating Voltage/Frequency: 120Vac/60Hz					
Temp: 25°C			Humidity: 2%				Pressure: 1009mBar					
Frequency Range: 30-1000MHz						Measurement Distance: 3 m						
Notes:												EUT Max Freq: 1988.75MHz
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBuV/m)	---			FCC Class B		
							Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
V	42.0	44.0	25.4	12.2	0.4	31.2	---	---	---	40.0	-8.8	Pass
V	43.8	51.8	25.4	10.9	0.4	37.7	---	---	---	40.0	-2.3	Pass
V	45.7	49.8	25.4	9.9	0.4	34.7	---	---	---	40.0	-5.3	Pass
V	71.0	46.6	25.4	8.5	0.5	30.2	---	---	---	40.0	-9.8	Pass
V	75.0	45.3	25.4	8.6	0.6	29.1	---	---	---	40.0	-10.9	Pass
V	90.5	44.6	25.4	7.8	0.7	27.7	---	---	---	43.5	-15.8	Pass
V	139.7	45.9	25.4	13.0	0.6	34.1	---	---	---	43.5	-9.4	Pass
V	230.0	44.4	25.4	11.2	1.1	31.3	---	---	---	46.0	-14.7	Pass
H	250.0	48.0	25.3	11.6	1.0	35.3	---	---	---	46.0	-10.7	Pass
V	375.0	47.7	24.5	15.1	1.3	39.6	---	---	---	46.0	-6.4	Pass
V	500.0	45.1	25.5	17.7	1.3	38.6	---	---	---	46.0	-7.4	Pass
V	625.0	45.6	25.2	19.3	1.7	41.4	---	---	---	46.0	-4.6	Pass
V	750.0	43.4	23.6	20.8	1.9	42.5	---	---	---	46.0	-3.5	Pass
H	800.0	36.1	24.7	21.3	1.8	34.5	---	---	---	46.0	-11.5	Pass
H	875.0	43.3	25.4	22.1	2.1	42.1	---	---	---	46.0	-3.9	Pass
H	1000.0	33.9	24.4	23.2	2.2	34.9	---	---	---	54.0	-19.1	Pass
Table Result: Pass by -2.3 dB Worst Freq: 43.8 MHz												
Test Site: EMI Chamber 1			Cable 1: Asset #1782				Cable 2: Asset #1784					
Analyzer: Gold			Preamp: Red-White				Antenna: Red-Black					

Radiated Emissions Table															
Date: 21-Feb-14			Company: Airvana				Work Order: O0319								
Engineer: Arik Zwimer			EUT Desc: 750722				EUT Operating Voltage/Frequency: 120Vac/60Hz								
Temp: 25°C			Humidity: 2%				Pressure: 1009mBar								
Frequency Range: 1-9GHz						Measurement Distance: 3 m									
Notes:														EUT Max Freq: 889.2MHz	
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBuV/m)	Adjusted Avg Reading (dBuV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	
BC0 set to middle channel (320)															
V	1077.0	66.5	49.2	44.3	24.4	2.2	48.8	31.5	---	74.0	-25.2	Pass	54.0	-22.5	Pass
V	1109.0	67.6	48.7	44.4	24.6	2.2	50.0	31.1	---	74.0	-24.0	Pass	54.0	-22.9	Pass
BC10 set to low channel (476)															
V	1129.0	56.7	42.8	44.5	24.7	2.3	39.2	25.3	---	74.0	-34.8	Pass	54.0	-28.7	Pass
Table Result: Pass by -22.5 dB Worst Freq: 1077.0 MHz															
Test Site: EMI Chamber 1			Cable 1: Asset #1782				Cable 2: Asset #1784								
Analyzer: Rental SA#1			Preamp: Red-Blue				Antenna: Yellow Horn								



Radiated Emissions Table															
Date: 21-Feb-14				Company: Airvana				Work Order: O0319							
Engineer: Arik Zwimer				EUT Desc: 750722				EUT Operating Voltage/Frequency: 120Vac/60Hz							
Temp: 25°C				Humidity: 2%				Pressure: 1009mBar							
Frequency Range: 1-18GHz								Measurement Distance: 3 m							
Notes: EVDO BC1 on middle channel (525); One-X BC1 on high channel (1175); Beacon BC1 on low (25).								EUT Max Freq: 1988.75MHz							
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	
H	1089.0	57.3	45.8	44.3	24.5	2.1	39.6	28.1	74.0	-34.4	Pass	54.0	-25.9	Pass	
H	1125.0	58.1	49.2	44.4	24.7	2.3	40.7	31.8	74.0	-33.3	Pass	54.0	-22.2	Pass	
V	1131.0	55.7	47.8	44.5	24.7	2.3	38.2	30.3	74.0	-35.8	Pass	54.0	-23.7	Pass	
H	1375.0	56.7	49.4	44.3	25.1	2.5	40.0	32.7	74.0	-34.0	Pass	54.0	-21.3	Pass	
H	2800.0	50.6	42.2	42.2	28.7	3.6	40.7	32.3	74.0	-33.3	Pass	54.0	-21.7	Pass	
V	5800.0	56.2	36.6	39.7	34.1	6.2	56.8	37.2	74.0	-17.2	Pass	54.0	-16.8	Pass	
Table Result:		Pass						by			-16.8 dB			Worst Freq: 5800.0 MHz	
Test Site: EMI Chamber 1				Cable 1: Asset #1782				Cable 2: Asset #1784							
Analyzer: Rental SA#1				Preamp: Red-Blue				Antenna: Yellow Horn							

Radiated Emissions Table															
Date: 21-Feb-14				Company: Airvana				Work Order: O0319							
Engineer: Arik Zwimer				EUT Desc: 750722				EUT Operating Voltage/Frequency: 120Vac/60Hz							
Temp: 25°C				Humidity: 2%				Pressure: 1009mBar							
Frequency Range: 18-20GHz								Measurement Distance: 0.1 m							
Notes: EVDO BC1 on middle channel (525); One-X BC1 on high channel (1175); Beacon BC1 on low (25).								EUT Max Freq: 1988.75MHz							
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	
NO EMISSIONS WERE FOUND IN THIS RANGE.															
Table Result:		Pass						by			N/A dB			Worst Freq: N/A MHz	
Test Site: EMI Chamber 1				Cable 1: 40GHz Mixer/18-26.5GHz no cable				Cable 2: Asset #1784							
Analyzer: Gold				Preamp: 18-26.5GHz				Antenna: 18-26.5GHz Horn							



Frequency Stability

REQUIREMENTS

Part 22:

Per 22.355, Table C-1, the frequency stability shall remain within 1.5ppm for this device.

Part 24:

“The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” [24.235]

Part 90:

Per 90.213(a), the frequency stability shall remain within 1.5ppm for this device.

MEASUREMENTS / RESULTS

Frequency Stability			Curtis-Straus LLC
Engineer: Arik Zwirner		Company: Airvana	
Date: 26-Feb-14		EUT: 750722	
Spectrum Analyzer: Rental #1		Work Order: 00319	
Set Frequency: 1,956,250,000 Hz			
Notes: Reference Conditions: 110Vac/60Hz, 20°C			
Temperature (°C)	Supply Voltage (60Hz)	Center Frequency (Hz)	Frequency Deviation (ppm)
-30	110Vac	1956250000	0.0
-20	110Vac	1956250000	0.0
-10	110Vac	1956250000	0.0
0	110Vac	1956250000	0.0
10	110Vac	1956250000	0.0
20	93.5Vac	1956250000	0.0
20	110Vac	1956250000	0.0
20	126.5Vac	1956250000	0.0
30	110Vac	1956250000	0.0
40	110Vac	1956250000	0.0
50	110Vac	1956250000	0.0
<p>The EUT has an intentional transmitter that operates at both 800 and 1900MHz bands. The hardware utilized for both bands is the same while the software controls the different bands. Testing was performed at only the 1900MHz band to satisfy the 800MHz band requirements because a single oscillator is used as the source for both.</p>			



Conducted Spurious Emissions on AC Mains


AC Conducted Emissions Data Table														
Date: 25-Feb-14					Company: Airvana					Work Order: O0319				
Engineer: Anik Zwilmer					EUT Desc: 750722 (Revision 1.07)					Pressure: 1005 mBar				
Temp: 21.0 °C					Humidity: 12%									
Notes:														
Frequency Range: 0.15-30MHz										EUT Input Voltage/Frequency: 120Vac/60Hz				
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC/CISPR Class B			FCC/CISPR Class B		
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)
0.150	36.6	32.5	15.4	12.7	-0.1	-0.1	0.0	-20.4	66.0	-8.8	Pass	56.0	-20.1	Pass
0.180	31.9	30.8	14.8	14.4	-0.1	-0.1	0.0	-20.4	64.5	-12.1	Pass	54.5	-19.2	Pass
0.225	23.5	23.1	6.8	7.5	-0.1	0.0	0.0	-20.4	62.6	-18.6	Pass	52.6	-24.7	Pass
0.325	18.0	14.8	7.4	5.8	-0.1	0.0	-0.1	-20.4	59.6	-21.1	Pass	49.6	-21.7	Pass
3.77	12.2	8.8	5.3	0.5	0.0	0.0	-0.1	-20.4	56.0	-23.3	Pass	46.0	-20.2	Pass
10.90	11.3	6.7	5.1	-0.5	-0.1	-0.1	-0.1	-20.4	60.0	-28.2	Pass	50.0	-24.4	Pass
Result: Pass					Worst Margin: -8.8 dB					Frequency: 0.150 MHz				
Measurement Device: LISN ASSET 1728(Line 1) LISN ASSET 1729(Line 2)					Cable: CEM1-11					Spectrum Analyzer: SA EMI Chamber (1327)				
					Attenuator: 20dB Atten-4					Site: CEMI 6				



Model 750723 Test Data and Results


Tests Specific to Part 22

Bandwidth

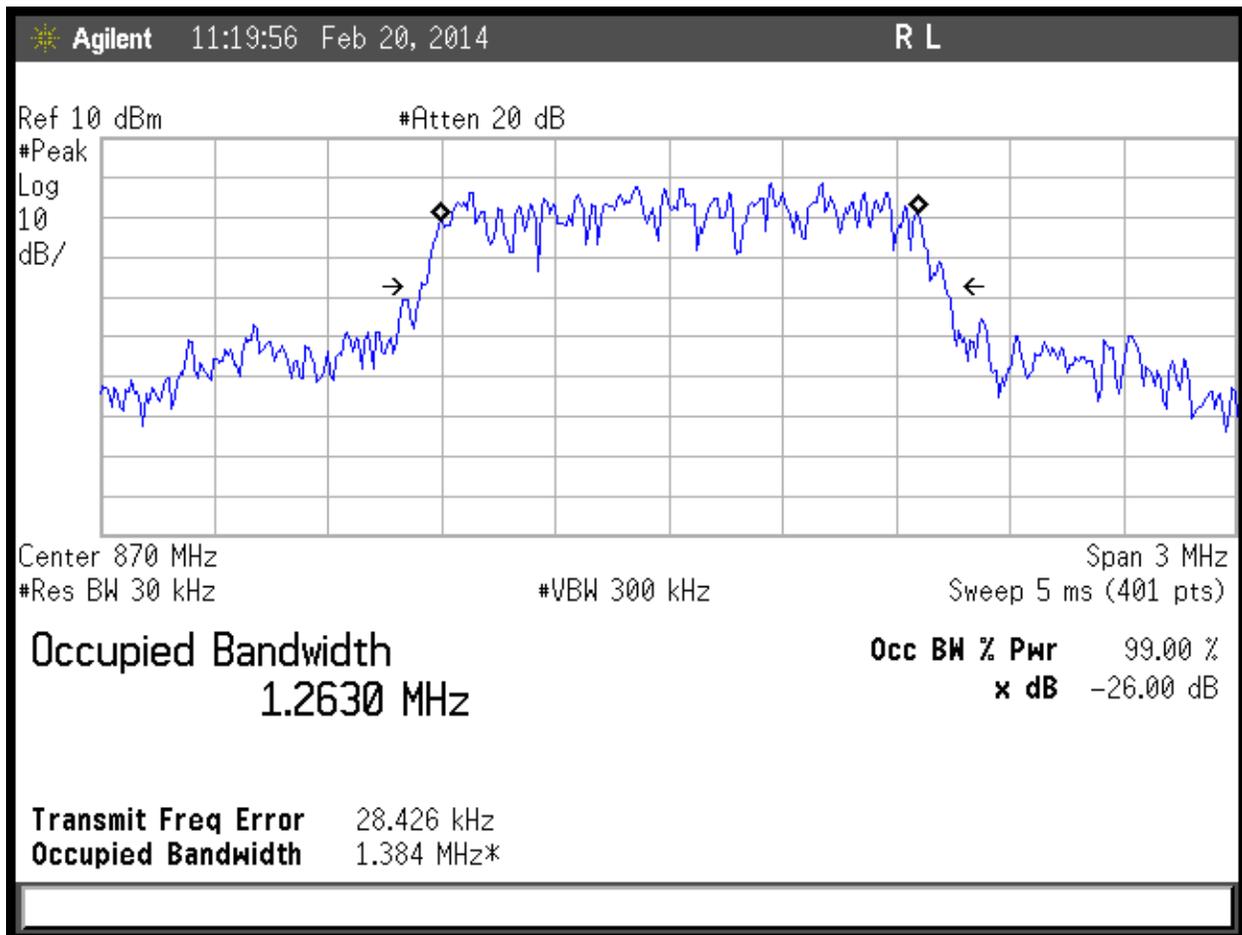

BC0 Low Channel (Ch. 1)



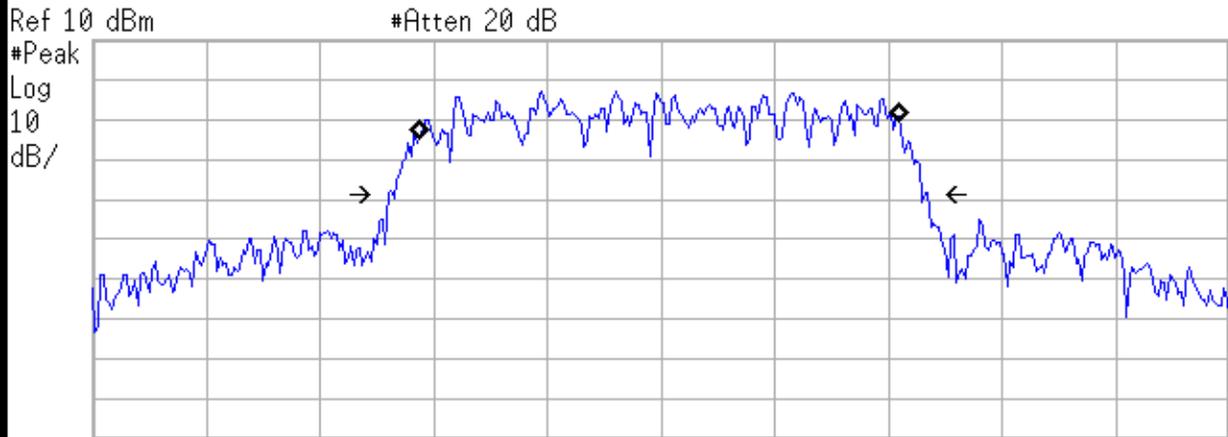

Center 879.6 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2727 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.793 kHz
Occupied Bandwidth 1.427 MHz*

BC0 Mid Channel (Ch. 320)



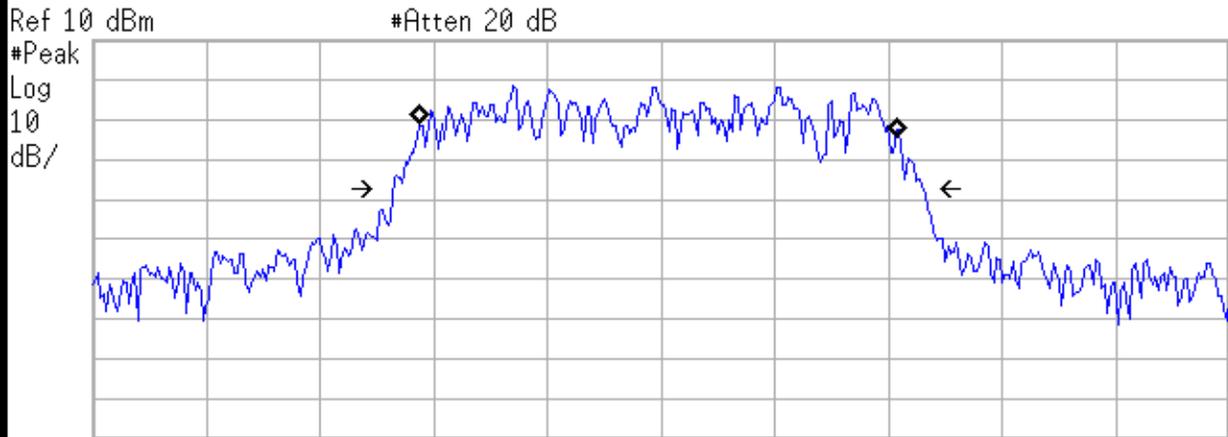

Center 889.2 MHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2556 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -8.082 kHz
Occupied Bandwidth 1.403 MHz*

BC0 High Channel (Ch. 640)



ERP

ERP Using Substitution Method								
Date: 19-Feb-14			Company: Airvana			Work Order: O0320		
Engineer: Arik Zwirner			EUT Desc: 750723			EUT Operating Voltage/Frequency: 120Vac/60Hz		
Temp: 21°C			Humidity: 19%			Pressure: 1007mbar		
Frequency Range: Part 22 ERP measurements					Measurement Distance: 3 m			
Notes: Transmitter mode: Band Class 0 (BC0) 7W =38.45 dBm								
Antenna Polarization (H/V)	Frequency (MHz)	Signal Generator Power Output (dBm)	FCC 22.913 (a)			Limit (dBm)	Margin (dB)	Result (Pass/Fail)
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted ERP (dBm)			
Channel 1			---	---	---	---	---	---
H	870.03	0.3	0.5	0.0	-0.2	38.45	-38.7	Pass
V	870.03	2.5	0.5	0.0	2.0	38.45	-36.5	Pass
Channel 320			---	---	---	---	---	---
H	879.6	0.4	0.5	0.0	-0.1	38.45	-38.6	Pass
V	879.6	5.1	0.5	0.0	4.6	38.45	-33.9	Pass
Channel 640			---	---	---	---	---	---
H	889.2	0.7	0.6	0.0	0.1	38.45	-38.4	Pass
V	889.2	1.8	0.6	0.0	1.2	38.45	-37.3	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820 (Sweeper)			Receive Cable: EMIR-03		
Analyzer: Rental #1			Receive Antenna: Green			Transmit Cable: Asset 1785		
			Transmit Antenna: Dipole, Asset 756					



Band Edge Measurements

LIMITS

§ 22.359 Emission limitations.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

MEASUREMENTS / RESULTS

Limit = $10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$


Note: Mask lines are set to -13dBm at 869MHz and 894MHz.



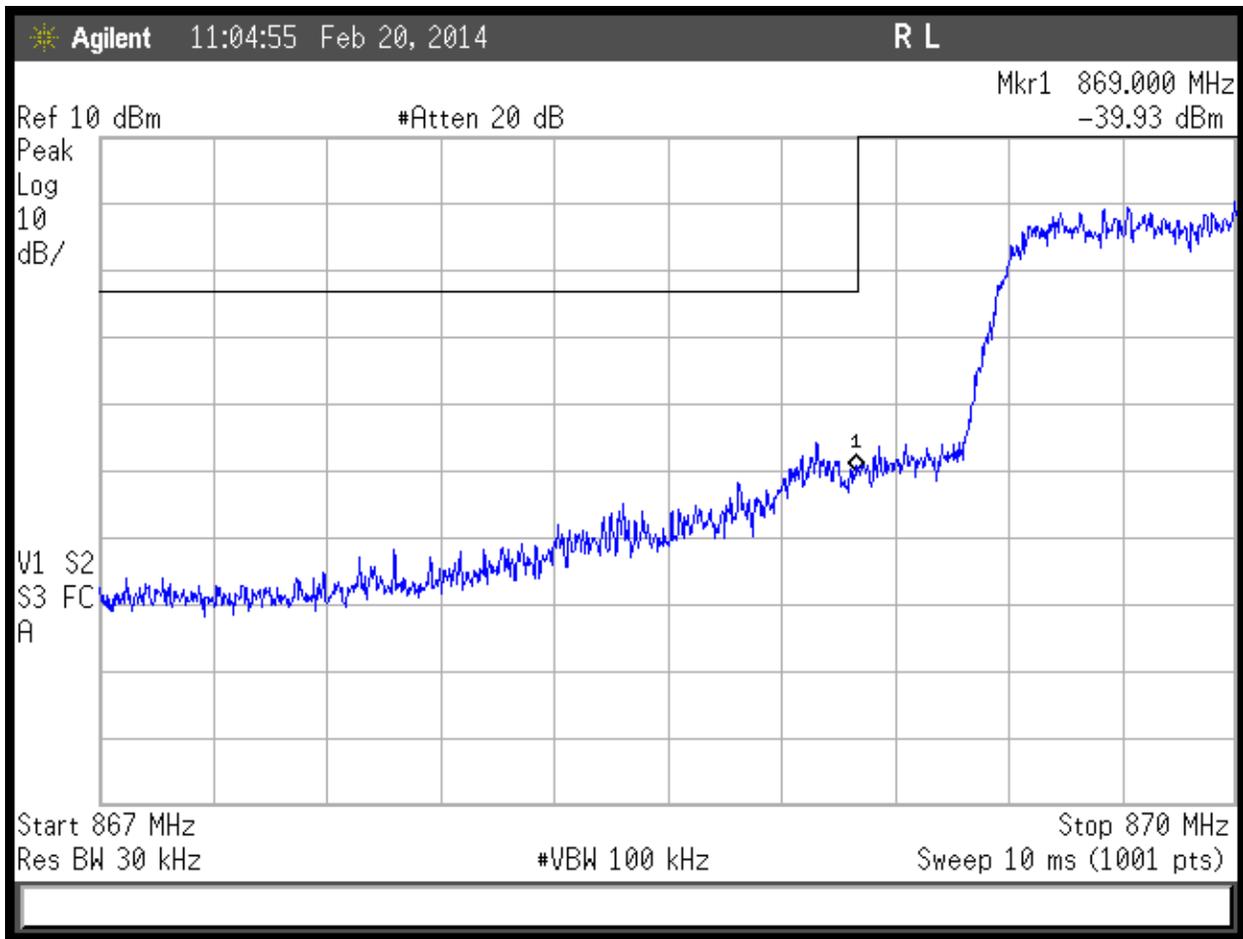

BC0 Low Channel



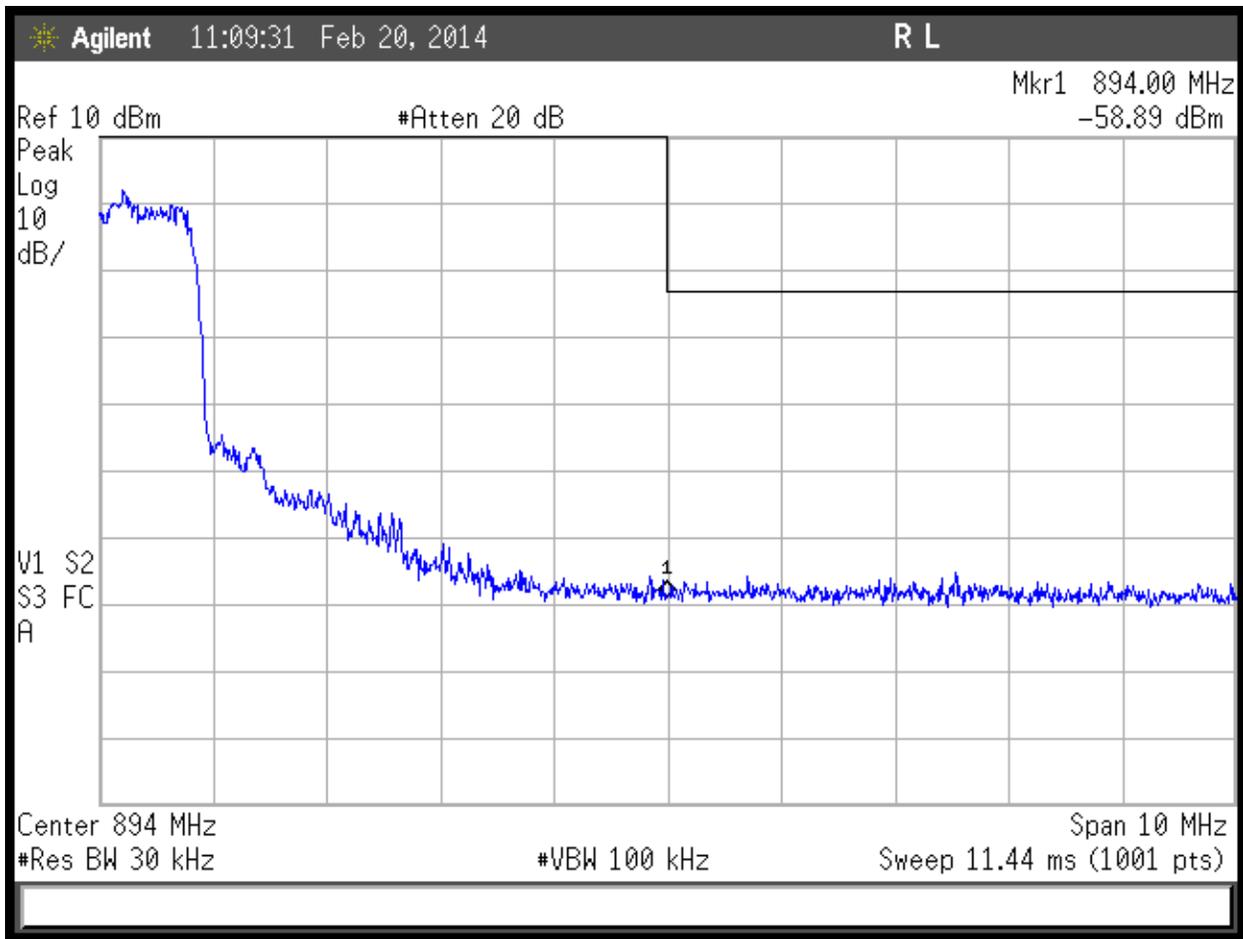

BC0 High Channel



Conducted Spurious Emissions at Antenna Port **LIMITS**

§ 22.359 Emission limitations.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

MEASUREMENTS / RESULTS

Limit = $10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$




PLOTS

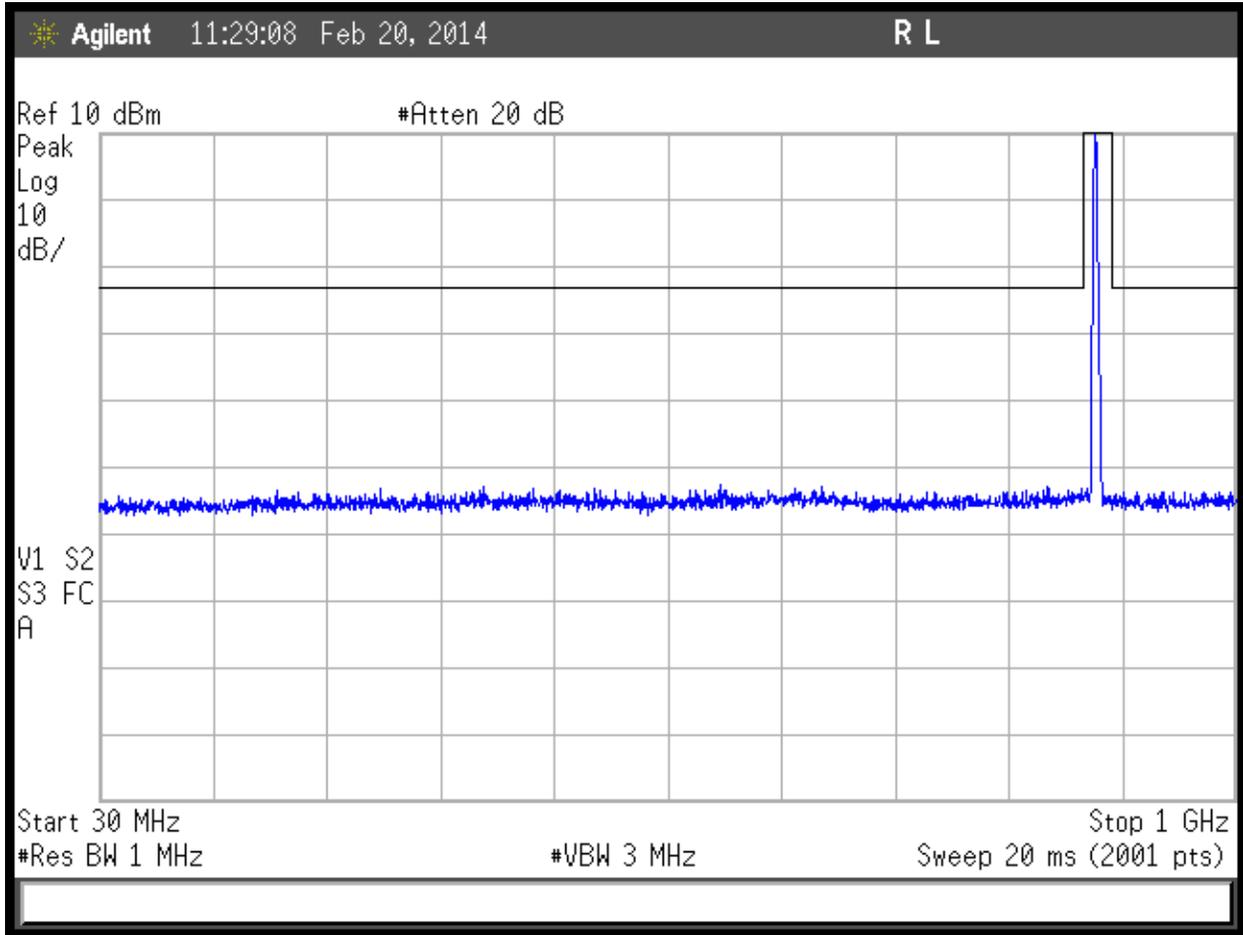


BC0, 30MHz to 1GHz



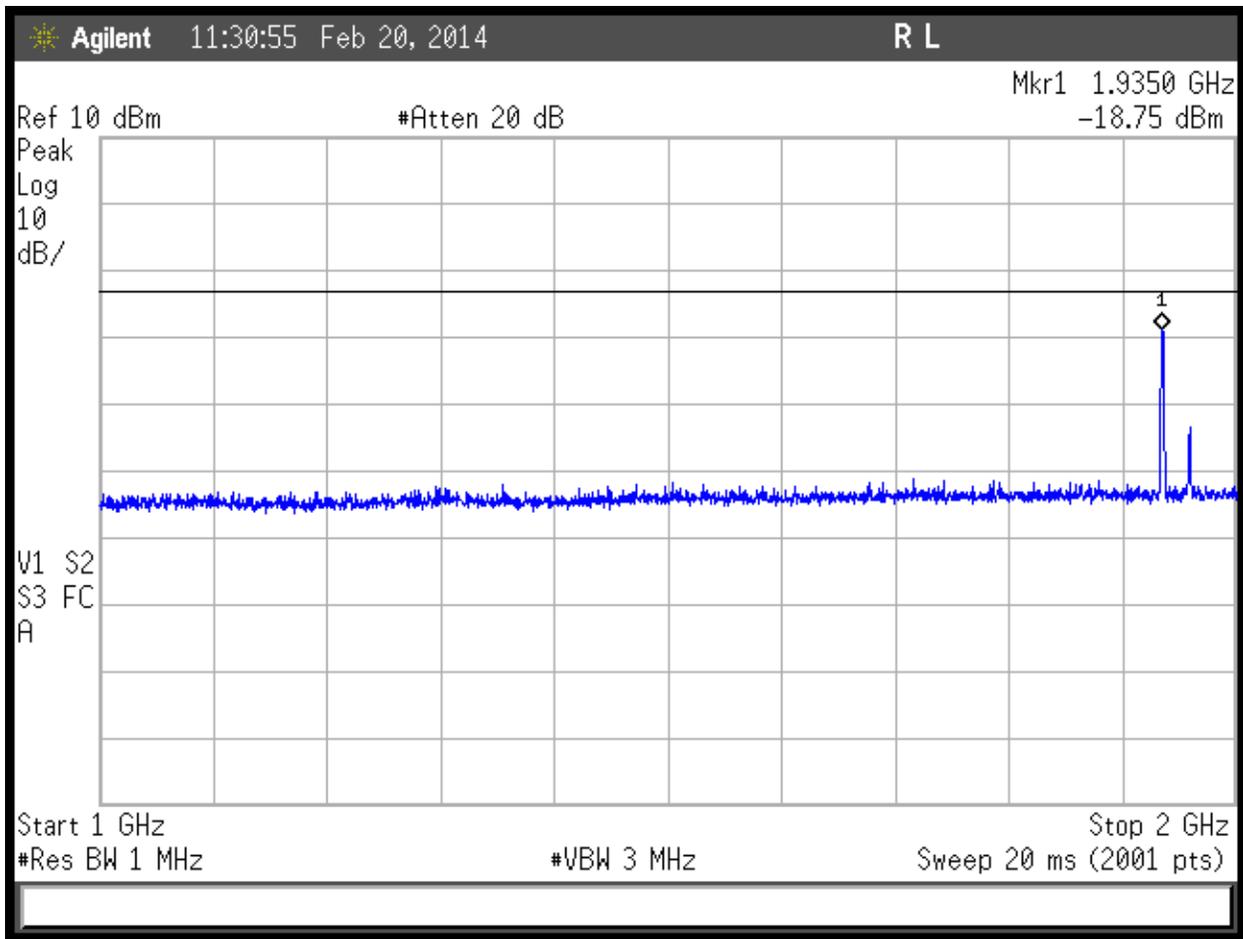


BC0, 1-2GHz



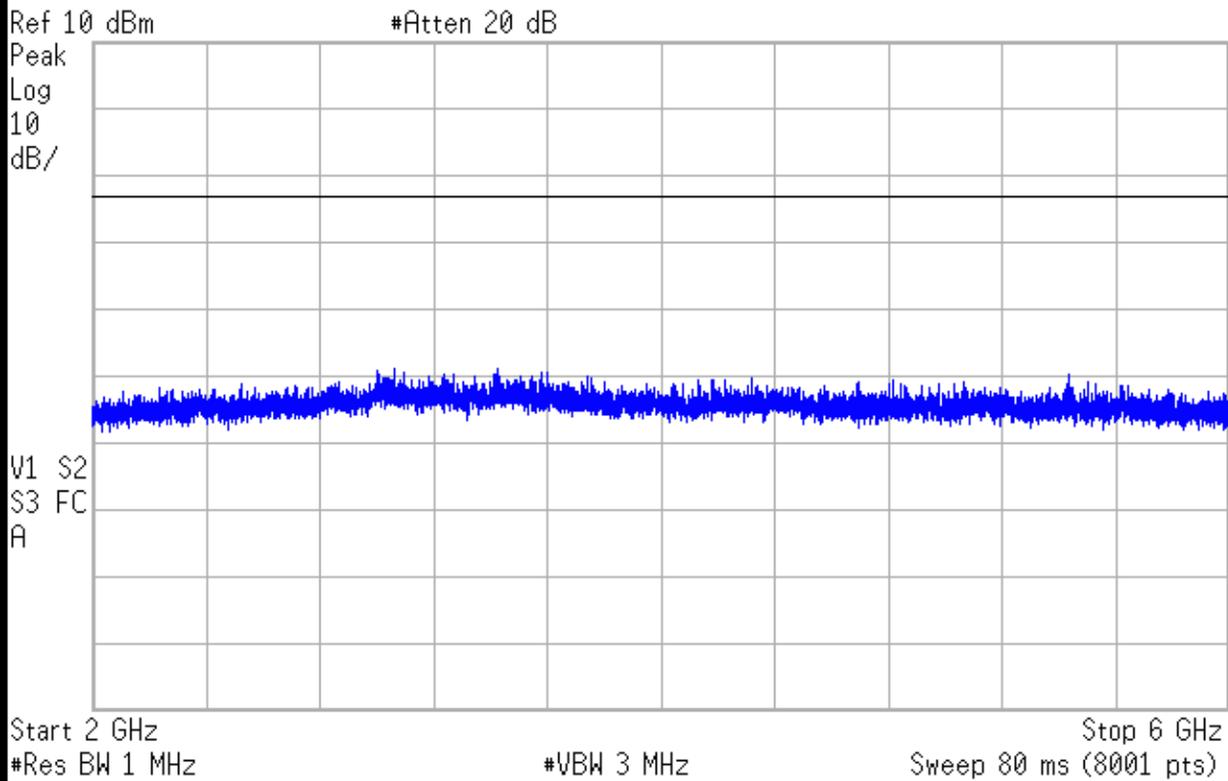


BC0, 2-6GHz




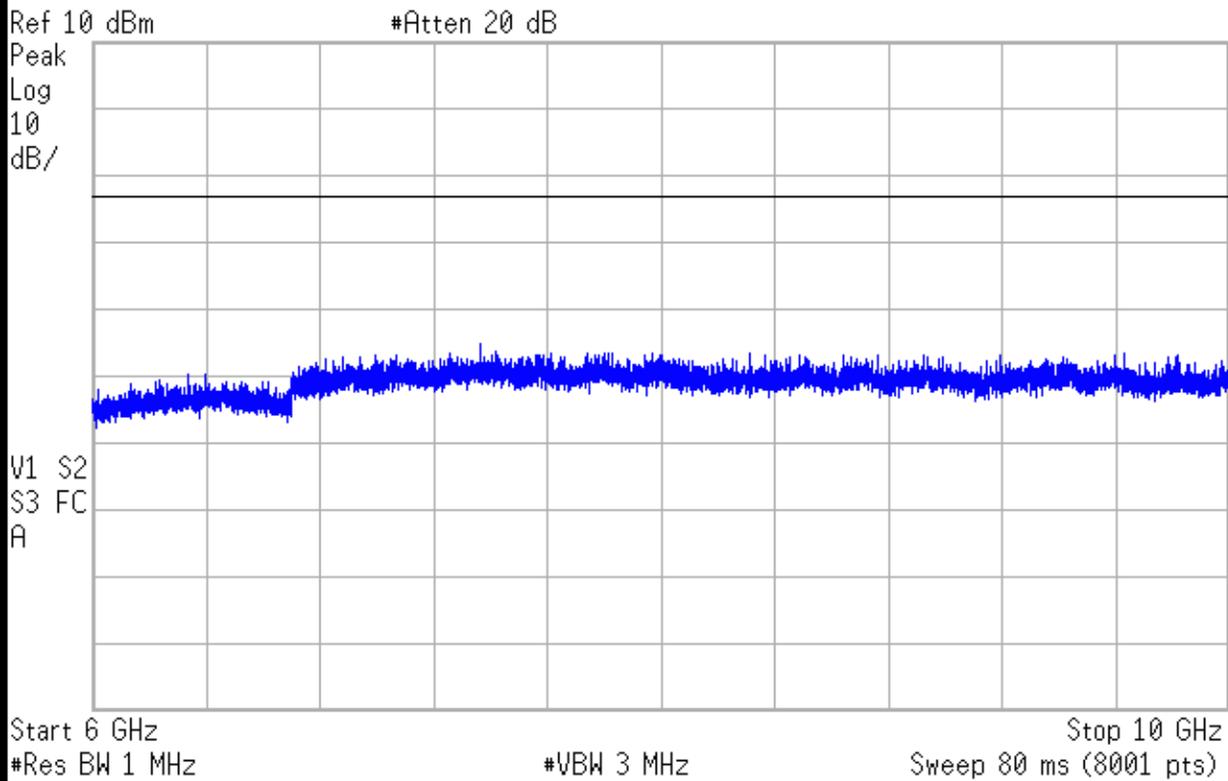

BC0, 6-10GHz



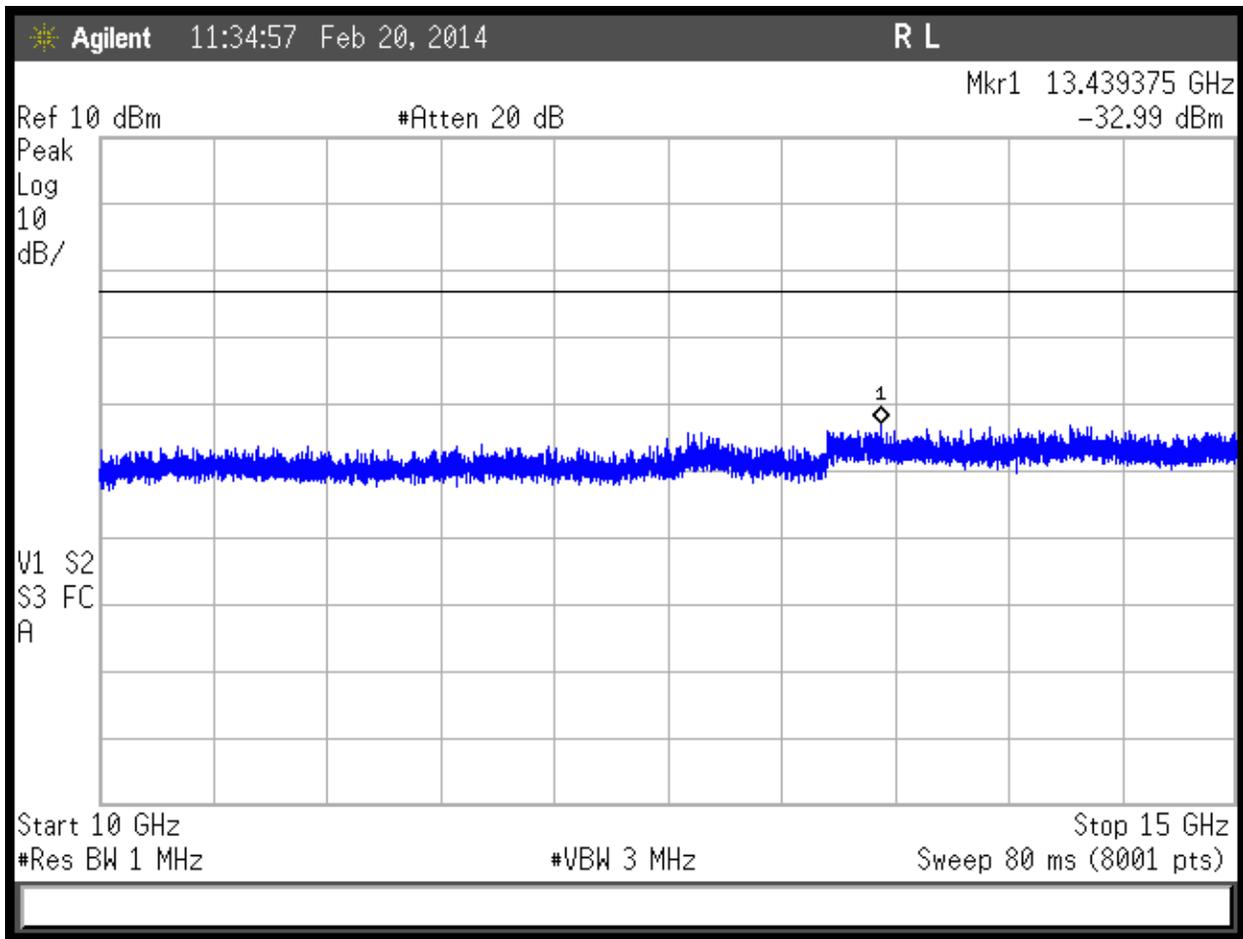

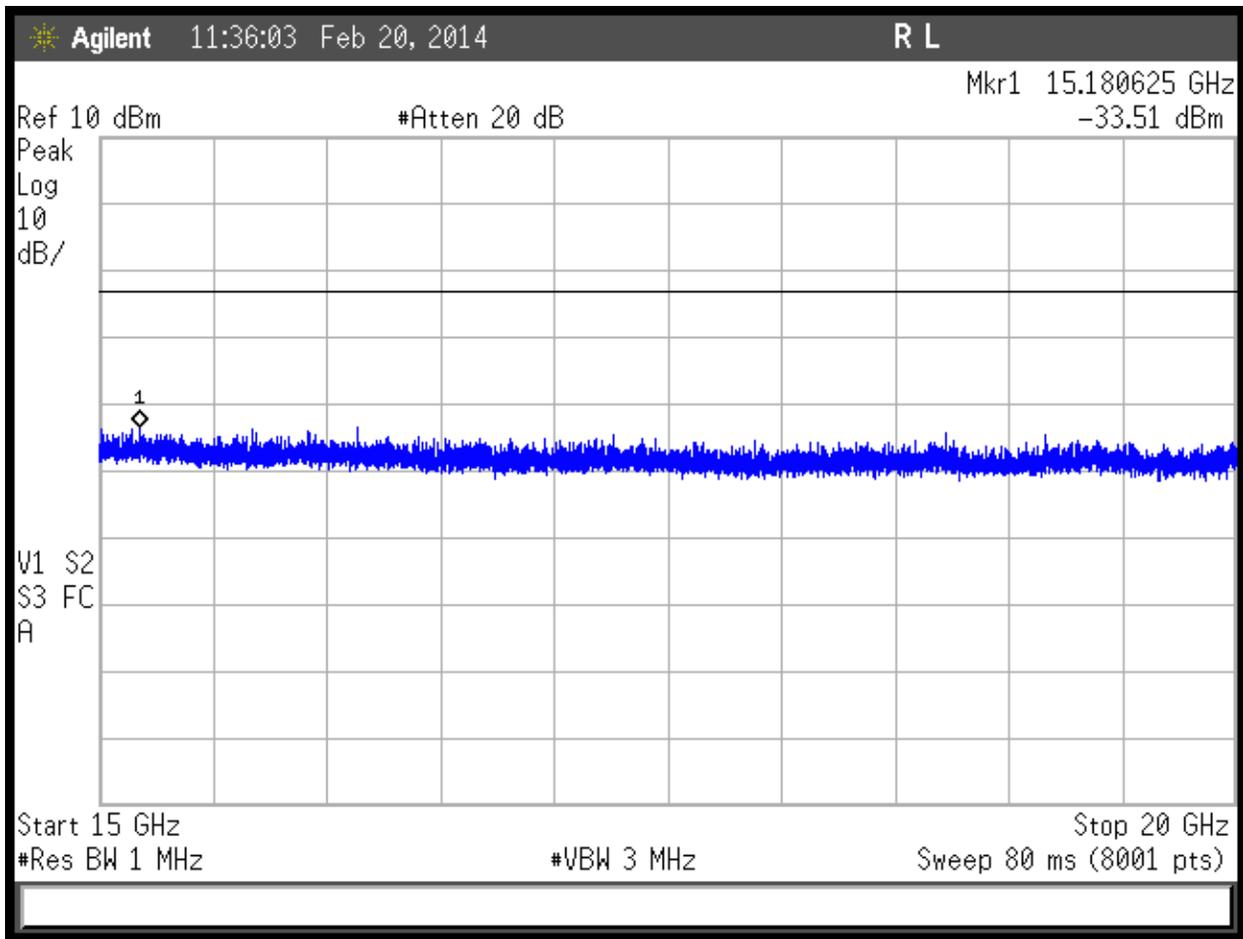

BC0, 15-20GHz



Tests Specific to Part 24

Bandwidth


LIMIT

“The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.” [24.238(b)]

MEASUREMENTS / RESULTS




Beacon BC1:

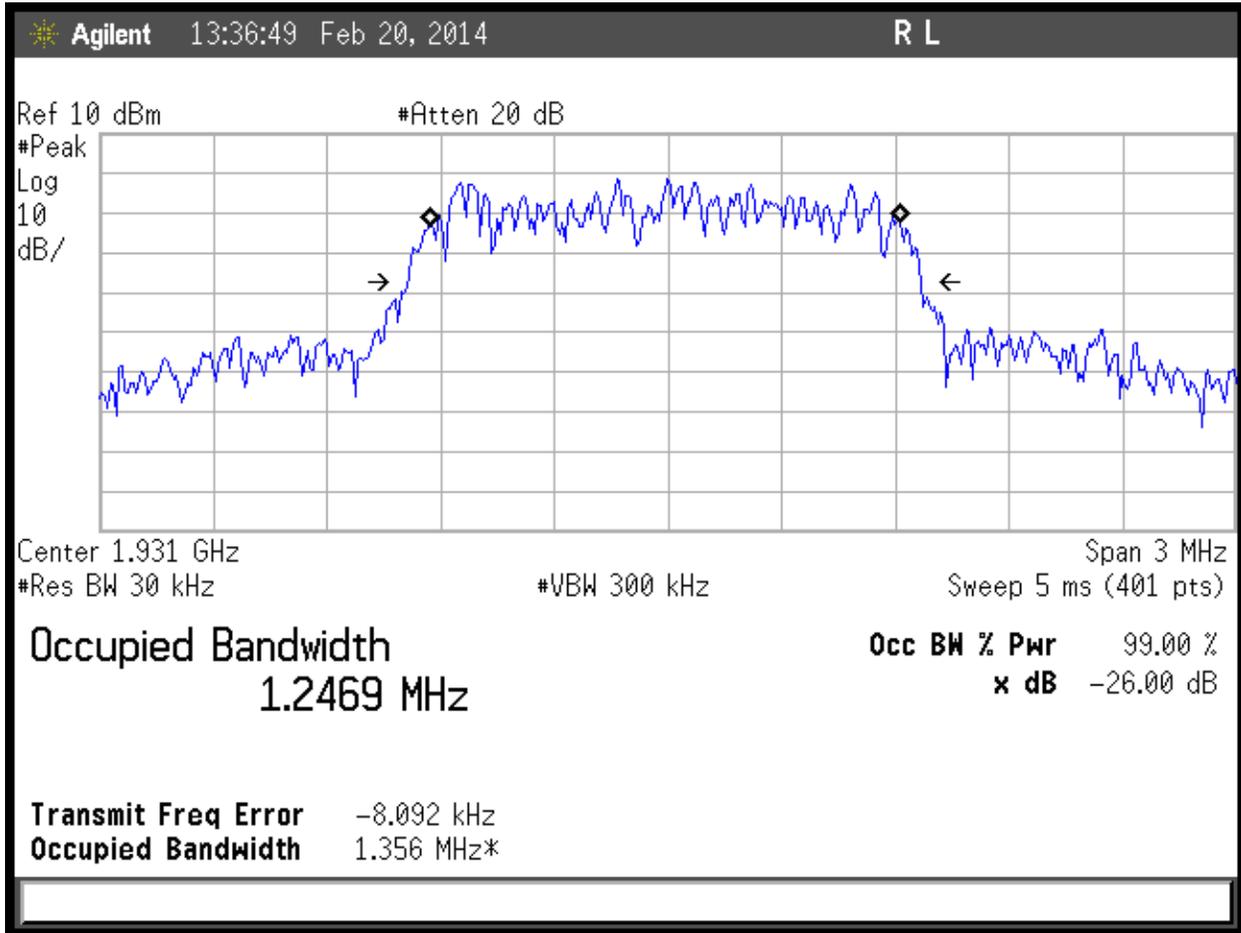

Beacon BC1 Low Channel



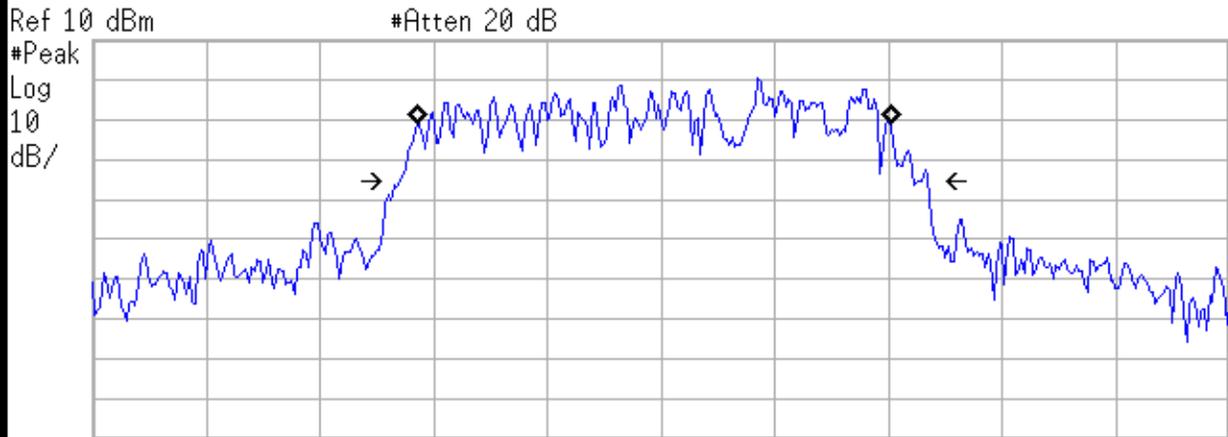

Center 1.956 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2459 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -18.722 kHz
Occupied Bandwidth 1.397 MHz*

Beacon BC1 Mid Channel



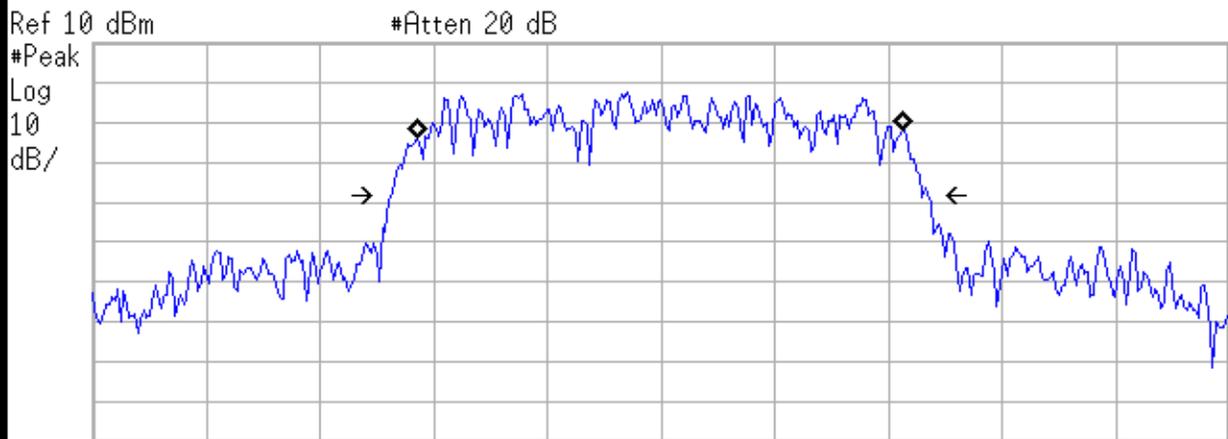

Center 1.989 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2830 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -3.238 kHz
Occupied Bandwidth 1.419 MHz*

Beacon BC1 High Channel




EVDO:

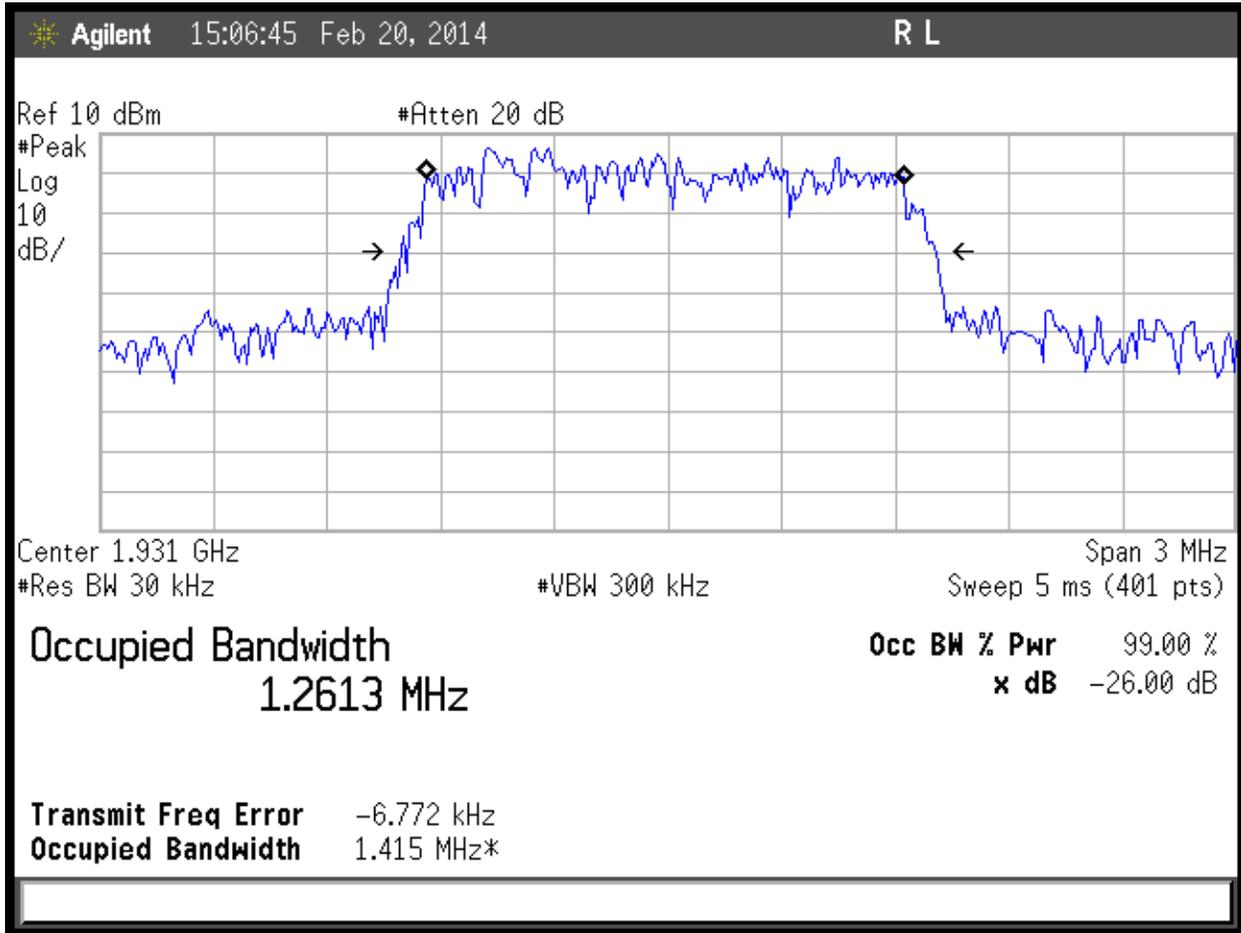

EVDO Low Channel



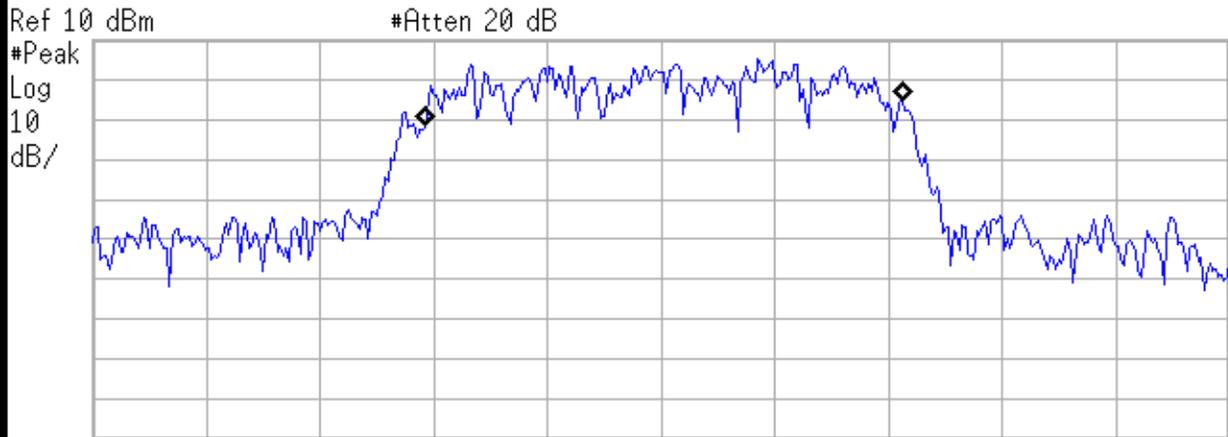

Ref 10 dBm #Atten 20 dB
 #Peak
 Log
 10
 dB/
 Center 1.956 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2581 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 7.092 kHz
x dB Bandwidth 1.416 MHz*

EVDO Mid Channel



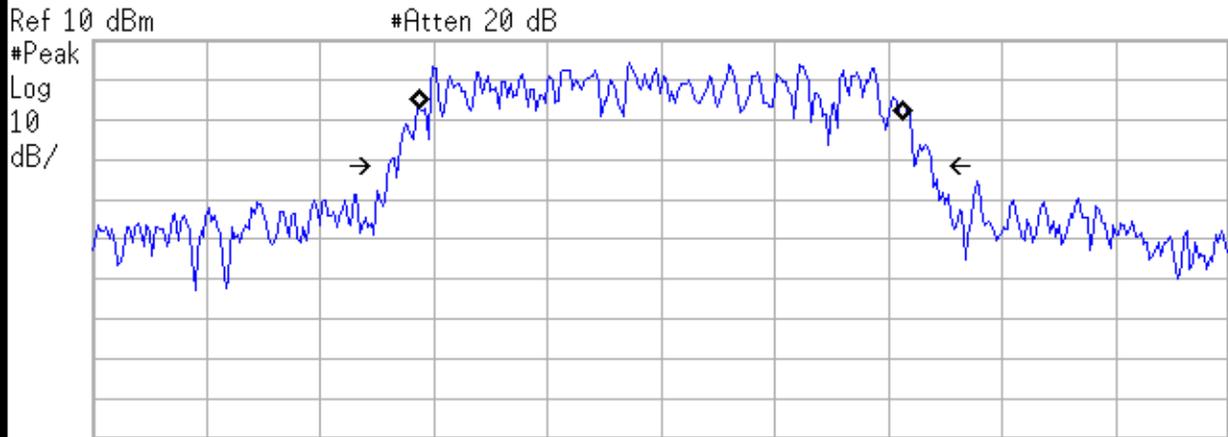

Center 1.989 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2723 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 271.806 Hz
Occupied Bandwidth 1.437 MHz*

EVDO High Channel




One-X:

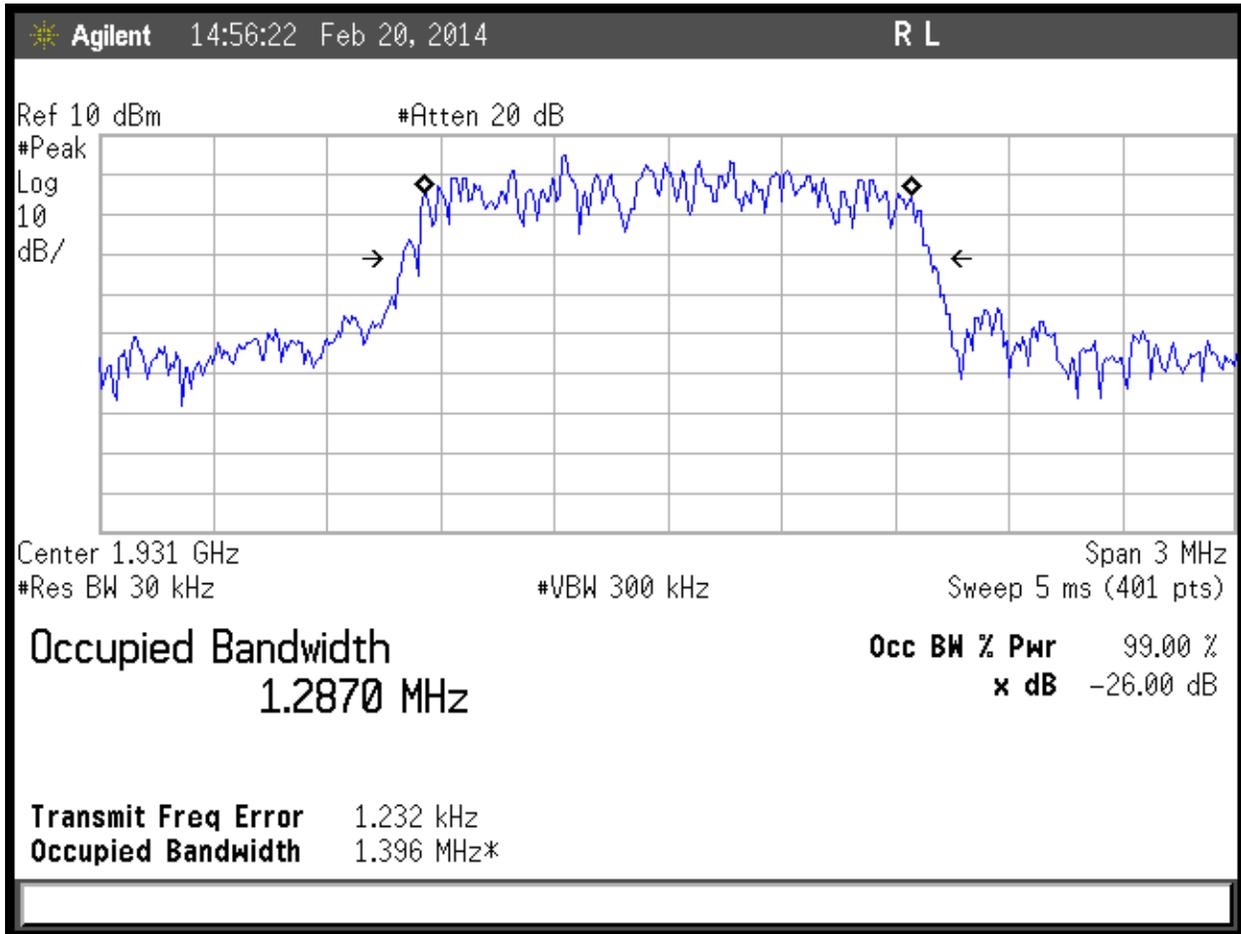

One-X Low Channel



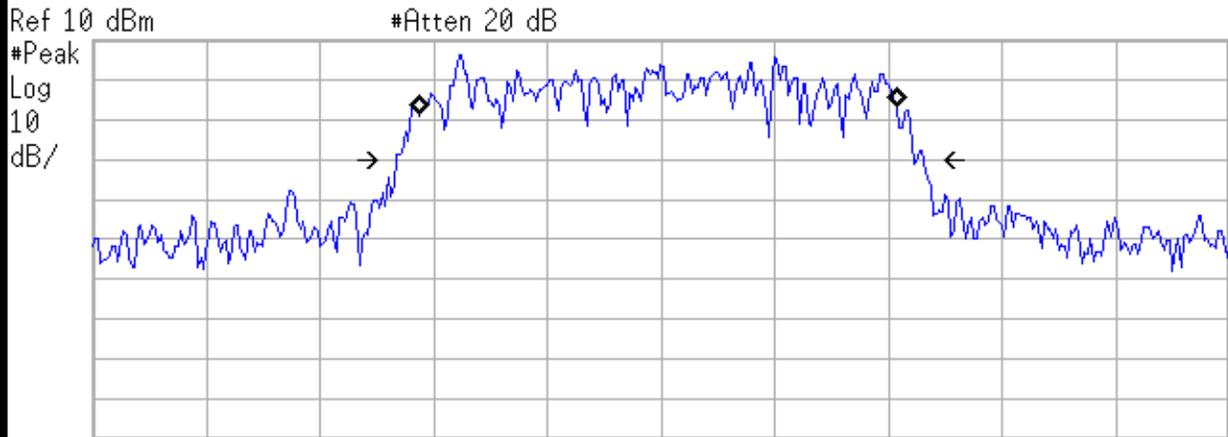

Center 1.956 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2617 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -9.874 kHz
Occupied Bandwidth 1.394 MHz*

One-X Mid Channel



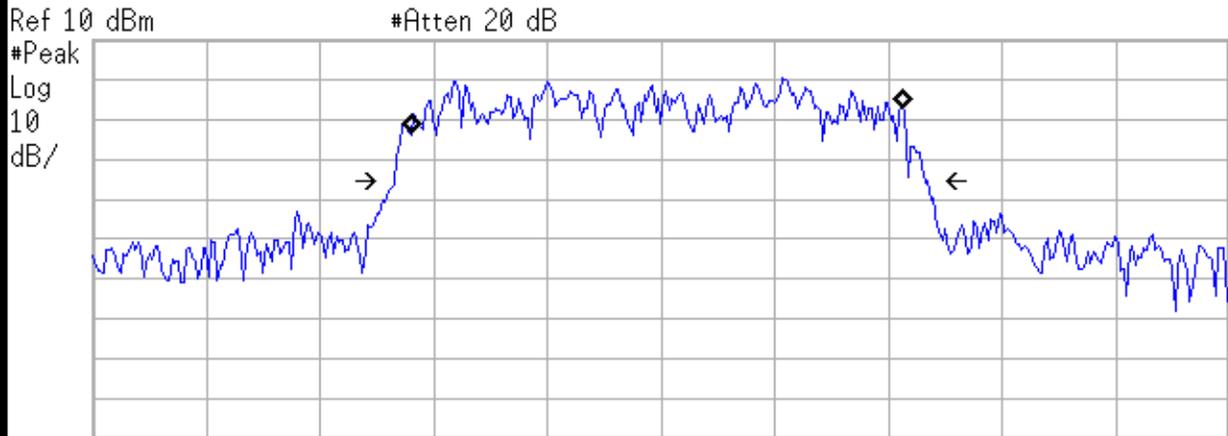

Center 1.989 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.3028 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -11.755 kHz
Occupied Bandwidth 1.410 MHz*

One-X High Channel



EIRP

“Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.”
[24.232 (c)]

EIRP Using Substitution Method								
Date: 05-Nov-13		Company: Airvana			Work Order: O0320			
Engineer: Arik Zwimer		EUT Desc: 750723			EUT Operating Voltage/Frequency: 120Vac/60Hz			
Temp: 21°C		Humidity: 19%			Pressure: 1007mbar			
Frequency Range: Part 24 E, EIRP measurements					Measurement Distance: 3 m			
Notes: Band Class 1 (BC1) transmitters: Beacon, EVDO, and One-X								
Antenna Polarization (H/V)	Frequency (MHz)	Signal Generator Power Output (dBm)				FCC 24.232 section c		
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted EIRP (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
Beacon Ch. 25								
H	1931.25	4.5	0.8	7.6	12.9	33.0	-20.1	Pass
V	1931.25	4.4	0.8	7.6	12.8	33.0	-20.2	Pass
Beacon Ch. 525								
H	1956.25	6.1	0.7	7.6	14.4	33.0	-18.6	Pass
V	1956.25	5.6	0.7	7.6	13.9	33.0	-19.1	Pass
Beacon Ch. 1175								
H	1988.75	3.8	0.8	7.7	12.3	33.0	-20.7	Pass
V	1988.75	3.2	0.8	7.7	11.7	33.0	-21.3	Pass
EVDO Ch. 25								
H	1931.25	14.1	0.8	7.6	22.5	33.0	-10.5	Pass
V	1931.25	14.4	0.8	7.6	22.8	33.0	-10.2	Pass
EVDO Ch. 525								
H	1956.25	13.3	0.7	7.6	21.6	33.0	-11.4	Pass
V	1956.25	14.4	0.7	7.6	22.7	33.0	-10.3	Pass
EVDO Ch. 1175								
H	1988.75	12.9	0.8	7.7	21.4	33.0	-11.6	Pass
V	1988.75	15.2	0.8	7.7	23.7	33.0	-9.3	Pass
One-X Ch. 25								
H	1931.25	5.8	0.8	7.6	14.2	33.0	-18.8	Pass
V	1931.25	5.7	0.8	7.6	14.1	33.0	-18.9	Pass
One-X Ch. 525								
H	1956.25	7.0	0.7	7.6	15.3	33.0	-17.7	Pass
V	1956.25	7.3	0.7	7.6	15.6	33.0	-17.4	Pass
One-X Ch. 1175								
H	1988.75	5.4	0.8	7.7	13.9	33.0	-19.1	Pass
V	1988.75	6.7	0.8	7.7	15.2	33.0	-17.8	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820			Receive Cable: EMIR-05		
Analyzer: Brown (Rental #1)			Receive Antenna: Orange Horn			Transmit Cable: Asset 1785		
			Transmit Antenna: Black Horn					

(2 watts = 33 dBm)



Band Edge Measurements

LIMITS

“The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

[24.238(a)]

“A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1MHz or 1 percent of emission bandwidth, as specified).” [24.238(b)]


MEASUREMENTS / RESULTS

Note: Mask lines are set to -13dBm at 1930MHz and 1990MHz.

Spectrum analyzer screen plots for Beacon BC1, EVDO, and One-X are shown on the following pages.




Beacon BC1:

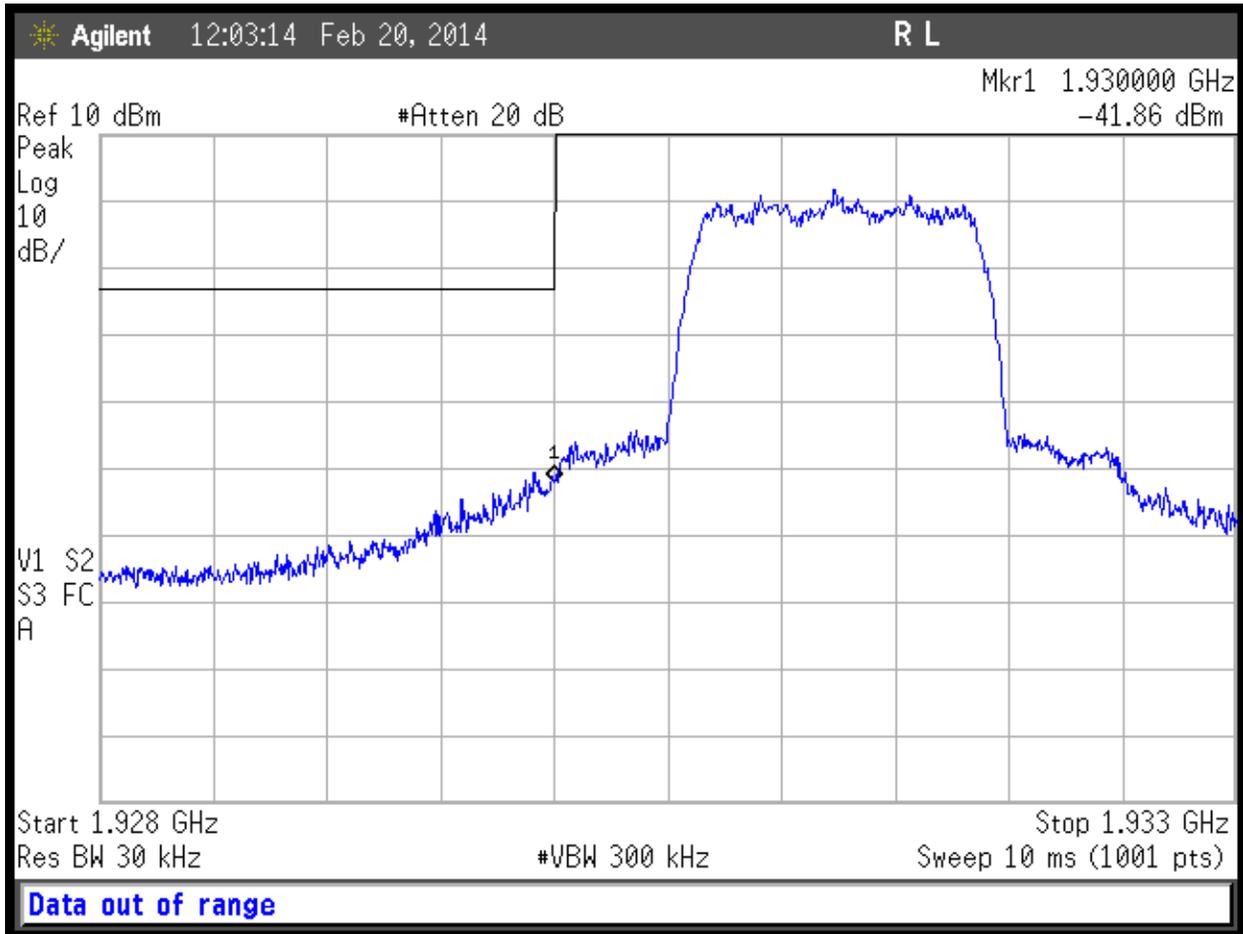

Beacon BC1 Low Channel




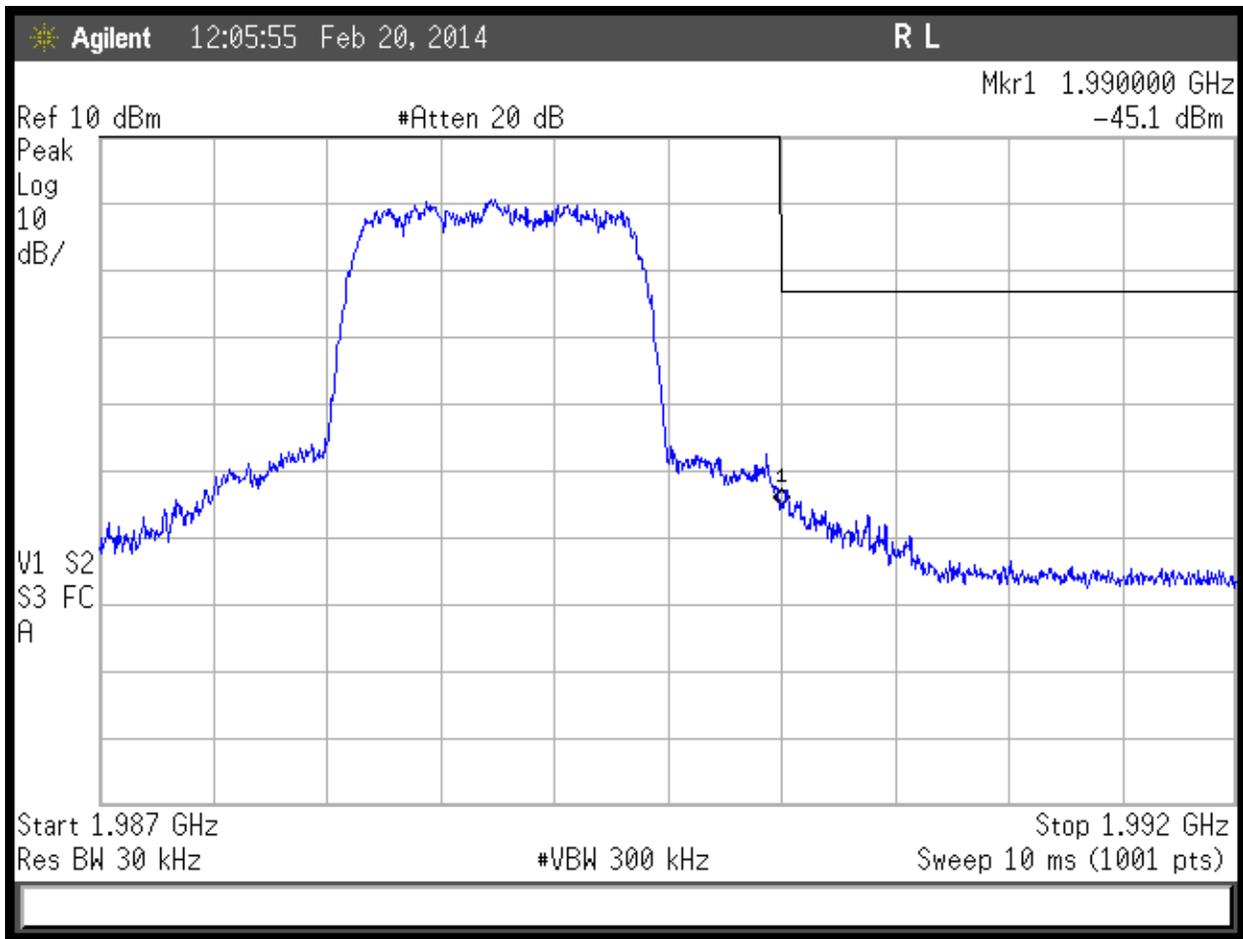

Beacon BC1 High Channel




EVDO:

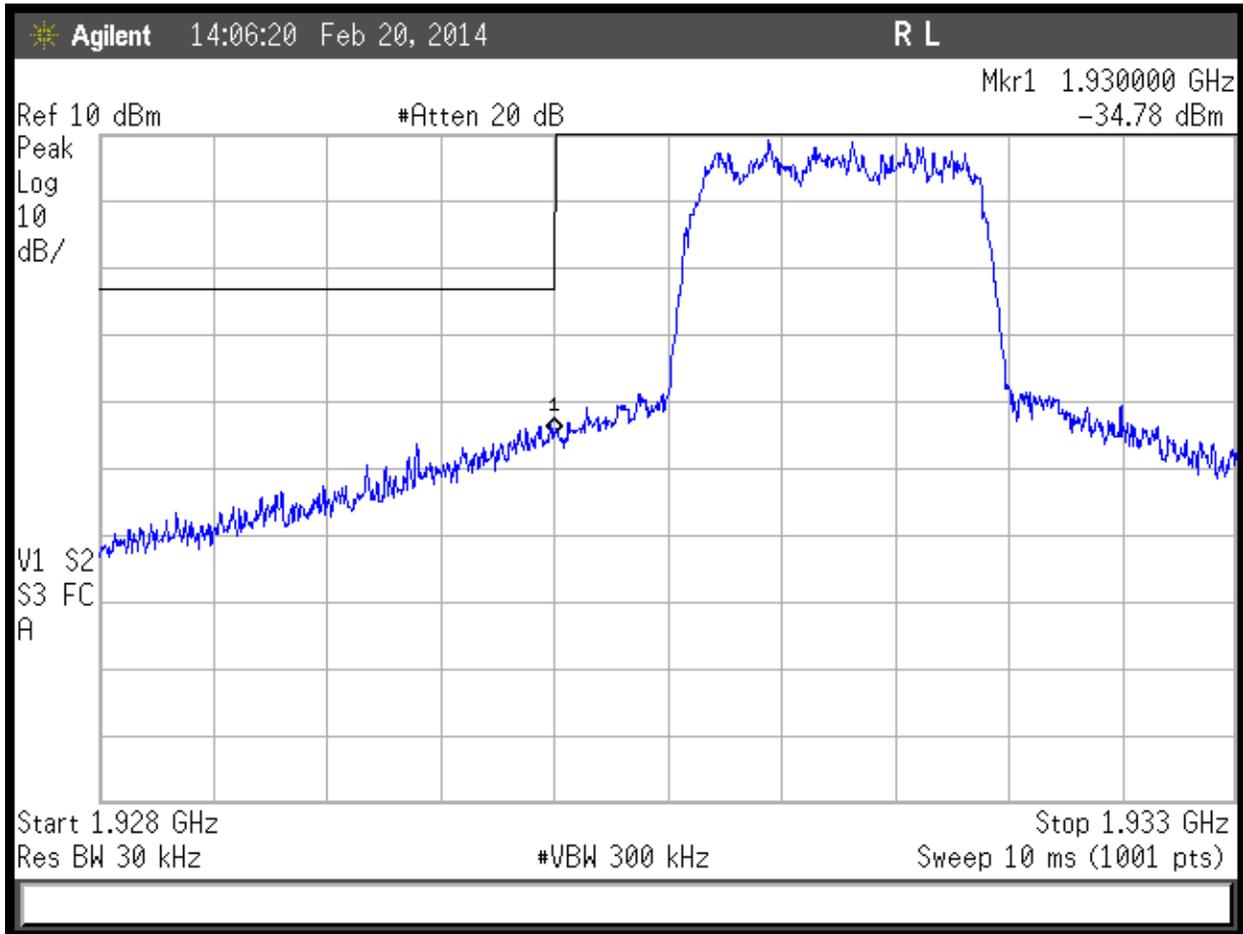

EVDO Low Channel




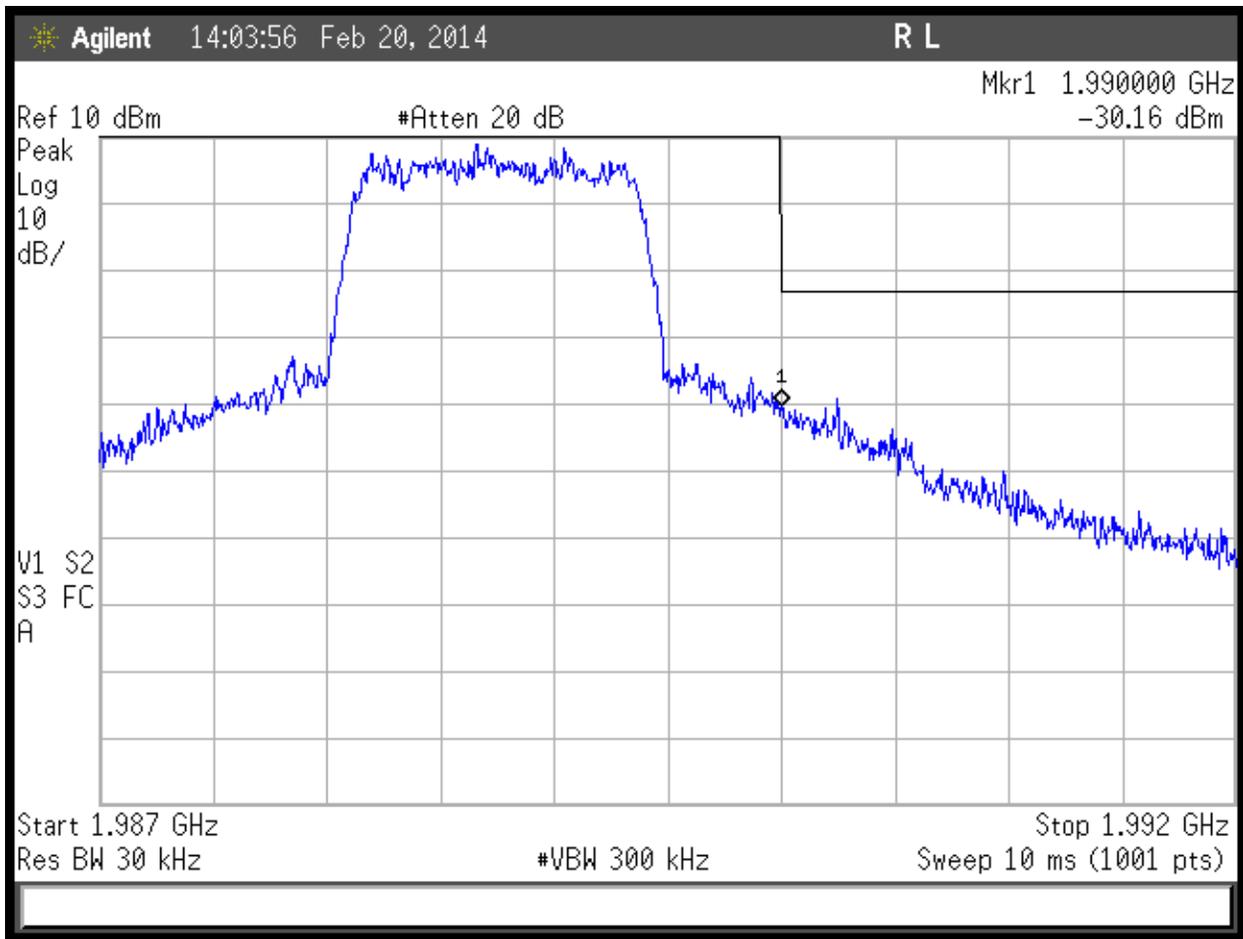

EVDO High Channel




One-X:

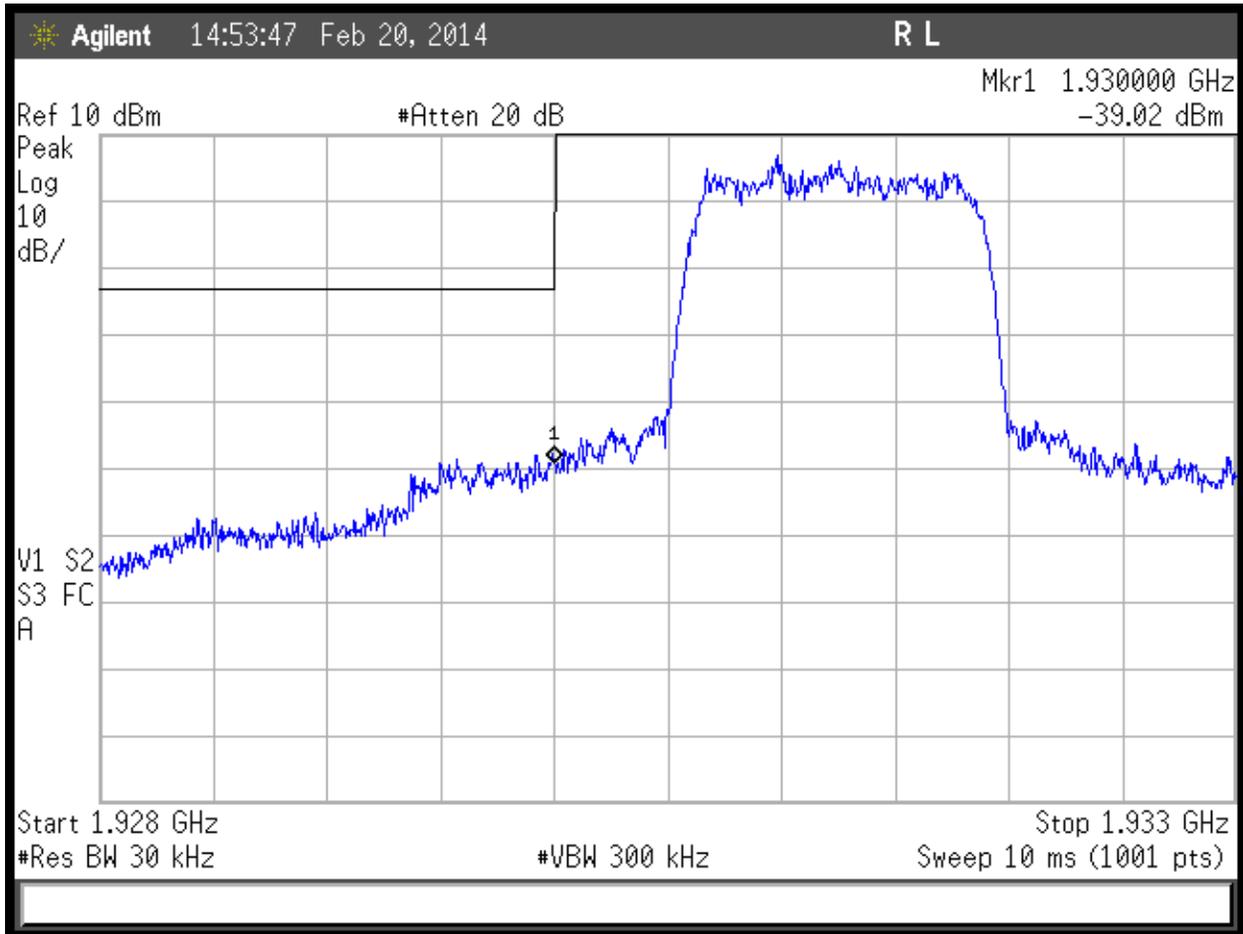

One-X Low Channel



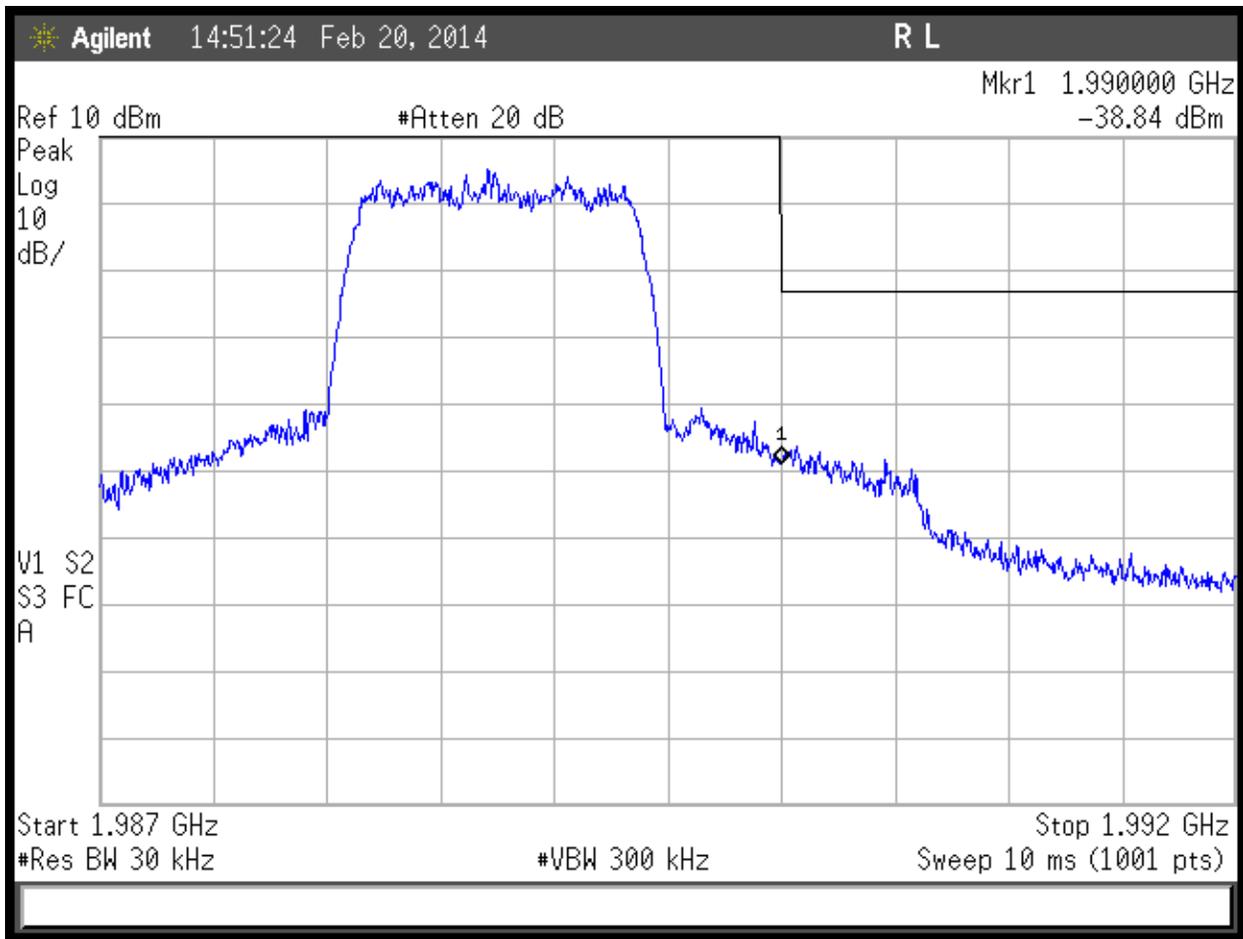

One-x High Channel



Conducted Spurious Emissions at Antenna Port

LIMITS

“The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”
[24.238(a)]


$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$

Spectrum analyzer screen plots for Beacon BC1, EVDO, and One-X are shown on the following pages.




PLOTS

Beacon BC1:

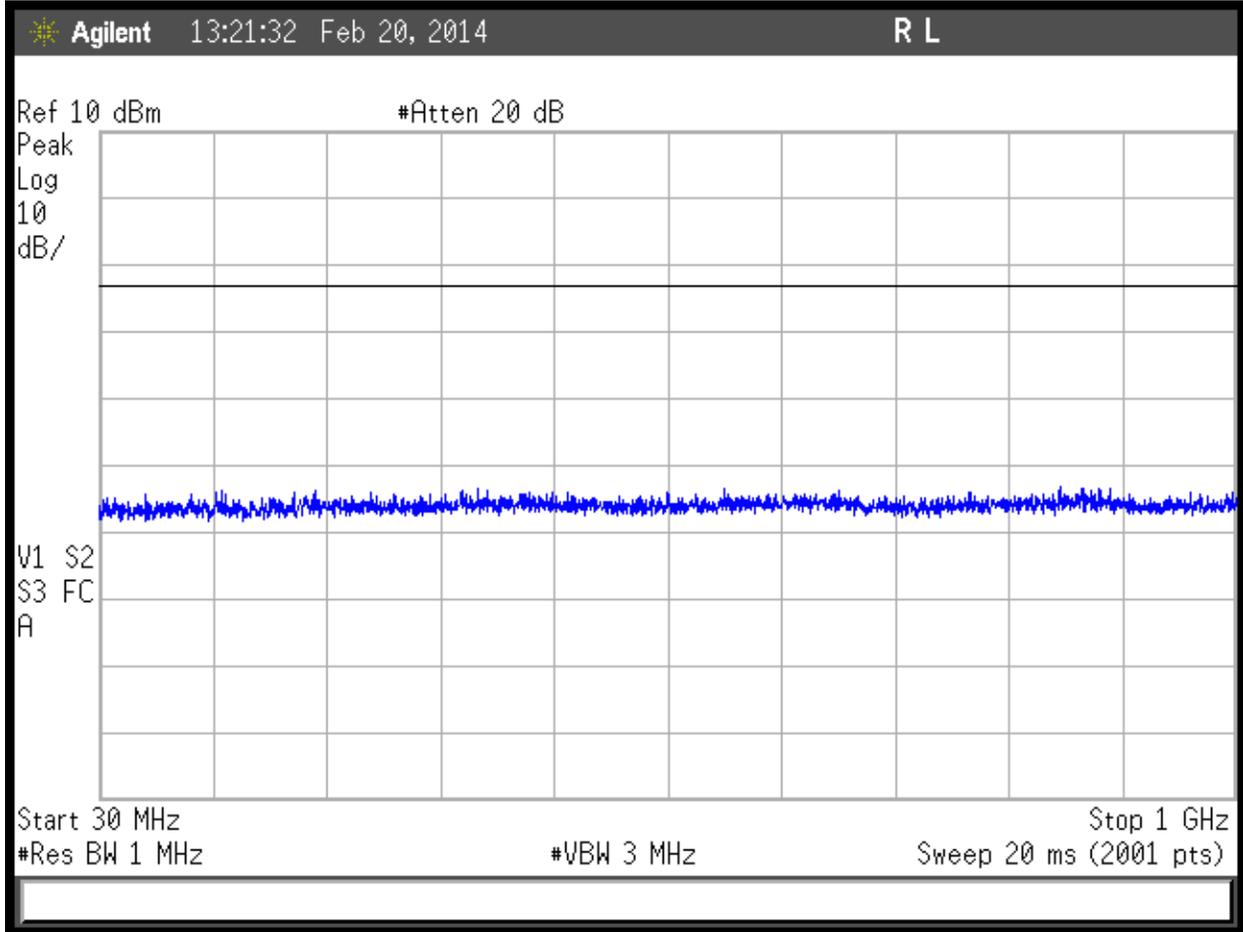


Beacon BC1, 30MHz to 1GHz



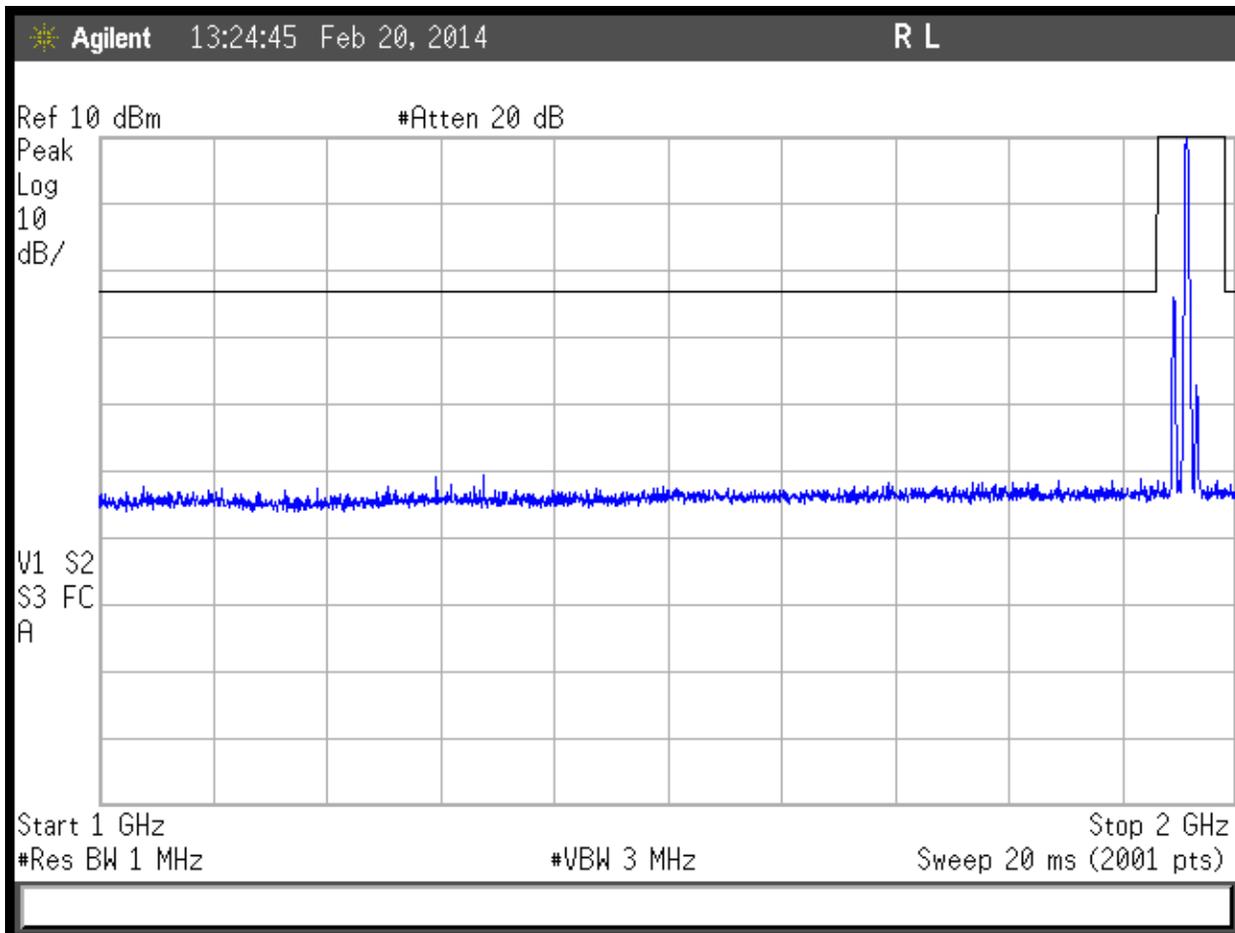


Beacon BC1, 1-2GHz



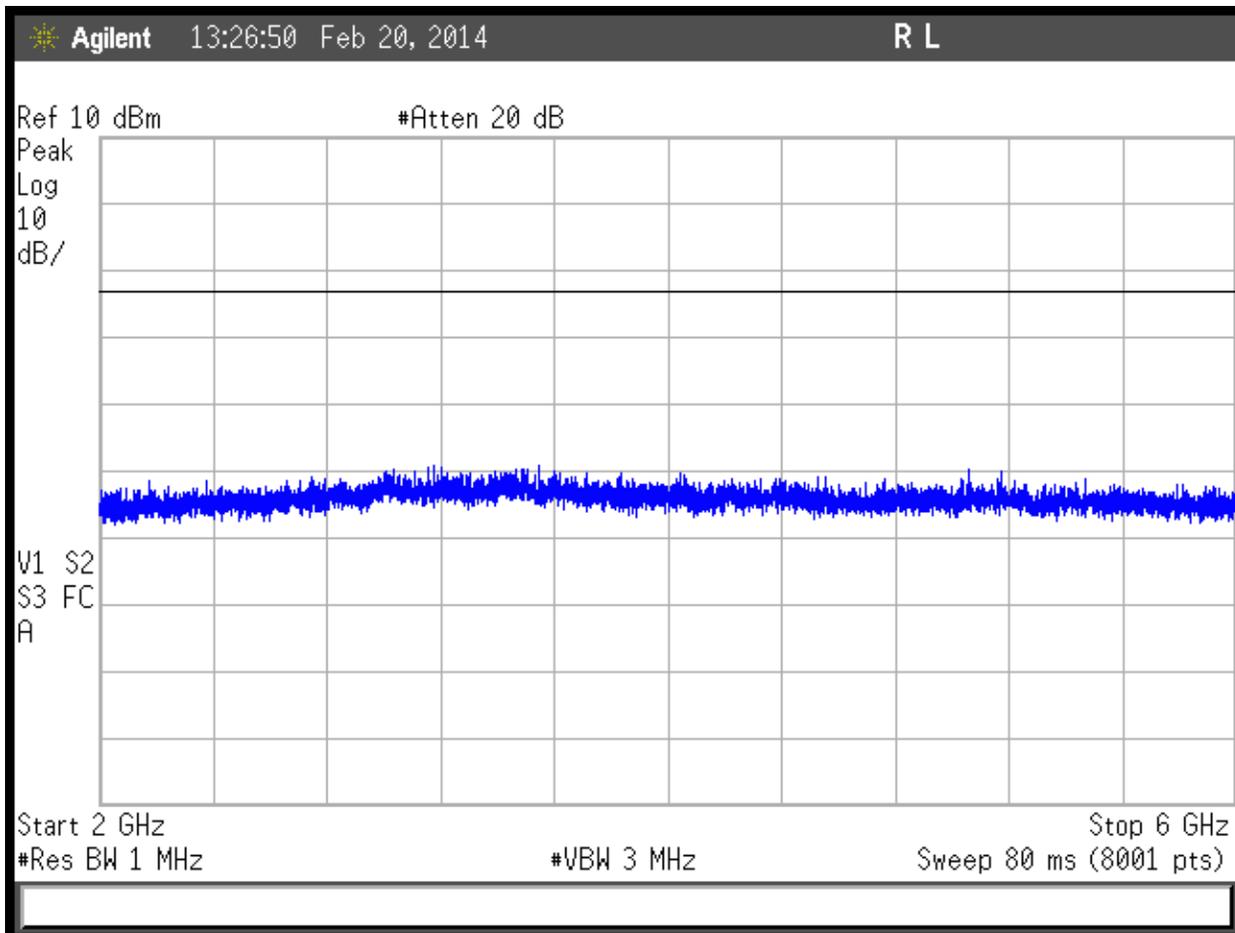


Beacon BC1, 2-6GHz



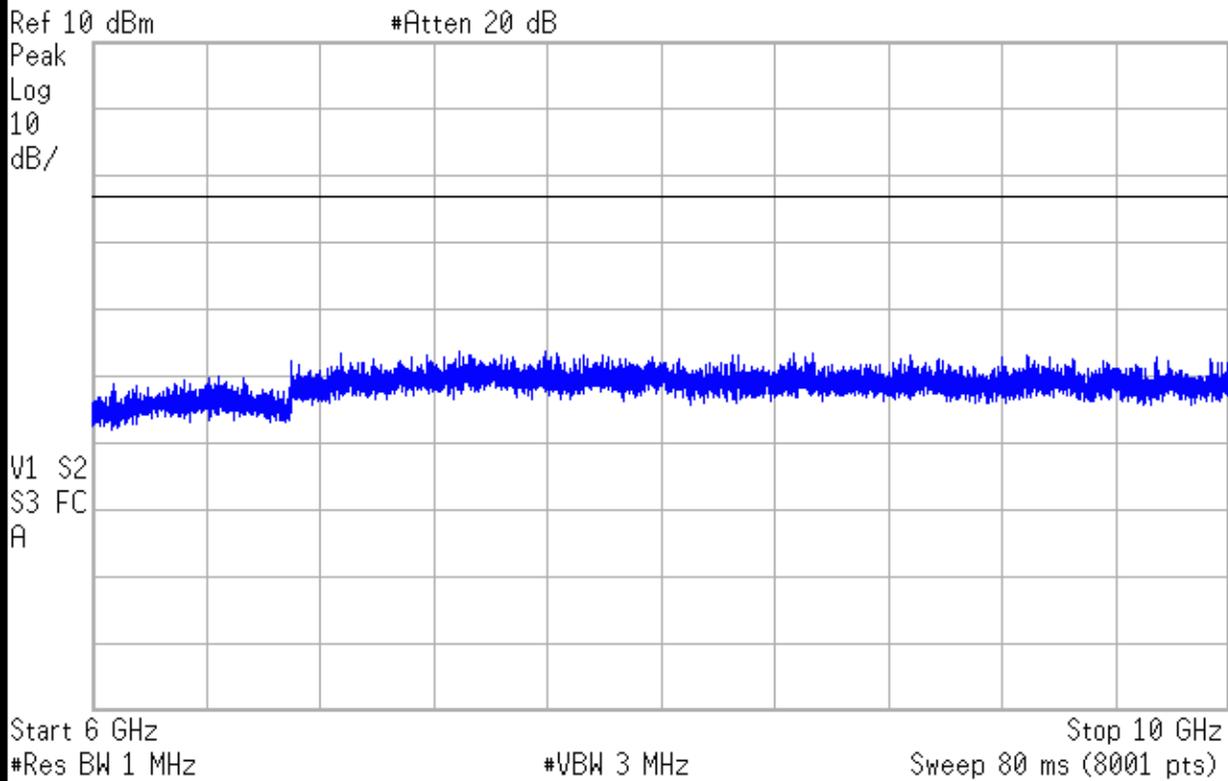


Beacon BC1, 6-10GHz



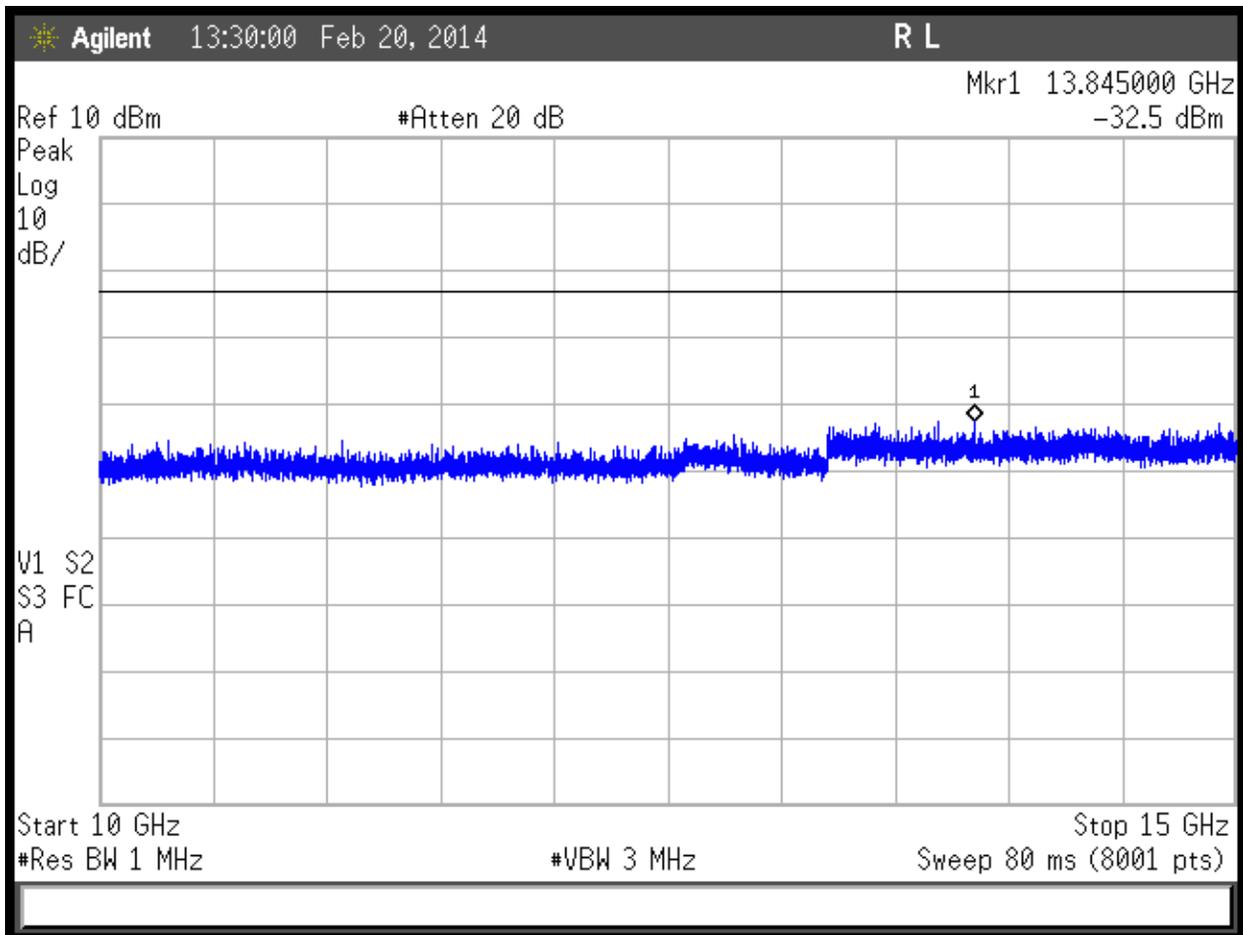

Beacon BC1, 10-15GHz




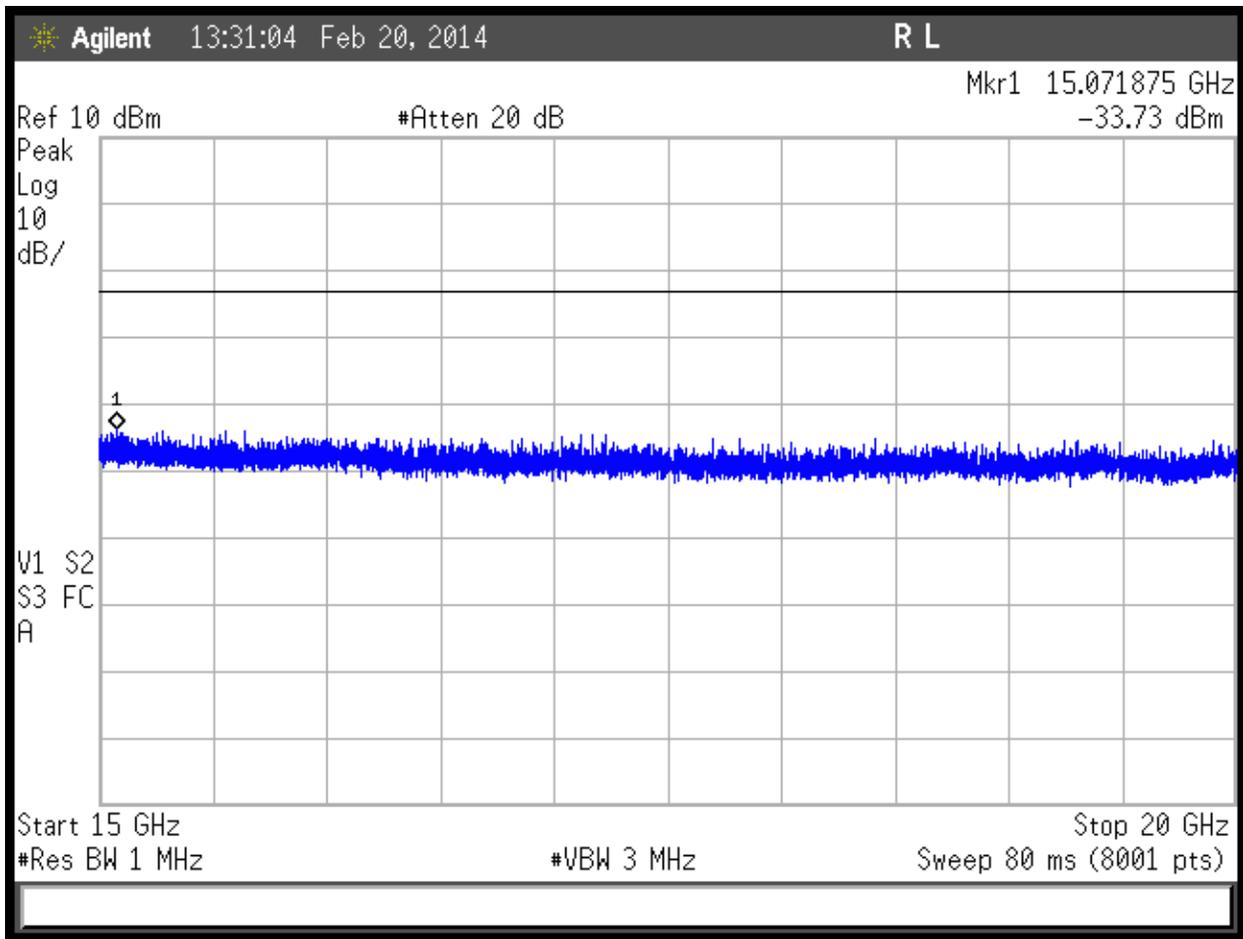

Beacon BC1, 15-20GHz




EVDO:

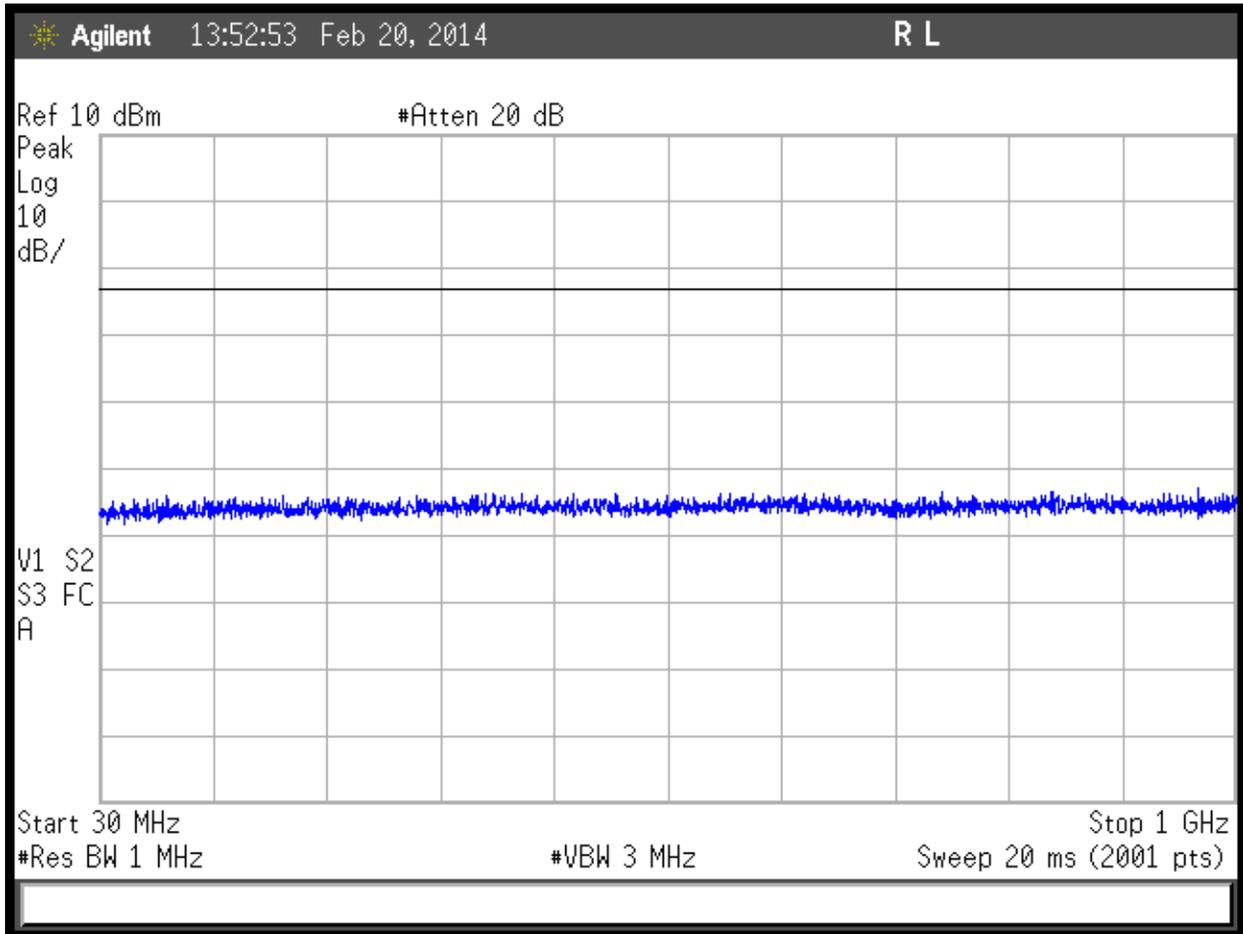


EVDO, 30MHz to 1GHz



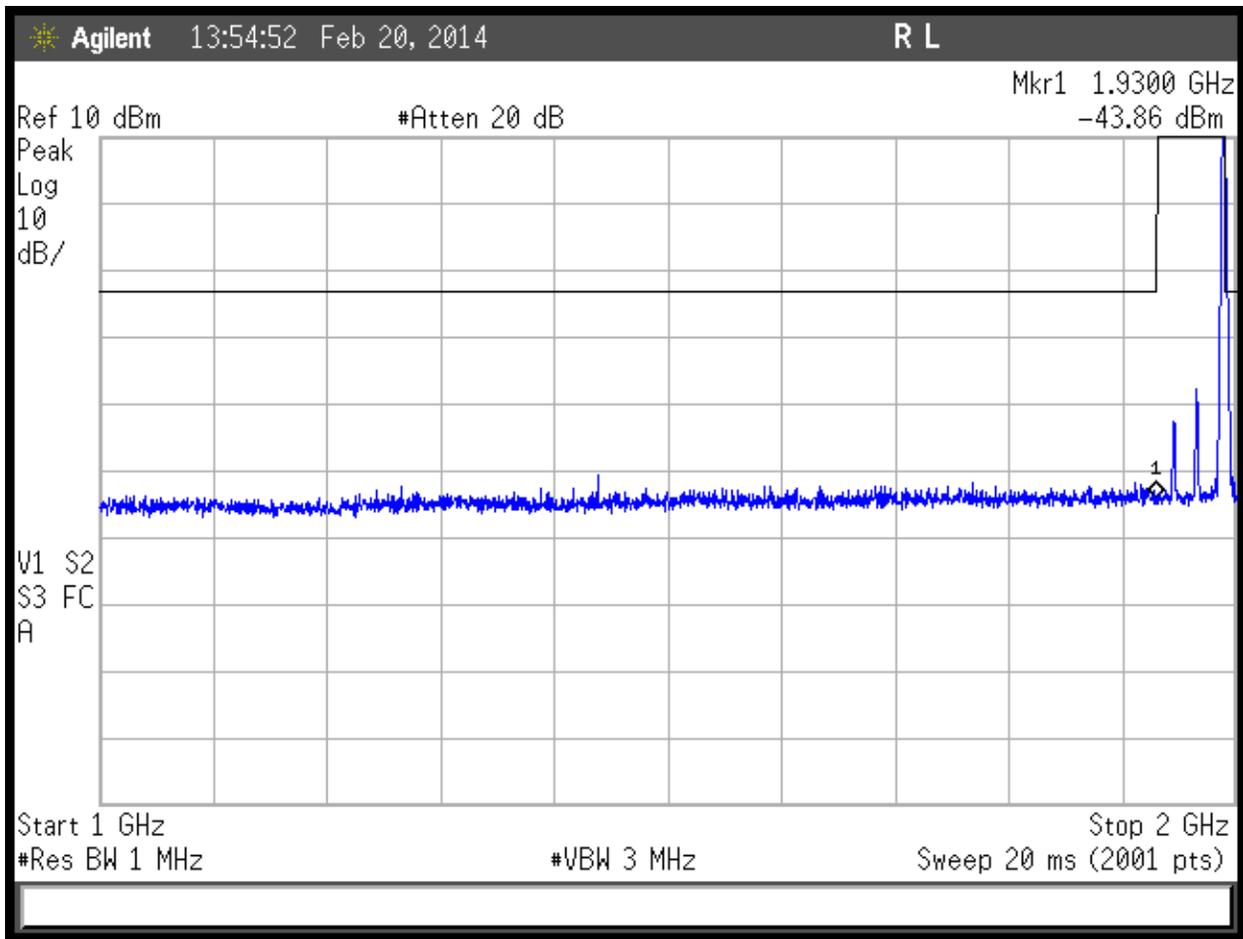


EVDO, 1-2GHz



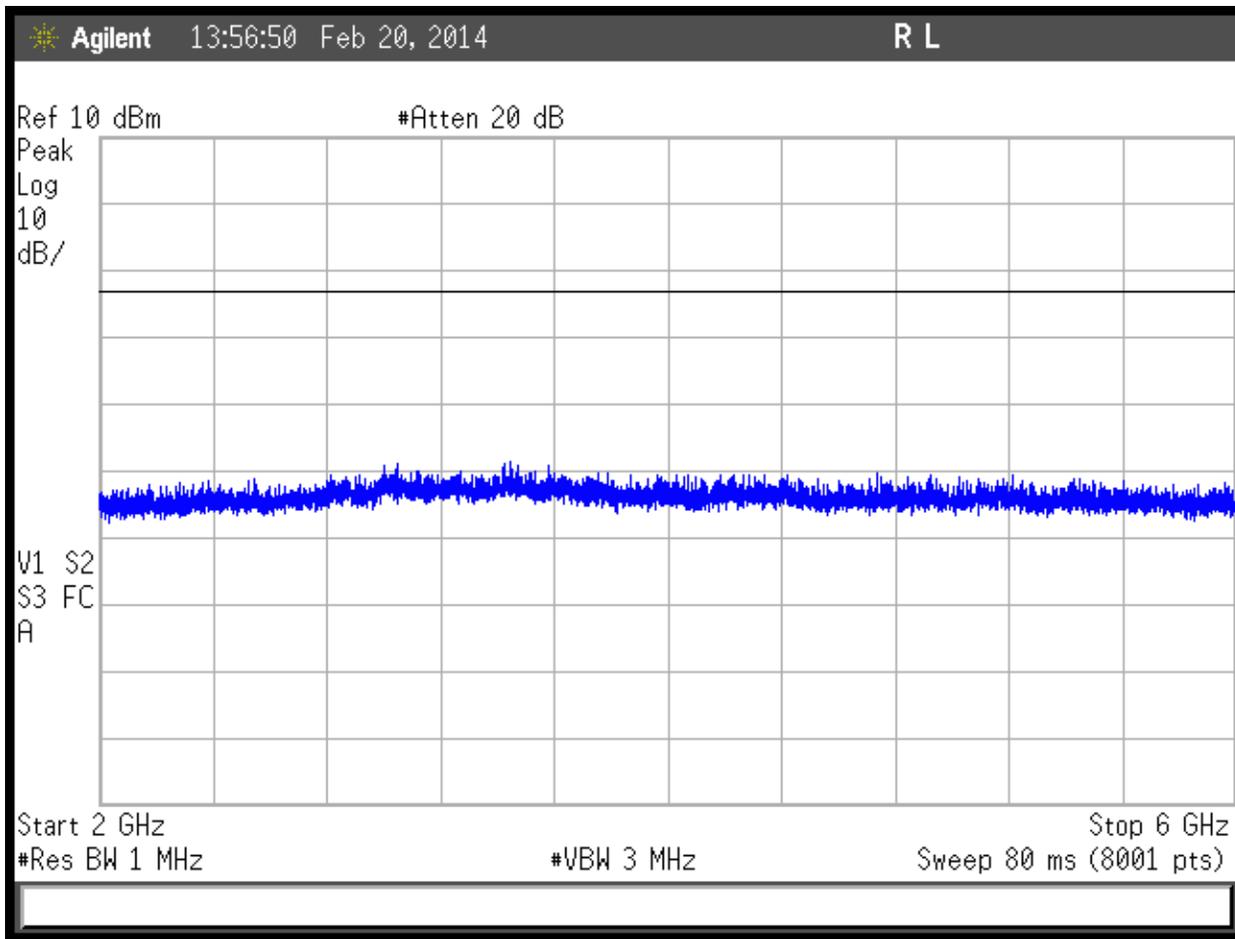


EVDO, 2-6GHz



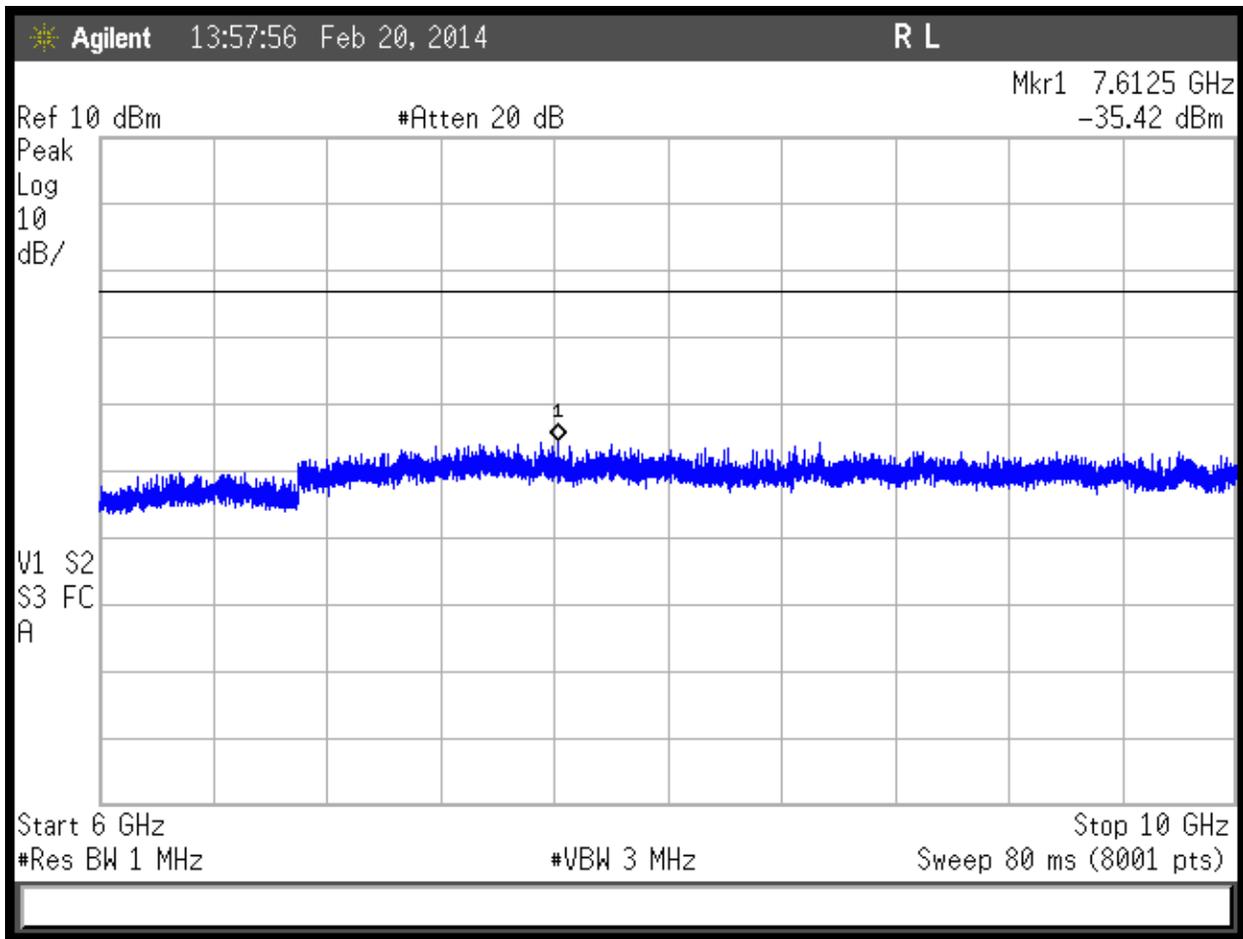


EVDO, 6-10GHz



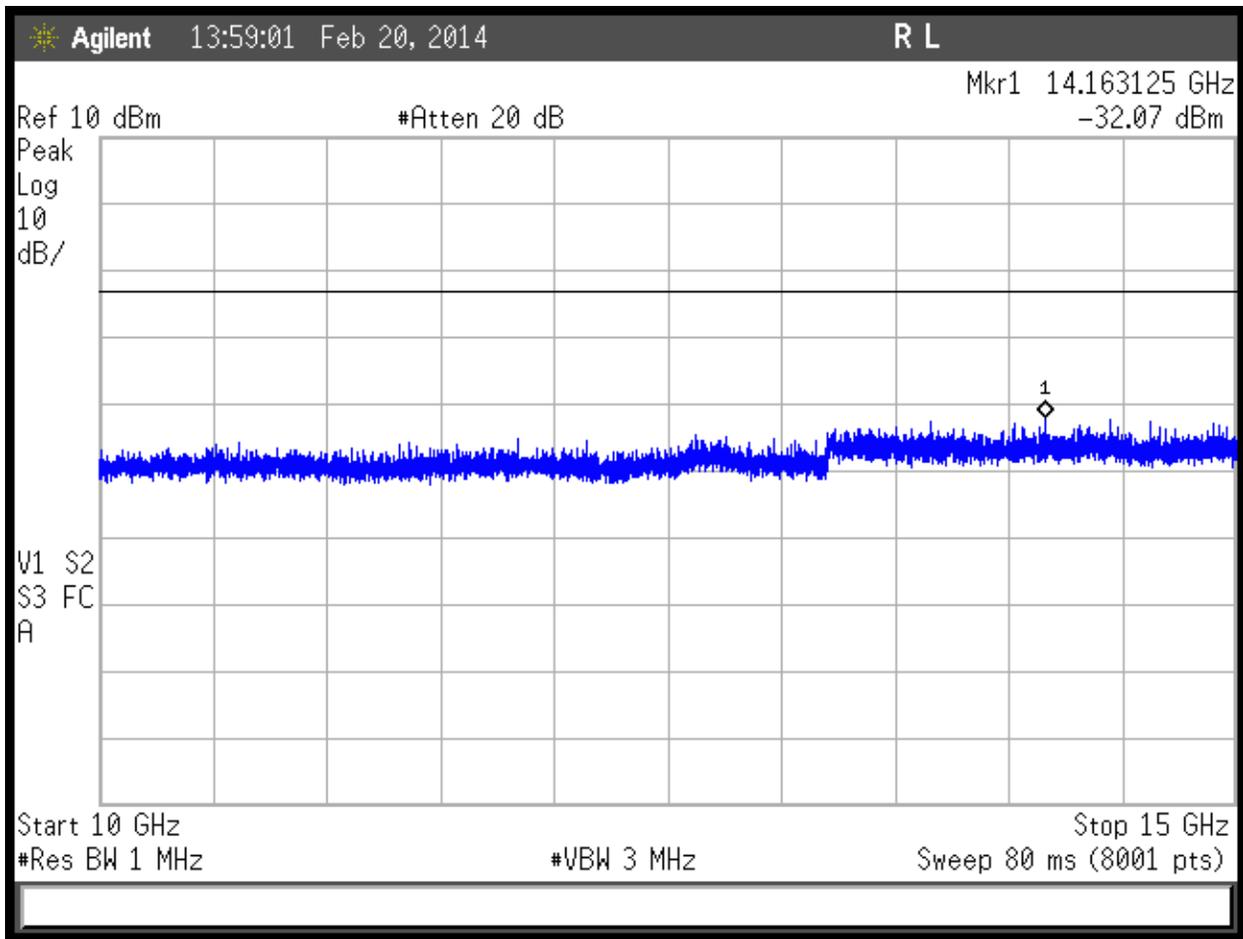

EVDO, 10-15GHz




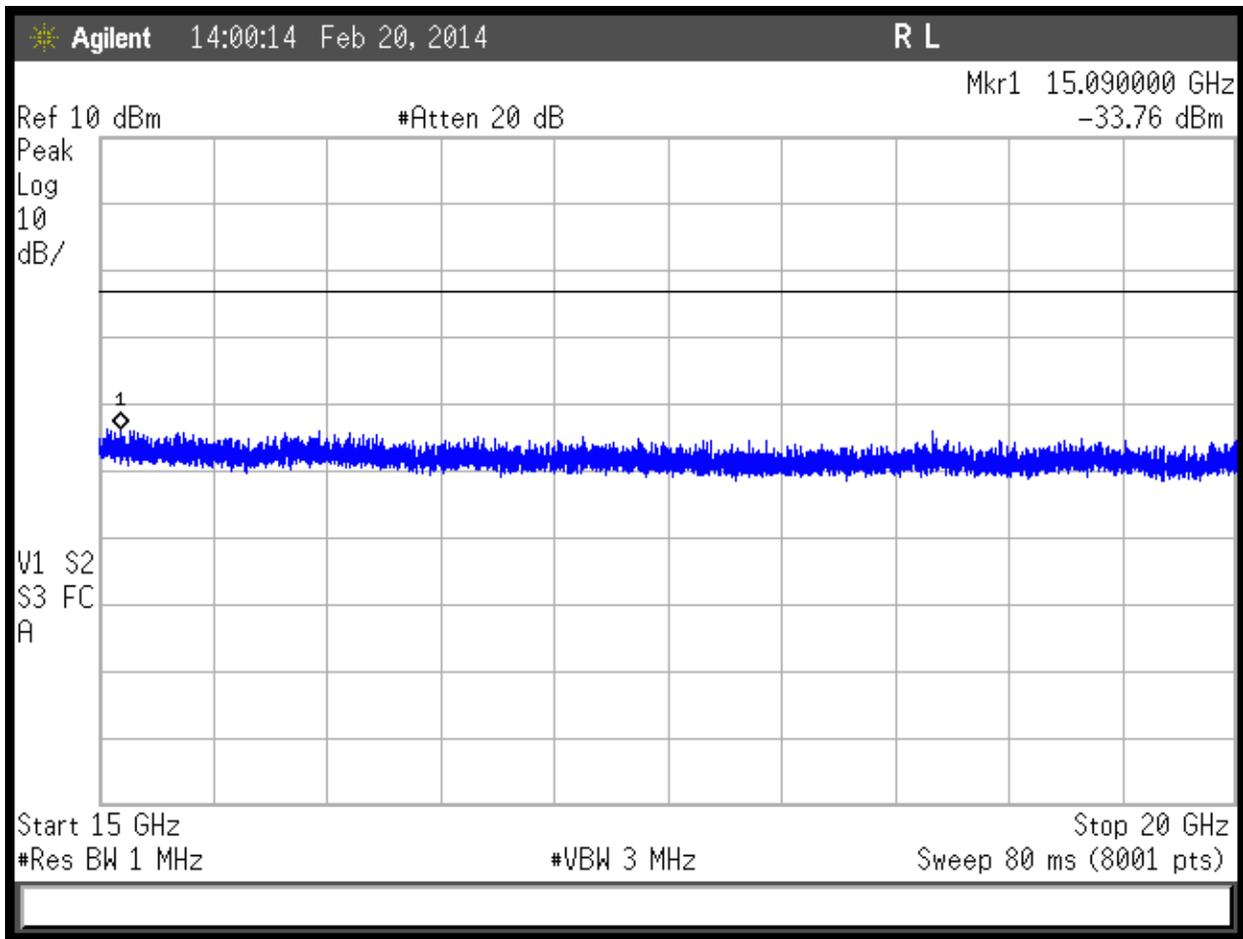

EVDO, 15-20GHz




One-X:

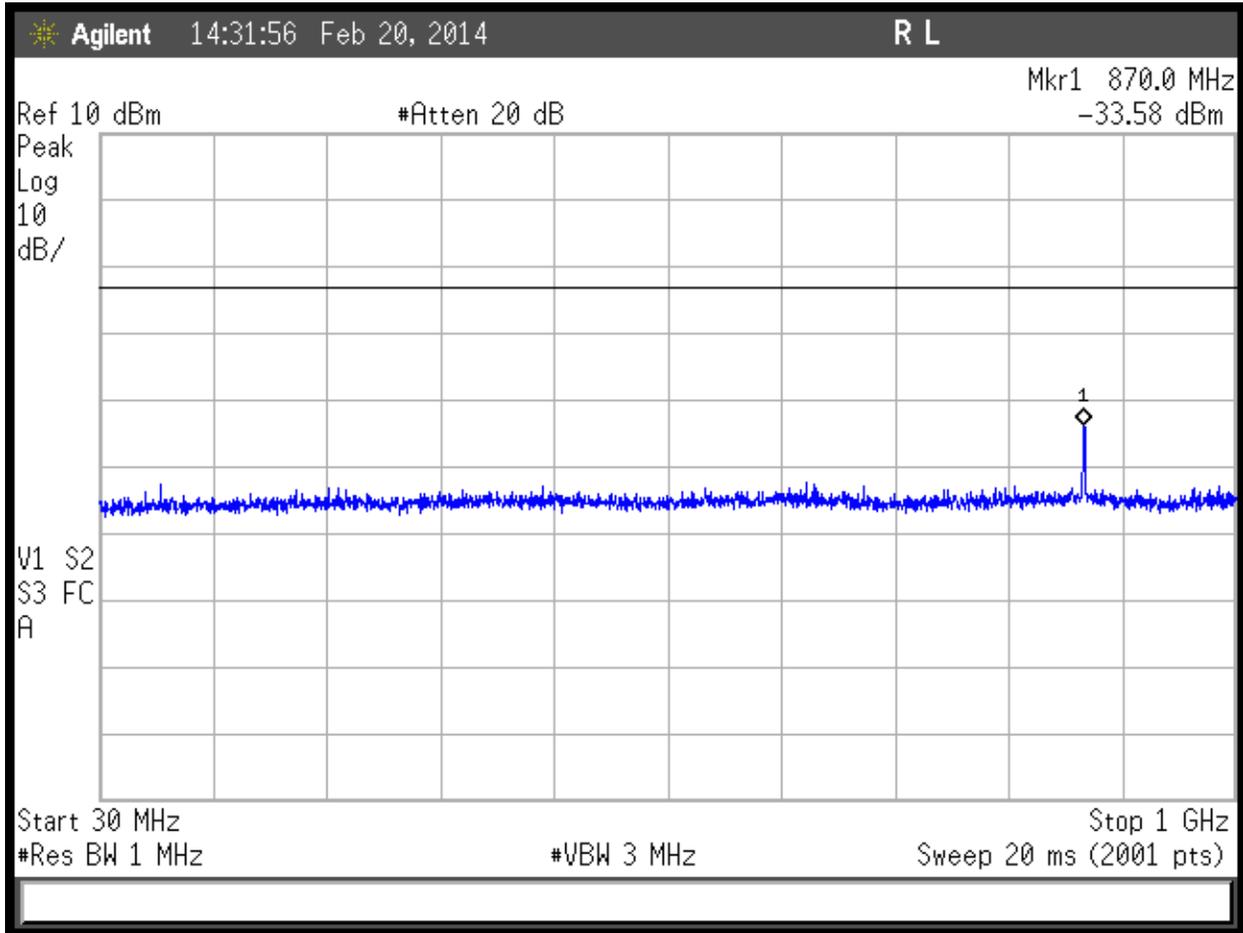


One-X, 30MHz to 1GHz



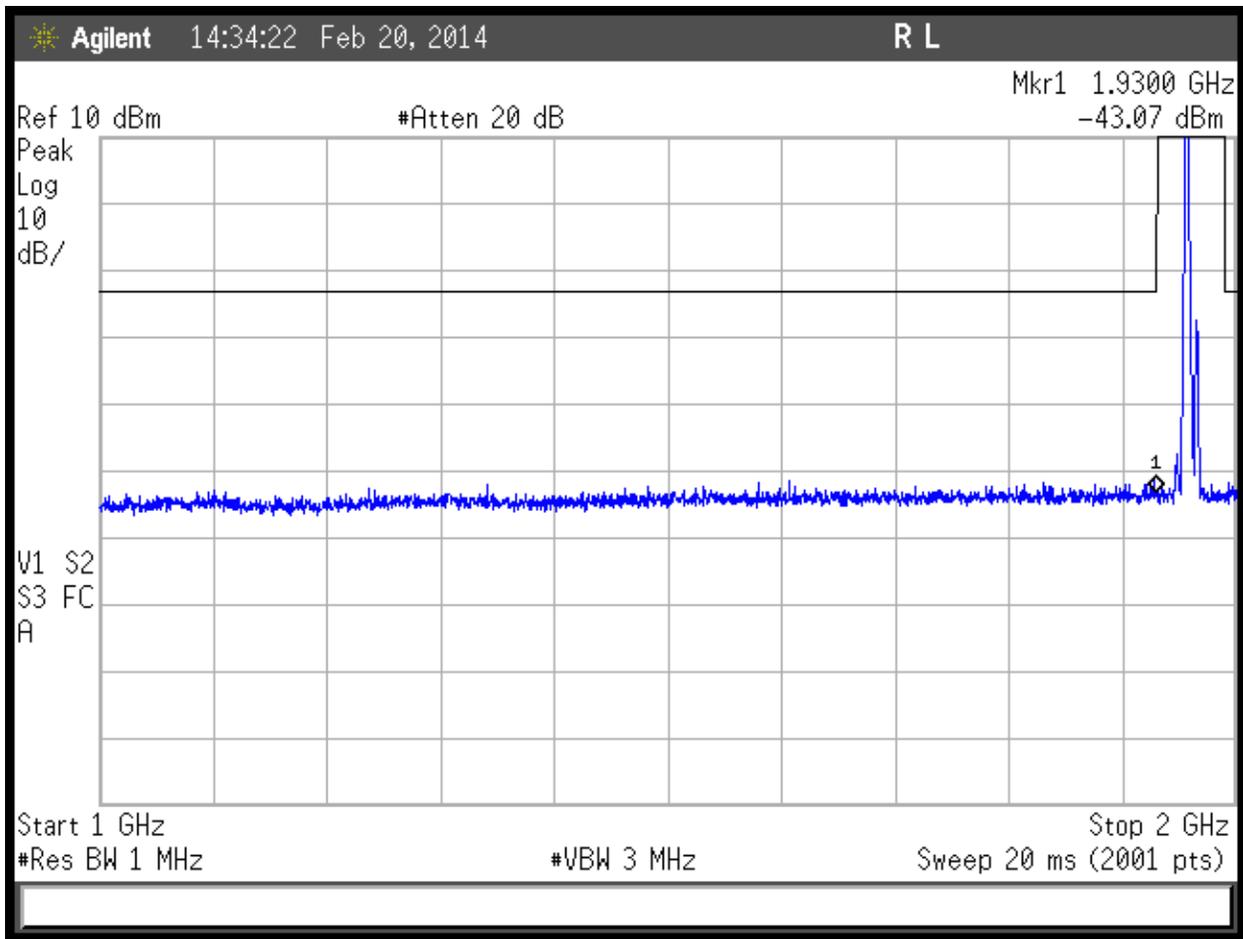


One-X, 1-2GHz




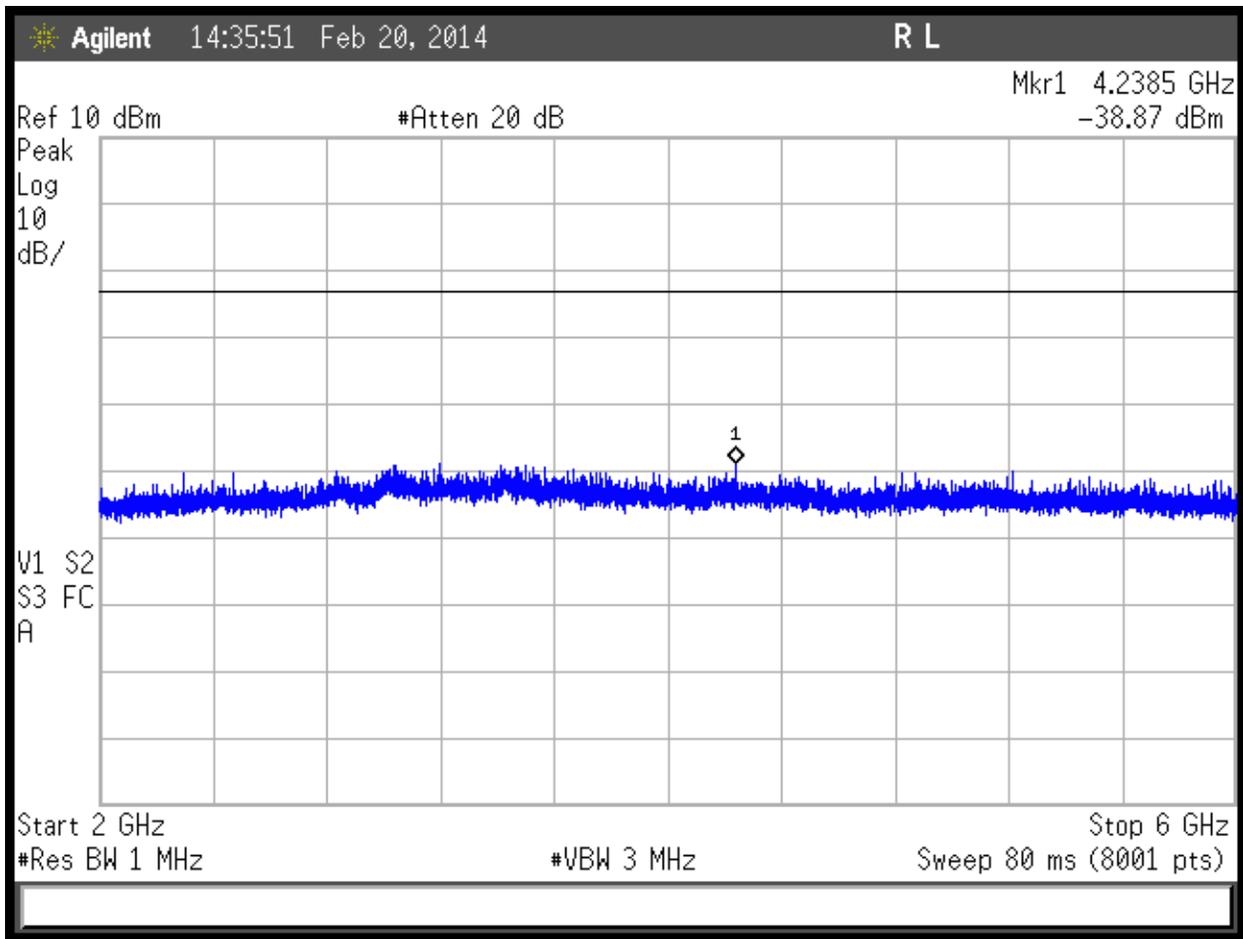

One-X, 2-6GHz




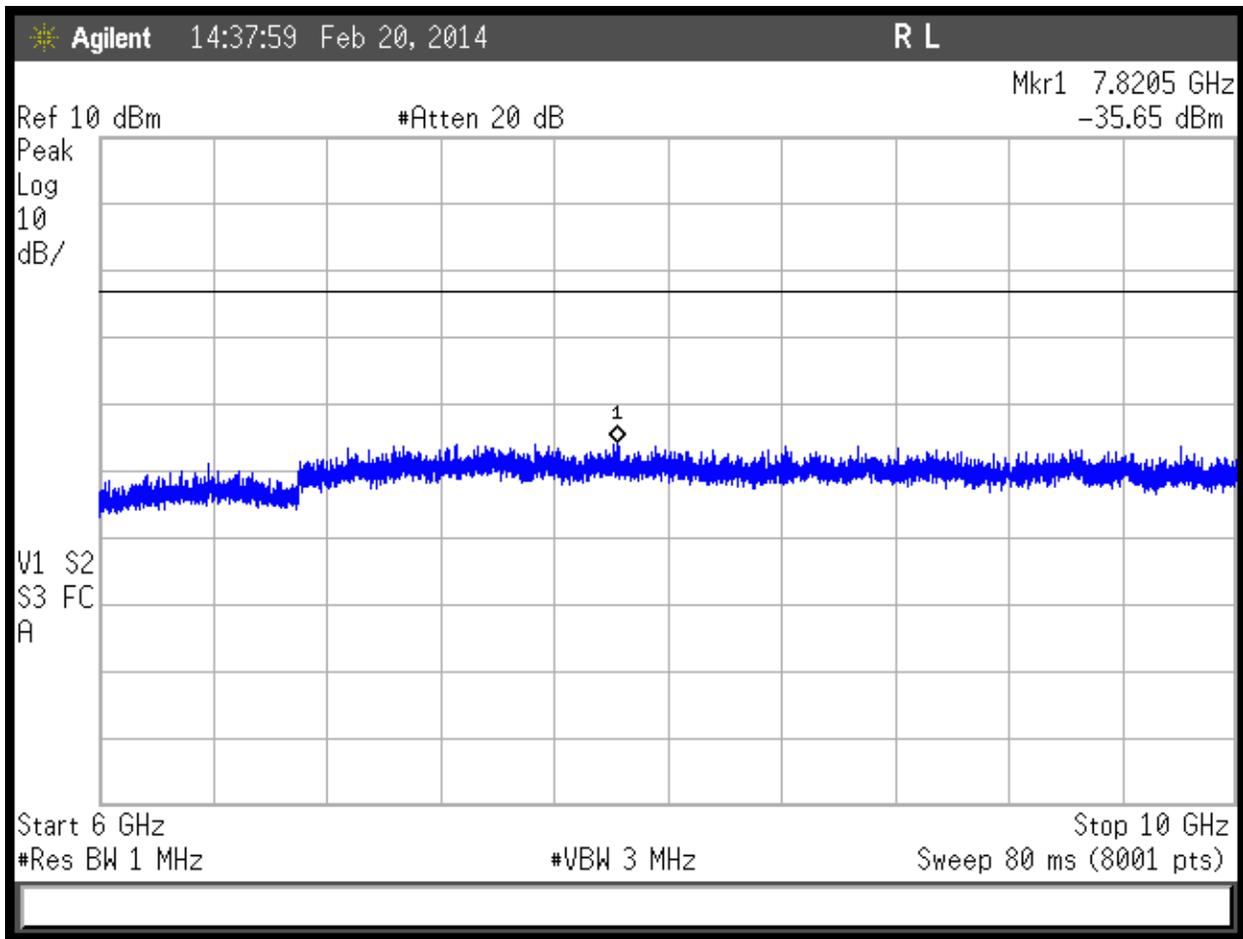

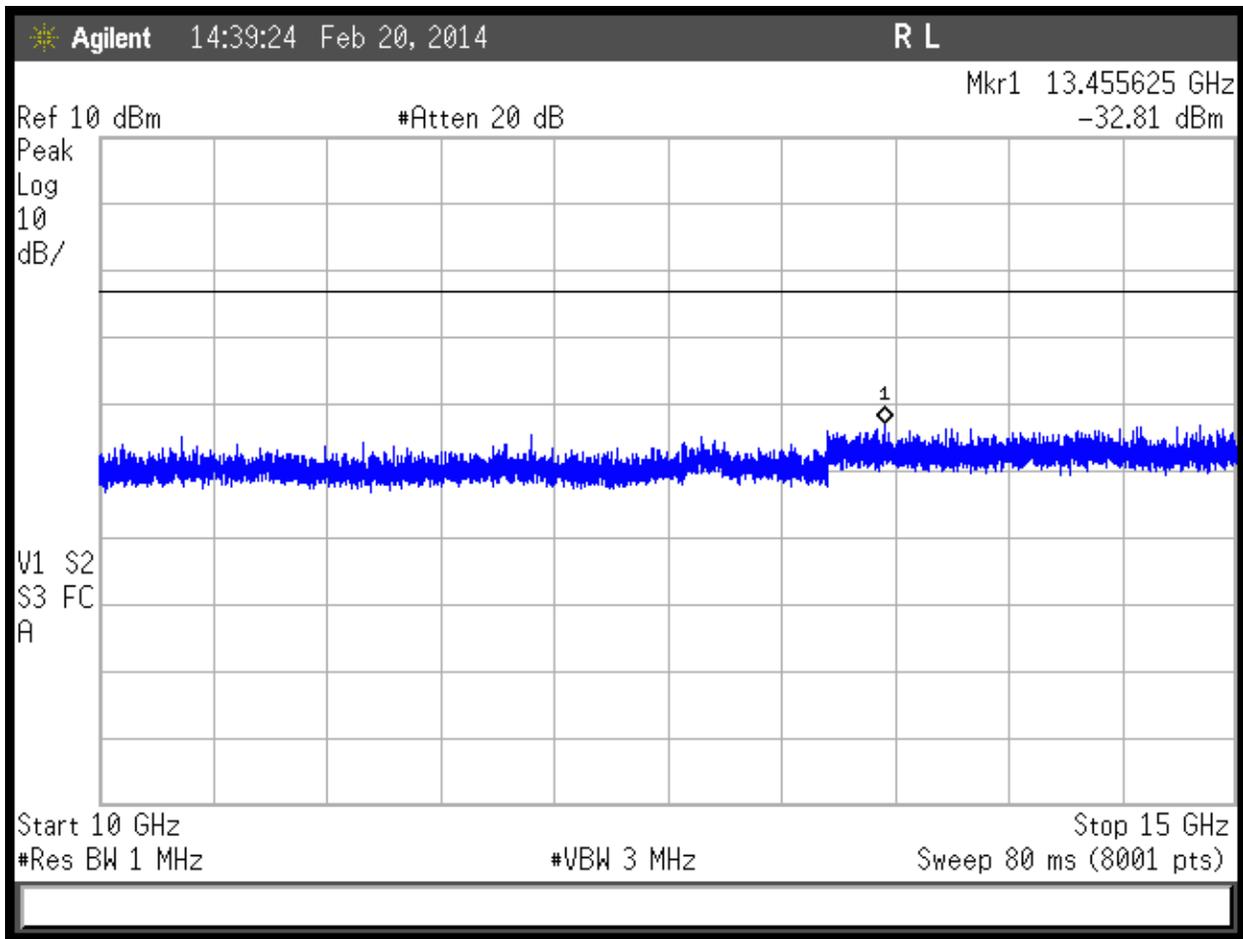

One-X, 10-15GHz



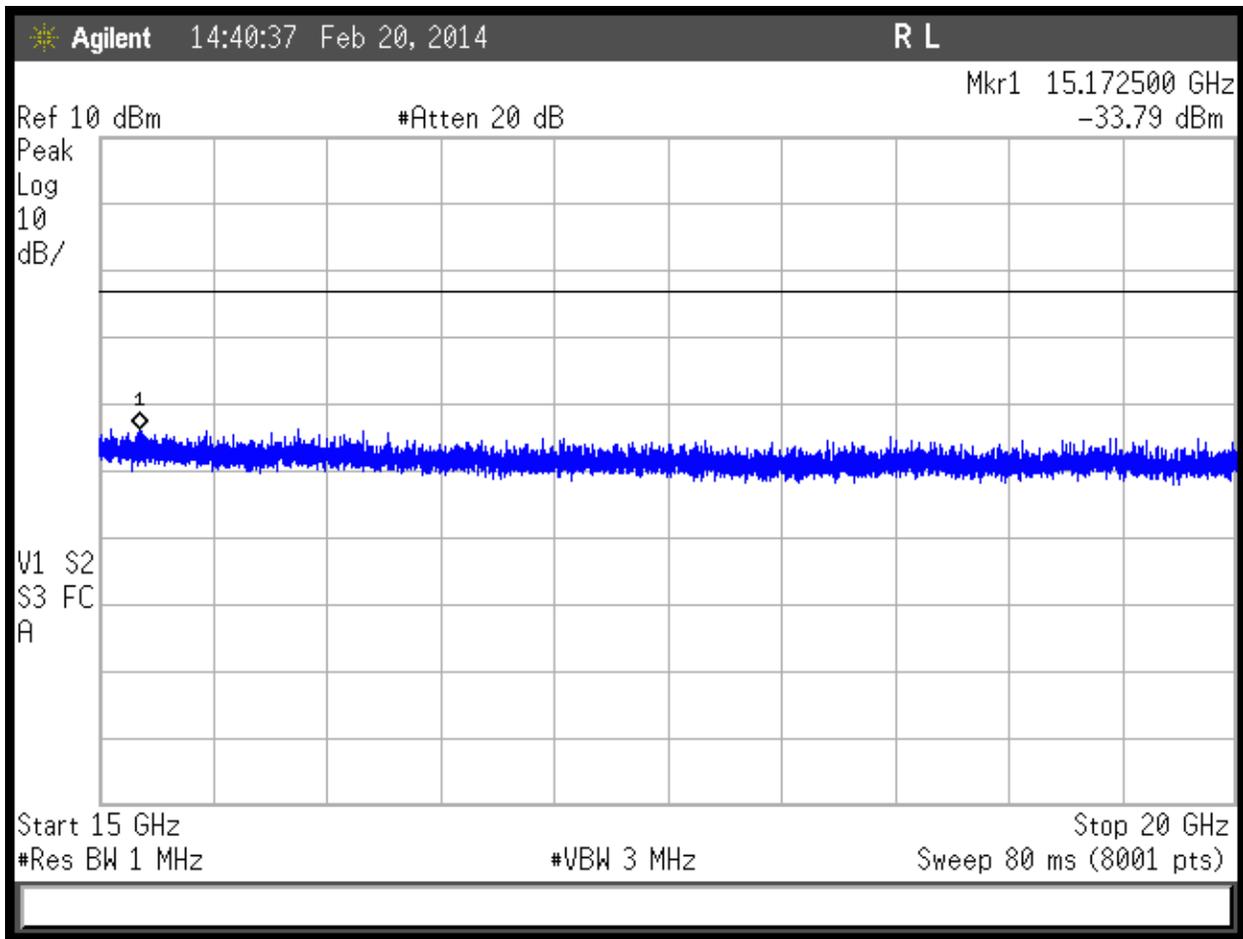


One-X, 15-20GHz




Tests Specific to Part 90

Occupied Bandwidth

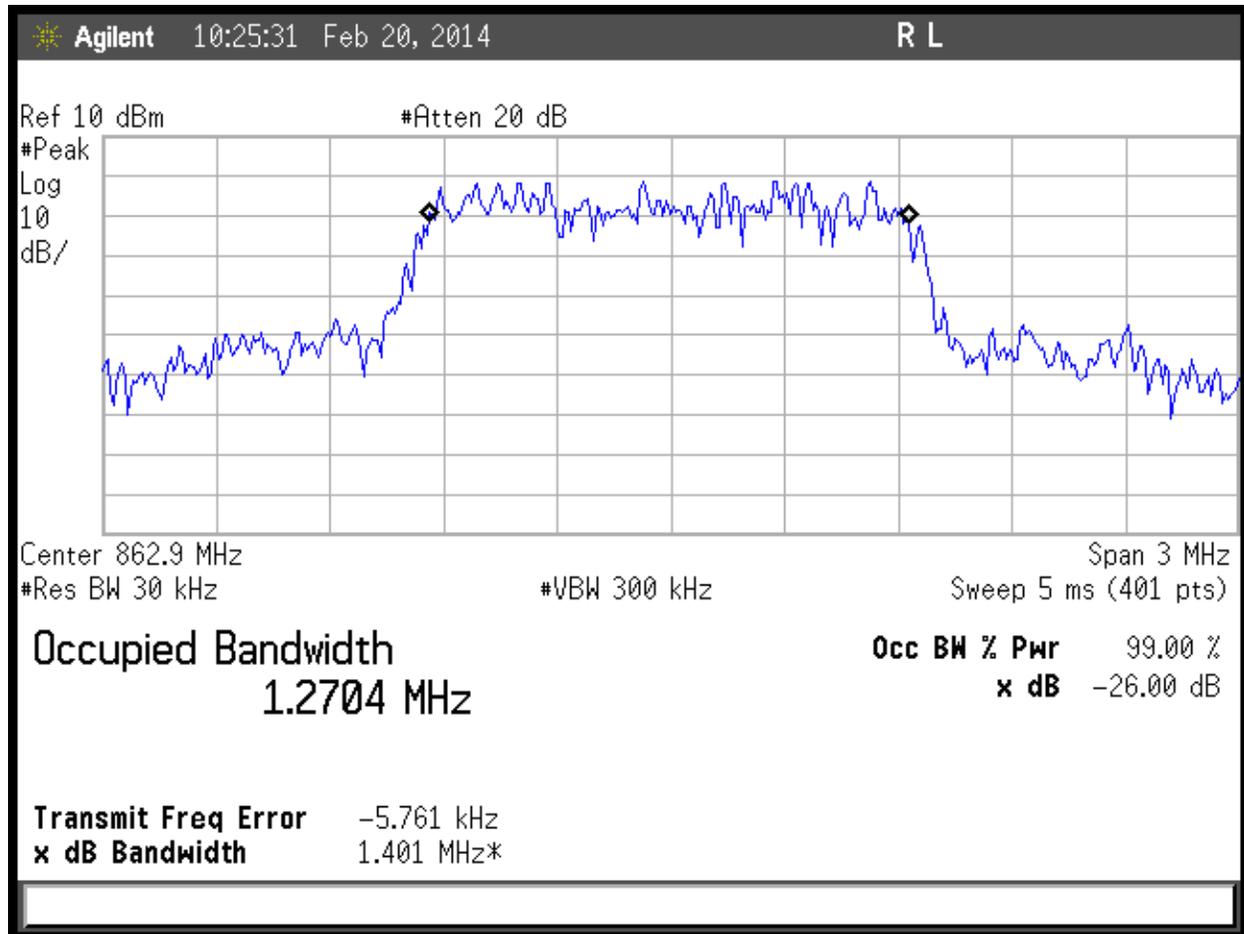

BC10 Low Channel (Ch. 476)



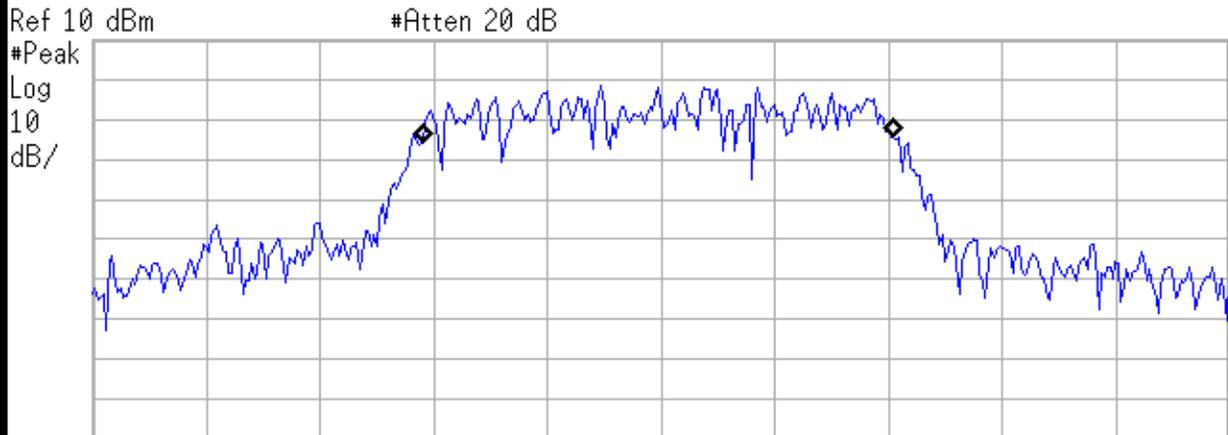

Center 865.4 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)


Occupied Bandwidth
1.2487 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -8.807 kHz
x dB Bandwidth 1.403 MHz*

BC10 Mid Channel (Ch. 576)



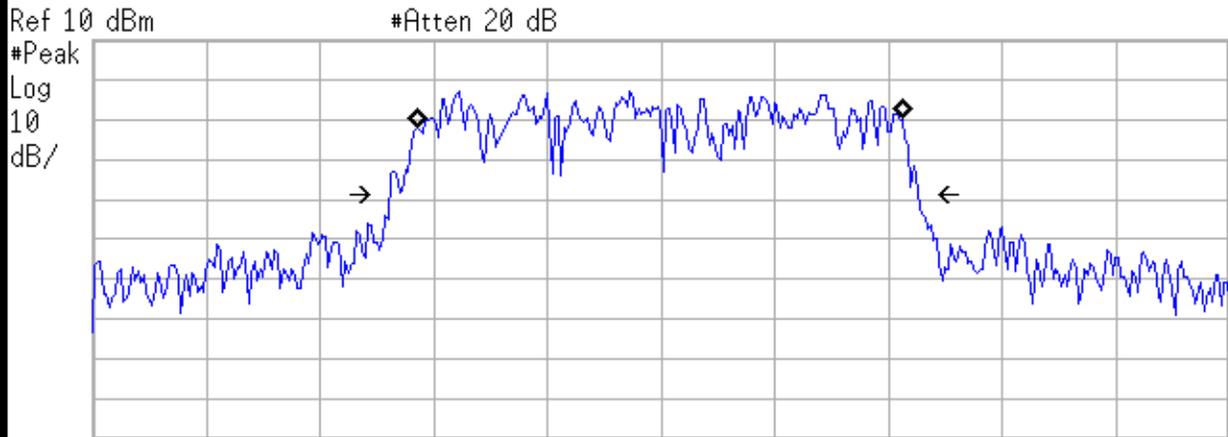

Center 867.9 MHz Span 3 MHz
 #Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
1.2803 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.366 kHz
Occupied Bandwidth 1.399 MHz*

BC10 High Channel (Ch. 676)



ERP

ERP Using Substitution Method								
Date: 19-Feb-14			Company: Airvana			Work Order: O0320		
Engineer: Arik Zwirner			EUT Desc: 750723			EUT Operating Voltage/Frequency: 120Vac/60Hz		
Temp: 21°C			Humidity: 19%			Pressure: 1007mbar		
Frequency Range: 862-869MHz, FCC Part 90					Measurement Distance: 3 m			
Notes: Band Class 10 (BC10) is under test. 20dBW = 100W = 50dBm								
Antenna Polarization (H/V)	Frequency (MHz)	Signal Generator Power Output (dBm)				FCC 90.635 (b)		
			Tx Cable (dB)	Tx Ant Gain (dBi)	Adjusted ERP (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
Channel 476			---	---	---	---	---	---
H	862.9	1.8	0.9	0.0	0.9	50.0	-49.1	Pass
V	862.9	5.2	0.9	0.0	4.3	50.0	-45.7	Pass
Channel 576			---	---	---	---	---	---
H	865.4	1.4	0.9	0.0	0.5	50.0	-49.5	Pass
V	865.4	3.8	0.9	0.0	2.9	50.0	-47.1	Pass
Channel 676			---	---	---	---	---	---
H	867.9	2.2	0.9	0.0	1.3	50.0	-48.7	Pass
V	867.9	2.4	0.9	0.0	1.5	50.0	-48.5	Pass
Test Site: 1DCC-OATS-3M-I			Signal Generator: Asset 1820 (Sweeper)			Receive Cable: EMIR-03		
Analyzer: Rental #1			Receive Antenna: Green			Transmit Cable: Asset 1785		
Transmit Antenna: Dipole, Asset 756								



Emission Mask

LIMITS

47 CFR 90.961:

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10} (f/6.1)$ decibels or $50 + 10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

MEASUREMENTS / RESULTS

Spectrum Analyzer settings:

Resolution Bandwidth: 30kHz
Video Bandwidth: 300kHz
Peak detector

Emission Mask:


The following limits are applied in the spectral plots:

Attenuation within 37.5kHz of band: $50 + 10 \text{ Log}(P)$, resulting in -20dBm

Attenuation beyond 37.5kHz from band: $43 + 10 \text{ Log}(P)$, resulting in -13dBm




PLOTS

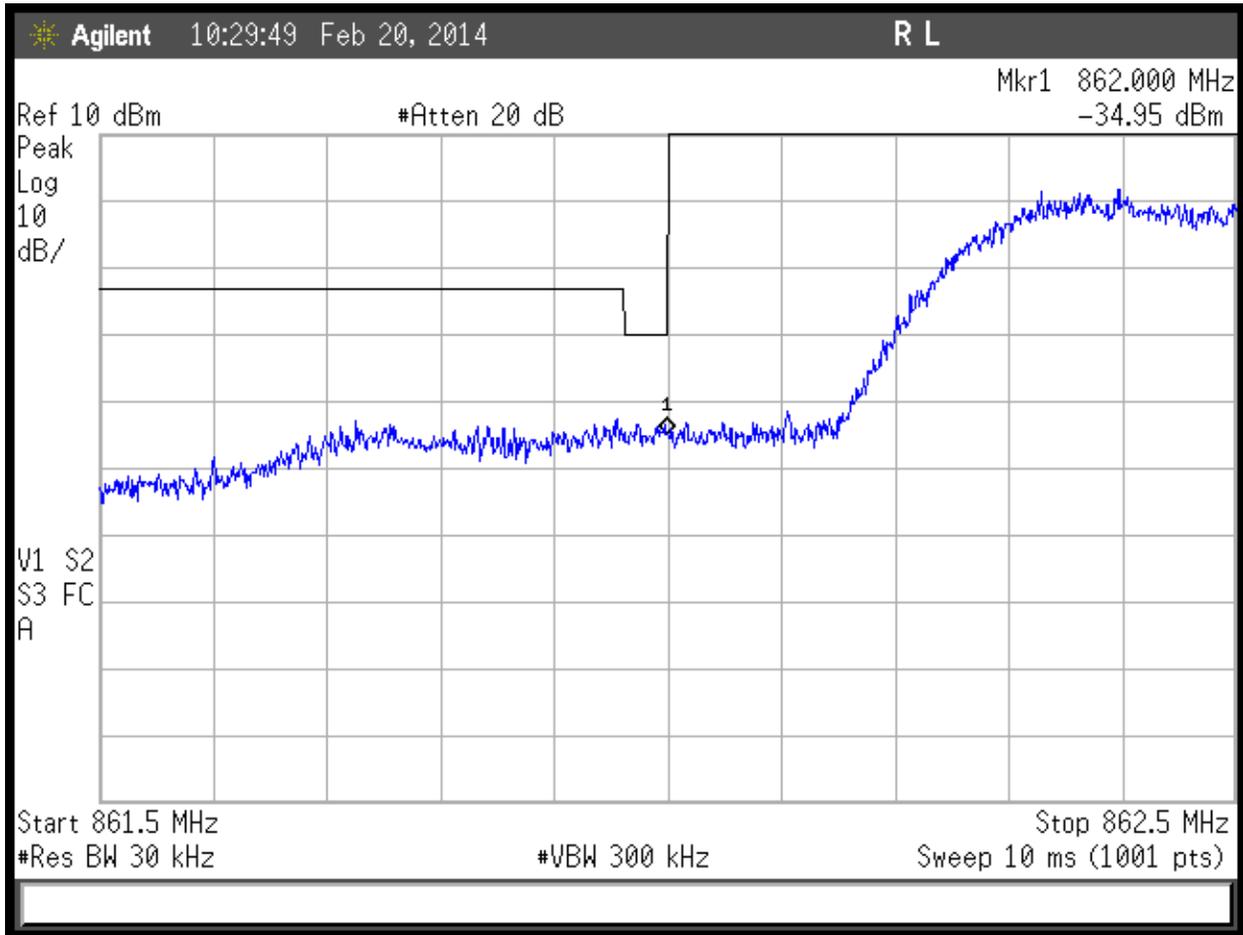

BC10 Low Channel



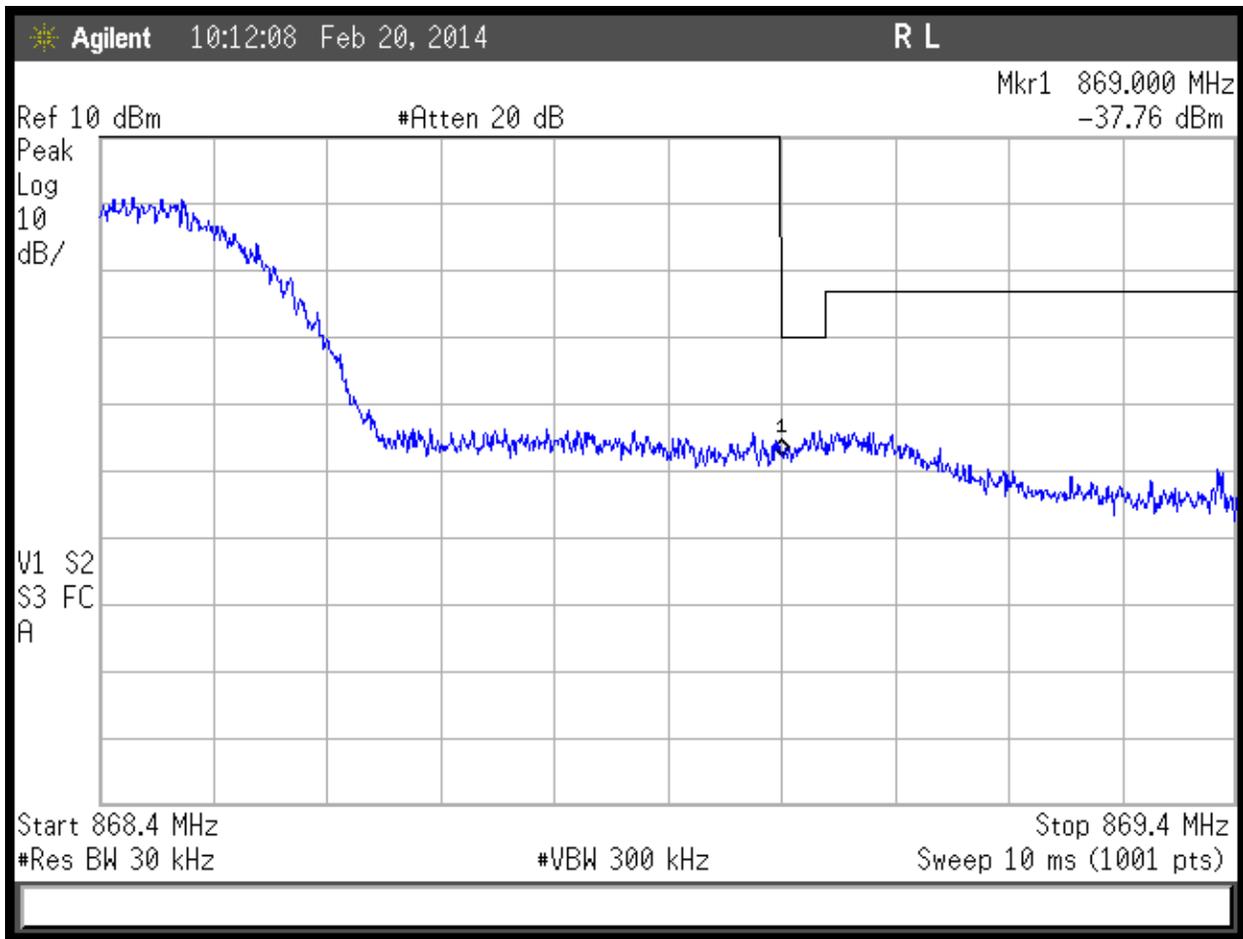

BC10 High Channel




Conducted Spurious Emissions at Antenna Port LIMITS

90.669 Emission limits.


(a) On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 plus $10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation.

$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$

PLOTS

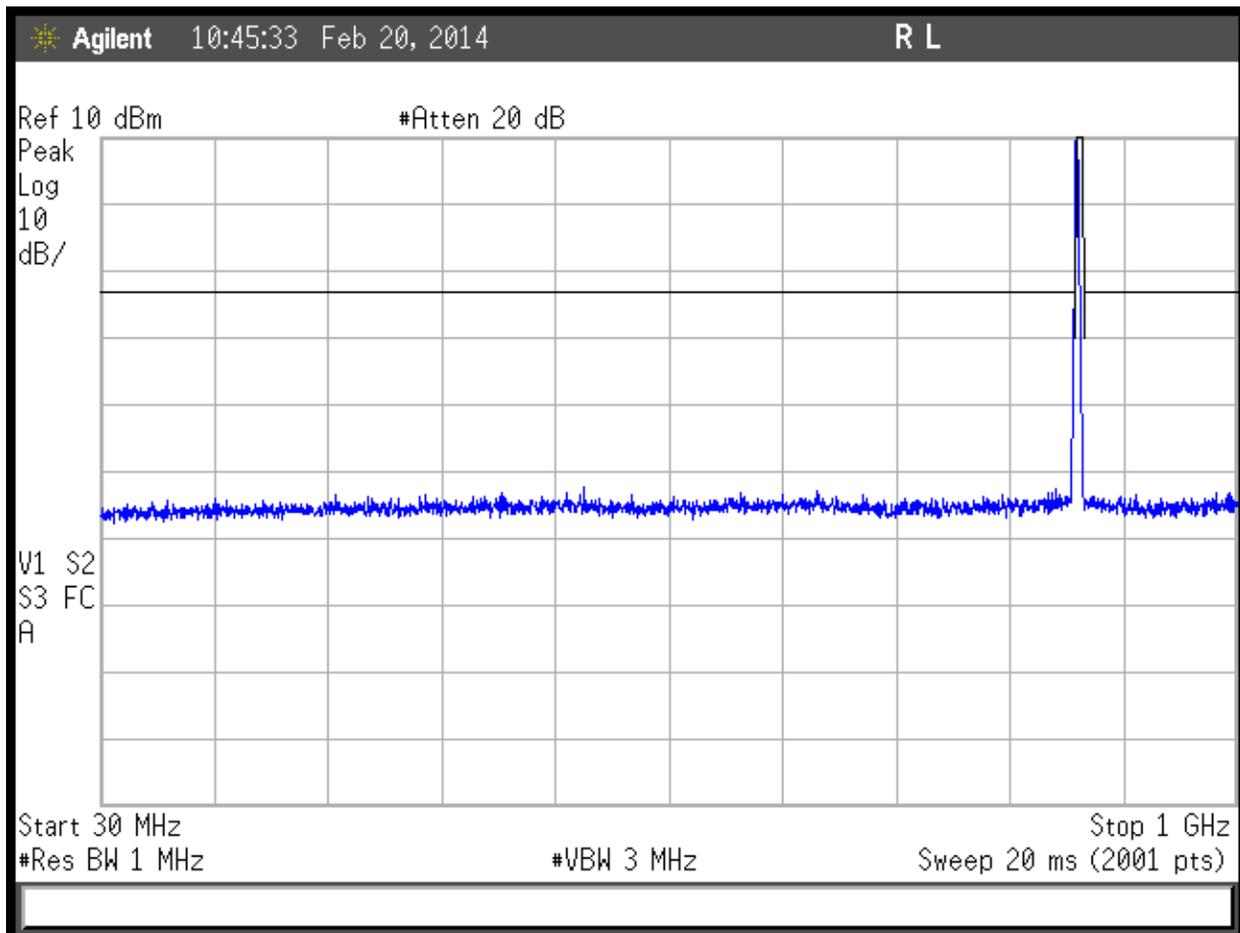


BC10, 30MHz to 1GHz

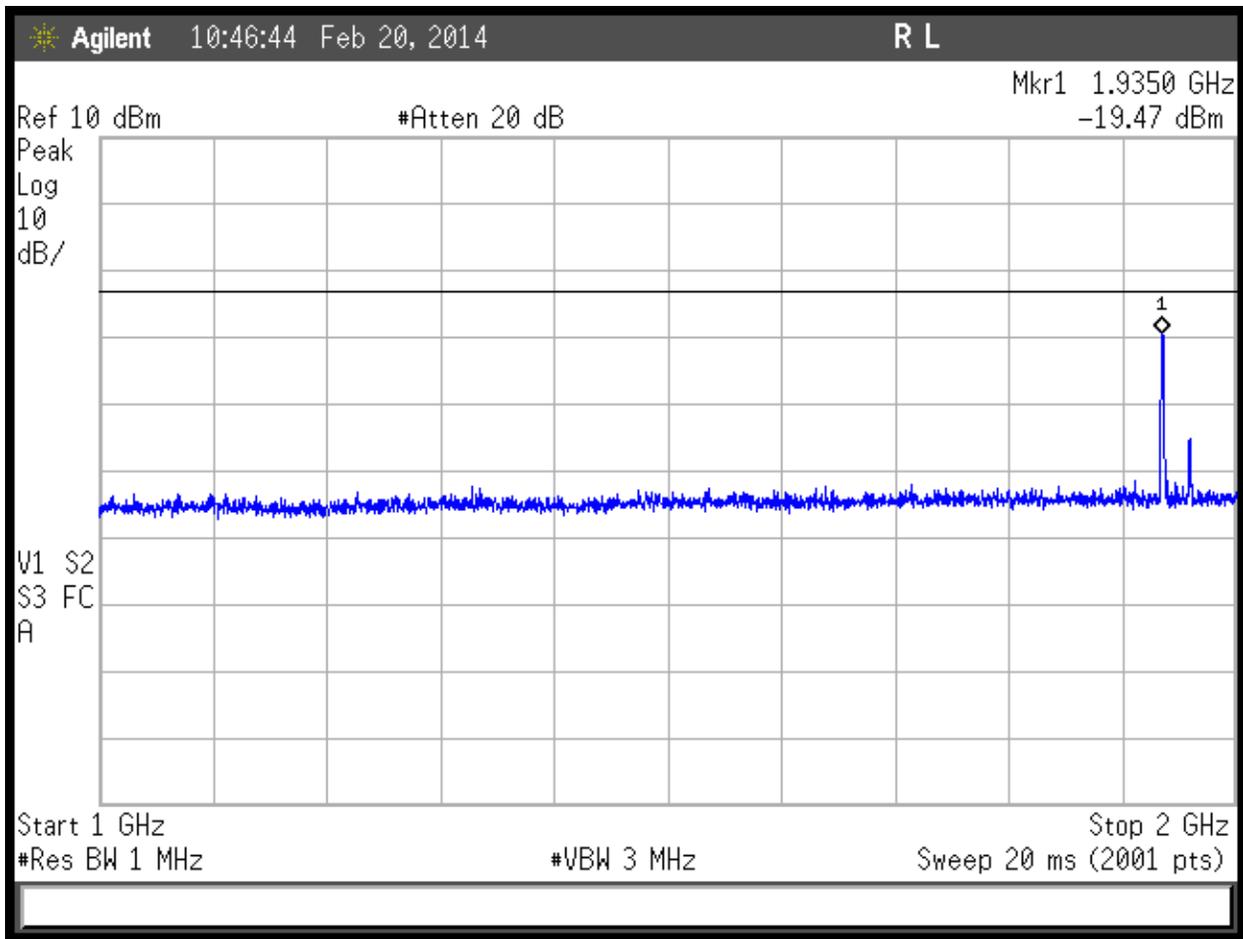


BC10, 1-2GHz



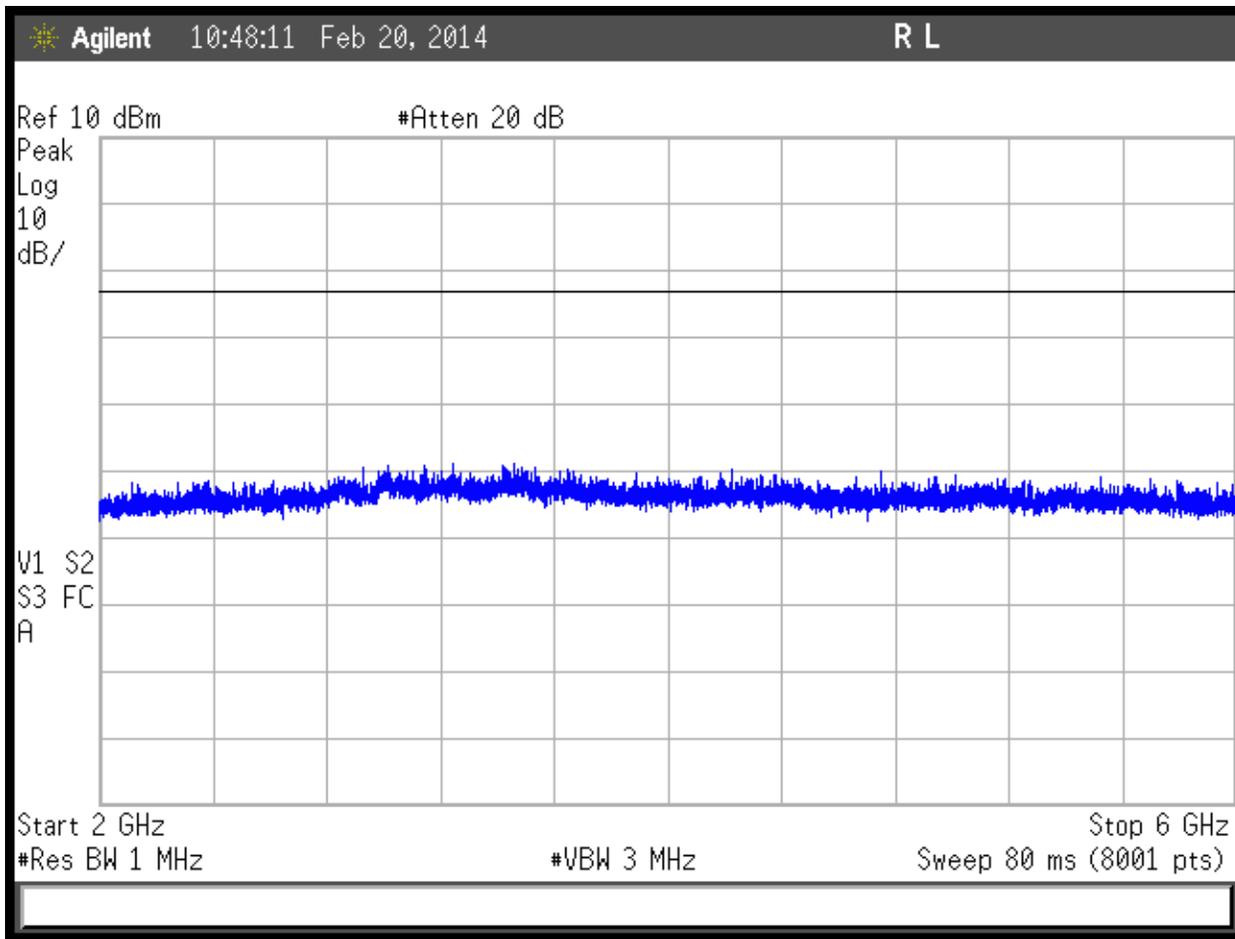

BC10, 2-6GHz



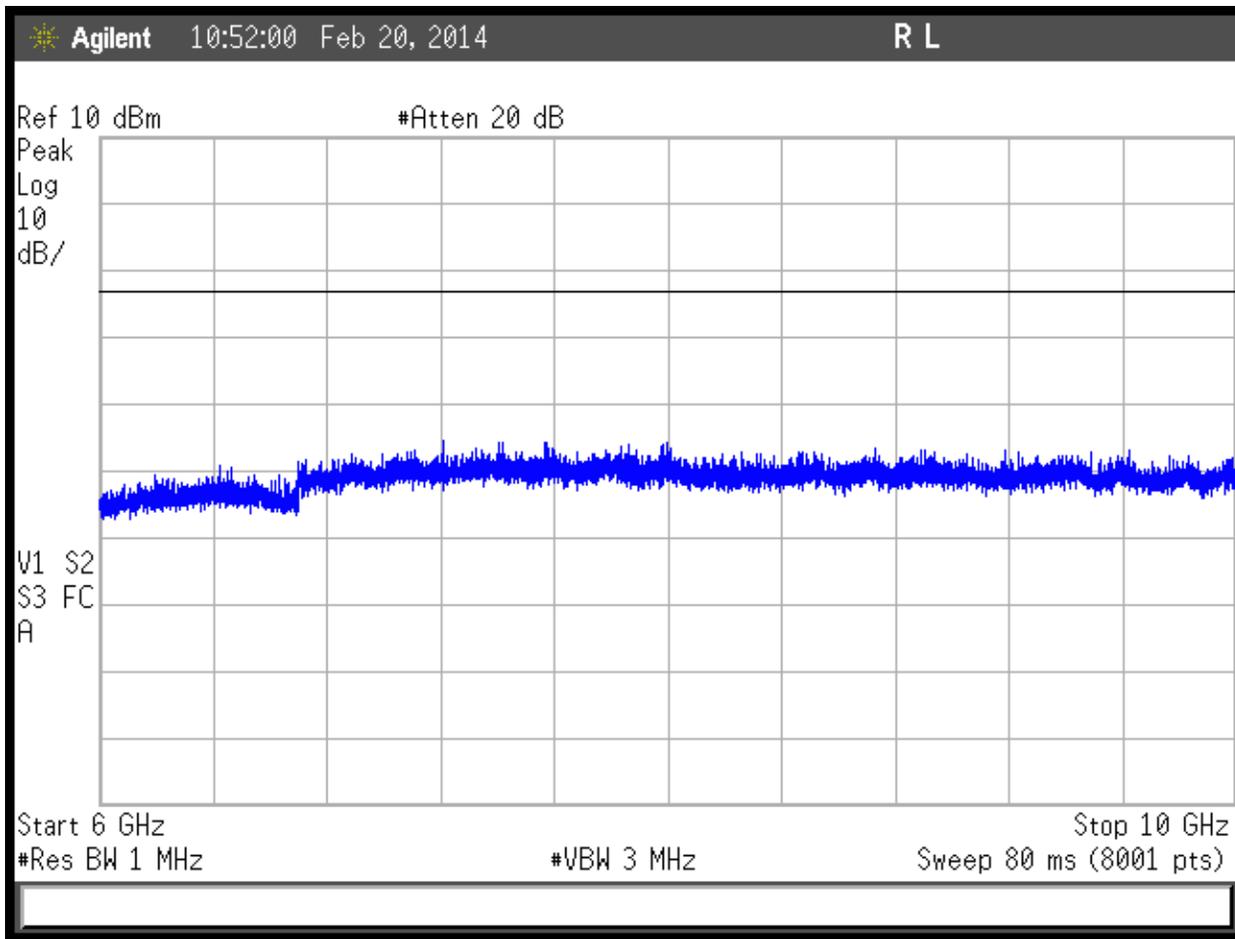


BC10, 6-10GHz




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



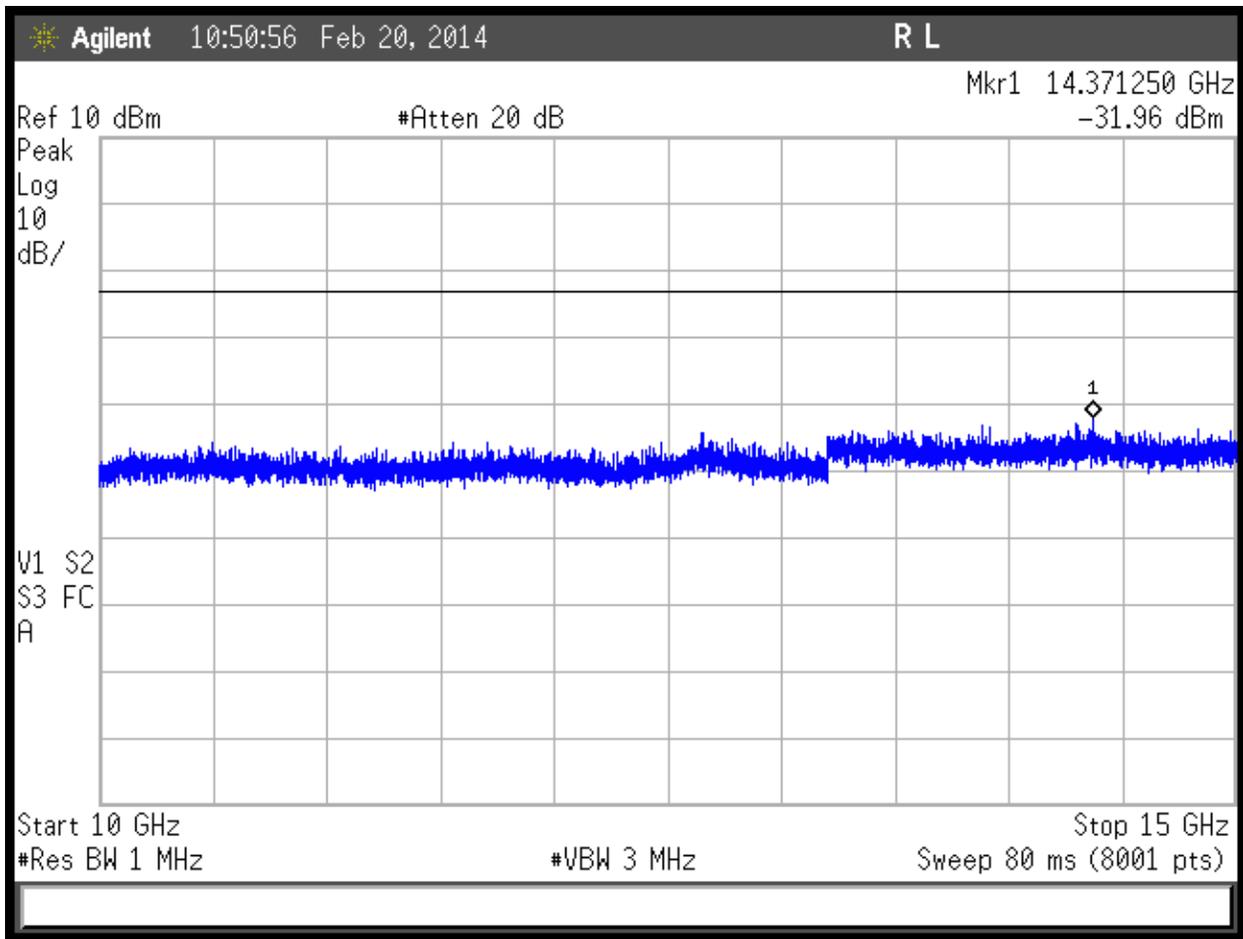

BC10, 10-15GHz



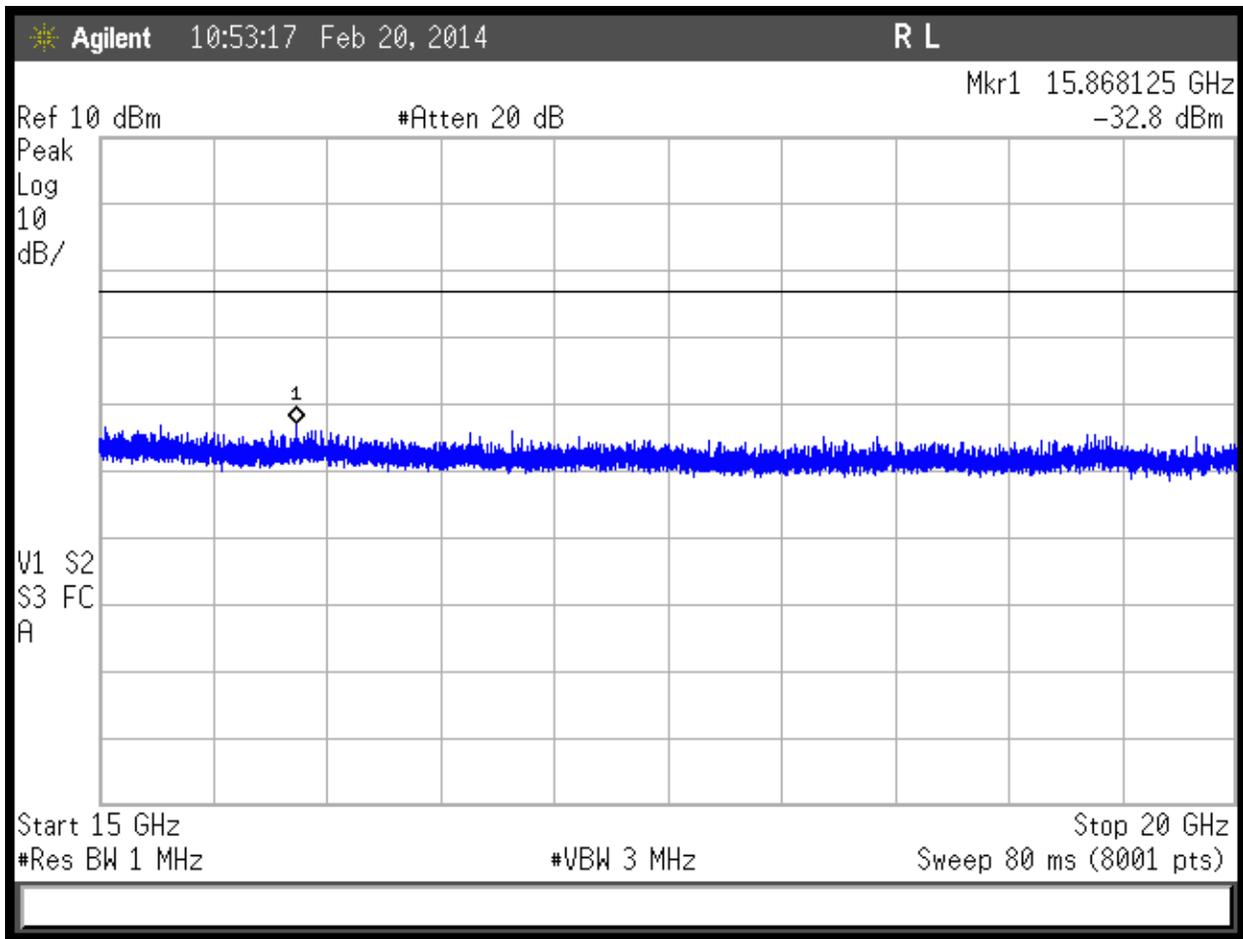

BC10, 15-20GHz



Tests for Parts 22, 24, & 90: Spurious Emissions and Frequency Stability

Radiated Spurious Emissions Measurements

MEASUREMENTS / RESULTS

Note that the EUT passes the FCC Class B limit, which is much lower than the -13dBm limit (82.158dBuV/m at 3 meters) for licensed transmitter spurious emissions. Only worst-case radiated spurious data is presented.

Radiated Emissions Table												
Date: 21-Feb-14			Company: Airvana				Work Order: O0320					
Engineer: Arik Zwimer			EUT Desc: 750723				EUT Operating Voltage/Frequency: 120Vac/60Hz					
Temp: 25°C			Humidity: 2%				Pressure: 1009mBar					
Frequency Range: 30-1000MHz						Measurement Distance: 3 m						
Notes:						EUT Max Freq: 1988.75MHz						
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBuV/m)	---			FCC Class B		
							Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
V	41.6	50.0	25.4	12.5	0.4	37.5	---	---	---	40.0	-2.5	Pass
V	43.8	48.2	25.4	10.9	0.4	34.1	---	---	---	40.0	-5.9	Pass
V	45.7	53.3	25.4	9.9	0.4	38.2	---	---	---	40.0	-1.8	Pass
V	47.1	51.1	25.4	9.1	0.5	35.3	---	---	---	40.0	-4.7	Pass
V	71.0	44.8	25.4	8.5	0.5	28.4	---	---	---	40.0	-11.6	Pass
V	74.6	44.3	25.4	8.7	0.6	28.2	---	---	---	40.0	-11.8	Pass
V	90.5	47.1	25.4	7.8	0.7	30.2	---	---	---	43.5	-13.3	Pass
V	138.4	46.5	25.4	13.1	0.6	34.8	---	---	---	43.5	-8.7	Pass
H	230.0	48.3	25.4	11.2	1.1	35.2	---	---	---	46.0	-10.8	Pass
H	250.0	51.3	25.3	11.6	1.0	38.6	---	---	---	46.0	-7.4	Pass
H	375.0	46.4	24.5	15.1	1.3	38.3	---	---	---	46.0	-7.7	Pass
V	500.0	44.3	25.5	17.7	1.3	37.8	---	---	---	46.0	-8.2	Pass
V	625.0	47.2	25.2	19.3	1.7	43.0	---	---	---	46.0	-3.0	Pass
V	750.0	46.3	23.6	20.8	1.9	45.4	---	---	---	46.0	-0.6	Pass
H	800.0	33.5	24.7	21.3	1.8	31.9	---	---	---	46.0	-14.1	Pass
H	875.0	40.3	25.4	22.1	2.1	39.1	---	---	---	46.0	-6.9	Pass
H	1000.0	32.0	24.4	23.2	2.2	33.0	---	---	---	54.0	-21.0	Pass
Table Result: Pass			by -0.6 dB				Worst Freq: 750.0 MHz					
Test Site: EMI Chamber 1			Cable 1: Asset #1782				Cable 2: Asset #1784					
Analyzer: Gold			Preamp: Red-White				Antenna: Red-Black					



Radiated Emissions Table

Date: 18-Feb-14		Company: Airvana		Work Order: O0320											
Engineer: Arik Zwimer		EUT Desc: 750723		EUT Operating Voltage/Frequency: 120Vac/60Hz											
Temp: 26°C		Humidity: 2%		Pressure: 1009mBar											
Frequency Range: 1-18GHz				Measurement Distance: 3 m											
Notes: Revision 1.07 of model 750723				EUT Max Freq: 1988.75MHz											
BC0 channels: ch. 1 low; ch. 320 mid; ch. 640 high. BC10 channels: ch. 476 low; ch. 576 mid; ch. 676 high. BC1 channels: ch. 25 low; ch. 525 mid; ch. 1175 high.				Note that channels 300 & 700 were used for tests 7, 8 & 9 for EVDO and One-X while the Beacon radio was evaluated for low, mid & high BC1 channels.											
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	
Test 1: BC0 (Beacon radio) mid; BC1 (One-X radio) mid; BC1 (EVDO radio) low															
H	1052.0	61.8	45.8	44.3	24.6	2.3	44.4	28.4	74.0	-29.6	Pass	54.0	-25.6	Pass	
V	1275.0	58.0	40.7	44.8	25.5	2.3	41.0	23.7	74.0	-33.0	Pass	54.0	-30.3	Pass	
Test 2: BC0 (Beacon radio) low; BC1 (One-X radio) low; BC1 (EVDO radio) mid															
H	1540.0	58.5	41.4	43.4	25.7	2.8	43.6	26.5	74.0	-30.4	Pass	54.0	-27.5	Pass	
Test 3: BC0 (Beacon radio) high; BC1 (One-X radio) high; BC1 (EVDO radio) mid															
V	1100.0	64.6	52.0	44.3	24.9	2.2	47.4	34.8	74.0	-26.6	Pass	54.0	-19.2	Pass	
Test 4: BC10 (Beacon radio) low; BC1 (One-X radio) low; BC1 (EVDO radio) high															
V	1465.0	67.4	54.4	43.6	25.6	3.0	52.4	39.4	74.0	-21.6	Pass	54.0	-14.6	Pass	
Test 5: BC10 (Beacon radio) mid; BC1 (One-X radio) low; BC1 (EVDO radio) high															
V	1442.0	66.3	52.7	43.8	25.6	2.9	51.0	37.4	74.0	-23.0	Pass	54.0	-16.6	Pass	
Test 6: BC10 (Beacon radio) high; BC1 (One-X radio) low; BC1 (EVDO radio) high															
V	1438.0	69.4	57.8	43.8	25.6	2.8	54.0	42.4	74.0	-20.0	Pass	54.0	-11.6	Pass	
Test 7: BC1 (Beacon radio) low channel 25; BC1 (One-X radio) channel 300; BC1 (EVDO radio) channel 700															
H	1317.0	65.5	48.7	44.6	25.5	2.5	48.9	32.1	74.0	-25.1	Pass	54.0	-21.9	Pass	
V	1500.0	58.7	54.8	43.2	25.6	2.9	44.0	40.1	74.0	-30.0	Pass	54.0	-13.9	Pass	
Test 8: BC1 (Beacon radio) mid channel 525; BC1 (One-X radio) channel 300; BC1 (EVDO radio) channel 700															
H	1428.0	70.0	61.4	43.9	25.6	2.8	54.5	45.9	74.0	-19.5	Pass	54.0	-8.1	Pass	
V	1500.0	70.8	56.2	43.2	25.6	2.9	56.1	41.5	74.0	-17.9	Pass	54.0	-12.5	Pass	
Test 9: BC1 (Beacon radio) high channel 1175; BC1 (One-X radio) channel 300; BC1 (EVDO radio) channel 700															
H	1395.0	62.2	47.5	44.2	25.6	2.6	46.2	31.5	74.0	-27.8	Pass	54.0	-22.5	Pass	
V	1500.0	58.2	53.2	43.2	25.6	2.9	43.5	38.5	74.0	-30.5	Pass	54.0	-15.5	Pass	
Table Result:		Pass				by		-8.1 dB		Worst Freq:			1428.0 MHz		
Test Site: EMI Chamber 1		Cable 1: Asset #1786		Cable 2: Asset #1781											
Analyzer: Rental SA#2		Preamp: Red-Blue		Antenna: Orange Horn											

Radiated Emissions Table

Date: 18-Feb-14		Company: Airvana		Work Order: O0320											
Engineer: Arik Zwimer		EUT Desc: 750723		EUT Operating Voltage/Frequency: 120Vac/60Hz											
Temp: 26°C		Humidity: 2%		Pressure: 1009mBar											
Frequency Range: 18-20GHz				Measurement Distance: 0.1 m											
Notes: Revision 1.07 of model 750723				EUT Max Freq: 1988.75MHz											
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	
Test 10: Beacon low; One-X mid; EVDO high															
NO EMISSIONS WERE FOUND IN THIS RANGE.															
Test 11: Beacon low; One-X mid; EVDO high															
NO EMISSIONS WERE FOUND IN THIS RANGE.															
Test 12: Beacon low; One-X mid; EVDO high															
NO EMISSIONS WERE FOUND IN THIS RANGE.															
Table Result:		Pass				by		N/A dB		Worst Freq:			N/A MHz		
Test Site: EMI Chamber 1		Cable 1: 40GHz Mixer/18-26.5GHz no cable		Cable 2: 18-26.5GHz											
Analyzer: Rental SA#2		Preamp: 18-26.5GHz		Antenna: 18-26.5GHz Horn											



Frequency Stability

REQUIREMENTS

Part 22:

Per 22.355, Table C-1, the frequency stability shall remain within 1.5ppm for this device.

Part 24:

“The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” [24.235]

Part 90:

Per 90.213(a), the frequency stability shall remain within 1.5ppm for this device.

MEASUREMENTS / RESULTS

Frequency Stability			Curtis-Straus LLC
Engineer: Arik Zwirner		Company: Airvana	
Date: 26-Feb-14		EUT: 750723	
Spectrum Analyzer: Rental #1		Work Order: O0320	
Set Frequency: 1,956,250,000 Hz			
Notes: Reference Conditions: 110Vac/60Hz, 20°C			
Temperature (°C)	Supply Voltage (60Hz)	Center Frequency (Hz)	Frequency Deviation (ppm)
-30	110Vac	1956250000	0.0
-20	110Vac	1956250000	0.0
-10	110Vac	1956250000	0.0
0	110Vac	1956250000	0.0
10	110Vac	1956250000	0.0
20	93.5Vac	1956250000	0.0
20	110Vac	1956250000	0.0
20	126.5Vac	1956250000	0.0
30	110Vac	1956250000	0.0
40	110Vac	1956250000	0.0
50	110Vac	1956250000	0.0
<p>The EUT has an intentional transmitter that operates at both 800 and 1900MHz bands. The hardware utilized for both bands is the same while the software controls the different bands. Testing was performed at only the 1900MHz band to satisfy the 800MHz band requirements because a single oscillator is used as the source for both.</p>			



Conducted Spurious Emissions on AC Mains

AC Conducted Emissions Data Table														
Date: 25-Feb-14				Company: Aivana				Work Order: O0320						
Engineer: Anik Zwimer				EUT Desc: 750723 (Revision 1.07)				Humidity: 12%						
Temp: 21.0 °C				Pressure: 1005 mBar				Notes:						
Frequency Range: 0.15-30MHz							EUT Input Voltage/Frequency: 120Vac/60Hz							
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC/CISPR Class B			FCC/CISPR Class B		
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)
0.150	34.8	34.4	14.7	14.5	-0.1	-0.1	0.0	-20.4	66.0	-10.7	Pass	56.0	-20.8	Pass
0.180	29.5	29.0	18.0	15.6	-0.1	-0.1	0.0	-20.4	64.5	-14.5	Pass	54.5	-16.0	Pass
0.225	20.5	22.3	7.7	9.4	-0.1	0.0	0.0	-20.4	62.6	-19.9	Pass	52.6	-22.8	Pass
0.325	16.5	14.0	7.9	4.4	-0.1	0.0	-0.1	-20.4	59.6	-22.6	Pass	49.6	-21.2	Pass
3.77	13.8	11.9	6.9	5.5	0.0	0.0	-0.1	-20.4	56.0	-21.7	Pass	46.0	-18.6	Pass
10.50	13.3	7.9	6.4	1.7	-0.1	-0.1	-0.1	-20.4	60.0	-26.2	Pass	50.0	-23.1	Pass
18.20	5.8	7.3	-1.3	1.8	-0.1	-0.1	-0.1	-20.3	60.0	-32.2	Pass	50.0	-27.7	Pass
Result: Pass				Worst Margin: -10.7 dB				Frequency: 0.150 MHz						
Measurement Device: LISN ASSET 1728(Line 1) LISN ASSET 1729(Line 2)				Cable: CEM1-11				Spectrum Analyzer: SA EMI Chamber (1327)						
				Attenuator: 20dB Atten-4				Site: CEMI 6						



Test Equipment

Radiated Emissions Tests 2-18-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Rental SA #2 (1860)	9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	4/15/2014	4/15/2013	
Radiated Emissions Sites									
	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on	
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz		II	3/16/2014	2/16/2012	
EMI Chamber 1	719150	2762A-6	A-0015	>1GHz		I	5/17/2015	5/17/2013	
Preamps /Couplers Attenuators / Filters									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Red-Blue	1-18GHz	PE2-38-218-4R5-17-15-SFF	CS	NA	1257	II	9/13/2014	9/13/2013	
High Pass Filter	0.03-6.5 GHz	11SH10-1000/T3000-0/0	K&L	1	1310	II	1/8/2015	1/8/2014	
High Pass Filter	0.03-14.5 GHz	11SH10-3000/T9000-0/0	K&L	1	1311	II	1/8/2015	1/8/2014	
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	I	10/12/2014	10/12/2013	
Antennas									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Orange Horn	1-18GHz	3115	EMCO	0004-6123	390	I	10/2/2014	10/2/2013	
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	I	Verify before Use	date of test	
Meteorological Meters									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/20/2014	3/20/2013	
TH A#1832		35519-044	Control Company	130318277	1832	II	6/13/2015	6/13/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Substitution Method (ERP & EIRP) 2-19-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Brown (1328)	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	4/18/2014	4/18/2013	
Radiated Emissions Sites									
	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on	
1DCC-OATS-3M-I	719150	2762A-8	A-0015	>1GHz		I	5/18/2015	5/18/2013	
1DCC-OATS-3M-I	719150	2762A-8	A-0015	30-1000MHz		II	5/17/2015	5/17/2013	
Antennas									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Green Bilog	30-2000MHz	CBL6112B	Chase	2742	620	I	3/6/2015	3/6/2013	
Black Horn	1-18GHz	3115	EMCO	9703-5148	56	I	8/5/2015	8/5/2013	
Orange Horn	1-18GHz	3115	EMCO	0004-6123	390	I	10/2/2014	10/2/2013	
Adjustable Dipole	30-1000MHz	3121C	EMCO	1371	756	I	12/28/2014	12/28/2013	
Meteorological Meters									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/20/2014	3/20/2013	
TH A#1827		35519-044	Control Company	130319923	1827	II	6/13/2015	6/13/2013	
Cables									
	Range		Mfr			Cat	Calibration Due	Calibrated on	
Asset #1785	9kHz - 18GHz		Florida RF			II	3/14/2014	3/14/2013	
REMI-05	9kHz - 2GHz		C-S			II	10/6/2014	10/6/2013	
Signal Generators									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
RFI-High Sweeper 2	0.01-20.0GHz	HP83752B	Agilent	3610A01297	1820	I	10/15/2014	10/15/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Antenna Port Conducted Tests 2-20-2014 & 2-24-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Brown (1328)	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	4/18/2014	4/18/2013	
Meteorological Meters									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/20/2014	3/20/2013	
TH A#1827		35519-044	Control Company	130319923	1827	II	6/13/2015	6/13/2013	
Attenuators									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
20dB Attenuator-73	9kHz-20GHz			N/A		II	10/12/2014	10/12/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Radiated Emissions Tests 2-21-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	3/15/2014	3/18/2013	
Brown (1328)	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	4/18/2014	4/18/2013	
Radiated Emissions Sites									
	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on	
EMI Chamber 2	719150	2762A-7	A-0015	30-1000MHz		II	3/15/2014	2/15/2012	
EMI Chamber 2	719150	2762A-7	A-0015	>1GHz		I	5/16/2015	5/16/2013	
Preamps/Couplers Attenuators / Filters									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Red-White	0.009-2000MHz	ZFL-1000-LN	CS	N/A	1258	II	2/4/2015	2/4/2014	
Red-Blue	1-18GHz	PE2-38-218-4R5-17-15-SFF	CS	NA	1257	II	9/13/2014	9/13/2013	
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	I	10/12/2014	10/12/2013	
High Pass Filter	0.03-6.5 GHz	11SH10-1000/T3000-0/0	K&L	1	1310	II	1/8/2015	1/8/2014	
High Pass Filter	0.03-14.5 GHz	11SH10-3000/T9000-0/0	K&L	1	1311	II	1/8/2015	1/8/2014	
Antennas									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Red-White Bilog	30-2000MHz	JB1	Sunol	A091604-1	1105	I	7/24/2015	7/24/2013	
Yellow Horn	1-18GHz	3115	EMCO	9608-4898	37	I	7/19/2014	7/19/2013	
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	I	Verify before Use	date of test	
Meteorological Meters									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/20/2014	3/20/2013	
TH A#1830		35519-044	Control Company	130320003	1830	II	6/13/2015	6/13/2013	
Cables									
	Range		Mfr			Cat	Calibration Due	Calibrated on	
Asset #1782	9kHz - 18GHz		Florida RF			II	3/6/2014	3/6/2013	
Asset #1784	9kHz - 18GHz		Florida RF			II	3/14/2014	3/14/2013	
REMI-High-21	9kHz - 26.5GHz		C-S			II	2/12/2015	2/12/2014	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

AC Mains Conducted Emissions Tests 2-25-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
SA EMI Chamber (1327)	9kHz-13.2 GHz	E4405B	Agilent	MY45103416	1327	I	5/30/2014	5/30/2013	
LISNs/Measurement Probes									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
LISN Asset 1728	150kHz-30MHz	LH-150A	Corn-Power	201084	1728	I	2/28/2014	1/28/2013	
LISN Asset 1729	150kHz-30MHz	LH-150A	Corn-Power	201085	1729	I	2/28/2014	1/28/2013	
Conducted Test Sites (Mains / Telco)									
	FCC Code		VCCI Code			Cat	Calibration Due	Calibrated on	
CEMI 6	719150		A-0015			III	NA	N/A	
Meteorological Meters									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/20/2014	3/20/2013	
TH A#1827		35519-044	Control Company	130319923	1827	II	6/13/2015	6/13/2013	
Cables									
	Range		Mfr			Cat	Calibration Due	Calibrated on	
CEMI-11	9kHz - 2GHz		C-S			II	8/24/2014	8/24/2013	
Attenuators									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
20dB Atten-4	9kHz-2GHz			N/A		II	7/12/2014	12/7/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Frequency Stability Tests 2-26-2014:

Rev. 2/16/2014

Spectrum Analyzers / Receivers /Preselectors									
	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Brown (1328)	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	4/18/2014	4/18/2013	
Environmental Chamber									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Environmental # 17 (Safety #21)		SGTH-31S	B.M.A.	2245	321	I	11/11/2013	11/11/2014	
RMS Voltmeters/Current Clamp									
		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
DMM		114	Fluke	25660084	1866	I	1/13/2015	1/13/2014	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and "CURTIS-STRAUS" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8887



page 147 of
148

13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2)_#684340 v13CS

