

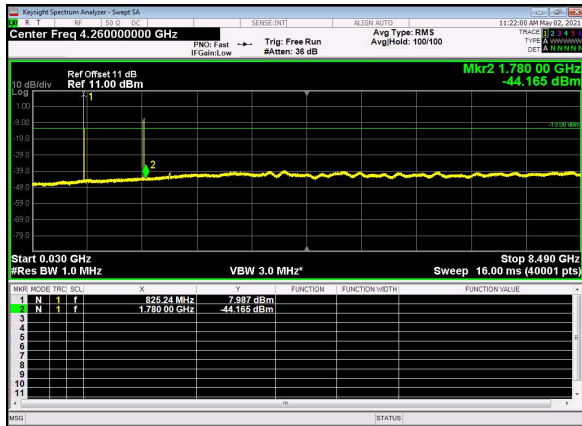
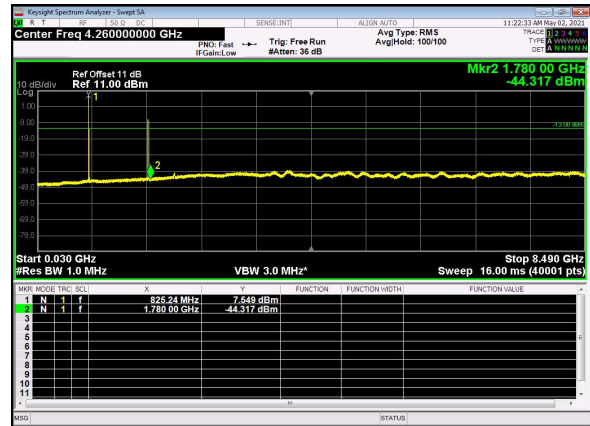
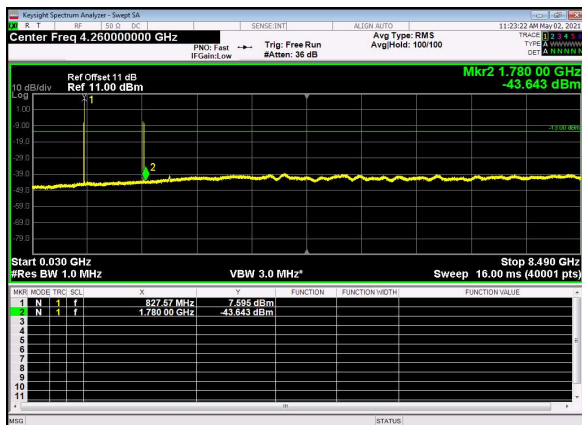
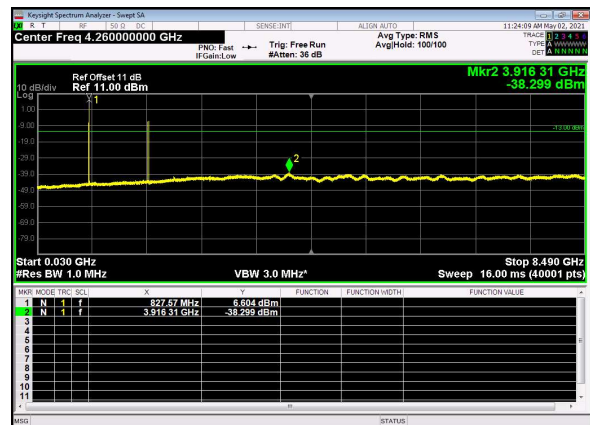
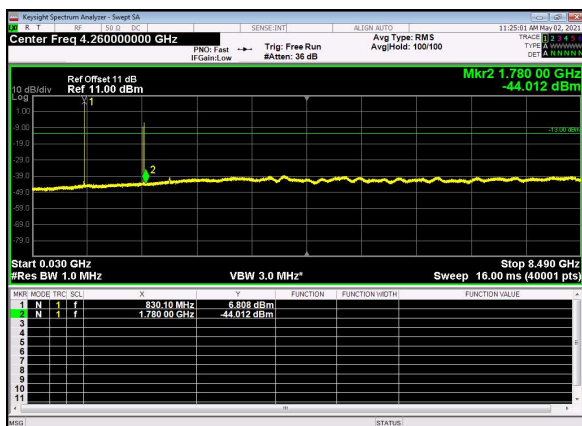
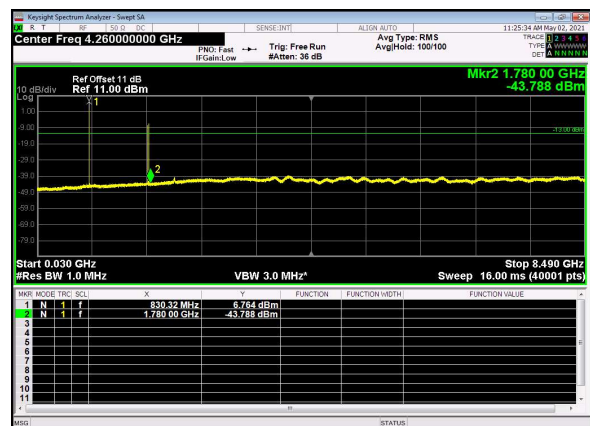
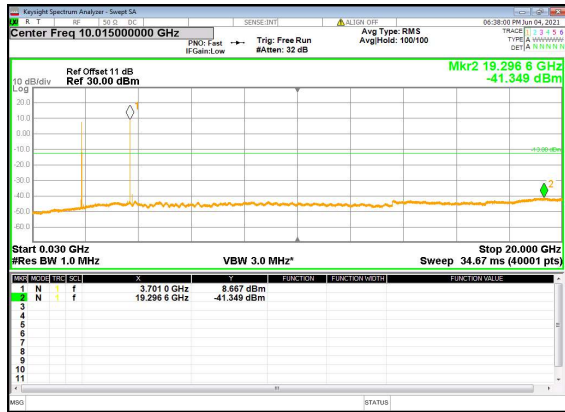
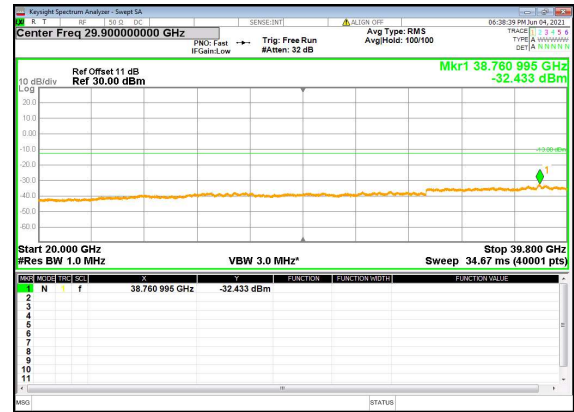
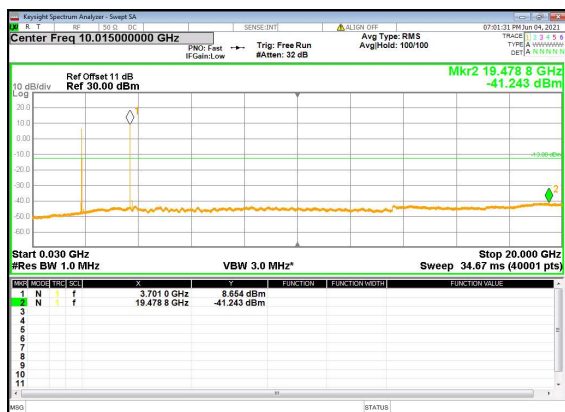
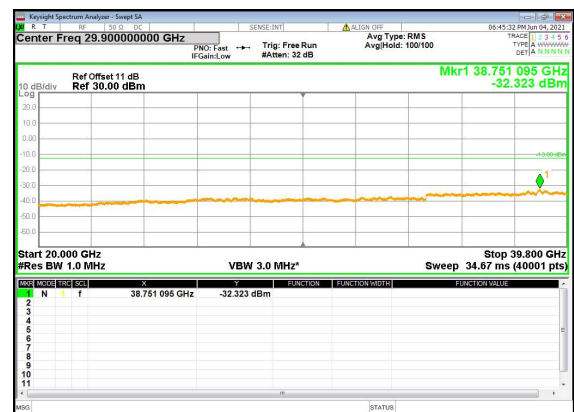
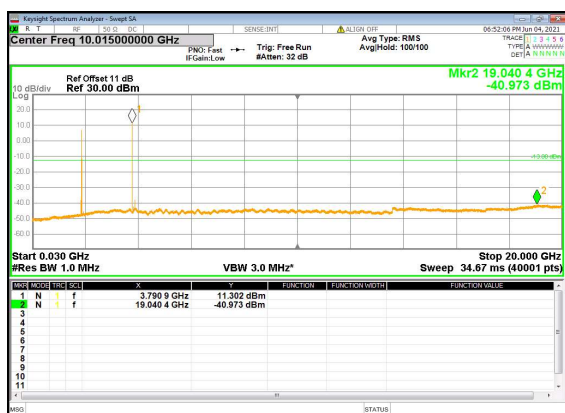


B66_N5(20M)_DFT-s-OFDM_BPSK_Edge_
1RB_Left_Low_CHB66_N5(20M)_DFT-s-OFDM_QPSK_Edge_
1RB_Left_Low_CHB66_N5(20M)_DFT-s-OFDM_BPSK_Edge_
1RB_Left_Mid_CHB66_N5(20M)_DFT-s-OFDM_QPSK_Edge_
1RB_Left_Mid_CHB66_N5(20M)_DFT-s-OFDM_BPSK_Edge_
1RB_Left_High_CHB66_N5(20M)_DFT-s-OFDM_QPSK_Edge_
1RB_Left_High_CH


B2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1
RB_Left_Low_CHB2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1
RB_Left_Low_CHB2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1
RB_Left_Low_CHB2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1
RB_Left_Low_CHB2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1
RB_Left_Mid_CHB2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1
RB_Left_Mid_CH

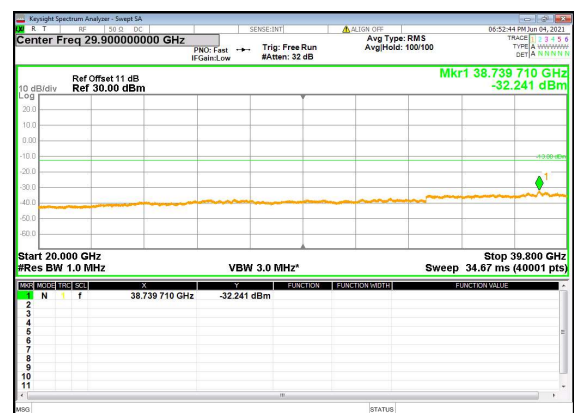


B2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1 RB_Left_Mid_CH

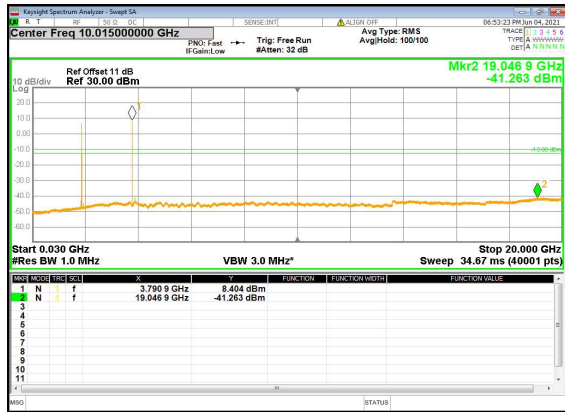


B2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1 RB_Left_Mid_CH

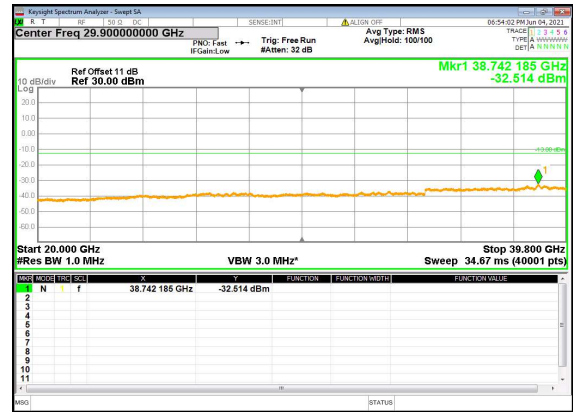


B2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1 RB_Left_High_CH

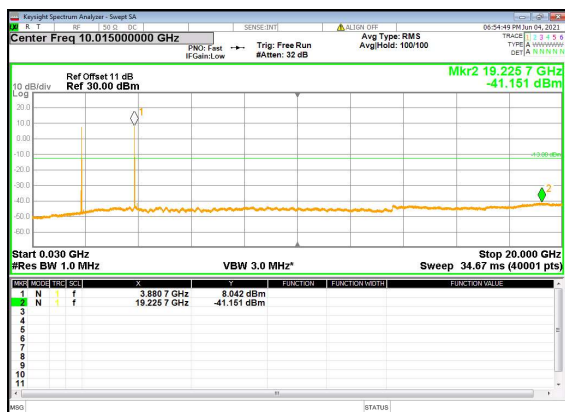


B2_N77(100M)_DFT-s-OFDM_BPSK_Edge_1 RB_Left_High_CH

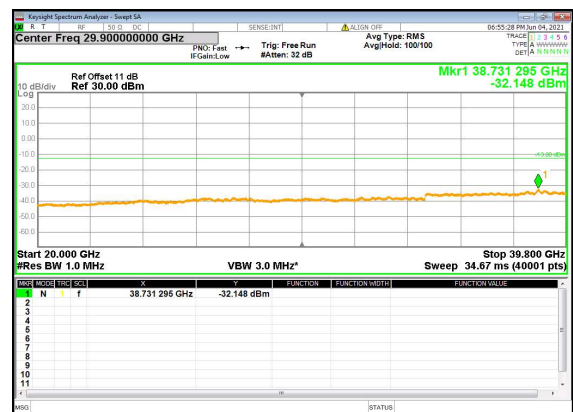

B2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1 RB_Left_High_CH

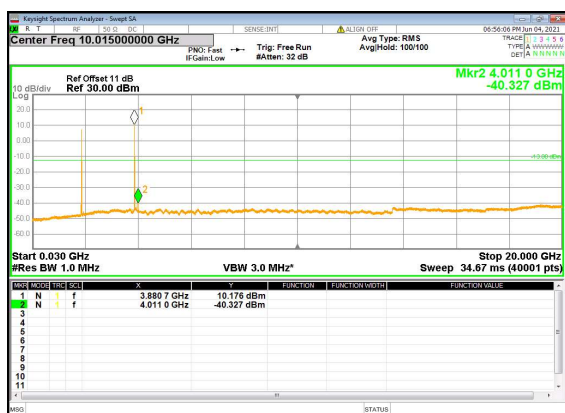

B2_N77(100M)_DFT-s-OFDM_QPSK_Edge_1 RB_Left_High_CH

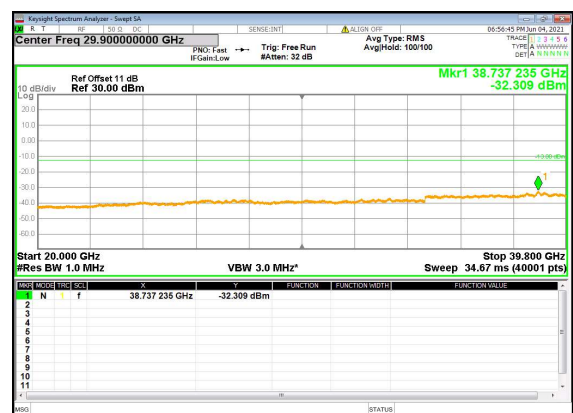




2.6. Band Edge

2.6.1. Requirement

According to FCC section 2.1051, section 27.53(h), section 27.53(g), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

2.6.2. Test Description

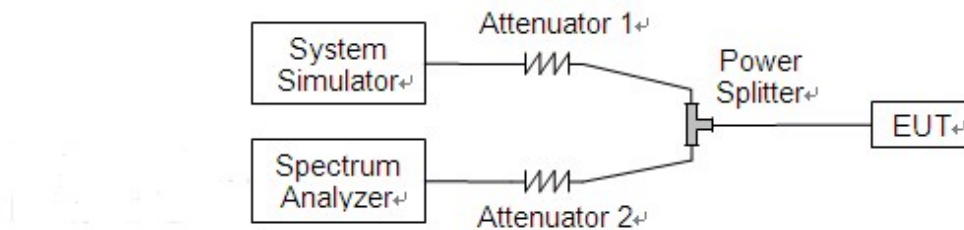

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.6.3. Test procedure







KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.



REPORT No.: SZ21010262W04

2.6.4. Test Result

The center frequency of spectrum is the band edge frequency and span is 2MHz, Record the max trace into the test report.

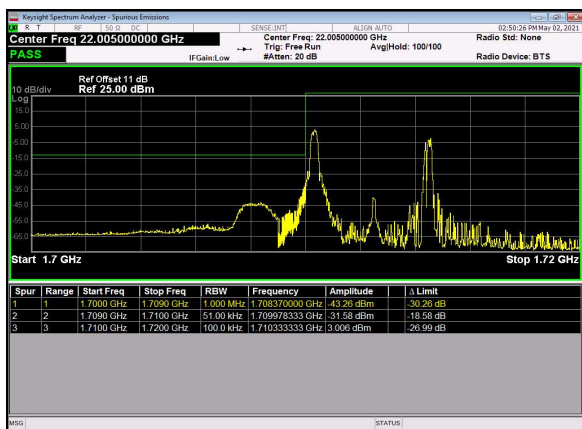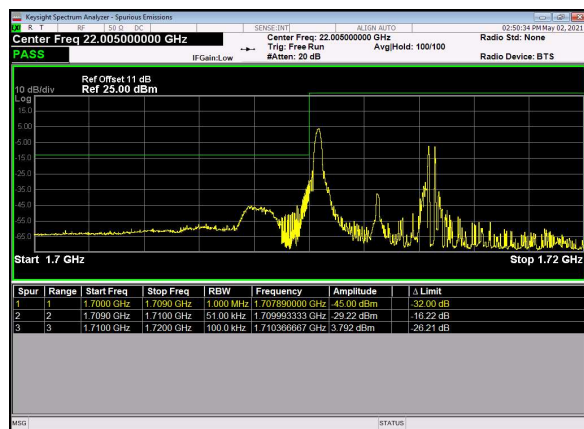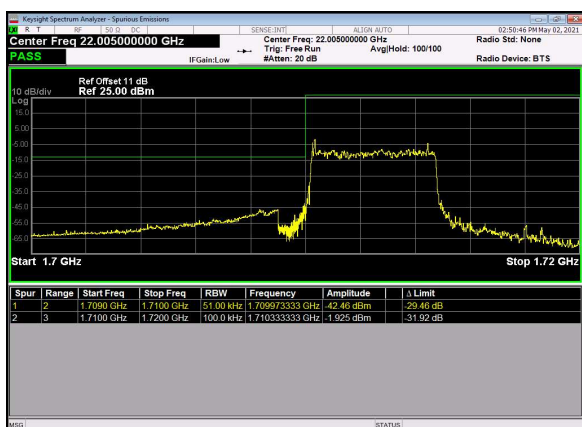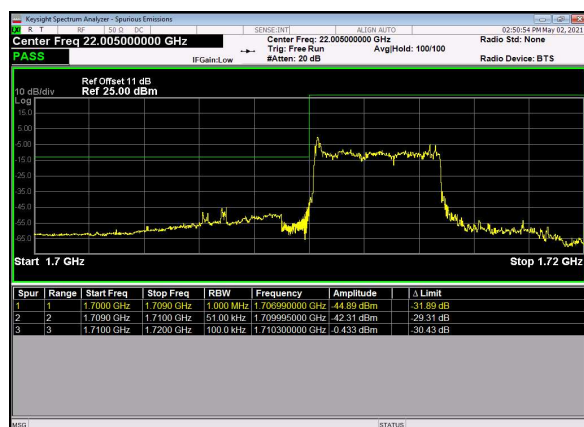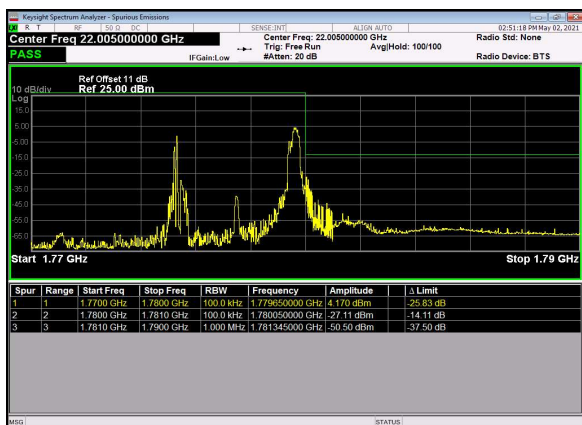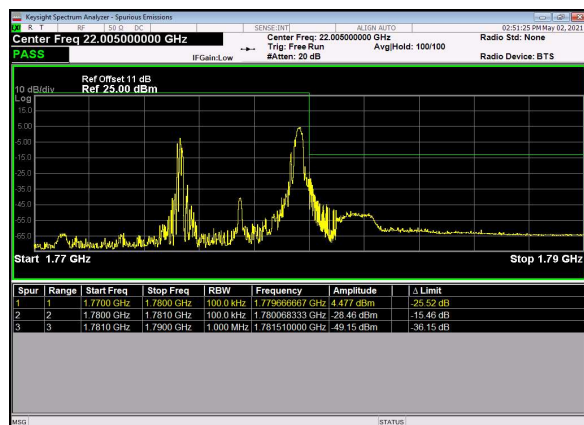B13_N66(5M)_DFT-s-OFDM_BPSK_Edge_
1RB_Left_Low_CHB13_N66(5M)_DFT-s-OFDM_QPSK_Edge_
1RB_Left_Low_CHB13_N66(5M)_DFT-s-OFDM_BPSK_
Outer_Full_Low_CHB13_N66(5M)_DFT-s-OFDM_QPSK_
Outer_Full_Low_CHB13_N66(5M)_DFT-s-OFDM_BPSK_Edge_
1RB_Right_High_CHB13_N66(5M)_DFT-s-OFDM_QPSK_Edge_
1RB_Right_High_CH




B13_N66(5M)_DFT-s-OFDM_BPSK_ Outer_Full_High_CH




B13_N66(5M)_DFT-s-OFDM_QPSK_ Outer_Full_High_CH




B13_N66(10M)_DFT-s-OFDM_BPSK_Edge_ 1RB_Left_Low_CH

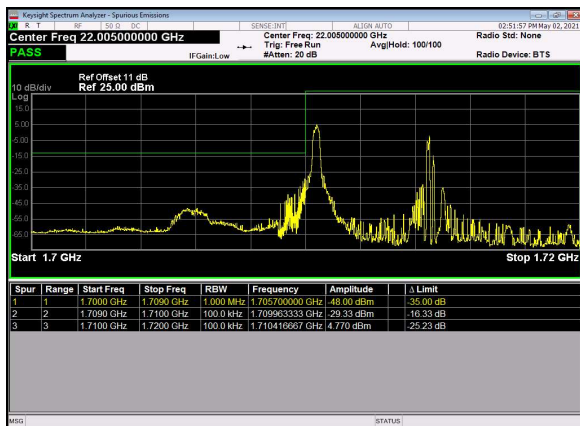

B13_N66(10M)_DFT-s-OFDM_QPSK_Edge_ 1RB_Left_Low_CH

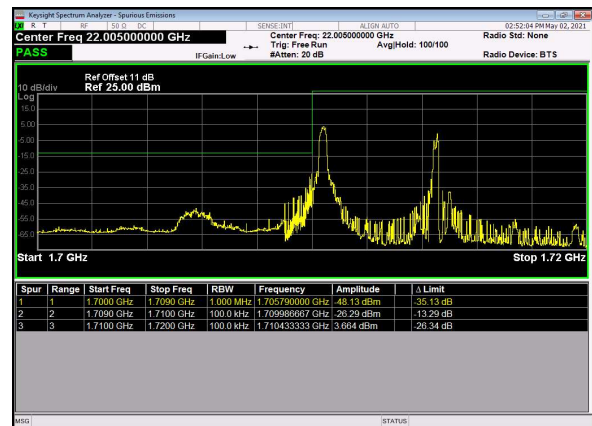

B13_N66(10M)_DFT-s-OFDM_BPSK_ Outer_Full_Low_CH

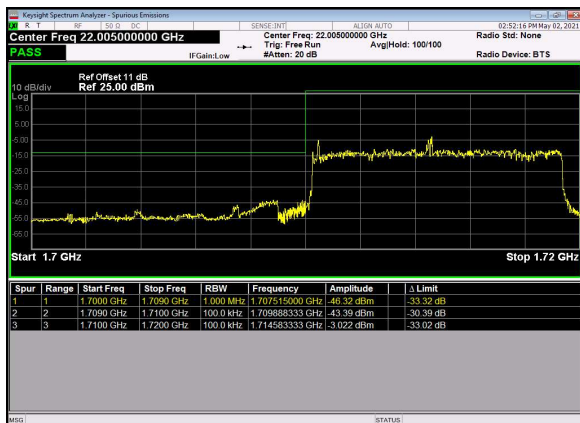

B13_N66(10M)_DFT-s-OFDM_QPSK_ Outer_Full_Low_CH

